



FCC TEST REPORT

Page 1 of 22

LAB LOCATION:
DATE IN:

DONG GUAN, CHINA
July 19, 2016

REPORT NUMBER:
DATE OUT:

65316-050906
July 30, 2016

Product Description : NetBright High Performance Security Light

Style No. : MBN3000

P.O/Order No. : /

FCC ID : W7DMBN3000

Applicant's name : Wireless Environment LLC
Address : 57E Washington Street, Chagrin Falls, Ohio, United States

Manufacturer : Bestek Electronics Co., Ltd
Address : Xueyuan Road, 3rd Ind. Zone, Longxi, Longgang Town, Shenzhen, China Bestek Electronics Co., Ltd

Laboratory Name : Modern Testing Services (Dongguan) Limited
Address : No.76, Liang Ping Road, Xin Jiu Wei Village, Liaobu, Town Dongguan City, Guangdong Province, China
Tel: (86)769-81120818
Fax: (86)769-81120815

Report No. : 63116-050906



FCC TEST REPORT

TEST RESULT CERTIFICATION

Applicant's name : Wireless Environment LLC
Address : 57E Washington Street, Chagrin Falls, Ohio, United States

Manufacture's Name..... : Bestek Electronics Co., Ltd
Address : Xueyuan Road,3'rd Ind.Zone,Longxi,Longgang Town,
Shenzhen,China Bestek Electronics Co., Ltd

Product description

Trade Mark: /
Product name : NetBright High Performance Security Light
Style No. :

Standards : FCC Rules and Regulations Part 15 Subpart C Section 15.231
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Modern Testing Services (Dongguan) Limited is acknowledged as copyright owner and source of the material. Modern Testing Services (Dongguan) Limited takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.


Date of Test :
Date (s) of performance of tests : **July 19, 2016 ~ July 30, 2016**
Date of Issue..... : **July 30, 2016**
Test Result..... : **Pass**

Prepared by:



JANG Ping, Loken
Project Engineer

Reviewed by:



WANG Yang, Oscar
Project Supervisor

Approved by:



CHEN Chu Peng, Ken
EMC Manager

Table of Contents

Page

Table of Contents	Page
1 . TEST SUMMARY	5
2 . GENERAL INFORMATION	6
2.1 General description of EUT	6
2.2 Carrier frequency of channels	7
2.3 Operation of EUT during testing	7
2.4 Description of test setup	7
2.5 Measurement instruments list	8
3 . RADIATED EMISSION TEST	10
3.1 Block diagram of test setup	10
3.2 Limits	11
3.3 Test procedure	11
3.4 Test result	11
4 . DUTY CYCLE	14
4.1 Limits	14
4.2 Test procedure	14
4.3 Test Result	14
5 . OCCUPIED BANDWIDTH MEASUREMENT	16
5.1 Block diagram of test setup	16
5.2 Limits	16
5.3 Test procedure	16
5.4 Test Result	16
6 . DEACTIVATION TIME	18
6.1 Block diagram of test setup	18
6.2 Limits	18
6.3 Test procedure	18
6.4 Test Result	18
7 . AC POWER LINE CONDUCTED EMISSION	20
7.1 Block diagram of test setup	20
7.2 Limits	20
7.3 Test procedure	20
7.4 Test Result	20
8 . ANTENNA REQUIREMENT	21



FCC TEST REPORT

Table of Contents	Page
9 . POTOGRAPH OF TEST	22
9.1 Radiated Emission	22

1. TEST SUMMARY

1.1 Description of Test

FCC Rules	Description of Test	Result
Section 15.231(a)	Electric Field Strength of Fundamental Emission	Compliant
Section 15.231(a)	Electric Field Strength of Spurious Emission	Compliant
Section 15.231(b)	Duty Cycle	Compliant
Section 15.231(c)	20dB bandwidth & 99% bandwidth	Compliant
FCC §15.231(a)	Deactivation Time	Compliant
Section 15.207	AC Power Line Conducted Emission Test	Compliant
Section 15.203	Antenna Requirement	Compliant

1.2 Test Location

Test Firm : Dongguan Dongdian Testing Service Co., Ltd
 Address : No.17 Zongbu road 2, Songshan Lake Sci&Tech, DongGuan
 City, Guangdong province,523808 China
 FCC Registration Number: 270092

1.3 Measurement Uncertainty

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2
 Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2
 Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2
 Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2

2. GENERAL INFORMATION

2.1 General description of EUT

Equipment	NetBright High Performance Security Light
Model Name	MBN3000
Serial No	/
FCC ID	W7DMBN3000
Model Difference	/
Modulation Type	ASK
Antenna Type	Internal Antenna
Operation frequency	433.92MHz
Number of Channels	1
Power Source	DC 6V
Power Rating	/
Adapter Model	/

2.2 Carrier frequency of channels

CH1: 433.92MHz

2.3 Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode**

Channel 1: 433.92MHz

2.4 Description of test setup



2.5 Measurement instruments list


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 10, 2016	1 Year
2.	LISN	SchwarzBeck	NSLK 8126	8126377	May 10, 2016	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 10, 2016	1 Year
4.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
5.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 10, 2016	1 Year
6.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 12, 2016	1 Year
7.	Pre-amplifier	Compliance Direction	PAP-0203	22008	May 10, 2016	1 Year
8.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
9.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 10, 2016	1 Year
10.	LISN	SchwarzBeck	NSLK 8126	8126377	May 10, 2016	1 Year
11.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 10, 2016	1 Year
12.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
13.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 10, 2016	1 Year
14.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May 10, 2016	1 Year
15.	LISN	SchwarzBeck	NSLK 8126	8126377	May 10, 2016	1 Year
16.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May 10, 2016	1 Year
17.	EMI Test Software ES-K1	Rohde & Schwarz	N/A	N/A	N/A	N/A
18.	Programmable AC Power source	SOPH POWER	PAG-1050	630250	May 10, 2016	1 Year
19.	Harmonic and Flicker Analyzer	LAPLACE	AC2000A	272629	May 10, 2016	1 Year
20.	Harmonic and Flicker Test Software AC 2000A	LAPLACE	N/A	N/A	N/A	N/A
21.	ESD Simulators	KIKUSUI	KES4021	LJ003477	May 10, 2016	1 Year
22.	EFT Generator	EMPEK	EFT-4040B	0430928N	May 10, 2016	1 Year
23.	Shielding Room	ChangZhou ZhongYu	JB88	SEL0166	May 10, 2016	1 Year
24.	Signal Generator 9KHz~2.2GHz	R&S	SML02	SEL0143	May 10, 2016	1 Year
25.	Signal Generator 9KHz~1.1GHz	R&S	SML01	SEL0135	May 10, 2016	1 Year
26.	Power Meter	R&S	NRVS	SEL0144	May 10, 2016	1 Year
27.	RF Level Meter		URV35	SEL0137	May 10, 2016	1 Year

28.	Audio Analyzer	R&S	UPL	SEL0136	May 10, 2016	1 Year
29.	RF-Amplifier 150KHz~150MHz	BONN Elektronik	BSA1515-25	SEL0157	May 10, 2016	1 Year
30.	Stripline Test Cell	Erika Fiedler	VDE0872	SEL0167	May 10, 2016	N/A
31.	TV Test Transmitter	R&S	SFM	SEL0159	May 10, 2016	1 Year
32.	TV Generator PAL	R&S	SGPF	SEL0138	May 10, 2016	1 Year
33.	TV Generator Ntsc	R&S	SGMF	SEL0140	May 10, 2016	1 Year
34.	TV Generator Secam	R&S	SGSF	SEL0139	May 10, 2016	1 Year
35.	TV Test Transmitter 0.3MHz~3300MHz	R&S	SFQ	SEL0142	May 10, 2016	1 Year
36.	MPEG2 Measurement Generator	R&S	DVG	SEL0141	May 10, 2016	1 Year
37.	Spectrum Analyzer	R&S	FSP	SEL0177	May 10, 2016	1 Year
38.	Matching	R&S	RAM	SEL0146	N/A	N/A
39.	Matching	R&S	RAM	SEL0148	N/A	N/A
40.	Absorbing Clamp	R&S	MDS21	SEL0158	May 10, 2016	1 Year
41.	Coupling Set	Erika Fiedler	Rco, Rci, MC, AC, LC	SEL0149	N/A	N/A
42.	Filters	Erika Fiedler	Sr, LBS	SEL0150	N/A	N/A
43.	Matching Network	Erika Fiedler	MN, SLT-SYT100- 1M	SEL0151	N/A	N/A
44.	Fully Anechoic Room	ChangZhou ZhongYu	854	SEL0169	May 10, 2016	1 Year
45.	Signal Generator	R&S	SML03	SEL0068	May 10, 2016	1 Year
46.	RF-Amplifier 30M~1GHz	Amplifier Reasearch	250W1000A	SEL0066	Oct. 24, 2015	1 Year
47.	RF-Amplifier 0.8~3.0GHz	Amplifier Reasearch	60S1G3	SEL0065	Oct. 24, 2015	1 Year
48.	Power Meter	R&S	NRVD	SEL0069	May 10, 2016	1 Year
49.	Power Sensor	R&S	URV5-Z2	SEL0071	May 10, 2016	1 Year
50.	Power Sensor	R&S	URV5-Z2	SEL0072	May 10, 2016	1 Year
51.	Software EMC32	R&S	EMC32-S	SEL0082	May 10, 2016	N/A
52.	Log-periodic Antenna	Amplifier Reasearch	ASLT-SYT10 0-1M080	SEL0073	May 10, 2016	N/A
53.	Antenna Tripod	Amplifier Reasearch	TP1000A	SEL0074	May 10, 2016	N/A
54.	High Gain Horn Antenna(0.8-5G Hz)	Amplifier Reasearch	AT4002A	SEL0075	May 10, 2016	N/A


3. RADIATED EMISSION TEST

3.1 Block diagram of test setup


(1) Radiated Emission Test-Up Frequency Below 30MHz

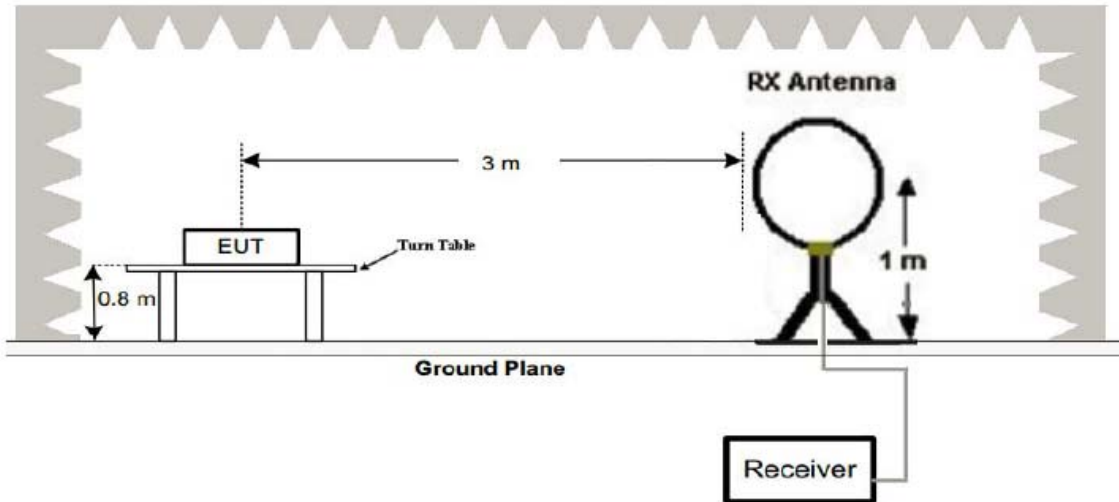

(2) Radiated Emission Test-Up Frequency 30MHz~1GHz

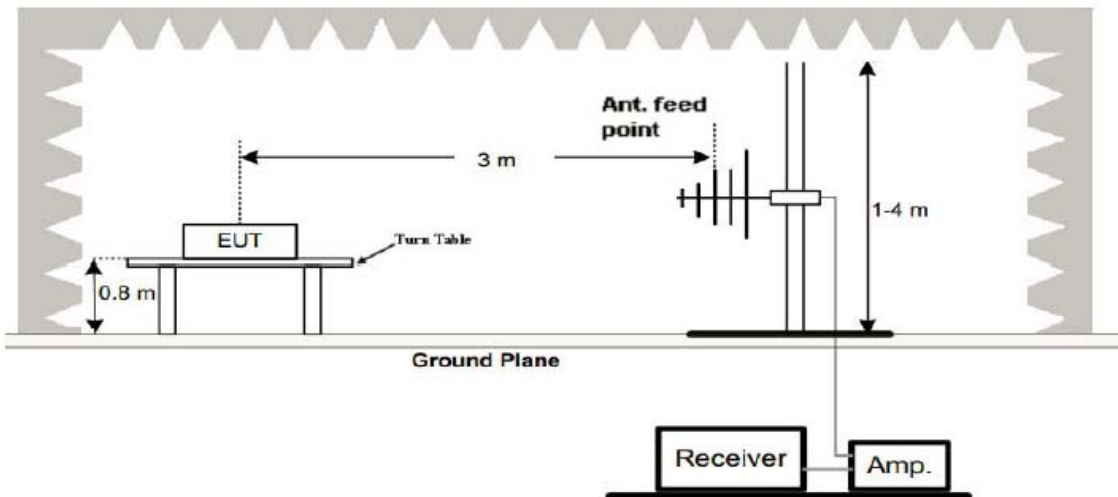

(3) Radiated Emission Test-Up Frequency Above 1GHz

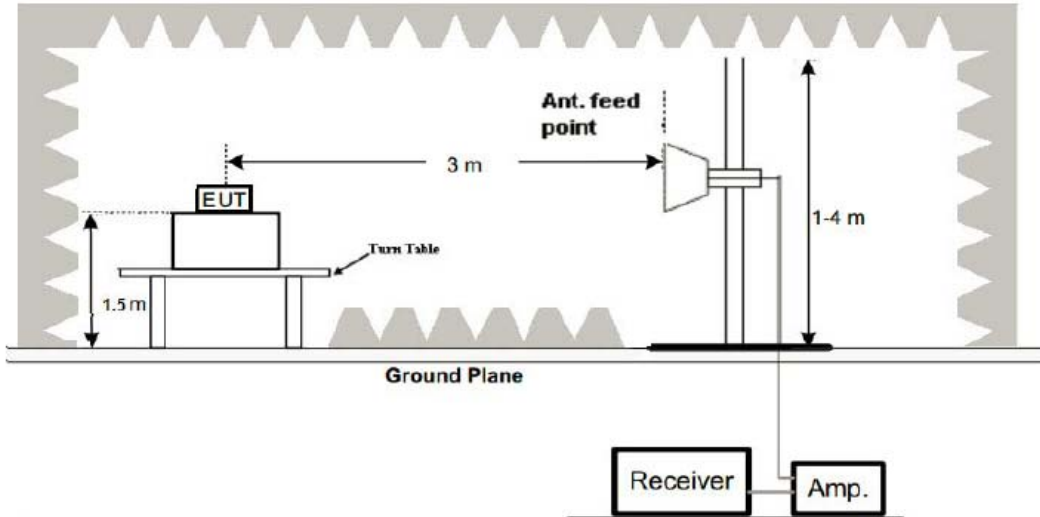

3.2 Limits

For intentional device, according to 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table.

Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(KHz))+40\log(300/3)$	$2400/F(KHz)$
0.49-1.705	3	$20\log(24000/F(KHz))+40\log(30/3)$	$24000/F(KHz)$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

In addition to the provisions of 15.231(b), the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field strength of fundamental (microvolts/meter)	Field strength of spurious emissions (microvolts/meter)
40.66-40.70	2,250	225
70-130	1,250	125
130-174	¹ 1,250 to 3,750	¹ 125 to 375
174-260	3,750	375
260-470	¹ 3,750 to 12,500	¹ 375 to 1,250
Above 470	12,500	1,250

¹ Linear interpolations.

[Where F is the frequency in MHz, the formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 260-470 MHz, μV/m at 3 meters = $41.6667(F) - 7083.3333$. The maximum permitted unwanted emission level is 20 dB below the maximum permitted fundamental level.]

3.3 Test procedure

- 1, Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
- 2, Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
- 3, And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 4, Repeat above procedures until all frequency measurements have been completed.


Note:

For battery operated equipment, the equipment tests shall be performed using a new battery.

3.4 Test result

Pass

Antenna: Horizontal

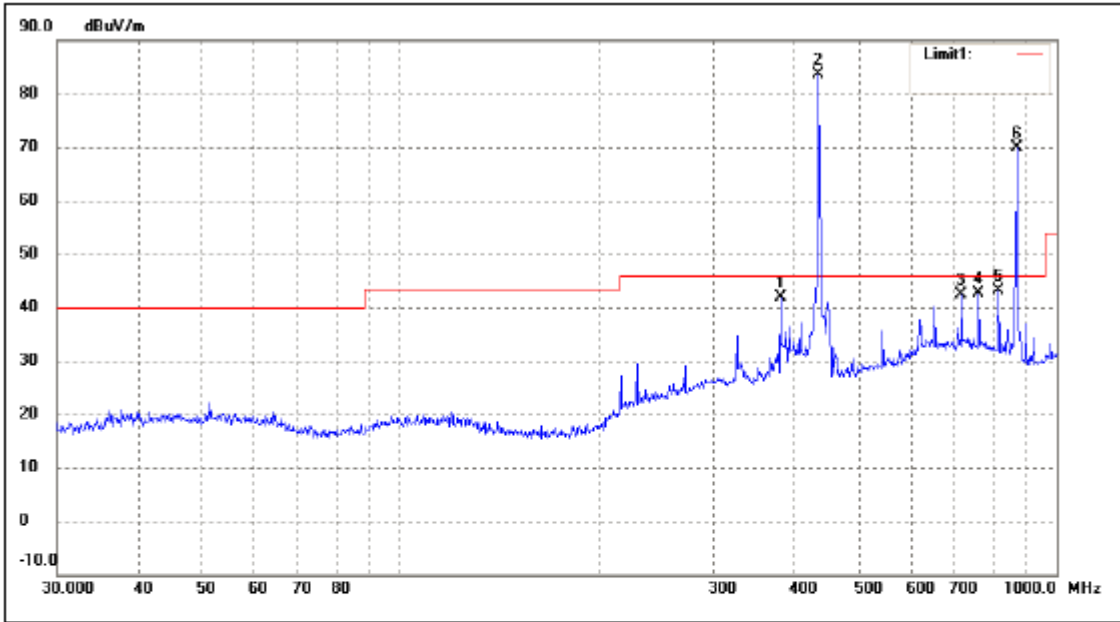


No.	Frequency MHz	Reading dBuV/m	Corr. (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	379.9141	29.98	11.79	N/A	41.77	46.00	-4.23	175	100	peak
4	433.9200	73.83	-3.09	N/A	83.74	100.83	-17.09	145	100	peak
	433.9200	/	/	-12.18	71.56	80.83	-9.37	300	100	Ave
3	716.6820	24.77	17.70	N/A	42.47	46.00	-3.53	200	100	peak
4	760.7036	24.47	18.10	N/A	42.57	46.00	-3.43	310	100	peak
5	815.9678	27.42	15.80	N/A	43.22	46.00	-2.78	205	100	peak
6	867.8400	53.97	15.94	N/A	69.91	80.83	-8.08	212	100	peak
	867.8400	/	/	-12.18	57.73	60.83	-3.10	227	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. Factor (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.7600	71.49	-13.14	N/A	58.35	80.83	-22.48	210	150	Peak
2	1735.6800	65.25	-9.34	N/A	52.66	80.83	-28.17	180	150	Peak
3	2169.6000	64.16	-2.86	N/A	61.30	80.83	-19.53	210	150	Peak
	1301.7600	/	/	-12.18	46.17	60.83	-14.66	123	150	Ave
	1735.6800	/	/	-12.18	40.48	60.83	-20.35	228	150	Ave
	2169.6000	/	/	-12.18	49.12	60.83	-11.71	159	150	Ave

Antenna: Vertical

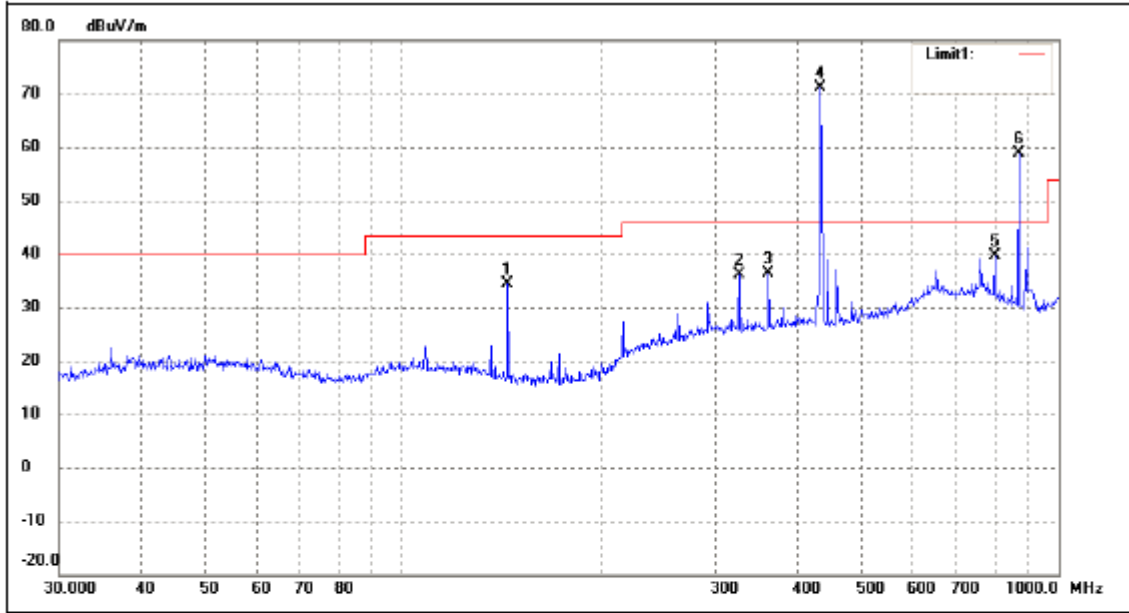

No.	Frequency MHz	Reading dBuV/m	Corr. (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin (dB)	Deg. (°)	Height (cm)	Remark
1	144.8418	31.40	2.96	N/A	34.36	43.50	-9.14	310	100	peak
2	325.5958	24.42	11.77	N/A	36.19	46.00	-9.81	172	100	peak
3	361.7139	24.37	11.90	N/A	36.27	46.00	-9.73	190	100	peak
4	434.0651	58.83	12.31	N/A	71.14	100.83	-29.69	256	100	peak
	433.9200	/	/	-12.18	58.96	80.83	-21.93	321	100	Ave
5	798.9796	23.22	16.34	N/A	39.56	46.00	-6.44	241	100	peak
6	867.8400	43.03	15.94	N/A	58.97	80.83	-21.94	89	100	peak
	867.8400	/	/	-12.18	46.79	60.83	-14.04	178	100	Ave

Above 1GHz

No.	Frequency MHz	Reading dBuV/m	Corr. (dB)	Dutycycle Factor (dB)	Result dBuV/m	Limit dBuV/m	Margin dB	Deg. (°)	Height (cm)	Remark
1	1301.7600	71.53	-13.14	N/A	58.39	80.83	-22.44	211	150	Peak
2	1735.6800	62.01	-9.35	N/A	52.66	80.83	-28.17	123	150	Peak
3	2169.6000	61.34	-2.79	N/A	58.55	80.83	-22.28	256	150	Peak
	1301.7600	/	/	-12.18	46.21	60.83	-14.62	143	150	Ave
	1735.6800	/	/	-12.18	40.48	60.83	-20.35	258	150	Ave
	2169.6000	/	/	-12.18	46.37	60.83	-14.46	149	150	Ave

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The fundamental frequency is 433.92MHz, so the fundamental and spurious emissions radiated limit base on the the operating frequency 433.92MHz.

4. DUTY CYCLE

4.1 Limits

According to FCC Part 15.231 (b)(2) and 15.35 (c), For pulse operation transmitter, the averaging pulsed emissions are calculated by peak value of measured emission plus duty cycle factor.

4.2 Test procedure


- a. With the EUT's antenna attached, the EUT's output signal was received by the test antenna, which was connected to the spectrum analyzer. Set the center frequency to 433.92MHz, than set the spectrum analyzer to Zero Span for the release time reading. During the testing, the switch was released then the EUT automatically deactivated.


4.3 Test Result

Type of Pulse	Width of Pulse ms	Quantity of Pulse	Transmission Time ms	Total Time (T _{on}) ms
Pulse 1 (Wide)	1.18	4	4.72	12.70
Pulse 2 (Narrow)	0.38	21	7.98	


Test Period (T _p) ms	Total Time (T _{on}) ms	Duty Cycle %	Duty Cycle Factor dB
51.60	12.70	24.61	-12.18

The spectrum analyzer plots are attached as below.

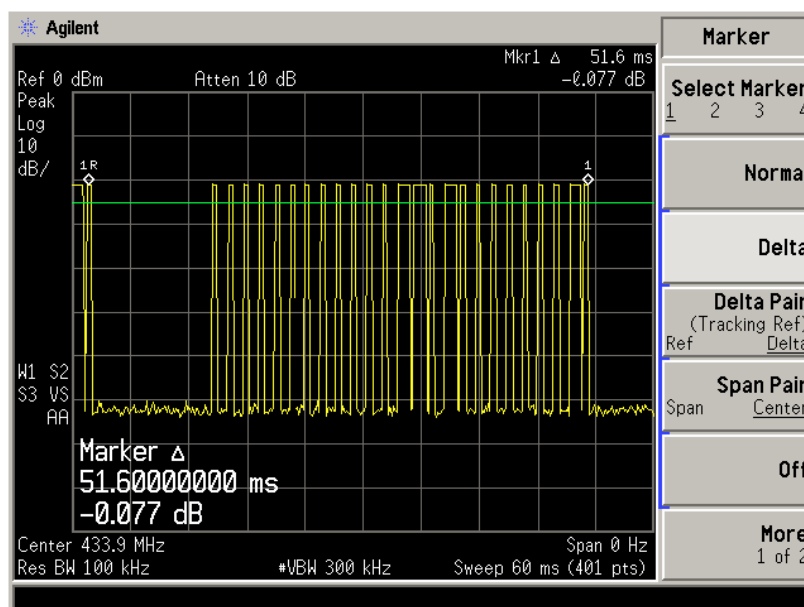

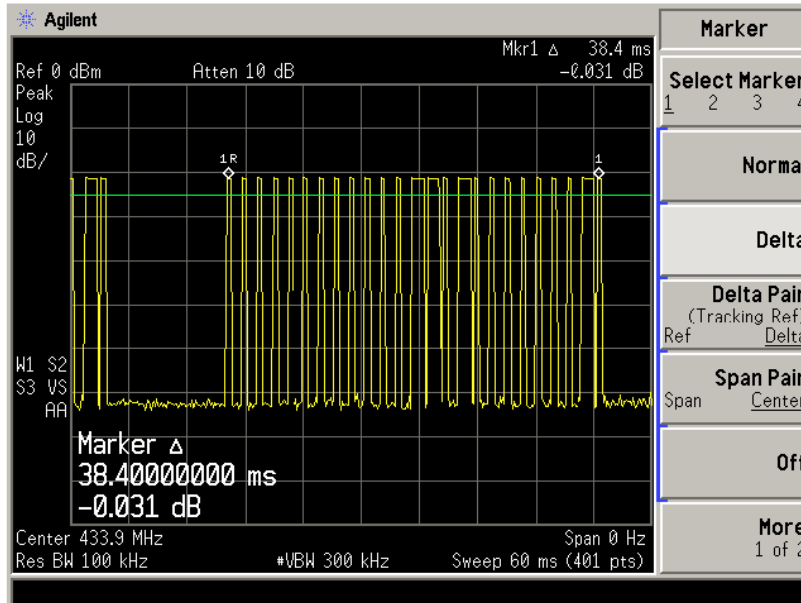


Marker	
Select Marker	1 2 3 4
Normal	
Delta	
Delta Pair (Tracking Ref)	Ref Delta
Span Pair	Span Center
Off	
More	1 of 2

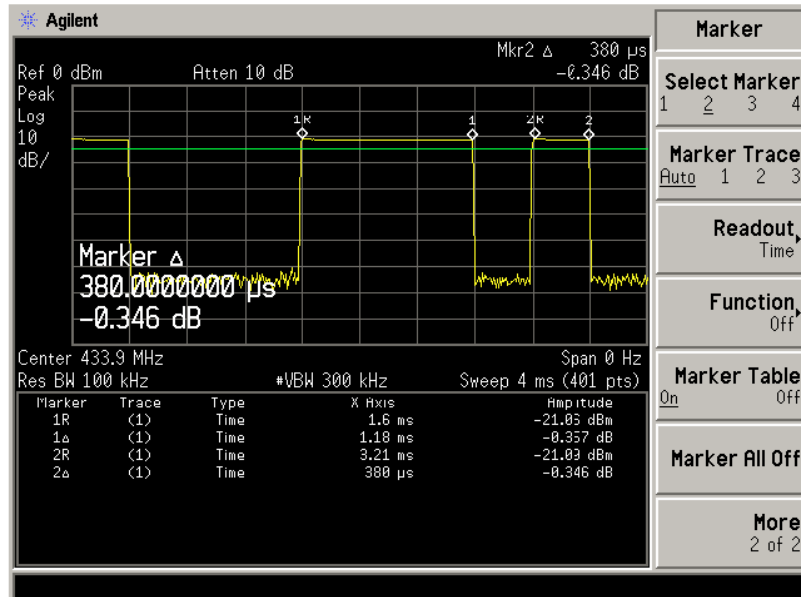

Marker	
Select Marker	1 2 3 4
Marker Trace	Auto 1 2 3
Readout, Time	
Function, Off	
Marker Table	On Off
Marker All Off	
More	2 of 2

5. OCCUPIED BANDWIDTH MEASUREMENT

5.1 Block diagram of test setup

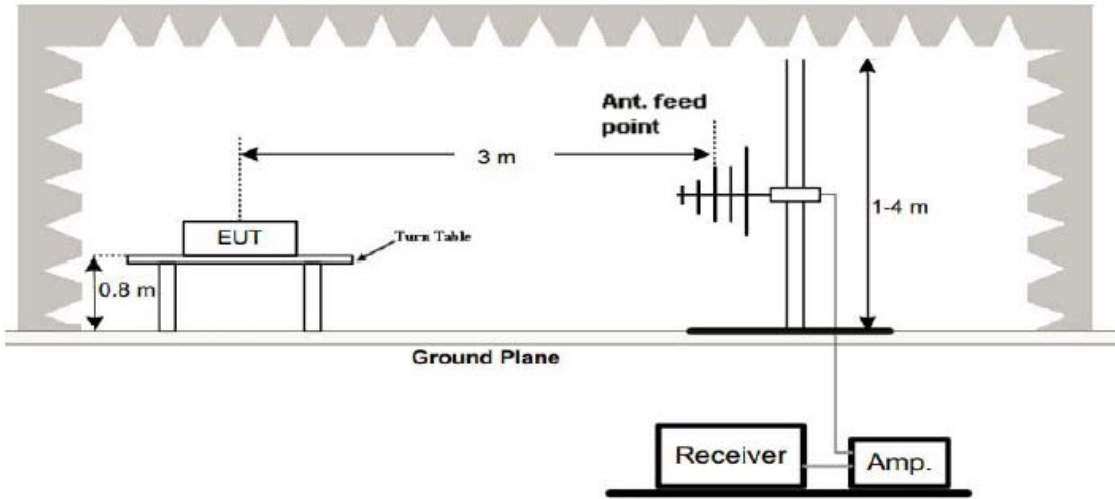

5.2 Limits

According to 47 CFR 15.231(c) The bandwidth of the emission shall be no wider than 0.25% of the centre frequency for devices operating above 70MHz and below 900MHz. Bandwidth is determined at the points 20dB down from the modulated carrier.


5.3 Test procedure

- a. The 20dB bandwidth and 99% bandwidth is measured with a spectrum analyzer connected via a receive antenna placed near the EUT while the EUT is operating in transmission mode
- b. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

5.4 Test Result


Channel Frequency(MHz)	Modulation	20dB bandwidth (KHz)	Limit (KHz)	Result
433.92MHz	ASK	51.489	$433.92 \times 0.25\% = 1084.8$	Pass

The spectrum analyzer plots are attached as below.

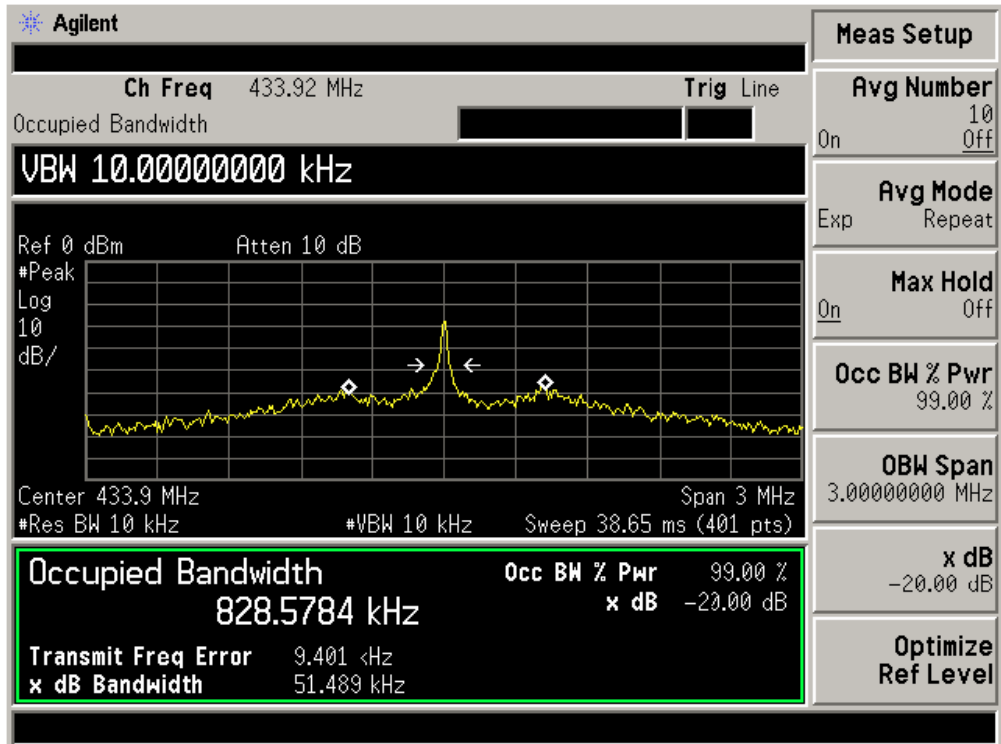

6. DEACTIVATION TIME

6.1 Block diagram of test setup

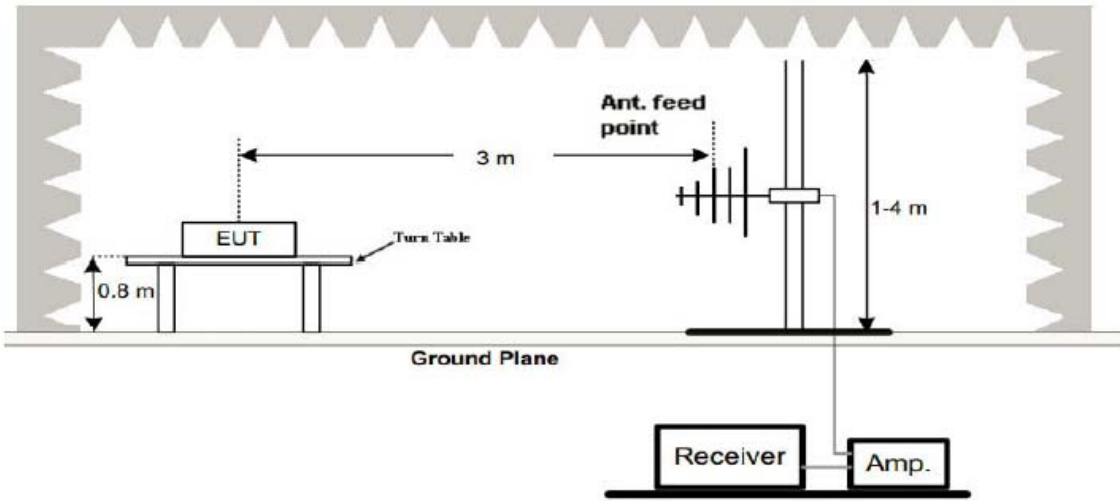

6.2 Limits

According to FCC §15.231(a)(1), A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released


6.3 Test procedure

- a. The EUT was placed on a wooded table which is 0.8m height and close to receiver antenna of spectrum analyzer
- b. The spectrum analyzer resolution bandwidth was set to 1 MHz and video bandwidth was set to 1 MHz to encompass all significant spectral components during the test. The spectrum analyzer was operated in linear scale and zero span mode after tuning to the transmitter carrier frequency.

6.4 Test Result


Pass

Transmission Type	Test Frequency MHz	Transmission Time seconds	Limit s	Result
Manually	433.92	0.240	5	Pass

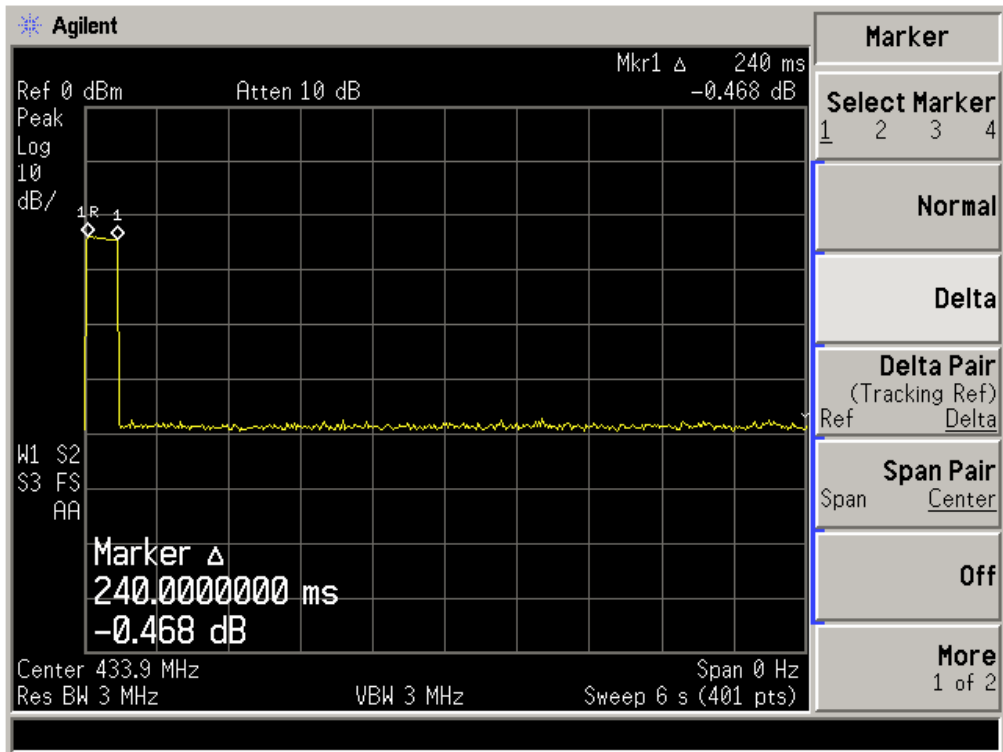

7. AC POWER LINE CONDUCTED EMISSION

7.1 Block diagram of test setup

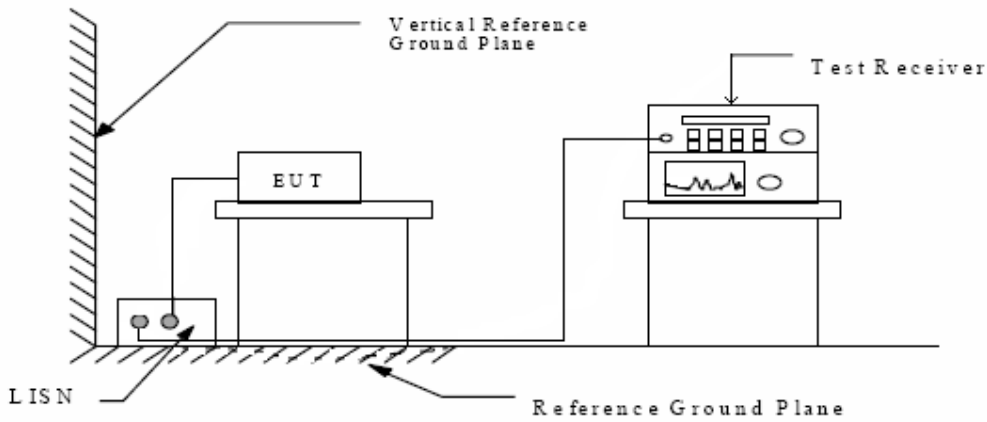

7.2 Limits

Conducted Emission Measurement Limits According to Section 15.207(a)

Frequency MHz	Limits (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

* Decreases with the logarithm of the frequency.

7.3 Test procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC lines are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.4: 2003 on Conducted Emission Measurement.

The bandwidth of test receiver (R & S ESPI) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked.

7.4 Test Result

N/A


No measurement is required as the EUT is a battery operated product.

8. ANTENNA REQUIREMENT

According to Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna is fixed by enclosure, can not be changed except take apart the product.

Antenna

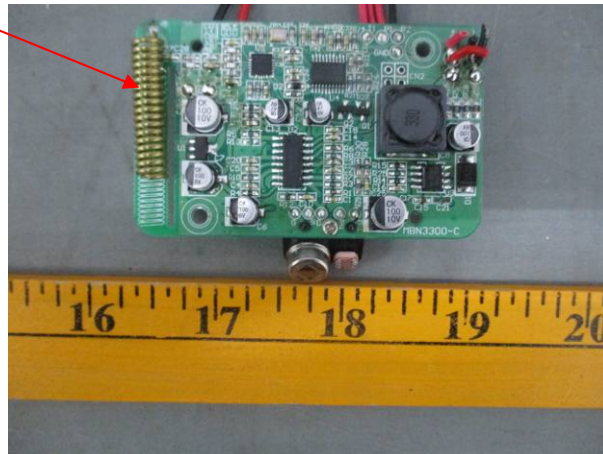

9. POTOGRAPH OF TEST

9.1 Radiated Emission

