

Application for FCC Certificate
On Behalf of

TTE Technology, Inc.

LCD TV or LED TV

Model Number: 55R81

Additional Model: 55RH1, 55R80, 55VH, 55D1800, ***55***

FCC ID: W8U55R81

Prepared for:	TTE Technology, Inc.
	2455 Anselmo Drive Suite 101 Corona California United States
Prepared By:	EST Technology Co., Ltd.
	Chilingxiang, Qishantou, Santun, Houjie, Dongguan, Guangdong, China
	Tel: 86-769-83081888-808




Report Number:	ESTE-F1712014
Date of Test:	Dec. 04~07, 2017
Date of Report:	Dec. 08, 2017




TABLE OF CONTENTS

	Page
Test Report Declaration	
1. GENERAL PRODUCT INFORMATION	4
1.1. Product Function	4
1.2. Difference between Model Numbers	4
1.3. Independent Operation Modes	4
2. TEST SITES.....	5
2.1. Description of Standards and Results.....	5
2.2. Test Facilities	6
2.3. List of Test and Measurement Instruments	7
3. TEST SET-UP AND OPERATION MODES	8
3.1. Principle of Configuration Selection.....	8
3.2. Block Diagram of Test Set-up.....	8
3.3. Test Operation Mode and Test Software.....	9
3.4. Special Accessories and Auxiliary Equipment	9
3.5. Countermeasures to Achieve EMC Compliance.....	9
4. EMISSION TEST RESULTS.....	10
4.1. Conducted Emission at the Mains Terminals Test.....	10
4.2. Radiated Emission Test.....	13
5. PHOTOGRAPHS OF TEST SET-UP	19
5.1. Set-up for conducted emission at the mains terminals test.....	19
5.2. Set-up for radiated emission test (30-1000MHz)	20
5.3. Set-up for radiated emission test (Above 1GHz)	21
6. PHOTOGRAPHS OF THE EUT	22

EST Technology Co., Ltd.

Applicant:	TTE Technology, Inc.		
Address:	2455 Anselmo Drive Suite 101 Corona California United States		
Manufacturer	TCL King Electrical Appliances (Huizhou) Co., Ltd		
Address:	Section 19, ZhongKai New and High-tech Industries Development Zone, Huizhou. Guangdong, P. R. China		
Factory :	TCL King Electrical Appliances (Huizhou) Co., Ltd		
Address:	Section 19, ZhongKai New and High-tech Industries Development Zone, Huizhou. Guangdong, P. R. China		
E.U.T:	LCD TV or LED TV		
Model Number:	55R81		
Additional Model:	55RH1, 55R80, 55VH, 55D1800, ***55*** (* can be A-Z, 0-9 or "-" or blank) Note: products are only different models and sales methods.		
Trade Name:	HITACHI, TCL	Serial No.:	-----
Date of Receipt:	Dec. 04, 2017	Date of Test:	Dec. 04~07, 2017
Test Specification:	FCC Rules and Regulations Part 15 Subpart B:2016 ANSI C63.4:2014		
Test Result:	<p>The device described above is tested by EST Technology Co., Ltd. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart B requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.</p> <p style="text-align: right;">Issue Date: Dec. 08, 2017</p>		
Prepared by:	Reviewed by:	Approved by:	
			
Amy / Assistant	Tony / Engineer	Iceman Hu / Manager	
Other Aspects:	None.		
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			

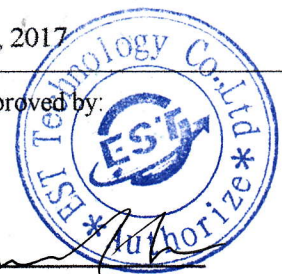

1. GENERAL PRODUCT INFORMATION

1.1. Product Function

Refer to Technical Construction Form and User Manual.

1.2. Difference between Model Numbers

Note: It's just that the sales area is different, other is exactly the same.

1.3. Independent Operation Modes

1.3.1. Conducted Modes

1	HDMI(3840*2160+Running "H" Pattern)	Worst case
2	HDMI(1920*1080+Running "H" Pattern)	
3	HDMI(800*600+Running "H" Pattern)	
4	Connect to PC	
Note: The worst case will be recorded in this report.		

1.3.2. Radiated Modes

30MHz~1GHz		
1	HDMI(3840*2160+Running "H" Pattern)	Worst case
2	HDMI(1920*1080+Running "H" Pattern)	
3	HDMI(800*600+Running "H" Pattern)	
4	Connect to PC	
Above 1GHz		
1	HDMI(3840*2160+Running "H" Pattern)	Worst case
2	HDMI(1920*1080+Running "H" Pattern)	
3	HDMI(800*600+Running "H" Pattern)	
4	Connect to PC	
Note: The worst case will be recorded in this report.		

2. TEST SITES

2.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below

EMISSION			
Description of Test Item	Standard	Limits	Results
Conducted disturbance at mains terminals	FCC Rules and Regulations Part 15 Subpart B:2016 ANSI C63.4:2014	15.107(a) Class B	PASS
		Minimum passing margin is 13.69dB at 0.15MHz	
Radiated Emission Test	FCC Rules and Regulations Part 15 Subpart B:2016 ANSI C63.4:2014	15.109(a) Class B	PASS
		Minimum passing margin is 9.37dB at 891.36MHz for 30-1000MHz; Minimum passing margin is 5.22dB at 2690.00MHz for above 1GHZ;	

2.3. List of Test and Measurement Instruments

2.3.1. For conducted emission at the mains terminals test (844 Room)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June 17,17	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	June 17,17	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June 17,17	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

2.3.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESR7	101780	June 17,17	1 Year
Bilog Antenna	Teseq	CBL 6111D	37062	June 08,17	1 Year
Horn Antenna	SCHWARZBECK	BBHA9120D	8128-290	June 08,17	3 Year
Signal Amplifier	SCHWARZBECK	BBV9718	9718-212	June 17,17	1 Year
Test Software	Audix	e3-6.111221a	N/A	N/A	N/A

Note: All calibration reports of the equipment were provided by CEPREI calibration and Test Center


3. TEST SET-UP AND OPERATION MODES

3.1. Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators

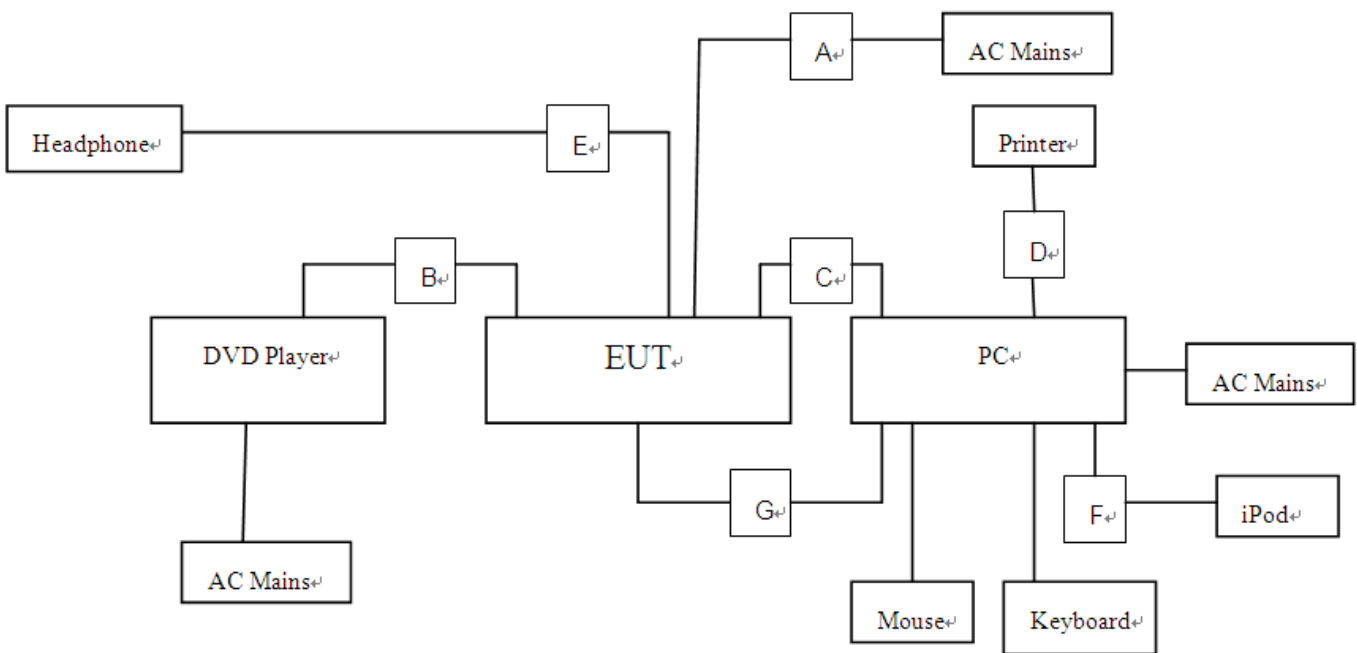

(EUT: LCD TV or LED TV)

A	AC Line	Unshielded, Undetachable 1.2m
B	AV IN	Unshielded, Detachable 1.2m
C	HDMI	Shielded, Detachable 1.2m
D	USB Cabel	Shielded, Detachable 1.8m
F	USB Cabel	Shielded, Detachable 1.0m
G	Network Cable	Unshielded, Detachable 1.2m

3.3. Test Operation Mode and Test Software

Refer to Test Setup in clause 4.

3.4. Special Accessories and Auxiliary Equipment

3.4.1. PC

M / N : VOSTRO
Manufacturer : DELL
Power Cord : Unshielded, Detachable, 1.6m

3.4.2. DVD Player

M / N : DVDHDMI01
Manufacturer : SAMWIN
Data Cable : Shielded, Undetachable, 1.6m

3.4.3. Printer

M / N : HP1020
Manufacturer : HP
Data Cable : Non-shielded, Detachable, 1.5m

3.4.4. Mouse

M / N : MOL5VO
S / N : JOQ03RNT
Manufacturer : Dell
cable : Shielded, Undetachable, 1.5m

3.4.5. Keyboard

M / N : L100
S / N : CN-0RH656-65890-01M-070T
Manufacturer : Dell
cable : Shielded, Undetachable, 1.8m

3.4.6. iPod

M / N : A1238
S / N : 8K044D2Z9ZU
Manufacturer : Apple

3.5. Countermeasures to Achieve EMC Compliance

None.

4. EMISSION TEST RESULTS

4.1. Conducted Emission at the Mains Terminals Test

RESULT : **Pass**
Test Procedure : ANSI C63.4:2014
Frequency Range : 0.15 to 30MHz
Test Site : Shielded Room
Limits : FCC Part 15:2016 Class B


Test Setup

Date of Test : Dec. 04, 2017
M/N : 55R81
Input Voltage : AC 120V/60Hz
Operation Mode : HDMI

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

The test data of the worst case condition(s) was reported on the following page.

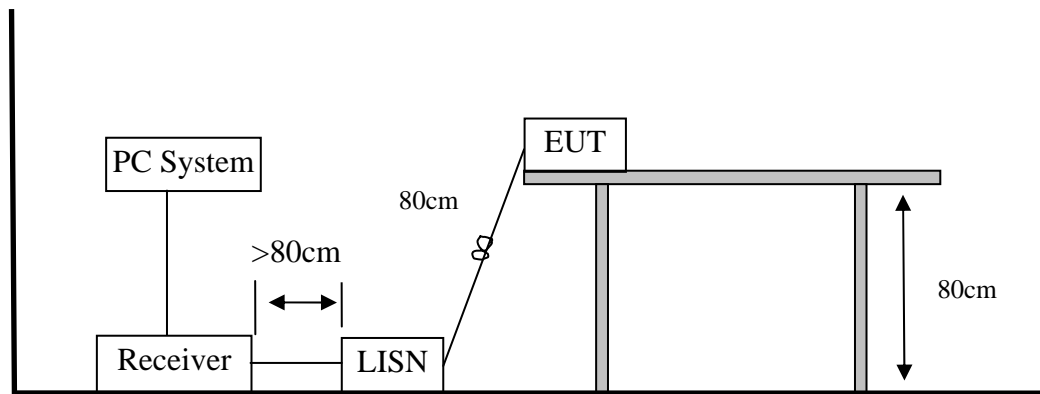

Note: Measurement Uncertainty: ± 3.48 dB at a level of confidence of 95%.


Test Data

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 5 File: \\Emc-ce-2\Test Data\2017\TCL\EM6 (36)

Date: 2017-12-04

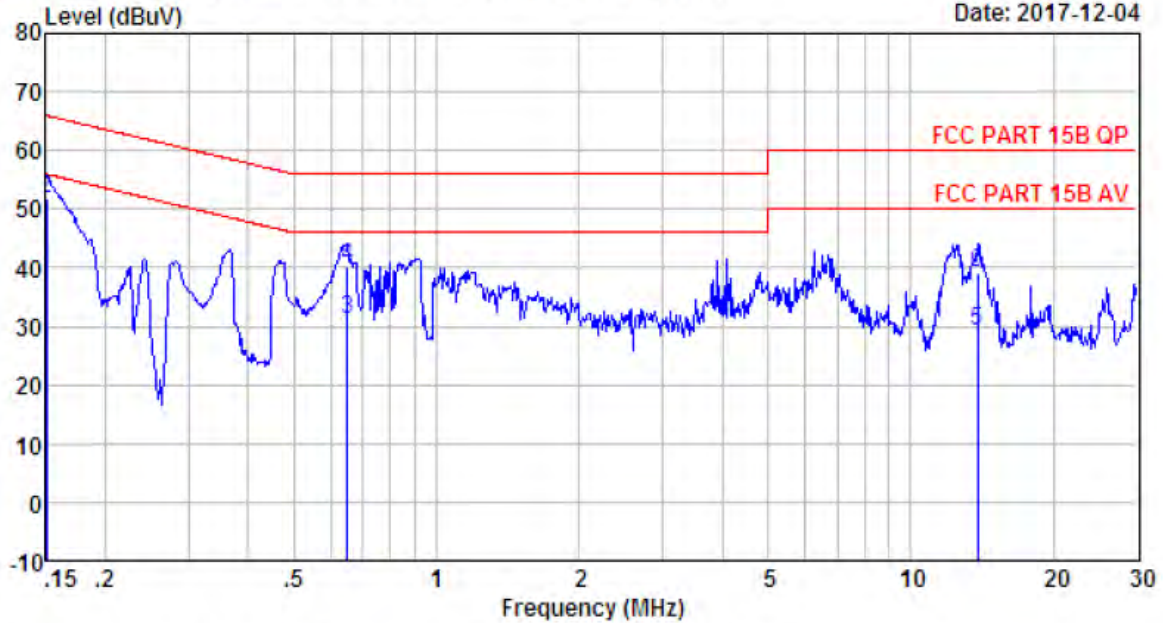

Site no : 2# Conduction Shield Room Data no. : 5
 Env. / Ins. : Temp:25.3'C Humi:45% Press:101.50kPa LINE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Bible
 EUT : LCD TV or LED TV
 Power : AC 120V/60Hz
 M/N : 55R81
 Test Mode : HDMI(3840*2160+Running "H" Pattern)


	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.15	9.66	0.04	30.21	39.91	56.00	16.09	Average
2	0.15	9.66	0.04	42.21	51.91	66.00	14.09	QP
3	0.65	9.77	0.05	21.22	31.04	46.00	14.96	Average
4	0.65	9.77	0.05	30.22	40.04	56.00	15.96	QP
5	13.84	9.92	0.08	19.22	29.22	50.00	20.78	Average
6	13.84	9.92	0.08	29.22	39.22	60.00	20.78	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.



EST Technology

Data: 7 File: \\Emc-ce-2\Test Data\2017\TTCLE.M6 (36) Date: 2017-12-04

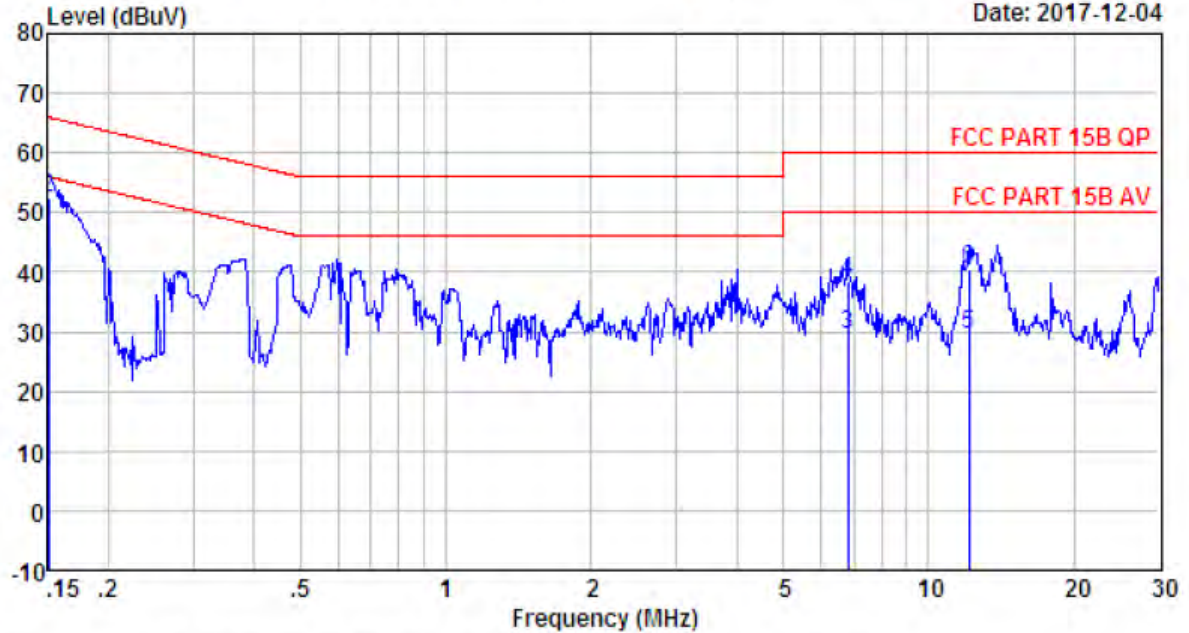

Site no : 2# Conduction Shield Room Data no. : 7
 Env. / Ins. : Temp:25.3'C Humi:45% Press:101.50kPa LINE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Bible
 EUI : LCD TV or LED TV
 Power : AC 120V/60Hz
 M/N : 55R81
 Test Mode : HDMI(3840*2160+Running "H" Pattern)

	Freq. (MHz)	LISN Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.15	9.64	0.04	30.63	40.31	56.00	15.69	Average
2	0.15	9.64	0.04	42.63	52.31	66.00	13.69	QP
3	6.81	9.94	0.08	19.61	29.63	50.00	20.37	Average
4	6.81	9.94	0.08	28.61	38.63	60.00	21.37	QP
5	12.12	10.02	0.08	19.44	29.54	50.00	20.46	Average
6	12.12	10.02	0.08	30.44	40.54	60.00	19.46	QP

Remarks: 1. Emission Level= LISN Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. If the average limit is met when using a quasi-peak detector,
 the EUI shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4.2. Radiated Emission Test

RESULT : **Pass**
Test Procedure : ANSI C63.4:2014
Frequency Range : 30-1000 MHz;1-6 GHz
Test Site : 966 Chamber
Limits : FCC Part 15:2016 Class B

Test Setup

Date of Test : Dec. 04, 2017
M/N : 55R81
Input Voltage : AC 120V/60Hz
Operation Mode : HDMI

The EUT was placed on a turn table which was 0.8 m above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.


The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.

The bandwidth setting on the test receiver was 120 kHz.


The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

The test data of the worst case condition(s) was reported on the following page.

1、 In Semi-anechoic Chamber Test Setup Diagram for 30MHz~1000MHz

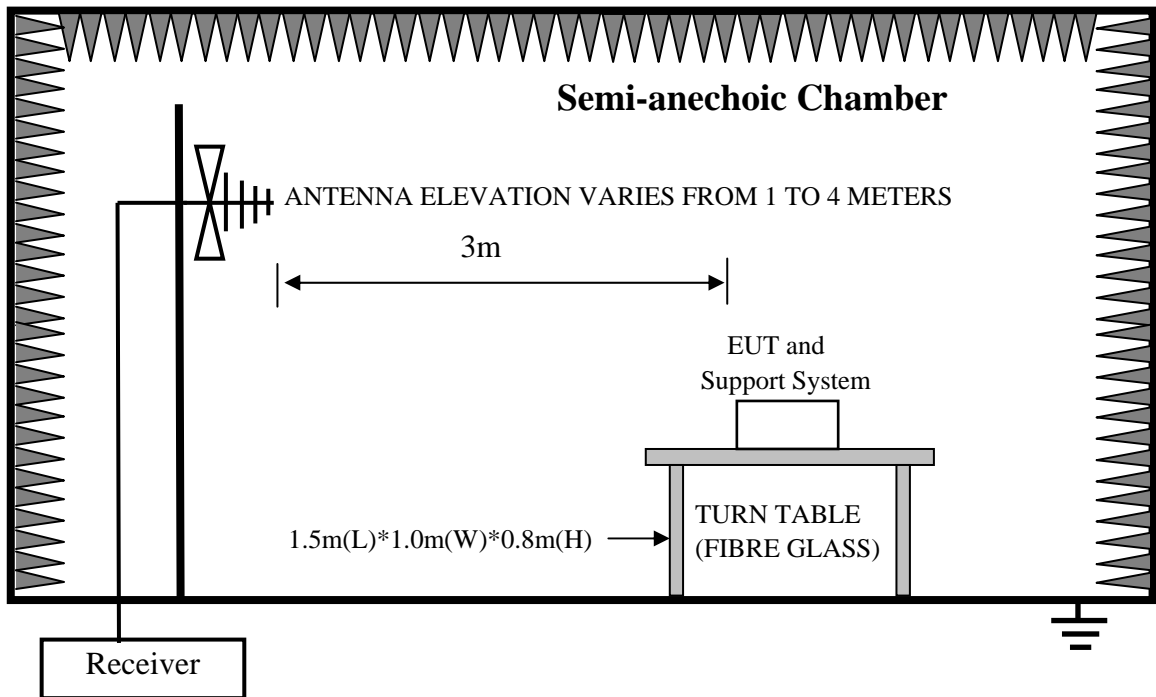

2、 In Anechoic Chamber Test Setup Diagram for 1-6GHz

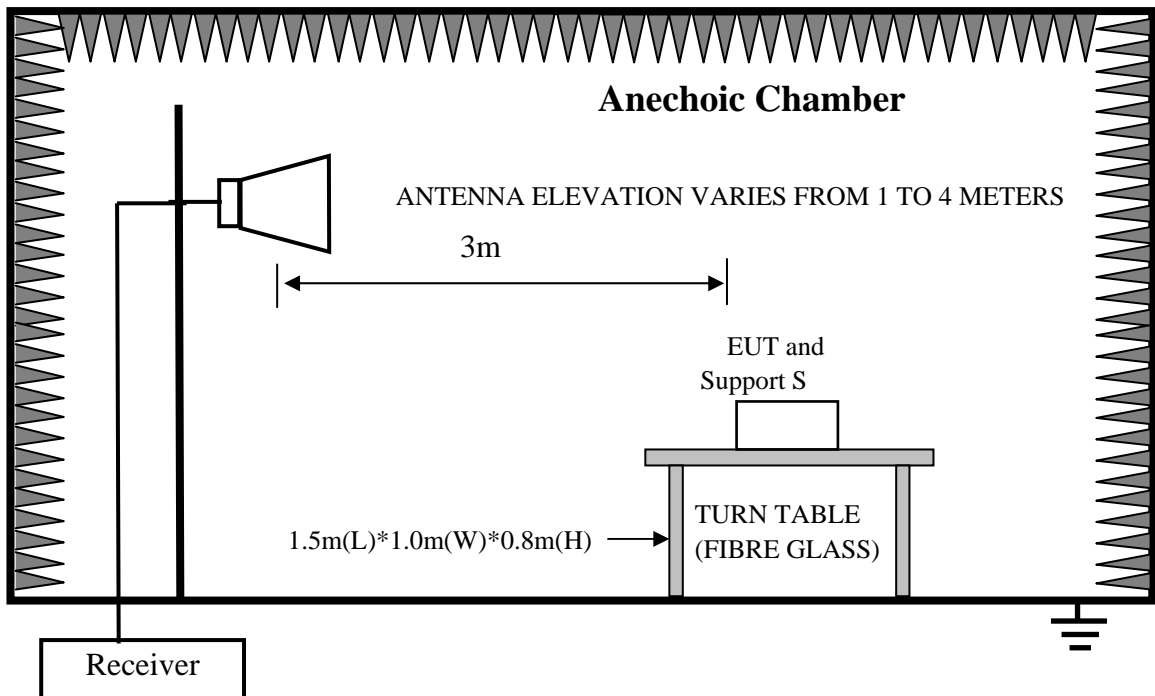

Note: Test uncertainty: ± 4.6 dB (H); ± 4.68 dB (V) at a level of confidence of 95%(30MHz ~ 1GHz); Test uncertainty: ± 4.96 dB at a level of confidence of 95%(Above 1GHz).


Test Data

30MHz-1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel: +86-769-83081888
Fax: +86-769-83081878

Data: 168 File: \\Emc-966-1\test data\2017\EMC\T\TCL.EM6 (199) Date: 2017-12-04

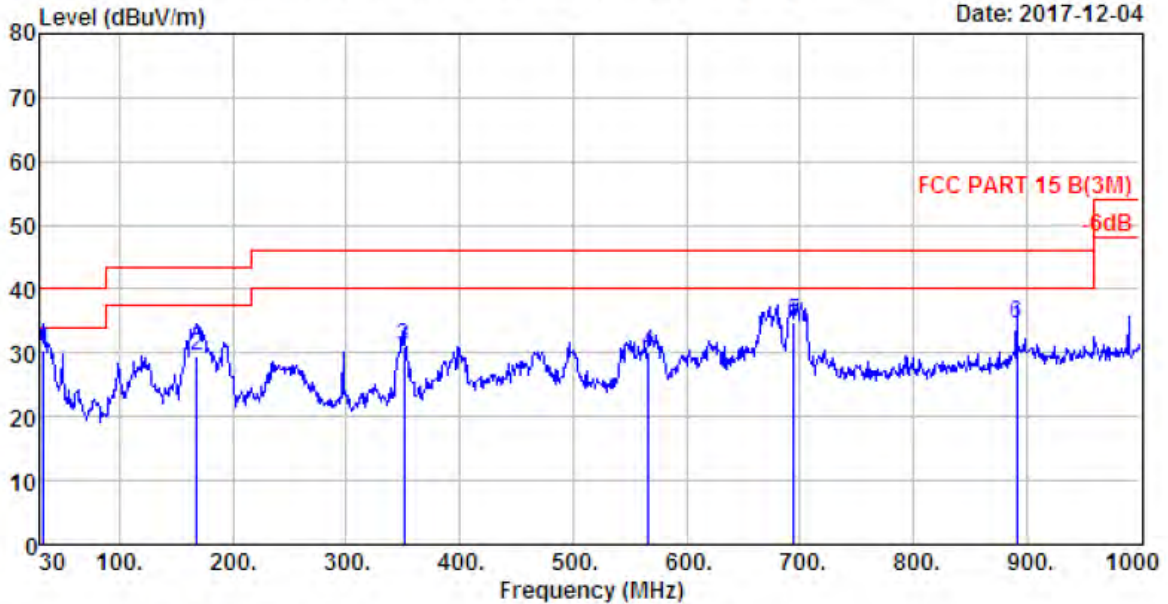

Site no. : 1# 966 Chamber Data no. : 168
 Dis. / Ant. : 3m 37062 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:24.7';Humi:52%;Press:101.52kPa
 Engineer : Bible
 EUT : LCD TV or LED TV
 Power : AC 120V/60Hz
 M/N : 55R81
 Test Mode : HDMI(3840*2160+Running "H" Pattern)

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	32.91	16.35	0.35	13.79	30.49	40.00	9.51	QP
2	167.74	10.06	1.39	18.03	29.48	43.50	14.02	QP
3	351.07	15.02	2.33	13.51	30.86	46.00	15.14	QP
4	566.41	19.46	3.09	7.46	30.01	46.00	15.99	QP
5	694.45	21.25	3.47	10.17	34.89	46.00	11.11	QP
6	891.36	23.72	4.06	6.80	34.58	46.00	11.42	QP

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.




Above 1GHz

EST Technology

Chilingxiang, Qishantou, Santun,
Houjie, Dongguan, Guangdong, China
Tel:+86-769-83081888
Fax:+86-769-83081878

Data: 150 File: \\Emc-966-1\test data\2017\EMC\T\TCL\EM6 (199)

Date: 2017-12-04

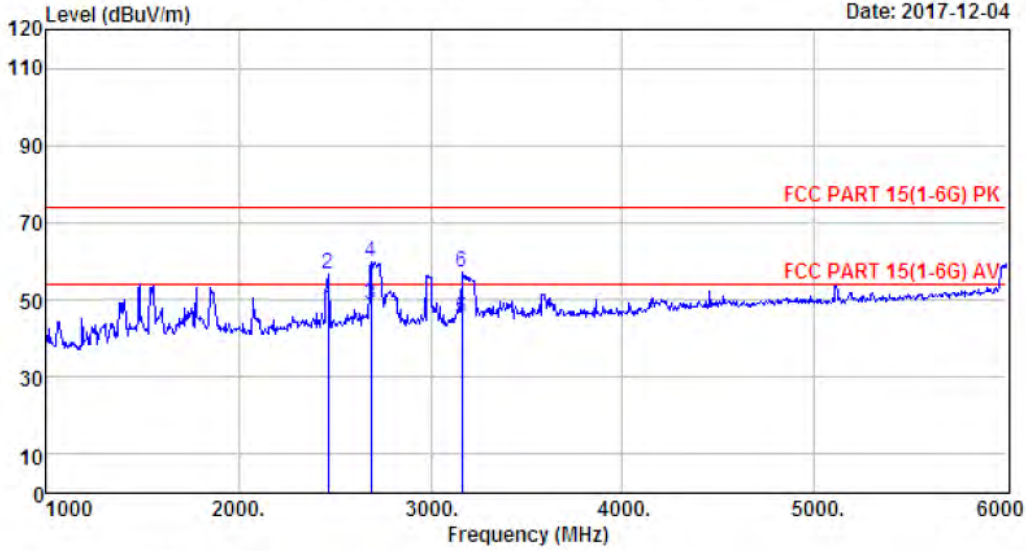

Site no. : site Data no. : 150
 Dis. / Ant. : 3m ANI9120D 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15(1-6G) PK
 Env. / Ins. : Temp:25.3';Humi:54%;Press:101.52kPa
 Engineer : Bible
 EUT : LCD TV or LED TV
 Power : AC 120V/60Hz
 M/N : 55R81
 Test Mode : HDMI(3840*2160+Running "H" Pattern)


	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2465.00	27.52	3.27	16.68	47.47	54.00	6.53	Average
2	2465.00	27.52	3.27	25.68	56.47	74.00	17.53	Peak
3	2690.00	27.89	3.44	17.45	48.78	54.00	5.22	Average
4	2690.00	27.89	3.44	28.45	59.78	74.00	14.22	Peak
5	3165.00	28.71	3.68	12.60	44.99	54.00	9.01	Average
6	3165.00	28.71	3.68	24.60	56.99	74.00	17.01	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.



EST Technology

Data: 151 File: \\Emc-966-1\test data\2017\EMC\T\TCL\EM6 (199) Date: 2017-12-04

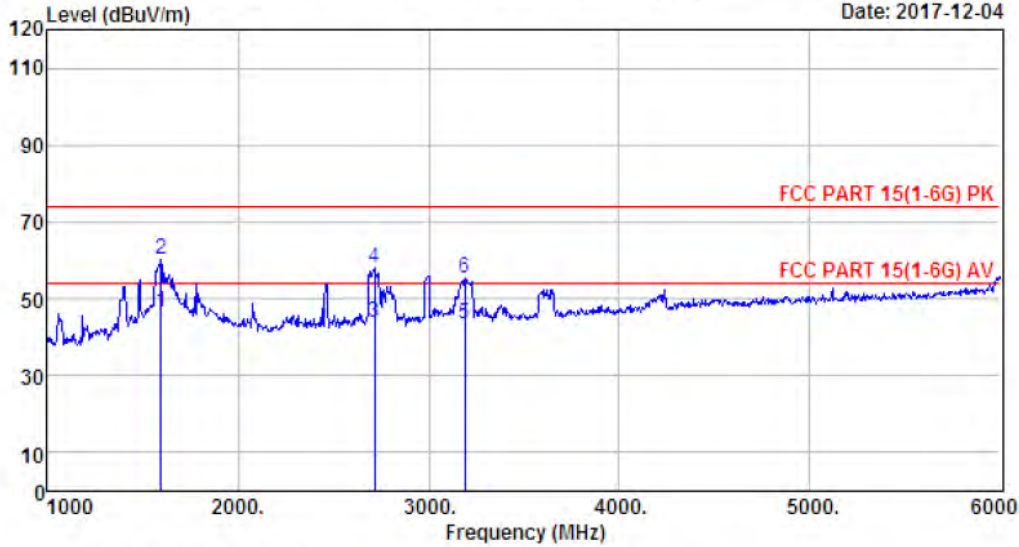

Site no. : 1# 966 Chamber Data no. : 151
 Dis. / Ant. : 3m ANT9120D 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15(1-6G) PK
 Env. / Ins. : Temp:25.3'; Humi:54%; Press:101.52kPa
 Engineer : Bible
 EUT : LCD TV or LED TV
 Power : AC 120V/60Hz
 M/N : 55R81
 Test Mode : HDMI(3840*2160+Running "H" Pattern)

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1595.00	25.76	2.57	18.09	46.42	54.00	7.58	Average
2	1595.00	25.76	2.57	32.09	60.42	74.00	13.58	Peak
3	2715.00	27.95	3.46	12.58	43.99	54.00	10.01	Average
4	2715.00	27.95	3.46	26.58	57.99	74.00	16.01	Peak
5	3190.00	28.78	3.70	11.08	43.56	54.00	10.44	Average
6	3190.00	28.78	3.70	23.08	55.56	74.00	18.44	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss + Reading.
 2. Margin= Limit - Emission Level.
 3. The emission levels that are 20dB below the official limit are not reported.

5. PHOTOGRAPHS OF TEST SET-UP


5.1. Set-up for conducted emission at the mains terminals test



5.2. Set-up for radiated emission test (30-1000MHz)

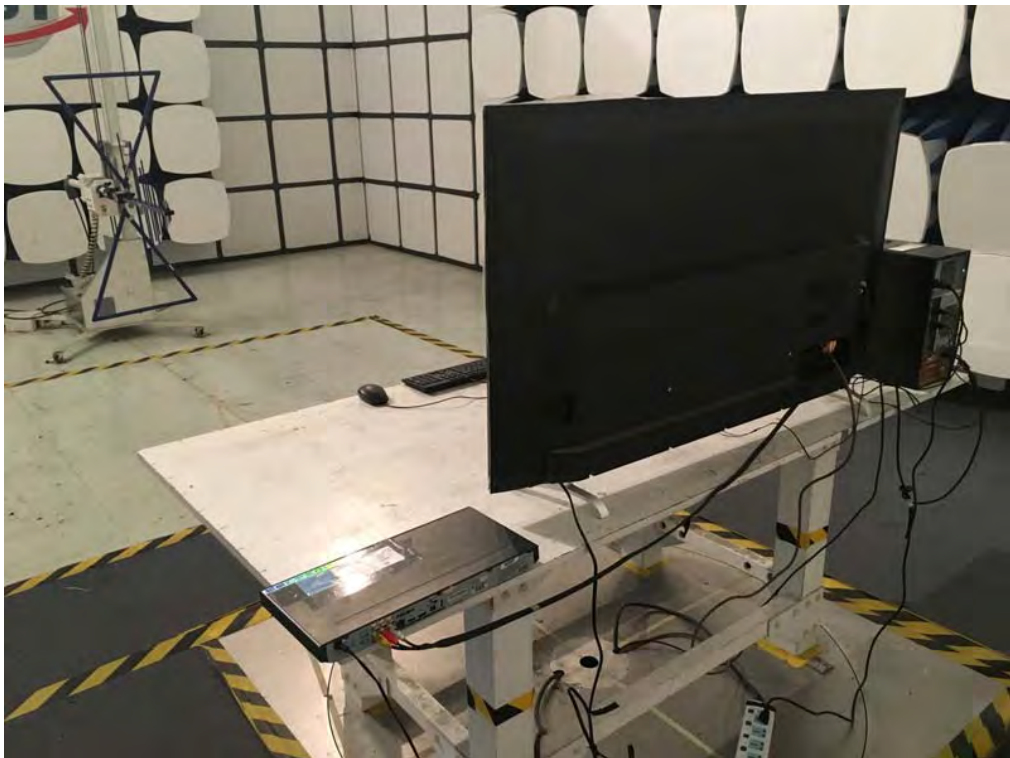

5.3. Set-up for radiated emission test (Above 1GHz)

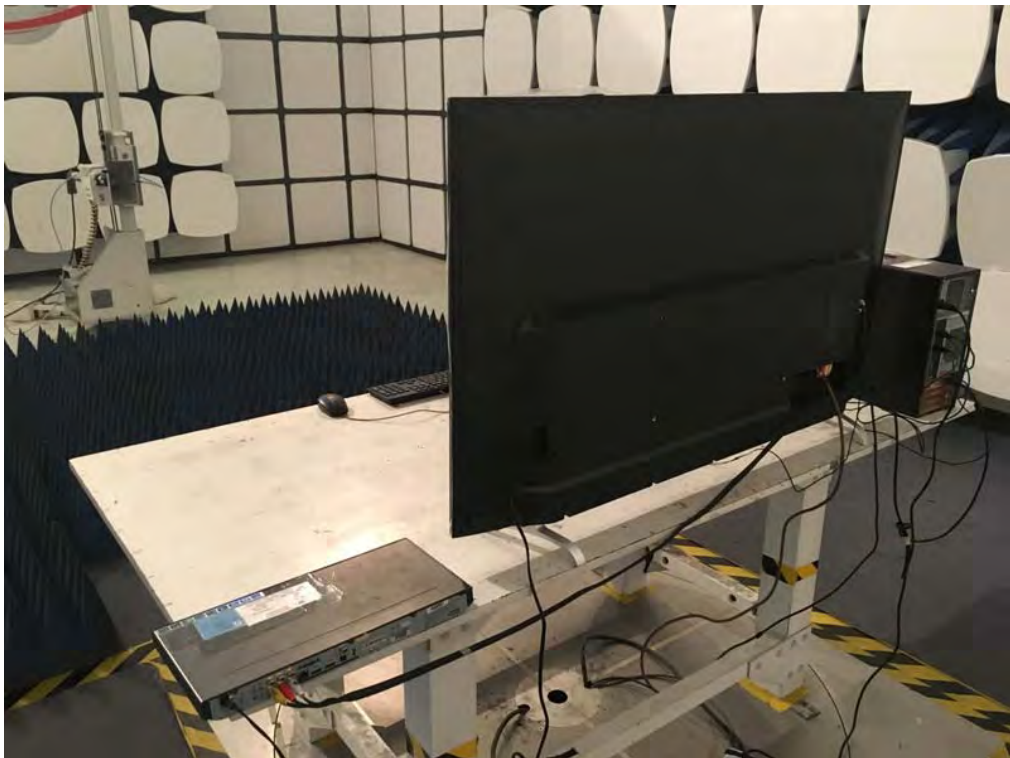


6. PHOTOGRAPHS OF THE EUT

External Photos

M/N: 55R81



External Photos
M/N: 55R81

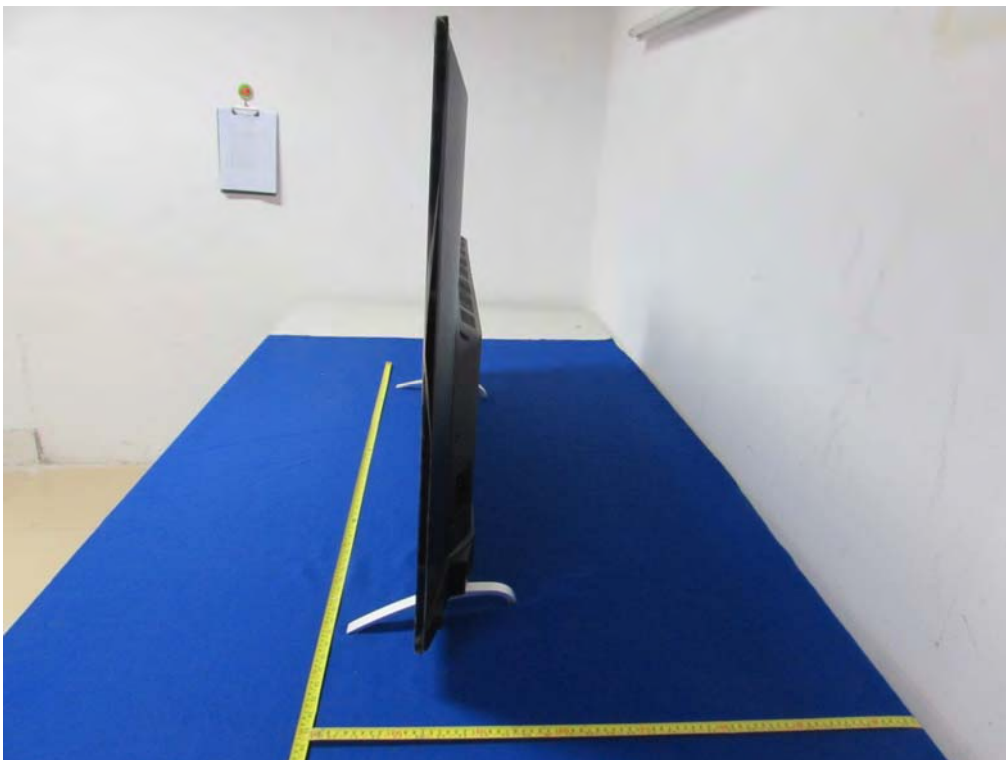


External Photos
M/N: 55R81




External Photos
M/N: 55R81




Internal Photos
M/N: 55R81

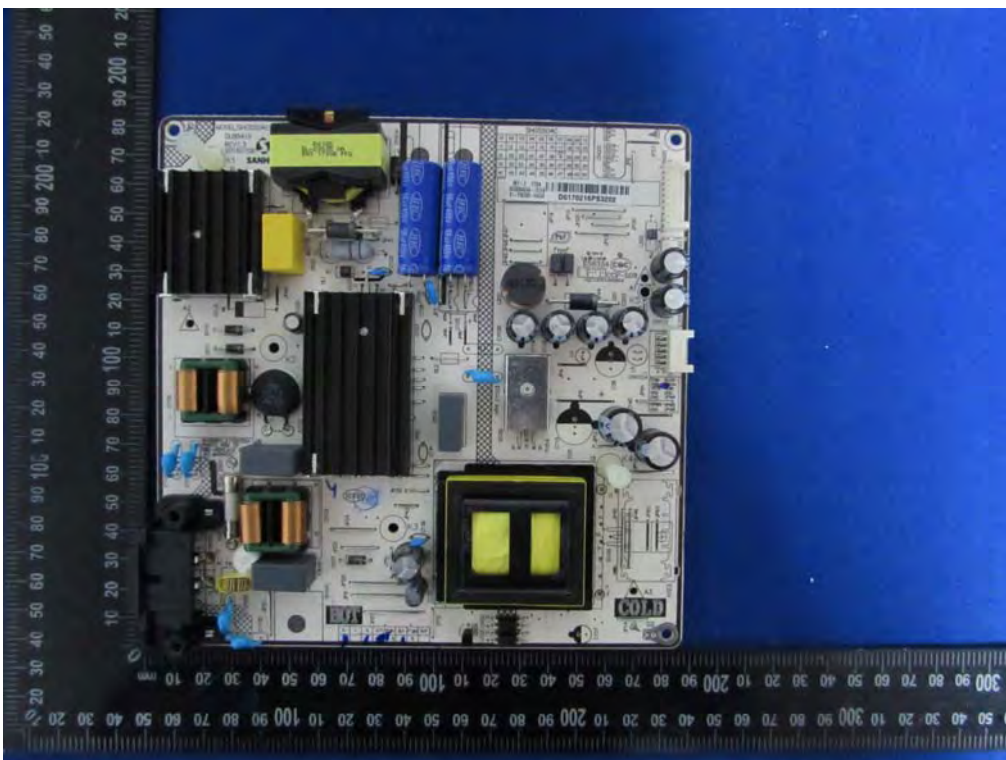



Internal Photos
M/N: 55R81

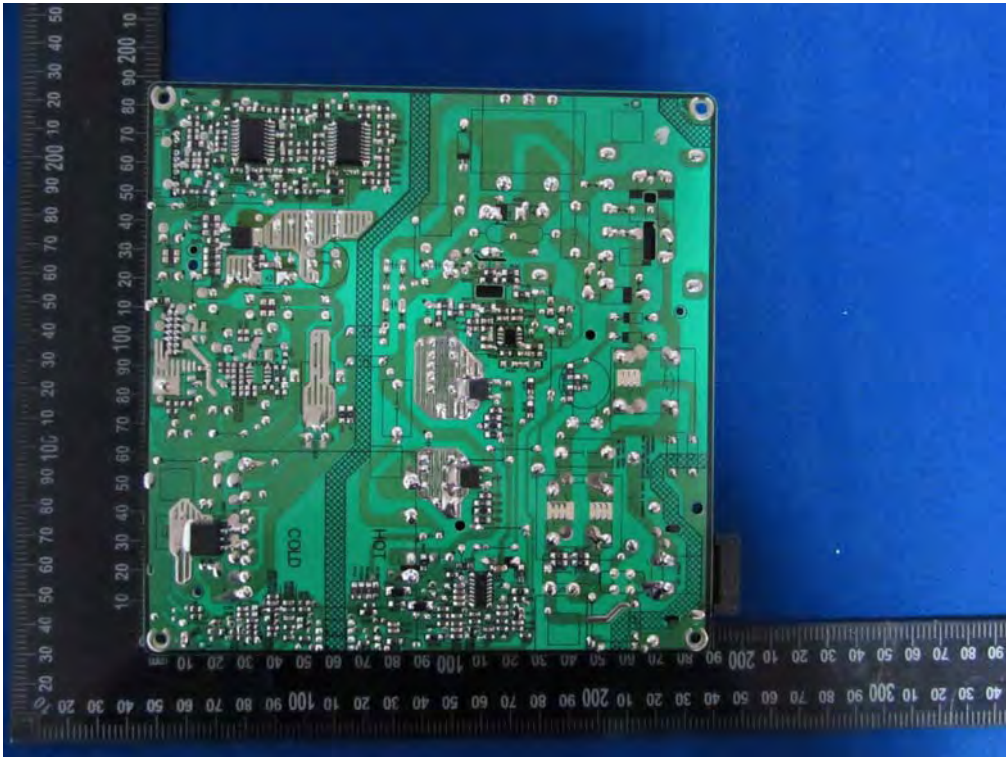

Internal Photos
M/N: 55R81


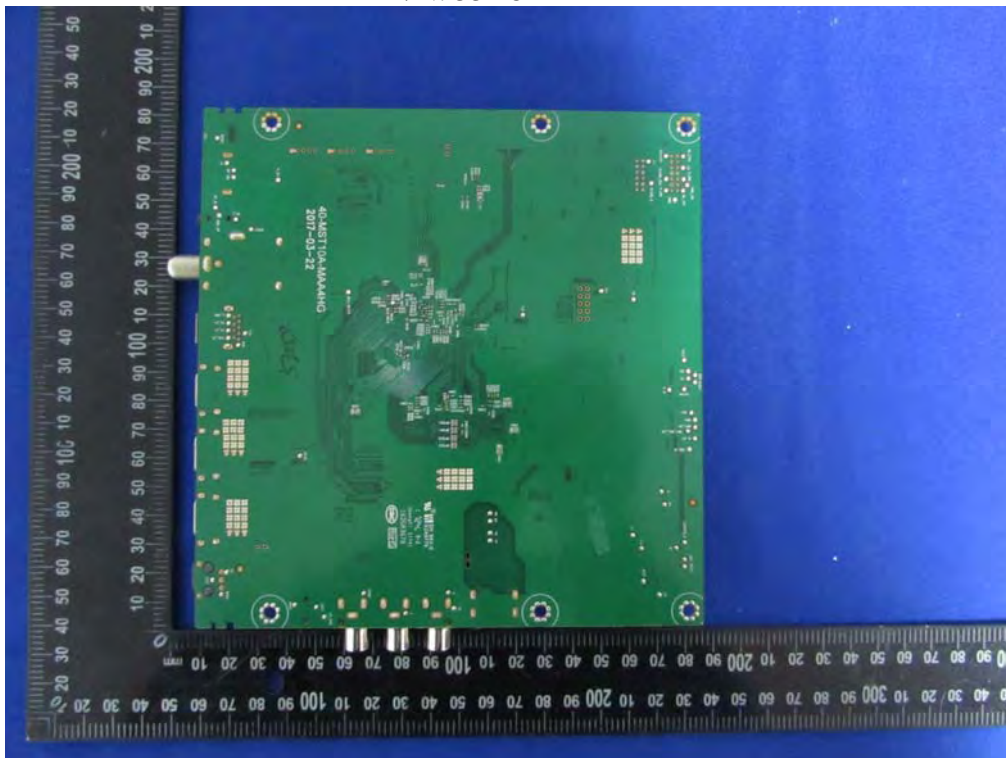


Internal Photos
M/N: 55R81

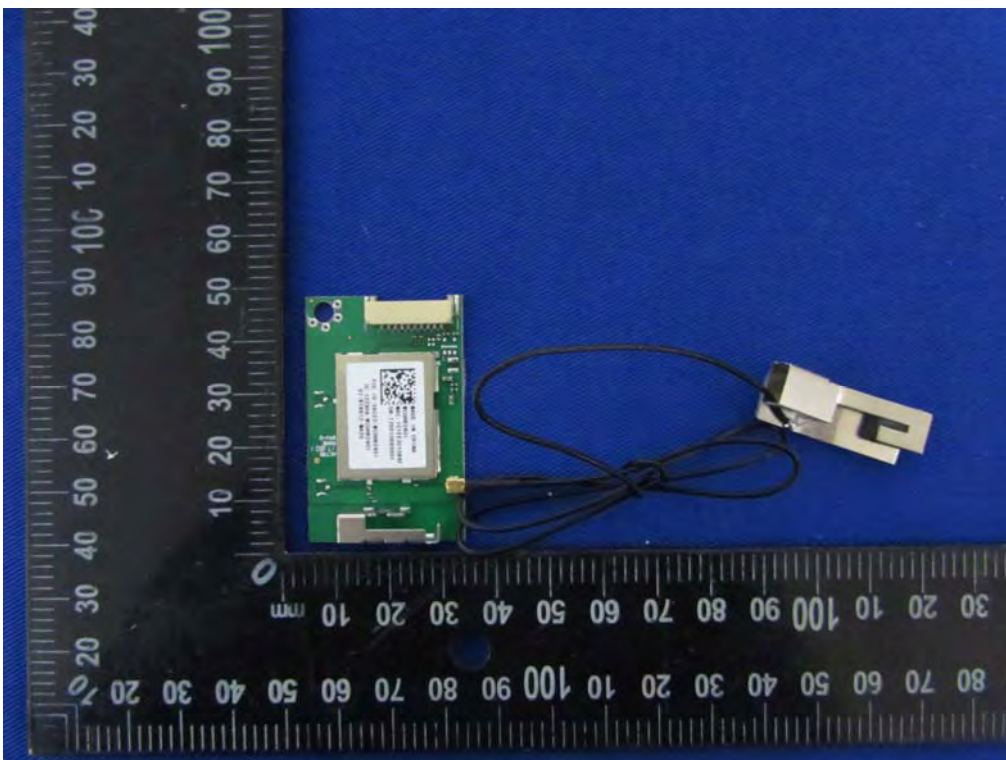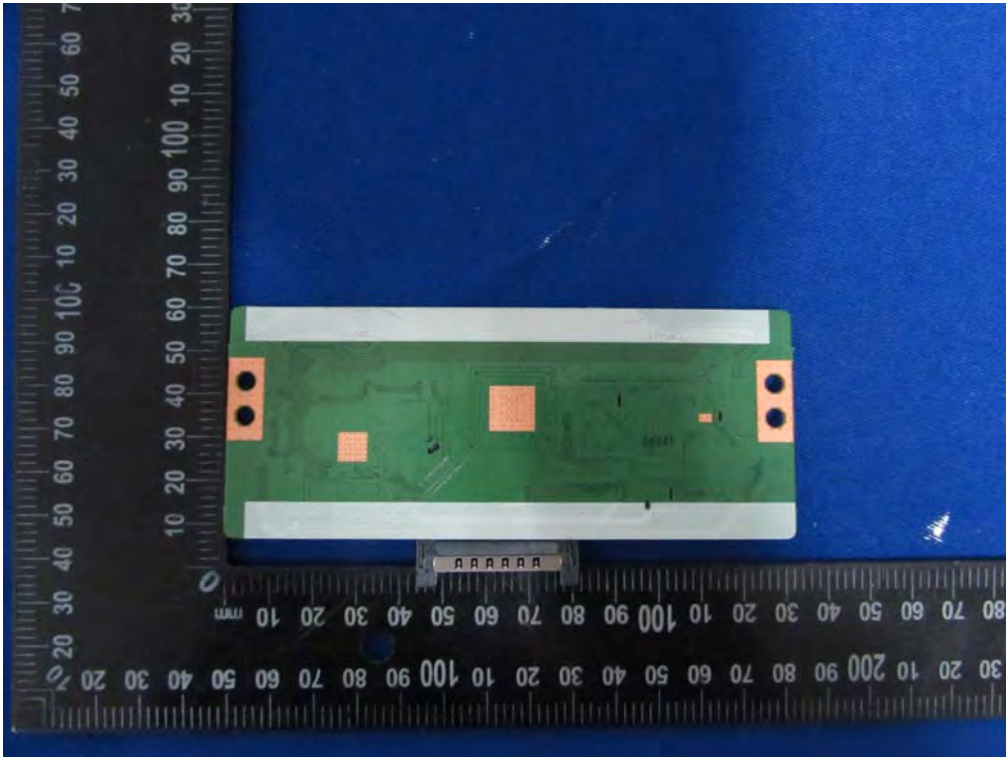

Internal Photos

M/N: 55R81

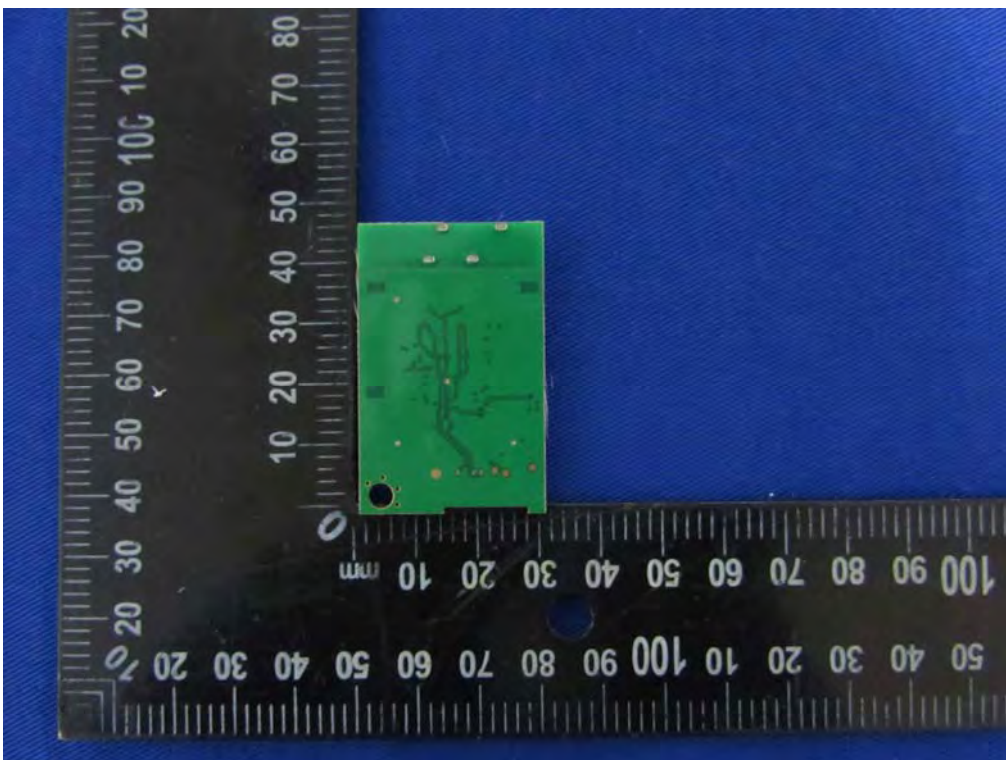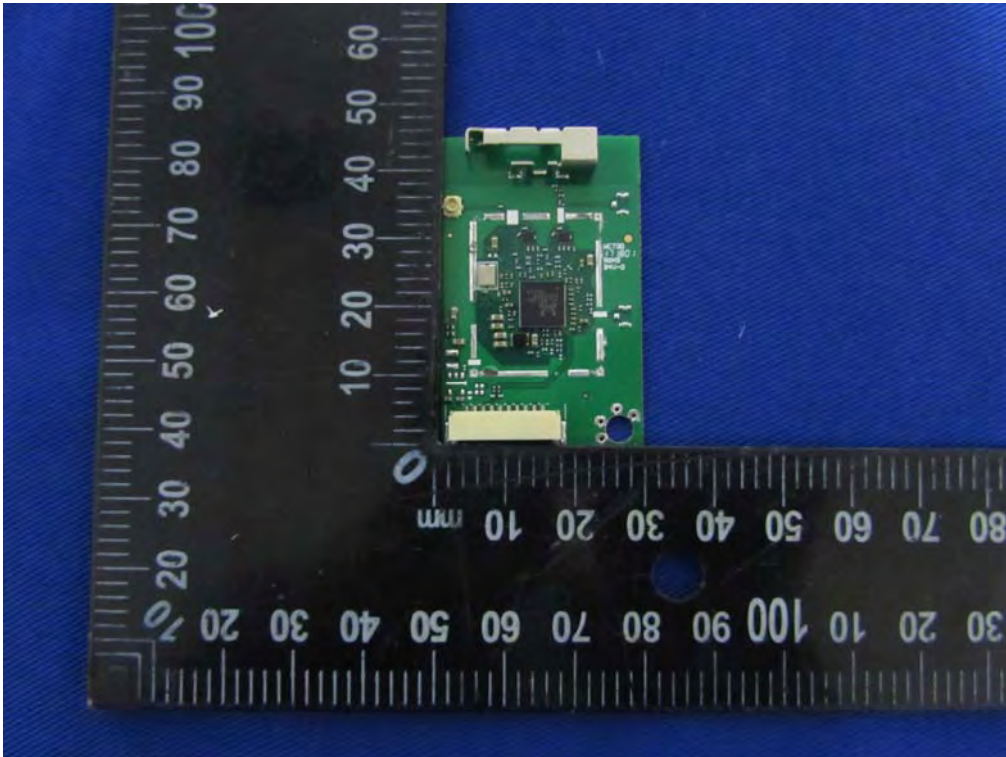

Internal Photos
M/N: 55R81

