



APPLICATION OF CERTIFICATION
For

TTE Technology Inc.

LCD TV

Brand Name	Model Number
TCL	LE40FHDE5510;LE40FHDE5510TA ; LE40FHDE5510W ;LE40FHDE5510T ; LE40FHDE5510P ; LE40FHDE5510C ; LE40FHDE5510S ;LE40FHDE5510M ; LE40FHDE5510A ;LE40FHDE5510B ; LE40FHDE5510I ; LE40FHDE5510L ; LE40FHDE5510P ;LE40FHDE5510R ; LE40FHDE5510X ; LE40FHDE5510Z

FCC ID: W8ULE40FHDE5510

Prepared for : TTE Technology Inc.
555 S. Promenade Ave., Suite 103, Corona, CA 92879,
U.S.A.

Prepared By: Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496
Fax: (0755) 26632877

Report Number : ACS- F13184
Date of Test : May.24~Jun.02, 2013
Date of Report : Jul.08, 2013

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. SUMMARY OF STANDARDS AND RESULTS	1-1
1.1. Description of Standards and Results	1-1
2. GENERAL INFORMATION.....	2-1
2.1. Description of Device (EUT).....	2-1
2.2. Tested Supporting System Details.....	2-2
2.3. Block diagram of connection between the EUT and simulators.....	2-3
2.4. Test Facility	2-4
2.5. Measurement Uncertainty (95% confidence levels, k=2).....	2-4
3. POWER LINE CONDUCTED EMISSION MEASUREMENT.....	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup.....	3-1
3.3. Power Line Conducted Emission Test Limits	3-1
3.4. Configuration of EUT on Test.....	3-1
3.5. Operating Condition of EUT	3-2
3.6. Test Procedure	3-2
3.7. Conducted Emission at Mains Terminals Test Results.....	3-2
4. RADIATED EMISSION MEASUREMENT	4-1
4.1. Test Equipment.....	4-1
4.2. Block Diagram of Test Setup.....	4-2
4.3. Radiated Emission Limit	4-3
4.4. EUT Configuration on Test	4-3
4.5. Operating Condition of EUT	4-3
4.6. Test Procedure	4-3
4.7. Radiated Disturbance Test Results	4-4
5. DEVIATION TO TEST SPECIFICATIONS	5-1
6. PHOTOGRAPH	6-1
6.1. Photos of Power Line Conducted Emission Test.....	6-1
6.2. Photos of Radiated Emission Test (In Anechoic Chamber)	6-2
7. PHOTOS OF THE EUT	7-1

TEST REPORT CERTIFICATION

Applicant : TTE Technology Inc.
 Manufacturer : TCL King Electrical Appliances (Huizhou) Co., Ltd.
 EUT Description : LCD TV
 FCC ID : W8ULE40FHDE5510

(A) Model No. & Brand Name	<table border="1"> <thead> <tr> <th data-bbox="478 575 686 638">Brand Name</th><th data-bbox="686 575 1281 638">Model Number</th></tr> </thead> <tbody> <tr> <td data-bbox="478 638 686 889" style="text-align: center;">TCL</td><td data-bbox="686 638 1281 889"> LE40FHDE5510; LE40FHDE5510TA; LE40FHDE5510W; LE40FHDE5510T; LE40FHDE5510P; LE40FHDE5510C; LE40FHDE5510S; LE40FHDE5510M; LE40FHDE5510A; LE40FHDE5510B; LE40FHDE5510I; LE40FHDE5510L; LE40FHDE5510P; LE40FHDE5510R; LE40FHDE5510X; LE40FHDE5510Z </td></tr> </tbody> </table>	Brand Name	Model Number	TCL	LE40FHDE5510; LE40FHDE5510TA; LE40FHDE5510W; LE40FHDE5510T; LE40FHDE5510P; LE40FHDE5510C; LE40FHDE5510S; LE40FHDE5510M; LE40FHDE5510A; LE40FHDE5510B; LE40FHDE5510I; LE40FHDE5510L; LE40FHDE5510P; LE40FHDE5510R; LE40FHDE5510X; LE40FHDE5510Z
Brand Name	Model Number				
TCL	LE40FHDE5510; LE40FHDE5510TA; LE40FHDE5510W; LE40FHDE5510T; LE40FHDE5510P; LE40FHDE5510C; LE40FHDE5510S; LE40FHDE5510M; LE40FHDE5510A; LE40FHDE5510B; LE40FHDE5510I; LE40FHDE5510L; LE40FHDE5510P; LE40FHDE5510R; LE40FHDE5510X; LE40FHDE5510Z				

(B) Power Supply : AC 120V/60Hz

(C) Test Voltage : AC 120V/60Hz

Measurement Standard Used:

FCC Rules and Regulations Part 15 Subpart B Class B 2012

The device described above is tested by AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both conducted and radiated emissions. The test results are contained in this test report and AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. is assumed of full responsibility for the accuracy and completeness of these tests. This report contains data that are not covered by the NVLAP accreditation.

After the test, our opinion is that EUT compliance with the requirement of the above standards.

This Report is made under FCC Part 2.1075. No modifications were required during testing to bring this product into compliance.

This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Date of Test : May.24~ Jun.02,2013 Report of date: Jul.08, 2013

Prepared by : Julia Zhu Reviewed by : Sun Zeng
 Julia Zhu / Assistant 信華科技(深圳)有限公司 Sun Zeng / Supervisor
 Audix Technology (Shenzhen) Co., Ltd.

EMC 部門報告專用章

Stamp only for EMC Dept. Report

Approved & Authorized Signer : Signature: David Jin
 David Jin / Deputy Manager

1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION			
Description of Test Item	Standard	Results	Remarks
Power Line Conducted Emission Test	FCC Part 15: 2012 ANSI C63.4: 2009	PASS	Meets Class B Limit Minimum passing margin is 21.96dB At 0.45395MHz
Radiated Emission Test (30-1000MHz)	FCC Part 15: 2012 ANSI C63.4: 2009	PASS	Meets Class B Limit Minimum passing margin is 3.03dB at 930.000MHz
Radiated Emission Test (1-2GHz)	FCC Part 15: 2012 ANSI C63.4: 2009	PASS	Meets Class B Limit Minimum passing margin is 13.03dB at 1499.360MHz

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : LCD TV

Model Number : LE40FHDE5510; LE40FHDE5510TA ;LE40FHDE5510W ;
LE40FHDE5510T ;LE40FHDE5510P ; LE40FHDE5510C ;
LE40FHDE5510S ;LE40FHDE5510M ;LE40FHDE5510A ;
LE40FHDE5510B ;LE40FHDE5510I ; LE40FHDE5510L ;
LE40FHDE5510P ;LE40FHDE5510R ;LE40FHDE5510X ;
LE40FHDE5510Z

All 40" model are identical except for different appearance (only for color, silk-screen and decorative parts) and model number for trading purpose.

Test Model : LE40FHDE5510

FCC ID : W8ULE40FHDE5510

Applicant : TTE Technology Inc.
555 S. Promenade Ave., Suite 103, Corona, CA 92879,
U.S.A.

Manufacturer : TCL King Electrical Appliances (Huizhou) Co., Ltd.
Section 19, Zhongkai Development Zone for New & High-Level
Tech Industries, Huizhou, Guangdong Province, China, 516006.

FREQUENCIES USED AND GENERATED WITHIN DEVICE		
LVDS (HD)	78MHZ	
LVDS (FHD)	75MHZ	
IF	6MHz	
DC-DC	U302->385KHz	
DDR	390MHz	
AMP	384KHz	

Power Cord : Unshielded, Detachable, 1.8m

Date of Test : May.24~Jun.02, 2013


Date of Receipt : May.23, 2013

Sample Type : Prototype production

2.2. Tested Supporting System Details

	Description	ACS No.	Manufacturer	Model	Serial Number	Approved type
1.	Personal Computer	Test PC M	DELL	Studio 540	224XK2X	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID:R33002
		Power Cord: Unshielded, Detachable, 1.8m Display Card: HD3450 (DVI+VGA+HDMI)				
2.	USB Keyboard	ACS-EMC- K04R	DELL	SK-8115	CN-ODJ313-7161 6-6BB-049J	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: T3A002
		Data Cable: shielded, Undetachable, 2.0m				
3.	Headphone	ACS-EMC-EP03	OVANN	OV880V	N/A	<input type="checkbox"/> FCC ID <input type="checkbox"/> BSMI ID
		Cable: Shielded, Undetachabled, 4.0m				
4.	Printer	ACS-EMC-PT04	HP	C9079A	N/A	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: R33001
		USB Cable: Shielded, Detachabled, 1.8m Power Cord: Unshielded, Detachabled, 1.8m Power Adapter: HP, M/N: 0957-2119, BSMI ID: R33030, DC Cable: Unshielded, Detachabled, 1.5m				
5.	USB Mouse	ACS-EMC-M04R	DELL	M056UO	512024282	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: R41108
		Data Cable: shielded, Undetachable, 1.8m				
6.	iPod nano	ACS-EMC-IP03	APPLE	A1199	YM711H3LVQ5	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: R33057
		Data Cable: Shielded, Detachabled, 1.0m				
7.	HDD	ACS-EMC-HDD03	Terasys	F12-UF	A0100215-53900 30	<input checked="" type="checkbox"/> FCC DoC <input checked="" type="checkbox"/> BSMI ID: 4912A022
		USB Cable: Unshielded, Detachable, 1.5m				
8.	Dummy Load (10KΩ & 75Ω)	Component In Cable: Unshielded, Detachabled, 1.8m SPDIF Cable: Unshielded, Detachable, 1.5m (R+L)Audio Cable: Unshielded, Detachable, 1.5m				
9.	D-Sub Cable: Shielded, Detachable, 1.5m HDMI Cable: Shielded, Detachable, 1.8m					

2.3. Block diagram of connection between the EUT and simulators

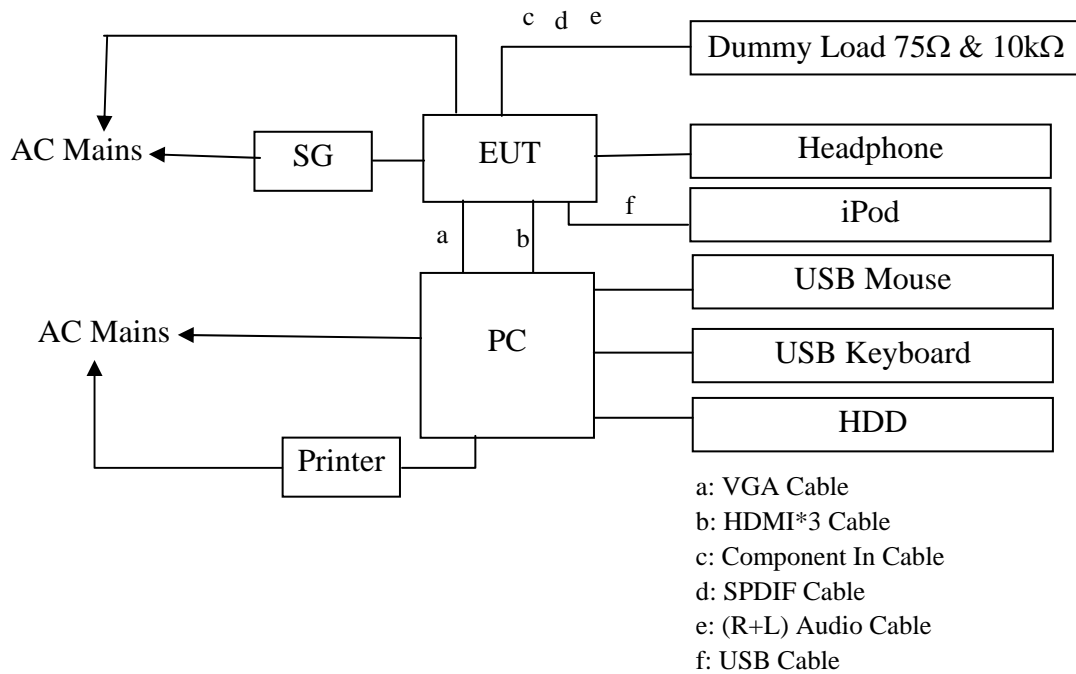

(EUT: LCD TV)

2.4. Test Facility

Site Description

Name of Firm	: Audix Technology (Shenzhen) Co., Ltd. No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China
3m Anechoic Chamber	: Certificated by FCC, USA Registration Number: 90454 Valid Date: Feb.22, 2015
3m & 10m Anechoic Chamber	: Certificated by FCC, USA Registration Number: 794232 Valid Date: Oct.31, 2015
EMC Lab.	: Certificated by DAkkS, Germany Registration No: D-PL-12151-01-01 Valid Date: Feb.01, 2014
	Accredited by NVLAP, USA NVLAP Code: 200372-0 Valid Date: Mar.31, 2014

2.5. Measurement Uncertainty (95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test in No. 1 Conduction	3.1 dB(150KHz to 30MHz)
Uncertainty for Radiation Emission test in 3m chamber	3.38dB(30~200MHz, Polarize: H)
	3.40dB(30~200MHz, Polarize: V)
	3.66dB(200M~1GHz, Polarize: H)
	3.58dB(200M~1GHz, Polarize: V)
Uncertainty for Radiation Emission test in 3m chamber (1GHz-18GHz)	5.04dB(1~6GHz, Distance: 3m)
	5.06dB(6~18GHz, Distance: 3m)
Uncertainty for test site temperature and humidity	3%
	0.6°C

3. POWER LINE CONDUCTED EMISSION MEASUREMENT

3.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS10	838693/001	Oct.31, 12	1 Year
2.	L.I.S.N.#1	Rohde & Schwarz	ESH2-Z5	834066/011	Oct.31, 12	1 Year
3.	L.I.S.N.#3	Kyoritsu	KNW-242C	8-1920-1	May.08, 13	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	May.08, 13	1 Year
5.	Terminator	Hubersuhner	50Ω	No. 2	May.08, 13	1 Year
6.	RF Cable	Fujikura	3D-2W	No.1	May.08, 13	1 Year
7.	Coaxial Switch	Anritsu	MP59B	M50564	May.08, 13	1 Year
8.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100341	May.08, 13	1 Year

3.2. Block Diagram of Test Setup

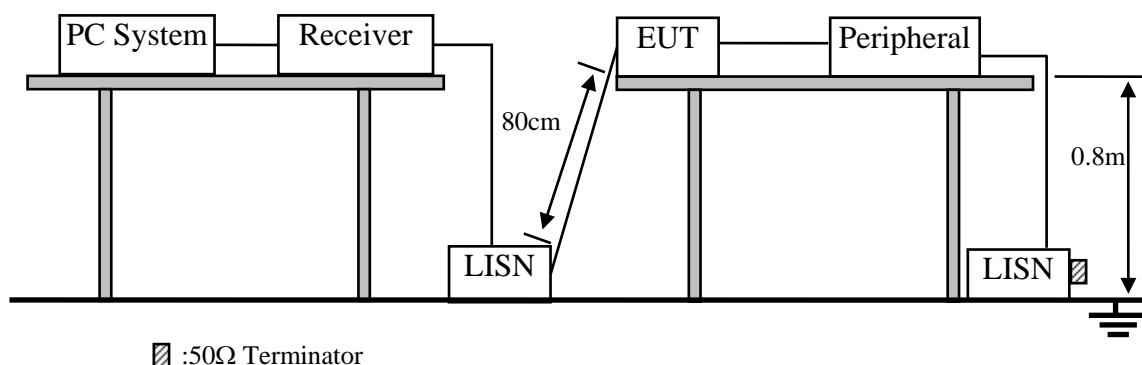

3.3. Power Line Conducted Emission Test Limits

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. Configuration of EUT on Test

The following equipment are installed on Power Line Conducted Emission Test to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

3.4.1. LCD TV (EUT)

Model Number : LE40FHDE5510

Serial Number : N/A

3.4.2. Support Equipment : As Tested Supporting System Detail, in Section 2.2.

3.5.Operating Condition of EUT

- 3.5.1. Setup the EUT and simulator as shown as Section 3.2.
- 3.5.2. Turn on the power of all equipment.
- 3.5.3. PC system ran the Self-test program “EMC Test. exe” by windows XP and sent “H” Character to LCD TV (EUT) , the Screen of EUT displayed and filled with “H” pattern, use white letters on a black ground, set the contrast control to maximum, set the brightness control to maximum and measure it.
- 3.5.4. The other peripheral devices were driven and operated in turn during all testing.

3.6.Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#3). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4: 2009 on conducted Emission test.

The bandwidth of test receiver (R&S TEST RECEIVER ESHS10) is set at 9kHz.

The frequency range from 150kHz to 30MHz is checked. The test result are reported on Section 3.7.

3.7.Conducted Emission at Mains Terminals Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

The EUT with the following test modes were tested and selected to read Q.P values and average values, all the test results are listed in next pages.

EUT: LCD TV

Model No. : LE40FHDE5510

Test Date: May.24, 2013


Temperature: 26.5℃

Humidity: 66%

The details of test modes are as follows :

No.	Test Mode	Input Port	Resolution & Frequency	Reference Test Data No.	
				Line	Neutral
1.	PC Mode	VGA	640*480 @60Hz	#42	#41
2.			1024*768 @ 60Hz	#40	#39
3.			1920*1080@60Hz	#38	#37
4.		HDMI 1	1920*1080@60Hz	#32	#31
5.		HDMI 2	1920*1080@60Hz	#34	#33
6. ※		HDMI 3	1920*1080@60Hz	#36	#35

(※ Worst test mode)

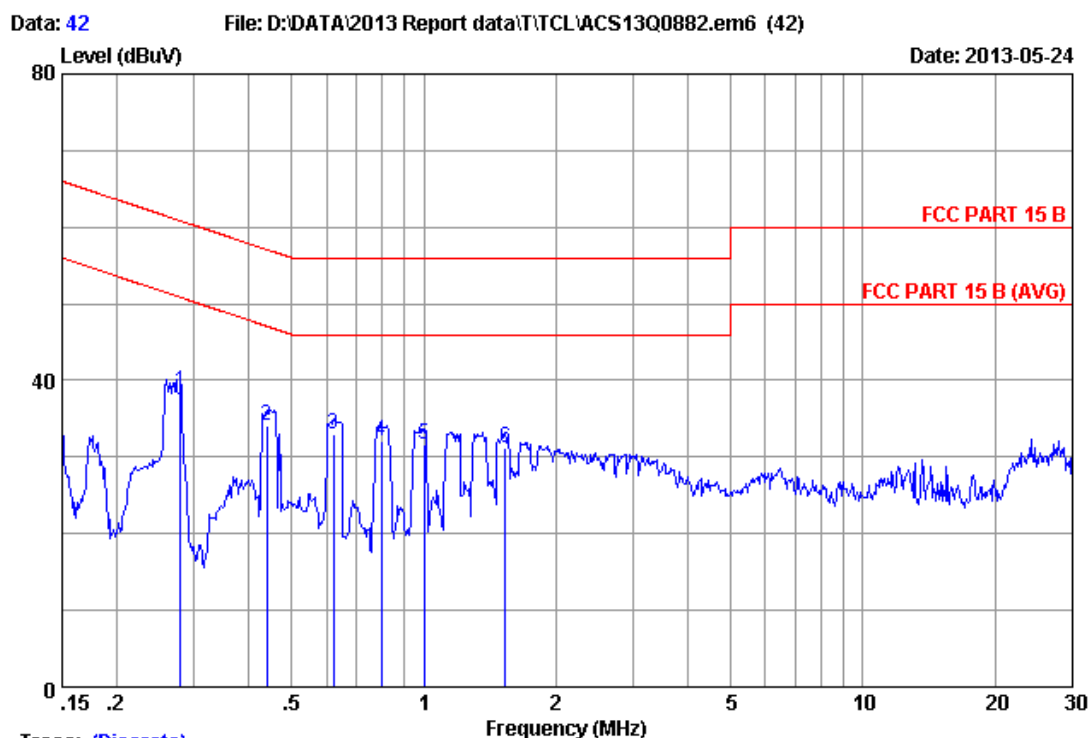


Trace: (Discrete)

Site no :1#conduction Data No :42
 Dis./Lisn. : ** 2012 ESH2-Z5 LINE
 Limit :FCC PART 15 B
 Env./Ins. :26.5°C/66% Engineer :Nick_Huang
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :PC Mode
 Running "H" Pattern And 1KHz Playing
 VGA:640*480@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.27881	0.19	0.15	38.22	38.56	60.85	22.29	QP
2	0.43974	0.19	0.15	33.85	34.19	57.07	22.88	QP
3	0.62383	0.20	0.15	32.56	32.91	56.00	23.09	QP
4	0.80023	0.20	0.15	31.74	32.09	56.00	23.91	QP
5	0.99968	0.21	0.14	31.35	31.70	56.00	24.30	QP
6	1.535	0.23	0.14	30.89	31.26	56.00	24.74	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

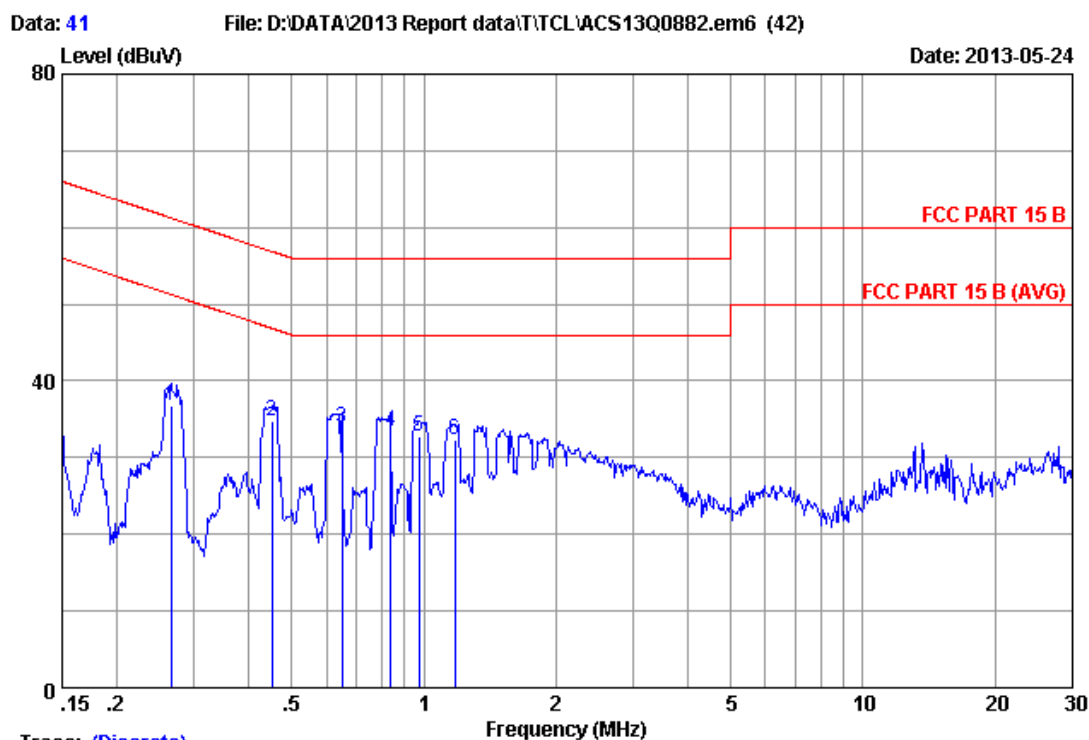


Trace: (Discrete)

Site no : 1#conduction Data No : 41
 Dis./Lisn. : ** 2012 ESH2-Z5 NEUTRAL
 Limit : FCC PART 15 B
 Env./Ins. : 26.5°C/66% Engineer : Nick_Huang
 EUT : LCD TV M/N:LE40FHDE5510
 Power Rating : AC 120V/60Hz
 Test Mode : PC Mode
 Running "H" Pattern And 1KHz Playing
 VGA: 640*480@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.26583	0.22	0.15	36.31	36.68	61.25	24.57	QP
2	0.45155	0.23	0.15	34.30	34.68	56.85	22.17	QP
3	0.65084	0.24	0.15	33.44	33.83	56.00	22.17	QP
4	0.83932	0.24	0.14	32.94	33.32	56.00	22.68	QP
5	0.97354	0.24	0.14	32.38	32.76	56.00	23.24	QP
6	1.178	0.25	0.14	31.90	32.29	56.00	23.71	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

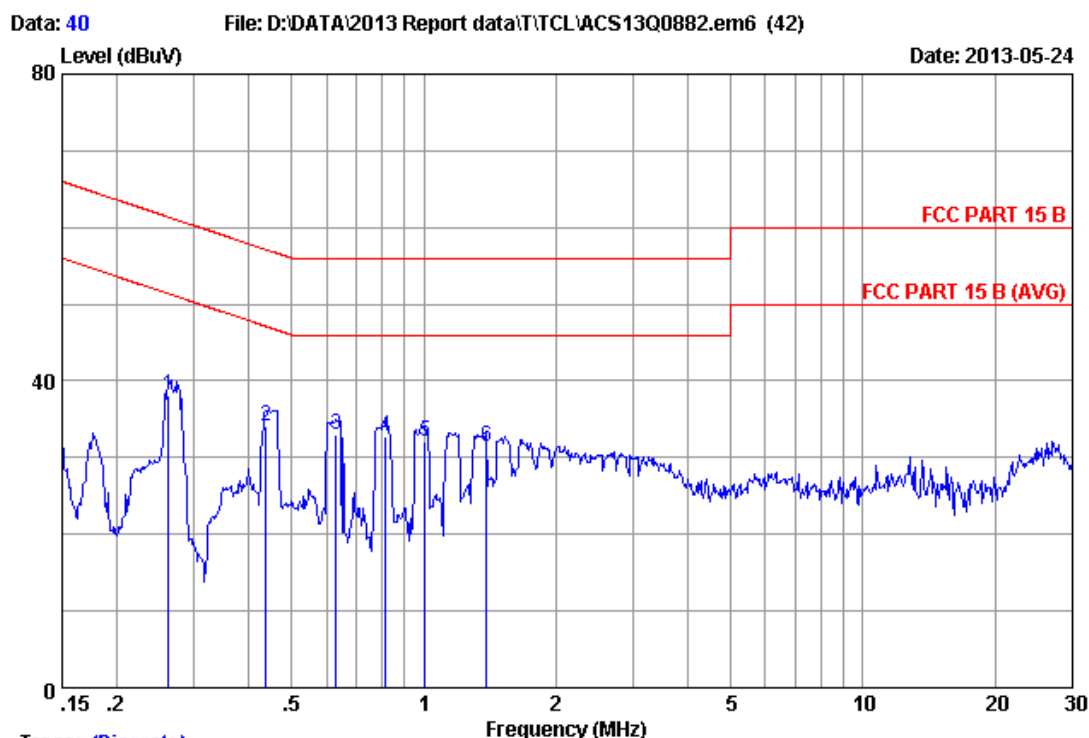


Trace: (Discrete)

Site no :1#conduction Data No :40
 Dis./Lisn. : ** 2012 ESH2-Z5 LINE
 Limit :FCC PART 15 B
 Env./Ins. :26.5°C/66% Engineer :Nick_Huang
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :PC Mode
 Running "H" Pattern And 1KHz Playing
 VGA:1024*768@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.26164	0.19	0.15	37.76	38.10	61.38	23.28	QP
2	0.43742	0.19	0.15	33.87	34.21	57.11	22.90	QP
3	0.63048	0.20	0.15	32.54	32.89	56.00	23.11	QP
4	0.81737	0.20	0.15	32.42	32.77	56.00	23.23	QP
5	1.005	0.21	0.14	31.75	32.10	56.00	23.90	QP
6	1.388	0.22	0.14	31.06	31.42	56.00	24.58	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

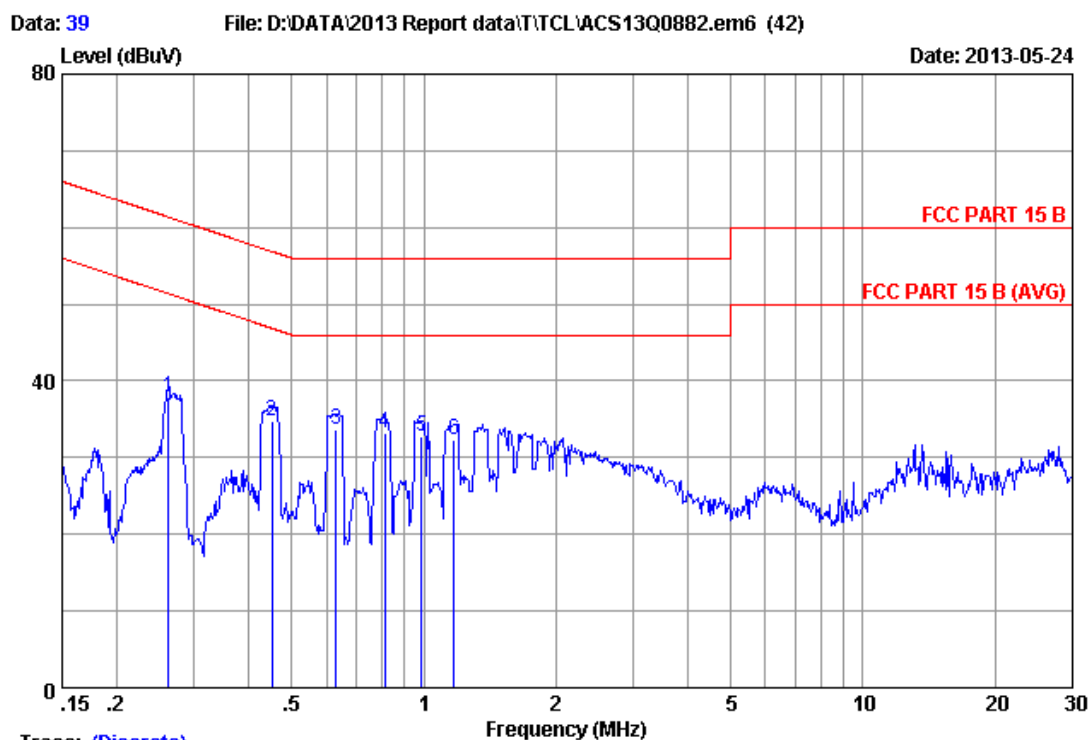


Trace: (Discrete)

Site no :1#conduction Data No :39
Dis./Lisn. : ** 2012 ESH2-Z5 NEUTRAL
Limit :FCC PART 15 B
Env./Ins. :26.5°C/66% Engineer :Nick_Huang
EUT :LCD TV M/N:LE40FHDE5510
Power Rating :AC 120V/60Hz
Test Mode :PC Mode
Running "H" Pattern And 1KHz Playing
VGA:1024*768@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.26164	0.22	0.15	37.55	37.92	61.38	23.46	QP
2	0.45155	0.23	0.15	34.48	34.86	56.85	21.99	QP
3	0.63048	0.24	0.15	33.26	33.65	56.00	22.35	QP
4	0.81305	0.24	0.15	32.82	33.21	56.00	22.79	QP
5	0.98914	0.24	0.14	32.40	32.78	56.00	23.22	QP
6	1.172	0.25	0.14	31.98	32.37	56.00	23.63	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

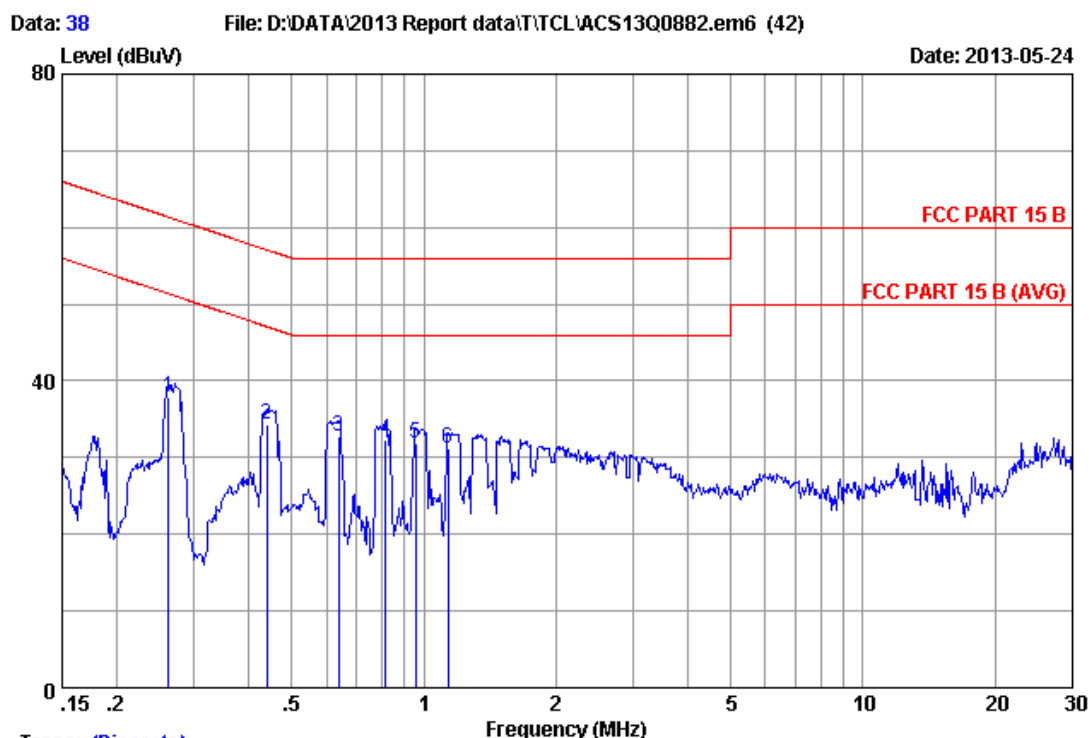


Trace: (Discrete)

Site no : 1#conduction Data No : 38
 Dis./Lisn. : ** 2012 ESH2-Z5 LINE
 Limit : FCC PART 15 B
 Env./Ins. : 26.5°C/66% Engineer : Nick_Huang
 EUT : LCD TV M/N:LE40FHDE5510
 Power Rating : AC 120V/60Hz
 Test Mode : PC Mode
 Running "H" Pattern And 1KHz Playing
 VGA:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.26164	0.19	0.15	37.60	37.94	61.38	23.44	QP
2	0.43974	0.19	0.15	34.05	34.39	57.07	22.68	QP
3	0.64058	0.20	0.15	32.50	32.85	56.00	23.15	QP
4	0.81737	0.20	0.15	31.90	32.25	56.00	23.75	QP
5	0.95819	0.21	0.14	31.46	31.81	56.00	24.19	QP
6	1.135	0.21	0.14	30.84	31.19	56.00	24.81	QP

Remarks: 1. Emission Level=LISN Factor+Cable Loss+Reading.
 2. If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

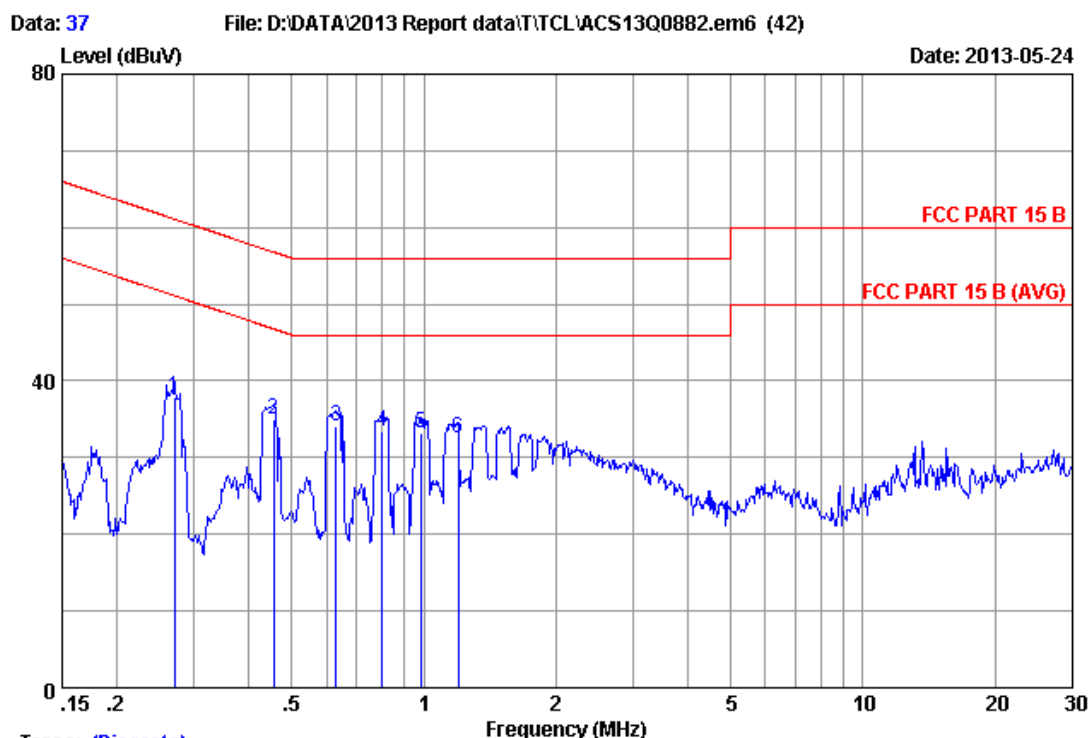


Trace: (Discrete)

Site no : 1#conduction Data No : 37
 Dis./Lisn. : ** 2012 ESH2-Z5 NEUTRAL
 Limit : FCC PART 15 B
 Env./Ins. : 26.5°C/66% Engineer : Nick_Huang
 EUT : LCD TV M/N:LE40FHDE5510
 Power Rating : AC 120V/60Hz
 Test Mode : PC Mode
 Running "H" Pattern And 1KHz Playing
 VGA:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.27009	0.22	0.15	37.58	37.95	61.12	23.17	QP
2	0.45395	0.23	0.15	34.62	35.00	56.80	21.80	QP
3	0.63048	0.24	0.15	33.68	34.07	56.00	21.93	QP
4	0.80448	0.24	0.15	32.98	33.37	56.00	22.63	QP
5	0.98391	0.24	0.14	32.84	33.22	56.00	22.78	QP
6	1.197	0.25	0.14	32.16	32.55	56.00	23.45	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

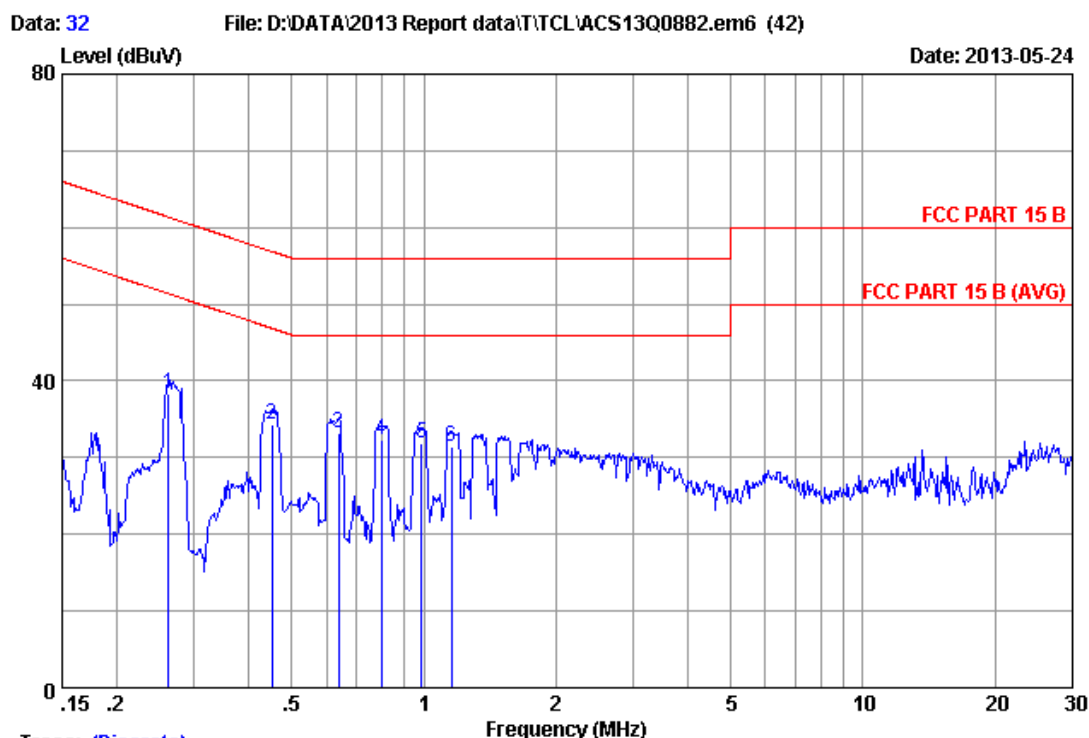


Trace: (Discrete)

Site no :1#conduction Data No :32
 Dis./Lisn. : ** 2012 ESH2-Z5 LINE
 Limit :FCC PART 15 B
 Env./Ins. :26.5°C/66% Engineer :Nick_Huang
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :PC Mode
 Running "H" Pattern And 1KHz Playing
 HDMI 1:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.26164	0.19	0.15	38.08	38.42	61.38	22.96	QP
2	0.45155	0.19	0.15	33.91	34.25	56.85	22.60	QP
3	0.64058	0.20	0.15	32.92	33.27	56.00	22.73	QP
4	0.80023	0.20	0.15	31.90	32.25	56.00	23.75	QP
5	0.98914	0.21	0.14	31.52	31.87	56.00	24.13	QP
6	1.153	0.21	0.14	31.05	31.40	56.00	24.60	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

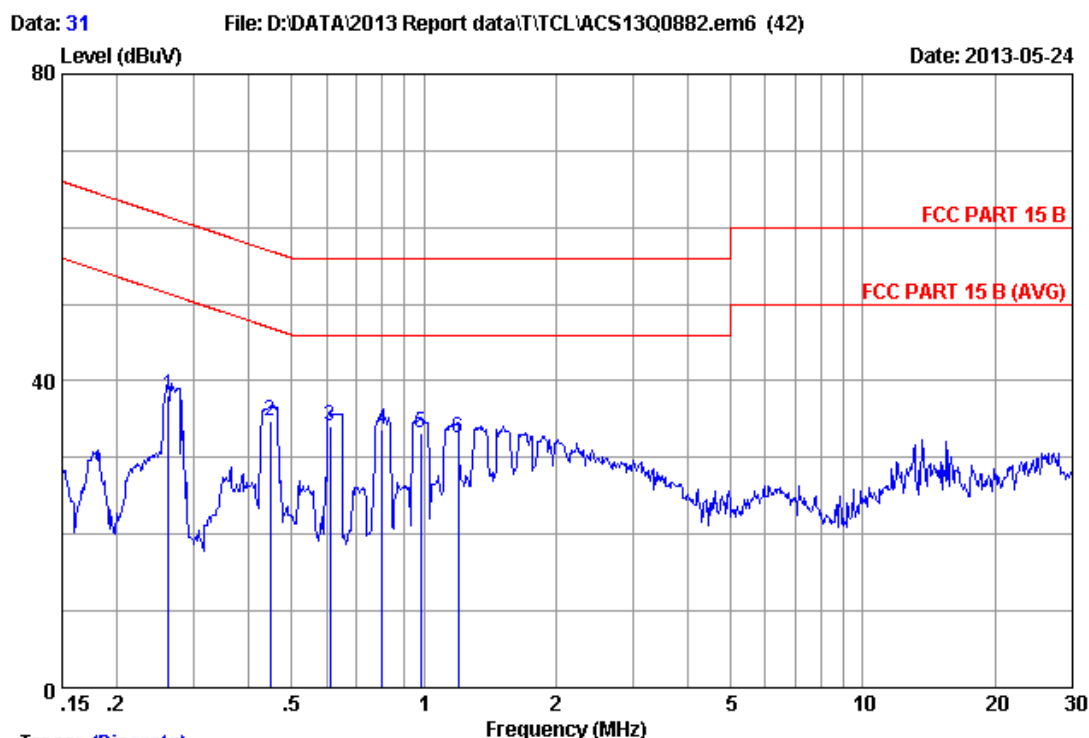


Trace: (Discrete)

Site no :1#conduction Data No :31
Dis./Lisn. : ** 2012 ESH2-Z5 NEUTRAL
Limit :FCC PART 15 B
Env./Ins. :26.5°C/66% Engineer :Nick_Huang
EUT :LCD TV M/N:LE40FHDE5510
Power Rating :AC 120V/60Hz
Test Mode :PC Mode
Running "H" Pattern And 1KHz Playing
HDMI 1:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.26164	0.22	0.15	37.67	38.04	61.38	23.34	QP
2	0.44679	0.23	0.15	34.36	34.74	56.93	22.19	QP
3	0.61075	0.24	0.15	33.64	34.03	56.00	21.97	QP
4	0.80448	0.24	0.15	33.20	33.59	56.00	22.41	QP
5	0.98391	0.24	0.14	32.74	33.12	56.00	22.88	QP
6	1.197	0.25	0.14	32.10	32.49	56.00	23.51	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector.
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.

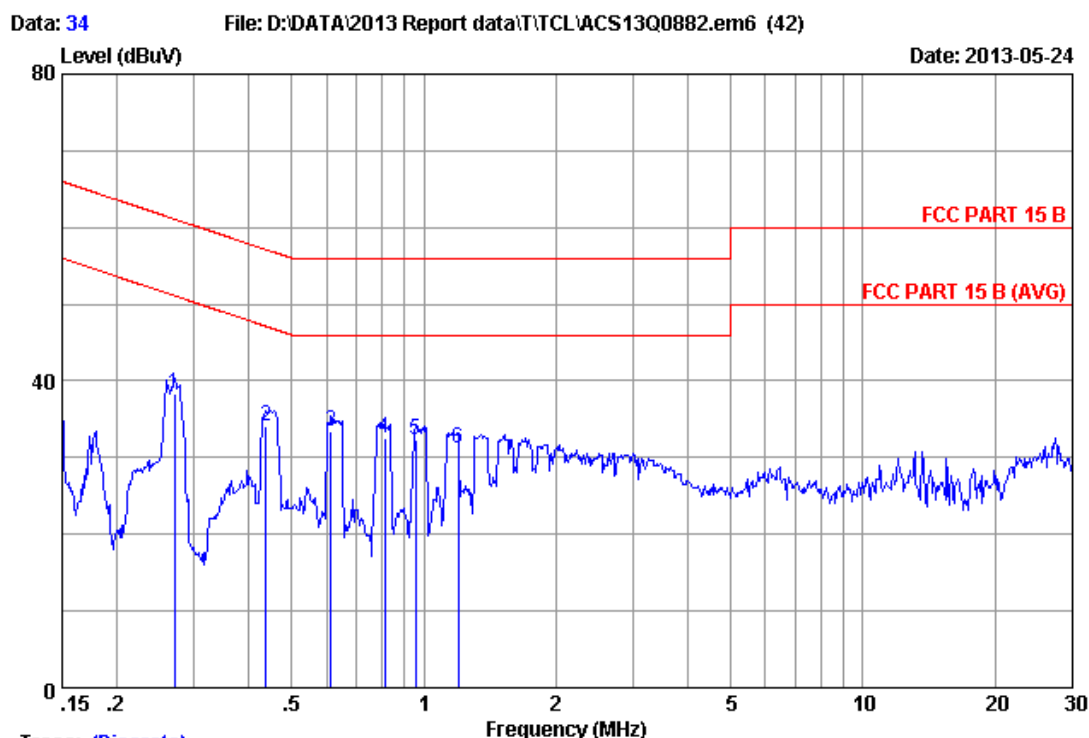


Trace: (Discrete)

Site no :1#conduction Data No :34
 Dis./Lisn. : ** 2012 ESH2-Z5 LINE
 Limit :FCC PART 15 B
 Env./Ins. :26.5°C/66% Engineer :Nick_Huang
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :PC Mode
 Running "H" Pattern And 1KHz Playing
 HDMI 2:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.27009	0.19	0.15	38.08	38.42	61.12	22.70	QP
2	0.43742	0.19	0.15	33.85	34.19	57.11	22.92	QP
3	0.61400	0.20	0.15	33.12	33.47	56.00	22.53	QP
4	0.81305	0.20	0.15	32.14	32.49	56.00	23.51	QP
5	0.95819	0.21	0.14	31.88	32.23	56.00	23.77	QP
6	1.197	0.22	0.14	30.92	31.28	56.00	24.72	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

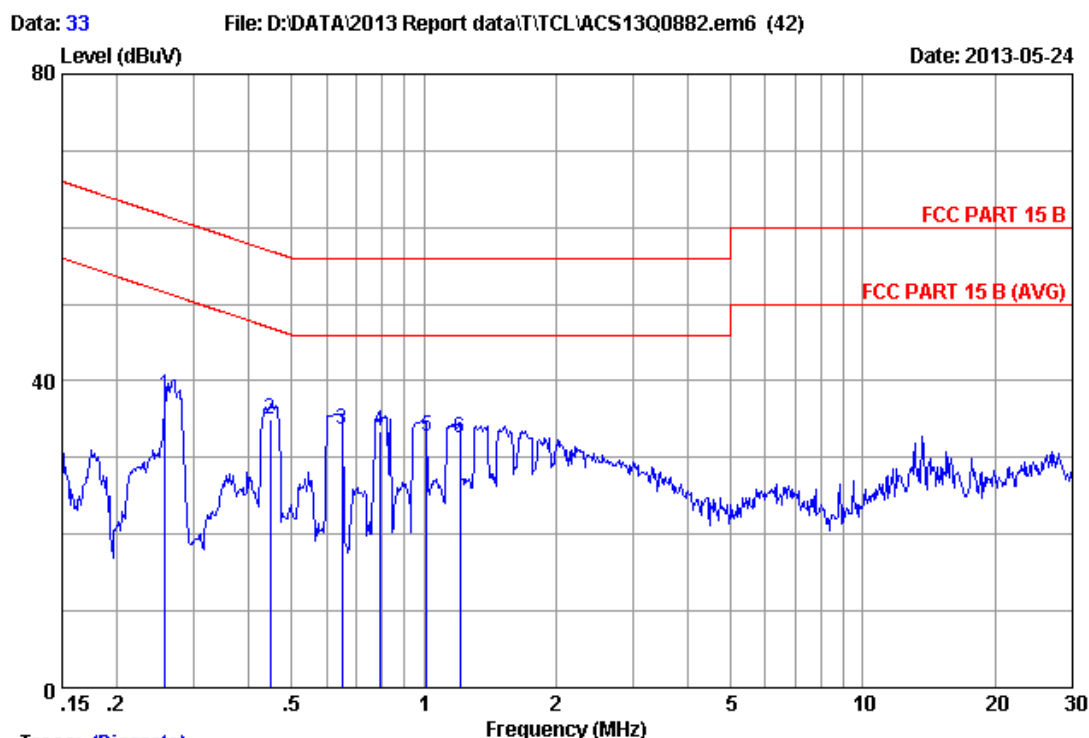


Trace: (Discrete)

Site no :1#conduction Data No :33
 Dis./Lisn. : ** 2012 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 B
 Env./Ins. :26.5°C/66% Engineer :Nick_Huang
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :PC Mode
 Running "H" Pattern And 1KHz Playing
 HDMI 2:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.25751	0.22	0.15	37.75	38.12	61.51	23.39	QP
2	0.44679	0.23	0.15	34.50	34.88	56.93	22.05	QP
3	0.65084	0.24	0.15	33.36	33.75	56.00	22.25	QP
4	0.79180	0.24	0.15	33.10	33.49	56.00	22.51	QP
5	1.016	0.24	0.14	32.39	32.77	56.00	23.23	QP
6	1.210	0.25	0.14	32.16	32.55	56.00	23.45	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

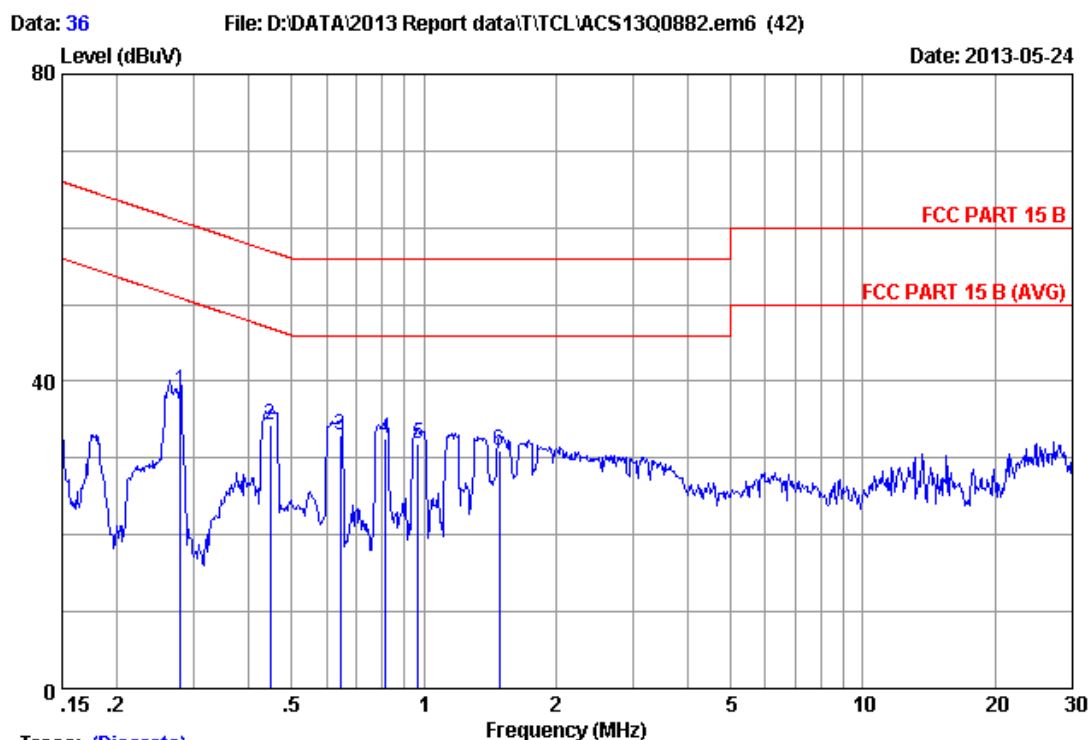


Trace: (Discrete)

Site no :1#conduction Data No :36
 Dis./Lisn. : ** 2012 ESH2-Z5 LINE
 Limit :FCC PART 15 B
 Env./Ins. :26.5°C/66% Engineer :Nick_Huang
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :PC Mode
 Running "H" Pattern And 1KHz Playing
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV)	Limits (dBUV)	Margin (dB)	Remark
1	0.27881	0.19	0.15	38.34	38.68	60.85	22.17	QP
2	0.44679	0.19	0.15	33.91	34.25	56.93	22.68	QP
3	0.64398	0.20	0.15	32.54	32.89	56.00	23.11	QP
4	0.81737	0.20	0.15	32.16	32.51	56.00	23.49	QP
5	0.96840	0.21	0.14	31.44	31.79	56.00	24.21	QP
6	1.487	0.22	0.14	30.63	30.99	56.00	25.01	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

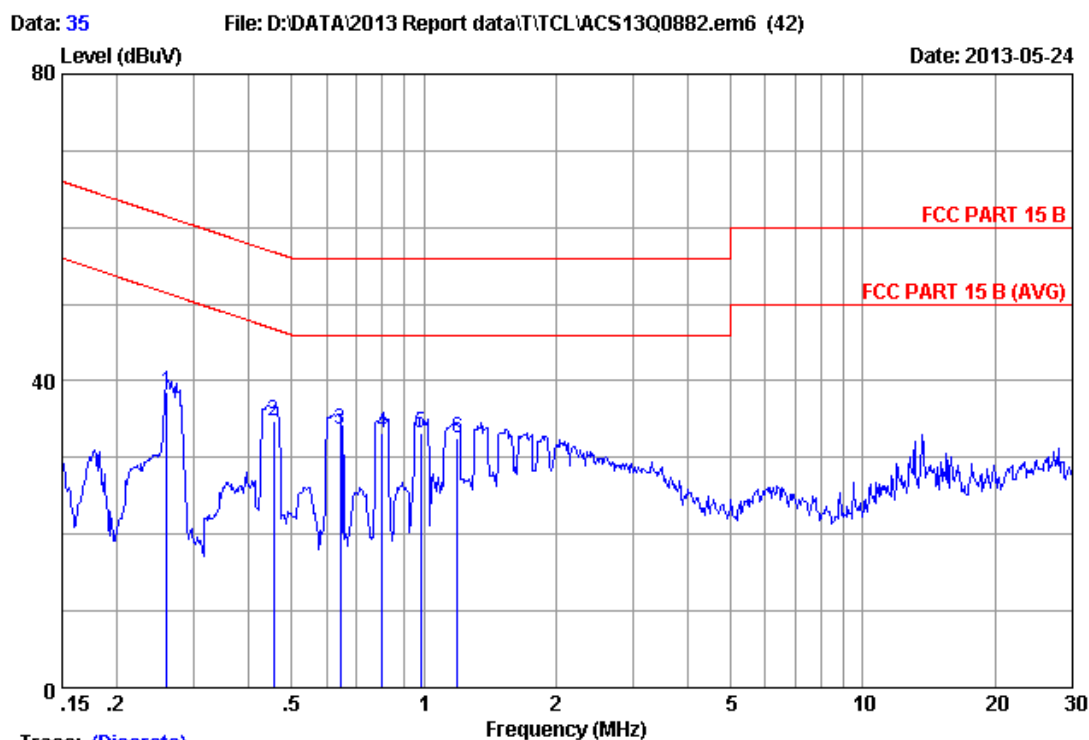

Trace: (Discrete)

Site no :1#conduction Data No :35
 Dis./Lisn. : ** 2012 ESH2-Z5 NEUTRAL
 Limit :FCC PART 15 B
 Env./Ins. :26.5°C/66% Engineer :Nick_Huang
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :PC Mode
 Running "H" Pattern And 1KHz Playing
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.26025	0.22	0.15	38.11	38.48	61.42	22.94	QP
2	0.45395	0.23	0.15	34.46	34.84	56.80	21.96	QP
3	0.64398	0.24	0.15	33.34	33.73	56.00	22.27	QP
4	0.80448	0.24	0.15	32.84	33.23	56.00	22.77	QP
5	0.98391	0.24	0.14	32.82	33.20	56.00	22.80	QP
6	1.191	0.25	0.14	32.25	32.64	56.00	23.36	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
 2.If the average limit is met when using a quasi-peak detector.
 the EUT shall be deemed to meet both limits and measurement
 with average detector is unnecessary.

4. RADIATED EMISSION MEASUREMENT

4.1. Test Equipment

4.1.1. For frequency range 30MHz~1000MHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	10m Chamber	AUDIX	N/A	N/A	Nov.25,12	1 Year
2	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Oct.31, 12	1 Year
3	Test Receiver	Rohde & Schwarz	ESCI	100843	Oct.31, 12	1 Year
4	Amplifier	Agilent	8447D	2944A10684	May.08, 13	1 Year
5	Trilog-Broadband Antenna	SCHWARZBECK	VULB 9168	9168-493	Mar.14, 13	1 Year
6	RF Cable	MIYAZAKI	CFD400-NL	10m Chamber No.1	May.08, 13	1 Year
7	Coaxial Switch	Anritsu	MP59B	M73989	May.08, 13	1 Year
8	Coaxial Switch	Anritsu	MP59B	6200766905	May.08, 13	1 Year

4.1.2. For frequency range 1GHz~2GHz


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	PXA Signal Analyzer	Agilent	N9030A	MY51380221	Oct.31, 12	1 Year
2	Horn Antenna	EMCO	3115	9607-4877	Aug.28, 13	1 Year
3	Amplifier	Agilent	8449B	3008A00863	May.08, 13	1 Year
4	RF Cable	Hubersuhner	SUCOFLEX106	77980/6	May.08, 13	1 Year
5	RF Cable	Hubersuhner	SUCOFLEX106	77977/6	May.08, 13	1 Year

4.2. Block Diagram of Test Setup

For frequency range 30MHz-1000MHz

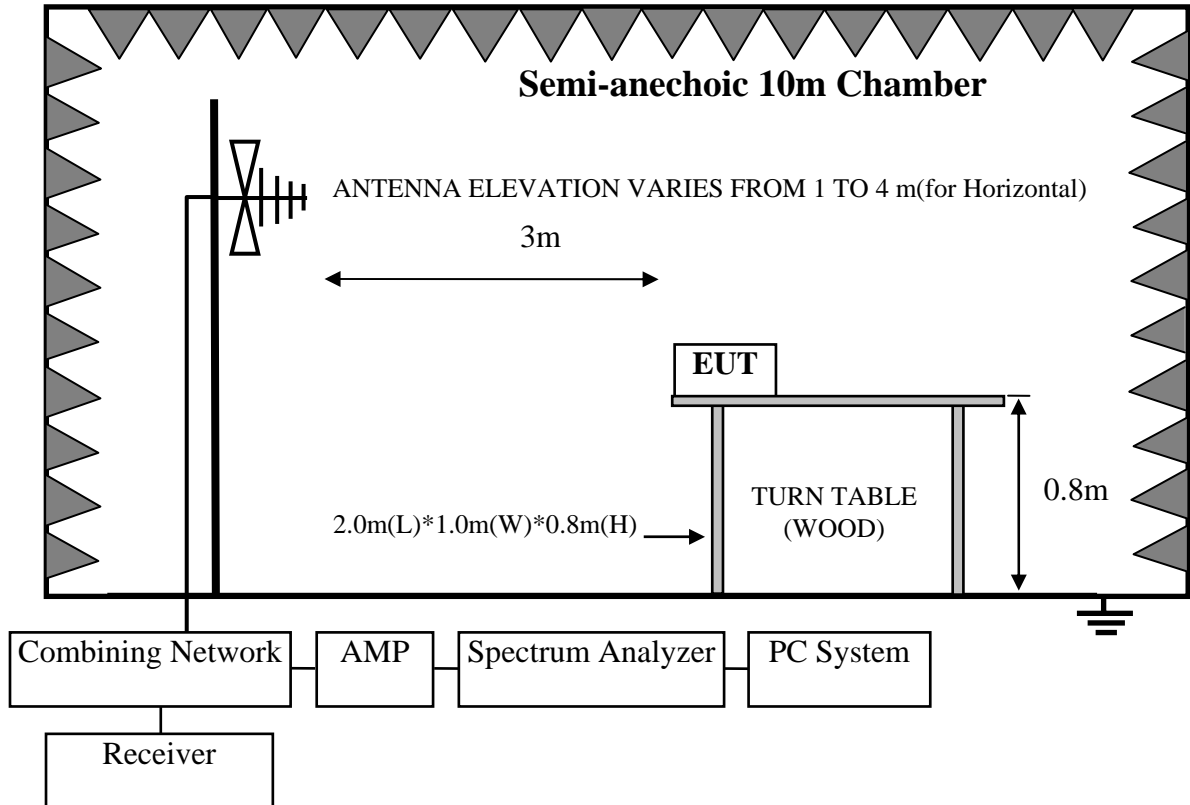

For frequency range 1GHz-2GHz

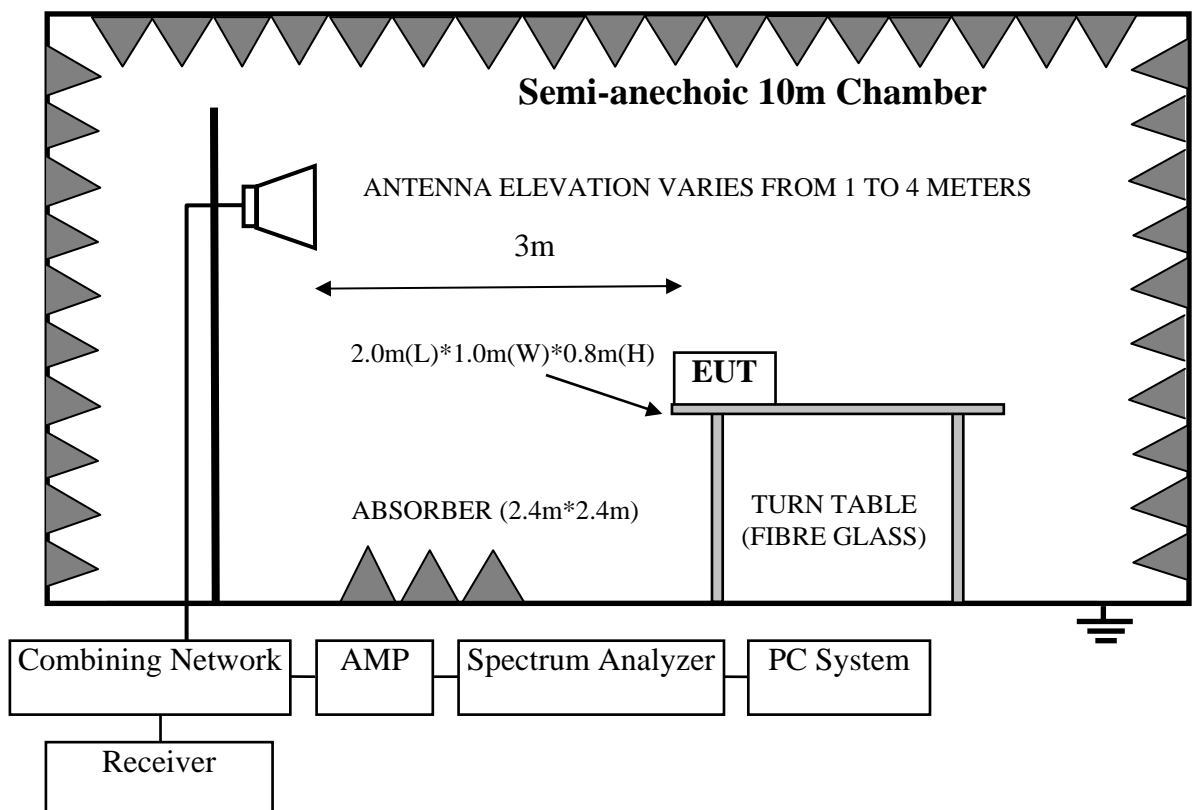

4.3.Radiated Emission Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μV)/m
30 ~ 88	3	40.0
88 ~ 216	3	43.5
216 ~ 960	3	46.0
960 ~ 1000	3	54.0
Above 1000	3	74(Peak)54(Average)

- Remark: (1) Emission level = Antenna Factor + Cable Loss + Reading
Emission level = Antenna Factor -Amp Factor +Cable Loss + Reading
(above 1000MHz)
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.4.EUT Configuration on Test

The configurations of EUT are listed in Section 3.4

4.5.Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.5. except the test set up replaced by Section 4.2.

4.6.Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to ANSI C63.4: 2009 on Radiated Emission test.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's RBW is set at 1MHz and VBW is set at 3MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz.

4.7. Radiated Disturbance Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

EUT: LCD TV Model No. : LE40FHDE5510

For frequency range 30MHz~1000MHz

The EUT with the following test modes were tested and selected to read Q.P values, all the test results are listed in next pages.

Test Date: Jun.02, 2013 Temperature: 24℃ Humidity: 59%

The details of test modes are as follows :

No.	Test Mode	Input Port	Resolution & Frequency	Reference Test Data No.	
				Horizontal	Vertical
1.	PC Mode	VGA	640*480 @60Hz	#44	#41
2.			1024*768 @ 60Hz	#40	#39
3.			1920*1080@60Hz	#38	#37
4.		HDMI 1	1920*1080@60Hz	#32	#31
5.		HDMI 2	1920*1080@60Hz	#34	#33
6. ※		HDMI 3	1920*1080@60Hz	#36	#35

(※ Worst test mode)

For frequency range 1GHz~2GHz


The EUT with below test mode were measured within Anechoic Chamber and the test results listed in next pages

Note: For all the emissions above 1GHz, the peak measured level comply with peak limit, so the average level were deemed to comply with average limit.

Test Date: Jun.02, 2013 Temperature: 24℃ Humidity: 59%

NO.	Test Mode	Resolution & Frequency	Reference Test Data No.	
			Horizontal	Vertical
1.	VGA	1920*1080 @60Hz	#49	#50
2.	HDMI 1	1920*1080 @60Hz	#52	#51
3.	HDMI 2	1920*1080 @60Hz	#53	#54
4.	HDMI 3	1920*1080 @60Hz	#56	#55


30MHz~1000MHz

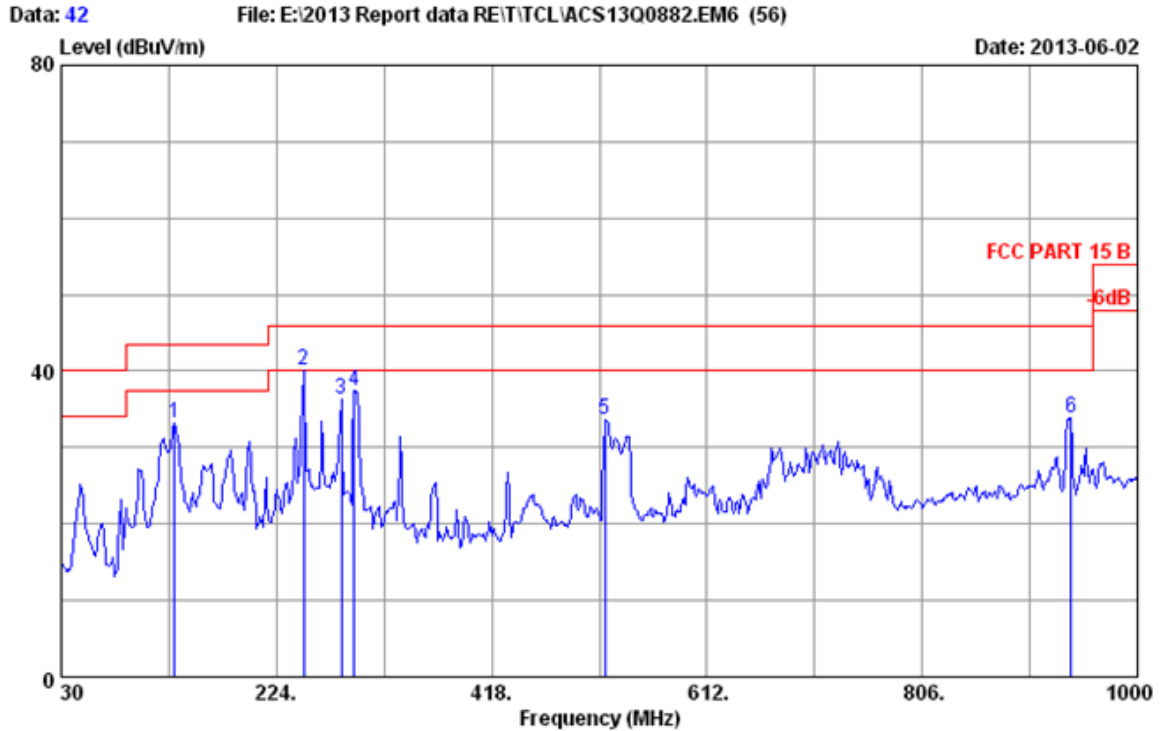

Site no :10m Chamber Data No :42
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:640*480@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	131.850	12.92	1.08	19.22	33.22	43.50	10.28	QP
2	248.250	11.55	1.51	27.08	40.14	46.00	5.86	QP
3	282.200	12.42	1.63	22.36	36.41	46.00	9.59	QP
4	293.840	12.66	1.68	23.09	37.43	46.00	8.57	QP
5	519.850	16.87	2.32	14.50	33.69	46.00	12.31	QP
6	939.860	22.07	3.65	8.20	33.92	46.00	12.08	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

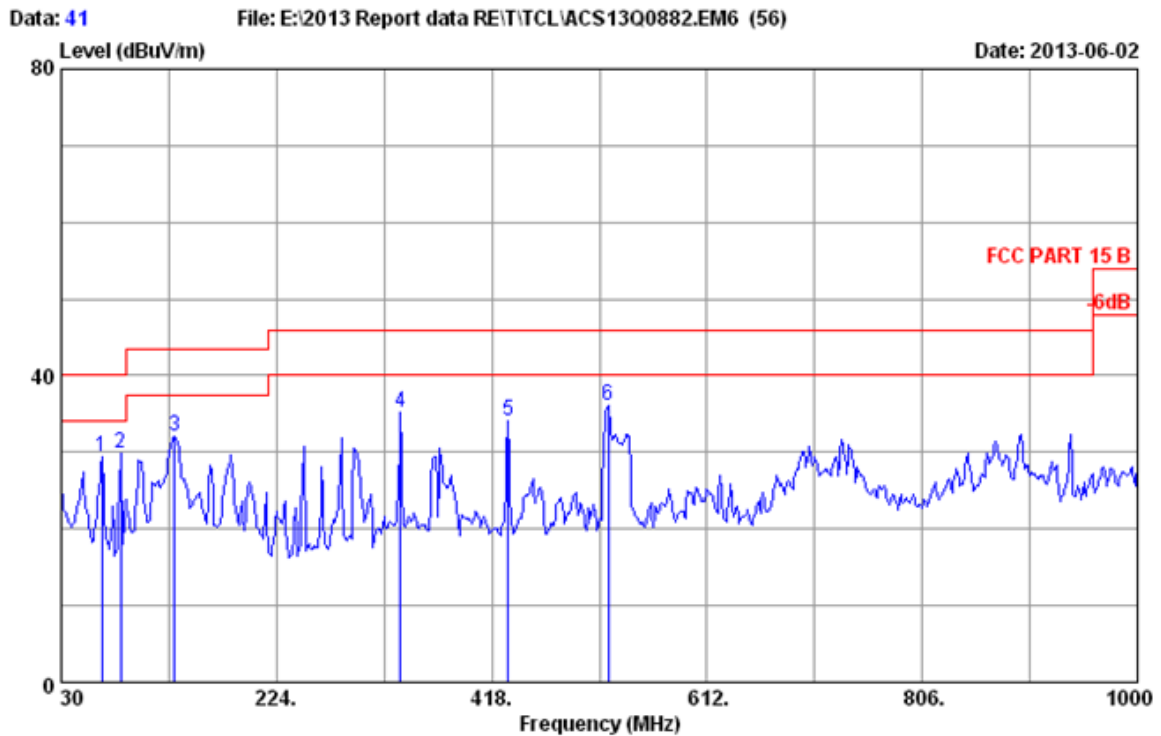

Site no :10m Chamber Data No :41
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :VERTICAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:640*480@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	66.860	11.43	0.79	17.30	29.52	40.00	10.48	QP
2	83.350	9.34	0.87	19.59	29.80	40.00	10.20	QP
3	131.850	12.92	1.08	18.10	32.10	43.50	11.40	QP
4	335.550	13.60	1.80	19.74	35.14	46.00	10.86	QP
5	432.550	15.56	2.08	16.55	34.19	46.00	11.81	QP
6	522.760	16.92	2.33	16.90	36.15	46.00	9.85	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

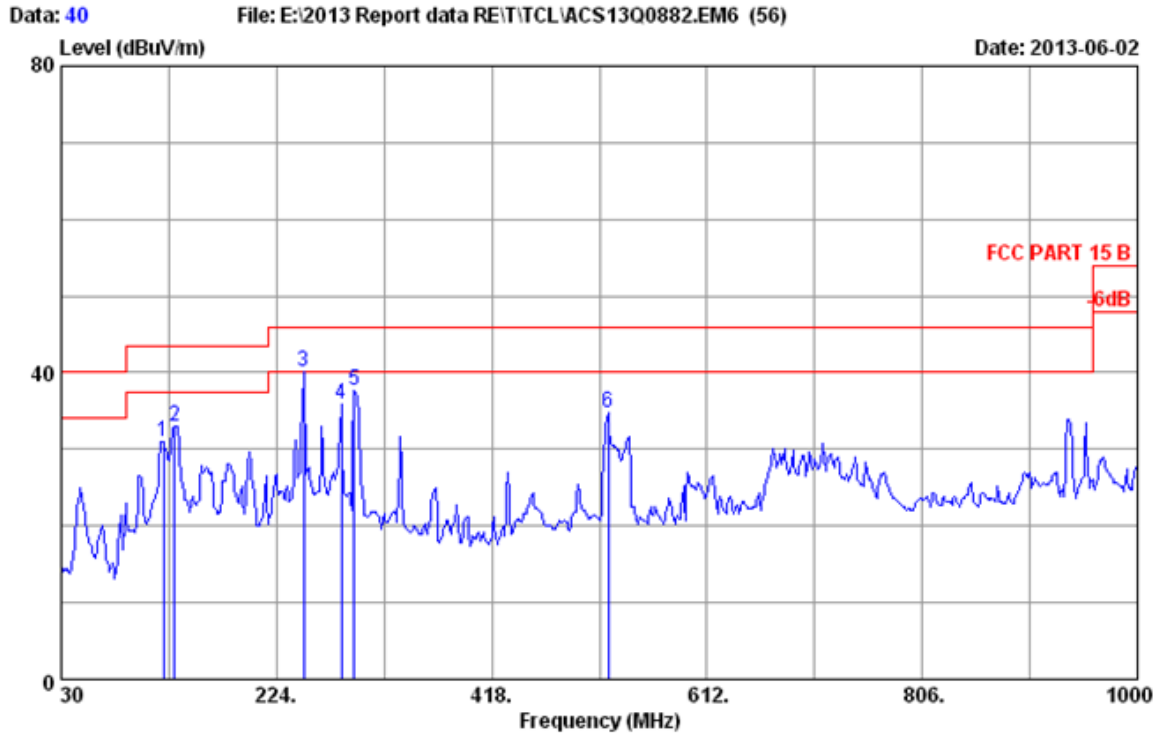

Site no :10m Chamber Data No :40
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1024*768@75Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	122.150	12.36	1.04	17.66	31.06	43.50	12.44	QP
2	131.850	12.92	1.08	19.09	33.09	43.50	10.41	QP
3	248.250	11.55	1.51	26.97	40.03	46.00	5.97	QP
4	282.200	12.42	1.63	21.90	35.95	46.00	10.05	QP
5	293.840	12.66	1.68	23.40	37.74	46.00	8.26	QP
6	522.760	16.92	2.33	15.48	34.73	46.00	11.27	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

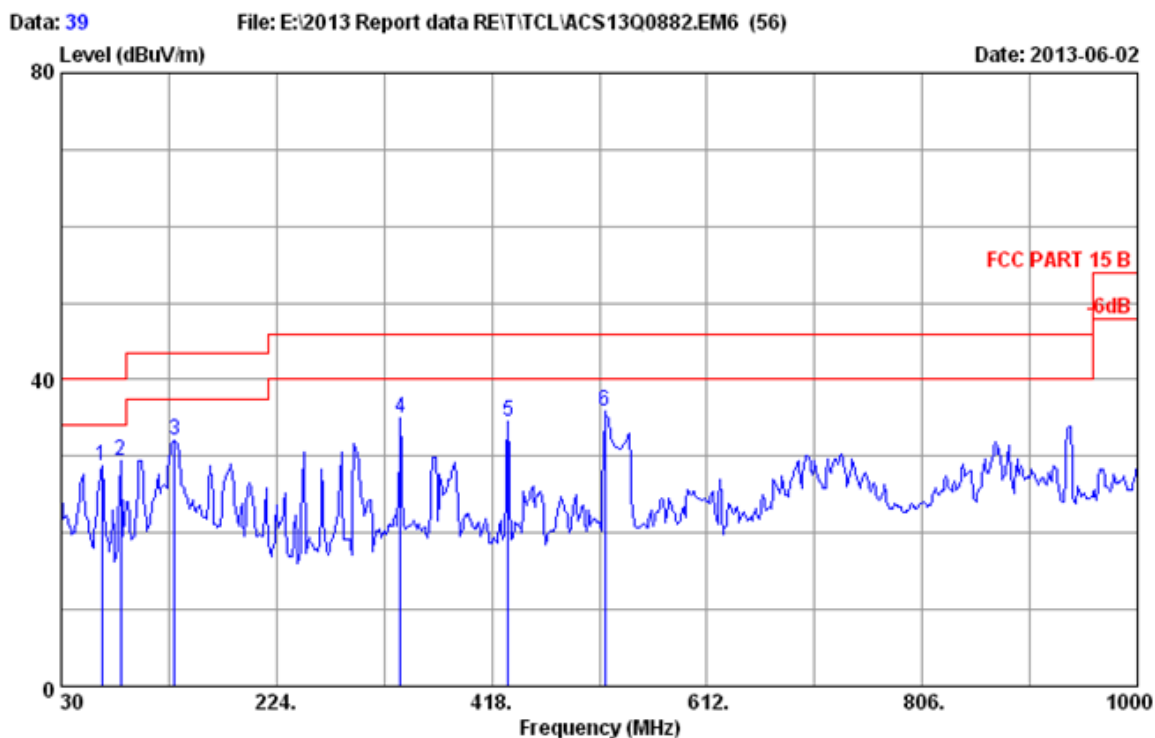

Site no :10m Chamber Data No :39
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :VERTICAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1024*768@75Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	66.860	11.43	0.79	16.61	28.83	40.00	11.17	QP
2	83.350	9.34	0.87	19.16	29.37	40.00	10.63	QP
3	131.850	12.92	1.08	18.15	32.15	43.50	11.35	QP
4	335.550	13.60	1.80	19.69	35.09	46.00	10.91	QP
5	432.550	15.56	2.08	16.82	34.46	46.00	11.54	QP
6	519.850	16.87	2.32	16.72	35.91	46.00	10.09	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

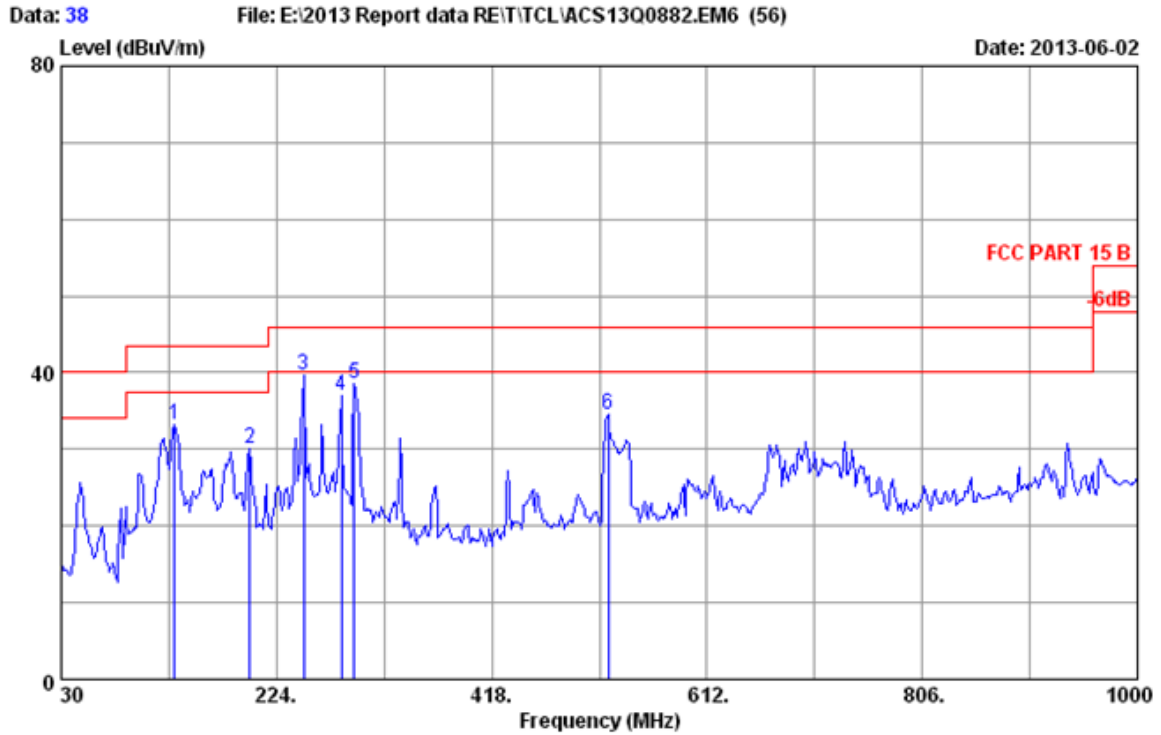

Site no :10m Chamber Data No :38
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	131.850	12.92	1.03	19.20	33.15	43.50	10.35	QP
2	199.750	9.91	1.21	19.02	30.14	43.50	13.36	QP
3	248.250	11.55	1.33	26.88	39.76	46.00	6.24	QP
4	282.200	12.42	1.41	23.09	36.92	46.00	9.08	QP
5	293.840	12.66	1.45	24.42	38.53	46.00	7.47	QP
6	522.760	16.92	2.18	15.52	34.62	46.00	11.38	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

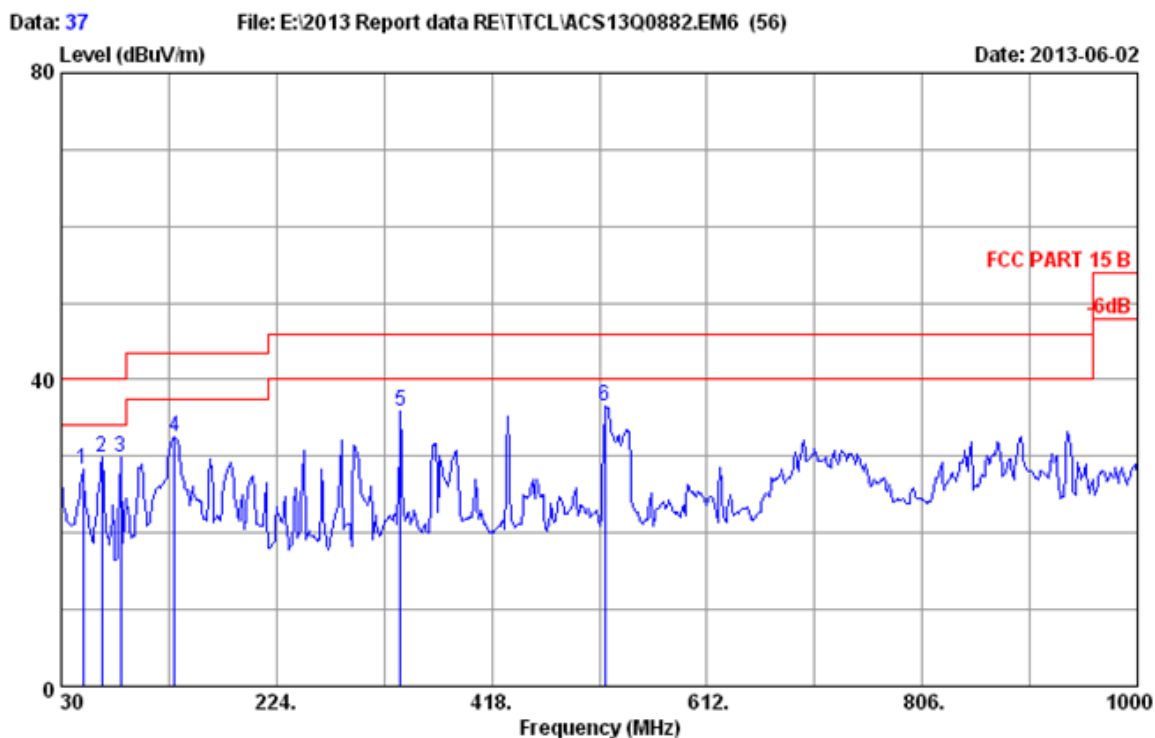

Site no :10m Chamber Data No :37
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :VERTICAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	49.400	13.55	0.66	14.19	28.40	40.00	11.60	QP
2	66.860	11.43	0.75	17.69	29.87	40.00	10.13	QP
3	83.350	9.34	0.83	19.71	29.88	40.00	10.12	QP
4	131.850	12.92	1.03	18.68	32.63	43.50	10.87	QP
5	335.550	13.60	1.59	20.64	35.83	46.00	10.17	QP
6	519.850	16.87	2.18	17.41	36.46	46.00	9.54	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

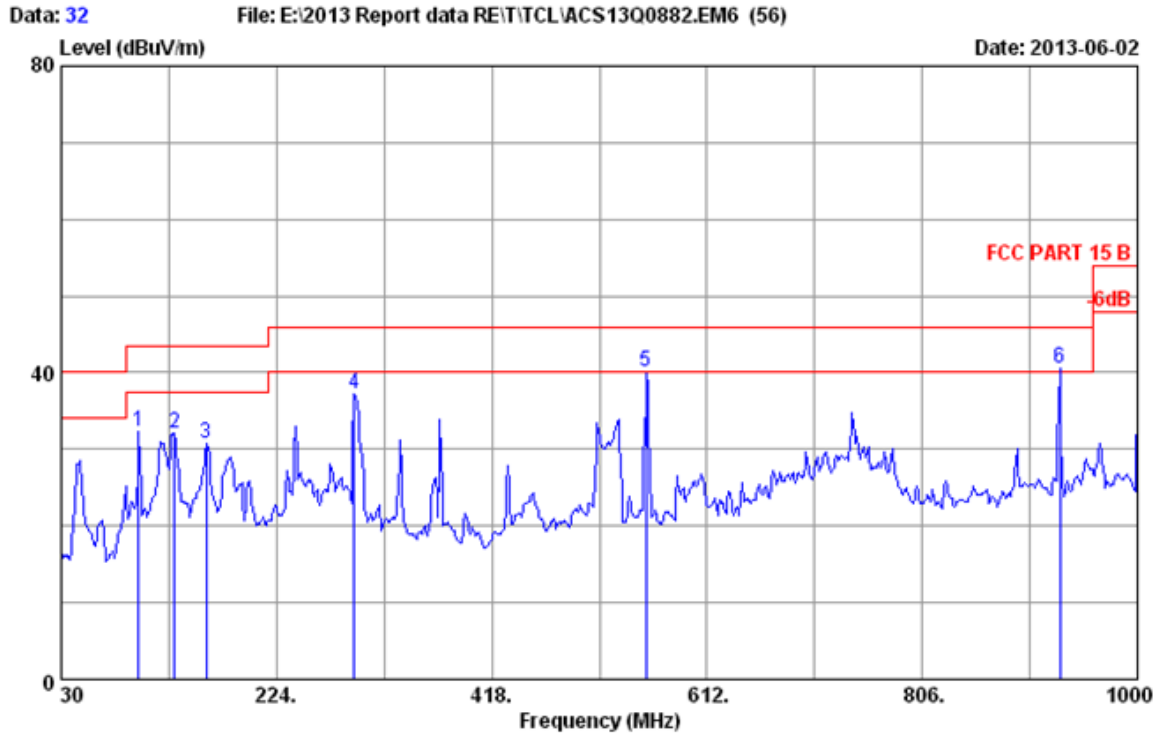

Site no :10m Chamber Data No :32
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	99.840	10.14	0.96	21.18	32.28	43.50	11.22	QP
2	131.850	12.92	1.03	18.19	32.14	43.50	11.36	QP
3	160.950	14.05	1.12	15.64	30.81	43.50	12.69	QP
4	293.840	12.66	1.45	23.18	37.29	46.00	8.71	QP
5	556.900	17.51	2.27	20.30	40.08	46.00	5.92	QP
6	930.160	22.01	3.17	15.33	40.51	46.00	5.49	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

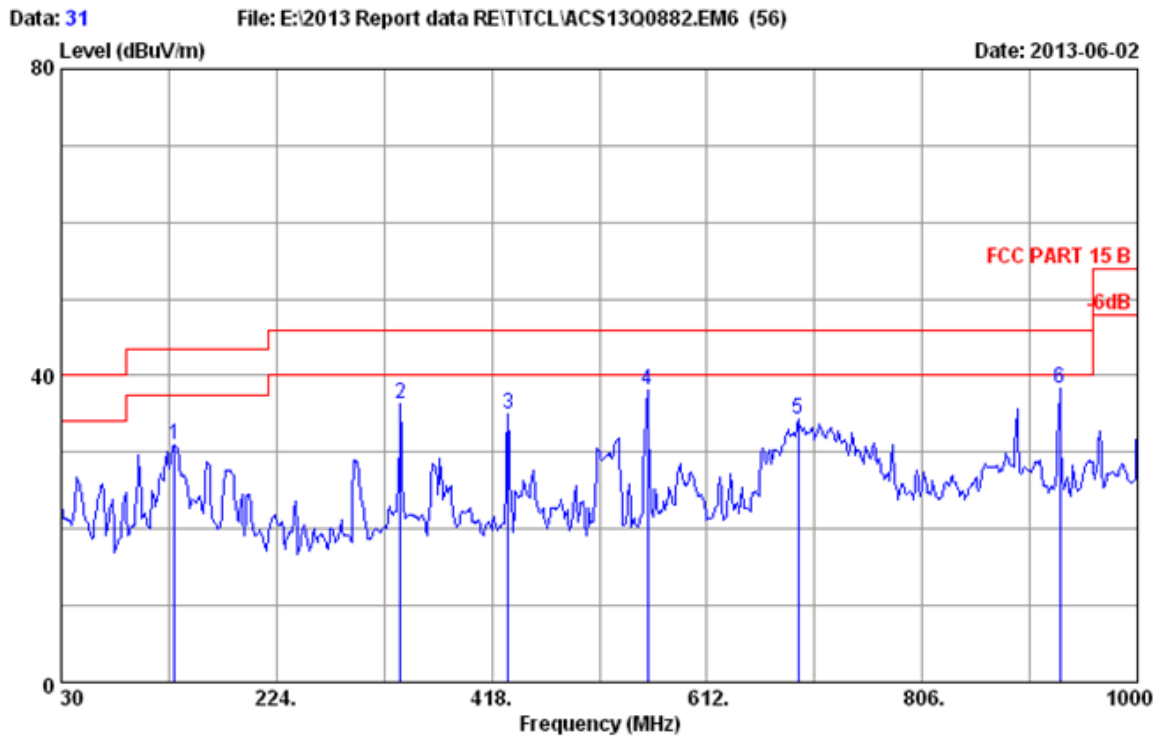

Site no :10m Chamber Data No :31
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :VERTICAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	131.850	12.92	1.03	16.95	30.90	43.50	12.60	QP
2	335.550	13.60	1.59	21.16	36.35	46.00	9.65	QP
3	432.550	15.56	1.90	17.54	35.00	46.00	11.00	QP
4	558.650	17.54	2.27	18.34	38.15	46.00	7.85	QP
5	694.450	19.59	2.62	12.17	34.38	46.00	11.62	QP
6	930.160	22.01	3.17	13.11	38.29	46.00	7.71	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

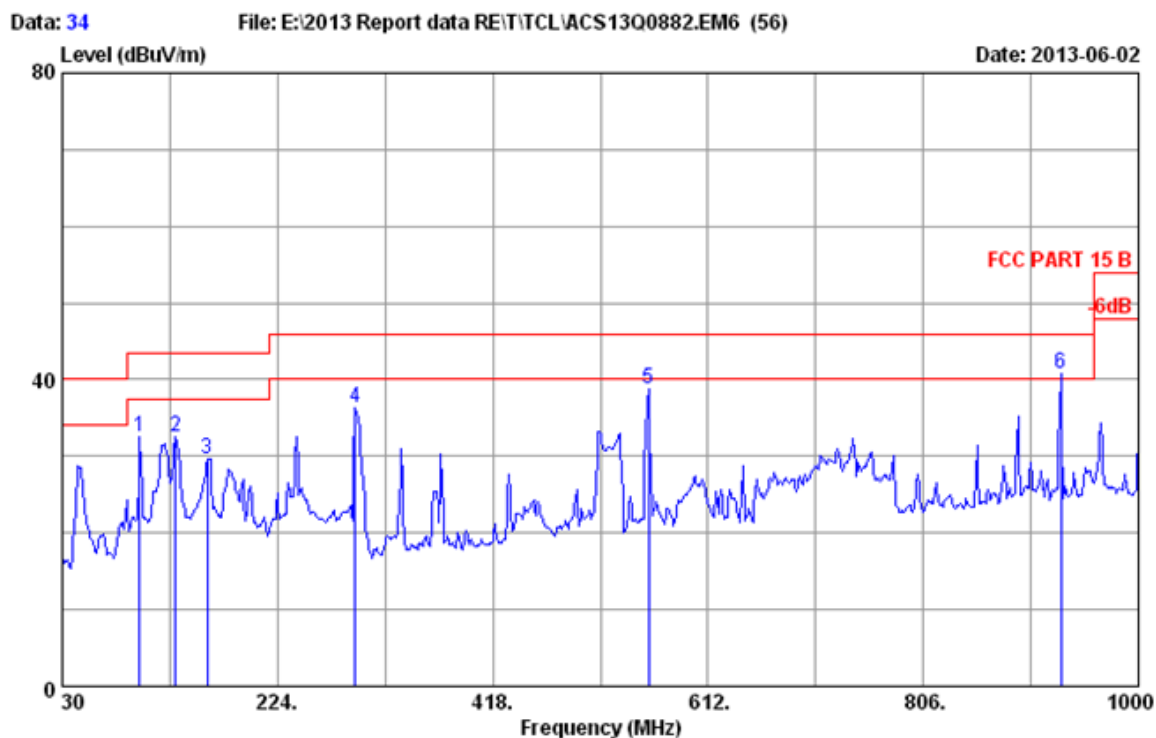

Site no :10m Chamber Data No :34
Dis./Ant. :3m 2013 9168-493 3M Ant.pol :HORIZONTAL
Limit :FCC PART 15 B
Env./Ins. :24°C/59% Engineer :RICK_LI
EUT :LCD TV M/N:LE40FHDE5510
Power Rating :AC 120V/60Hz
Test Mode :Running 'H' Pattern And 1KHz Playing
HMDI 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	99.840	10.14	0.96	21.33	32.43	43.50	11.07	QP
2	131.850	12.92	1.03	18.67	32.62	43.50	10.88	QP
3	160.950	14.05	1.12	14.49	29.66	43.50	13.84	QP
4	293.840	12.66	1.45	22.28	36.39	46.00	9.61	QP
5	558.650	17.54	2.27	18.87	38.68	46.00	7.32	QP
6	930.160	22.01	3.17	15.58	40.76	46.00	5.24	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
2.The emission Levels that are 20db below the official
limit are not reported

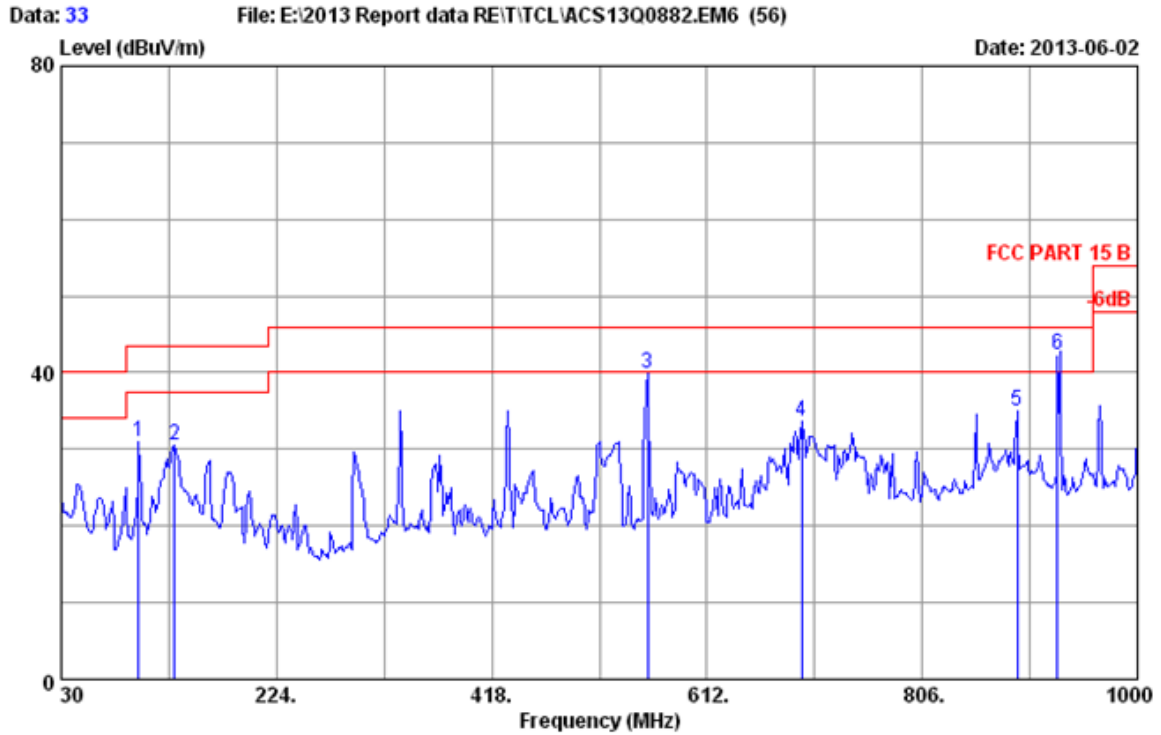

Site no :10m Chamber Data No :33
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :VERTICAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	99.840	10.14	0.96	19.84	30.94	43.50	12.56	QP
2	131.850	12.92	1.03	16.49	30.44	43.50	13.06	QP
3	558.650	17.54	2.27	20.02	39.83	46.00	6.17	QP
4	697.360	19.61	2.62	11.37	33.60	46.00	12.40	QP
5	891.360	21.53	3.08	10.30	34.91	46.00	11.09	QP
6	928.150	21.99	3.15	17.10	42.24	46.00	3.76	QP


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

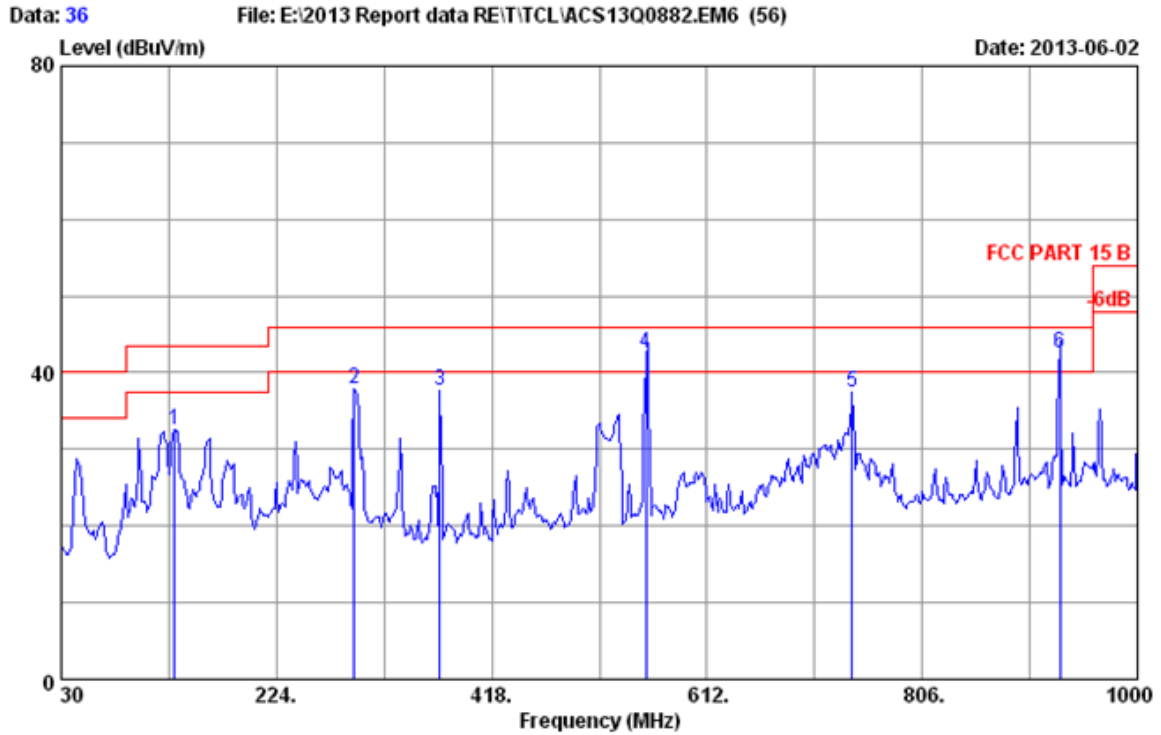

Site no :10m Chamber Data No :36
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :HORIZONTAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	131.850	12.92	1.03	18.64	32.59	43.50	10.91	QP
2	293.840	12.66	1.45	23.77	37.88	46.00	8.12	QP
3	371.440	14.25	1.71	21.64	37.60	46.00	8.40	QP
4	556.875	17.51	2.27	22.70	42.48	46.00	3.52	QP
5	742.950	20.19	2.74	14.55	37.48	46.00	8.52	QP
6	930.000	22.00	3.17	17.50	42.67	46.00	3.33	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported

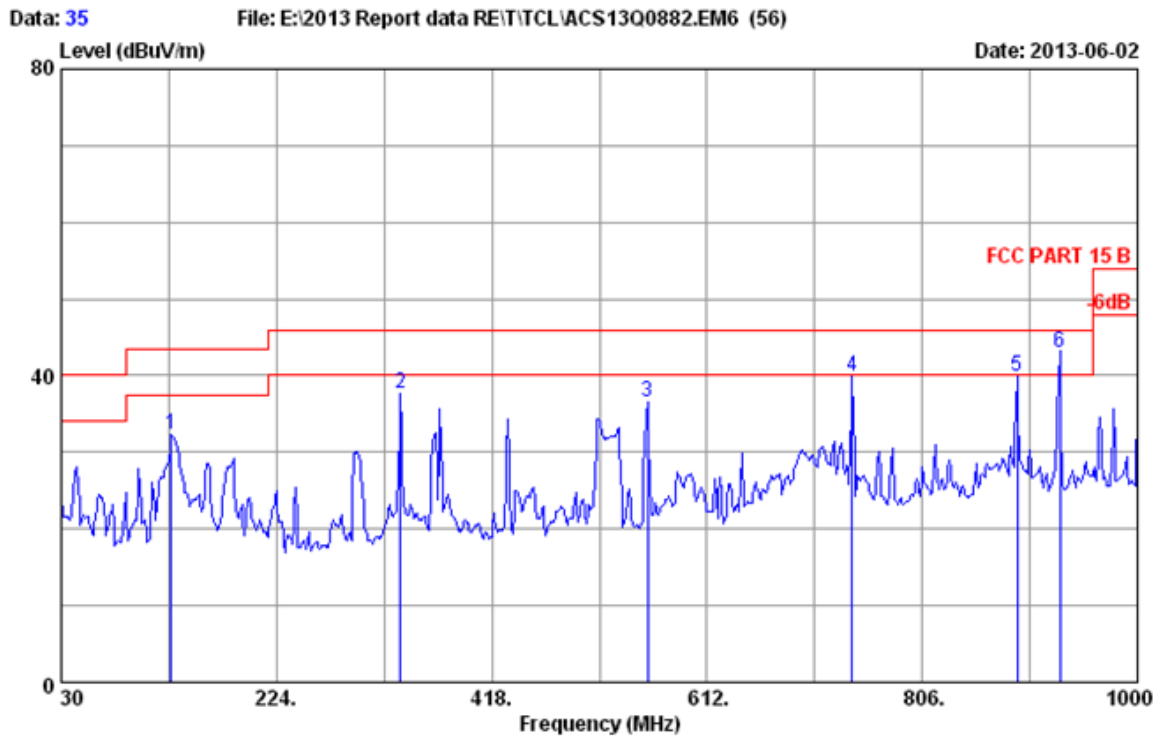


Site no :10m Chamber Data No :35
 Dis./Ant. :3m 2013 9168-493 3M Ant.pol :VERTICAL
 Limit :FCC PART 15 B
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	128.940	12.73	1.03	18.48	32.24	43.50	11.26	QP
2	335.550	13.60	1.59	22.55	37.74	46.00	8.26	QP
3	558.650	17.54	2.27	16.69	36.50	46.00	9.50	QP
4	742.950	20.19	2.74	17.00	39.93	46.00	6.07	QP
5	891.360	21.53	3.08	15.34	39.95	46.00	6.05	QP
6	930.000	22.00	3.17	17.80	42.97	46.00	3.03	QP

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading.
 2.The emission Levels that are 20db below the official
 limit are not reported


1GHz~2GHz

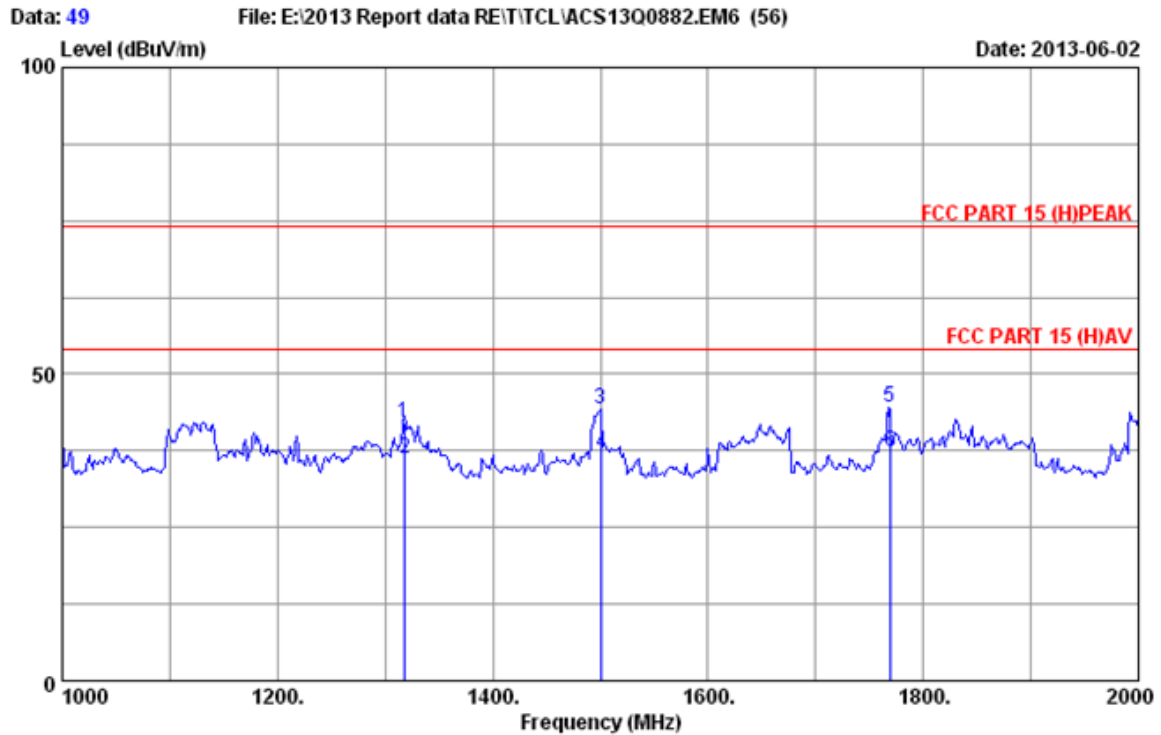

Site no :10M Data No :49
 Dis./Ant. :3m 2012 3115 95104877 Ant.pol :HORIZONTAL
 Limit :FCC PART 15 (H)PEAK
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1317.446	23.76	2.11	34.04	50.19	42.02	74.00	31.98	Peak
2	1318.625	23.76	2.11	34.04	44.26	36.09	54.00	17.91	Average
3	1500.142	24.10	2.25	34.00	52.01	44.36	74.00	29.64	Peak
4	1501.257	24.10	2.25	34.00	44.65	37.00	54.00	17.00	Average
5	1768.775	24.15	2.45	33.84	51.88	44.64	74.00	29.36	Peak
6	1769.658	24.15	2.45	33.84	44.57	37.33	54.00	16.67	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

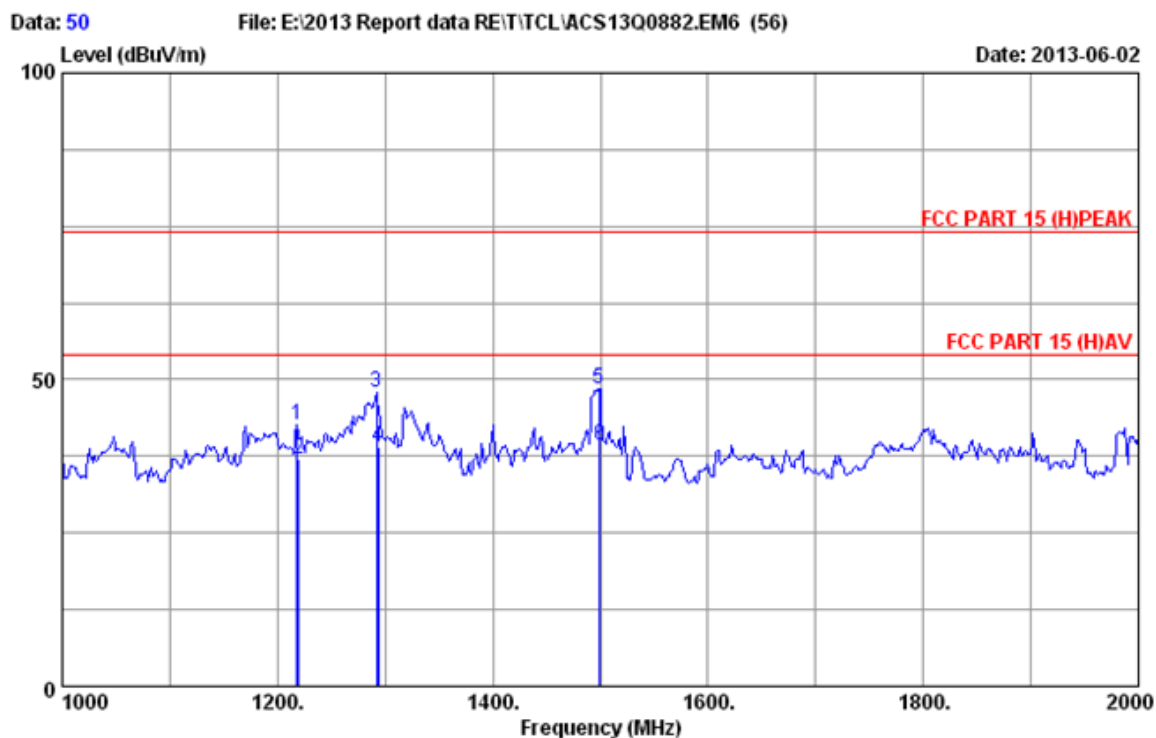

Site no :10M Data No :50
 Dis./Ant. :3m 2012 3115 95104877 Ant.pol :VERTICAL
 Limit :FCC PART 15 (H)PEAK
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 VGA:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1218.422	23.55	2.04	34.06	51.10	42.63	74.00	31.37	Peak
2	1219.658	23.55	2.04	34.06	45.62	37.15	54.00	16.85	Average
3	1292.142	23.69	2.09	34.04	56.26	48.00	74.00	26.00	Peak
4	1293.625	23.69	2.09	34.04	47.32	39.06	54.00	14.94	Average
5	1498.750	24.10	2.25	34.00	56.07	48.42	74.00	25.58	Peak
6	1499.623	24.10	2.25	34.00	46.96	39.31	54.00	14.69	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

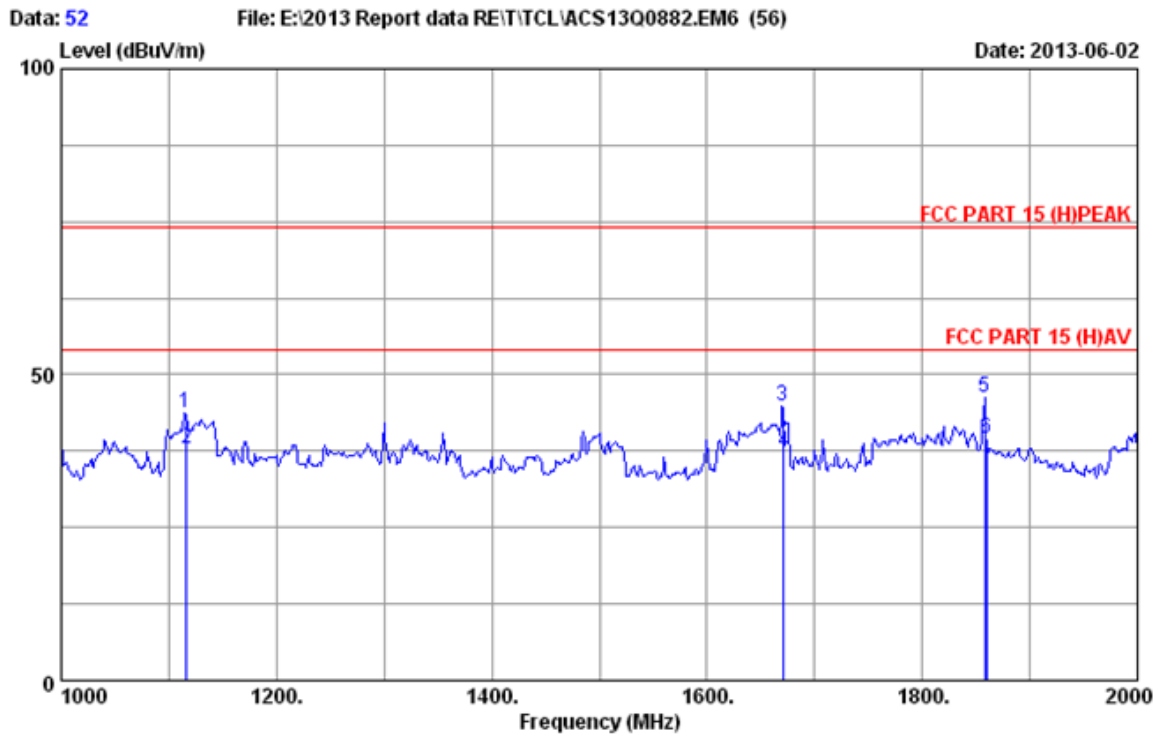

Site no :10M Data No :52
 Dis./Ant. :3m 2012 3115 95104877 Ant.pol :HORIZONTAL
 Limit :FCC PART 15 (H)PEAK
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1115.475	23.34	1.96	34.08	52.59	43.81	74.00	30.19	Peak
2	1116.325	23.34	1.96	34.08	46.66	37.88	54.00	16.12	Average
3	1670.425	24.13	2.38	33.90	52.17	44.78	74.00	29.22	Peak
4	1671.256	24.13	2.38	33.90	44.63	37.24	54.00	16.76	Average
5	1858.450	24.17	2.52	33.78	53.38	46.29	74.00	27.71	Peak
6	1859.366	24.17	2.52	33.78	46.63	39.54	54.00	14.46	Average


Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official
 limit are not reported

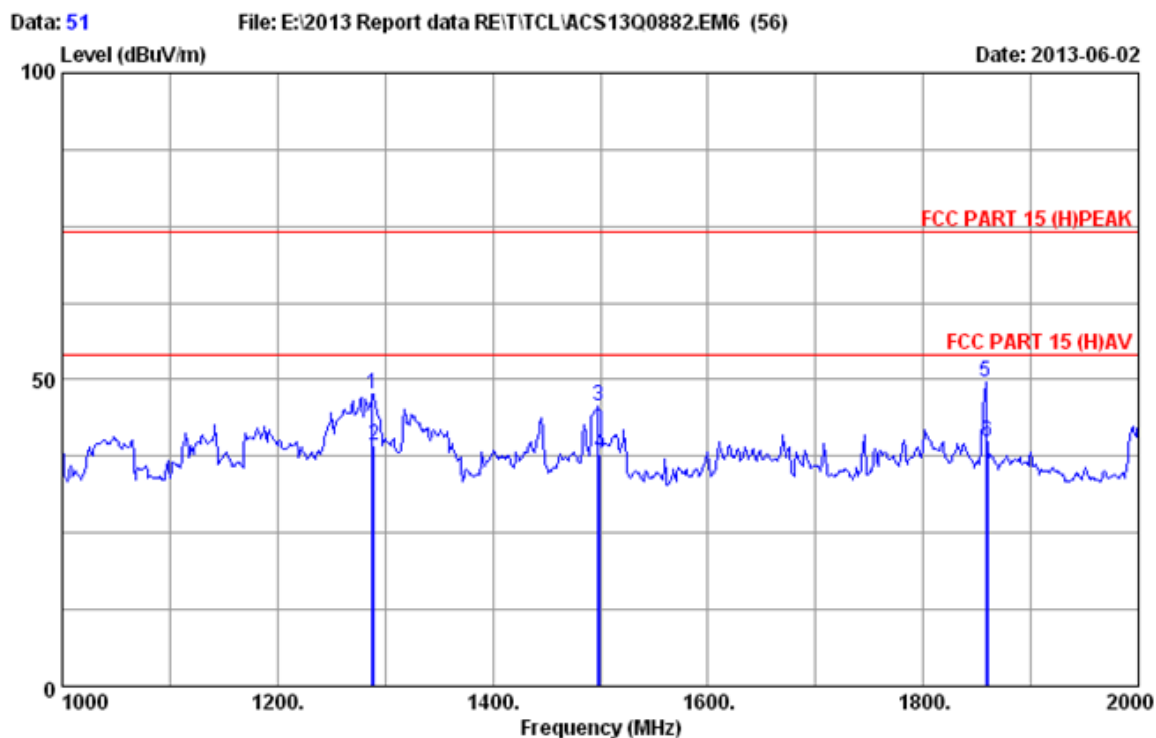

Site no :10M Data No :51
 Dis./Ant. :3m 2012 3115 95104877 Ant.pol :VERTICAL
 Limit :FCC PART 15 (H)PEAK
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 1:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1288.412	23.69	2.09	34.04	55.90	47.64	74.00	26.36	Peak
2	1289.625	23.69	2.09	34.04	47.65	39.39	54.00	14.61	Average
3	1498.350	24.10	2.25	34.00	53.19	45.54	74.00	28.46	Peak
4	1499.625	24.10	2.25	34.00	45.63	37.98	54.00	16.02	Average
5	1858.145	24.17	2.52	33.79	56.57	49.47	74.00	24.53	Peak
6	1859.625	24.17	2.52	33.78	46.98	39.89	54.00	14.11	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported

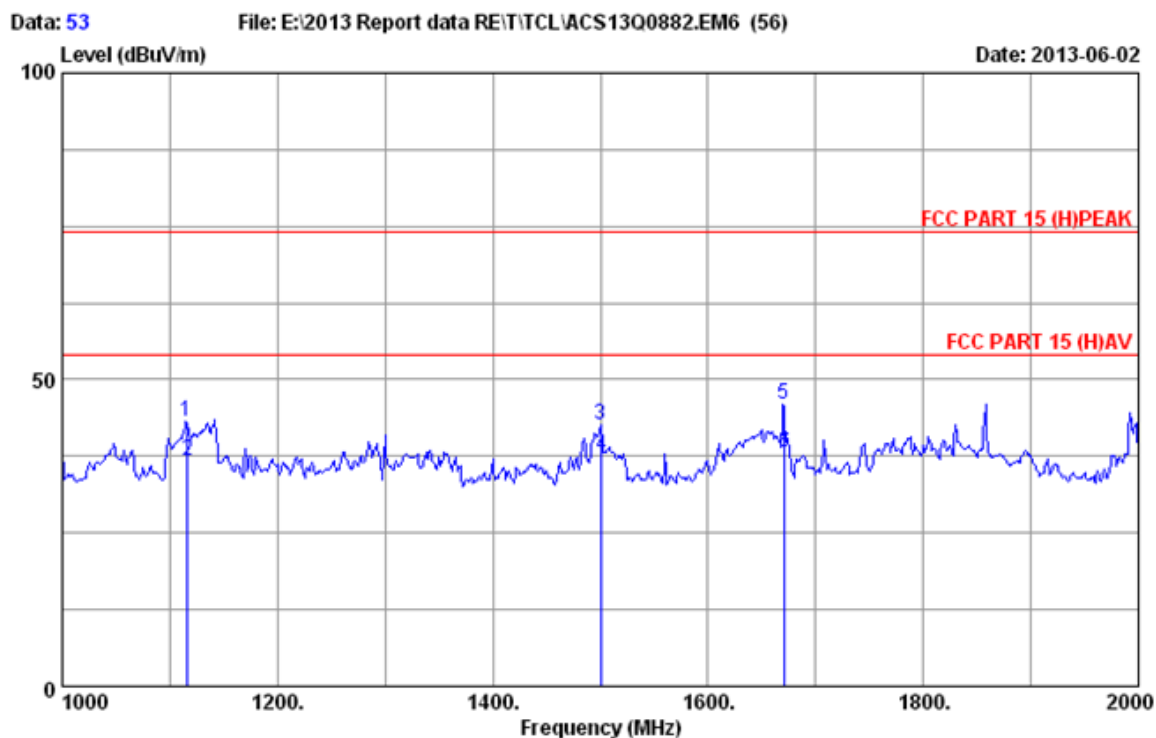


Site no :10M Data No :53
 Dis./Ant. :3m 2012 3115 95104877 Ant.pol :HORIZONTAL
 Limit :FCC PART 15 (H)PEAK
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1115.452	23.34	1.96	34.08	52.07	43.29	74.00	30.71	Peak
2	1116.325	23.34	1.96	34.08	45.63	36.85	54.00	17.15	Average
3	1500.475	24.10	2.25	34.00	50.26	42.61	74.00	31.39	Peak
4	1501.263	24.10	2.25	34.00	45.26	37.61	54.00	16.39	Average
5	1670.425	24.13	2.38	33.90	53.30	45.91	74.00	28.09	Peak
6	1671.256	24.13	2.38	33.90	45.63	38.24	54.00	15.76	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.

2.The emission Levels that are 20db below the official limit are not reported

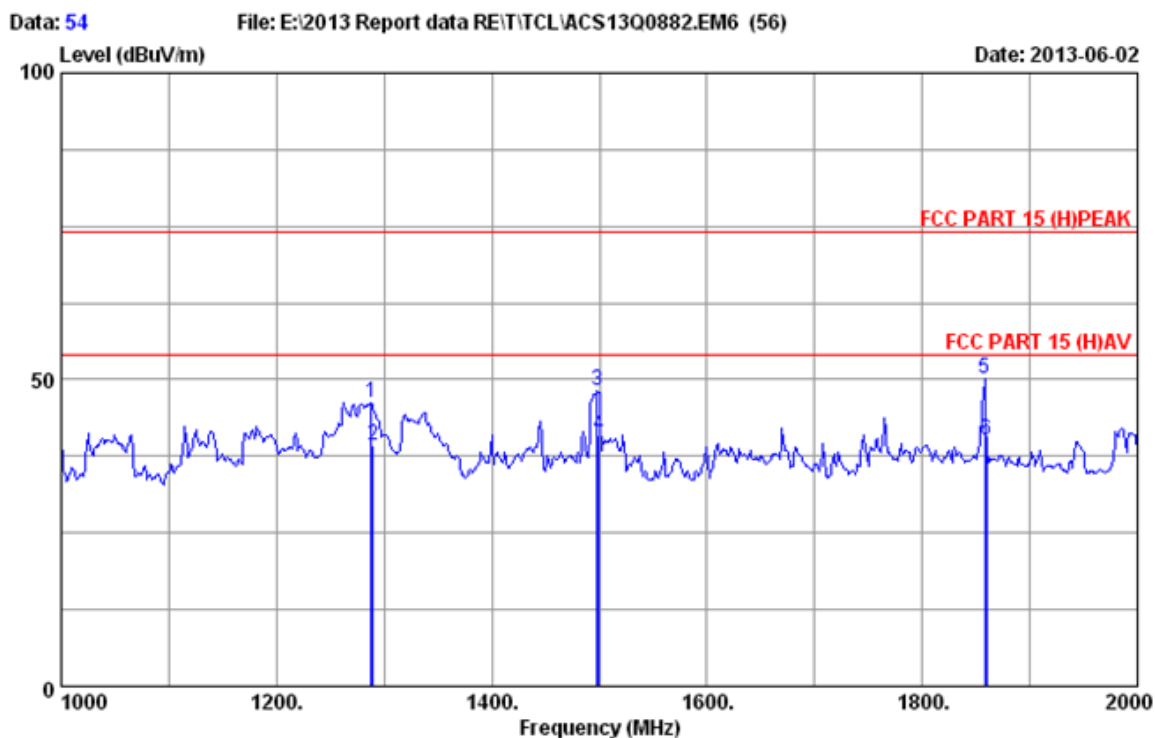


Site no :10M Data No :54
 Dis./Ant. :3m 2012 3115 95104877 Ant.pol :VERTICAL
 Limit :FCC PART 15 (H)PEAK
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 2:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBUV)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Remark
1	1288.148	23.69	2.09	34.04	54.46	46.20	74.00	27.80	Peak
2	1289.635	23.69	2.09	34.04	47.62	39.36	54.00	14.64	Average
3	1498.142	24.10	2.25	34.00	55.78	48.13	74.00	25.87	Peak
4	1499.360	24.10	2.25	34.00	48.62	40.97	54.00	13.03	Average
5	1858.245	24.17	2.52	33.79	57.14	50.04	74.00	23.96	Peak
6	1859.625	24.17	2.52	33.78	47.26	40.17	54.00	13.83	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.


2.The emission Levels that are 20db below the official limit are not reported

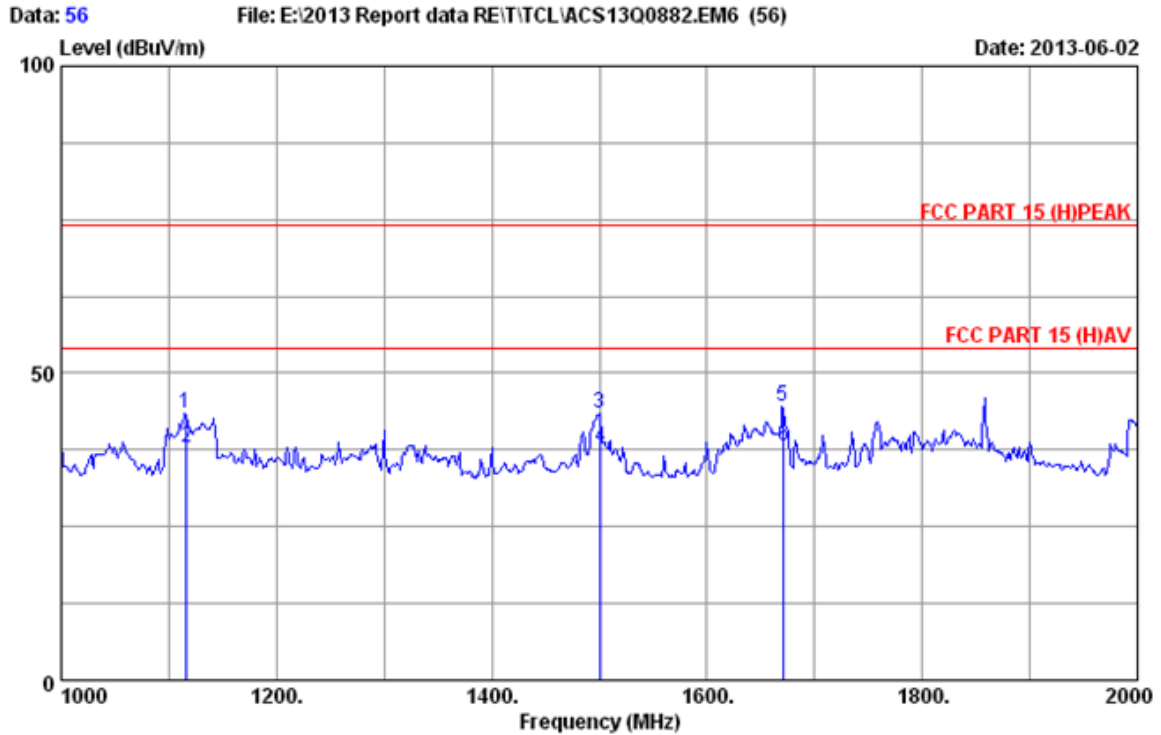

Site no :10M Data No :56
Dis./Ant. :3m 2012 3115 95104877 Ant.pol :HORIZONTAL
Limit :FCC PART 15 (H)PEAK
Env./Ins. :24°C/59% Engineer :RICK_LI
EUT :LCD TV M/N:LE40FHDE5510
Power Rating :AC 120V/60Hz
Test Mode :Running 'H' Pattern And 1KHz Playing
HDMI 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1115.475	23.34	1.96	34.08	52.18	43.40	74.00	30.60	Peak
2	1116.313	23.34	1.96	34.08	46.63	37.85	54.00	16.15	Average
3	1500.474	24.10	2.25	34.00	51.18	43.53	74.00	30.47	Peak
4	1501.256	24.10	2.25	34.00	45.63	37.98	54.00	16.02	Average
5	1670.450	24.13	2.38	33.90	51.83	44.44	74.00	29.56	Peak
6	1671.263	24.13	2.38	33.90	45.63	38.24	54.00	15.76	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
2.The emission Levels that are 20db below the official limit are not reported

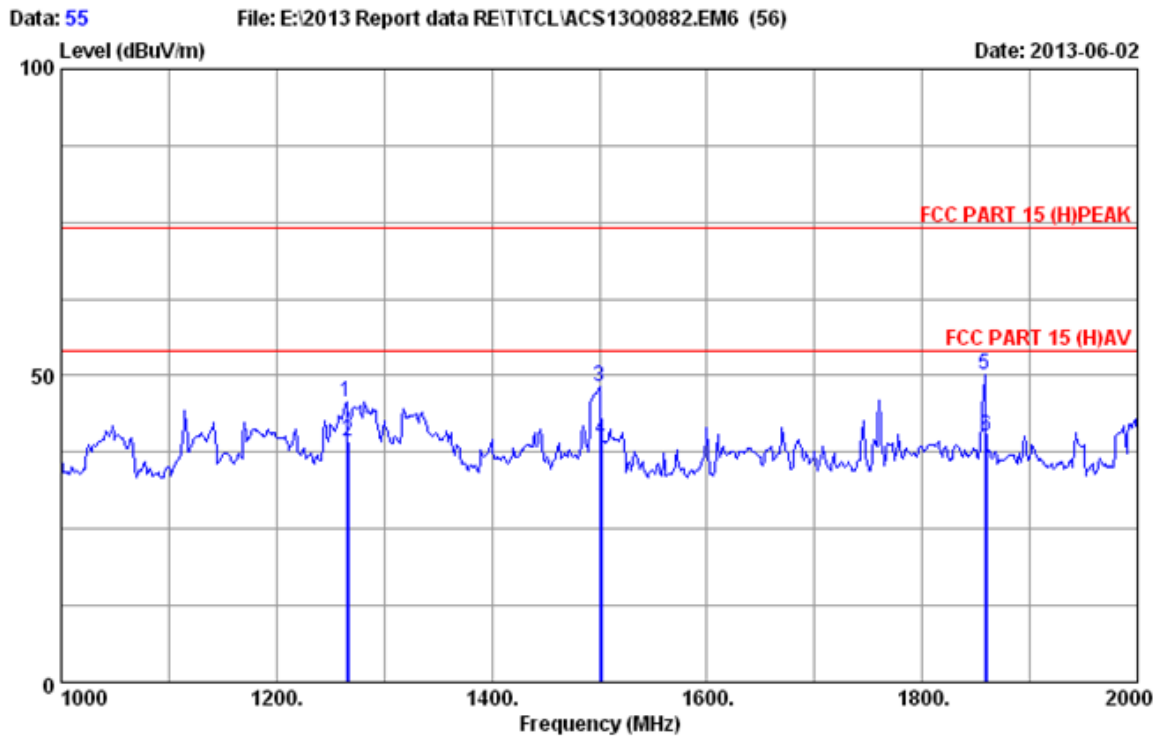

Site no :10M Data No :55
 Dis./Ant. :3m 2012 3115 95104877 Ant.pol :VERTICAL
 Limit :FCC PART 15 (H)PEAK
 Env./Ins. :24°C/59% Engineer :RICK_LI
 EUT :LCD TV M/N:LE40FHDE5510
 Power Rating :AC 120V/60Hz
 Test Mode :Running 'H' Pattern And 1KHz Playing
 HDMI 3:1920*1080@60Hz

No	Freq (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	AMP Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1265.456	23.65	2.07	34.05	54.05	45.72	74.00	28.28	Peak
2	1266.325	23.65	2.07	34.05	47.63	39.30	54.00	14.70	Average
3	1500.145	24.10	2.25	34.00	55.71	48.06	74.00	25.94	Peak
4	1502.266	24.10	2.25	34.00	47.33	39.68	54.00	14.32	Average
5	1858.135	24.17	2.52	33.79	57.18	50.08	74.00	23.92	Peak
6	1859.362	24.17	2.52	33.78	47.26	40.17	54.00	13.83	Average

Remarks: 1.Emission Level=Antenna Factor+Cable Loss+Reading-Amp factor.
 2.The emission Levels that are 20db below the official limit are not reported



5. DEVIATION TO TEST SPECIFICATIONS

[NONE]