

## TEST REPORT

For

### ATCOM Technology Co., Limited

FL 2, Block 3, Huangguan Industry Park, #21 Tai ran 9<sup>th</sup> Road,  
Futian, Shenzhen, Guangdong, China

**FCC ID: W9DATCOMATAMP01**

<b>Report Type:</b> Original Report	<b>Product Type:</b> WiFi Mesh ATA
<b>Test Engineer:</b> Felix Li	<i>Felix Li</i>
<b>Report Number:</b> RSZ11022310-00	
<b>Report Date:</b> 2011-10-11	
<b>Reviewed By:</b> EMC Engineer	Merry Zhao <i>merry.zhao</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....4**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    OBJECTIVE .....4

    RELATED SUBMITTAL(S)/GRANT(S).....4

    TEST METHODOLOGY .....4

    TEST FACILITY .....4

**SYSTEM TEST CONFIGURATION.....6**

    DESCRIPTION OF TEST CONFIGURATION .....6

    EUT EXERCISE SOFTWARE .....6

    EQUIPMENT MODIFICATIONS .....6

    LOCAL SUPPORT EQUIPMENT LIST AND DETAILS .....6

    EXTERNAL I/O CABLE.....6

    CONFIGURATION OF TEST SETUP .....7

    BLOCK DIAGRAM OF TEST SETUP .....7

**SUMMARY OF TEST RESULTS .....8**

**FCC §15.247 (i) & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....9**

    APPLICABLE STANDARD .....9

**FCC §15.203 - ANTENNA REQUIREMENT.....10**

    APPLICABLE STANDARD .....10

    ANTENNA CONNECTOR CONSTRUCTION .....10

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....11**

    APPLICABLE STANDARD .....11

    MEASUREMENT UNCERTAINTY .....11

    EUT SETUP.....11

    EMI TEST RECEIVER SETUP.....12

    TEST EQUIPMENT LIST AND DETAILS.....12

    TEST PROCEDURE .....12

    TEST RESULTS SUMMARY.....12

    TEST DATA .....12

**FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....15**

    APPLICABLE STANDARD .....15

    MEASUREMENT UNCERTAINTY .....15

    EUT SETUP.....15

    EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....16

    TEST EQUIPMENT LIST AND DETAILS.....16

    TEST PROCEDURE .....16

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....16

    TEST RESULTS SUMMARY.....17

    TEST DATA .....17

**FCC §15.247(a) (2) – 6 dB BANDWIDTH TESTING.....25**

    APPLICABLE STANDARD .....25

    TEST EQUIPMENT LIST AND DETAILS.....25

    TEST PROCEDURE .....25

    TEST DATA .....25

**FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER .....30**  
APPLICABLE STANDARD .....30  
TEST EQUIPMENT LIST AND DETAILS.....30  
TEST PROCEDURE .....30  
TEST DATA .....30

**FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE.....38**  
APPLICABLE STANDARD .....38  
TEST EQUIPMENT LIST AND DETAILS.....38  
TEST PROCEDURE .....38  
TEST DATA .....38

**FCC §15.247(e) - POWER SPECTRAL DENSITY .....42**  
APPLICABLE STANDARD .....42  
TEST EQUIPMENT LIST AND DETAILS.....42  
TEST PROCEDURE .....42  
TEST DATA .....42

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *ATCOM TECHNOLOGY Co., LIMITED* 's product, model number: *MP01 (FCC ID: W9DATCOMATAMP01)* or the "EUT" as referred to in this report is a *WiFi Mesh ATA*, which was measured approximately: 23.0 cm (L) x 11.0 cm (W) x 6.0 cm (H), rated output voltage: DC 24V adapter.

#### Adapter information:

Design No.: GQ07-240030-AU;

Input: AC 100-240V 50/60Hz 0.3A Max;

Output: DC 24V 300mA

*\* All measurement and test data in this report was gathered from production sample serial number: 1102065 (Assigned by BACL, Shenzhen). The EUT was received on 2011-02-23.*

### Objective

This report is prepared on behalf of *ATCOM TECHNOLOGY Co., LIMITED* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

N/A

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

### Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, Shihua Road, Futian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

For 802.11b and 802.11g mode, 11 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

EUT for 802.11b, 802.11g modes were tested with Channel 1, 6, 11.

The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates bandwidths, and modulations.

### EUT Exercise Software

Test software: tffpd32.280 ART

The test was performed under:

802.11b: Data rate: 1 Mbps.

802.11g: Data rate: 6 Mbps.

### Equipment Modifications

No modification was made to the unit tested.


### Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Laptop	D600	N/A


### External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded Detachable RJ45 Cable	0.9	Laptop	EUT
Unshielded Detachable Power Line	1.5	Adapter	EUT

### Configuration of Test Setup

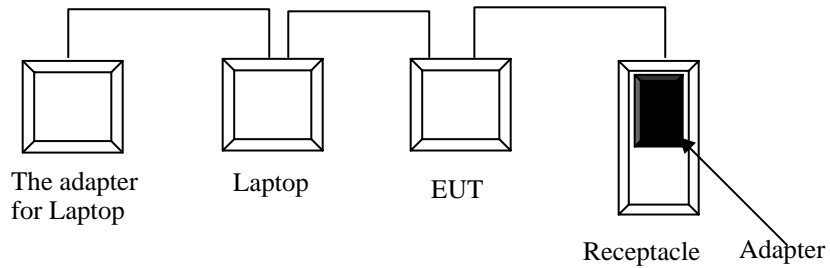

### Block Diagram of Test Setup

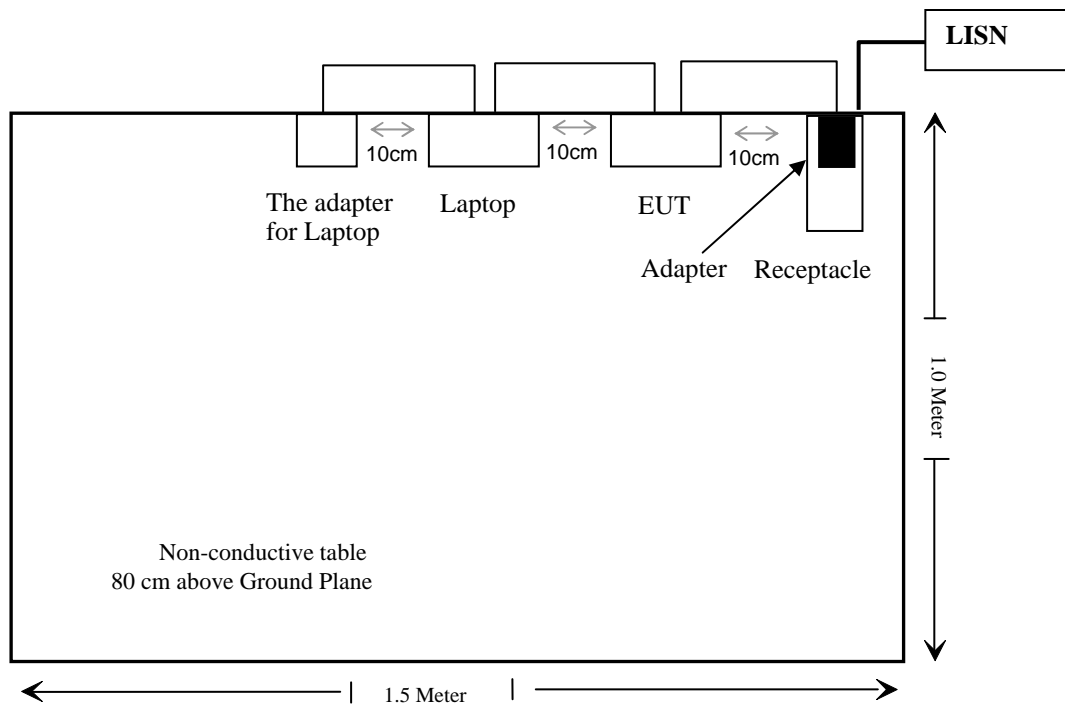

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i), §1.1307 (b)(1), §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.207 (a),	AC Line Conducted Emissions	Compliance
§15.247(d)	Spurious Emissions at Antenna Port	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247 (a)(2)	6 dB Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance



**FCC §15.247 (i) & §2.1091 - MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

**Applicable Standard**

According to FCC §15.247(i) and subpart §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
<b>Frequency Range (MHz)</b>	<b>Electric Field Strength (V/m)</b>	<b>Magnetic Field Strength (A/m)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>Averaging Time (minutes)</b>
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz  
 \* = Plane-wave equivalent power density

**MPE Calculation**

Predication of MPE limit at a given distance

$$S = PG/4\pi R^2$$

Where:

- S= power density (in appropriate units, e.g. mW/cm<sup>2</sup>);
- P = power input to the antenna (in appropriate units, e.g., mW);
- G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;
- R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

<b>Radio Mode</b>	<b>Frequency (MHz)</b>	<b>Antenna Gain</b>		<b>Antenna Power</b>		<b>Evaluation Distance (cm)</b>	<b>Power Density (mW/cm<sup>2</sup>)</b>	<b>MPE Limit (mW/cm<sup>2</sup>)</b>
		<b>(dBi)</b>	<b>(numeric)</b>	<b>(dBm)</b>	<b>(mW)</b>			
802.11b	2462	2	1.5849	17.59	57.41	20	0.0181	1.0
802.11g	2412	2	1.5849	16.75	47.32	20	0.0149	1.0

**Result:**

The device meets FCC MPE limit at 20 cm distance.

---

## **FCC §15.203 - ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### **Antenna Connector Construction**

The EUT used two PCB antennas, one is RX antenna, and the other is TX antenna, which in accordance to section 15.203, the maximum gain is 2.0 dBi; please refer to the internal photos.

**Result:** Compliant.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard


FCC§15.207

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is  $\pm 2.4$  dB ( $k=2$ , 95% level of confidence).

### EUT Setup

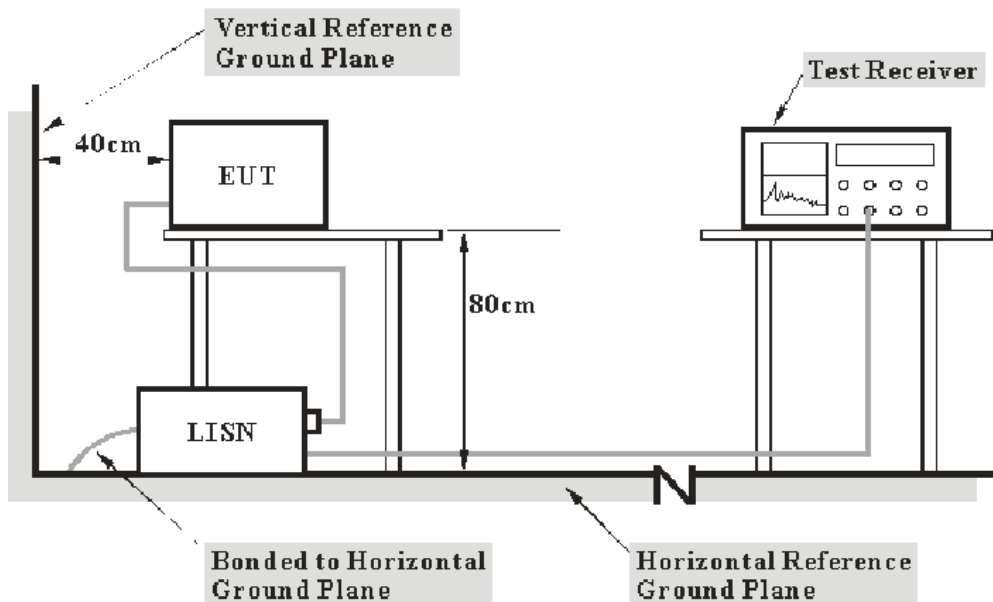

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the adapter was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**17.40 dB at 1.435 MHz** in the **Line** conductor mode

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 ° C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Felix Li on 2011-06-12.*


Test Mode: Transmitting (802.11b, worst case)

AC 120V/ 60Hz - Line

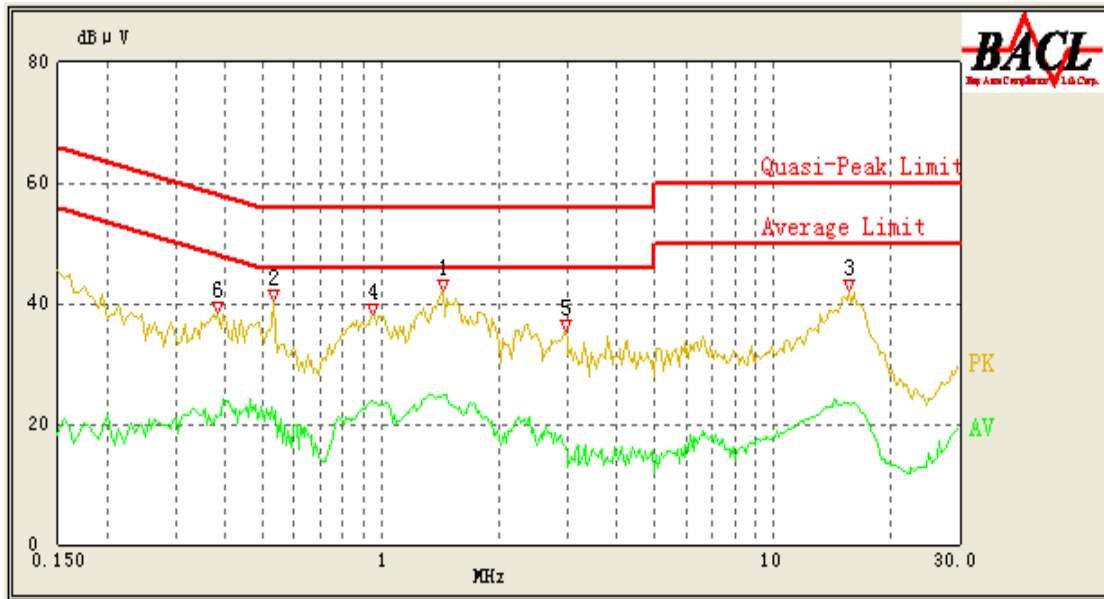

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dBµV)	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK /QP/Ave)
1.435	38.60	10.10	56.00	17.40	QP
0.955	36.46	10.10	56.00	19.54	QP
1.435	24.85	10.10	46.00	21.15	Ave
0.950	23.69	10.10	46.00	22.31	Ave
0.530	33.05	10.10	56.00	22.95	QP
15.585	35.11	10.10	60.00	24.89	QP
0.530	21.00	10.10	46.00	25.00	Ave
2.950	29.74	10.10	56.00	26.26	QP
0.385	32.96	10.10	59.29	26.33	QP
15.600	23.66	10.10	50.00	26.34	Ave
0.385	21.14	10.10	49.29	28.15	Ave
2.920	16.38	10.10	46.00	29.62	Ave

**AC 120V/ 60Hz Neutral:**

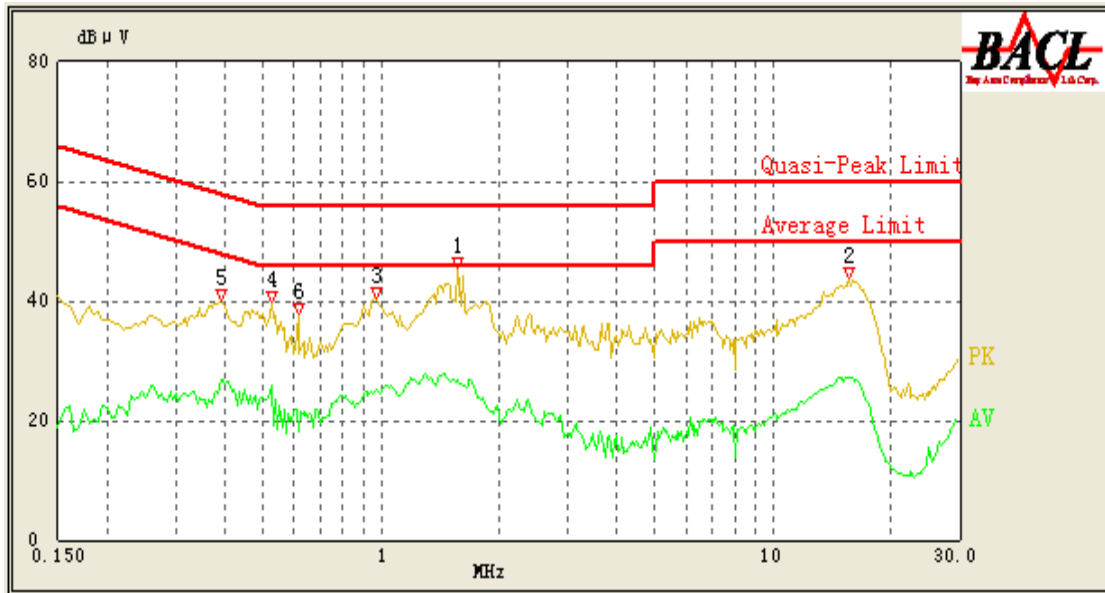

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dBµV)	Corrected Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/QP/Ave)
1.565	26.90	10.10	46.00	19.10	Ave
0.525	25.97	10.10	46.00	20.03	Ave
0.965	24.96	10.10	46.00	21.04	Ave
0.970	34.42	10.10	56.00	21.58	QP
15.630	37.77	10.10	60.00	22.23	QP
1.565	33.65	10.10	56.00	22.35	QP
0.390	26.71	10.10	49.14	22.43	Ave
0.525	33.23	10.10	56.00	22.77	QP
15.625	27.19	10.10	50.00	22.81	Ave
0.390	36.14	10.10	59.14	23.00	QP
0.615	18.06	10.10	46.00	27.94	Ave
0.615	24.93	10.10	56.00	31.07	QP

## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is  $\pm 4.0$  dB( $k=2$ , 95% level of confidence) .

### EUT Setup

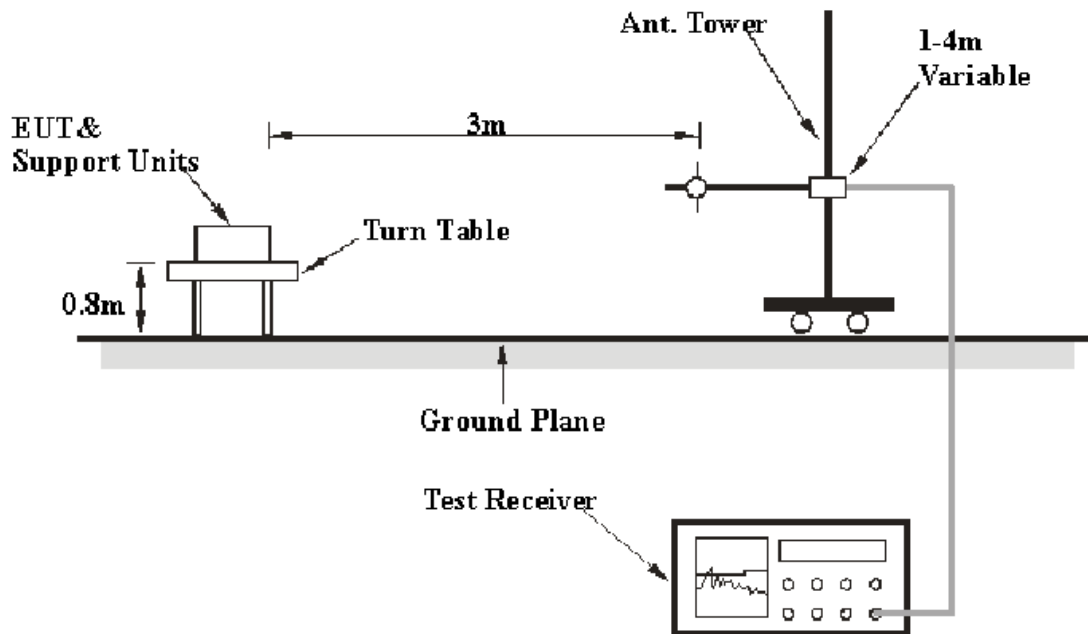

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	At1080	301902	2010-08-25	2011-08-25
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-08
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-04	2012-05-03
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz and peak and Average detection modes for frequencies above 1 GHz.

## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$



## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

**0.08 dB** at **4824 MHz** in the **Horizontal** polarization for mode 80.11b

**0.23 dB** at **7311 MHz** in the **Horizontal** polarization for mode 802.11g

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 ° C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Felix Li on 2011-06-13.*

Test Mode: Transmitting (Worst Case)

**30-1000 MHz:**

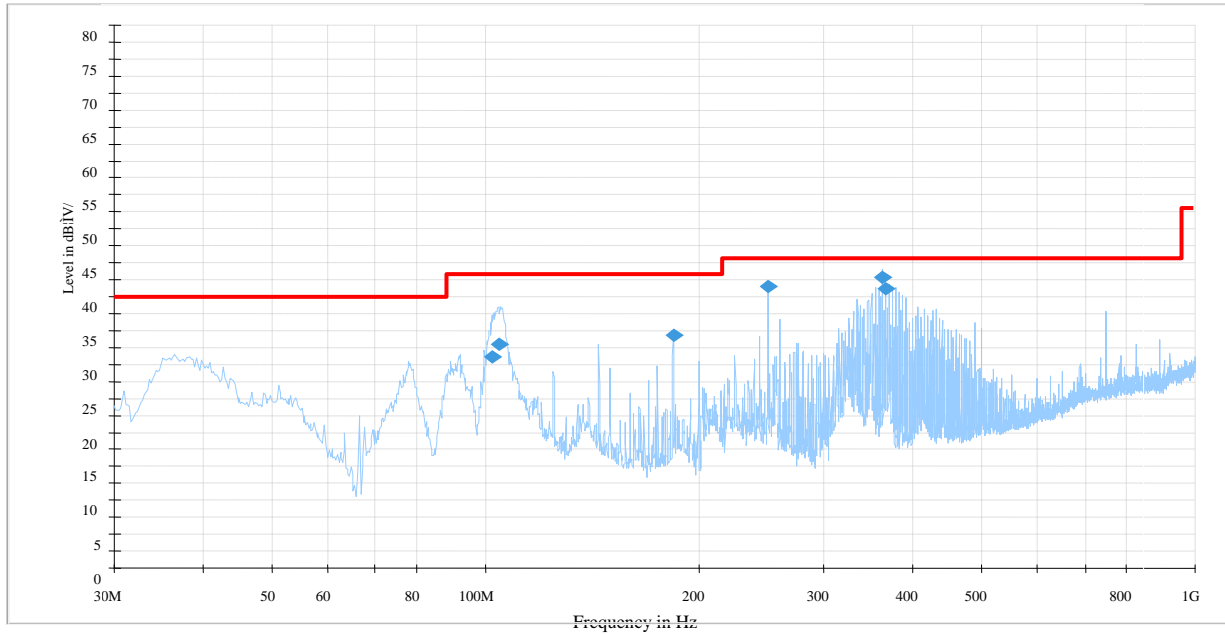

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Ant. Height (cm)	Ant. Polarity (H/V)	Turntable Position (degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
362.513000	42.9	148.0	V	228.0	-6.8	46.0	3.1*
249.999500	41.6	103.0	V	275.0	-7.4	46.0	4.4
366.606750	41.2	104.0	V	314.0	-3.6	46.0	4.8
183.987500	35.0	101.0	H	156.0	-10.3	43.5	8.5
104.679750	33.0	102.0	V	233.0	-14.1	43.5	10.5
102.263500	31.2	103.0	H	84.0	-15.6	43.5	12.3

\* Within measurement uncertainty.

**Above 1 GHz:**

Test Mode: Transmitting (802.11b)

Indicated		Detector (PK/Ave)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.205/15.209			
Frequency (MHz)	S.A. Reading (dBµV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
Low Channel (2412 MHz)												
4824	40.83	AV	320	1.1	H	36.30	4.30	27.51	53.92	54	0.08*	harmonic
2386.64	46.48	AV	145	1.0	H	30.90	3.03	26.85	53.56	54	0.44*	spurious
2386.64	66.36	PK	145	1.0	H	30.90	3.03	26.85	73.44	74	0.56*	spurious
2386.64	46.91	AV	334	1.0	V	30.30	3.03	26.85	53.39	54	0.61*	spurious
7236	36.36	AV	156	1.0	H	39.20	5.24	27.49	53.31	54	0.69*	harmonic
7236	36.47	AV	89	1.0	V	38.00	5.24	27.49	52.22	54	1.78*	harmonic
4824	40.21	AV	210	1.0	V	35.00	4.30	27.51	52.00	54	2.00*	harmonic
4824	57.95	PK	320	1.1	H	36.30	4.30	27.51	71.04	74	2.96*	harmonic
2386.64	63.90	PK	334	1.0	V	30.30	3.03	26.85	70.38	74	3.62*	spurious
7236	49.01	PK	156	1.0	H	39.20	5.24	27.49	65.96	74	8.04	harmonic
7236	48.15	PK	89	1.0	V	38.00	5.24	27.49	63.90	74	10.10	harmonic
4824	51.78	PK	210	1.0	V	35.00	4.30	27.51	63.57	74	10.43	harmonic
Middle Channel (2437 MHz)												
7311	36.82	AV	245	1.2	H	39.20	5.24	27.49	53.77	54	0.23*	harmonic
4874	40.20	AV	125	1.2	H	36.30	4.30	27.51	53.29	54	0.71*	harmonic
4874	39.15	AV	356	1.5	V	35.00	4.30	27.49	50.96	54	3.04*	harmonic
4874	57.26	PK	125	1.2	H	36.30	4.30	27.51	70.35	74	3.65*	harmonic
7311	33.45	AV	178	1.6	V	38.00	5.24	27.49	49.20	54	4.80	harmonic
4874	57.13	PK	356	1.5	V	35.00	4.30	27.49	68.94	74	5.06	harmonic
7311	49.23	PK	245	1.2	H	39.20	5.24	27.49	66.18	74	7.82	harmonic
7311	47.68	PK	178	1.6	V	38.00	5.24	27.49	63.43	74	10.57	harmonic
High Channel (2462 MHz)												
4924	40.25	AV	253	1.4	H	36.30	4.30	27.51	53.34	54	0.66*	harmonic
2487.69	46.21	AV	130	1.0	H	30.90	3.03	26.85	53.29	54	0.71*	spurious
7386	36.13	AV	118	1.2	H	39.20	5.24	27.49	53.08	54	0.92*	harmonic
2487.69	65.08	PK	130	1.0	H	30.90	3.03	26.85	72.16	74	1.84*	spurious
2487.69	45.20	AV	145	1.0	V	30.30	3.03	26.85	51.68	54	2.32*	spurious
2487.69	64.97	PK	145	1.0	V	30.30	3.03	26.85	71.45	74	2.55*	spurious
7386	35.62	AV	235	1.6	V	38.00	5.24	27.49	51.37	54	2.63*	harmonic
4924	39.26	AV	35	1.3	V	35.00	4.30	27.51	51.05	54	2.95*	harmonic
4924	57.32	PK	253	1.4	H	36.30	4.30	27.51	70.41	74	3.59*	harmonic
4924	55.77	PK	35	1.3	V	35.00	4.30	27.51	67.56	74	6.44	harmonic
7386	50.55	PK	118	1.2	H	39.20	5.24	27.49	67.50	74	6.50	harmonic
7386	48.22	PK	235	1.8	V	38.00	5.24	27.49	63.97	74	10.03	harmonic

\*Within measurement uncertainty.

## Test Mode: Transmitting (802.11g)

Indicated		Detector (PK/Ave)	Table Angle Degree	Antenna		Correction Factor			FCC Part 15.247/15.205/15.209			
Frequency (MHz)	S.A. Reading (dB $\mu$ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Comment
Low Channel (2412 MHz)												
2388.15	46.05	AV	145	1.0	H	30.90	3.03	26.85	53.13	54	0.87*	spurious
7236	35.68	AV	156	1.0	H	39.20	5.24	27.49	52.63	54	1.37*	harmonic
4824	39.25	AV	320	1.1	H	36.30	4.30	27.51	52.34	54	1.66*	harmonic
2388.15	65.20	PK	145	1.0	H	30.90	3.03	26.85	72.28	74	1.72*	spurious
2392.34	45.30	AV	334	1.0	V	30.30	3.03	26.85	51.78	54	2.22*	spurious
2392.34	64.10	PK	334	1.0	V	30.30	3.03	26.85	70.58	74	3.42*	spurious
4824	37.82	AV	210	1.0	V	35.00	4.30	27.51	49.61	54	4.39	harmonic
4824	56.36	PK	320	1.1	H	36.30	4.30	27.51	69.45	74	4.55	harmonic
7236	33.07	AV	89	1.0	V	38.00	5.24	27.49	48.82	54	5.18	harmonic
7236	48.22	PK	156	1.0	H	39.20	5.24	27.49	65.17	74	8.83	harmonic
4824	52.38	PK	210	1.0	V	35.00	4.30	27.51	64.17	74	9.83	harmonic
7236	46.89	PK	89	1.0	V	38.00	5.24	27.49	62.64	74	11.36	harmonic
Middle Channel (2437 MHz)												
7311	36.82	AV	227	1.0	H	39.20	5.24	27.49	53.77	54	0.23*	harmonic
4874	39.26	AV	65	1.1	H	36.30	4.30	27.51	52.35	54	1.65*	harmonic
4874	56.83	PK	65	1.1	H	36.30	4.30	27.51	69.92	74	4.08	harmonic
7311	33.45	AV	360	1.0	V	38.00	5.24	27.49	49.20	54	4.80	harmonic
4874	36.00	AV	235	1.1	V	35.00	4.30	27.49	47.81	54	6.19	harmonic
7311	49.23	PK	227	1.0	H	39.20	5.24	27.49	66.18	74	7.82	harmonic
7311	47.68	PK	360	1.0	V	38.00	5.24	27.49	63.43	74	10.57	harmonic
4874	51.58	PK	235	1.1	V	35.00	4.30	27.49	63.39	74	10.61	harmonic
High Channel (2462 MHz)												
2485.63	46.67	AV	130	1.0	H	30.90	3.03	26.85	53.75	54	0.25*	spurious
7386	36.75	AV	118	1.2	H	39.20	5.24	27.49	53.70	54	0.30*	harmonic
2485.63	66.00	PK	130	1.0	H	30.90	3.03	26.85	73.08	74	0.92*	spurious
4924	39.82	AV	253	1.4	H	36.30	4.30	27.51	52.91	54	1.09*	harmonic
2489.34	46.23	AV	145	1.0	V	30.30	3.03	26.85	52.71	54	1.29*	spurious
2489.34	65.10	PK	145	1.0	V	30.30	3.03	26.85	71.58	74	2.42*	spurious
4924	39.05	AV	35	1.3	V	35.00	4.30	27.51	50.84	54	3.16*	harmonic
4924	56.45	PK	253	1.4	H	36.30	4.30	27.51	69.54	74	4.46	harmonic
7386	33.50	AV	235	1.6	V	38.00	5.24	27.49	49.25	54	4.75	harmonic
4924	55.77	PK	35	1.3	V	35.00	4.30	27.51	67.56	74	6.44	harmonic
7386	49.86	PK	118	1.2	H	39.20	5.24	27.49	66.81	74	7.19	harmonic
7386	48.15	PK	235	1.8	V	38.00	5.24	27.49	63.90	74	10.10	harmonic


\*Within measurement uncertainty.

**Antenna Port Conducted Spurious Emissions**


Frequency (MHz)	Data Rate (Mbps)	Delta Value (dBc)	Limit (dBc)	Ref. Plot	Result
802.11b mode					
2412	1	55.38	20	B-L	Pass
2437	1	52.92	20	B-M	Pass
2462	1	52.46	20	B-H	Pass
802.11g mode					
2412	6	54.40	20	G-L	Pass
2437	6	52.14	20	G-M	Pass
2462	6	53.00	20	G-H	Pass

Please refer to the following plots.


**B-L: 802.11b Low Channel**

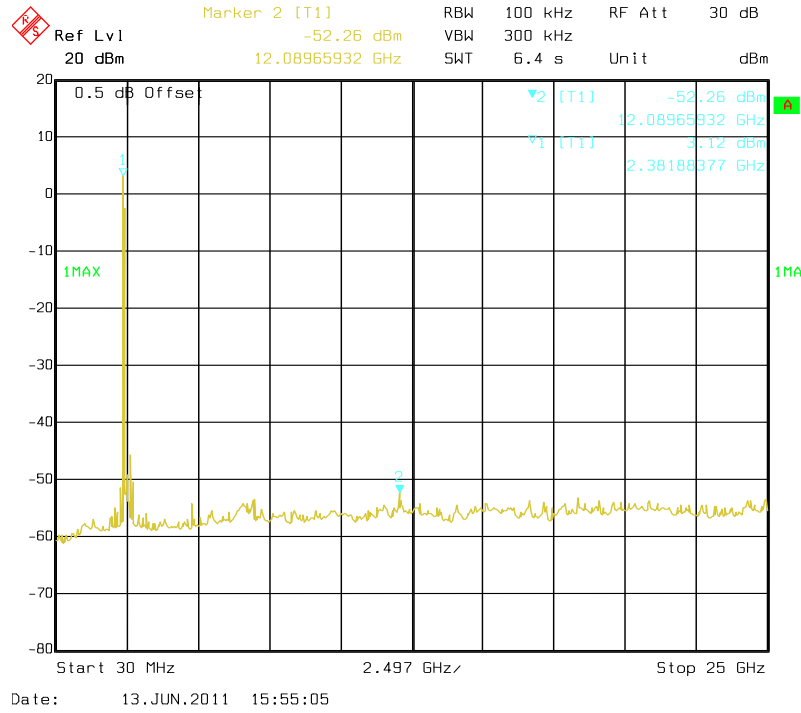


**B-M, 802.11b Middle Channel**

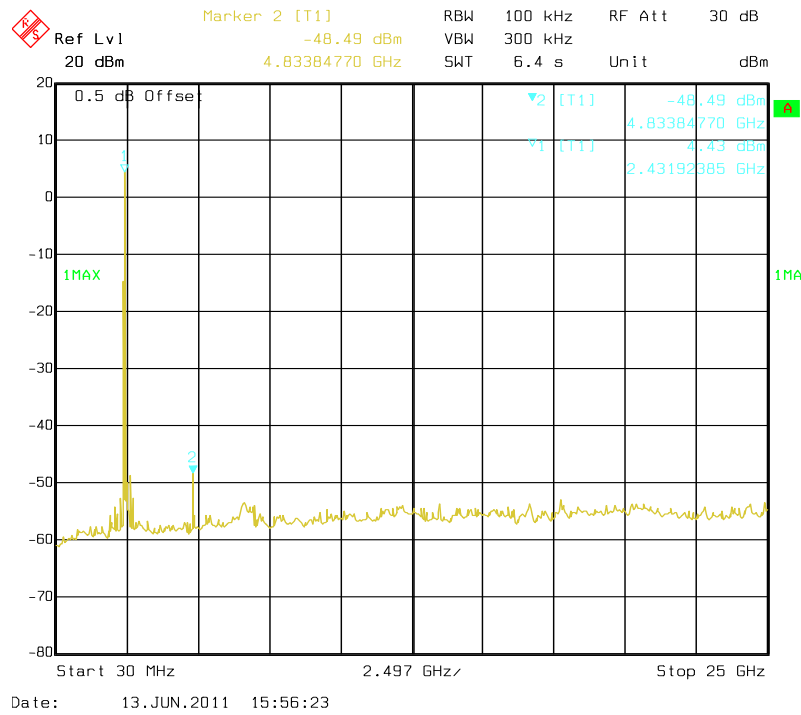


### B-H, 802.11b High Channel

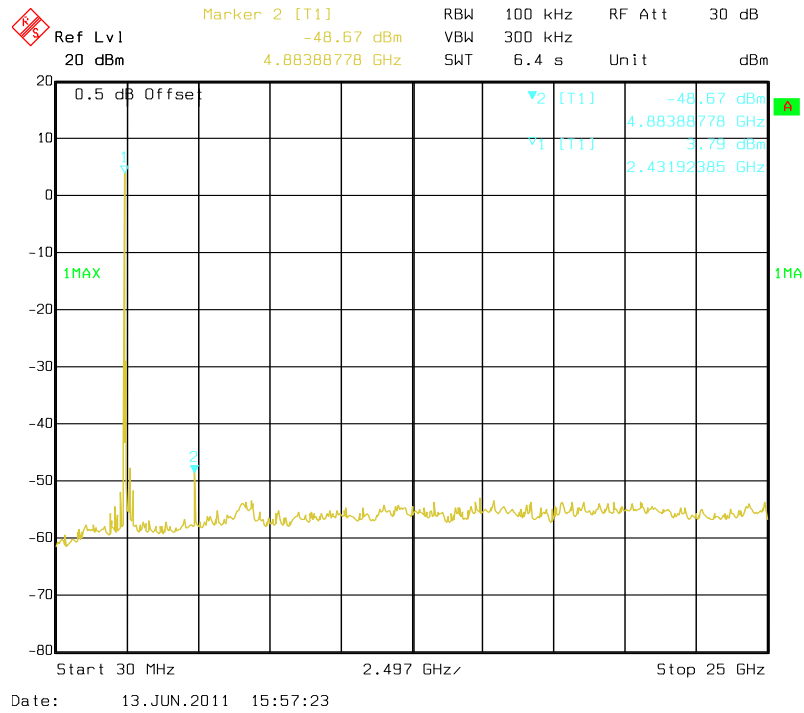


### G-L, 802.11g Low Channel

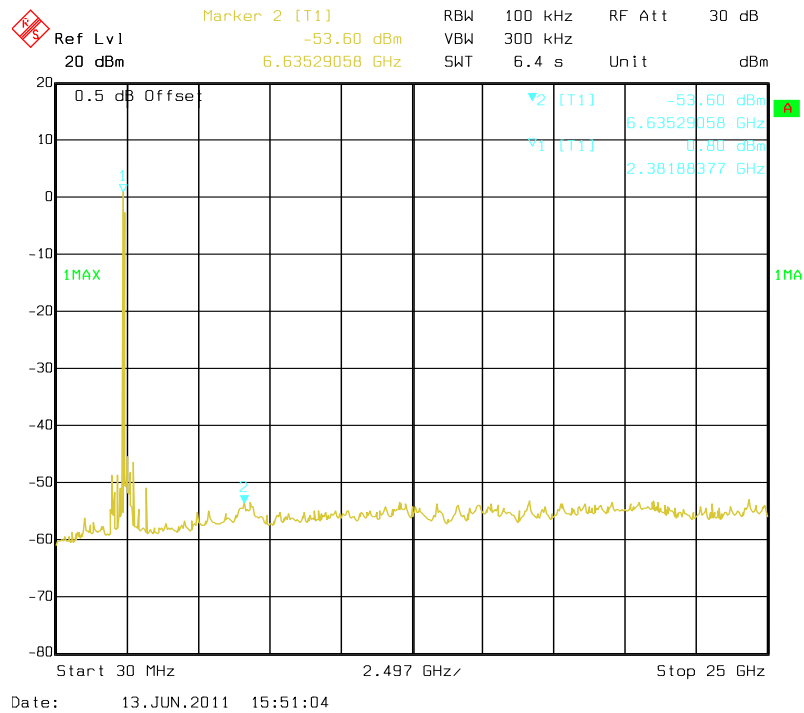

### G-M, 802.11g Middle Channel

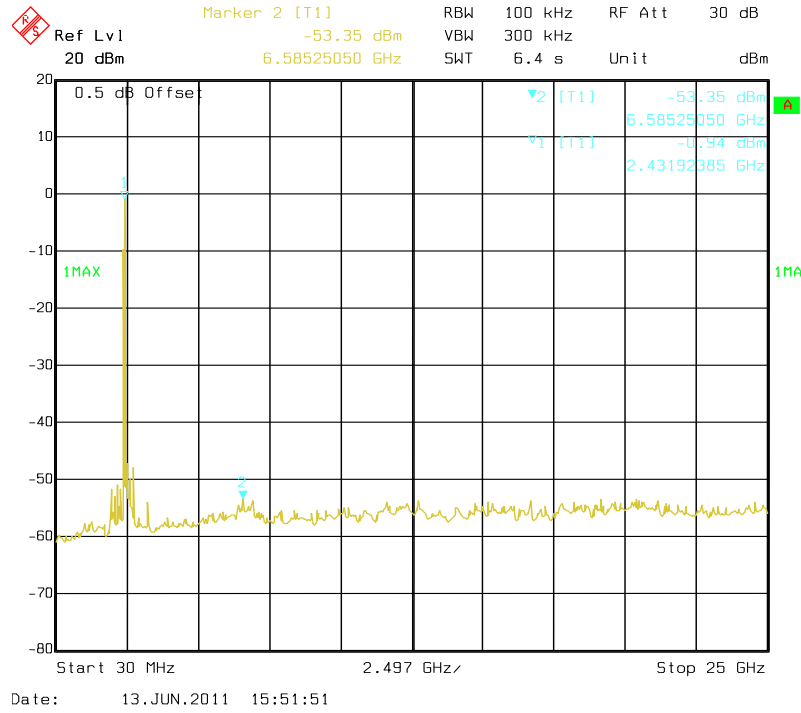

### G-H, 802.11g High Channel

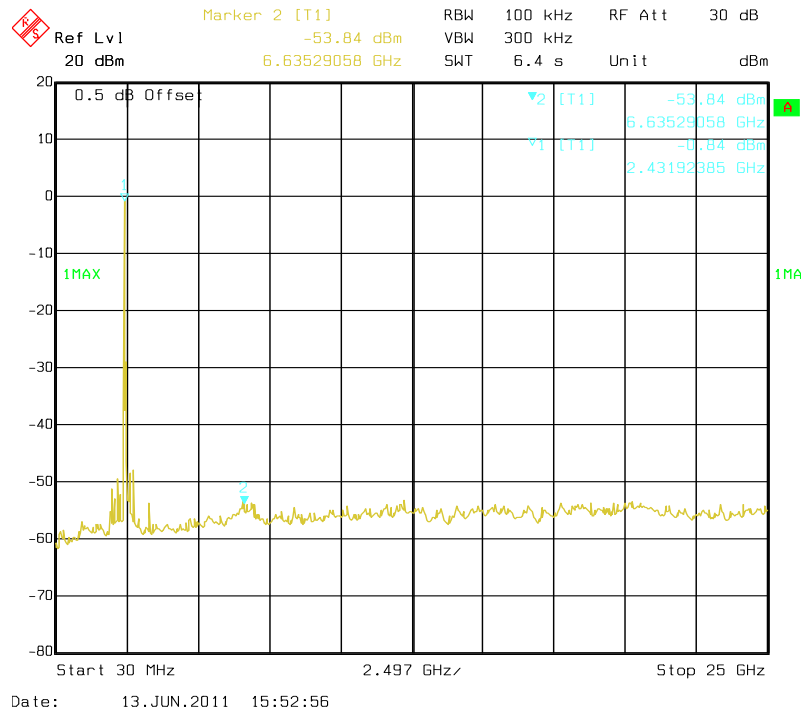



## FCC §15.247(a) (2) – 6 dB BANDWIDTH TESTING

### Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56%
ATM Pressure:	100.0kPa


*The testing was performed by Felix Li on 2011-06-13.*

**Test Result:** Pass.


Please refer to the following tables and plots.

Channel	Frequency (MHz)	Data Rate (Mbps)	6dB bandwidth (MHz)	Limit (kHz)	Result
802.11b mode					
Low	2412	1	12.10	>500	Pass
Middle	2437	1	12.10	>500	Pass
High	2462	1	12.10	>500	Pass
802.11g mode					
Low	2412	6	16.35	>500	Pass
Middle	2437	6	16.27	>500	Pass
High	2462	6	16.43	>500	Pass


**802.11b Low Channel**

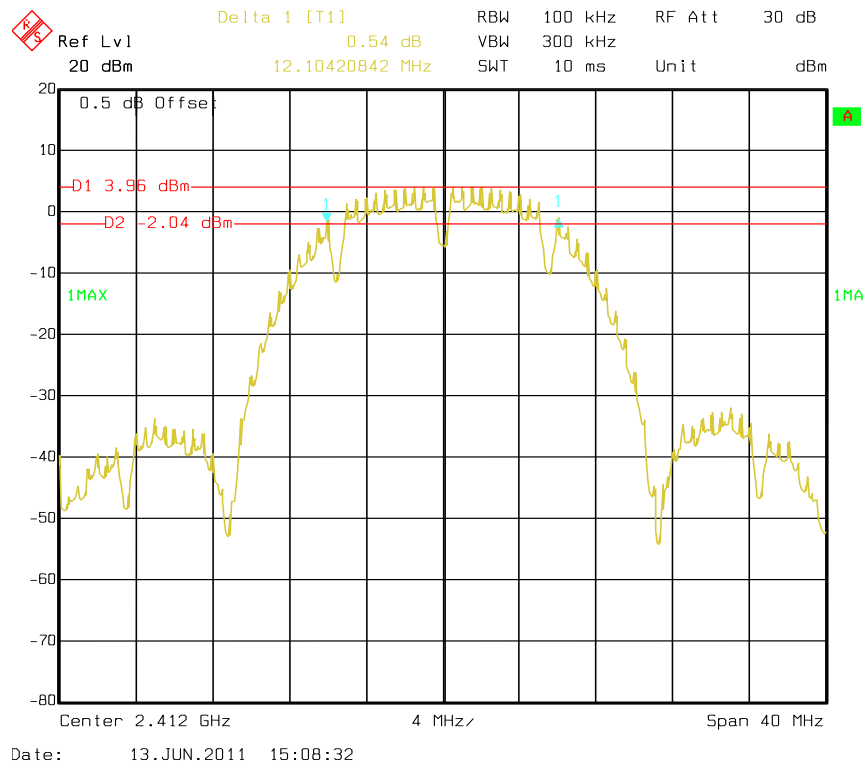


### 802.11b Middle Channel

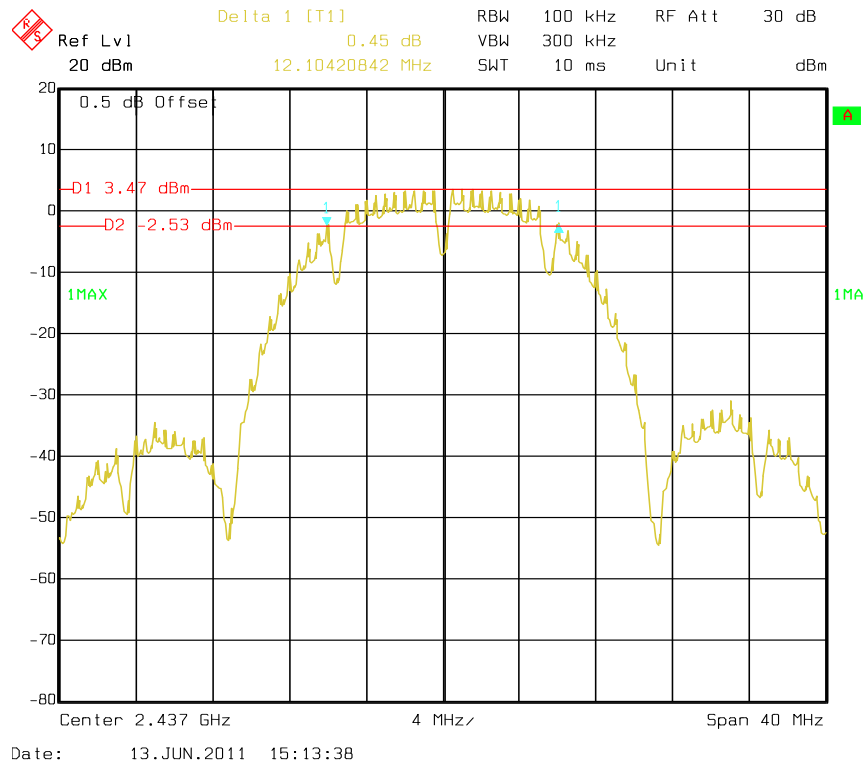


### 802.11b High Channel

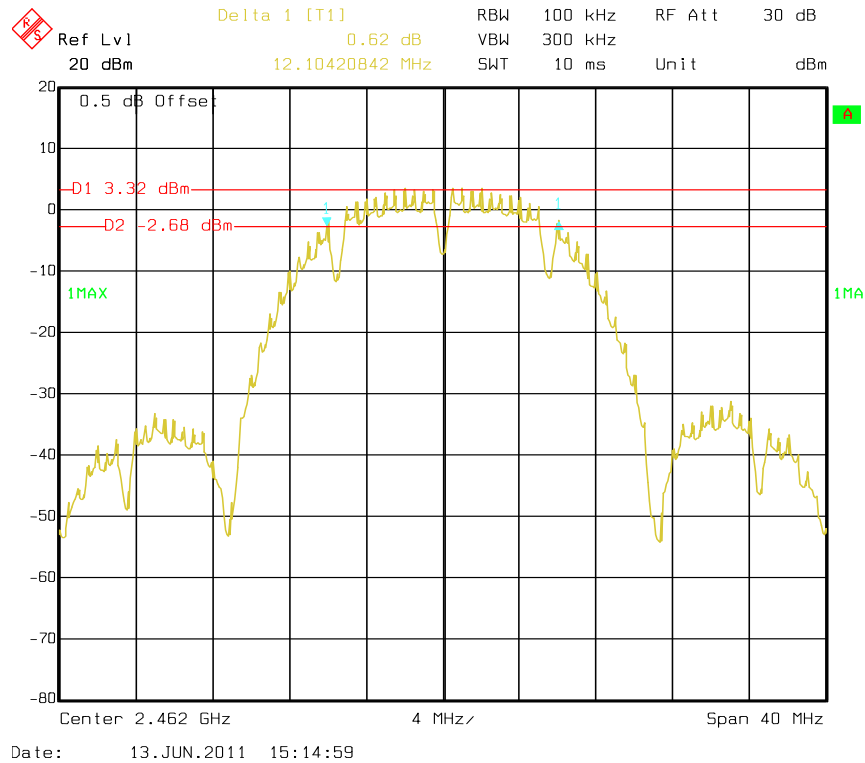


### 802.11g Low Channel

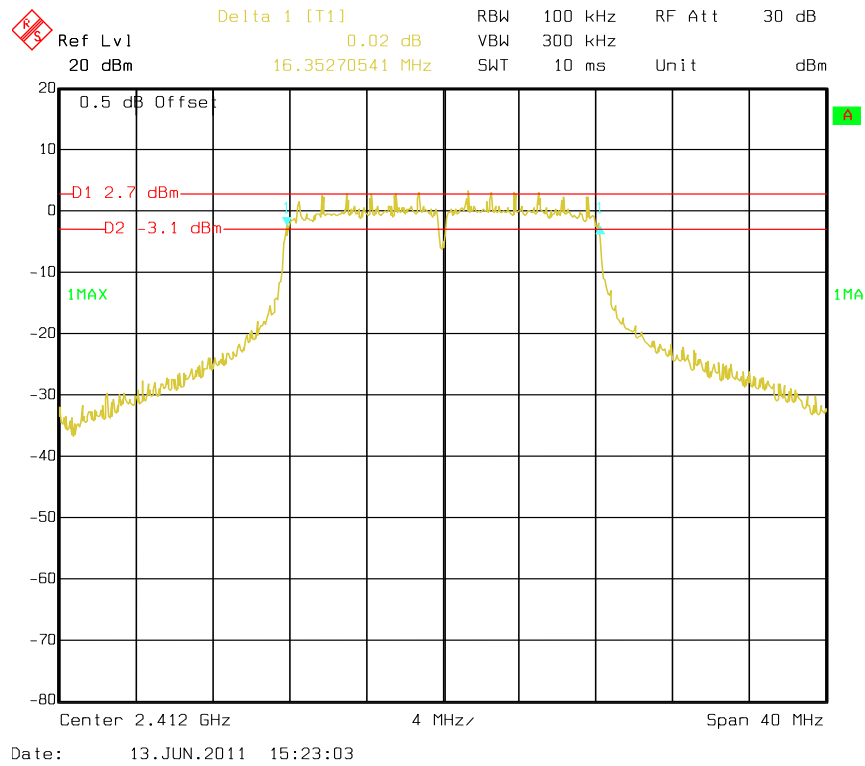

### 802.11g Middle Channel

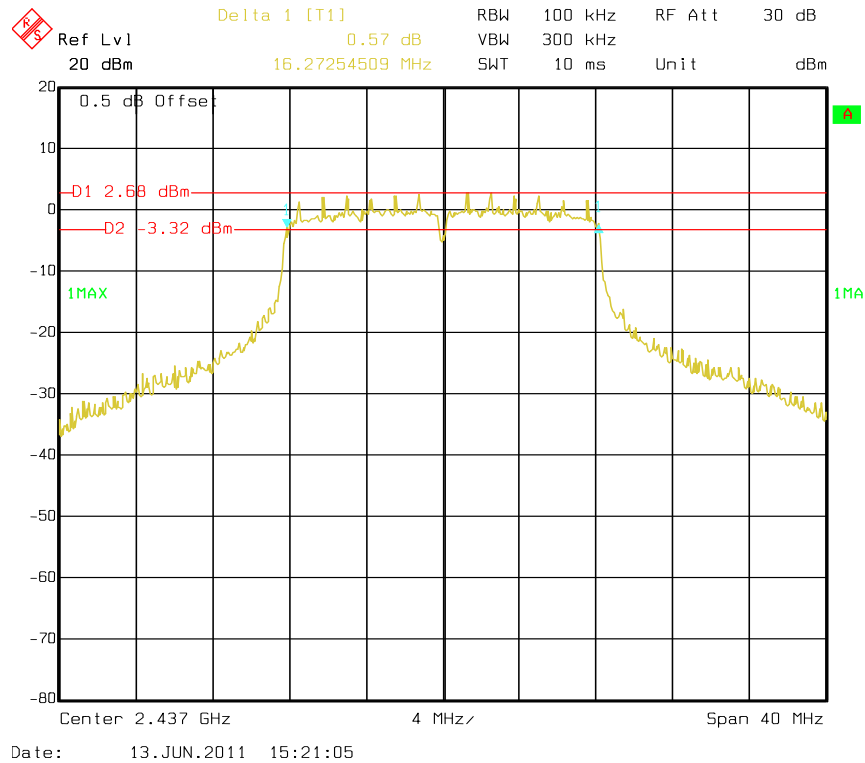

### 802.11g High Channel

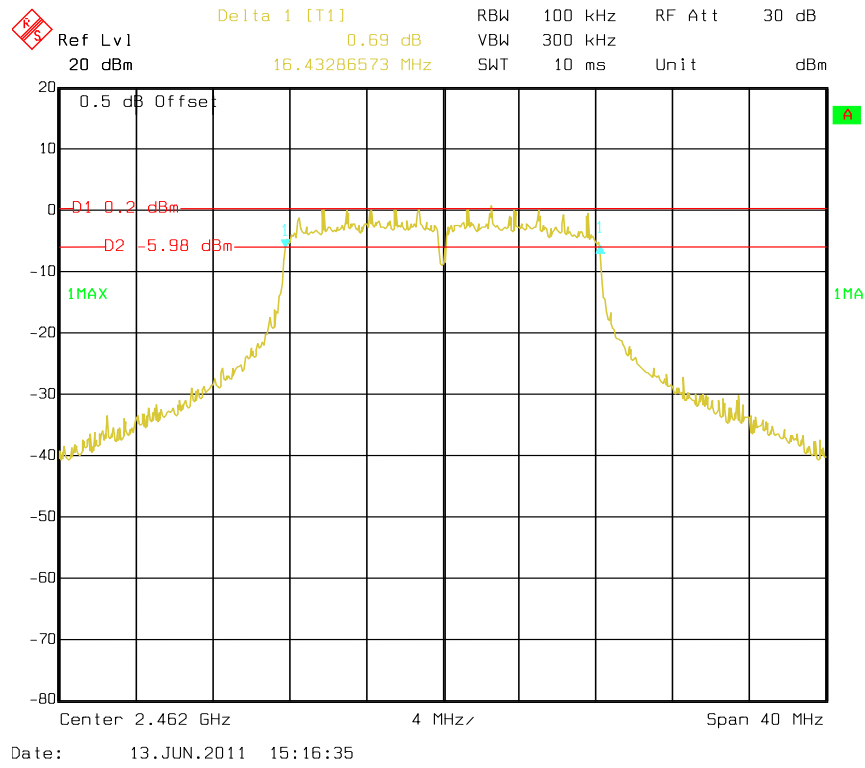

## FCC §15.247(b) (3) - MAXIMUM PEAK OUTPUT POWER

### Applicable Standard

According to §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.


### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



### Test Data

#### Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


*The testing was performed by Felix Li on 2011-10-11.*

*Test Mode: Transmitting*

Channel	Frequency (MHz)	Data Rate (Mbps)	Conducted Output Power (dBm)	Limit (dBm)	Result
<b>802.11b mode</b>					
Low	2412	1	17.32	30	Pass
Middle	2437	1	17.32	30	Pass
High	2462	1	17.59	30	Pass
<b>802.11g mode</b>					
Low	2412	6	16.75	30	Pass
Middle	2437	6	16.23	30	Pass
High	2462	6	15.87	30	Pass


**802.11b Mode:**

**99% Occupied Bandwidth, Low Channel**

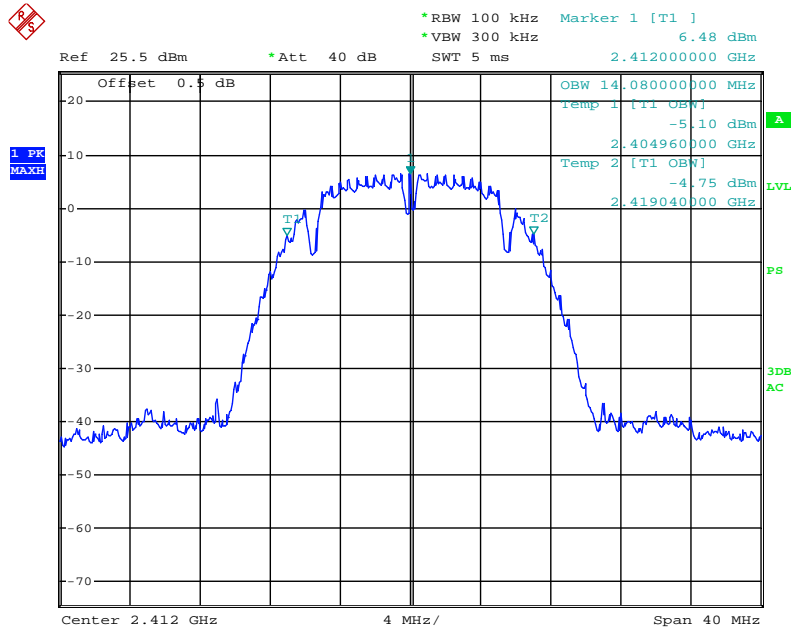


Date: 11.OCT.2011 14:56:34

### RF Output Power, Low Channel

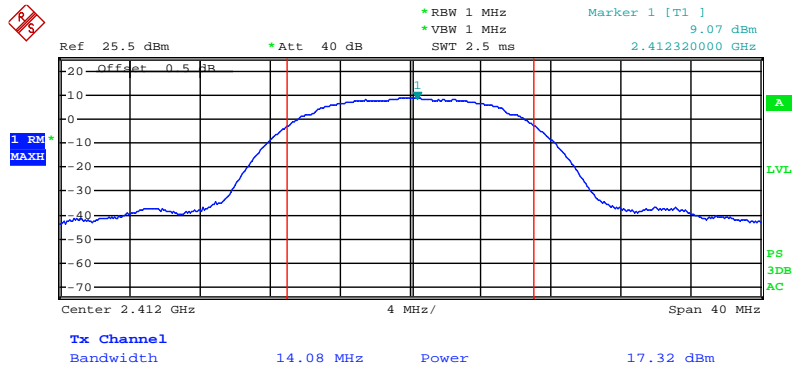

Date: 11.OCT.2011 14:57:20


### 99% Occupied Bandwidth, Middle Channel

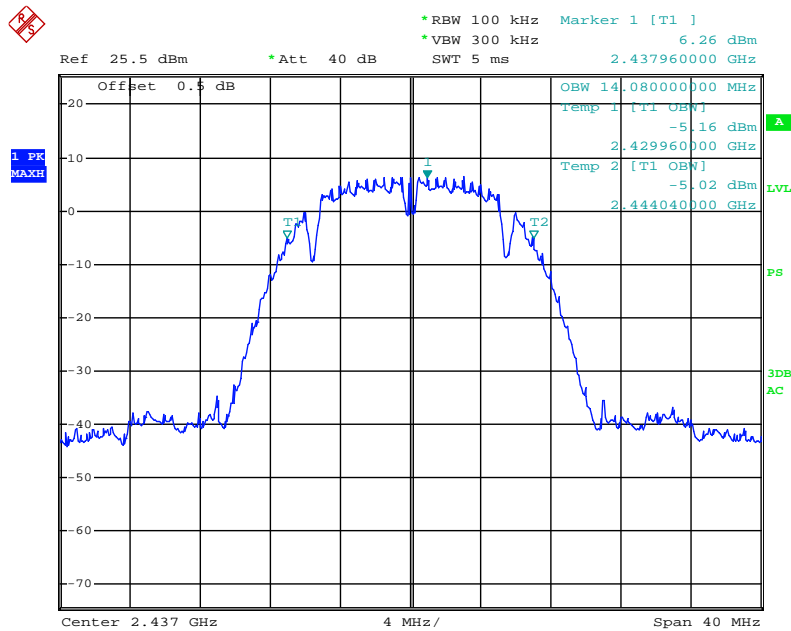

Date: 11.OCT.2011 14:59:25




### RF Output Power, Middle Channel

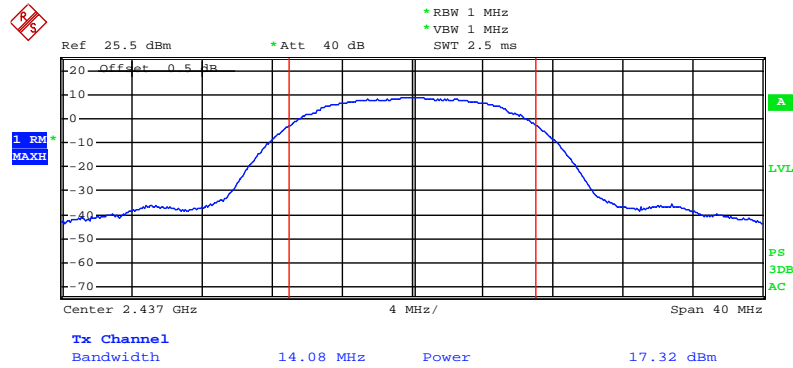


Date: 11.OCT.2011 15:00:07

### 99% Occupied Bandwidth, High Channel

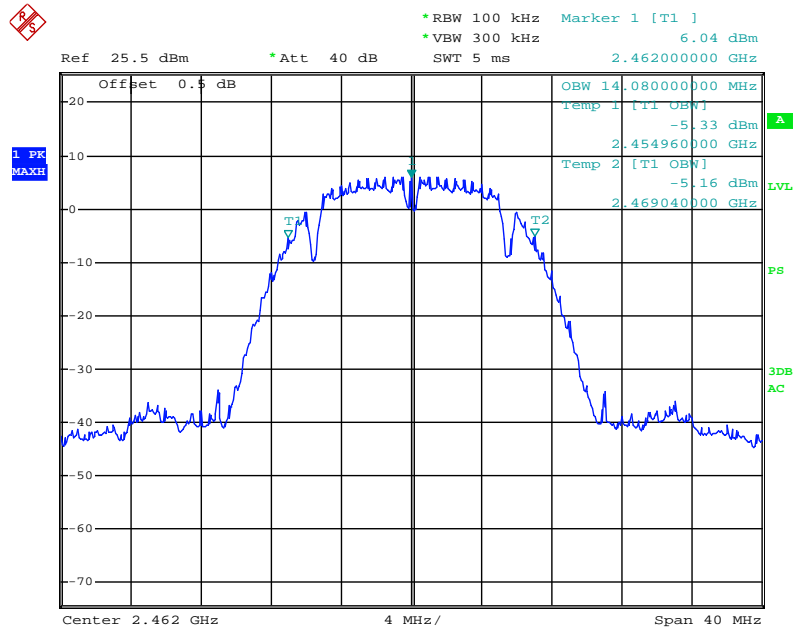

Date: 11.OCT.2011 15:03:09


### RF Output Power, High Channel

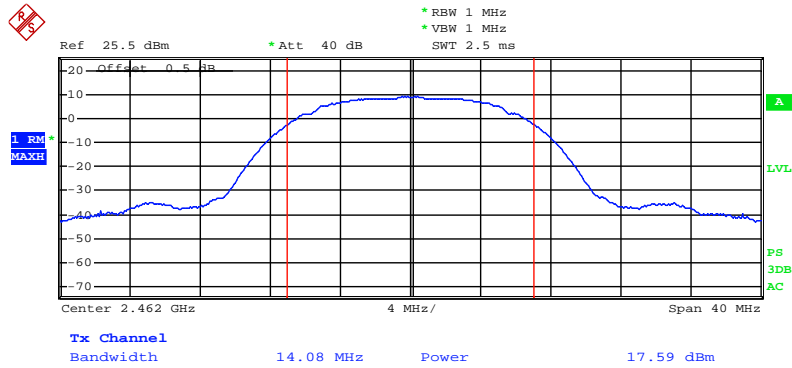

Date: 11.OCT.2011 15:04:18


### 802.11g Mode:

### 99% Occupied Bandwidth, Low Channel

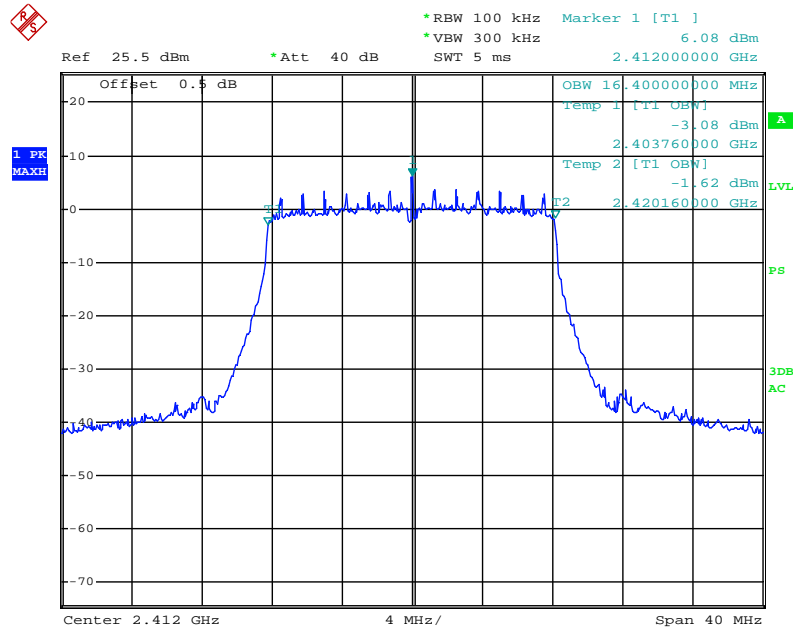


Date: 11.OCT.2011 15:15:20

### RF Output Power, Low Channel

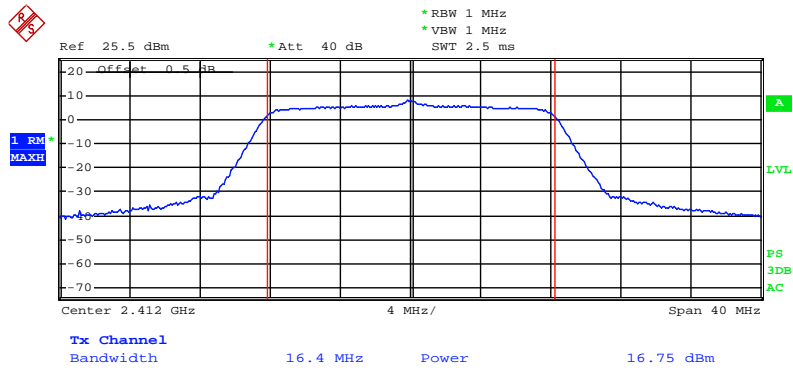


Date: 11.OCT.2011 15:16:20

### 99% Occupied Bandwidth, Middle Channel

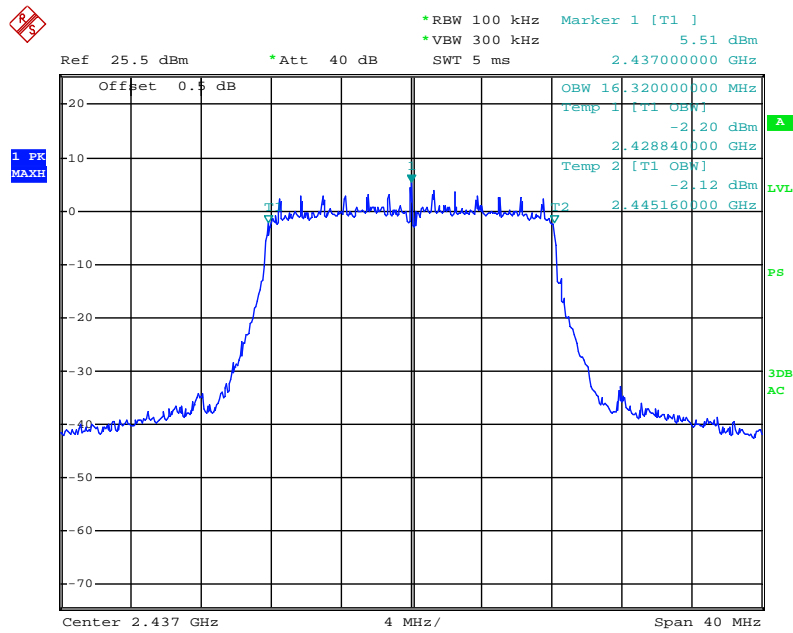


Date: 11.OCT.2011 15:21:03

### RF Output Power, Middle Channel

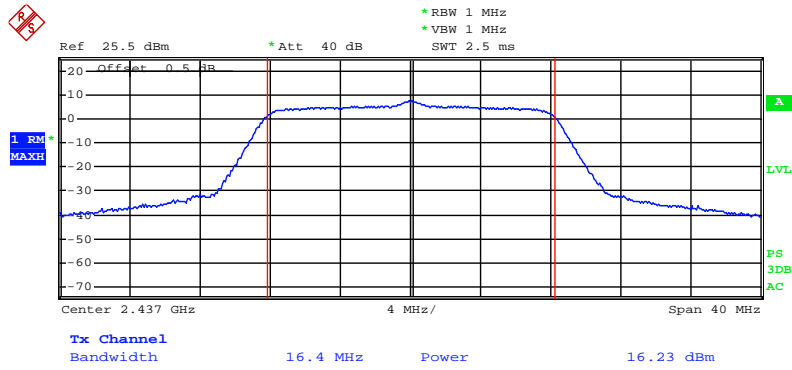


Date: 11.OCT.2011 15:22:33

### 99% Occupied Bandwidth, High Channel

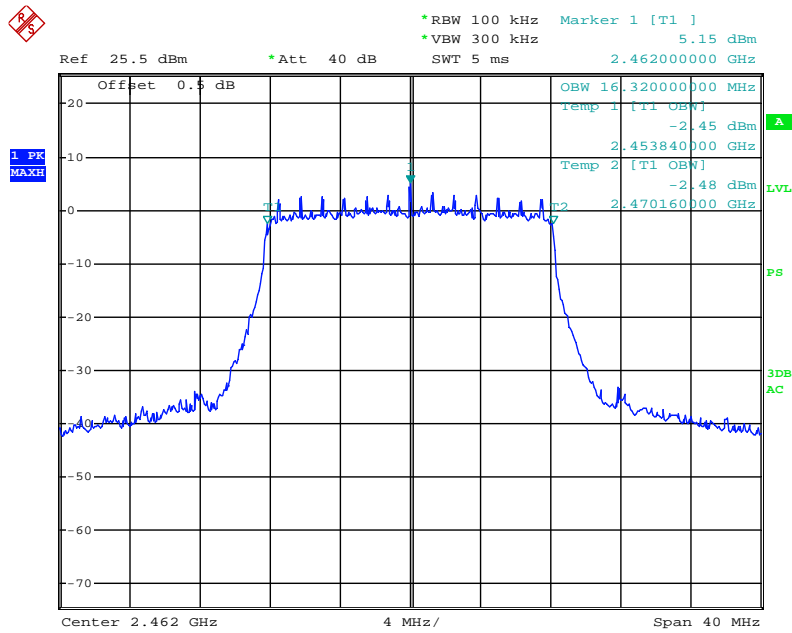

Date: 11.OCT.2011 15:30:53

### RF Output Power, High Channel

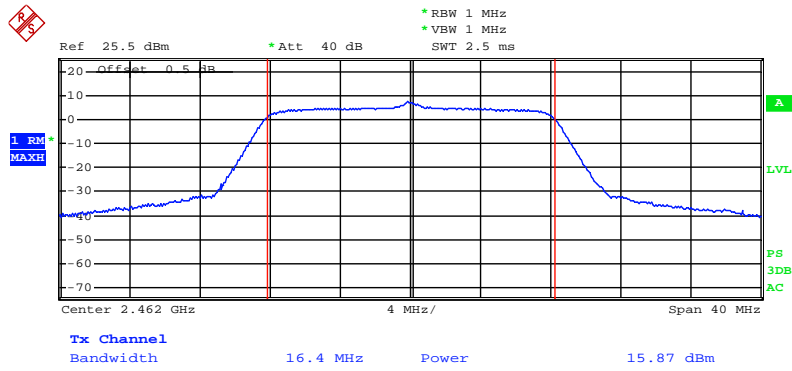

Date: 11.OCT.2011 15:32:51

## FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2011-07-08	2012-07-08

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



### Test Data

#### Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

*The testing was performed by Felix Li on 2011-06-13.*


**Test Result:** *Compliance.*

Frequency (MHz)	Delta (dBc)	Limit (dBc)	Result
802.11b mode			
2396.99	35.81	20	Pass
2483.56	54.28	20	Pass
802.11g mode			
2399.80	27.72	20	Pass
2483.80	40.25	20	Pass


Please refer to following plots.

**802.11b**

**Band Edge, Left Side,**

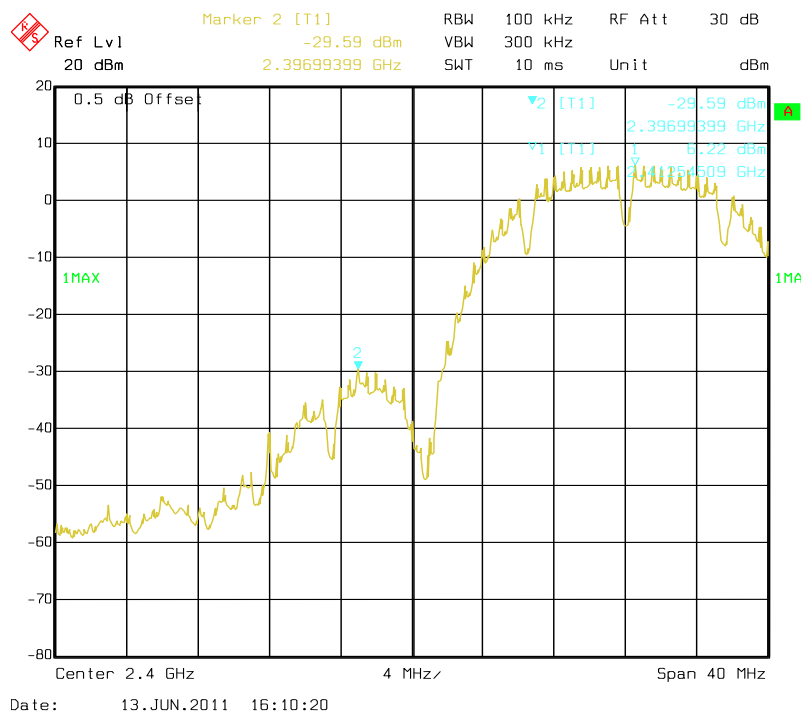


### Band Edge, Right Side

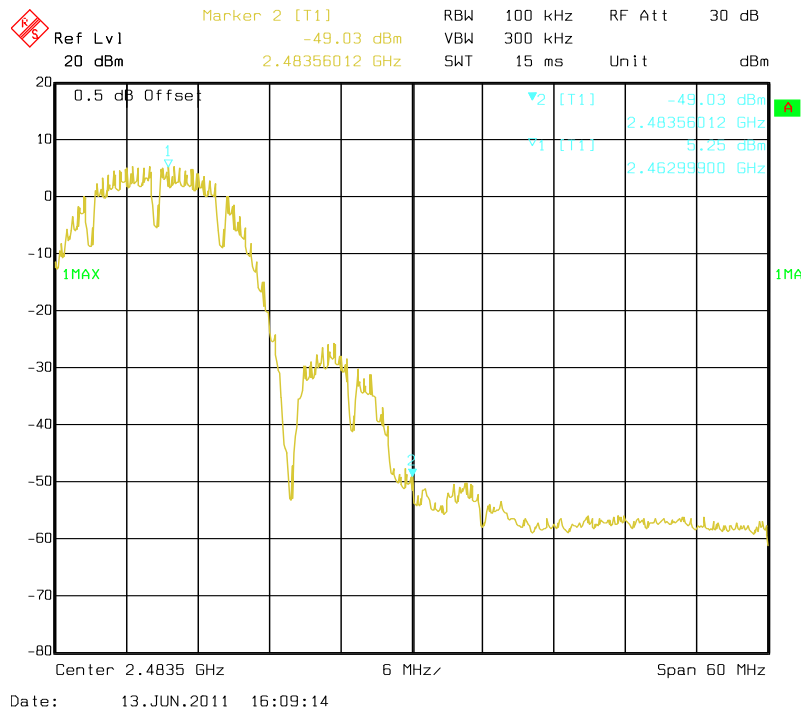


### 802.11g

### Band Edge, Left Side

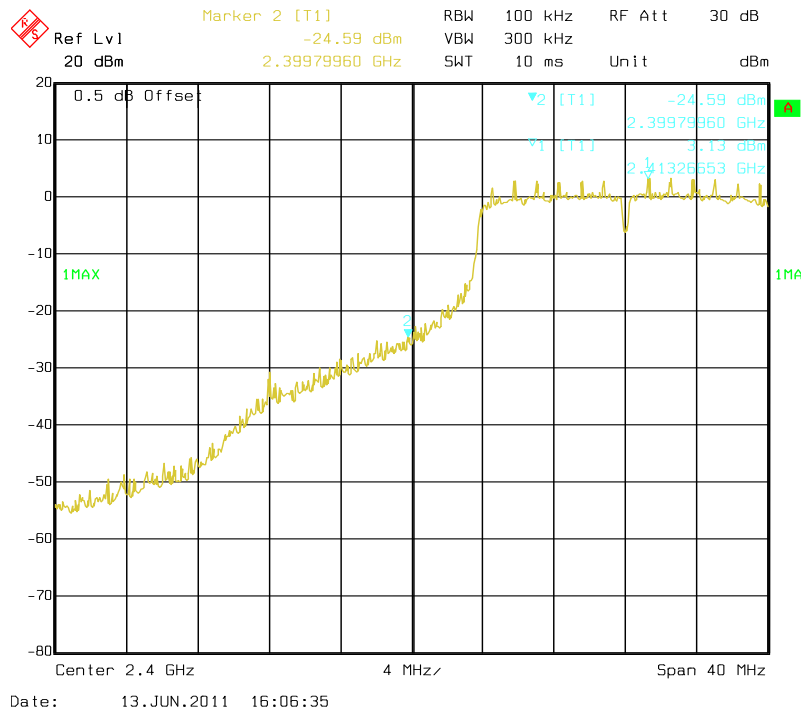



### Band Edge, Right Side

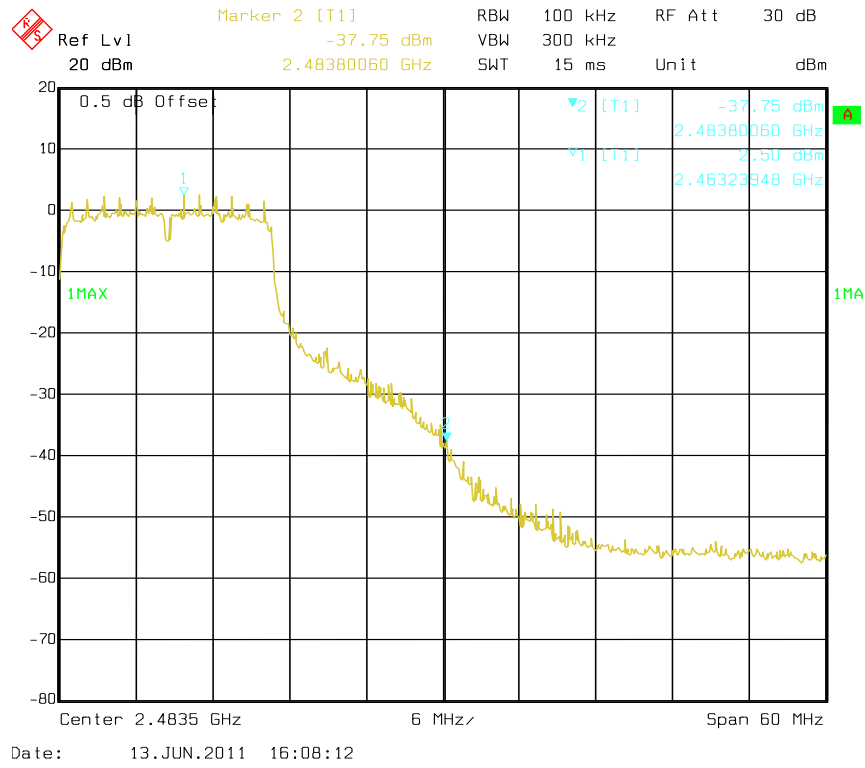

## FCC §15.247(e) - POWER SPECTRAL DENSITY

### Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.


### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

\* **Statement of Traceability:** Bay Area Compliance Lab Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT was set without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to 1.5MHz span mode. And then, set RBW and VBW of spectrum analyzer to proper value. (DTS)
4. Repeat above procedures until all frequencies measured were complete.



### Test Data

#### Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa


*The testing was performed by Felix Li on 2011-06-08.*

*Test Mode: Transmitting*

**Test Result: Pass**


Channel	Frequency (MHz)	Data Rate (Mbps)	Power Spectral Density (dBm)	Limit (dBm)	Result
802.11b mode					
Low	2412	1	-5.52	8	Pass
Middle	2437	1	-5.21	8	Pass
High	2462	1	-5.27	8	Pass
802.11g mode					
Low	2412	6	-14.15	8	Pass
Middle	2437	6	-11.76	8	Pass
High	2462	6	-12.82	8	Pass

**Power Spectral Density, 802.11b Low Channel**

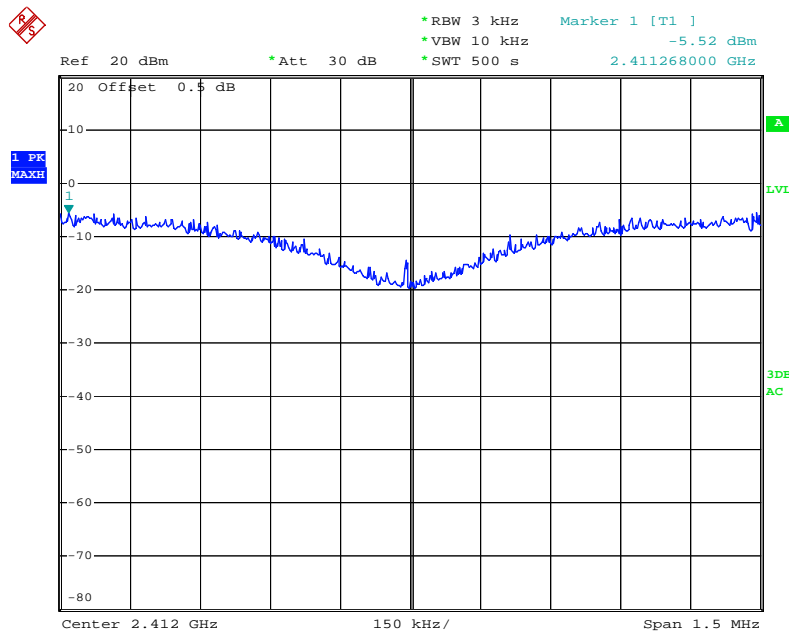


Date: 8.JUN.2011 13:11:03

### Power Spectral Density, 802.11b Middle Channel

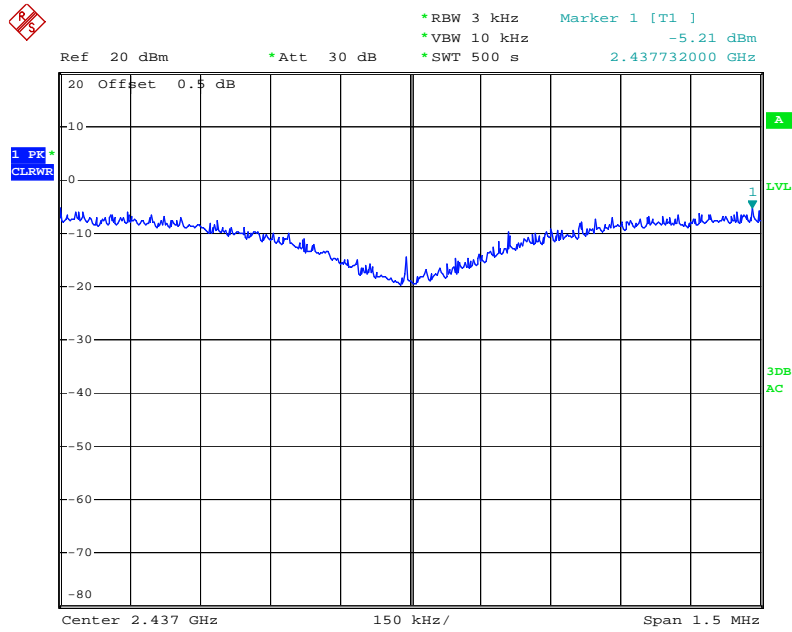


Date: 8.JUN.2011 13:01:26

### Power Spectral Density, 802.11b High Channel

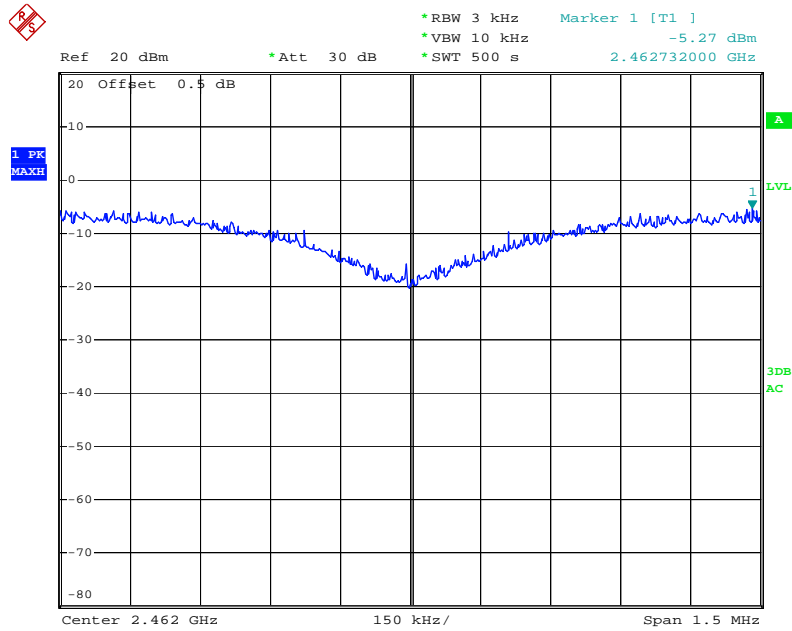


Date: 8.JUN.2011 12:50:24

### Power Spectral Density, 802.11g Low Channel

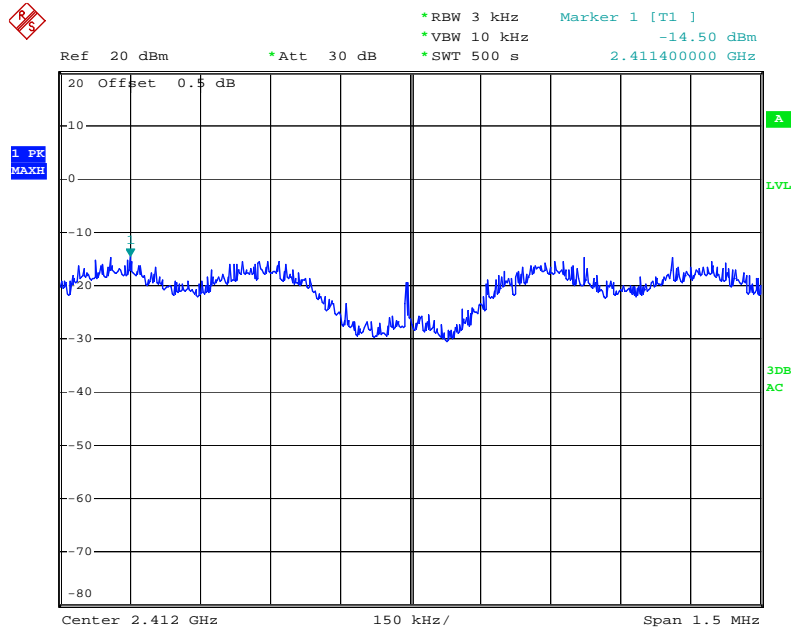


Date: 8.JUN.2011 14:51:53

### Power Spectral Density, 802.11g Middle Channel

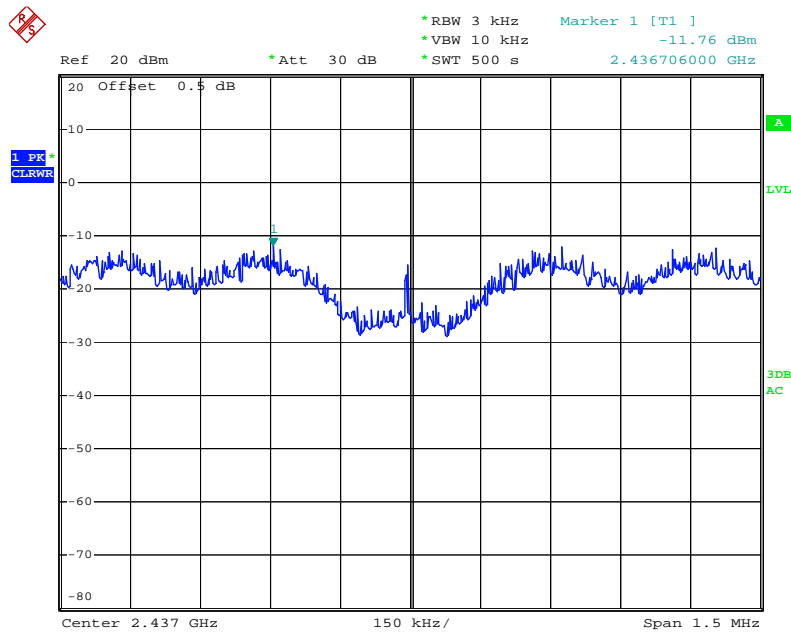

Date: 8.JUN.2011 15:07:09

### Power Spectral Density, 802.11g High Channel

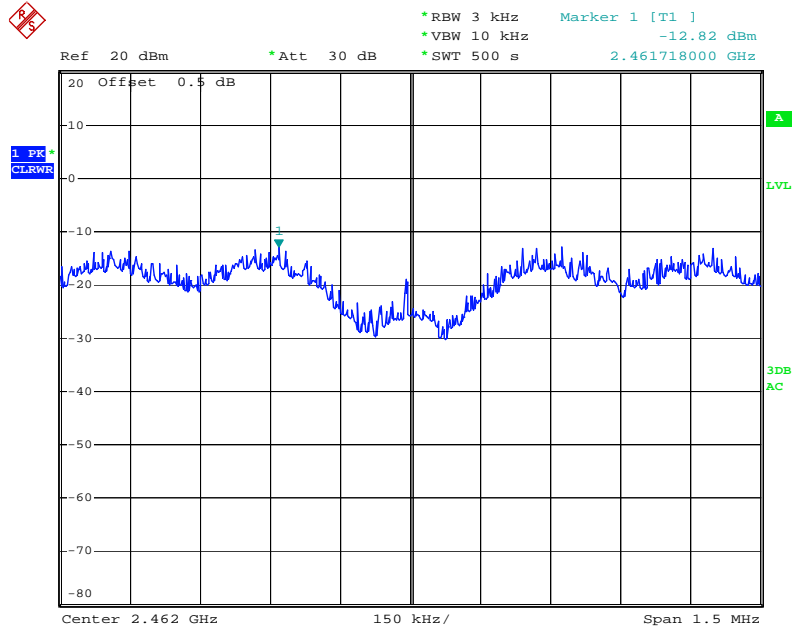

Date: 8.JUN.2011 15:18:01

\*\*\*\*\* END OF REPORT \*\*\*\*\*