

**FCC 47 CFR PART 15 SUBPART B**  
**CERTIFICATION TEST REPORT**

**Product name: LED LCD TV**

**MODEL No.: 40H3507, 40H3D, 40H3D+(+ on behalf of Arabic numerals)  
40H3C, 40H320D, 40H330D, 40H350D, 40H360D, 40H3020D, 40H3030D,  
40H3050D, 40H3060D**

**FCC ID: W9HLCDD0069**

**REPORT NO: ES170110046E**

**ISSUE DATE: February 4, 2017**

*Prepared for*

**Hisense Electric Co., Ltd.**  
**No. 218 Qianwangang Road, Economy&Technology  
DevelopmentZone, Qingdao 266071**

*Prepared by*

**EMTEK (SHENZHEN) CO., LTD.**

**Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,  
Guangdong, China  
TEL: 86-755-26954280  
FAX: 86-755-26954282**

## TABLE OF CONTENT

Test Report Description	Page
<b>1. SUMMARY OF TEST RESULT .....</b>	<b>5</b>
<b>2. GENERAL INFORMATION .....</b>	<b>6</b>
2.1. DESCRIPTION OF DEVICE (EUT).....	6
2.2. DESCRIPTION OF TEST FACILITY .....	6
2.3. DESCRIPTION OF SUPPORT DEVICE .....	7
2.4. DESCRIPTION OF CABLE .....	7
2.5. MEASUREMENT UNCERTAINTY .....	7
<b>3. MEASURING DEVICE AND TEST EQUIPMENT .....</b>	<b>8</b>
3.1. FOR POWER LINE CONDUCTED EMISSION MEASUREMENT .....	8
3.2. FOR RADIATED EMISSION MEASUREMENT (3M CHAMBER).....	8
<b>4. CONDUCTED EMISSION MEASUREMENT .....</b>	<b>9</b>
4.1. BLOCK DIAGRAM OF TEST SETUP .....	9
4.2. MEASURING STANDARD .....	9
4.3. POWER LINE CONDUCTED EMISSION LIMITS (CLASS B).....	9
4.4. EUT CONFIGURATION ON MEASUREMENT .....	9
4.5. OPERATING CONDITION OF EUT .....	9
4.6. TEST PROCEDURE .....	10
4.7. MEASURING RESULTS .....	10
<b>5. RADIATED EMISSION MEASUREMENT .....</b>	<b>13</b>
5.1. BLOCK DIAGRAM OF TEST SETUP .....	13
5.2. MEASURING STANDARD .....	14
5.3. RADIATED EMISSION LIMITS (CLASS B).....	14
5.4. EUT CONFIGURATION ON MEASUREMENT .....	14
5.5. OPERATING CONDITION OF EUT .....	14
5.6. TEST PROCEDURE .....	14
5.7. MEASURING RESULTS .....	15

## TEST REPORT DESCRIPTION

Applicant : Hisense Electric Co., Ltd.  
No. 218 Qianwangang Road, Economy&Technology DevelopmentZone,  
Qingdao 266071

Manufacturer : Hisense Electric Co., Ltd.  
No. 218 Qianwangang Road, Economy&Technology DevelopmentZone,  
Qingdao 266071

Factory 1 : Guangdong Hisense Electronics Co., Ltd.  
Zone B, No. 8 Hisense Road, Advanced Manufacturing Jiangsha  
Demonstration Park, Jiangmen City, Guangdong Province, PRC

Factory 2 : HISENSE ELECTRONICA MEXICO, S.A. DE C.V.  
Blvd. Sharp #3510 Parque Industrial Rosarito, C.P. 22710 Playas de  
Rosarito, Baja California, Mexico

Trademark : HISENSE

EUT : LED LCD TV

Model No. : 40H3507, 40H3D, 40H3D+(+ on behalf of Arabic numerals)  
40H3C, 40H320D, 40H330D, 40H350D, 40H360D, 40H3020D, 40H3030D,  
40H3050D, 40H3060D

Power Supply : 120VAC, 60Hz 70W


### Measurement Procedure Used:


FCC Rules and Regulations Part 15: 2016 Subpart B Class B & FCC / ANSI C63.4-2014


The device described above is tested by EMTEK (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (SHENZHEN) CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (SHENZHEN) CO., LTD.

Date of Test : January 11, 2017 to February 04, 2017

Prepared by :   
Yaping Shen/Editor

Reviewer :   
Joe Xia/Supervisor

Approved & Authorized Signer :   
Lisa Wang/Manager

### Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ES170110046E	/	Original Report

## 1. SUMMARY OF TEST RESULT

<b>EMISSION</b>		
Description of Test Item	Standard & Limits	Results
Conducted Disturbance at Mains Terminals	FCC Part 15, Subpart B, Class B ANSI C63.4: 2014	Pass
Radiated Disturbance	FCC Part 15, Subpart B, Class B ANSI C63.4: 2014	Pass
Note: N/A is an abbreviation for Not Applicable.		

## 2. GENERAL INFORMATION

### 2.1. Description of Device (EUT)

EUT	:	LED LCD TV
Model Number	:	40H3507, 40H3D, 40H3D+(+ on behalf of Arabic numerals) 40H3C, 40H320D, 40H330D, 40H350D, 40H360D, 40H3020D, 40H3030D, 40H3050D, 40H3060D (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is the model number. for trading purpose. We prepare 40H3507 for all test.)
Test Voltage	:	AC 120V/60Hz
Applicant Address	:	Hisense Electric Co., Ltd. No. 218 Qianwangang Road, Economy&Technology DevelopmentZone, Qingdao 266071
Manufacturer Address	:	Hisense Electric Co., Ltd. No. 218 Qianwangang Road, Economy&Technology DevelopmentZone, Qingdao 266071
Factory 1 Address	:	Guangdong Hisense Electronics Co., Ltd. Zone B, No. 8 Hisense Road, Advanced Manufacturing Jiangsha Demonstration Park, Jiangmen City, Guangdong Province, PRC
Factory 2 Address	:	HISENSE ELECTRONICA MEXICO, S.A. DE C.V. Blvd. Sharp #3510 Parque Industrial Rosarito, C.P. 22710 Playas de Rosarito, Baja California, Mexico
Date of Received	:	January 11, 2017
Date of Test	:	January 11, 2017 to February 04, 2017

### 2.2. Description of Test Facility

Site Description EMC Lab.	:	Accredited by CNAS, 2016.10.24 The certificate is valid until 2022.10.28 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L2291. Accredited by TUV Rheinland Shenzhen 2010.5.25 The Laboratory has been assessed according to the requirements ISO/IEC 17025.  Accredited by FCC, July 06, 2016 The Certificate Registration Number is 709623.  Accredited by Industry Canada, November 15, 2015 The Certificate Registration Number is 4480A-2.
Name of Firm Site Location	:	EMTEK (SHENZHEN) CO., LTD. Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

### 2.3. Description of Support Device

PC	:	Manufacturer: LENOVO M/N: 9702 S/N: L3C4410 CE, FCC: DOC
Keyboard	:	Manufacturer: LENOVO M/N: KU-0225 S/N:0585494 CE, FCC: DOC
Mouse	:	Manufacturer: LENOVO M/N: MO28UOL S/N:44G7862 068 CE, FCC: DOC
Dummy Load	:	Manufacturer: Cultraview M/N: CVNS1200

### 2.4. Description of Cable

Cables			
No.	Type	Length	Remark
1.	Power Cable	1.5 m	Unshielded
2.	HDMI Cable*3	0.8 m	Unshielded
3.	AV Cable	1.0 m	Unshielded

### 2.5. Measurement Uncertainty

Test Item	Uncertainty
Conducted Emission Uncertainty	: 2.96dB(9k~150kHz Conduction 1#) 2.74dB(150k-30MHz Conduction 1#)
Radiated Emission Uncertainty (3m Chamber)	: 3.78dB (30M~1GHz Polarize: H) 4.27dB (30M~1GHz Polarize: V) 4.46dB (1~6GHz)

### 3. MEASURING DEVICE AND TEST EQUIPMENT

#### 3.1. For Power Line Conducted Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	Test Receiver	Rohde & Schwarz	ESCI	26115-010-0027	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	L.I.S.N.	Rohde & Schwarz	ENV216	101161	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	50Ω Coaxial Switch	Anritsu	MP59B	6100175589	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Voltage Probe	Rohde & Schwarz	ESH2-Z3	100122	May 28, 2016	1 Year


#### 3.2. For Radiated Emission Measurement (3m Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Pre-Amplifier	HP	8447D	2944A07999	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Bilog Antenna	Schwarzbeck	VULB9163	142	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Cable	Schwarzbeck	AK9513	ACRX1	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Cable	Rosenberger	N/A	FP2RX2	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Cable	Schwarzbeck	AK9513	CRPX1	May 28, 2016	1 Year
<input checked="" type="checkbox"/>	Cable	Schwarzbeck	AK9513	CRPX2	May 28, 2016	1 Year



## 4. CONDUCTED EMISSION MEASUREMENT

### 4.1. Block Diagram of Test Setup

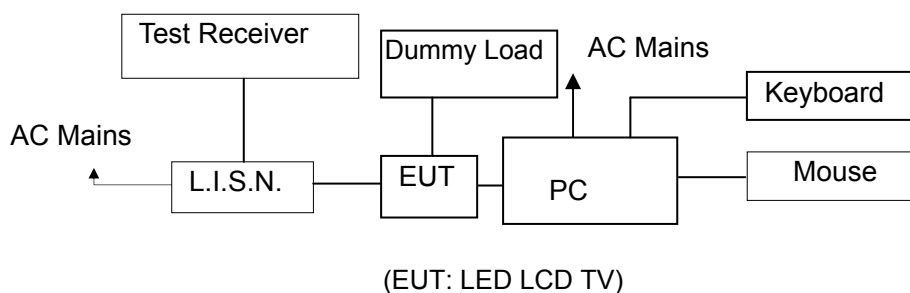

### 4.2. Measuring Standard

FCC Part 15, Subpart B, Class B ANSI C63.4: 2014

### 4.3. Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dB $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.  
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

### 4.4. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet FCC requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

EUT : LED LCD TV  
Model Number : 40H3507

### 4.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown on Section 4.1.

4.5.2. Turn on the power of all equipments.

4.5.3. Let the EUT work in measuring mode (HDMI IN1 ARC, HDMI IN 2, HDMI IN 3) and measure it.

#### 4.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the FCC regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCS30) is set at 9kHz in 150kHz~30MHz and 200Hz in 9kHz~150kHz.


The frequency range from 150kHz to 30MHz is investigated.

All the modes were tested and the data of the worst modes are attached the following pages.

#### 4.7. Measuring Results

**PASS.**


The worst mode is HDMI IN 3, and the mode is the LED LCD TV connected to PC. Please refer to the following pages.

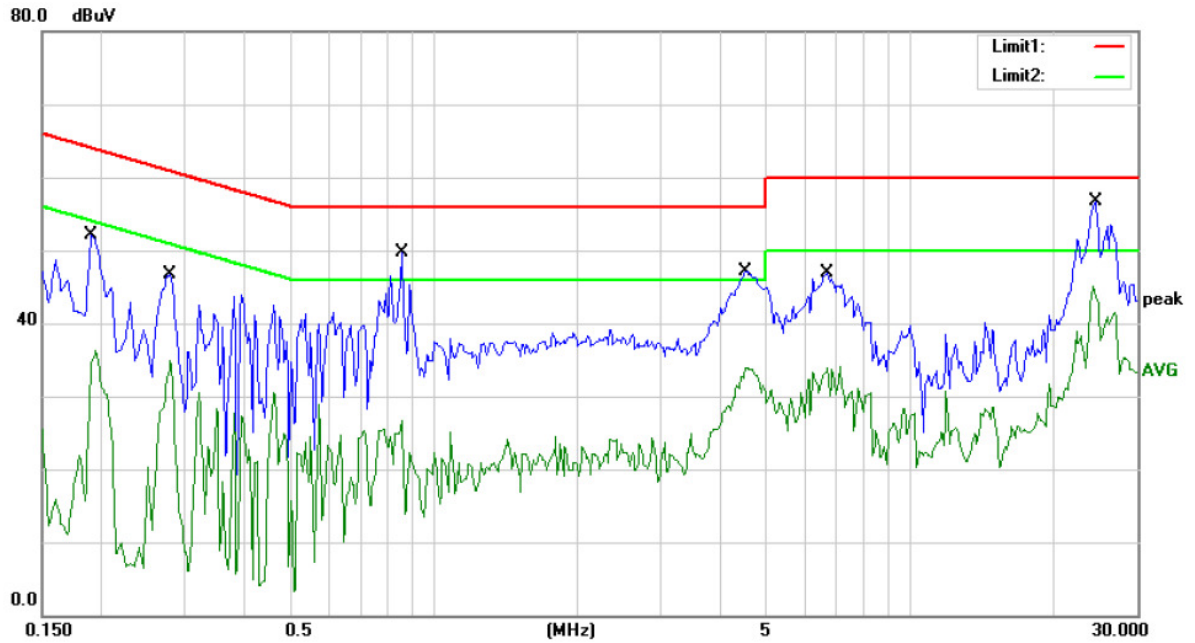

Site Conduction #1 Phase: **L1** Temperature: 22  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: HDMI IN 3  
 Note:

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Over dB	Detector	Comment
1	0.1900	52.12	0.00	52.12	64.04	-11.92	QP	
2	0.1900	36.34	0.00	36.34	54.04	-17.70	AVG	
3	0.2800	46.69	0.00	46.69	60.82	-14.13	QP	
4	0.2800	34.87	0.00	34.87	50.82	-15.95	AVG	
5	0.8550	49.68	0.00	49.68	56.00	-6.32	QP	
6	0.8550	26.76	0.00	26.76	46.00	-19.24	AVG	
7	4.5250	47.17	0.00	47.17	56.00	-8.83	QP	
8	4.5250	33.88	0.00	33.88	46.00	-12.12	AVG	
9	6.7100	46.96	0.00	46.96	60.00	-13.04	QP	
10	6.7100	34.15	0.00	34.15	50.00	-15.85	AVG	
11 *	24.5750	56.77	0.00	56.77	60.00	-3.23	QP	
12	24.5750	45.09	0.00	45.09	50.00	-4.91	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: Stan

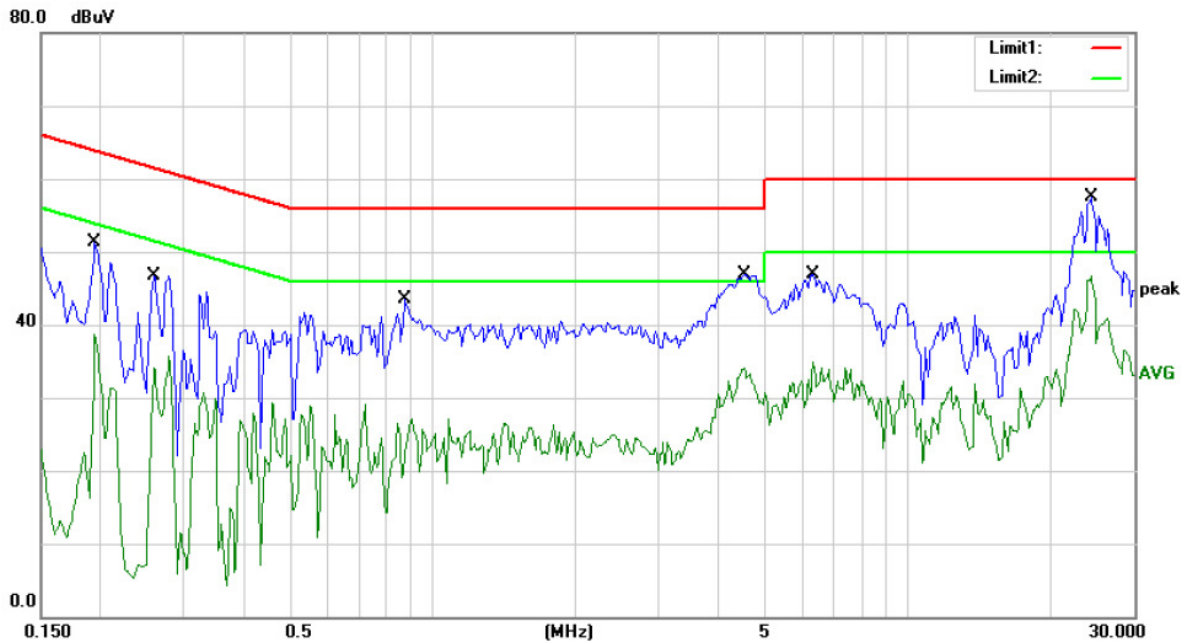

Site Conduction #1 Phase: **N** Temperature: 22  
 Limit: (CE)FCC PART 15 class B\_QP Power: AC 120V/60Hz Humidity: 55 %  
 Mode: HDMI IN 3  
 Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1950	51.29	0.00	51.29	63.82	-12.53	QP	
2		0.1950	38.77	0.00	38.77	53.82	-15.05	AVG	
3		0.2600	46.72	0.00	46.72	61.43	-14.71	QP	
4		0.2600	35.77	0.00	35.77	51.43	-15.66	AVG	
5		0.8750	43.44	0.00	43.44	56.00	-12.56	QP	
6		0.8750	27.20	0.00	27.20	46.00	-18.80	AVG	
7		4.5300	46.97	0.00	46.97	56.00	-9.03	QP	
8		4.5300	34.09	0.00	34.09	46.00	-11.91	AVG	
9		6.3200	46.91	0.00	46.91	60.00	-13.09	QP	
10		6.3200	34.89	0.00	34.89	50.00	-15.11	AVG	
11		24.2750	52.50	0.00	52.50	60.00	-7.50	QP	
12	*	24.2750	46.71	0.00	46.71	50.00	-3.29	AVG	

\*:Maximum data    x:Over limit    !:over margin    Comment: Factor build in receiver.    Operator: Stan

## 5. RADIATED EMISSION MEASUREMENT

### 5.1. Block Diagram of Test Setup


#### 5.1.1. Block diagram of EUT System

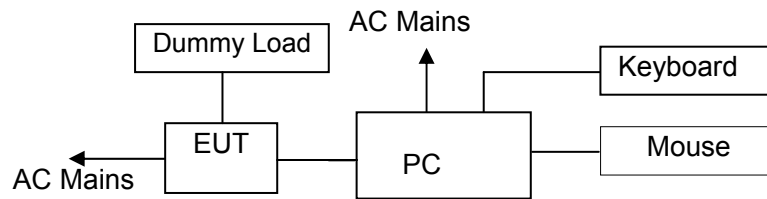


(EUT: LED LCD TV)

#### 5.1.2. Block diagram of test setup (In chamber)

30MHz-1GHz:

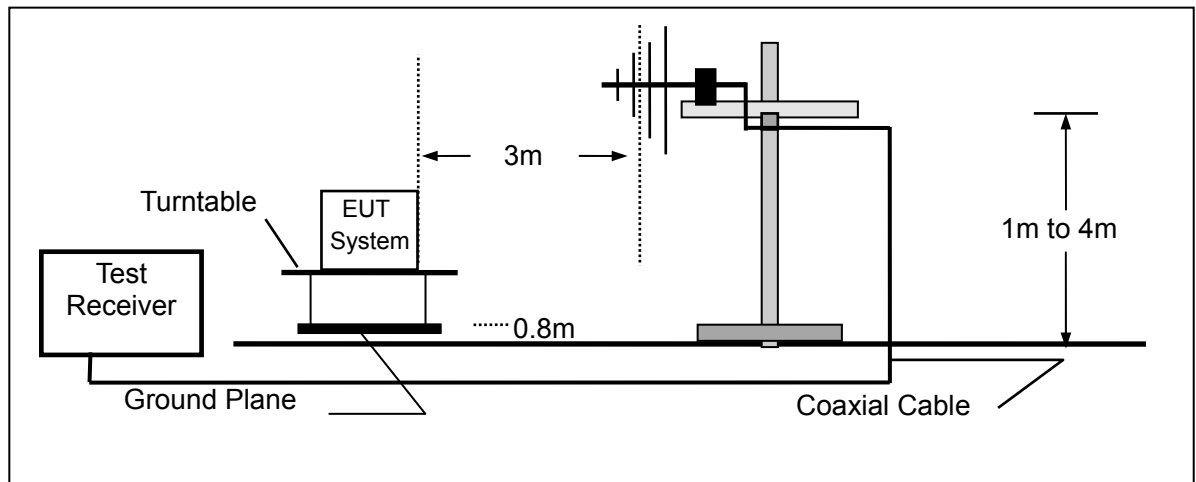

1GHz-6GHz:

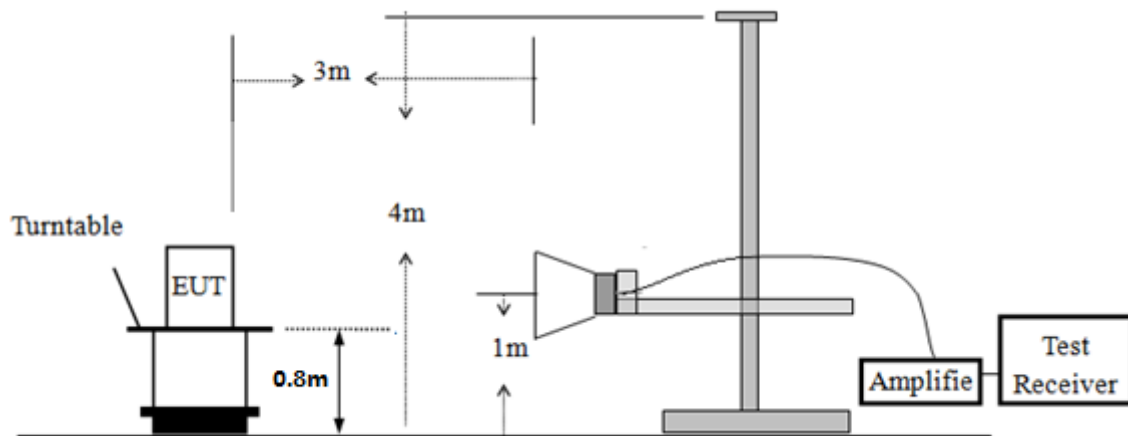

(EUT: LED LCD TV)

## 5.2. Measuring Standard

FCC Part 15, Subpart B, Class B ANSI C63.4: 2014

## 5.3. Radiated Emission Limits (Class B)

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}@3\text{M}$
30 ~ 88	10	100	40
88 ~ 216	10	150	43.5
216 ~ 960	10	200	46
960 ~ 1000	10	500	54

Frequency (GHz)	Distance (Meters)	Field Strengths Limit	
		Average ( $\text{dB}\mu\text{V}/\text{m}$ )	Peak ( $\text{dB}\mu\text{V}/\text{m}$ )
1~6	3	54	74

Remark: (1) Emission level ( $\text{dB}\mu\text{V}$ ) =  $20 \log$  Emission level  $\mu\text{V}/\text{m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

## 5.4. EUT Configuration on Measurement

The FCC Class B regulations test method must be used to find the maximum emission during radiated emission measurement.

EUT : LED LCD TV  
 Model Number : 40H3507

## 5.5. Operating Condition of EUT

5.5.1. Setup the EUT as shown on Section 5.1.

5.5.2. Turn on the power of all equipments.

5.5.3. Let the EUT work in measuring mode (HDMI IN1 ARC, HDMI IN 2, HDMI IN 3) and measure it.

## 5.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESU26) is set at 120kHz.


All the modes were tested and the data of the worst modes are attached the following pages.

## 5.7. Measuring Results

**PASS.**

The frequency range from 30MHz to 6000MHz is investigated.

The worst mode is HDMI IN 3, and the mode is the LED LCD TV connected to PC. Please refer to the following pages.

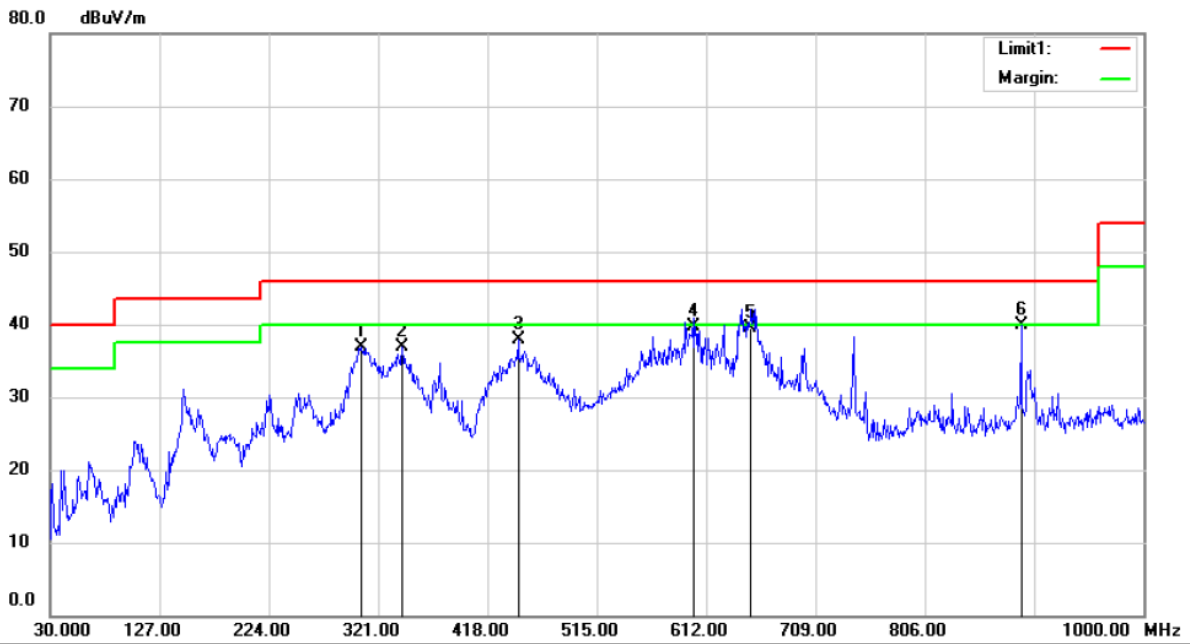

Site 3m Chamber #3

Polarization: *Horizontal*

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

Mode:HDMI IN 3


Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		306.4500	48.94	-11.99	36.95	46.00	-9.05			QP
2		342.3400	48.02	-11.10	36.92	46.00	-9.08			QP
3		445.1600	46.49	-8.59	37.90	46.00	-8.10			QP
4		600.3600	44.85	-5.05	39.80	46.00	-6.20			QP
5		651.7700	44.10	-4.50	39.60	46.00	-6.40			QP
6	*	891.3600	40.96	-1.04	39.92	46.00	-6.08			QP

\*:Maximum data    x:Over limit    !:over margin

Operator: CL



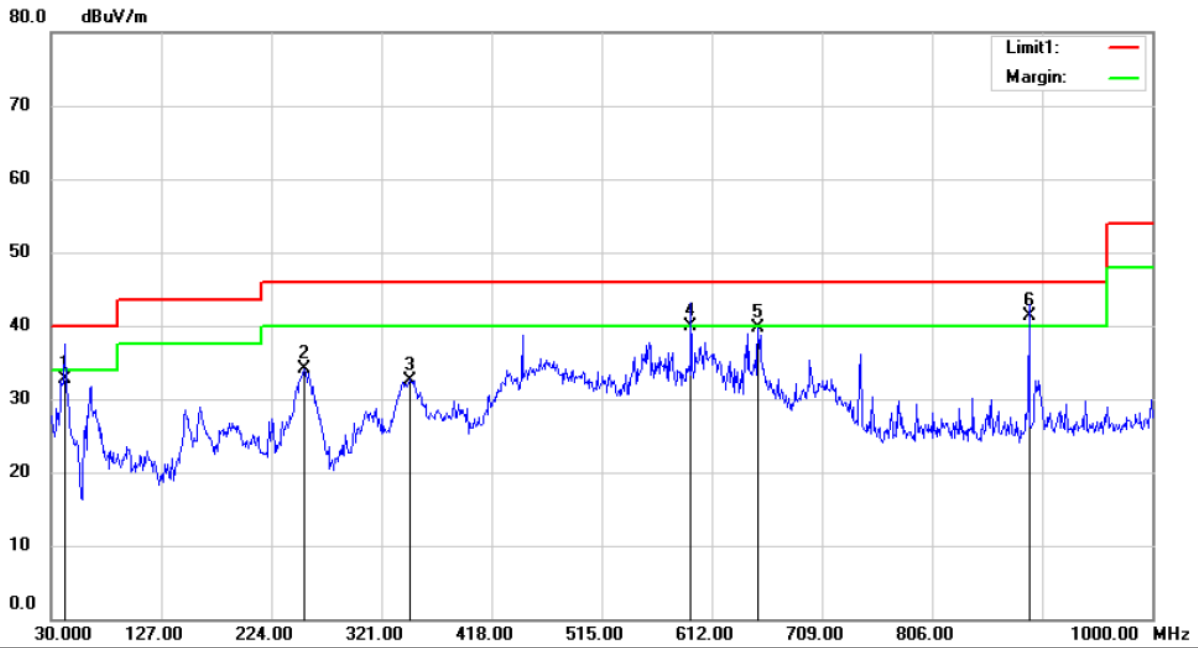


Site 3m Chamber #3 Polarization: **Vertical** Temperature: 24 C  
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %  
 Mode:HDMI IN 3  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		41.6400	47.83	-15.03	32.80	40.00	-7.20	QP		
2		253.1000	47.48	-13.45	34.03	46.00	-11.97	QP		
3		346.2200	43.53	-10.93	32.60	46.00	-13.40	QP		
4		593.5700	45.21	-5.21	40.00	46.00	-6.00	QP		
5		652.7400	44.15	-4.49	39.66	46.00	-6.34	QP		
6	*	891.3600	42.34	-1.04	41.30	46.00	-4.70	QP		

\*:Maximum data x:Over limit !:over margin

Operator: CL

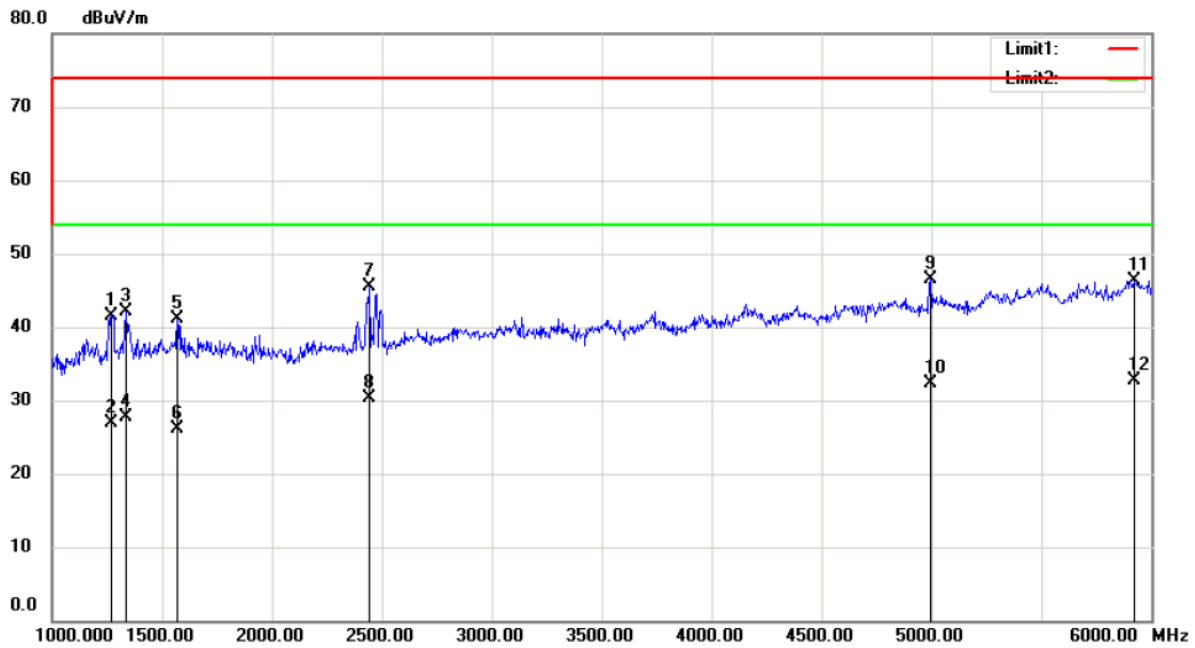


Site 3m Chamber #2      Polarization: **Horizontal**      Temperature: 22 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 55 %  
 Mode:HDMI 3 IN  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1270.000	57.42	-15.82	41.60	74.00	-32.40			peak
2		1270.000	42.72	-15.82	26.90	54.00	-27.10			AVG
3		1335.000	57.93	-15.85	42.08	74.00	-31.92			peak
4		1335.000	43.65	-15.85	27.80	54.00	-26.20			AVG
5		1570.000	57.13	-15.97	41.16	74.00	-32.84			peak
6		1570.000	42.07	-15.97	26.10	54.00	-27.90			AVG
7		2445.000	59.46	-13.95	45.51	74.00	-28.49			peak
8		2445.000	44.35	-13.95	30.40	54.00	-23.60			AVG
9		4995.000	54.27	-7.72	46.55	74.00	-27.45			peak
10		4995.000	40.02	-7.72	32.30	54.00	-21.70			AVG
11		5920.000	50.64	-4.25	46.39	74.00	-27.61			peak
12	*	5920.000	36.95	-4.25	32.70	54.00	-21.30			AVG

\*:Maximum data    x:Over limit    !:over margin

Operator: JOE

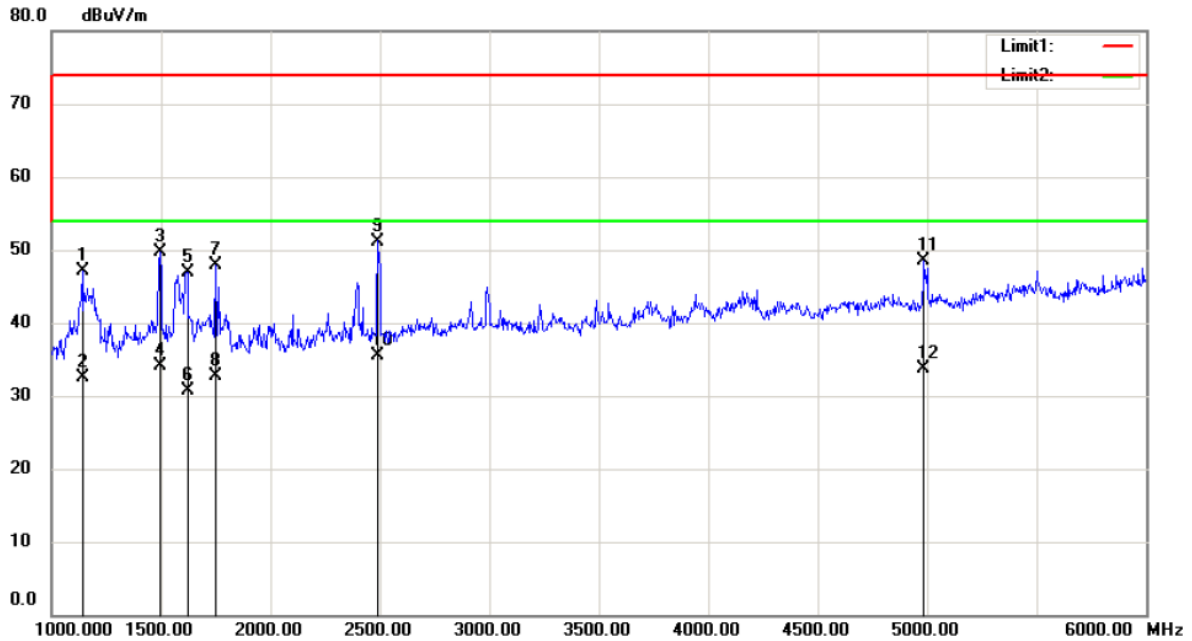

Site 3m Chamber #2      Polarization: **Vertical**      Temperature: 22 C  
 Limit: (RE)FCC PART 15 CLASS B      Power: AC 120V/60Hz      Humidity: 55 %  
 Mode:HDMI 3 IN  
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		1140.000	62.88	-15.76	47.12	74.00	-26.88			peak
2		1140.000	48.36	-15.76	32.60	54.00	-21.40			AVG
3		1495.000	65.56	-15.93	49.63	74.00	-24.37			peak
4		1495.000	50.03	-15.93	34.10	54.00	-19.90			AVG
5		1620.000	62.95	-15.99	46.96	74.00	-27.04			peak
6		1620.000	46.79	-15.99	30.80	54.00	-23.20			AVG
7		1750.000	63.93	-16.04	47.89	74.00	-26.11			peak
8		1750.000	48.84	-16.04	32.80	54.00	-21.20			AVG
9		2490.000	64.93	-13.73	51.20	74.00	-22.80			peak
10	*	2490.000	49.33	-13.73	35.60	54.00	-18.40			AVG
11		4985.000	56.23	-7.74	48.49	74.00	-25.51			peak
12		4985.000	41.44	-7.74	33.70	54.00	-20.30			AVG

\*:Maximum data    x:Over limit    !:over margin      Operator: JOE

-----The end-----