

FCC 47 CFR PART 15 SUBPART B
CERTIFICATION TEST REPORT

Product name: LED LCD TV

**MODEL No.: 43H5507, 43H5D, 43H5D1, 43H5D2, 43H5C, 43H5D3, 43H520D,
43H530D, 43H550D, 43H560D, 43H5020D, 43H5030D, 43H5050D, 43H5060D**

FCC ID: W9HLCDD0072

REPORT NO: ES170204007E

ISSUE DATE: February 27, 2017

Prepared for

Hisense Electric Co., Ltd.
**No. 218 Qianwangang Road, Economy&Technology
DevelopmentZone, Qingdao 266071**

Prepared by

EMTEK (SHENZHEN) CO., LTD.

**Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China
TEL: 86-755-26954280
FAX: 86-755-26954282**

TABLE OF CONTENT

Test Report Description	Page
1. SUMMARY OF TEST RESULT	5
2. GENERAL INFORMATION	6
2.1. DESCRIPTION OF DEVICE (EUT)	6
2.2. DESCRIPTION OF TEST FACILITY	6
2.3. DESCRIPTION OF SUPPORT DEVICE	7
2.4. DESCRIPTION OF CABLE	7
2.5. MEASUREMENT UNCERTAINTY	7
3. MEASURING DEVICE AND TEST EQUIPMENT	8
4. CONDUCTED EMISSION MEASUREMENT	9
4.1. BLOCK DIAGRAM OF TEST SETUP	9
4.2. MEASURING STANDARD	9
4.3. POWER LINE CONDUCTED EMISSION LIMITS (CLASS B)	9
4.4. EUT CONFIGURATION ON MEASUREMENT	9
4.5. OPERATING CONDITION OF EUT	9
4.6. TEST PROCEDURE	10
4.7. MEASURING RESULTS	10
5. RADIATED EMISSION MEASUREMENT	13
5.1. BLOCK DIAGRAM OF TEST SETUP	13
5.2. MEASURING STANDARD	14
5.3. RADIATED EMISSION LIMITS (CLASS B)	14
5.4. EUT CONFIGURATION ON MEASUREMENT	14
5.5. OPERATING CONDITION OF EUT	14
5.6. TEST PROCEDURE	14
5.7. MEASURING RESULTS	15
6. RADIATED SPURIOUS EMISSION For wifi module	20
6.1. APPLICABLE STANDARD	20
6.2. CONFORMANCE LIMIT	20
6.3. TEST CONFIGURATION	20
6.4. TEST PROCEDURE	20
6.5. TEST RESULTS	21

TEST REPORT DESCRIPTION

Applicant : Hisense Electric Co., Ltd.
No. 218 Qianwangang Road, Economy&Technology DevelopmentZone,
Qingdao 266071

Manufacturer : Hisense Electric Co., Ltd.
No. 218 Qianwangang Road, Economy&Technology DevelopmentZone,
Qingdao 266071

Factory 1 : Guangdong Hisense Electronics Co., Ltd.
Zone B, No. 8 Hisense Road, Advanced Manufacturing Jiangsha
Demonstration Park, Jiangmen City, Guangdong Province, PRC

Factory 2 : HISENSE ELECTRONICA MEXICO, S.A. DE C.V.
Blvd. Sharp #3510 Parque Industrial Rosarito, C.P. 22710 Playas de
Rosarito, Baja California, Mexico

Trademark : HISENSE

EUT : LED LCD TV

Model No. : 43H5507, 43H5D, 43H5D1, 43H5D2, 43H5C, 43H5D3, 43H520D, 43H530D,
43H550D, 43H560D, 43H5020D, 43H5030D, 43H5050D, 43H5060D

Power Supply : AC 120V, 75W, 60Hz


Measurement Procedure Used:

FCC Rules and Regulations Part 15: 2016 Subpart B Class B & FCC / ANSI C63.4-2014


The device described above is tested by EMTEK (SHENZHEN) CO., LTD. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and EMTEK (SHENZHEN) CO., LTD. is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of EMTEK (SHENZHEN) CO., LTD.

Date of Test : February 04, 2017 to February 15, 2017

Prepared by : 
Sevin Li/Editor

Reviewer : 
Joe Xia/Supervisor

Approved & Authorized Signer : 
Lisa Wang/Manager

Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ES170204007E	/	Original Report

1. SUMMARY OF TEST RESULT

EMISSION		
Description of Test Item	Standard & Limits	Results
Conducted Disturbance at Mains Terminals	FCC Part 15, Subpart B, Class B ANSI C63.4: 2014	Pass
Radiated Disturbance	FCC Part 15, Subpart B, Class B ANSI C63.4: 2014	Pass
Radiated Spurious Emission	15.247(d) 15.209 ANSI C63.10: 2013	Pass
Note: N/A is an abbreviation for Not Applicable.		

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

EUT	:	LED LCD TV
Model Number	:	43H5507, 43H5D, 43H5D1, 43H5D2, 43H5C, 43H5D3, 43H520D, 43H530D, 43H550D, 43H560D, 43H5020D, 43H5030D, 43H5050D, 43H5060D (Note: These models are identical in circuitry and electrical, mechanical and physical construction; the only difference is the model number. for trading purpose. We prepare 43H5507 for all test.)
Test Voltage	:	AC 120V/60Hz
Applicant Address	:	Hisense Electric Co., Ltd. No. 218 Qianwangang Road, Economy&Technology DevelopmentZone, Qingdao 266071
Manufacturer Address	:	Hisense Electric Co., Ltd. No. 218 Qianwangang Road, Economy&Technology DevelopmentZone, Qingdao 266071
Factory 1 Address	:	Guangdong Hisense Electronics Co., Ltd. Zone B, No. 8 Hisense Road, Advanced Manufacturing Jiangsha Demonstration Park, Jiangmen City, Guangdong Province, PRC
Factory 2 Address	:	HISENSE ELECTRONICA MEXICO, S.A. DE C.V. Blvd. Sharp #3510 Parque Industrial Rosarito, C.P. 22710 Playas de Rosarito, Baja California, Mexico
Date of Received	:	February 03, 2017
Date of Test	:	February 04, 2017 to February 15, 2017

2.2. Description of Test Facility

Site Description EMC Lab.	:	Accredited by CNAS, 2016.10.24 The certificate is valid until 2022.10.28 The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L2291. Accredited by TUV Rheinland Shenzhen 2010.5.25 The Laboratory has been assessed according to the requirements ISO/IEC 17025. Accredited by FCC, July 13, 2016 The Certificate Registration Number is 709623. Accredited by Industry Canada, November 15, 2015 The Certificate Registration Number is 4480A-2.
Name of Firm Site Location	:	EMTEK (SHENZHEN) CO., LTD. Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

2.3. Description of Support Device

PC : Manufacturer: LENOVO
M/N: 9702
S/N: L3C4410
CE, FCC: DOC

Keyboard : Manufacturer: LENOVO
M/N: KU-0225
S/N:0585494
CE, FCC: DOC

Mouse : Manufacturer: LENOVO
M/N: MO28UOL
S/N:44G7862 068
CE, FCC: DOC

Dummy load : Manufacturer: Cultraview
M/N: CVNS1200

2.4. Description of Cable

Cables			
No.	Type	Length	Remark
1.	Power Cable	1.5 m	Unshielded
2.	HDMI Cable*3	0.8 m	Unshielded
3.	AV Cable	1.0 m	Unshielded

2.5. Measurement Uncertainty

Test Item	Uncertainty
Conducted Emission Uncertainty	: 2.96dB(9k~150kHz Conduction 1#) 2.74dB(150k-30MHz Conduction 1#)
Radiated Emission Uncertainty (3m Chamber)	: 3.78dB (30M~1GHz Polarize: H) 4.27dB (30M~1GHz Polarize: V) 4.46dB (1~6GHz)

3. MEASURING DEVICE AND TEST EQUIPMENT

3.1.1. Conducted Emission Test Equipment


EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	May 29, 2016
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	May 28, 2016
50Ω Coaxial Switch	Anritsu	MP59B	M20531	May 29, 2016
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	May 28, 2016
Voltage Probe	Rohde & Schwarz	TK9416	N/A	May 28, 2016

3.1.2. Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	May 29, 2016
Pre-Amplifier	HP	8447D	2944A07999	May 28, 2016
Bilog Antenna	Schwarzbeck	VULB9163	142	May 28, 2016
Loop Antenna	ARA	PLA-1030/B	1029	May 28, 2016
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	May 28, 2016
Horn Antenna	Schwarzbeck	BBHA 9120	D143	May 28, 2016
Cable	Schwarzbeck	AK9513	ACRX1	May 29, 2016
Cable	Rosenberger	N/A	FP2RX2	May 29, 2016
Cable	Schwarzbeck	AK9513	CRPX1	May 29, 2016
Cable	Schwarzbeck	AK9513	CRRX2	May 29, 2016

4. CONDUCTED EMISSION MEASUREMENT

4.1. Block Diagram of Test Setup

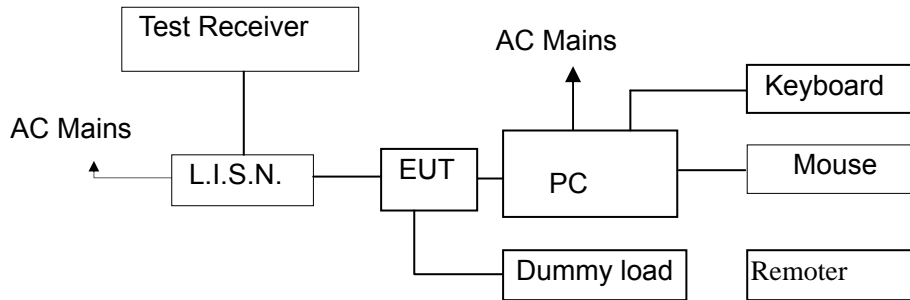

(EUT: LED LCD TV)

4.2. Measuring Standard

FCC Part 15, Subpart B, Class B ANSI C63.4: 2014

4.3. Power Line Conducted Emission Limits (Class B)

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66.0 ~ 56.0 *	56.0 ~ 46.0 *
0.50 ~ 5.00	56.0	46.0
5.00 ~ 30.00	60.0	50.0

NOTE1-The lower limit shall apply at the transition frequencies.
NOTE2-The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.50MHz.

4.4. EUT Configuration on Measurement

The following equipments are installed on Conducted Emission Measurement to meet FCC requirements and operating in a manner which tends to maximize its emission characteristics in a normal application.

EUT : LED LCD TV
Model Number : 43H5507

4.5. Operating Condition of EUT

4.5.1. Setup the EUT as shown on Section 4.1.

4.5.2. Turn on the power of all equipments.

4.5.3. Let the EUT work in measuring mode (HDMI 1 IN, HDMI 2 ARC, HDMI 3 IN, LAN Ping) and measure it. (The HDMI Port connect to PC HDMI Port via HDMI line; The LAN Port connect to PC LAN Port via Ethernet cable)

4.6. Test Procedure

The EUT is put on the plane 0.8m high above the ground by insulating support and connected to the AC mains through Line Impedance Stability Network (L.I.S.N). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are investigated to find out the maximum conducted emission according to the FCC regulations during conducted emission measurement.

The bandwidth of the field strength meter (R&S Test Receiver ESCS30) is set at 9kHz in 150kHz~30MHz and 200Hz in 9kHz~150kHz.


The frequency range from 150kHz to 30MHz is investigated.

4.7. Measuring Results

PASS.

Please refer to the following pages.

The worst mode is HDMI 3 IN, and the mode is the LED LCD TV connected to PC. Please refer to the following pages.

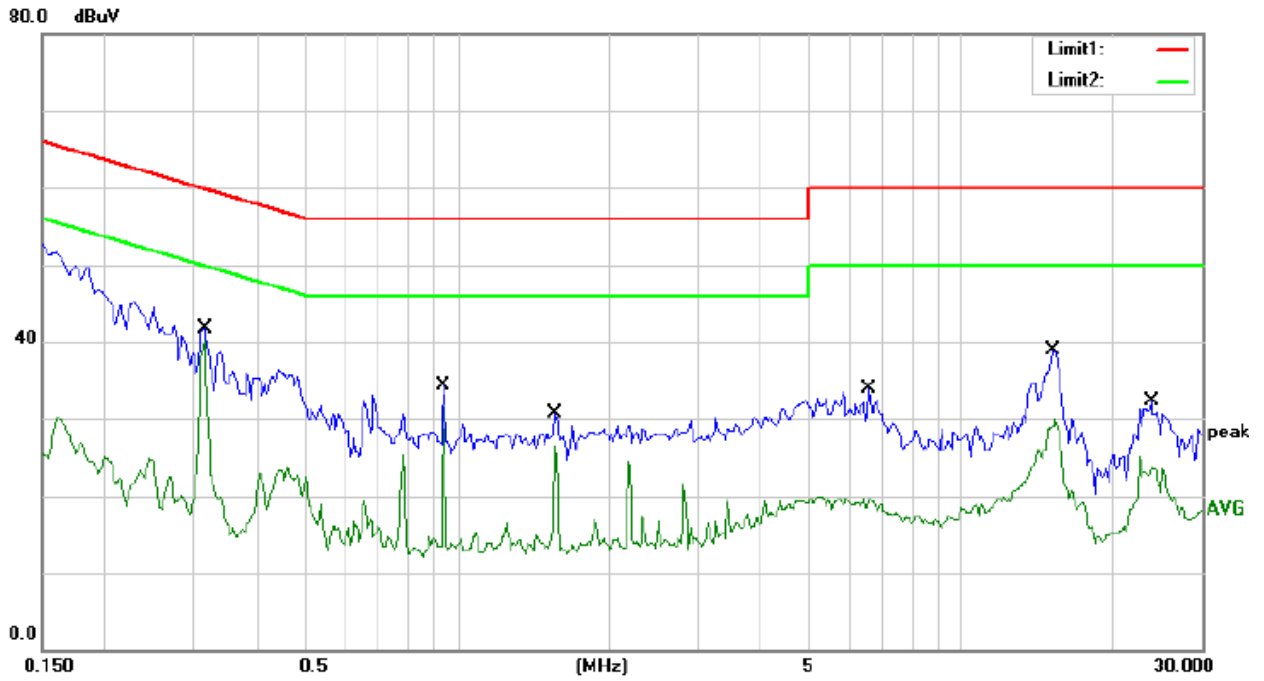

Site Conduction #1

Phase: **L1**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz


Humidity: 55 %

Mode: HDMI 3 IN

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.3150	41.77	0.00	41.77	59.84	-18.07	QP	
2	*	0.3150	40.01	0.00	40.01	49.84	-9.83	AVG	
3		0.9400	34.27	0.00	34.27	56.00	-21.73	QP	
4		0.9400	31.51	0.00	31.51	46.00	-14.49	AVG	
5		1.5650	30.77	0.00	30.77	56.00	-25.23	QP	
6		1.5650	26.44	0.00	26.44	46.00	-19.56	AVG	
7		6.5500	33.83	0.00	33.83	60.00	-26.17	QP	
8		6.5500	19.69	0.00	19.69	50.00	-30.31	AVG	
9		15.2250	38.90	0.00	38.90	60.00	-21.10	QP	
10		15.2250	29.82	0.00	29.82	50.00	-20.18	AVG	
11		23.8250	32.22	0.00	32.22	60.00	-27.78	QP	
12		23.8250	25.10	0.00	25.10	50.00	-24.90	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Stan

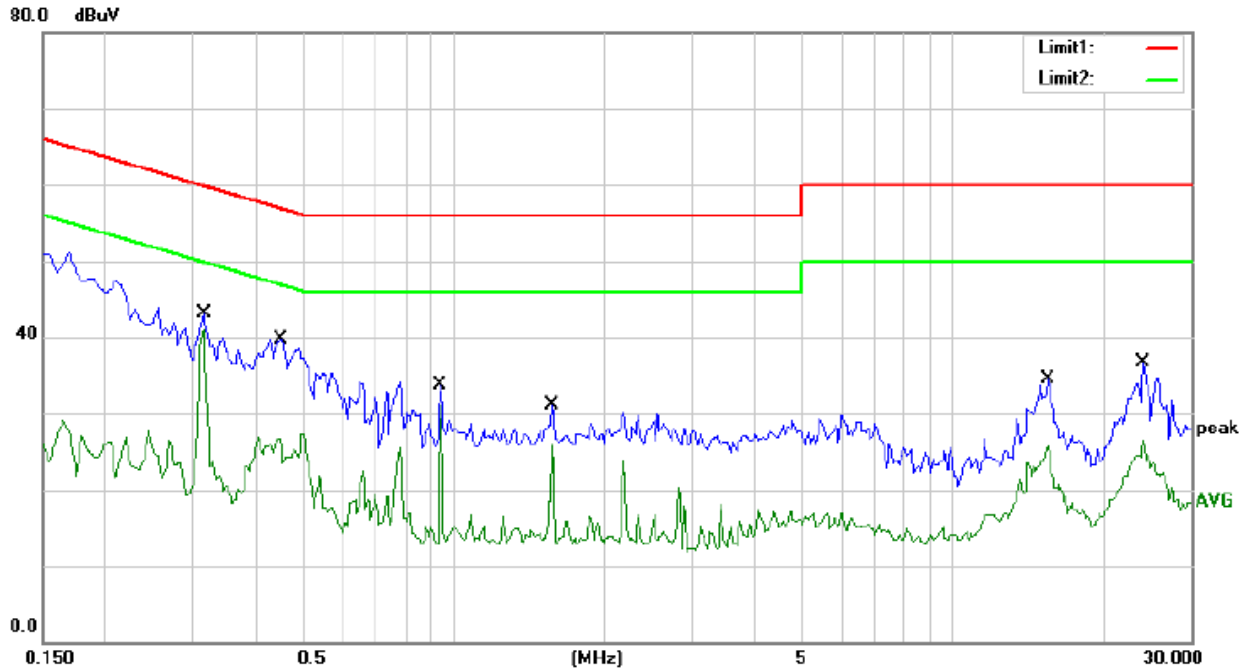

Site Conduction #1 Phase: **N** Temperature: 22
 Limit: (CE)FCC PART 15 class B_QP Power: AC 120V/60Hz Humidity: 55 %
 Mode: HDMI 3 IN
 Note:


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.3150	43.03	0.00	43.03	59.84	-16.81	QP	
2	*	0.3150	41.14	0.00	41.14	49.84	-8.70	AVG	
3		0.4500	39.71	0.00	39.71	56.88	-17.17	QP	
4		0.4500	27.22	0.00	27.22	46.88	-19.66	AVG	
5		0.9400	33.74	0.00	33.74	56.00	-22.26	QP	
6		0.9400	31.15	0.00	31.15	46.00	-14.85	AVG	
7		1.5700	31.06	0.00	31.06	56.00	-24.94	QP	
8		1.5700	25.90	0.00	25.90	46.00	-20.10	AVG	
9		15.4750	34.49	0.00	34.49	60.00	-25.51	QP	
10		15.4750	25.70	0.00	25.70	50.00	-24.30	AVG	
11		24.0750	36.70	0.00	36.70	60.00	-23.30	QP	
12		24.0750	26.46	0.00	26.46	50.00	-23.54	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Stan

5. RADIATED EMISSION MEASUREMENT


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of EUT System

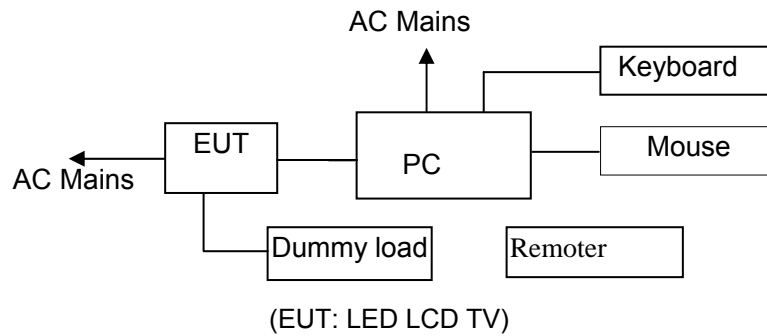


5.1.2. Block diagram of test setup (In chamber)

30MHz-1GHz:

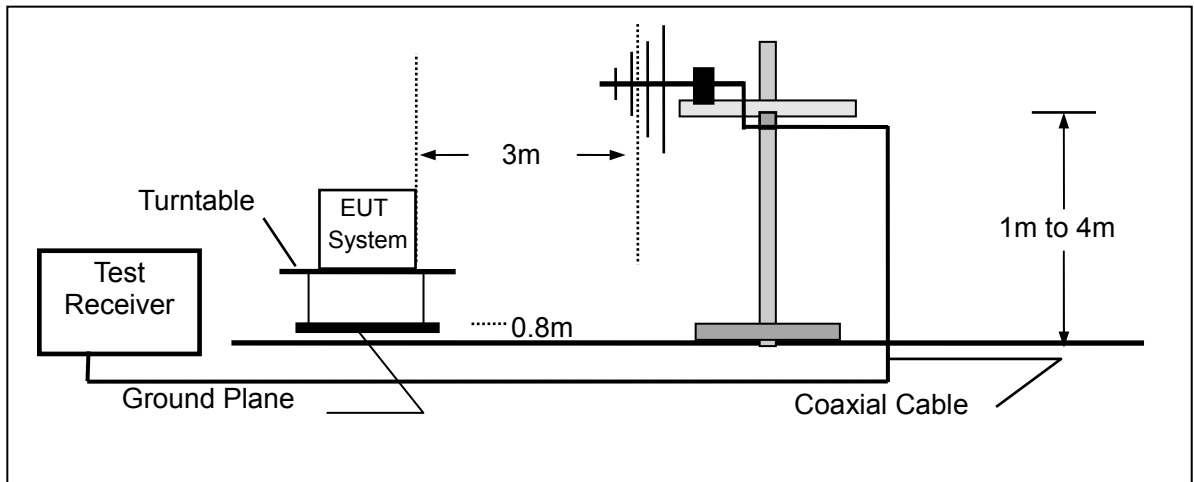

1GHz-6GHz:

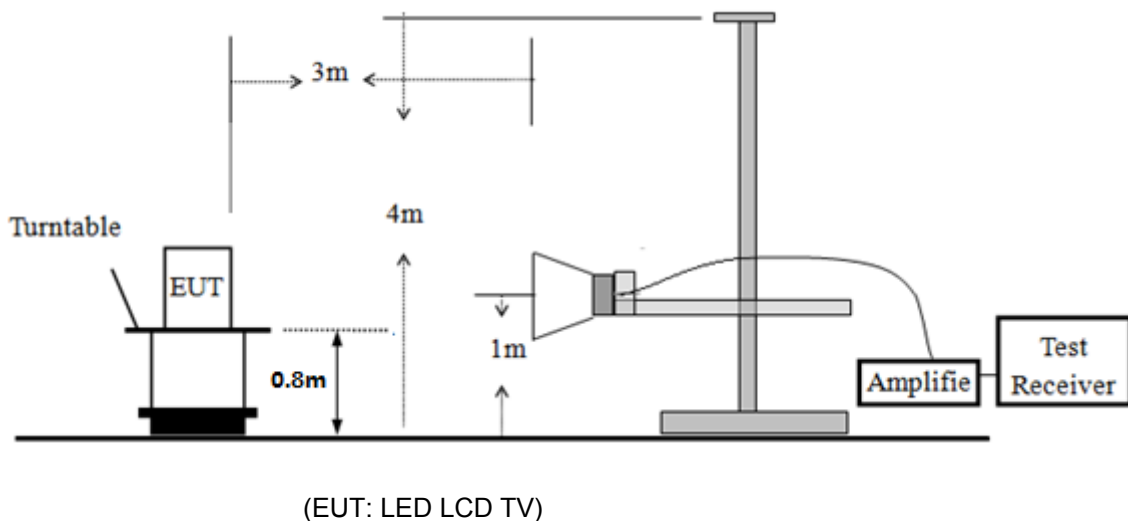

5.2. Measuring Standard

FCC Part 15, Subpart B, Class B ANSI C63.4: 2014

5.3. Radiated Emission Limits (Class B)

Frequency MHz	Distance Meters	Field Strengths Limit	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}@3\text{M}$
30 ~ 88	10	100	40
88 ~ 216	10	150	43.5
216 ~ 960	10	200	46
960 ~ 1000	10	500	54

Frequency (GHz)	Distance (Meters)	Field Strengths Limit	
		Average ($\text{dB}\mu\text{V}/\text{m}$)	Peak ($\text{dB}\mu\text{V}/\text{m}$)
1~6	3	54	74

Remark: (1) Emission level ($\text{dB}\mu\text{V}$) = $20 \log$ Emission level $\mu\text{V}/\text{m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

5.4. EUT Configuration on Measurement

The FCC Class B regulations test method must be used to find the maximum emission during radiated emission measurement.

EUT : LED LCD TV
 Model Number : 43H5507

5.5. Operating Condition of EUT

5.5.1. Setup the EUT as shown on Section 5.1.

5.5.2. Turn on the power of all equipments.

5.5.3. Let the EUT work in measuring mode (HDMI 1 IN, HDMI 2 ARC, HDMI 3 IN, LAN Ping) and measure it. (The HDMI Port connect to PC HDMI Port via HDMI line; The LAN Port connect to PC LAN Port via Ethernet cable)

5.6. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Bilog antenna (calibrated by Dipole Antenna) is used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth of the Receiver (ESU26) is set at 120kHz.


5.7. Measuring Results

PASS.

The frequency range from 30MHz to 6000MHz is investigated.

The worst mode is HDMI 3 IN, and the mode is the LED LCD TV connected to PC. Please refer to the following pages.

Please refer to the following pages.

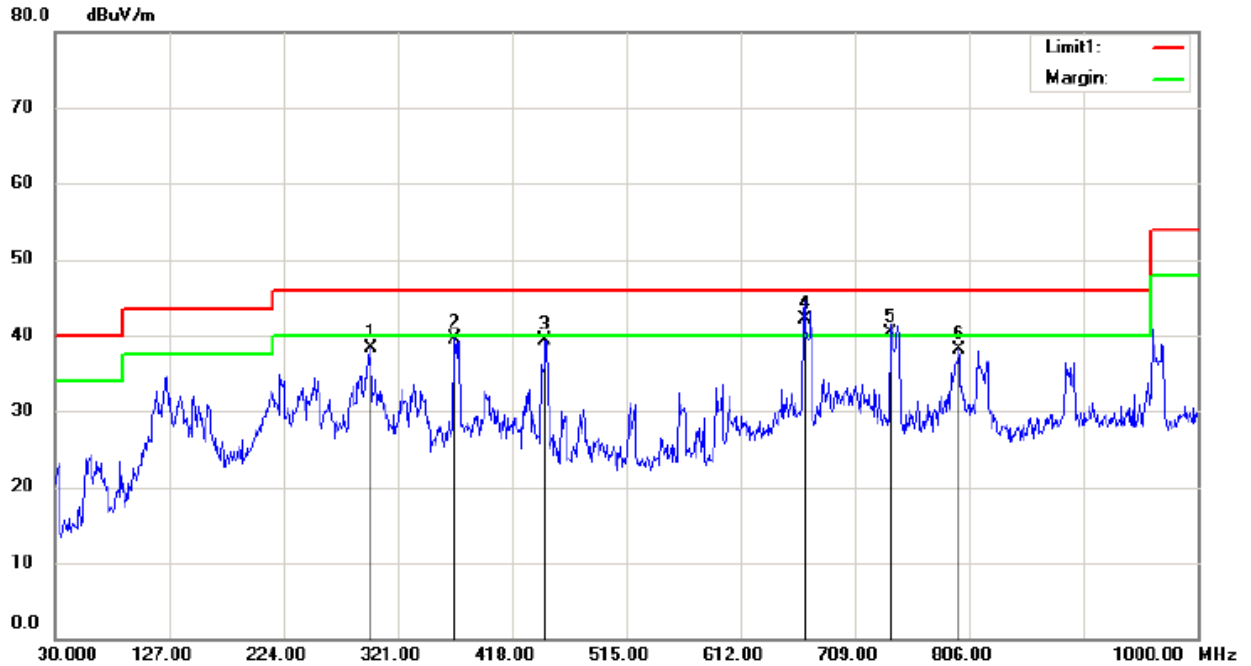


Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 50 %
 Mode:HDMI 3 Input
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		298.6900	48.37	-10.03	38.34	46.00	-7.66	QP		
2		369.5000	48.47	-8.87	39.60	46.00	-6.40	QP		
3		446.1300	47.16	-7.81	39.35	46.00	-6.65	QP		
4	*	666.3200	46.01	-3.81	42.20	46.00	-3.80	QP		
5	!	739.0700	43.43	-3.13	40.30	46.00	-5.70	QP		
6		797.2700	40.39	-2.31	38.08	46.00	-7.92	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

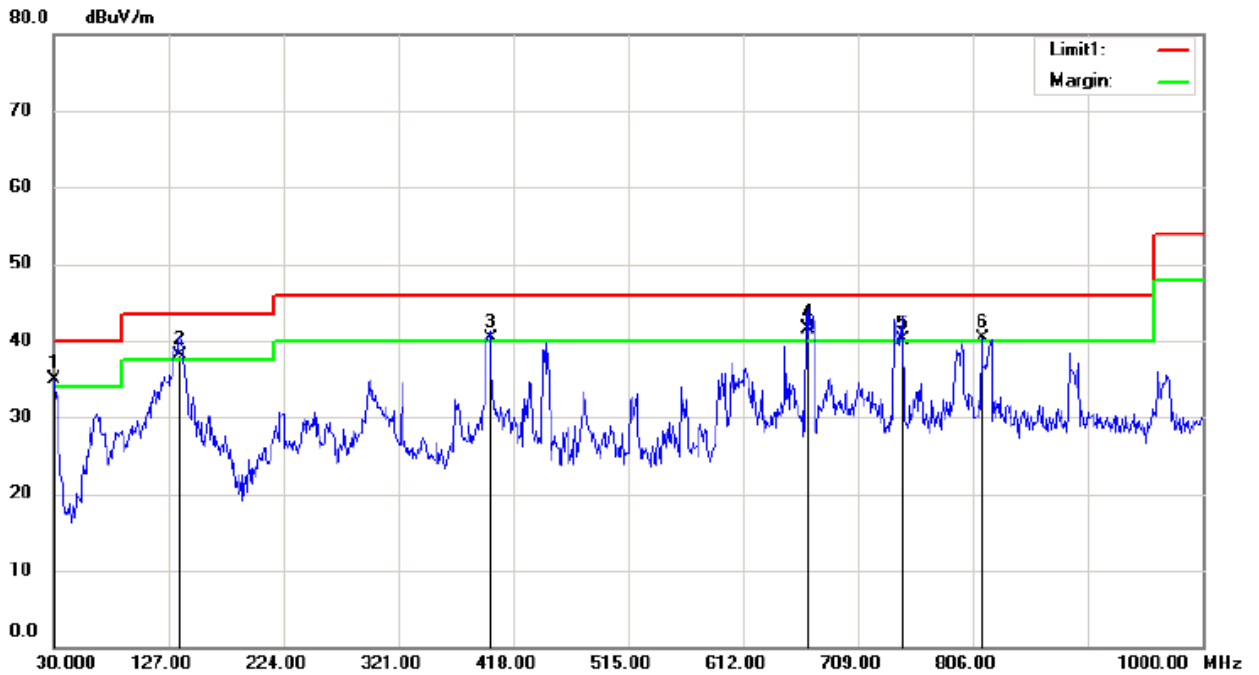


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 50 %
 Mode:HDMI 3 Input
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	30.0000	48.67	-13.82	34.85	40.00	-5.15			QP
2	!	136.7000	54.96	-16.76	38.20	43.50	-5.30			QP
3	!	398.6000	48.94	-8.64	40.30	46.00	-5.70			QP
4	*	666.3200	45.31	-3.81	41.50	46.00	-4.50			QP
5	!	746.8300	43.16	-2.96	40.20	46.00	-5.80			QP
6	!	813.7600	42.81	-2.57	40.24	46.00	-5.76			QP

*:Maximum data x:Over limit !:over margin

Operator: KK

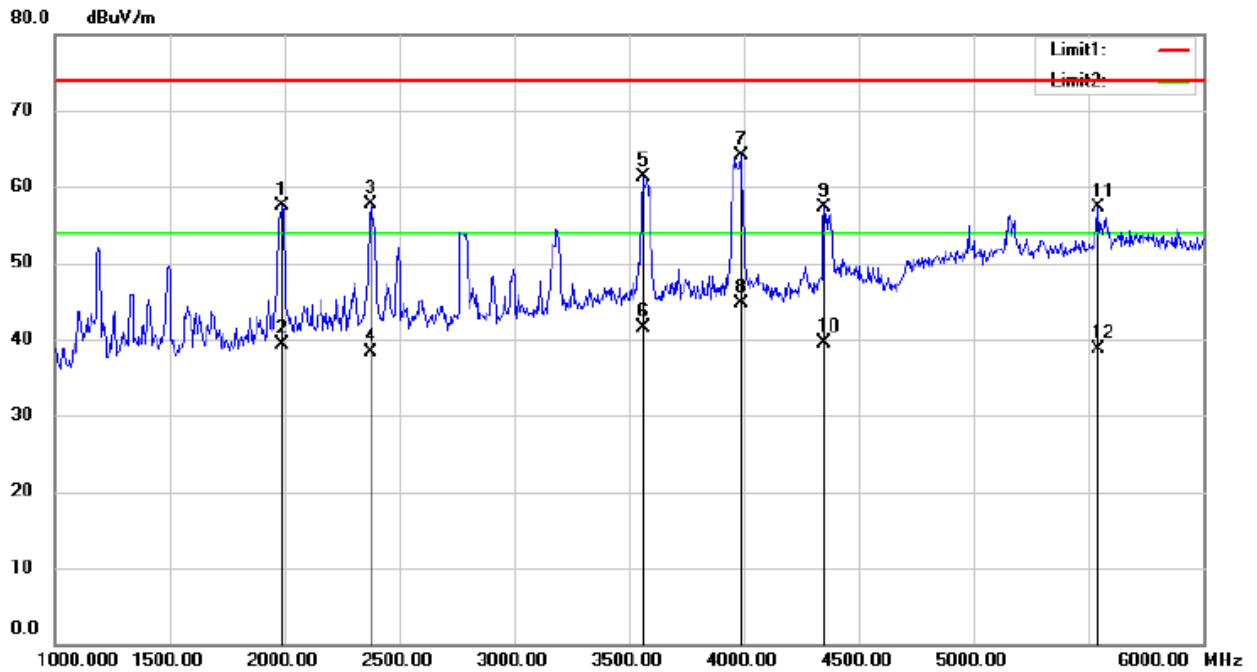


Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15 CLASS B PEAK Power: AC 120V/60Hz Humidity: 50 %
 Mode:HDMI 3 Input
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		1990.000	66.75	-9.23	57.52	74.00	-16.48			peak
2		1990.000	48.59	-9.23	39.36	54.00	-14.64			AVG
3		2375.000	65.61	-7.92	57.69	74.00	-16.31			peak
4		2375.000	46.19	-7.92	38.27	54.00	-15.73			AVG
5		3560.000	65.01	-3.78	61.23	74.00	-12.77			peak
6		3560.000	45.31	-3.78	41.53	54.00	-12.47			AVG
7		3990.000	66.27	-2.23	64.04	74.00	-9.96			peak
8	*	3990.000	46.87	-2.23	44.64	54.00	-9.36			AVG
9		4350.000	58.55	-1.25	57.30	74.00	-16.70			peak
10		4350.000	40.85	-1.25	39.60	54.00	-14.40			AVG
11		5540.000	55.72	1.57	57.29	74.00	-16.71			peak
12		5540.000	37.10	1.57	38.67	54.00	-15.33			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK

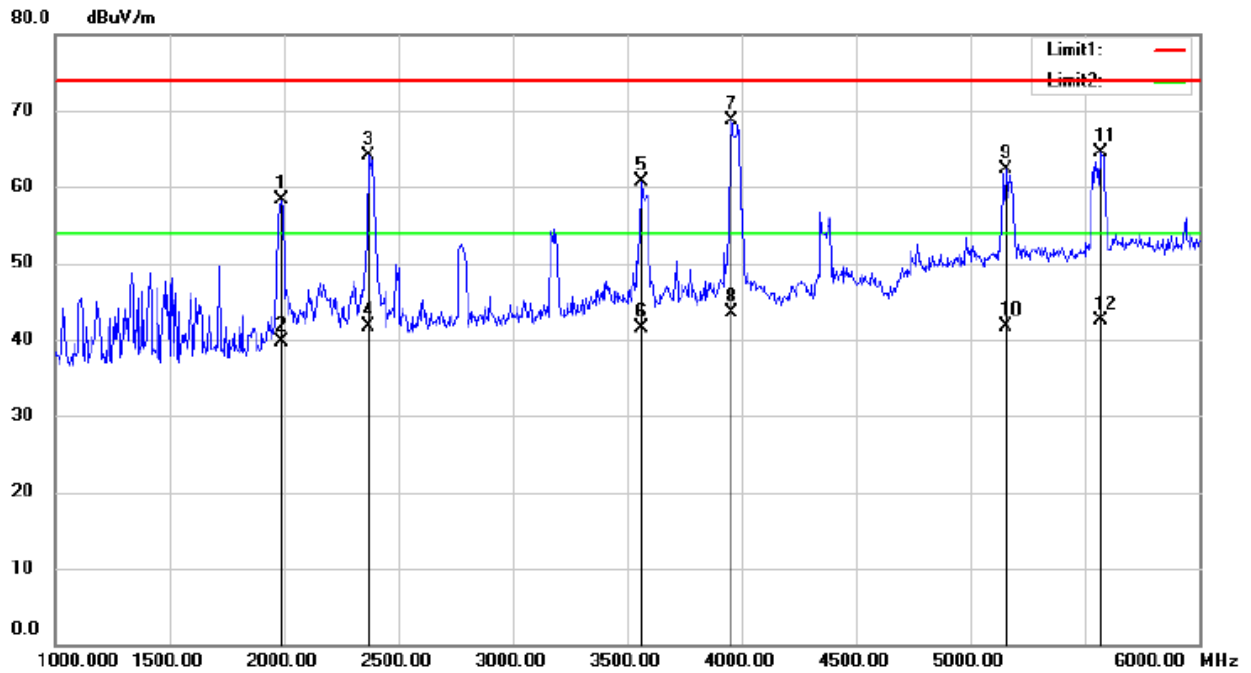

Site: 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15 CLASS B PEAK Power: AC 120V/60Hz Humidity: 50 %
 Mode:HDMI 3 Input
 Note:

No.	Mk.	Freq.	Reading	Correct	Measurement	Limit	Over	Antenna	Table	
		MHz	Level	Factor	dBuV/m	dBuV/m	dB	Height	Degree	Comment
			dBuV	dB				cm	degree	
1		1990.000	67.51	-9.23	58.28	74.00	-15.72			peak
2		1990.000	48.99	-9.23	39.76	54.00	-14.24			AVG
3		2370.000	71.97	-7.94	64.03	74.00	-9.97			peak
4		2370.000	49.61	-7.94	41.67	54.00	-12.33			AVG
5		3565.000	64.48	-3.76	60.72	74.00	-13.28			peak
6		3565.000	45.30	-3.76	41.54	54.00	-12.46			AVG
7	*	3955.000	70.99	-2.36	68.63	74.00	-5.37			peak
8		3955.000	45.96	-2.36	43.60	54.00	-10.40			AVG
9		5155.000	61.46	0.83	62.29	74.00	-11.71			peak
10		5155.000	40.79	0.83	41.62	54.00	-12.38			AVG
11		5570.000	62.80	1.62	64.42	74.00	-9.58			peak
12		5570.000	40.95	1.62	42.57	54.00	-11.43			AVG

*:Maximum data x:Over limit !:over margin

Operator: KK

6. RADIATED SPURIOUS EMISSION FOR WIFI MODULE

WiFi Module FCC ID: PPQ-WN4640R

6.1. Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 DTS 01 Meas. Guidance v03r05

6.2. Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	2400/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

6.3. Test Configuration

Test according to clause 7.2 radio frequency test setup 2

6.4. Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured
 RBW = 1 MHz for $f \geq 1$ GHz(1GHz to 25GHz), 100 kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for $f < 30$ MHz(150KHz to 30KHz)
 VBW \geq RBW
 Sweep = auto
 Detector function = peak
 Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.
 Repeat above procedures until all frequency measured was complete.

6.5. Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature: 24°C Test Date: Feb 12, 2017
 Humidity: 53 % Test By: King Kong
 Test mode: TX Mode

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance}/ \text{test distance})(\text{dB})$;

Limit line = Specific limits(dBuV) + distance extrapolation factor

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

All modes 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

Temperature :	26°C	Test Date :	Feb 12, 2017
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11b	Frequency:	Channel 1: 2412MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4824.05	V	54.99	50.07	74.00	54.00	-19.01	-3.93
7236.69	V	52.25	47.19	74.00	54.00	-21.75	-6.81
9649.81	V	48.18	37.18	74.00	54.00	-25.82	-16.82
4824.33	H	55.32	49.35	74.00	54.00	-18.68	-4.65
7236.56	H	50.72	45.33	74.00	54.00	-23.28	-8.67
9649.74	H	49.67	38.67	74.00	54.00	-24.33	-15.33

Temperature :	26°C	Test Date :	Feb 12, 2017
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11b	Frequency:	Channel 6: 2437MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4875.29	V	54.53	49.87	74.00	54.00	-19.47	-4.13
7311.47	V	53.05	46.7	74.00	54.00	-20.95	-7.30
9748.63	V	47.65	38.07	74.00	54.00	-26.35	-15.93
4874.8	H	55.72	49.89	74.00	54.00	-18.28	-4.11
7312.23	H	51.34	45.21	74.00	54.00	-22.66	-8.79
9748.04	H	49.36	39.13	74.00	54.00	-24.64	-14.87

Temperature :	26°C	Test Date :	Feb 12, 2017
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11b	Frequency:	Channel 11: 2462MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
4924.66	V	55.11	50	74.00	54.00	-18.89	-4.00
7386.69	V	53.36	46.99	74.00	54.00	-20.64	-7.01
9849.73	V	48.09	38.27	74.00	54.00	-25.91	-15.73
4924.23	H	55.4	48.97	74.00	54.00	-18.60	-5.03
7387.71	H	50.94	44.57	74.00	54.00	-23.06	-9.43
9848.83	H	49.25	39.22	74.00	54.00	-24.75	-14.78

- Note:**
- (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 - (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz
 All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11n(ht20) recorded was report as below:

Temperature :	26℃	Test Date :	Feb 12, 2017
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11n(ht20)	Frequency:	Channel 1: 2412MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2387.04	H	61.41	74.00	-12.59	41.64	54.00	-12.36
2380.64	V	62.55	74.00	-11.45	42.58	54.00	-11.42

Temperature :	26℃	Test Date :	Feb 12, 2017
Humidity :	60 %	Test By:	King Kong
Test mode:	802.11n(ht20)	Frequency:	Channel 11: 2462MHz


Frequency (MHz)	Polarity	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Over(dB)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Over(dB)
2484.26	H	62.26	74.00	-11.74	42.65	54.00	-11.35
2484.64	V	61.65	74.00	-12.35	41.52	54.00	-12.48

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) Data of measurement within this frequency range shown "--" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz VBW=3MHz	<input type="checkbox"/> Channel 3: 2422MHz		Polarity: H
Test By: King Kong				

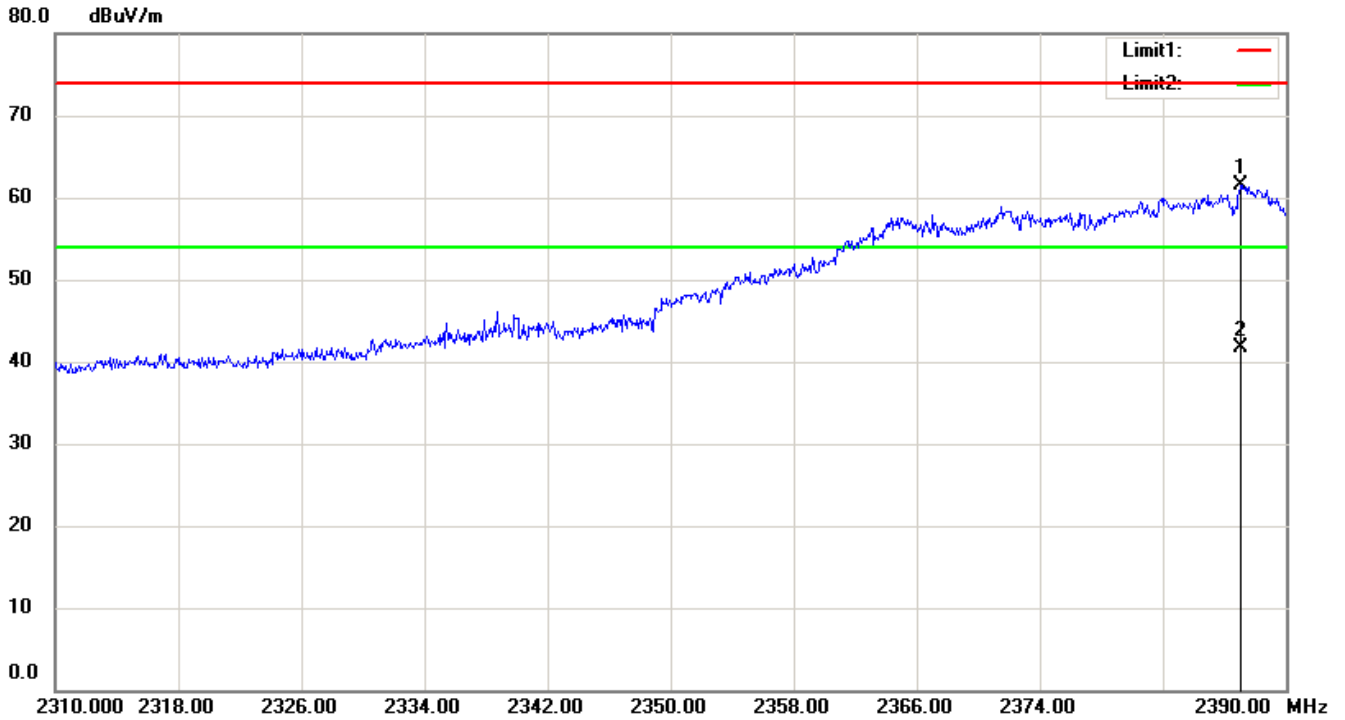


Spurious Emission in Restricted Band 2310-2390MHz				
Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 1: 2412MHz VBW=3MHz	<input type="checkbox"/> Channel 3: 2422MHz		Polarity: V
Test By: King Kong				

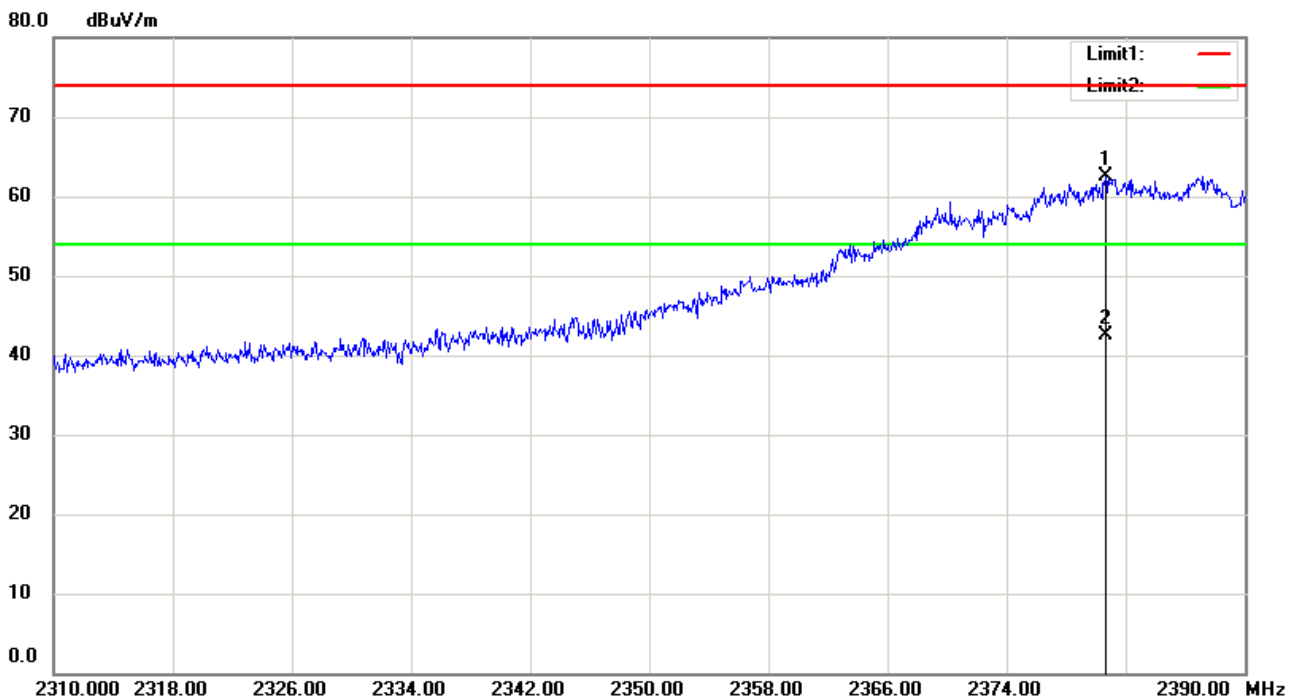


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz VBW=3MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: H	
Test By: King Kong				

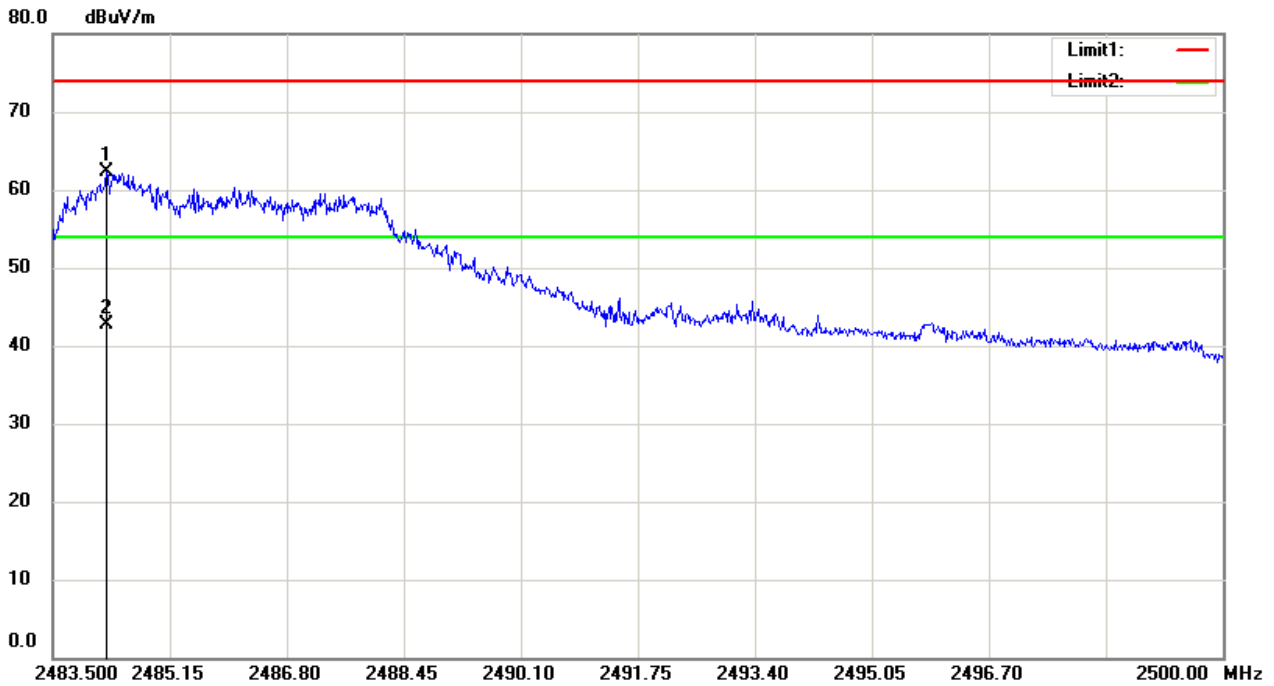


Spurious Emission in Restricted Band 2483.5-2500MHz

Test Model	<input type="checkbox"/> 802.11b	<input type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(HT20)	<input type="checkbox"/> 802.11n(HT40)
	<input checked="" type="checkbox"/> Channel 11: 2462MHz VBW=3MHz	<input type="checkbox"/> Channel 9: 2452MHz	Polarity: V	
Test By: King Kong				

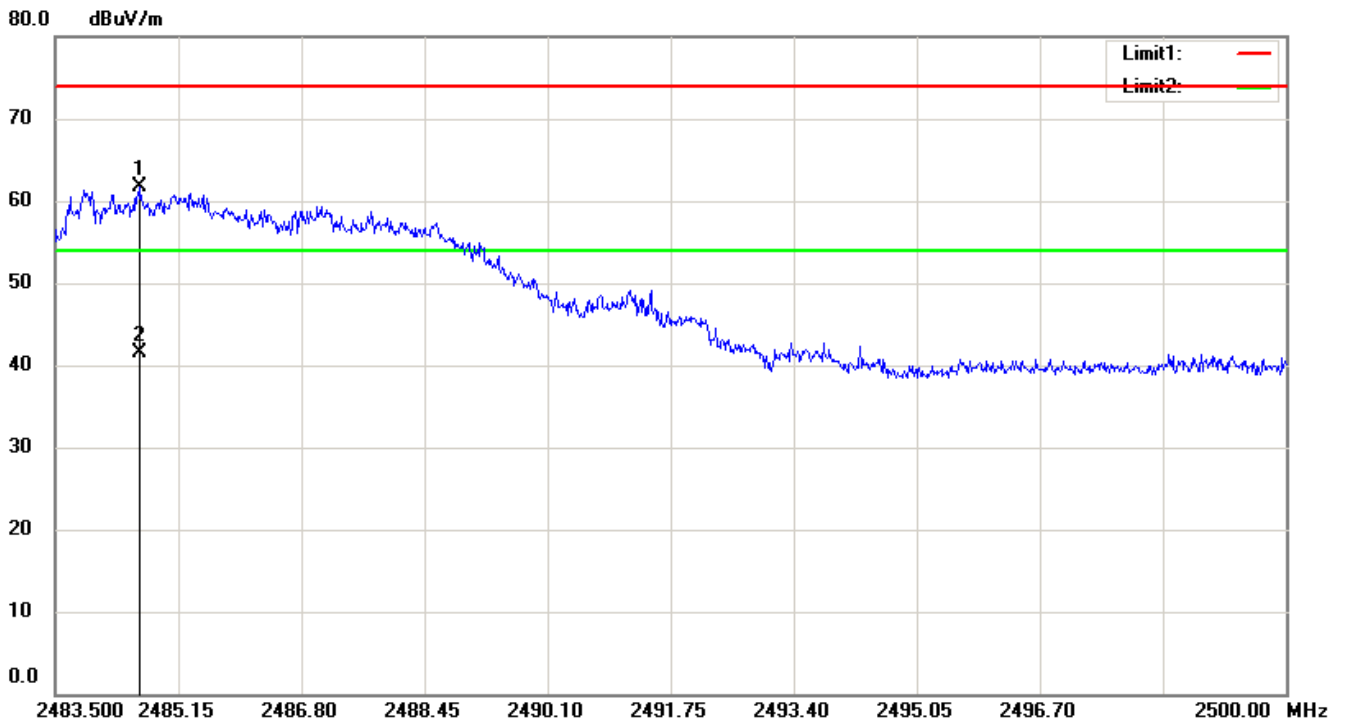

■ Spurious Emission below 1GHz (30MHz to 1GHz)

All modes 2.4G 802.11b/g/n have been tested, and the worst result 802.11b recorded was report as below:

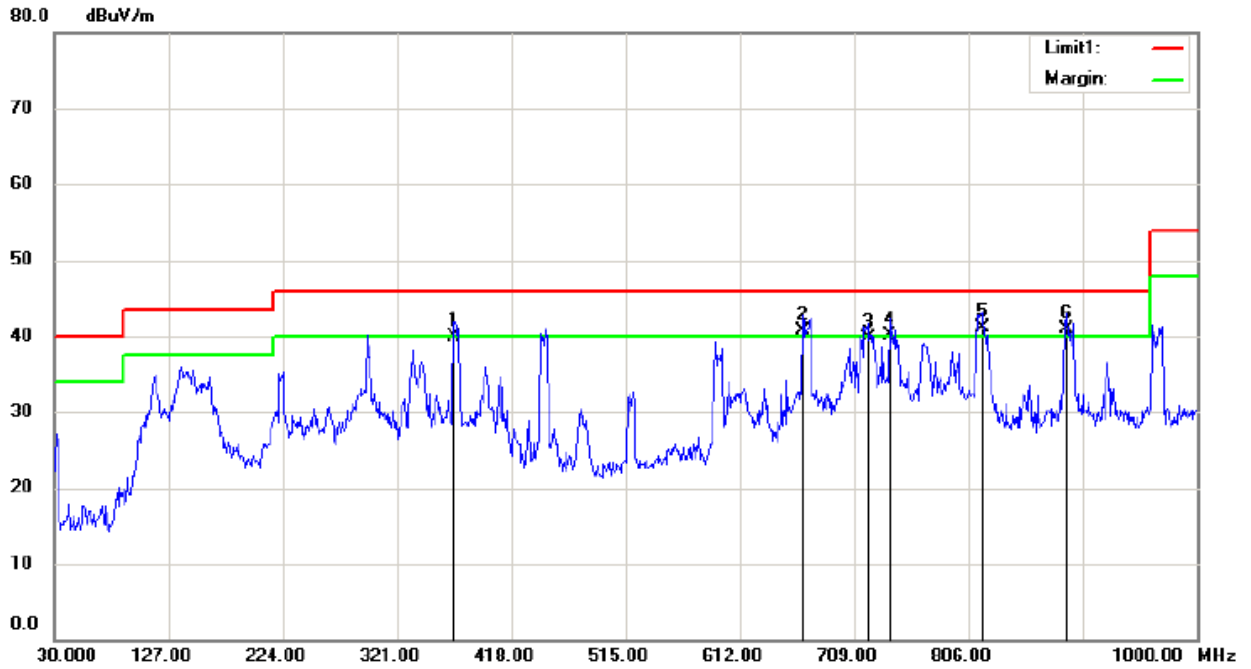

Site 3m Chamber #1

Polarization: **Vertical**

Temperature: 22 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 50 %


Mode:Low Channel

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1		369.5000	48.77	-8.87	39.90	46.00	-6.10			QP	
2	!	665.3500	44.48	-3.78	40.70	46.00	-5.30			QP	
3		720.6400	43.88	-4.18	39.70	46.00	-6.30			QP	
4	!	739.0700	43.33	-3.13	40.20	46.00	-5.80			QP	
5	*	817.6400	43.49	-2.39	41.10	46.00	-4.90			QP	
6	!	889.4200	42.07	-1.17	40.90	46.00	-5.10			QP	

*:Maximum data x:Over limit !:over margin

Operator: KK

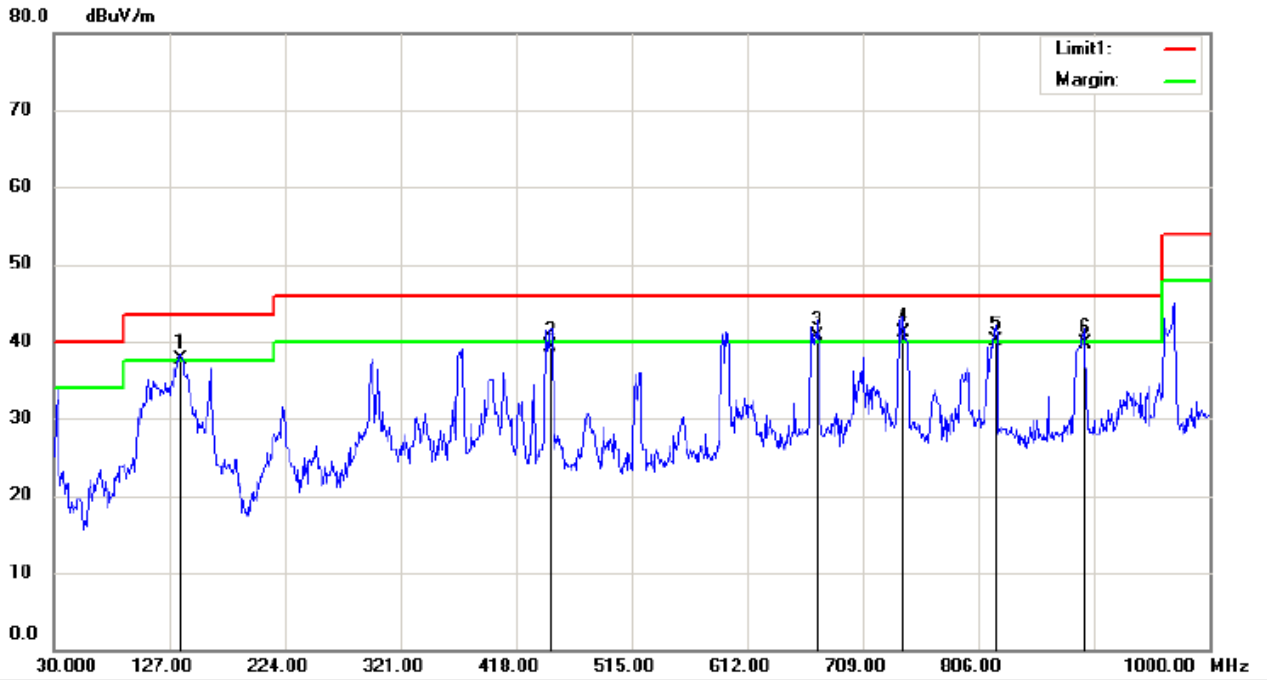

Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C

Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 50 %


Mode: Low Channel

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	136.7000	54.56	-16.76	37.80	43.50	-5.70	QP		
2		447.1000	47.23	-7.83	39.40	46.00	-6.60	QP		
3	!	671.1700	44.80	-4.00	40.80	46.00	-5.20	QP		
4	*	742.9500	44.22	-3.02	41.20	46.00	-4.80	QP		
5	!	820.5500	42.41	-2.31	40.10	46.00	-5.90	QP		
6		895.2400	40.69	-0.99	39.70	46.00	-6.30	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

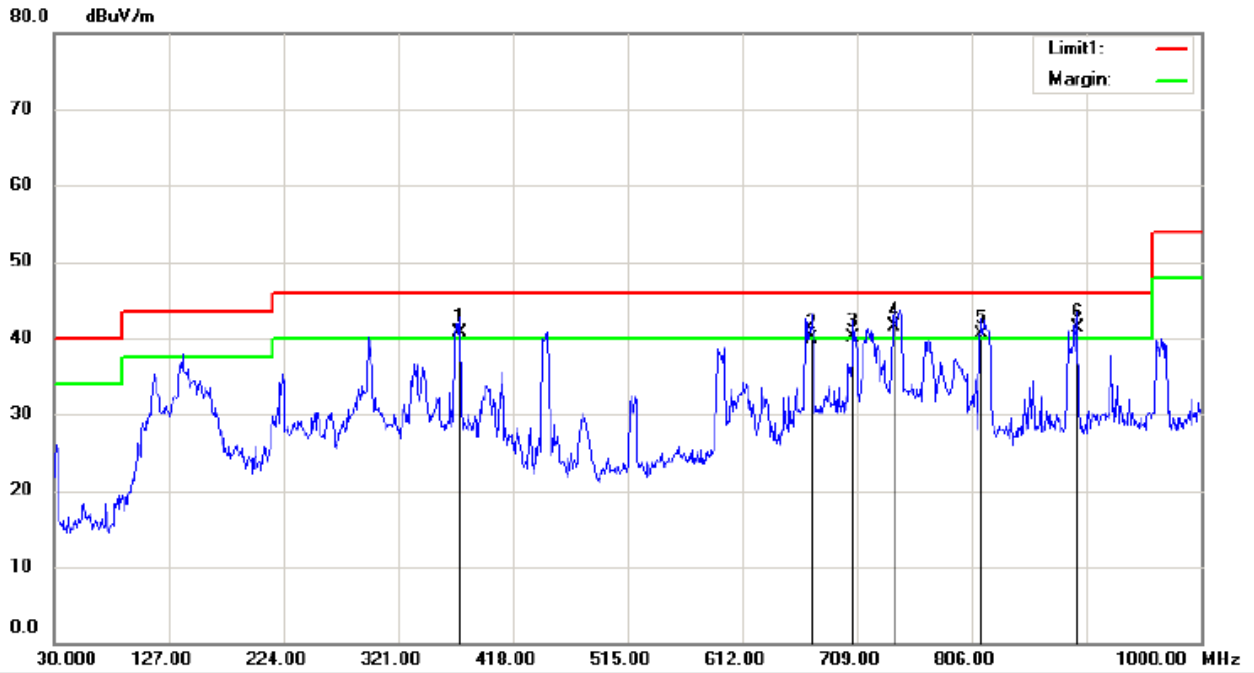


Site: 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 50 %
 Mode: Mid Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	373.3800	49.56	-8.86	40.70	46.00	-5.30			QP
2		671.1700	44.00	-4.00	40.00	46.00	-6.00			QP
3	!	706.0900	44.15	-3.95	40.20	46.00	-5.80			QP
4	*	740.0400	44.66	-3.06	41.60	46.00	-4.40			QP
5	!	813.7600	43.07	-2.57	40.50	46.00	-5.50			QP
6	!	895.2400	42.39	-0.99	41.40	46.00	-4.60			QP

*:Maximum data x:Over limit !:over margin

Operator: KK

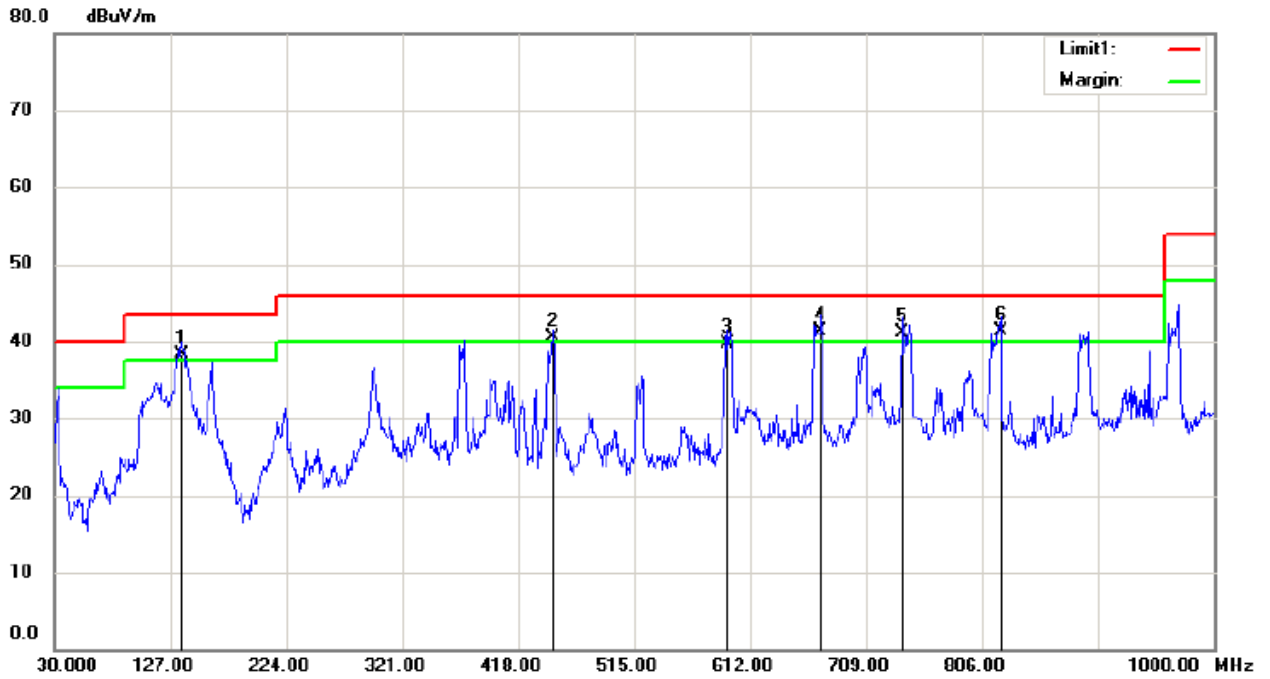


Site: 3m Chamber #1 Polarization: *Horizontal* Temperature: 22 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 50 %
 Mode: Mid Channel
 Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	!	136.7000	55.16	-16.76	38.40	43.50	-5.10			QP	
2	!	447.1000	48.33	-7.83	40.50	46.00	-5.50			QP	
3		593.5700	44.91	-5.11	39.80	46.00	-6.20			QP	
4	!	671.1700	45.30	-4.00	41.30	46.00	-4.70			QP	
5	!	739.0700	44.23	-3.13	41.10	46.00	-4.90			QP	
6	*	821.5200	43.75	-2.35	41.40	46.00	-4.60			QP	

*:Maximum data x:Over limit !:over margin

Operator: KK

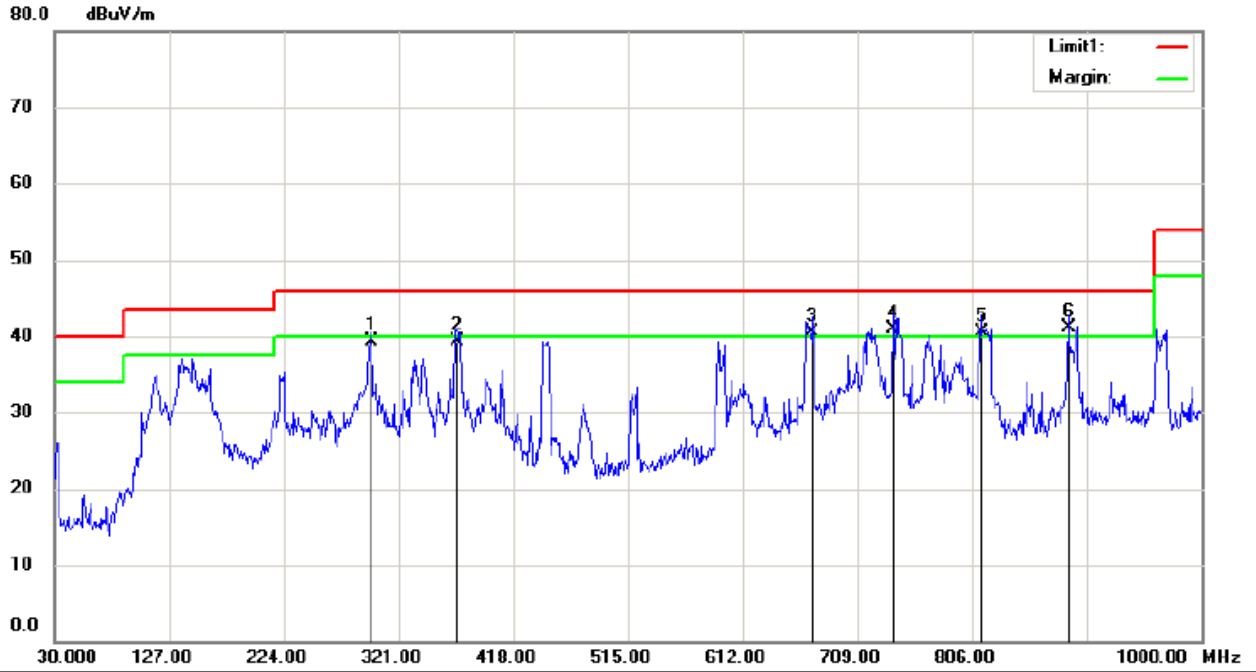

Site 3m Chamber #1 Polarization: **Vertical** Temperature: 22 C

Limit: (RE)FCC PART 15 CLASS B
Mode:High Channel

Power: AC 120V/60Hz


Humidity: 50 %

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		298.6900	49.43	-10.03	39.40	46.00	-6.60	QP		
2		370.4700	48.15	-8.85	39.30	46.00	-6.70	QP		
3	!	671.1700	44.50	-4.00	40.50	46.00	-5.50	QP		
4	!	739.0700	44.03	-3.13	40.90	46.00	-5.10	QP		
5	!	813.7600	43.17	-2.57	40.60	46.00	-5.40	QP		
6	*	887.4800	42.32	-1.12	41.20	46.00	-4.80	QP		

*:Maximum data x:Over limit !:over margin

Operator: KK

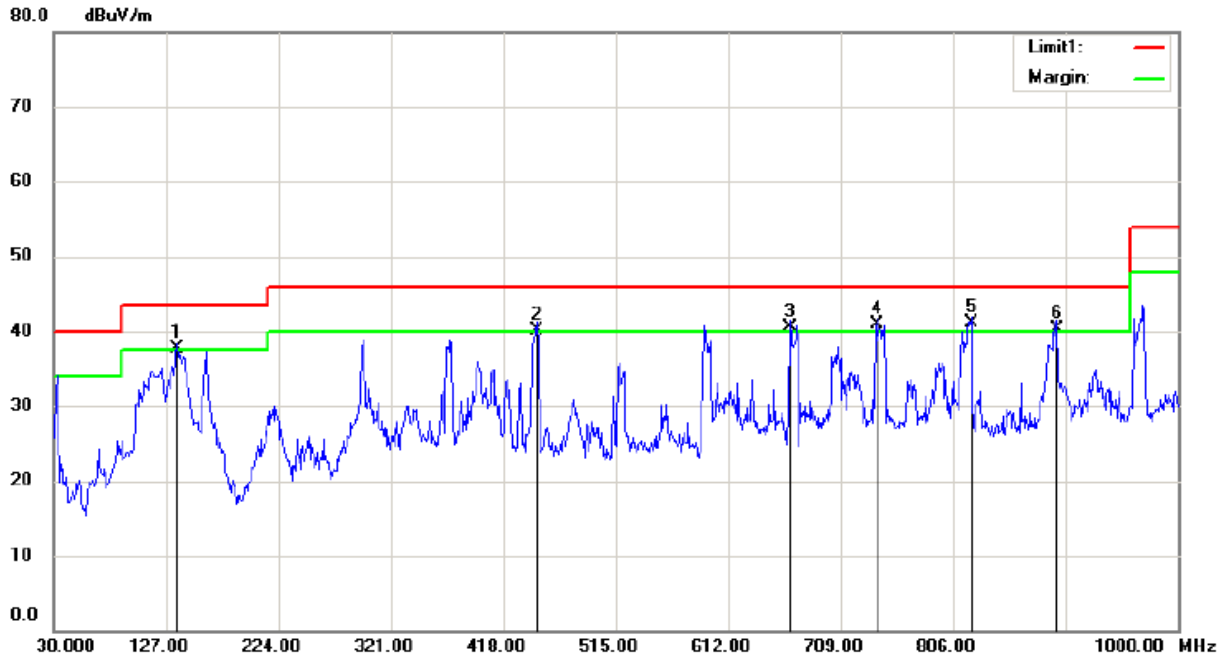

Site 3m Chamber #1 Polarization: **Horizontal** Temperature: 22 C
 Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 50 %
 Mode: High Channel
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	136.7000	54.56	-16.76	37.80	43.50	-5.70			QP
2	!	447.1000	47.93	-7.83	40.10	46.00	-5.90			QP
3	!	665.3500	44.28	-3.78	40.50	46.00	-5.50			QP
4	!	740.0400	43.96	-3.06	40.90	46.00	-5.10			QP
5	*	821.5200	43.55	-2.35	41.20	46.00	-4.80			QP
6	!	896.2100	41.26	-0.96	40.30	46.00	-5.70			QP

*:Maximum data x:Over limit !:over margin

Operator: KK

-----The end-----