

Application for FCC Certificate
On Behalf of
Hisense Electric Co., Ltd.

LED LCD TV

Model No.	Serial No.	Brand
LTDN50K360GUS	E12081047-01/01	Hisense
50K360G	--	

FCC ID : W9HLCDF0007

Prepared For : Hisense Electric Co., Ltd.
No.218 Qianwangang Road, Economy & Technology
Development Zone, Qingdao, China

Prepared By : Audix Technology (Shanghai) Co., Ltd.
3F and 4F, 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

Tel: +86-21-64955500

Fax: +86-21-64955491

Report No. : ACI-F12151
Date of Test : Aug 29 – Sep 21, 2012
Date of Report : Sep 23, 2012

TABLE OF CONTENTS

	Page
1 SUMMARY OF STANDARDS AND RESULTS	4
1.1 Description of Standards and Results.....	4
2 GENERAL INFORMATION	5
2.1 Description of Equipment Under Test.....	5
2.2 Peripherals.....	6
2.3 Description of Test Facility.....	8
2.4 Measurement Uncertainty.....	8
3 CONDUCTED EMISSION TEST	9
3.1 Test Equipment.....	9
3.2 Block Diagram of Test Setup.....	9
3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)].....	10
3.4 Test Configuration.....	10
3.5 Operating Condition of EUT.....	11
3.6 Test Procedures.....	11
3.7 Test Results.....	12
4 RADIATED EMISSION TEST	18
4.1 Test Equipment.....	18
4.2 Block Diagram of Test Setup.....	18
4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)].....	19
4.4 Test Configuration.....	19
4.5 Operating Condition of EUT.....	19
4.6 Test Procedures.....	20
4.7 Test Results.....	20
5 DEBUG DESCRIPTION	26
6 DEVIATION TO TEST SPECIFICATIONS	27

TEST REPORT FOR FCC CERTIFICATE

Applicant : Hisense Electric Co., Ltd.
 Manufacturer : Hisense Electric Co., Ltd.
 EUT Description : LED LCD TV

Model No.	Serial No.	Brand	Power Supply
LTDN50K360GUS	E12081047-01/01	Hisense	120V/60Hz
50K360G	--		

Test Procedure Used:

*FCC RULES AND REGULATIONS PART 15 SUBPART B CLASS B OCTOBER 2011
AND ANSI C63.4-2003*

The device described above is tested by Audix Technology (Shanghai) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B (Class B) limits both radiated and conducted emissions.

The test results are contained in this test report and Audix Technology (Shanghai) Co., Ltd. is assumed full responsibility for the accuracy and completeness of these measurements. This report shows that the EUT (M/N: Refer to Sec2.1; S/N: Refer to Sec2.1) which was tested in 3m anechoic chamber Aug 29 – Sep 21, 2012 is technically compliance with the FCC official limits also.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shanghai) Co., Ltd.

This report contains data that are not covered by the NVLAP accreditation.


This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

The test results for EUT's TV functions are contained in No.F12150, a Verification report.

Date of Test : Aug 29 – Sep 21, 2012 Date of Report : Sep 23, 2012

Producer : 
YENNY YU / Assistant

Review : 
DIO YANG / Assistant Manager

 For and on behalf of
Audix Technology (Shanghai) Co., Ltd.

Signatory : 
Authorized Signature EMC SAMMY CHEN / Deputy Manager

1 SUMMARY OF STANDARDS AND RESULTS

1.1 Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below:

Description of Test Item	Standard	Limits	Results
EMISSION			
Conducted Disturbance at the Mains Terminal	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2011 AND ANSI C63.4-2003	15.107(a) Class B	Pass
Radiated Disturbance	FCC RULES AND REGULATIONS PART 15 SUBPART B OCTOBER 2011 AND ANSI C63.4-2003	15.109(a) Class B	Pass

2 GENERAL INFORMATION

2.1 Description of Equipment Under Test

Description : LED LCD TV

Type of EUT : Production Pre-product Pro-type

Model No.	Serial No.	Brand
LTDN50K360GUS	E12081047-01/01	Hisense
50K360G	--	

Note : The above models are all the same except for the different model name.
The LTDN50K360GUS was tested and recorded in the report.

Applicant : Hisense Electric Co., Ltd.
No.218 Qianwangang Road, Economy & Technology Development Zone, Qingdao, China

Manufacturer : Hisense Electric Co., Ltd.
No.218 Qianwangang Road, Economy & Technology Development Zone, Qingdao, China

LCD Panel : Manufacturer : Hisense
M/N : HE500HF-B52\PW1

Max Resolution : 1024*768@60Hz

D-Sub Cable : Shielded, Detachable, 1.85m,
with two cores on cable

HDMI Cable : Shielded, Detachable, 1.00m,

Power Cord : Unshielded, Undetachable, 1.80m

Remark:

The EUT is a LED LCD TV which input/output ports as follows:

Bottom Port:

- (1) One Audio Out Port : Connected with Earphone
- (2) One USB Port : Connected with U-Disk
- (3) One HDMI1 ARC Port : Connected with DVD PLAYER #1
- (4) One HDMI2 Port : Connected with DVD PLAYER #2
- (5) One component of YPbPr Port : Connected with DVD PLAYER #1
- (6) One component of YPbPr Audio Port : Connected with DVD PLAYER #1

Bottom Port:

- (7) One ANT/CABLE Port : Connected with ATSC SG / TV SG
- (8) One VGA Port : Connected with PC
- (9) One PC/DVI Audio In Port : Connected with PC
- (10) One DIGITAL OUTPUT Port : Connected with DVD PLAYER #1
- (11) One HDMI3/DVI Port : Connected with PC
- (12) One component of AV IN Port : Connected with DVD PLAYER #2

2.2 Peripherals

2.2.1 PC

Manufacturer : HP
 Model Number : dx7200MT
 Serial Number : CNG622017W
 Power Cord : Unshielded, Detachable, 1.8m
 Certificate : FCC DoC; CE/EMC; VCCI; C-Tick; UL
 BSMI (R33001) 3C (A000111)
 MIC (E-A011-04-2659(B))

2.2.2 Printer

Manufacturer : HP
 Model Number : C3990A
 Serial Number : JPZX020487
 Data Cable : Shielded, detachable, 1.5m
 Certificate : GS, CE/EMC, C-Tick, FCC DoC

2.2.3 Keyboard

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 7668200662248
Data Cable : Shielded, undetachable ,1.8m
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,
BSMI

2.2.4 Mouse

Manufacturer : Microsoft
Model Number : RT2300
Serial Number : 6965712071551
Data Cable : Shielded, undetachable, 1.8m.
Certificate : CE/EMC, FCC DoC, VCCI, MIC, C-Tick,
BSMI

2.2.5 Modem

Manufacturer : TP-LINK
Model Number : TM-EC5658V
Serial Number : 07123301053
Data Cable : Shielded, Detachable, 1.8m
Certificate : FCC DoC, CE/EMC, CCC

2.2.6 Earphone

Manufacturer : SONY
Model Number : MDR-E808
Serial Number : 1808030805305506

2.2.7 TV Signal Generator

Manufacturer : FLUKE
Model Number : 54200m01
Serial Number : 814008
Data Cable : Shielded, detachable, 2.0m
Power Cord : Unshielded, detachable, 2.0m
Certificate : CE/EMC, FCC DoC, CCC

2.2.8 ATSC Signal Generator

Manufacturer : SENCORE
Model Number : ATSC997
Serial Number : 6790071

2.2.9 DVD PLAYER #1

Manufacturer : PHILIPS
Model Number : DVP3986K/93
Serial Number : KX1A0902120108
Certificate : FCC DoC, CE/EMC, CCC

2.2.10 DVD PLAYER #2

Manufacturer : LG
Model Number : DF9921N
Serial Number : 3850R-M846W
Certificate : FCC DoC, CE/EMC, CCC

2.2.11 U-DISK

Manufacturer : LG
Model Number : 1GB

2.3 Description of Test Facility

Site Description (No.3 3m Chamber) : Sept. 17, 1998 file on
Apr 29, 2009 Renewed
Federal Communications Commission
FCC Engineering Laboratory
7435 Oakland Mills Road
Columbia, MD 21046, USA

Name of Firm : Audix Technology (Shanghai) Co., Ltd.

Site Location : 3F 34Bldg 680 Guiping Rd,
Caohejing Hi-Tech Park,
Shanghai 200233, China

NVLAP Lab Code : 200371-0

2.4 Measurement Uncertainty

Conducted Emission Expanded Uncertainty: U = 3.42dB

Radiated Emission Expanded Uncertainty (30-200MHz):
U = 4.14 dB (horizontal)
U = 4.28 dB (vertical)

Radiated Emission Expanded Uncertainty (200M-1GHz):
U = 4.18 dB (horizontal)
U = 4.26 dB (vertical)

3 CONDUCTED EMISSION TEST


3.1 Test Equipment

The following test equipments are used during the conducted emission test in a shielded room:

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESCI	100841	Mar 22, 2012	Mar 22, 2013
2.	Artificial Mains Network (AMN #1)	R&S	ESH2-Z5	843890/011	Feb 13, 2012	Feb 13, 2013
3.	Artificial Mains Network (AMN #2)	R&S	ENV4200	100125	Mar 22, 2012	Mar 22, 2013
4.	50 Ω Coaxial Switch	Anritsu	MP59B	6200426389	Sep 18, 2012	Mar 18, 2013
5.	50 Ω Terminator	Anritsu	BNC	001	Mar 22, 2012	Mar 22, 2013
6.	Software	Audix	E3	SET00200 9804M592	--	--


3.2 Block Diagram of Test Setup

3.2.1 EUT & Peripherals

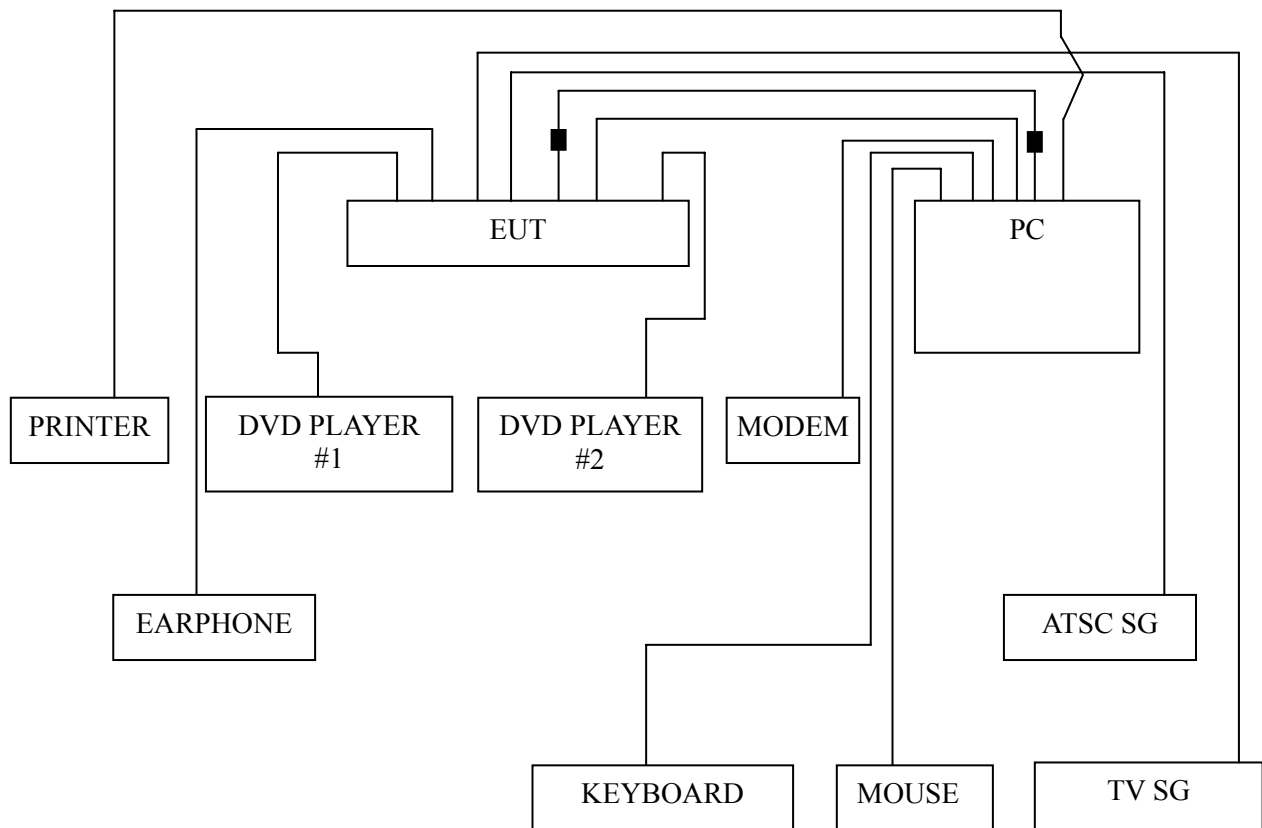

■ : Ferrite core

3.2.2 Conducted Disturbance Test Setup

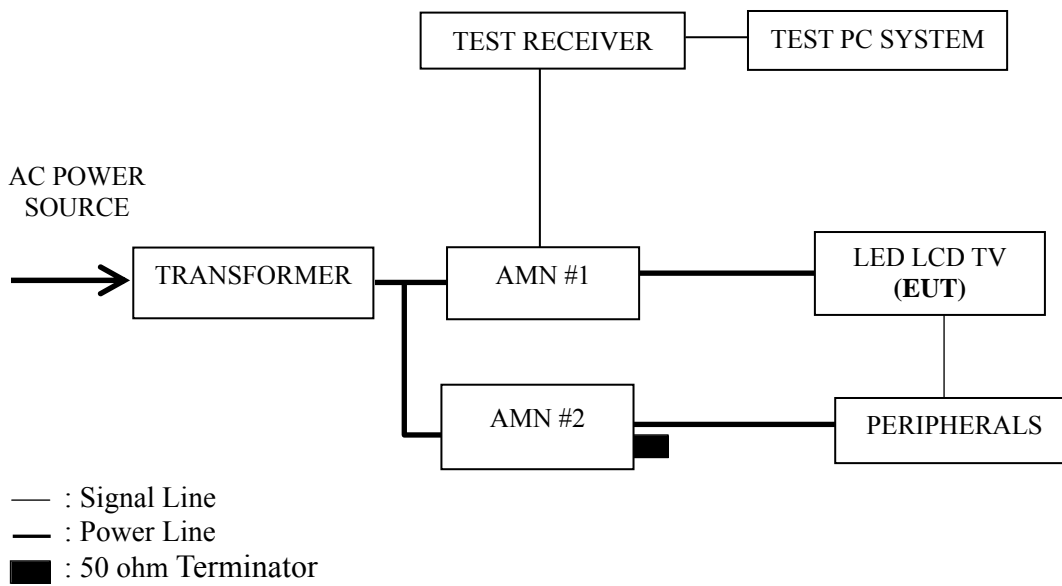

3.3 Conducted Emission Limit [FCC Part 15 Subpart B 15.107(a)]

Frequency Range (MHz)	Limits dB (μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66~56	56~46
0.5 ~ 5	56	46
5 ~ 30	60	50

NOTE 1 – The lower limit shall apply at the transition frequencies.
 NOTE 2 – The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz~0.50 MHz

3.4 Test Configuration

The EUT (listed in Sec.2.1) and the peripherals (listed in Sec 2.2) were installed as shown on Sec.3.2 to meet FCC requirement and operating in a manner that tends to maximize its emission level in a normal application.

3.5 Operating Condition of EUT

3.5.1 Setup the EUT and peripherals as shown in Sec. 3.2.

3.5.2 Turn on the power of all equipments and the EUT.

3.5.3 Set the contrast & brightness of EUT to maximum.

3.5.4 PC system ran the self-test program “EMC Test” by windows XP and sent “H” characters to EUT through graphic card, the EUT’s screen displayed and filled with “H” pattern by its resolution (Via D-Sub & HDMI Input).

3.5.5 In USB Play mode, set the EUT play digital media from U-Disk.

3.5.6 Repeat above procedure 3.5.5 for difference test mode.

3.5.7 The other peripherals devices were driven and operated during the test.

3.5.8 The test modes are as follows:

Test Mode
D-Sub 1024*768@60Hz
HDMI 1024*768@60Hz
D-Sub 800*600@60Hz
D-Sub 640*480@60Hz
USB Play

3.6 Test Procedures

The EUT and peripherals were connected to the power mains through an Artificial Mains Network (AMN). This provided a 50 ohm coupling impedance for the measuring equipment.

Both sides of AC line (Line & Neutral) were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed or manipulated according to ANSI C63.4:2003 during conducted emission test.

The bandwidth of R&S Test Receiver ESCI was set at 9 kHz.

The frequency range from 150 kHz to 30 MHz was checked.

The test modes were done on conducted disturbance test and all the test results are listed in Sec. 3.7.

3.7 Test Results

< **PASS** >

The frequency and amplitude of the highest conducted emission relative to the limit is reported. All emissions not reported below are too low against the prescribed limits.

Test Mode	Data Page
D-Sub 1024*768@60Hz	P13
HDMI 1024*768@60Hz	P14
D-Sub 800*600@60Hz	P15
D-Sub 640*480@60Hz	P16
USB Play	P17

NOTE 1 – Factor = Cable Loss + AMN Factor.

NOTE 2 – Emission Level = Meter Reading + Factor.

NOTE 3 – “QP” means “Quasi-Peak” values, “AV” means “Average” values.

NOTE 4 – The worst case is for USB Play test mode. The worst emission is detected at 0.159 MHz (Average Value) with corrected signal level of 42.74 dB (μ V) (limit is 55.52 dB (μ V)), when the Line of the EUT is connected to AMN.

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 48%RH

Serial No. : E12081047-01/01 Date of Test : Aug 29, 2012

Test Mode : D-Sub 1024*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μ V)	Factor (dB)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)	Remark	
Line	0.159	49.92	0.24	50.16	65.52	15.36	QP	
	0.621	41.18	0.22	41.40	56.00	14.60		
	1.310	38.41	0.34	38.75	56.00	17.25		
	2.839	38.30	0.41	38.71	56.00	17.29		
	5.419	44.09	0.52	44.61	60.00	15.39		
	17.018	38.70	0.87	39.57	60.00	20.43		
	0.159	40.30	0.24	40.54	55.52	14.98	AV	
	0.621	32.70	0.22	32.92	46.00	13.08		
	1.310	29.60	0.34	29.94	46.00	16.06		
	2.839	29.20	0.41	29.61	46.00	16.39		
	5.419	35.60	0.52	36.12	50.00	13.88		
	17.018	29.50	0.87	30.37	50.00	19.63		
	Neutral	0.161	48.31	0.13	48.44	65.43	16.99	QP
		0.627	39.17	0.19	39.36	56.00	16.64	
1.310		36.50	0.22	36.72	56.00	19.28		
2.839		36.52	0.22	36.74	56.00	19.26		
5.594		42.84	0.46	43.30	60.00	16.70		
17.383		39.49	0.79	40.28	60.00	19.72		
0.161		39.80	0.13	39.93	55.43	15.50	AV	
0.627		30.70	0.19	30.89	46.00	15.11		
1.310		27.39	0.22	27.61	46.00	18.39		
2.839		27.60	0.22	27.82	46.00	18.18		
5.594		33.30	0.46	33.76	50.00	16.24		
17.383		30.19	0.79	30.98	50.00	19.02		

TEST ENGINEER: L V Y L V

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 48%RH

Serial No. : E12081047-01/01 Date of Test : Aug 29, 2012

Test Mode : HDMI 1024*768@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μ V)	Factor (dB)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)	Remark	
Line	0.159	50.21	0.24	50.45	65.52	15.07	QP	
	0.611	39.89	0.23	40.12	56.00	15.88		
	1.324	39.15	0.34	39.49	56.00	16.51		
	4.721	37.11	0.50	37.61	56.00	18.39		
	5.419	42.89	0.52	43.41	60.00	16.59		
	17.755	36.37	0.89	37.26	60.00	22.74		
	0.159	41.20	0.24	41.44	55.52	14.08		AV
	0.611	30.30	0.23	30.53	46.00	15.47		
	1.324	30.80	0.34	31.14	46.00	14.86		
	4.721	28.80	0.50	29.30	46.00	16.70		
	5.419	33.20	0.52	33.72	50.00	16.28		
	17.755	27.71	0.89	28.60	50.00	21.40		
	Neutral	0.159	48.41	0.13	48.54	65.52	16.98	
		0.611	39.70	0.18	39.88	56.00	16.12	
1.282		37.70	0.22	37.92	56.00	18.08		
4.454		35.99	0.41	36.40	56.00	19.60		
5.419		42.46	0.44	42.90	60.00	17.10		
16.226		36.95	0.74	37.69	60.00	22.31		
0.159		40.20	0.13	40.33	55.52	15.19	AV	
0.611		30.61	0.18	30.79	46.00	15.21		
1.282		28.50	0.22	28.72	46.00	17.28		
4.454		26.50	0.41	26.91	46.00	19.09		
5.419		33.20	0.44	33.64	50.00	16.36		
16.226		27.20	0.74	27.94	50.00	22.06		

TEST ENGINEER: LUY LV

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 48%RH

Serial No. : E12081047-01/01 Date of Test : Aug 29, 2012

Test Mode : D-Sub 800*600@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μ V)	Factor (dB)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)	Remark	
Line	0.159	50.27	0.24	50.51	65.52	15.01	QP	
	0.621	41.43	0.22	41.65	56.00	14.35		
	1.282	37.32	0.34	37.66	56.00	18.34		
	4.574	36.63	0.50	37.13	56.00	18.87		
	5.476	42.69	0.52	43.21	60.00	16.79		
	18.039	36.30	0.90	37.20	60.00	22.80		
	0.159	40.70	0.24	40.94	55.52	14.58	AV	
	0.621	32.30	0.22	32.52	46.00	13.48		
	1.282	28.90	0.34	29.24	46.00	16.76		
	4.574	27.70	0.50	28.20	46.00	17.80		
	5.476	33.21	0.52	33.73	50.00	16.27		
	18.039	27.60	0.90	28.50	50.00	21.50		
	Neutral	0.159	48.73	0.13	48.86	65.52	16.66	QP
		0.621	40.26	0.19	40.45	56.00	15.55	
1.282		36.79	0.22	37.01	56.00	18.99		
4.622		36.58	0.42	37.00	56.00	19.00		
5.419		41.50	0.44	41.94	60.00	18.06		
15.552		37.10	0.73	37.83	60.00	22.17		
0.159		39.70	0.13	39.83	55.52	15.69	AV	
0.621		31.50	0.19	31.69	46.00	14.31		
1.282		27.60	0.22	27.82	46.00	18.18		
4.622		27.79	0.42	28.21	46.00	17.79		
5.419		32.20	0.44	32.64	50.00	17.36		
15.552		28.60	0.73	29.33	50.00	20.67		

TEST ENGINEER: LUY LV

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 48%RH

Serial No. : E12081047-01/01 Date of Test : Aug 29, 2012

Test Mode : D-Sub 640*480@60Hz

Test Line	Frequency (MHz)	Meter Reading dB(μ V)	Factor (dB)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)	Remark	
Line	0.159	49.96	0.24	50.20	65.52	15.32	QP	
	0.621	41.34	0.22	41.56	56.00	14.44		
	1.269	37.41	0.34	37.75	56.00	18.25		
	2.707	36.75	0.40	37.15	56.00	18.85		
	5.476	43.04	0.52	43.56	60.00	16.44		
	18.232	36.81	0.90	37.71	60.00	22.29		
	0.159	40.30	0.24	40.54	55.52	14.98	AV	
	0.621	32.80	0.22	33.02	46.00	12.98		
	1.269	28.10	0.34	28.44	46.00	17.56		
	2.707	27.71	0.40	28.11	46.00	17.89		
	5.476	34.91	0.52	35.43	50.00	14.57		
	18.232	27.61	0.90	28.51	50.00	21.49		
	Neutral	0.159	50.39	0.13	50.52	65.52	15.00	QP
		0.614	41.64	0.19	41.83	56.00	14.17	
1.269		39.10	0.22	39.32	56.00	16.68		
4.454		39.27	0.41	39.68	56.00	16.32		
5.476		41.48	0.44	41.92	60.00	18.08		
16.398		39.57	0.75	40.32	60.00	19.68		
0.159		41.20	0.13	41.33	55.52	14.19	AV	
0.614		32.70	0.19	32.89	46.00	13.11		
1.269		30.50	0.22	30.72	46.00	15.28		
4.454		30.50	0.41	30.91	46.00	15.09		
5.476		32.21	0.44	32.65	50.00	17.35		
16.398		30.50	0.75	31.25	50.00	18.75		

TEST ENGINEER: LUY LV

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 48%RH

Serial No. : E12081047-01/01 Date of Test : Aug 29, 2012

Test Mode : USB Play

Test Line	Frequency (MHz)	Meter Reading dB(μ V)	Factor (dB)	Emission Level dB(μ V)	Limits dB(μ V)	Margin (dB)	Remark	
Line	0.159	51.27	0.24	51.51	65.52	14.01	QP	
	0.621	41.95	0.22	42.17	56.00	13.83		
	1.310	38.03	0.34	38.37	56.00	17.63		
	2.839	39.68	0.41	40.09	56.00	15.91		
	5.221	44.30	0.50	44.80	60.00	15.20		
	18.232	38.38	0.90	39.28	60.00	20.72		
		0.159	42.50	0.24	42.74	55.52	12.78	AV
		0.621	32.90	0.22	33.12	46.00	12.88	
		1.310	29.80	0.34	30.14	46.00	15.86	
		2.839	30.10	0.41	30.51	46.00	15.49	
		5.221	35.21	0.50	35.71	50.00	14.29	
		18.232	29.21	0.90	30.11	50.00	19.89	
	Neutral	0.159	49.51	0.13	49.64	65.52	15.88	QP
		0.621	41.11	0.19	41.30	56.00	14.70	
1.324		37.91	0.21	38.12	56.00	17.88		
4.454		38.01	0.41	38.42	56.00	17.58		
5.713		43.11	0.47	43.58	60.00	16.42		
17.199		39.02	0.76	39.78	60.00	20.22		
		0.159	40.30	0.13	40.43	55.52	15.09	AV
		0.621	32.10	0.19	32.29	46.00	13.71	
		1.324	28.60	0.21	28.81	46.00	17.19	
		4.454	29.60	0.41	30.01	46.00	15.99	
		5.713	34.21	0.47	34.68	50.00	15.32	
		17.199	30.51	0.76	31.27	50.00	18.73	

TEST ENGINEER: LUY LV

4 RADIATED EMISSION TEST


4.1 Test Equipment

The following test equipments are used during the radiated emission test in a semi-anechoic chamber:


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R&S	ESVS10	844594/001	Mar 22, 2012	Mar 22, 2013
2.	Preamplifier	Agilent	8447D	2944A10548	Sep 18, 2012	Mar 18, 2013
3.	Bi-log Antenna	TESEQ	CBL6112D	23192	Dec 01, 2011	Dec 01, 2012
4.	Spectrum	Agilent	E7405A	MY45106600	Mar 22, 2012	Mar 22, 2013
5.	50 Ω Coaxial Switch	Anritsu	MP59B	6200426390	Sep 18, 2012	Mar 18, 2013
6.	Software	Audix	E3	SET00200 9912M295-2	--	--

4.2 Block Diagram of Test Setup

4.2.1 EUT and Peripherals

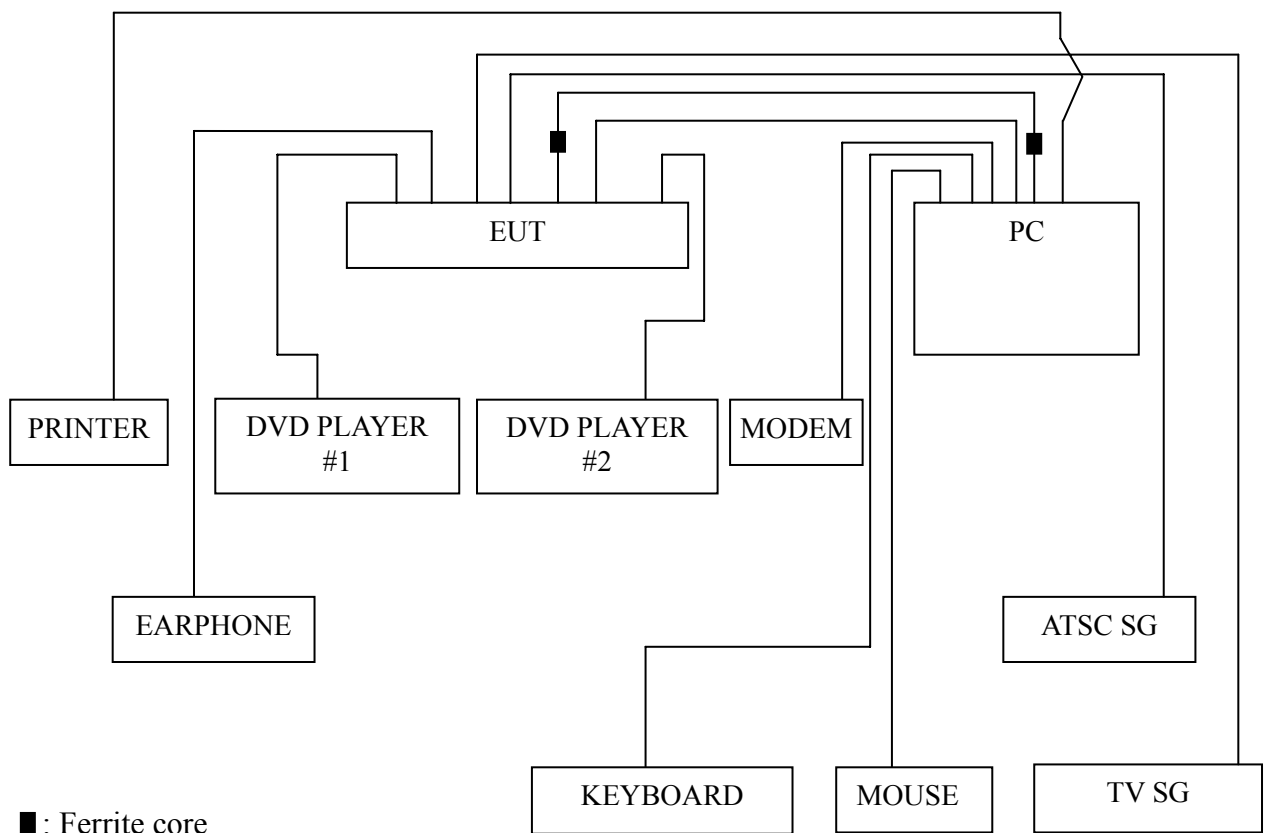

4.2.2 Radiated emission test setup

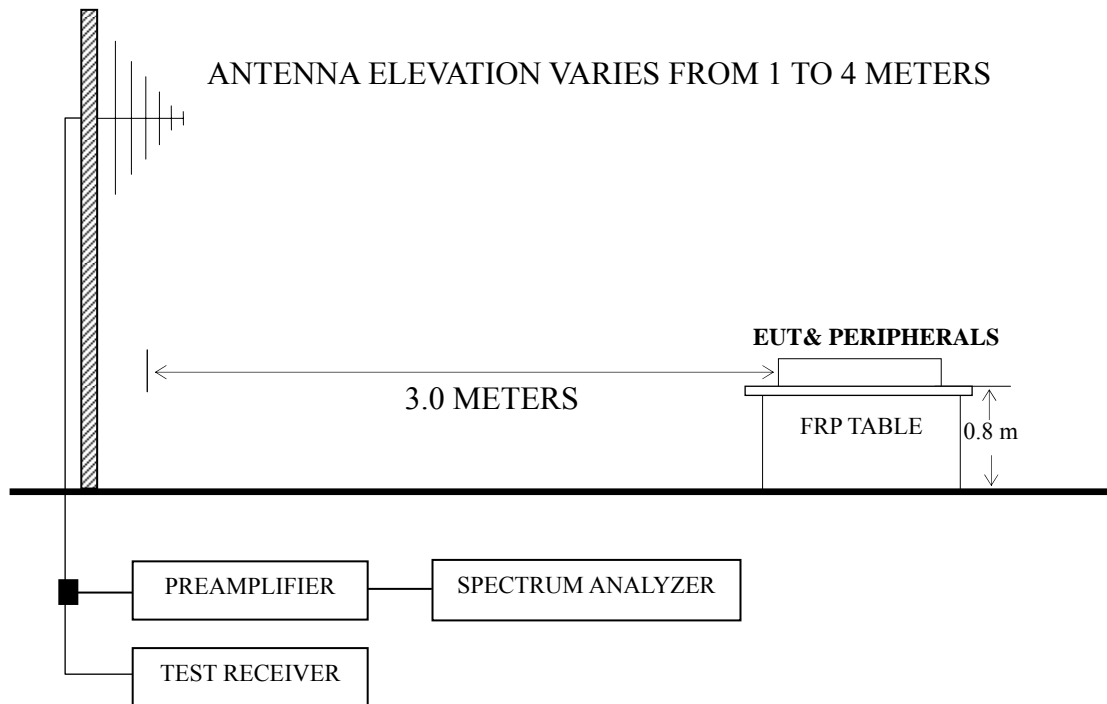

■ : 50 ohm Coaxial Switch

4.3 Radiated Emission Limit [FCC Part 15 Subpart B 15.109(a)]

Frequency (MHz)	Distance (m)	Field strength limits	
		($\mu\text{V/m}$)	dB ($\mu\text{V/m}$)
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0

NOTE 1 - Emission Level dB ($\mu\text{V/m}$) = 20 log Emission Level ($\mu\text{V/m}$)

NOTE 2 - The tighter limit applies at the band edges.

NOTE 3 - Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

NOTE 4 - The limits shown are based on Quasi-peak value detector.

NOTE 5 - Above 1 GHz, the limit on peak emission is 20 dB above the maximum permitted average emission limit applicable to the EUT.

4.4 Test Configuration

The configuration of the EUT and peripherals are same as those used in conducted emission test.

Please refer to Sec.3.4.

4.5 Operating Condition of EUT

Same as conducted emission test which is listed in Sec.3.5, except for the test setup replaced by Sec.4.2.

4.6 Test Procedures

The EUT and peripherals were placed on a FRP turntable that is 0.8 meter above ground. The FRP turntable rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna, which was mounted on an antenna tower. Broadband antenna (Calibrated Bilog Antenna) was used as receiving antenna. The antenna moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarizations of the antenna were set on measurement. In order to find the maximum emission, all of the interference cables were manipulated according to ANSI C63.4:2003 requirements during radiated emission test.

The I.F. bandwidth of Test Receiver R&S ESVS10 was set at 120 kHz.

The frequency range from 30 MHz to 1000MHz was checked for all test modes.

The test modes were done on radiated disturbance test and all the test results are listed in Sec.4.7.

4.7 Test Results

<PASS>

The frequency and amplitude of the highest radiated emission relative the limit is reported. All the emissions not reported below are too low against the FCC limit.

Test Mode	Data Page
D-Sub 1024*768@60Hz	P21
HDMI 1024*768@60Hz	P22
D-Sub 800*600@60Hz	P23
D-Sub 640*480@60Hz	P24
USB Play	P25

NOTE 1 – Emission Level = Antenna Factor + Cable Loss + Meter Reading.

NOTE 2 – All readings are Quasi-Peak values.

NOTE 3 – 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

NOTE 4 – The worst case is for D-Sub 1024*768@60Hz test mode. The worst emission at horizontal polarization was detected at 224.000 MHz with corrected signal level of 43.59 dB ($\mu\text{V}/\text{m}$) (limit is 46.00 dB ($\mu\text{V}/\text{m}$)), when the antenna was 1.80 m height and the turntable was at 254°. The worst emission at vertical polarization was detected at 132.700 MHz with corrected signal level of 43.19 dB ($\mu\text{V}/\text{m}$) (limit is 43.50 dB ($\mu\text{V}/\text{m}$)), when the antenna was 1.50 m height and the turntable was at 123°.

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 60%RH

Serial No. : E12081047-01/01 Date of Test : Sep 21, 2012

Test Mode : D-Sub 1024*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	92.080	27.69	11.08	1.75	40.52	43.50	2.98
	130.880	21.20	10.80	2.11	34.11	43.50	9.39
	224.000	30.27	10.80	2.52	43.59	46.00	2.41
	298.690	22.25	13.67	2.75	38.67	46.00	7.33
	376.290	23.75	15.79	2.93	42.47	46.00	3.53
	594.540	21.62	18.17	3.45	43.24	46.00	2.76
Vertical	92.080	25.79	11.08	1.75	38.62	43.50	4.88
	132.700	30.30	10.77	2.12	43.19	43.50	0.31
	223.030	26.01	10.76	2.51	39.28	46.00	6.72
	371.440	23.44	15.68	2.93	42.05	46.00	3.95
	446.130	14.76	16.92	3.11	34.79	46.00	11.21
	591.630	22.61	18.16	3.45	44.22	46.00	1.78

TEST ENGINEER: RAVEN JIN

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 60%RH

Serial No. : E12081047-01/01 Date of Test : Sep 21, 2012

Test Mode : HDMI 1024*768@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)
Horizontal	75.590	19.61	10.27	1.53	31.41	40.00	8.59
	87.230	19.35	10.88	1.70	31.93	40.00	8.07
	109.540	14.78	11.19	1.93	27.90	43.50	15.60
	240.490	23.16	11.55	2.58	37.29	46.00	8.71
	303.540	21.64	13.80	2.77	38.21	46.00	7.79
	412.180	16.75	16.45	3.02	36.22	46.00	9.78
Vertical	53.280	21.75	8.70	1.01	31.46	40.00	8.54
	77.530	13.68	10.39	1.56	25.63	40.00	14.37
	153.190	18.36	10.36	2.24	30.96	43.50	12.54
	223.030	20.48	10.76	2.51	33.75	46.00	12.25
	303.540	18.02	13.80	2.77	34.59	46.00	11.41
	434.490	18.47	16.74	3.08	38.29	46.00	7.71

TEST ENGINEER: RAVEN JIN

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 60%RH

Serial No. : E12081047-01/01 Date of Test : Sep 21, 2012

Test Mode : D-Sub 800*600@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	88.200	22.15	10.93	1.70	34.78	43.50	8.72
	158.040	27.53	10.28	2.27	40.08	43.50	3.42
	188.110	25.58	9.91	2.39	37.88	43.50	5.62
	296.750	23.04	13.63	2.75	39.42	46.00	6.58
	371.440	13.21	15.68	2.93	31.82	46.00	14.18
	591.630	19.32	18.16	3.45	40.93	46.00	5.07
Vertical	37.760	20.78	14.00	0.86	35.64	40.00	4.36
	48.430	26.75	9.02	0.90	36.67	40.00	3.33
	90.140	19.50	11.00	1.73	32.23	43.50	11.27
	134.760	21.46	10.72	2.14	34.32	43.50	9.18
	158.040	25.89	10.28	2.27	38.44	43.50	5.06
	296.750	16.26	13.63	2.75	32.64	46.00	13.36

TEST ENGINEER: RAVEN JIN

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 60%RH

Serial No. : E12081047-01/01 Date of Test : Sep 21, 2012

Test Mode : D-Sub 640*480@60Hz

Polarization	Frequency (MHz)	Meter Reading dB (μ V)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μ V/m)	Limits dB (μ V/m)	Margin (dB)
Horizontal	44.550	26.18	10.47	0.89	37.54	40.00	2.46
	93.050	22.66	11.12	1.77	35.55	43.50	7.95
	132.820	28.14	10.77	2.12	41.03	43.50	2.47
	178.410	24.32	10.01	2.35	36.68	43.50	6.82
	303.540	13.21	13.80	2.77	29.78	46.00	16.22
	592.600	19.81	18.16	3.45	41.42	46.00	4.58
Vertical	94.020	26.70	11.15	1.78	39.63	43.50	3.87
	138.640	24.63	10.65	2.16	37.44	43.50	6.06
	186.170	23.28	9.93	2.38	35.59	43.50	7.91
	217.210	24.76	10.48	2.50	37.74	46.00	8.26
	314.210	18.19	14.08	2.79	35.06	46.00	10.94
	592.600	15.23	18.16	3.45	36.84	46.00	9.16

TEST ENGINEER: RAVEN JIN

EUT : LED LCD TV Temperature : 22°C

Model No. : LTDN50K360GUS Humidity : 60%RH

Serial No. : E12081047-01/01 Date of Test : Sep 21, 2012

Test Mode : USB Play

Polarization	Frequency (MHz)	Meter Reading dB (μV)	Antenna Factor (dB/m)	Cable Loss (dB)	Emission Level dB (μV/m)	Limits dB (μV/m)	Margin (dB)
Horizontal	88.200	23.15	10.93	1.70	35.78	43.50	7.72
	158.040	25.53	10.28	2.27	38.08	43.50	5.42
	188.110	23.58	9.91	2.39	35.88	43.50	7.62
	296.750	23.04	13.63	2.75	39.42	46.00	6.58
	591.630	21.32	18.16	3.45	42.93	46.00	3.07
	749.740	13.98	20.05	3.80	37.83	46.00	8.17
Vertical	37.760	20.78	14.00	0.86	35.64	40.00	4.36
	48.430	26.75	9.02	0.90	36.67	40.00	3.33
	90.140	19.50	11.00	1.73	32.23	43.50	11.27
	158.040	25.89	10.28	2.27	38.44	43.50	5.06
	296.750	16.26	13.63	2.75	32.64	46.00	13.36
	371.440	11.56	15.68	2.93	30.17	46.00	15.83

TEST ENGINEER: RAVEN JIN

5 DEBUG DESCRIPTION

The following components are used during the countermeasure procedures:

Name	M/N	Manufacturer	Location
Ferrite Core	ZCAT2132-1130\ROH	FEELUX	See Internal photos Figure 16
		Rui Feng Electronic Co., Ltd.	
		Hai An Magnetic Material No.2 Factory	
		JIANGSU LETTALL ELECTRONICS CO., LTD.	
Gasket	35X0.7X41mm\VGA\ROH	JOINSET	See Internal photos Figure 17

Note: We had required the applicant and manufacturer that all electrical and mechanical devices employed for spurious radiation suppression, including any modifications made during certification testing, must be incorporated in each unit marked

TEST ENGINEER:



(RAVEN JIN)

6 DEVIATION TO TEST SPECIFICATIONS

None.