

Application Submittal Report For FCC And Industry Canada Grant Of Certification

FOR


Models: Z05FEE01 and Z05FEE02
5745-5825 MHz, 5755-5815 (40 MHz Mode)
MIMO Broadband Digital Transmission System
FCC ID: W9Z-FREEMILE5
IC: 8855A-FREEMILE5

FOR

SAF Tehnika AS
24a, Ganibu dambis
Riga, Latvia, LV-1005

Test Report Number: 120209

Authorized Signatory: *Scot D Rogers*
Scot D. Rogers



ROGERS LABS, INC.

4405 West 259th Terrace
 Louisburg, KS 66053
 Phone / Fax (913) 837-3214

**Engineering Test Report For
 Grant of Certification Application**

FOR
 CFR 47, PART 15C - Intentional Radiators
 CFR 47 Paragraph 15.247 and Industry Canada RSS-210
 License Exempt Intentional Radiator

For

SAF Tehnika AS

24a, Ganibu dambis
 Riga, Latvia, LV-1005

Models: Z05FEE01 and Z05FEE02

MiMo Broadband Digital Transmission System

Frequency Range 5745-5825 MHz, 5755-5815 (40 MHz Mode)
 FCC ID#: W9Z-FREEMILE5
 IC: 8855A-FREEMILE5

Test Date: February 9, 2012

Certifying Engineer: *Scot D. Rogers*
 Scot D. Rogers
 Rogers Labs, Inc.
 4405 West 259th Terrace
 Louisburg, KS 66053
 Telephone/Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory.
 This report must not be used by the client to claim product endorsement by NVLAP, NIST, or
 any agency of the U.S. Government.



Table Of Contents

TABLE OF CONTENTS..... 3

FORWARD 6

APPLICABLE STANDARDS & TEST PROCEDURES 6

ENVIRONMENTAL CONDITIONS..... 6

OPINION / INTERPRETATION OF RESULTS 7

TEST SITE LOCATIONS 7

UNITS OF MEASUREMENTS 7

EQUIPMENT TESTED..... 8

EQUIPMENT FUNCTION AND CONFIGURATION..... 8

 Equipment Configuration.....8

APPLICATION FOR CERTIFICATION..... 9

TEST PROCEDURES..... 10

 AC Line Conducted Emission Test Procedure10

 Radiated Emission Test Procedure.....10

LIST OF TEST EQUIPMENT 11

INTENTIONAL RADIATORS..... 12

 Antenna Requirements12

Restricted Bands of Operation.....12

 Radiated Emissions in Restricted Bands Data General12

 Radiated Emissions in Restricted Bands Z05FEE0113

 Radiated Emissions in Restricted Bands Z05FEE0213

Summary of Results for Radiated Emissions in Restricted Bands13

AC Line Conducted Emissions Procedure.....14

 Figure 1 AC Line Conducted Emissions Line 115

 Figure 2 AC Line Conducted Emissions Line 215

 AC Line Conducted Emissions Data (Highest Emissions).....16

Summary of Results for AC Line Conducted Emissions16

General Radiated Emissions Procedure.....17

 General Radiated Emissions from EUT Data (Worst-case General Emissions).....18



Summary of Results for General Radiated Emissions18

Operation in the Frequency Band of 5725 – 5850 MHz.....19

Figure 3 Plot of Antenna Port Conducted (Power, 5745 MHz, Chain 0, 20 MHz Mode) 19

Figure 4 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 0, 20 MHz Mode)20

Figure 5 Plot of Antenna Port Conducted (Power, 5825 MHz, Chain 0, 20 MHz Mode)20

Figure 6 Plot of Antenna Port Conducted (Power, 5745 MHz, Chain 1, 20 MHz Mode)21

Figure 7 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 1, 20 MHz Mode)21

Figure 8 Plot of Antenna Port Conducted (Power, 5825 MHz, Chain 1, 20 MHz Mode)22

Figure 9 Plot of Antenna Port Conducted (Power, 5755 MHz, Chain 0, 40 MHz Mode)22

Figure 10 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 0, 40 MHz Mode)23

Figure 11 Plot of Antenna Port Conducted (Power, 5815 MHz, Chain 0, 40 MHz Mode)23

Figure 12 Plot of Antenna Port Conducted (Power, 5755 MHz, Chain 1, 40 MHz Mode)24

Figure 13 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 1, 40 MHz Mode)24

Figure 14 Plot of Antenna Port Conducted (Power, 5815 MHz, Chain 1, 40 MHz Mode)25

Figure 15 Plot of Antenna Port Conducted 6dB Band width (5745 MHz, Chain 0, 20 MHz Mode)25

Figure 16 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 0, 20 MHz Mode)26

Figure 17 Plot of Antenna Port Conducted 6dB Band width (5825 MHz, Chain 0, 20 MHz Mode)26

Figure 18 Plot of Antenna Port Conducted 6dB Band width (5745 MHz, Chain 1, 20 MHz Mode)27

Figure 19 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 1, 20 MHz Mode)27

Figure 20 Plot of Antenna Port Conducted 6dB Band width (5825 MHz, Chain 1, 20 MHz Mode)28

Figure 21 Plot of Antenna Port Conducted 6dB Band width (5755 MHz, Chain 0, 40 MHz Mode)28

Figure 22 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 0, 40 MHz Mode)29

Figure 23 Plot of Antenna Port Conducted 6dB Band width (5815 MHz, Chain 0, 40 MHz Mode)29

Figure 24 Plot of Antenna Port Conducted 6dB Band width (5755 MHz, Chain 1, 40 MHz Mode)30

Figure 25 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 1, 40 MHz Mode)30

Figure 26 Plot of Antenna Port Conducted 6dB Band width (5815 MHz, Chain 1, 40 MHz Mode)31

Figure 27 Plot of Power Spectral Density (5745 MHz, Chain 0, 20 MHz Mode)31

Figure 28 Plot of Power Spectral Density (5785 MHz, Chain 0, 20 MHz Mode)32

Figure 29 Plot of Power Spectral Density (5825 MHz, Chain 0, 20 MHz Mode)32

Figure 30 Plot of Power Spectral Density (5745 MHz, Chain 1, 20 MHz Mode)33

Figure 31 Plot of Power Spectral Density (5785 MHz, Chain 1, 20 MHz Mode)33

Figure 32 Plot of Power Spectral Density (5825 MHz, Chain 1, 20 MHz Mode)34

Figure 33 Plot of Power Spectral Density (5755 MHz, Chain 0, 40 MHz Mode)34

Figure 34 Plot of Power Spectral Density (5785 MHz, Chain 0, 40 MHz Mode)35

Figure 35 Plot of Power Spectral Density (5815 MHz, Chain 0, 40 MHz Mode)35

Figure 36 Plot of Power Spectral Density (5755 MHz, Chain 1, 40 MHz Mode)36

Figure 37 Plot of Power Spectral Density (5785 MHz, Chain 1, 40 MHz Mode)36

Figure 38 Plot of Power Spectral Density (5815 MHz, Chain 1, 40 MHz Mode)37

Figure 39 Plot of Low Band Edge Compliance (5745 MHz, Chain 0, 20 MHz Mode)37

Figure 40 Plot of High Band Edge Compliance (5825 MHz, Chain 0, 20 MHz Mode)38

Figure 41 Plot of Low Band Edge Compliance (5745 MHz, Chain 1, 20 MHz Mode)38



Figure 42 Plot of High Band Edge Compliance (5825 MHz, Chain 1, 20 MHz Mode).....39

Figure 43 Plot of Low Band Edge Compliance (5755 MHz, Chain 0, 40 MHz Mode)39

Figure 44 Plot of High Band Edge Compliance (5815 MHz, Chain 0, 40 MHz Mode).....40

Figure 45 Plot of Low Band Edge Compliance (5755 MHz, Chain 1, 40 MHz Mode)40

Figure 46 Plot of High Band Edge Compliance (5815 MHz, Chain 1, 40 MHz Mode).....41

Figure 47 Plot of Antenna Port Conducted Emissions (Chain 0)41

Figure 48 Plot of Antenna Port Conducted Emissions (Chain 0)42

Figure 49 Plot of Antenna Port Conducted Emissions (Chain 0)42

Figure 50 Plot of Antenna Port Conducted Emissions (Chain 0)43

Figure 51 Plot of Antenna Port Conducted Emissions (Chain 0)43

Figure 52 Plot of Antenna Port Conducted Emissions (Chain 0)44

Figure 53 Plot of Antenna Port Conducted Emissions (Chain 0)44

Figure 54 Plot of Antenna Port Conducted Emissions (Chain 0)45

Figure 55 Plot of Antenna Port Conducted Emissions (Chain 1)45

Figure 56 Plot of Antenna Port Conducted Emissions (Chain 1)46

Figure 57 Plot of Antenna Port Conducted Emissions (Chain 1)46

Figure 58 Plot of Antenna Port Conducted Emissions (Chain 1)47

Figure 59 Plot of Antenna Port Conducted Emissions (Chain 1)47

Figure 60 Plot of Antenna Port Conducted Emissions (Chain 1)48

Figure 61 Plot of Antenna Port Conducted Emissions (Chain 1)48

Figure 62 Plot of Antenna Port Conducted Emissions (Chain 1)49

Transmitter Emissions Data.....49

Transmitter Antenna Port Conducted Emissions Data (Total for Both Chains).....49

Transmitter Antenna Port Conducted Emissions Data50

Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 0, HT Mixed Mode)52

Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 1, HT Mixed Mode)53

Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 0, HT Green Field)54

Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 1, HT Green Field).....55

Transmitter Radiated Emission (23 dBi Panel, Worst-case).....56

Transmitter Radiated Emission (32 dBi Dish, Worst-case).....57

Summary of Results for Transmitter Radiated Emissions of Intentional Radiator.....58

STATEMENT OF MODIFICATIONS AND DEVIATIONS 58

ANNEX..... 59

Annex A Measurement Uncertainty Calculations.....60

Annex B Rogers Labs Test Equipment List.....62

Annex C Rogers Qualifications63

Annex D FCC Site Registration Letter.....64

Annex E Industry Canada Site Registration Letter65



Forward

The following information is submitted for consideration in obtaining Grant of Certification for License Exempt Digital Transmission System Intentional Radiator operating under CFR 47 Paragraph 15.247, KDB 662911, and Industry Canada RSS-210.

Name of Applicant: SAF Tehnika AS
24a, Ganibu dambis
Riga, Latvia, LV-1005

Models: Z05FEE01 and Z05FEE02

FCC I.D.: W9Z-FREEMILE5 FRN: 0018 6623 12 IC: 8855A-FREEMILE5
Frequency Range: 5745-5825 (802.11n), 5755-5815 MHz (802.11n, 40 MHz Channel)
Operating Power: 27.7 dBm, 0.5 Watts (chain 0), 26.2 dBm (chain 1), 0.990 Watt Total,
Occupied Bandwidth of 18,173 kHz (802.11n) or 37,308 kHz

Applicable Standards & Test Procedures

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2011, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247, KDB 662911 MIMO and Industry Canada standard RSS-210 the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI C63.4-2009 Document, FCC KDB 662911 MIMO, KDB 558074 DTS Measurement Guide, and/or RSS-210. Testing for the AC line-conducted emissions were performed as defined in sections 7 and 13.1.3, testing of the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. Testing of the intentional radiated emissions was performed as defined in section 13 of ANSI C63.4-2009.

Environmental Conditions

Ambient Temperature	20.6° C
Relative Humidity	29%
Atmospheric Pressure	1031.5 mb



Opinion / Interpretation of Results

Tests Performed	Margin (dB)	Results
Emissions as per CFR 47, 15.205, RSS-210 (Restricted)	-3.4	Complies
Emissions as per CFR 47, 15.207, RSS-210 (AC Line)	-9.1	Complies
Emissions as per CFR 47, 15.209, RS-210 (Gen, Radiated)	-3.4	Complies
Emissions as per CFR 47, 15.247, RSS210 (Tx Harmonic)	-11.5	Complies

Test Site Locations

Conducted EMI The AC power line conducted emissions testing performed in a shielded screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259th Terrace, Louisburg, KS

Site Registration Refer to Annex for Site Registration Letters

NVLAP Accreditation Lab code 200087-0

Units of Measurements

Conducted EMI Data is in dBµV; dB referenced to one microvolt

Radiated EMI Data is in dBµV/m; dB/m referenced to one microvolt per meter

Sample Calculation:

RFS = Radiated Field Strength, FSM = Field Strength Measured
A.F. = Receive antenna factor, Gain = amplification gains and/or cable losses
 $RFS (dBµV/m @ 3m) = FSM (dBµV) + A.F. (dB) - Gain (dB)$


Equipment Tested

<u>Equipment</u>	<u>Model</u>	<u>FCC I.D.</u>
EUT	Z05FEE01 and Z05FEE02	W9Z-FREEMILE5
POE	CFIP-TPI	N/A
POE (AC Adapter)	CFIP-AC-PS	N/A
Dell Latitude Laptop	E6520	N/A
DISH Antenna	HDDA5W-32-DP2	N/A
Panel Antenna	Z05FEE01	W9Z-FREEMILE5

Equipment Function and Configuration

The EUT is a 5745-5825 MHz, 2x2 Multiple Input Multiple Output (MiMo), Digital Transmission System used to transmit data in applications offering broadband wireless connectivity. The EUT is offered in two models Z05FEE01 (mounted with 23-dBi panel antenna) and Z05FEE02 (n-connector for use with authorized dish antenna). The equipment is marketed for use to incorporate a wireless link to exchange data information from one point to another. For testing purposes, the Z05FEE01 and Z05FEE02 transceiver was connected to the manufacturer supplied Power-Over-Ethernet (POE) interface and laptop computer allowing for power and operational control of the transmitter. The Z05FEE01 and Z05FEE02 receive power from authorized POE adapter only and offer no other provisions for interfacing. Testing was performed with the EUT set to transmit in available data modes. The design is marketed for professional installation, no provision for connection to alternate antenna systems is provided. The design complies with the unique antenna connection requirements.

Equipment Configuration

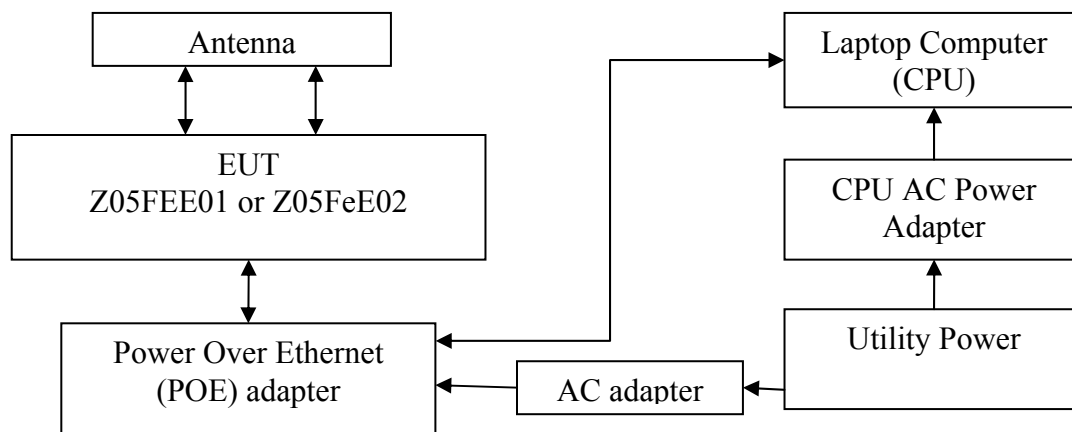

Application for Certification

- (1) Manufacturer: SAF Tehnika AS
24a, Ganību dambis
Rīga, Latvia, LV-1005
- (2) Identification: Models: Z05FEE01 and Z05FEE02
FCC I.D.: W9Z-FREEMILE5 IC: 8855A-FREEMILE5
- (3) Instruction Book:
Refer to Exhibit for Instruction Manual.
- (4) Description of Circuit Functions:
Refer to Exhibit of Operational Description.
- (5) Block Diagram with Frequencies:
Refer to Exhibit of Operational Description.
- (6) Report of Measurements:
Report of measurements follows in this Report.
- (7) Photographs: Construction, Component Placement, etc.:
Refer to Exhibit for photographs of equipment.
- (8) List of Peripheral Equipment Necessary for operation: Optional equipment available for the EUT includes Power Over Ethernet (POE) power adapter. The available configuration options were investigated for this and other reports in compliance to required standards with worst-case data presented.
- (9) Transition Provisions of CFR47 15.37 are not requested.
- (10) Not Applicable: The unit is not a scanning receiver.
- (11) Not Applicable: The EUT does not operate in the 59 – 64 GHz frequency band.
- (12) The equipment is not software defined and this section is not applicable.

Test Procedures

AC Line Conducted Emission Test Procedure

Testing for the AC line-conducted emissions was performed as defined in sections 7.2.4 and 13 of ANSI C63.4-2009. The test setup, including the EUT, was arranged in the test configurations as shown above and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50- μ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table. Refer to photographs in exhibits for EUT placement used during testing.

Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Testing for the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4-2009. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the test setup exhibits for EUT placement during testing.

List of Test Equipment

A Rohde and Schwarz ESU40 and/or Hewlett Packard 8591EM was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Rohde and Schwarz ESU40 and/or Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the appendix for a complete list of test equipment.

AC Line Conducted Emissions (0.150 -30 MHz)		
RBW	AVG. BW	Detector Function
9 kHz	30 kHz	Peak / Quasi Peak
Emissions (30-1000 MHz)		
RBW	AVG. BW	Detector Function
120 kHz	300 kHz	Peak / Quasi Peak
Emissions (Above 1000 MHz)		
RBW	Video BW	Detector Function
100 kHz	100 kHz	Peak
1 MHz	1 MHz	Peak / Average

<u>Equipment</u>	<u>Manufacturer</u>	<u>Model</u>	<u>Calibration Date</u>	<u>Due</u>
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/11	10/12
Antenna	ARA	BCD-235-B	10/11	10/12
Antenna	EMCO	3147	10/11	10/12
Antenna	EMCO	3143	5/11	5/12
Analyzer	HP	8591EM	5/11	5/12
Analyzer	HP	8562A	5/11	5/12
Analyzer	Rohde & Schwarz	ESU40	5/11	5/12



Intentional Radiators

As per CFR47, Subpart C, paragraph 15.247, KDB 662911 MIMO, and RSS-210 Issue 8 the following information is submitted.

Antenna Requirements

The EUT is configured with attached panel antenna or N-connector port for use with authorized antenna systems. The design is marketed for professional installation and use in point-to-point applications as described in accompanying documentation. The antenna connection point complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled; there are no deviations or exceptions to the specification.

Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at a distance of three meters on the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were measured at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

Radiated Emissions in Restricted Bands Data General

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Quasi-Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Quasi-Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
73.2	37.1	25.9	N/A	54.8	29.8	N/A	40.0
73.3	37.4	25.4	N/A	53.8	29.8	N/A	40.0
73.7	37.7	24.3	N/A	53.0	27.4	N/A	40.0
125.0	45.5	40.1	N/A	38.2	30.0	N/A	43.5
145.3	42.4	39.2	N/A	39.5	30.3	N/A	43.5
242.0	41.5	28.3	N/A	36.4	25.2	N/A	46.0
1600.0	42.1	N/A	28.1	41.8	N/A	26.4	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Radiated Emissions in Restricted Bands Z05FEE01

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
11490.0	47.6	N/A	34.8	46.7	N/A	34.6	54.0
11490.0	47.9	N/A	34.8	47.5	N/A	34.4	54.0
11570.0	48.5	N/A	35.1	47.5	N/A	35.0	54.0
11650.0	35.3	N/A	22.8	34.7	N/A	32.7	54.0
22980.0	47.6	N/A	34.8	46.7	N/A	34.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Radiated Emissions in Restricted Bands Z05FEE02

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
11490.0	46.6	N/A	34.0	46.7	N/A	34.0	54.0
11490.0	46.4	N/A	34.1	46.5	N/A	34.1	54.0
11570.0	47.4	N/A	34.8	47.1	N/A	34.9	54.0
11650.0	35.7	N/A	33.2	36.3	N/A	33.1	54.0
22980.0	46.6	N/A	34.0	46.7	N/A	34.0	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for Radiated Emissions in Restricted Bands

The EUT demonstrated compliance with the radiated emissions requirements of CFR 47 Part 15C Intentional Radiators. The EUT demonstrated a minimum margin of -3.4 dB below the radiated emissions requirements in restricted frequency bands. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. Worst-case emissions are reported with other emissions found in the restricted frequency bands at least 20 dB below the requirements.

AC Line Conducted Emissions Procedure

The EUT was arranged in the testing configuration, emulating a typical configuration, and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The Power Over Ethernet for the EUT was connected to the LISN for AC line conducted emissions testing. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 μ F capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worst-case configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the EUT powered by POE, AC Power Line conducted emissions.

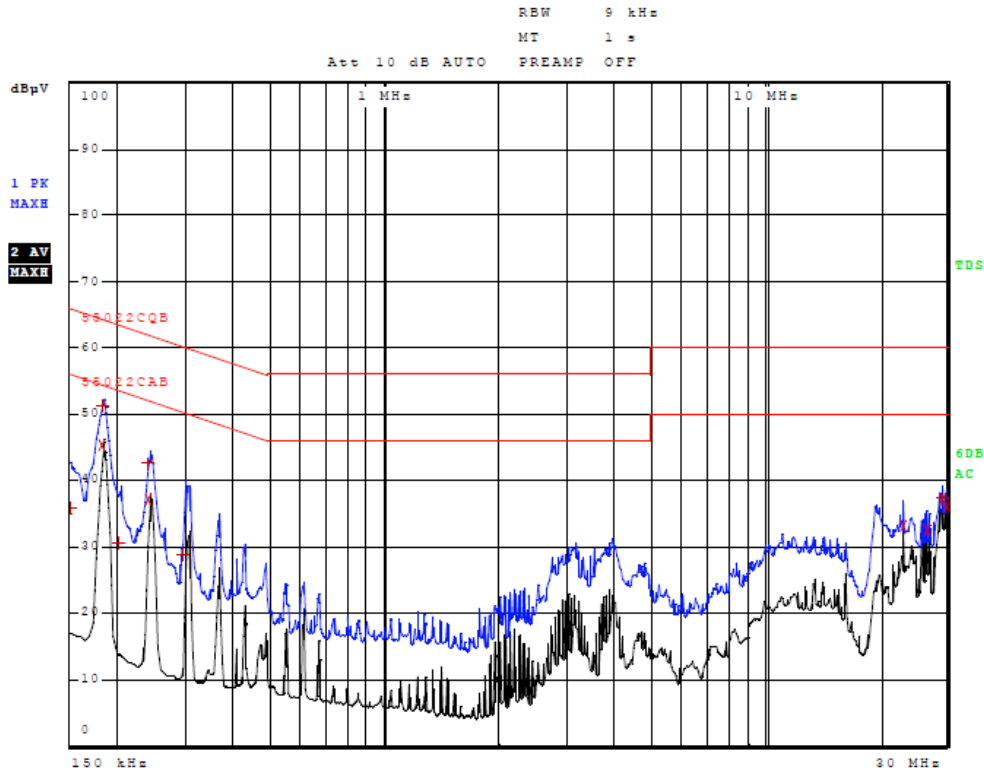


Figure 1 AC Line Conducted Emissions Line 1

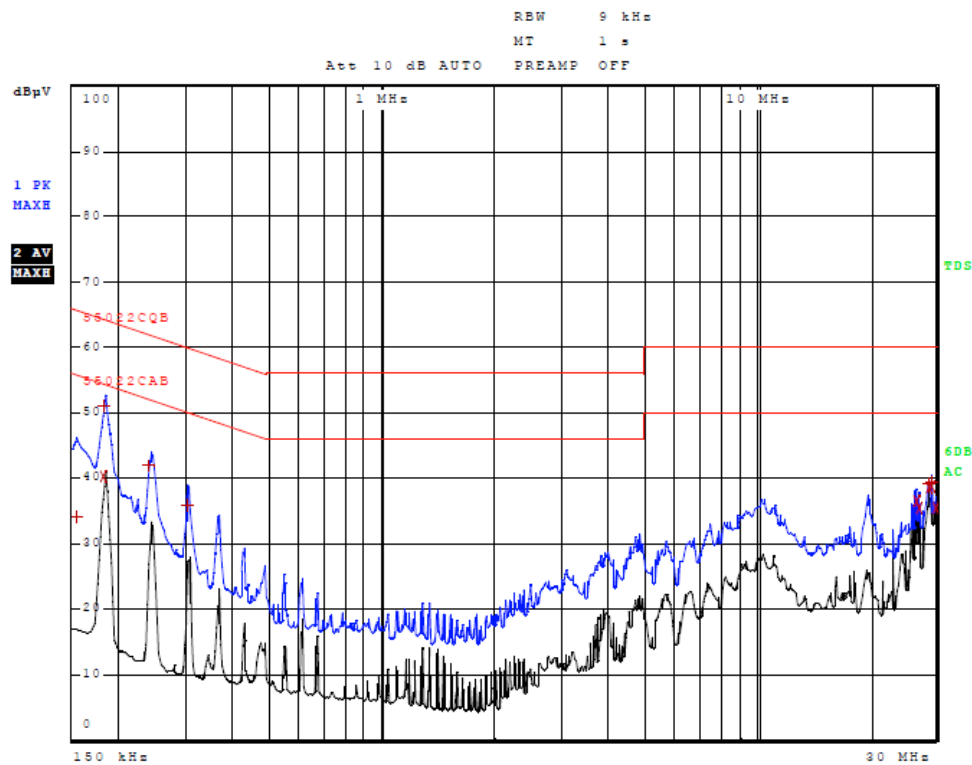


Figure 2 AC Line Conducted Emissions Line 2



AC Line Conducted Emissions Data (Highest Emissions)

Line 1

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	150.000000000 kHz	35.91	Quasi Peak	-30.09
2	182.000000000 kHz	45.20	Average	-9.19
1	182.000000000 kHz	51.07	Quasi Peak	-13.32
1	202.000000000 kHz	30.61	Quasi Peak	-32.92
2	242.000000000 kHz	37.05	Average	-14.98
1	242.000000000 kHz	42.53	Quasi Peak	-19.49
1	298.000000000 kHz	28.88	Quasi Peak	-31.42
2	23.128000000 MHz	33.08	Average	-16.92
2	26.608000000 MHz	32.36	Average	-17.64
1	29.232000000 MHz	37.25	Quasi Peak	-22.75
2	29.236000000 MHz	37.14	Average	-12.86
2	29.968000000 MHz	36.08	Average	-13.92

Line 2

Trace	Frequency	Level (dBµV)	Detector	Delta Limit/dB
1	154.000000000 kHz	34.22	Quasi Peak	-31.56
2	182.000000000 kHz	40.29	Average	-14.11
1	182.000000000 kHz	50.89	Quasi Peak	-13.50
1	242.000000000 kHz	41.98	Quasi Peak	-20.04
1	302.000000000 kHz	35.76	Quasi Peak	-24.42
2	26.608000000 MHz	36.39	Average	-13.61
2	27.160000000 MHz	35.50	Average	-14.50
2	28.684000000 MHz	38.62	Average	-11.38
1	28.684000000 MHz	39.18	Quasi Peak	-20.82
2	29.236000000 MHz	38.84	Average	-11.16
1	29.236000000 MHz	39.31	Quasi Peak	-20.69
2	29.908000000 MHz	35.35	Average	-14.65

Other emissions present had amplitudes at least 20 dB below the limit.

Summary of Results for AC Line Conducted Emissions

The EUT demonstrated compliance to the conducted emissions requirements of CFR47 Part 15C and RSS-GEN. The EUT demonstrated minimum margin of -9.1 dB below the limit.

Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.



General Radiated Emissions Procedure

The EUT was arranged in the testing configuration emulating typical equipment configuration and operated through available modes with worst-case data recorded. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions investigation measurements were performed to identify frequencies, which produced the highest emissions. The frequency spectrum from 9 kHz to 60,000 MHz was searched for general radiated emissions during investigation. Final radiated emissions data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. Each radiated emission was then maximized at the OATS location before final radiated emissions measurements were performed. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 1 GHz and or Double Ridge Horn or Pyramidal Horns and mixers from 1 GHz to 60 GHz, notch filters, and appropriate amplifiers and external mixers were utilized.

General Radiated Emissions from EUT Data (Worst-case General Emissions)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Quasi-Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Quasi-Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
64.1	35.0	21.8	N/A	37.7	29.0	N/A	40.0
69.0	37.4	26.4	N/A	36.1	29.9	N/A	40.0
73.2	37.1	25.9	N/A	39.7	29.8	N/A	43.5
73.3	37.4	25.4	N/A	39.0	29.8	N/A	43.5
73.7	37.7	24.3	N/A	38.5	27.4	N/A	43.5
125.0	45.5	40.1	N/A	37.2	30.0	N/A	43.5
145.3	42.4	39.2	N/A	34.7	30.3	N/A	43.5
242.0	41.5	28.3	N/A	29.5	25.2	N/A	46.0
1600.0	42.1	N/A	28.1	41.8	N/A	26.4	56.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Summary of Results for General Radiated Emissions

The EUT demonstrated compliance with the radiated emissions requirements of CFR47 Part 15C paragraph 15.209 Intentional Radiators. The EUT demonstrated a minimum margin of -3.4 dB below the requirements. Other emissions were present with amplitudes at least 20 dB below the Limits.

Operation in the Frequency Band of 5725 – 5850 MHz

The power output and emissions were measured at the antenna port in compliance with regulation. EUT radiated emissions were also measured on the open area test site at a three-meter distance. The EUT and test configurations were placed on a wooden turntable 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. The peak and quasi-peak amplitude of the frequencies below 1000 MHz were measured using a spectrum analyzer. The peak and average amplitude of emissions above 1000 MHz including were measured using a spectrum analyzer. Data was recorded from the analyzer measurement result. Plots were made of transmitter antenna port conducted performance taken in a screen room. Refer to figures three through sixty-two showing plots of the EUT emissions performance displaying compliance with the specifications. Emissions testing were performed on each chain of the EUT at the antenna ports.

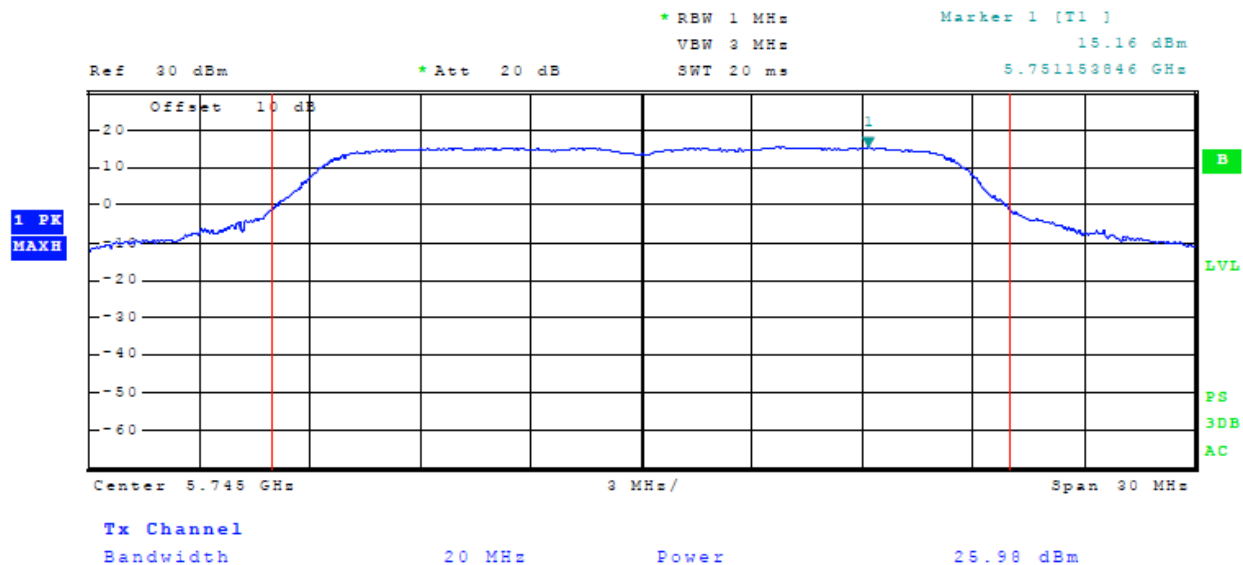


Figure 3 Plot of Antenna Port Conducted (Power, 5745 MHz, Chain 0, 20 MHz Mode)

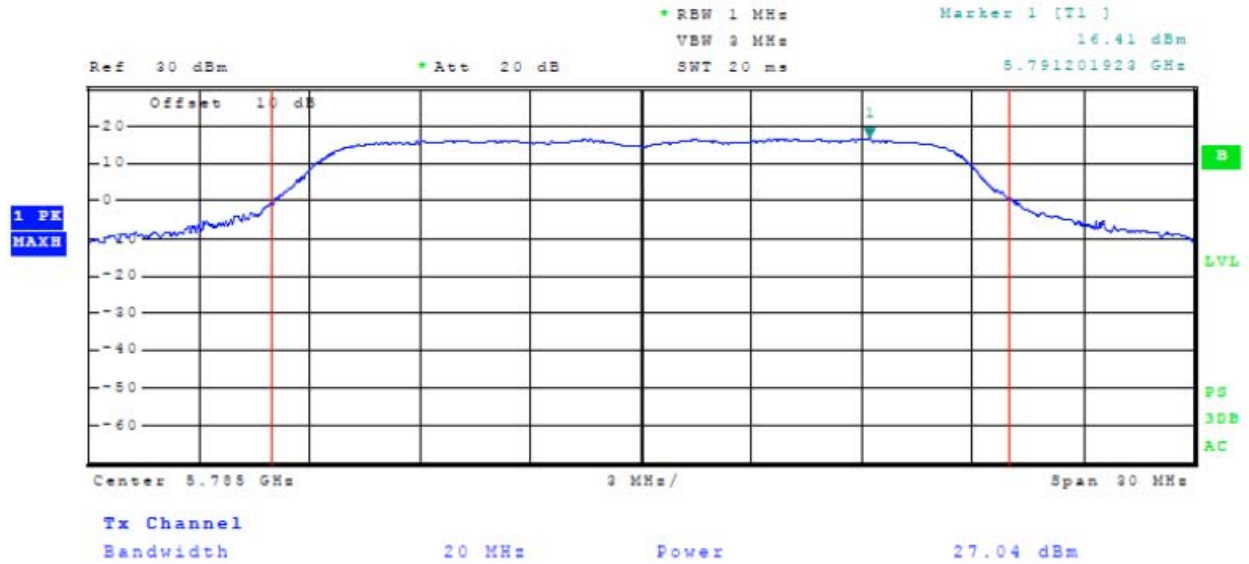


Figure 4 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 0, 20 MHz Mode)

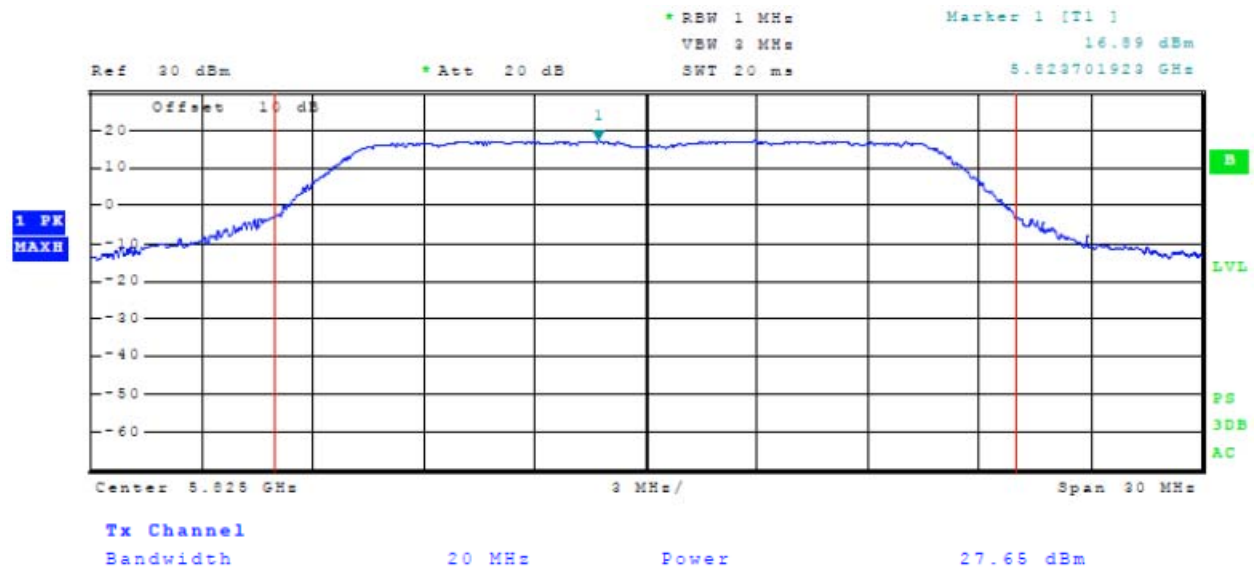


Figure 5 Plot of Antenna Port Conducted (Power, 5825 MHz, Chain 0, 20 MHz Mode)

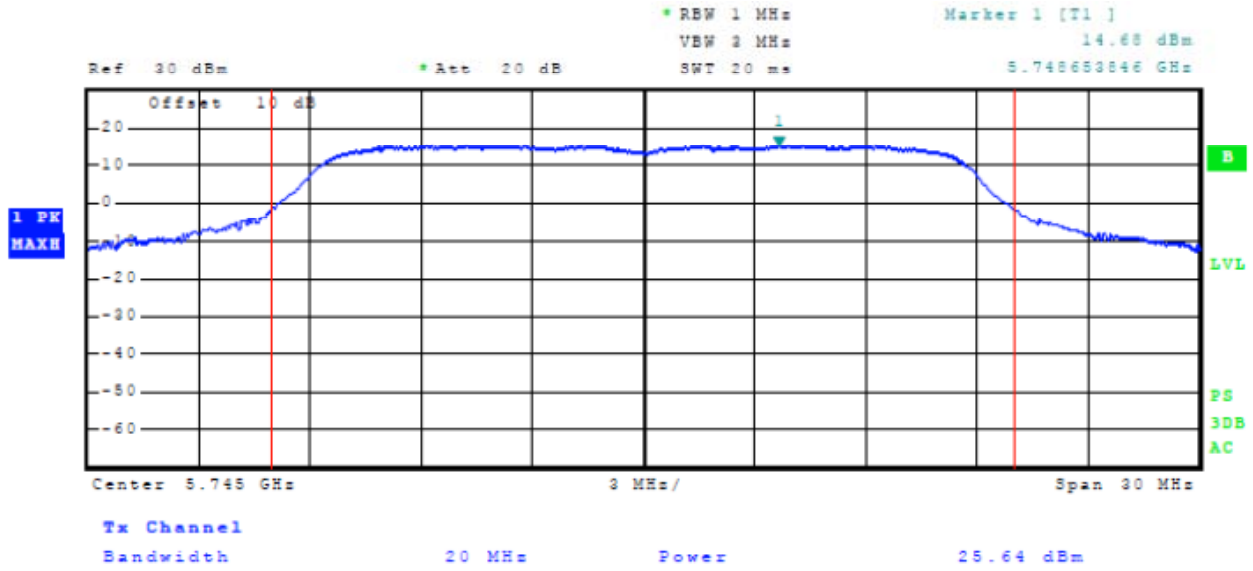


Figure 6 Plot of Antenna Port Conducted (Power, 5745 MHz, Chain 1, 20 MHz Mode)

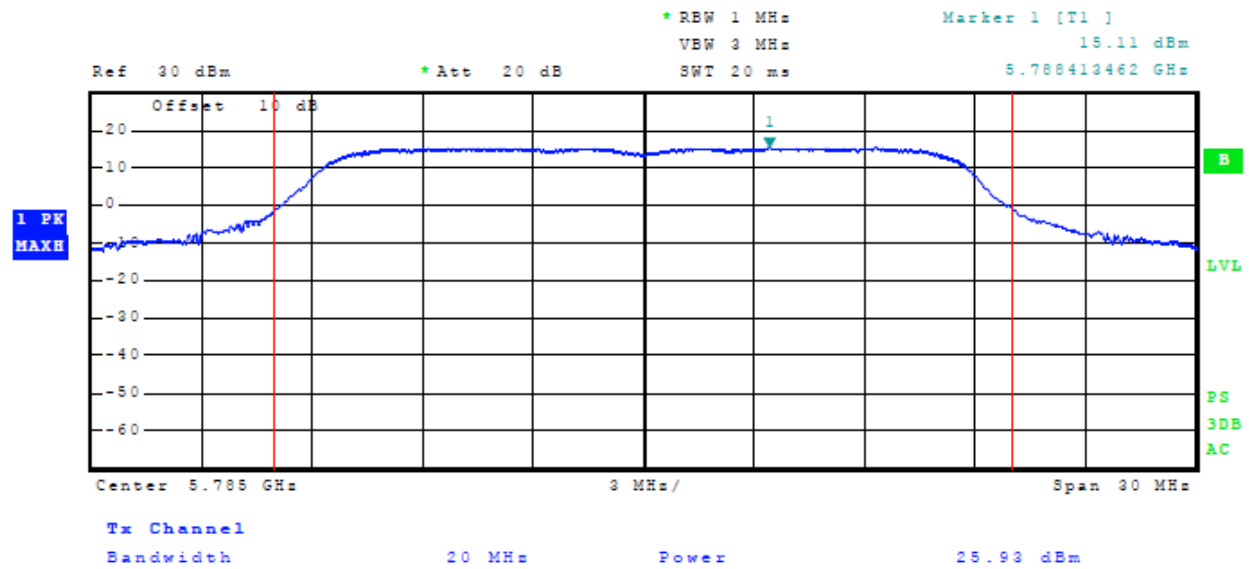


Figure 7 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 1, 20 MHz Mode)

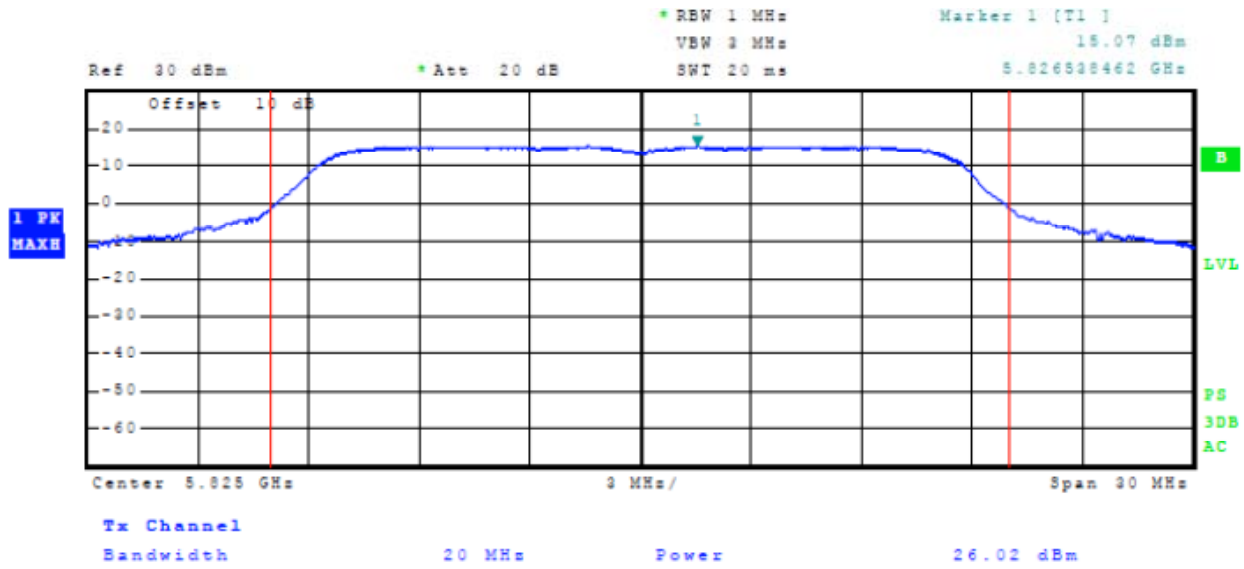


Figure 8 Plot of Antenna Port Conducted (Power, 5825 MHz, Chain 1, 20 MHz Mode)

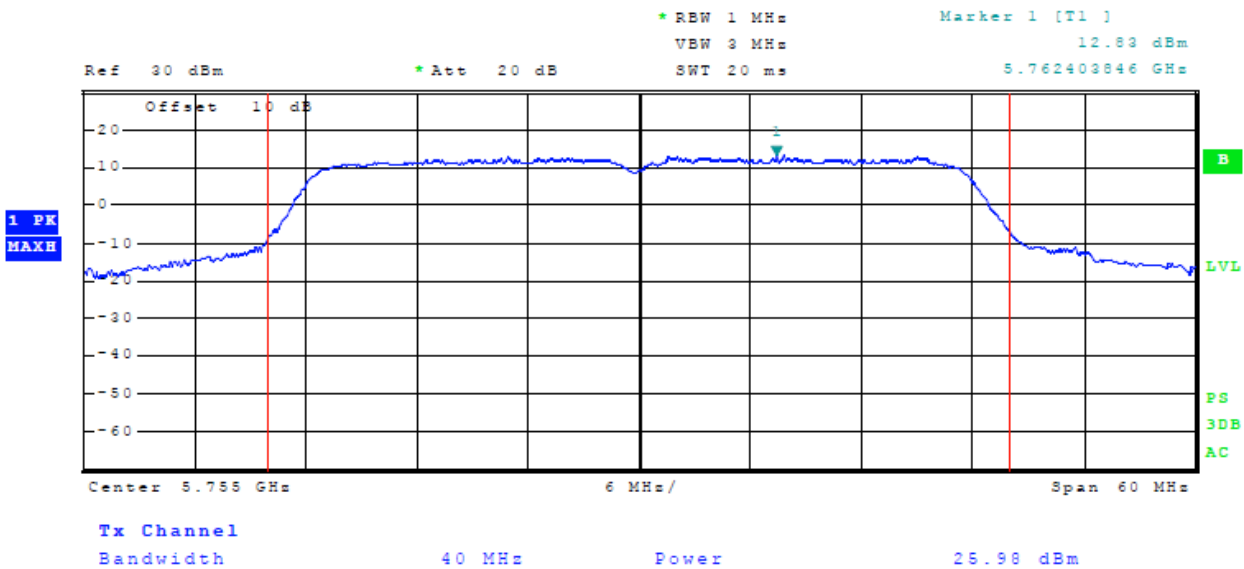


Figure 9 Plot of Antenna Port Conducted (Power, 5755 MHz, Chain 0, 40 MHz Mode)

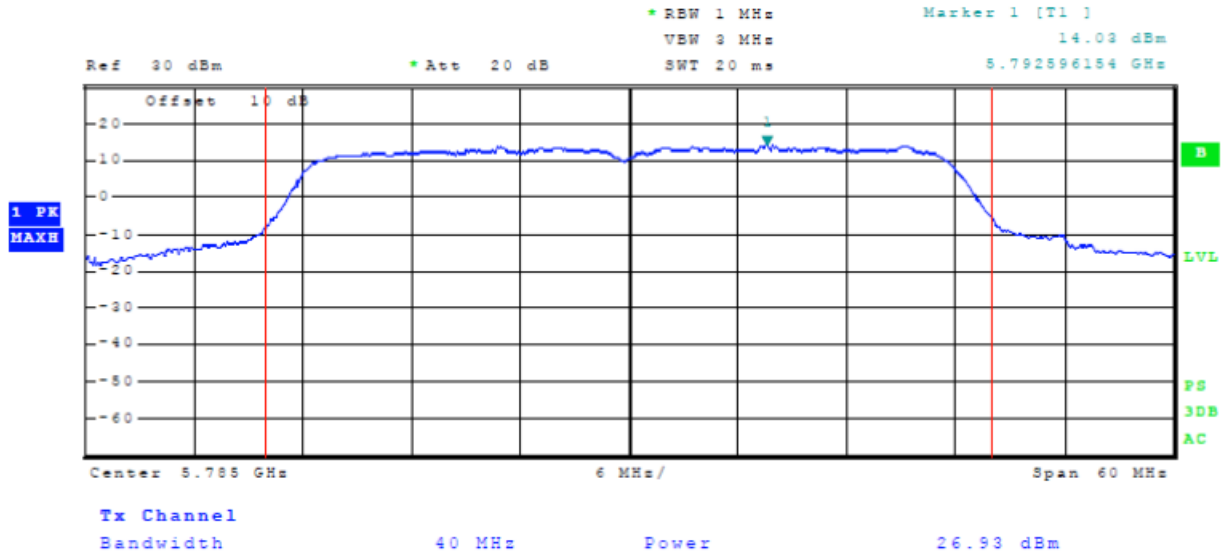


Figure 10 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 0, 40 MHz Mode)

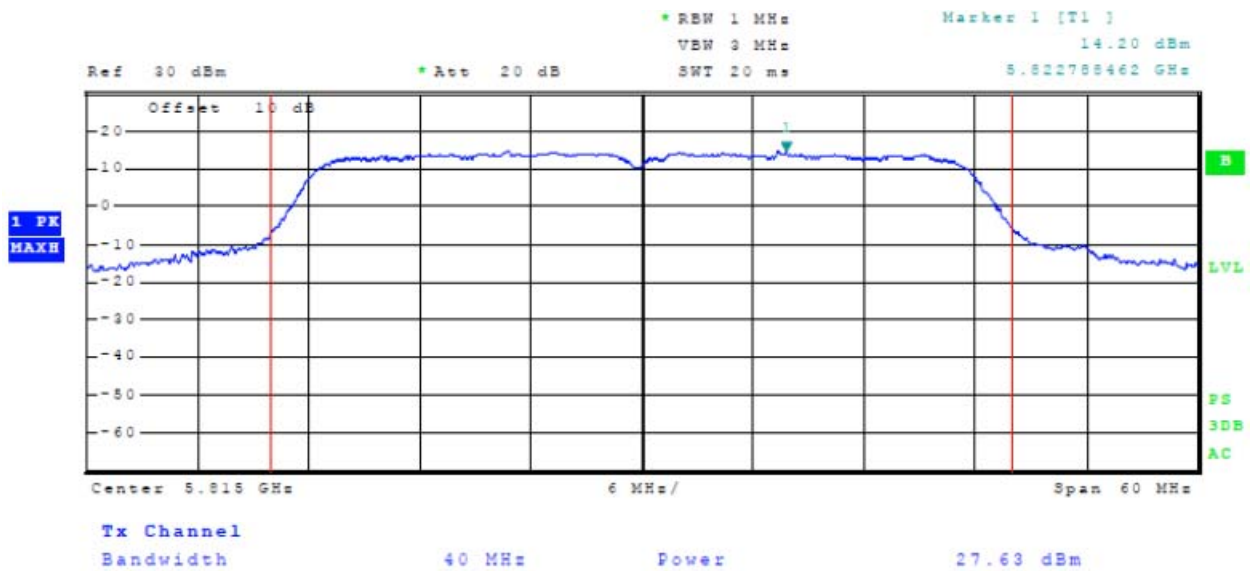


Figure 11 Plot of Antenna Port Conducted (Power, 5815 MHz, Chain 0, 40 MHz Mode)

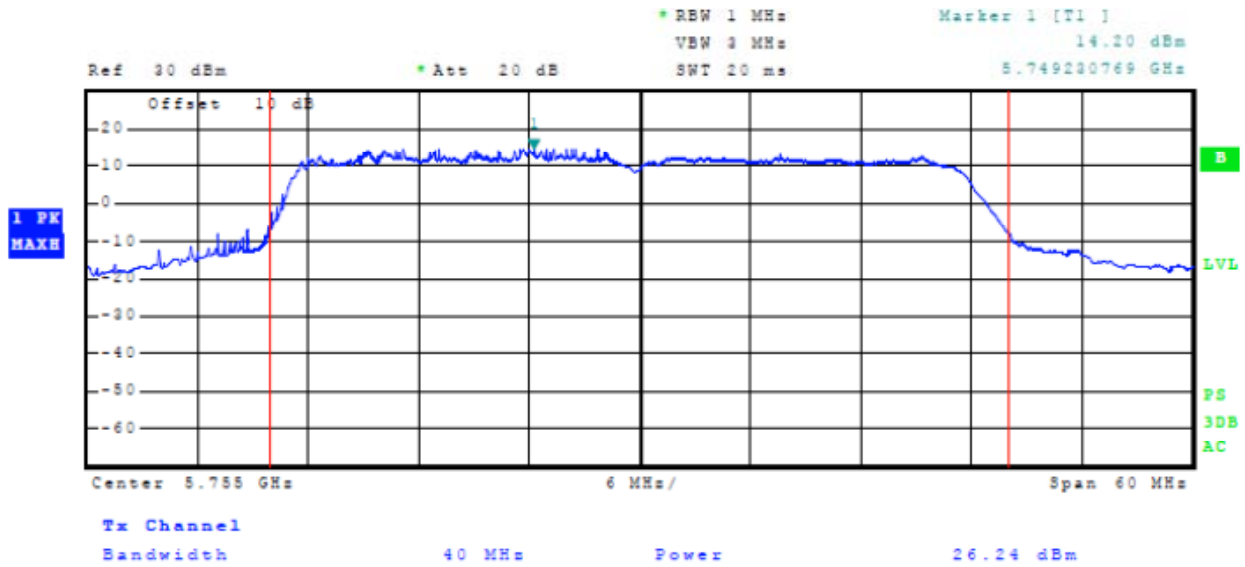


Figure 12 Plot of Antenna Port Conducted (Power, 5755 MHz, Chain 1, 40 MHz Mode)

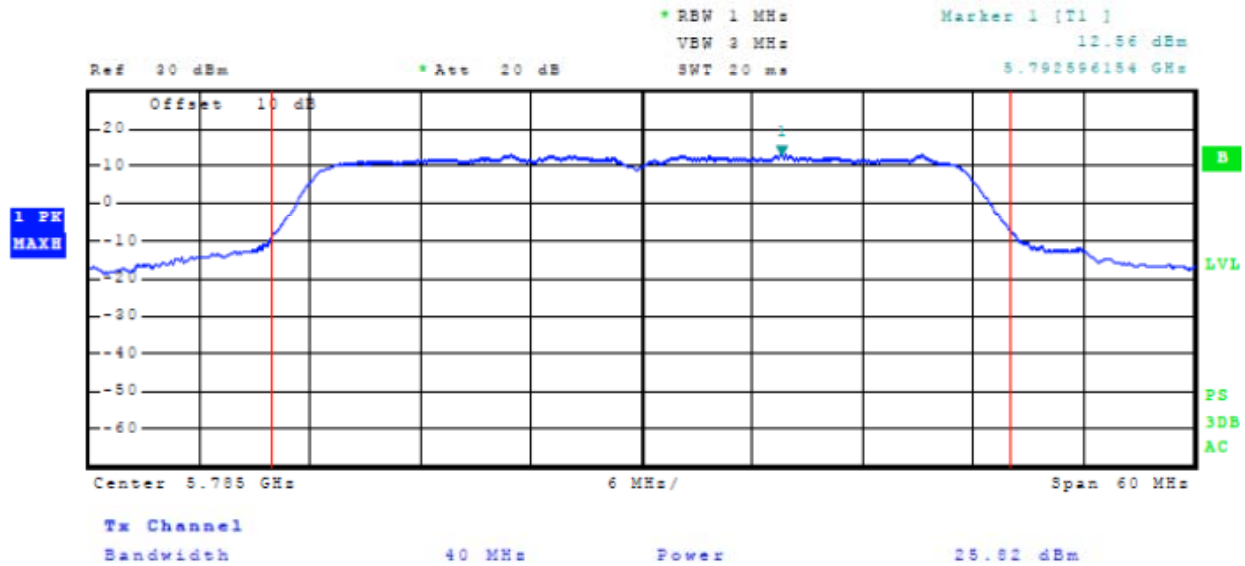


Figure 13 Plot of Antenna Port Conducted (Power, 5785 MHz, Chain 1, 40 MHz Mode)

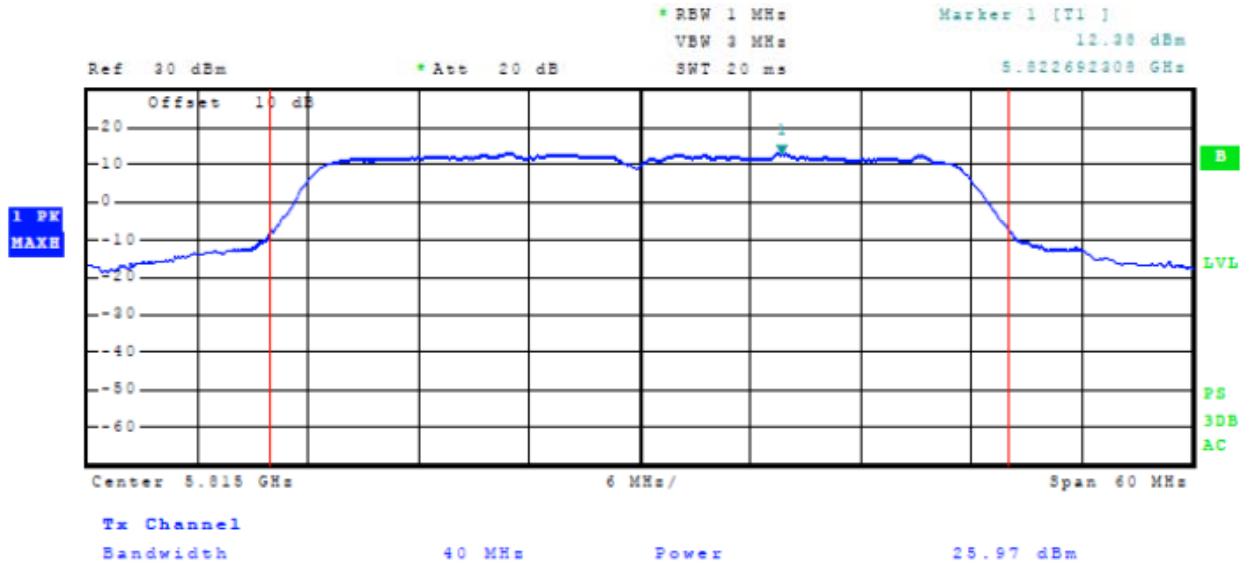


Figure 14 Plot of Antenna Port Conducted (Power, 5815 MHz, Chain 1, 40 MHz Mode)

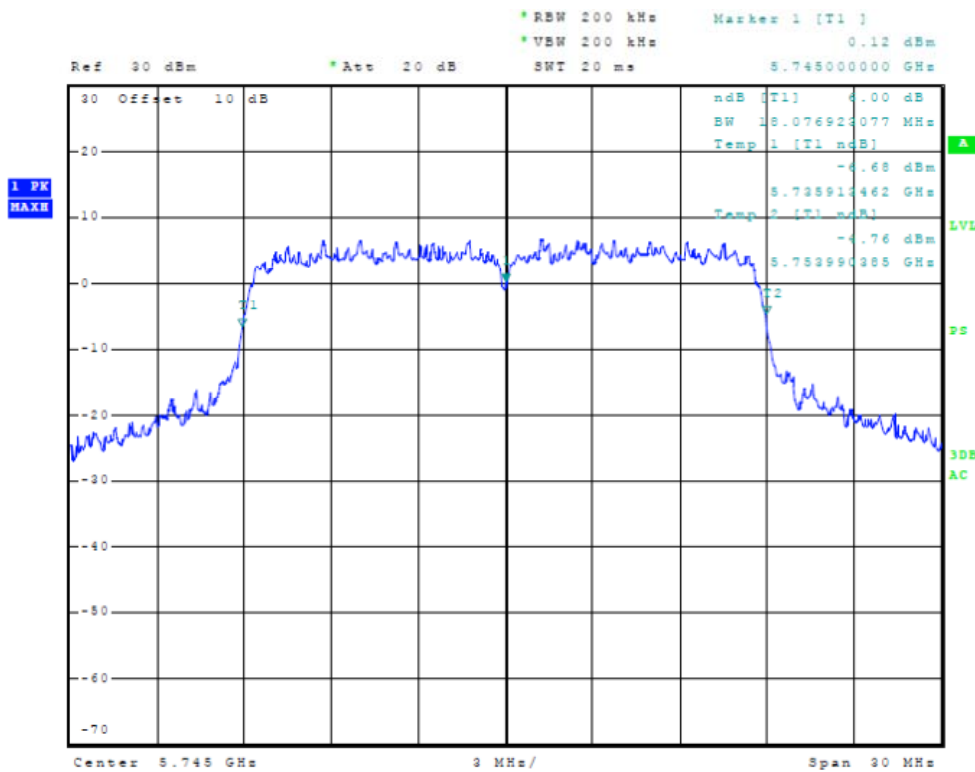


Figure 15 Plot of Antenna Port Conducted 6dB Band width (5745 MHz, Chain 0, 20 MHz Mode)

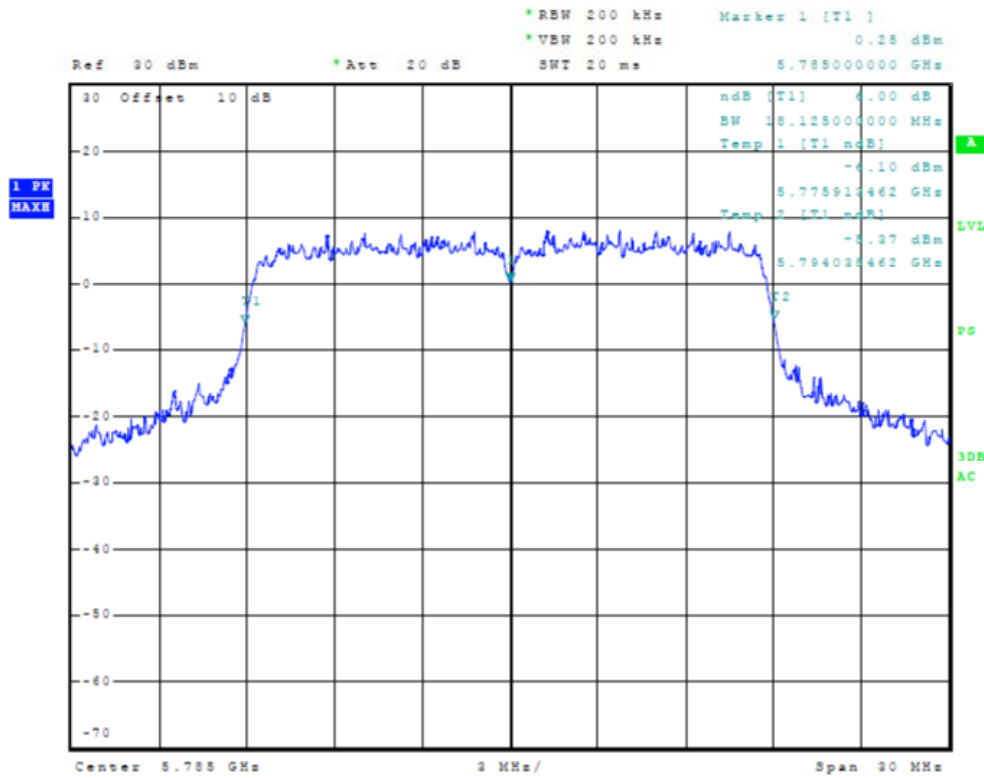


Figure 16 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 0, 20 MHz Mode)

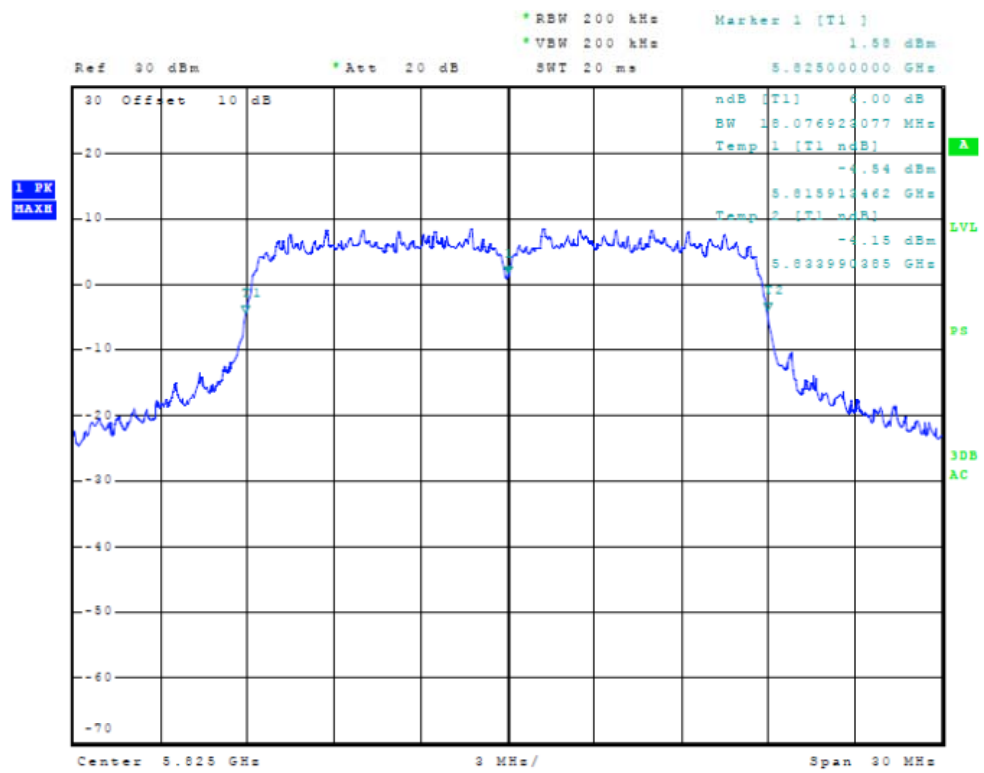


Figure 17 Plot of Antenna Port Conducted 6dB Band width (5825 MHz, Chain 0, 20 MHz Mode)

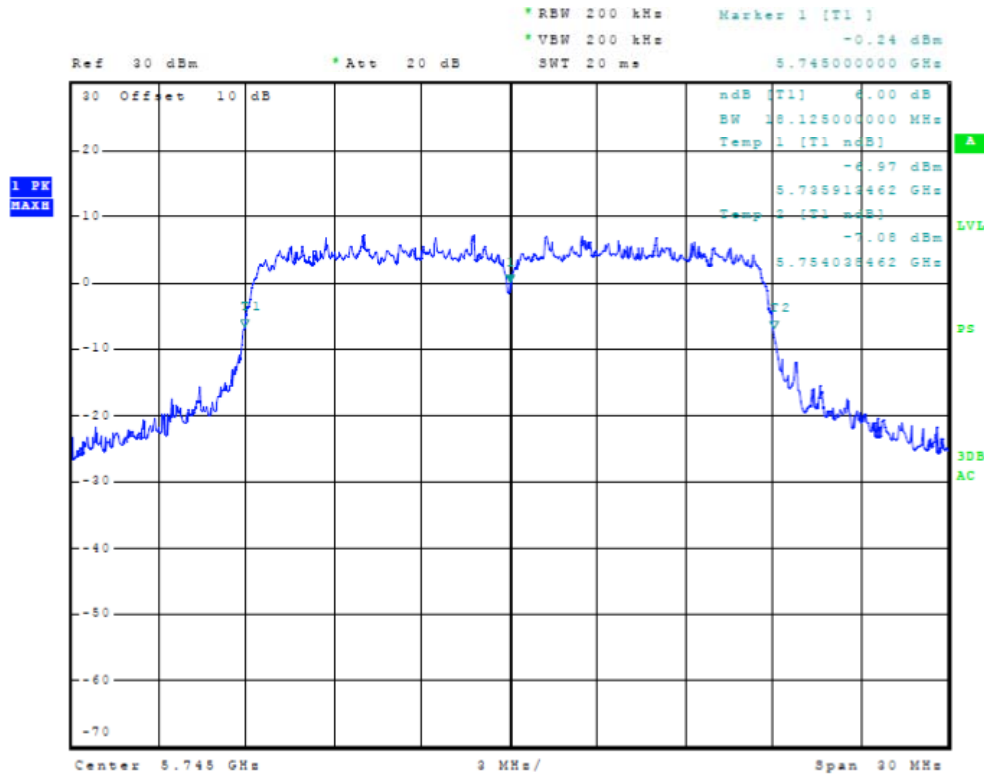


Figure 18 Plot of Antenna Port Conducted 6dB Band width (5745 MHz, Chain 1, 20 MHz Mode)

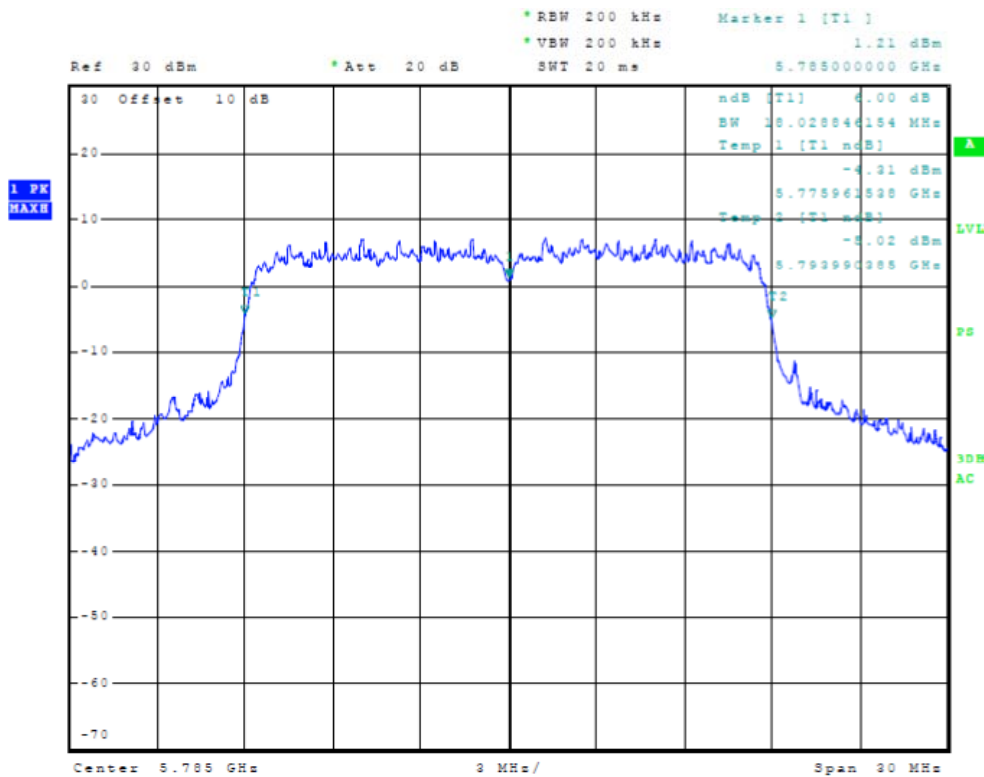


Figure 19 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 1, 20 MHz Mode)

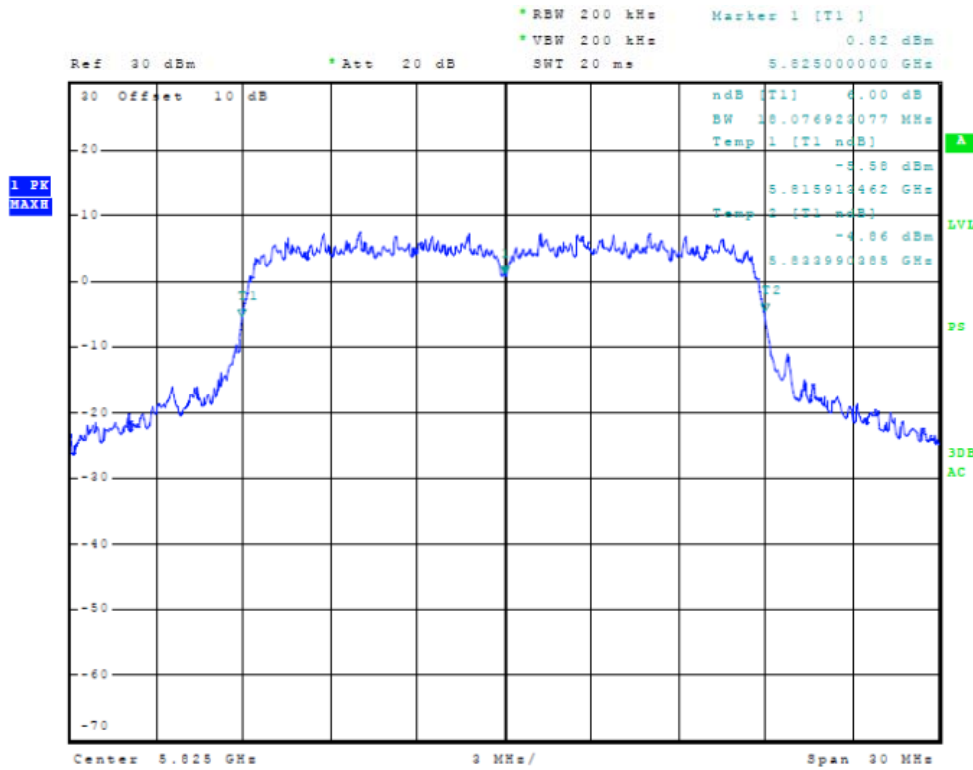


Figure 20 Plot of Antenna Port Conducted 6dB Band width (5825 MHz, Chain 1, 20 MHz Mode)

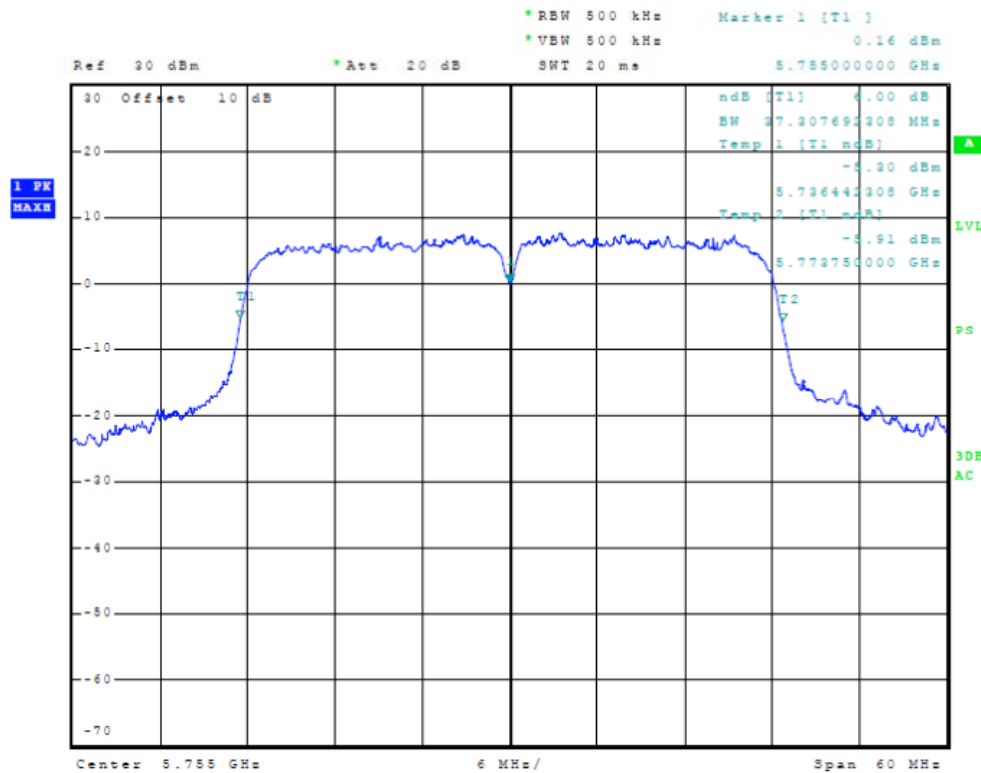


Figure 21 Plot of Antenna Port Conducted 6dB Band width (5755 MHz, Chain 0, 40 MHz Mode)

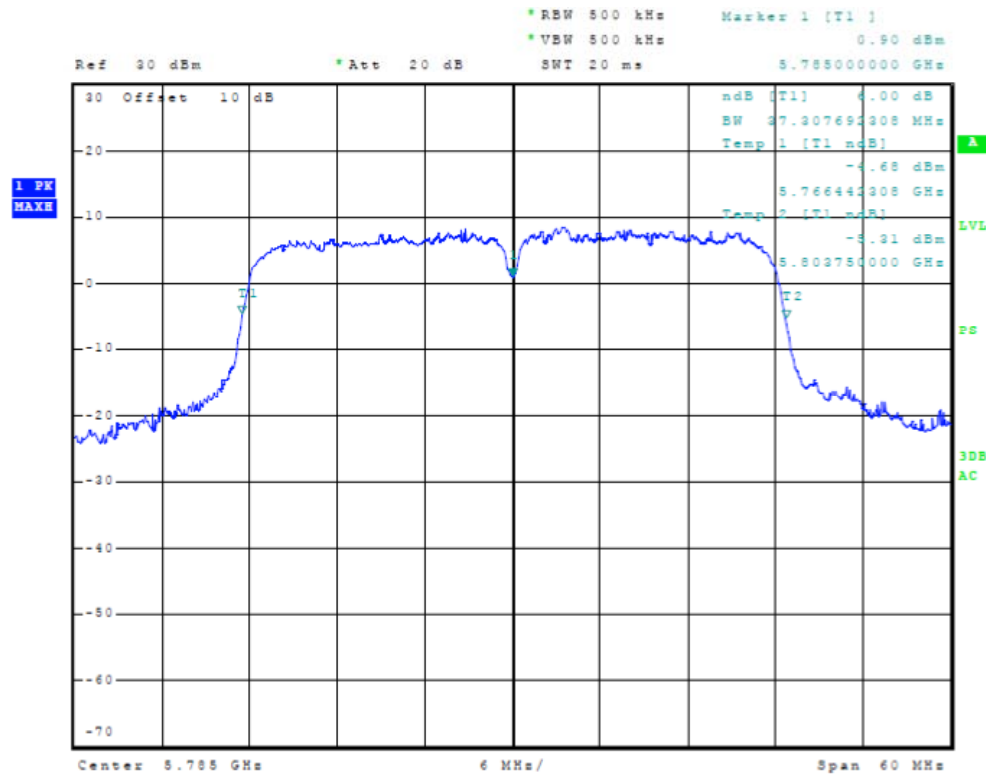


Figure 22 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 0, 40 MHz Mode)

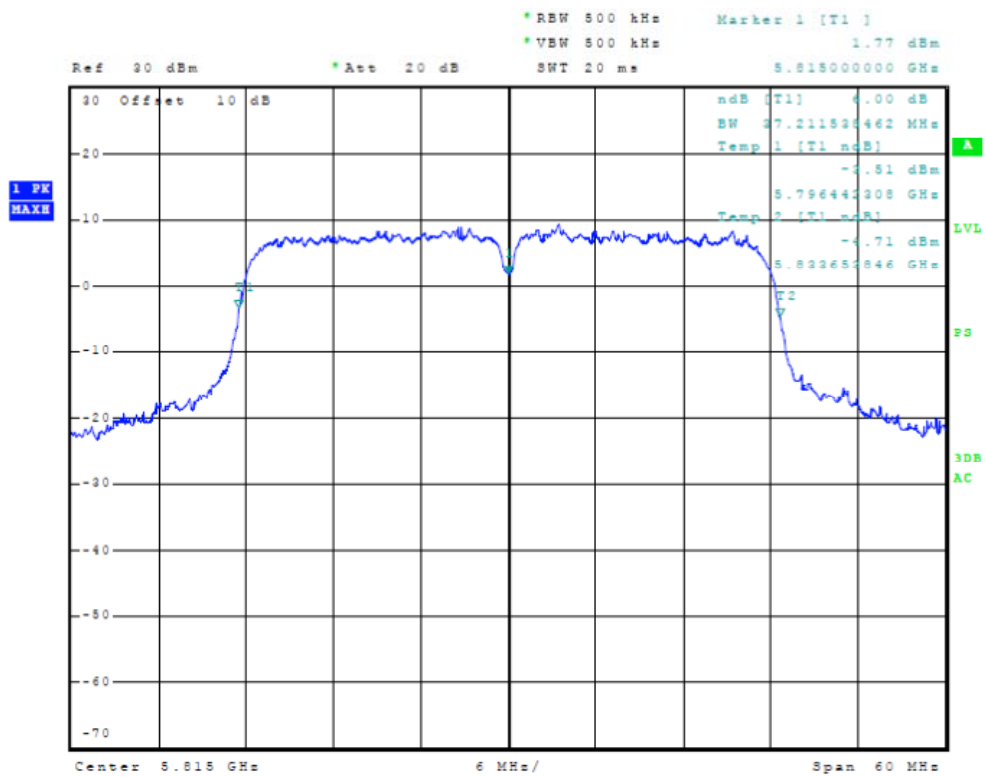


Figure 23 Plot of Antenna Port Conducted 6dB Band width (5815 MHz, Chain 0, 40 MHz Mode)

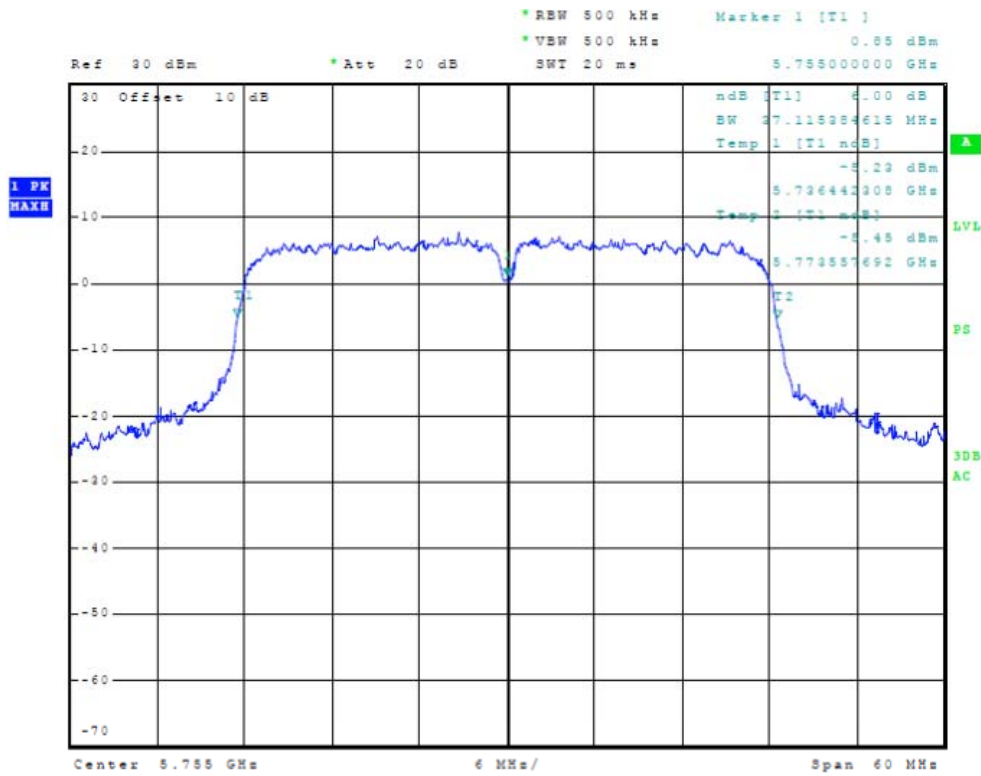


Figure 24 Plot of Antenna Port Conducted 6dB Band width (5755 MHz, Chain 1, 40 MHz Mode)

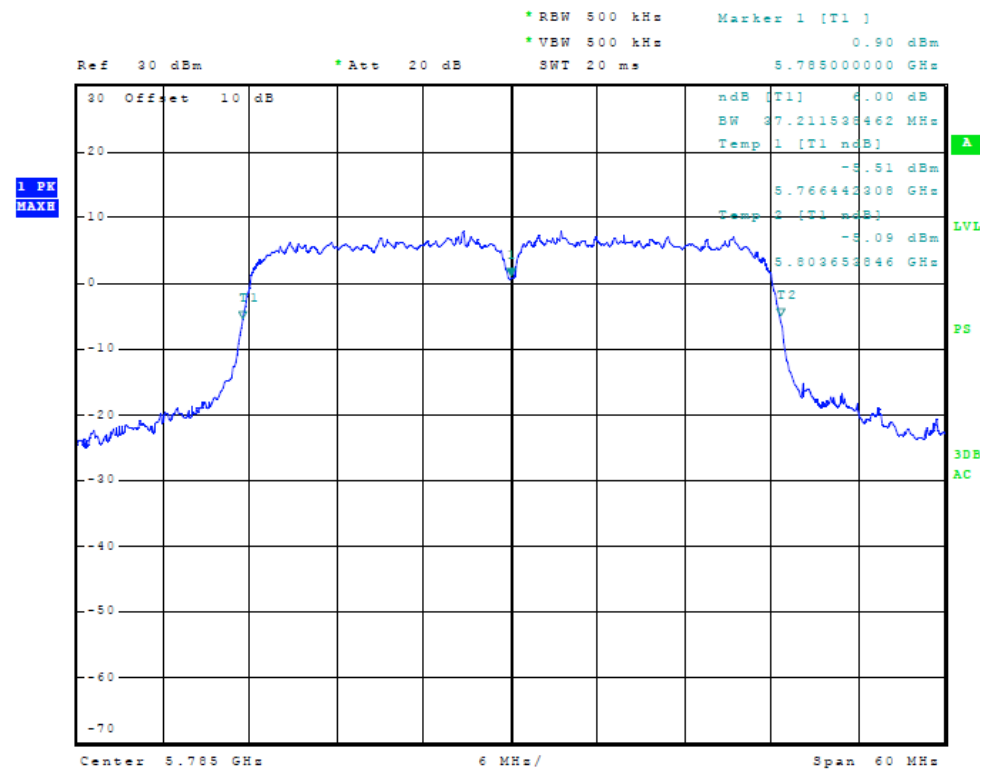


Figure 25 Plot of Antenna Port Conducted 6dB Band width (5785 MHz, Chain 1, 40 MHz Mode)

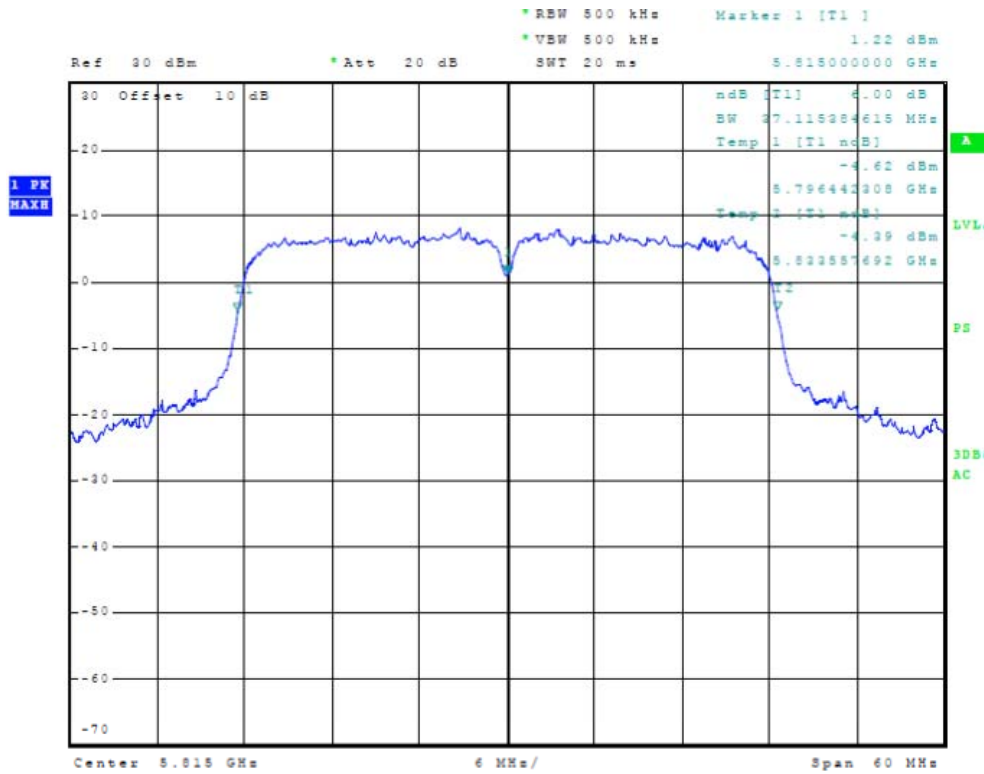


Figure 26 Plot of Antenna Port Conducted 6dB Band width (5815 MHz, Chain 1, 40 MHz Mode)

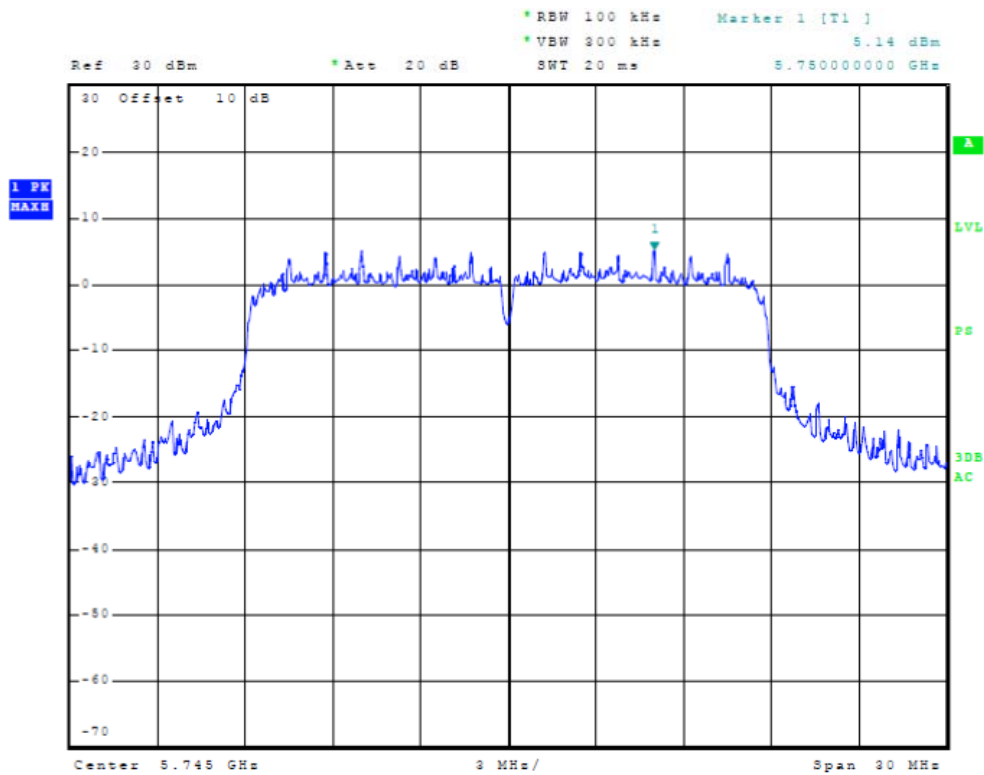


Figure 27 Plot of Power Spectral Density (5745 MHz, Chain 0, 20 MHz Mode)

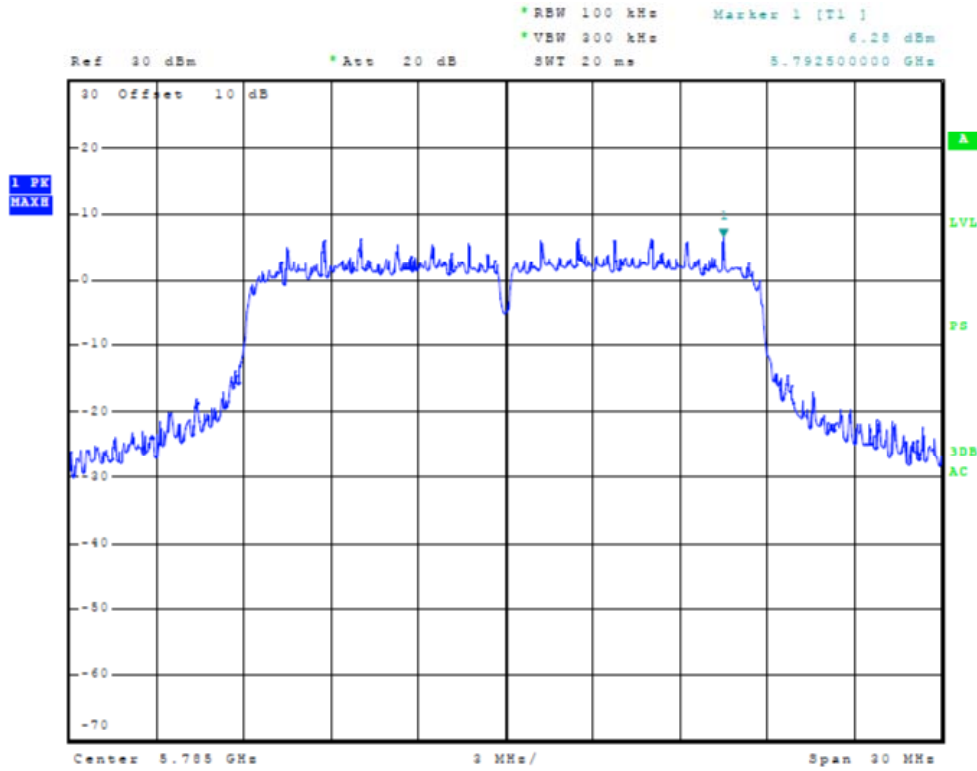


Figure 28 Plot of Power Spectral Density (5785 MHz, Chain 0, 20 MHz Mode)

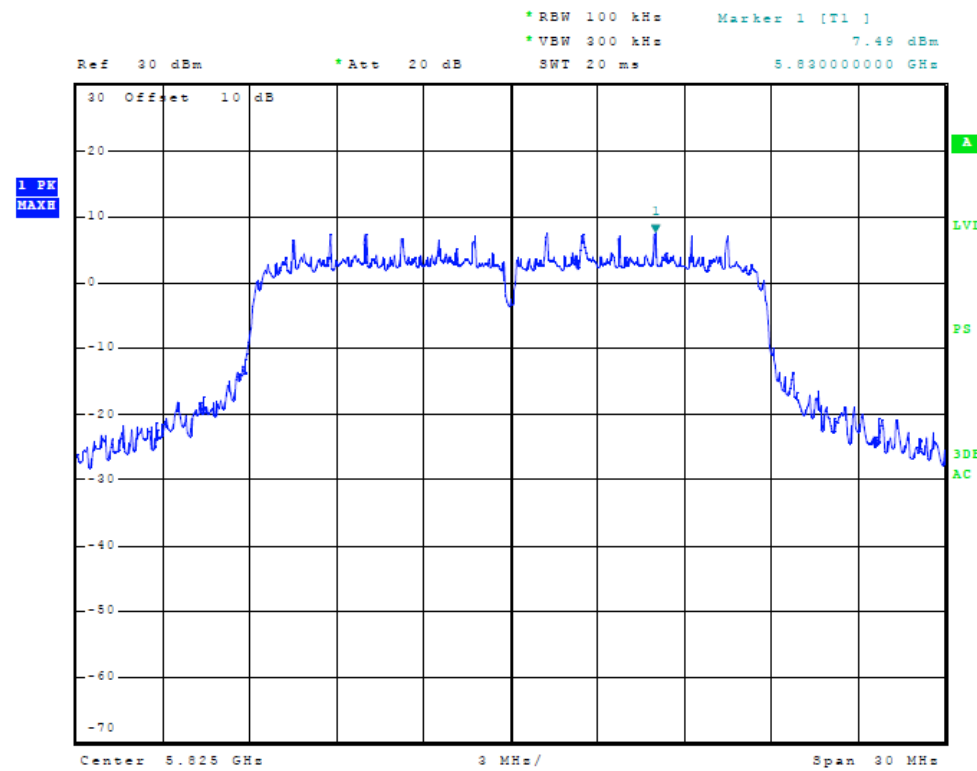


Figure 29 Plot of Power Spectral Density (5825 MHz, Chain 0, 20 MHz Mode)

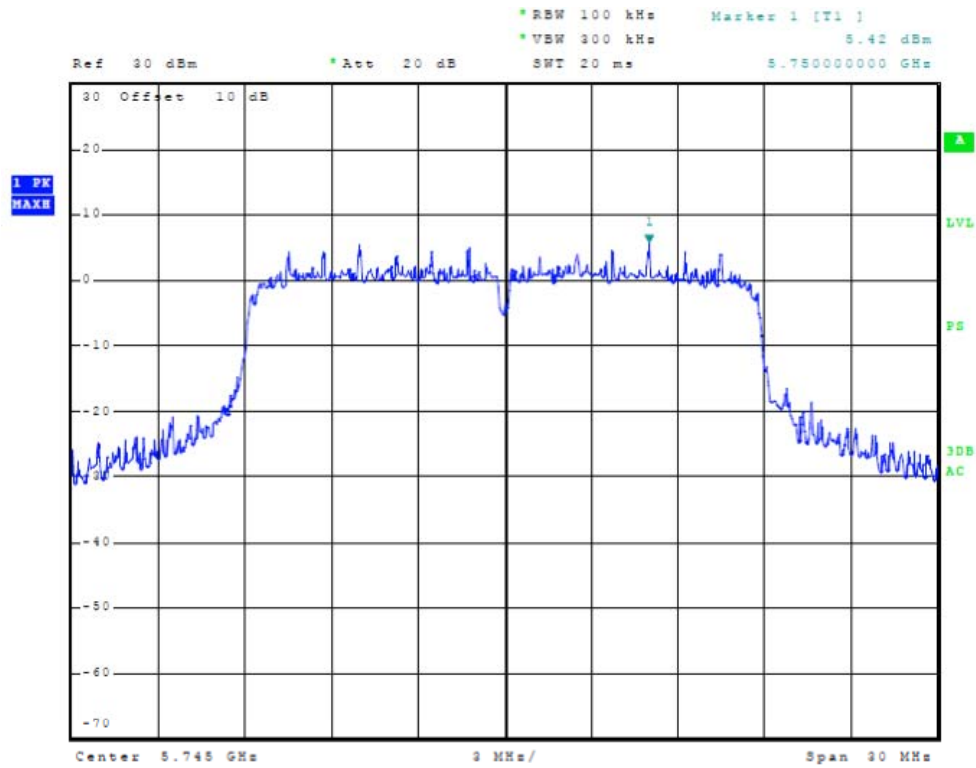


Figure 30 Plot of Power Spectral Density (5745 MHz, Chain 1, 20 MHz Mode)

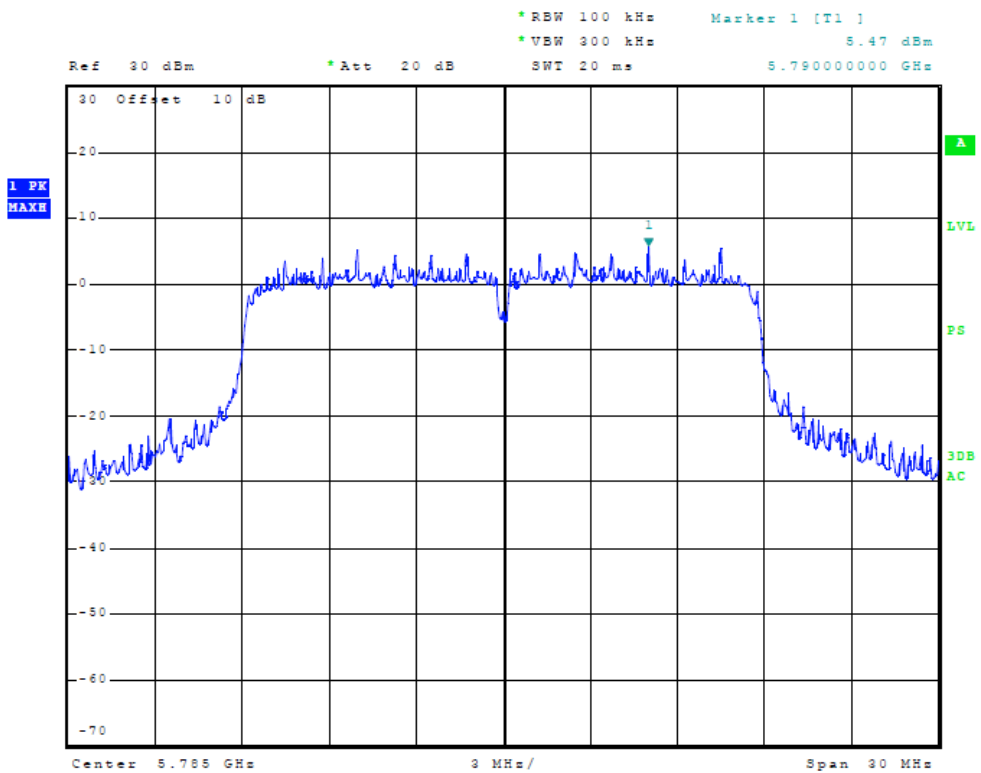


Figure 31 Plot of Power Spectral Density (5785 MHz, Chain 1, 20 MHz Mode)

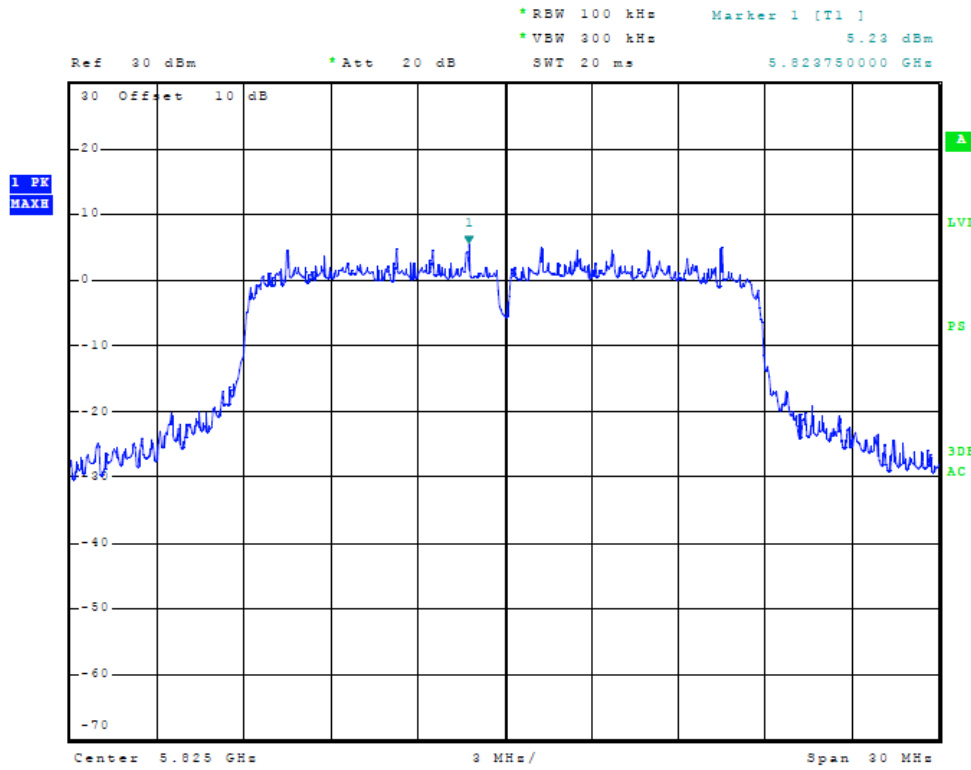


Figure 32 Plot of Power Spectral Density (5825 MHz, Chain 1, 20 MHz Mode)

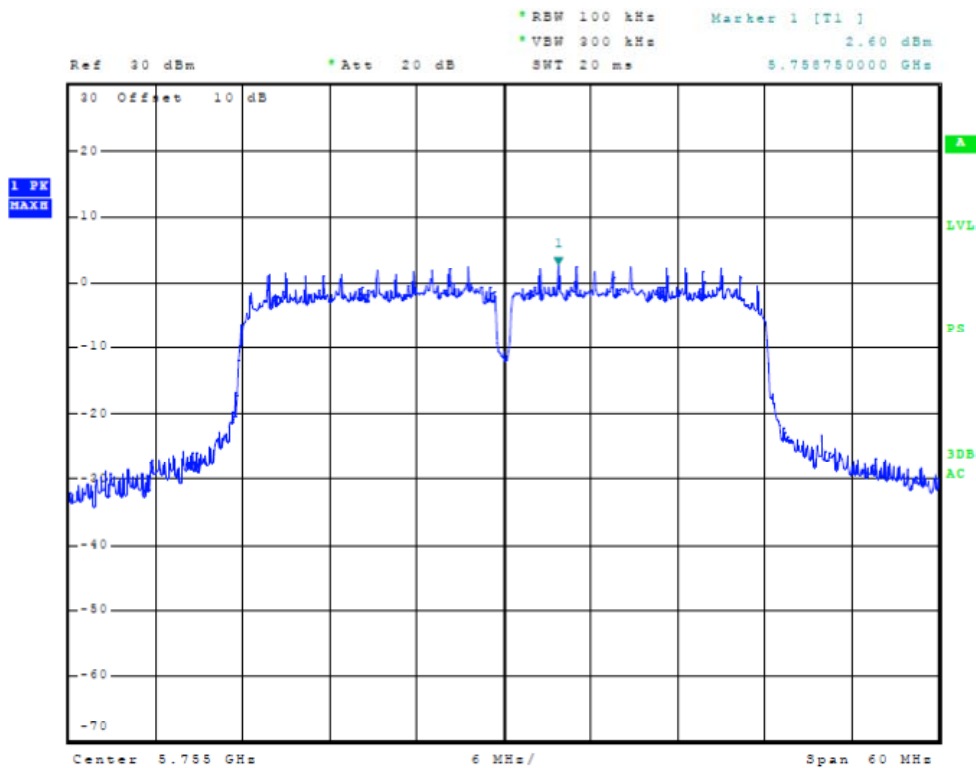


Figure 33 Plot of Power Spectral Density (5755 MHz, Chain 0, 40 MHz Mode)

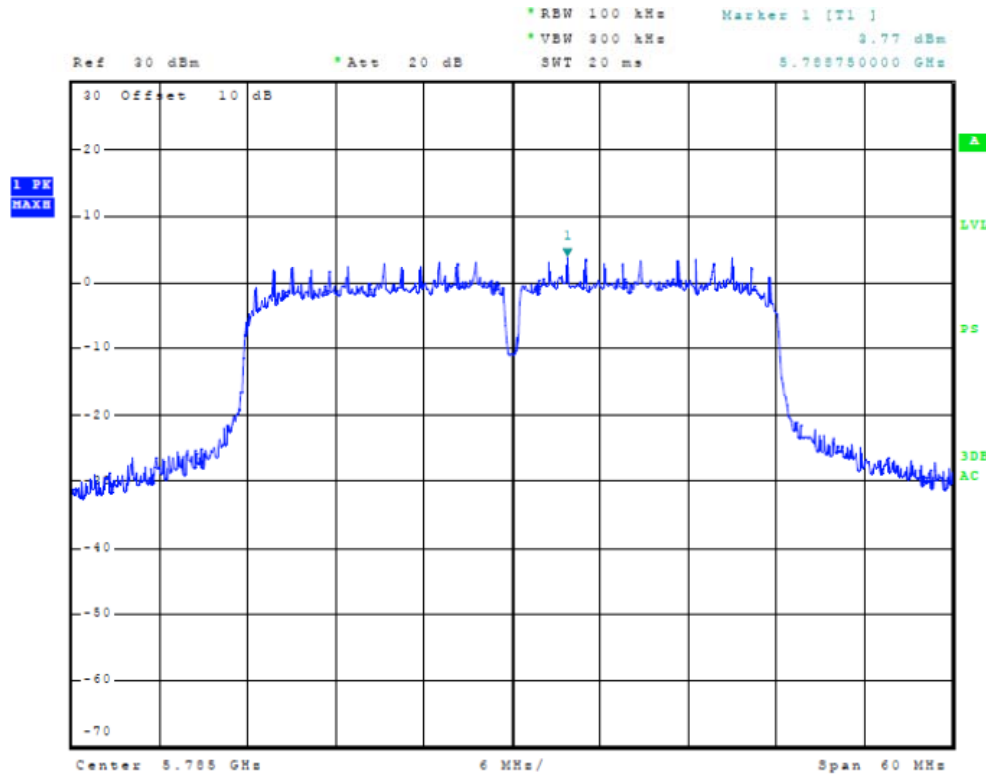


Figure 34 Plot of Power Spectral Density (5785 MHz, Chain 0, 40 MHz Mode)

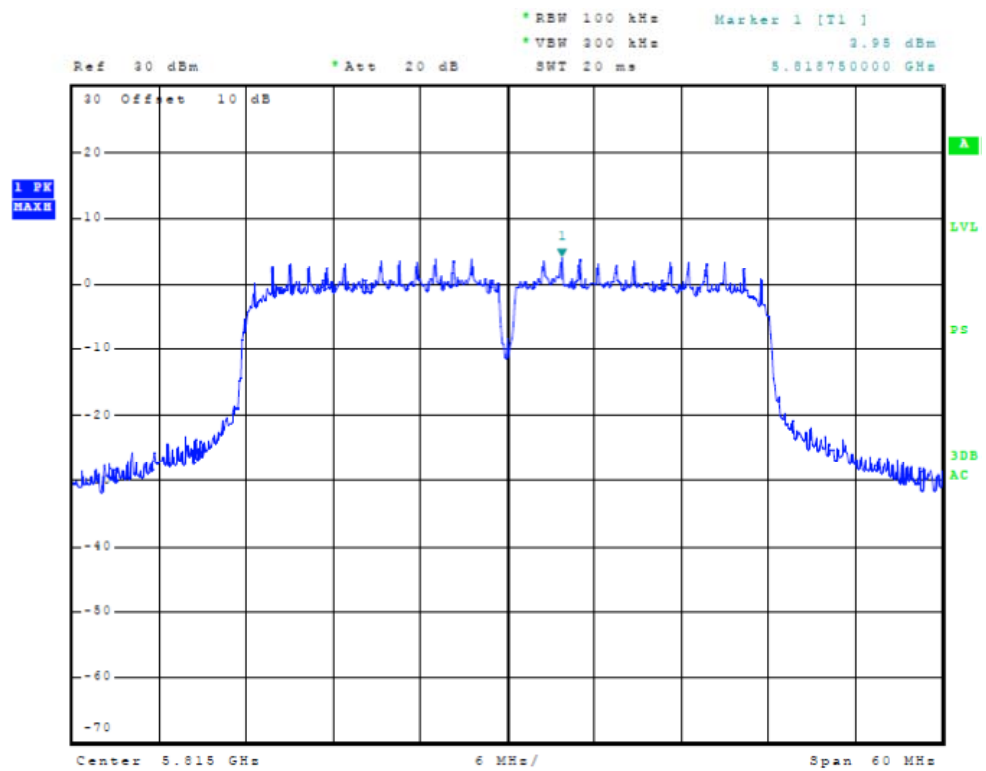


Figure 35 Plot of Power Spectral Density (5815 MHz, Chain 0, 40 MHz Mode)

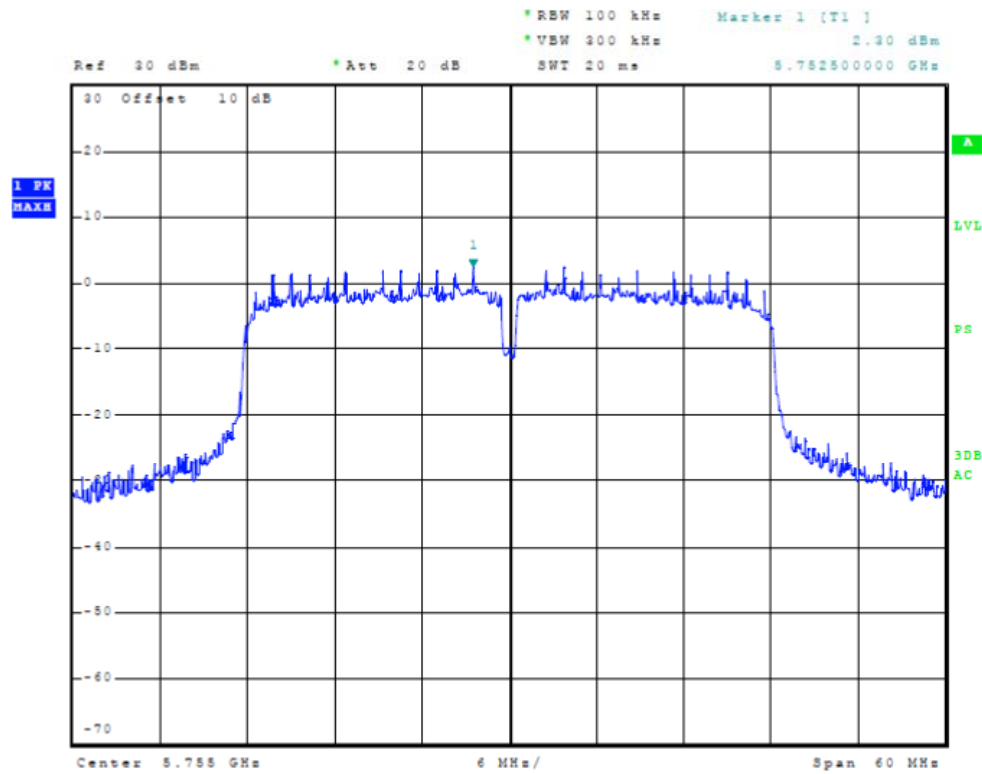


Figure 36 Plot of Power Spectral Density (5755 MHz, Chain 1, 40 MHz Mode)

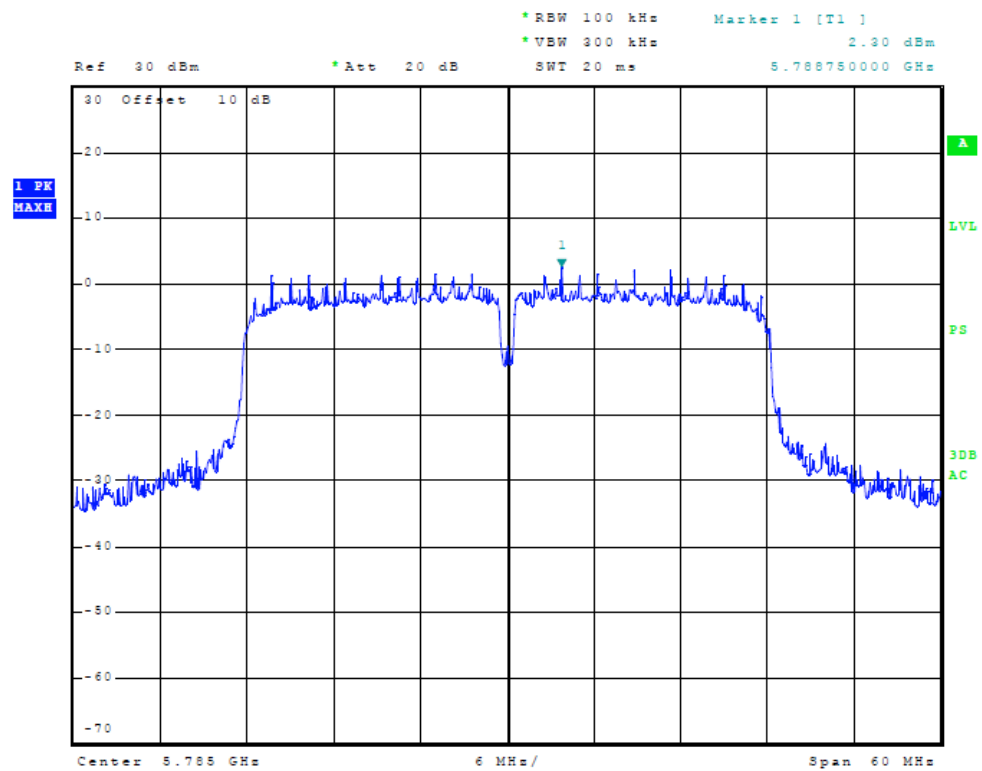


Figure 37 Plot of Power Spectral Density (5785 MHz, Chain 1, 40 MHz Mode)

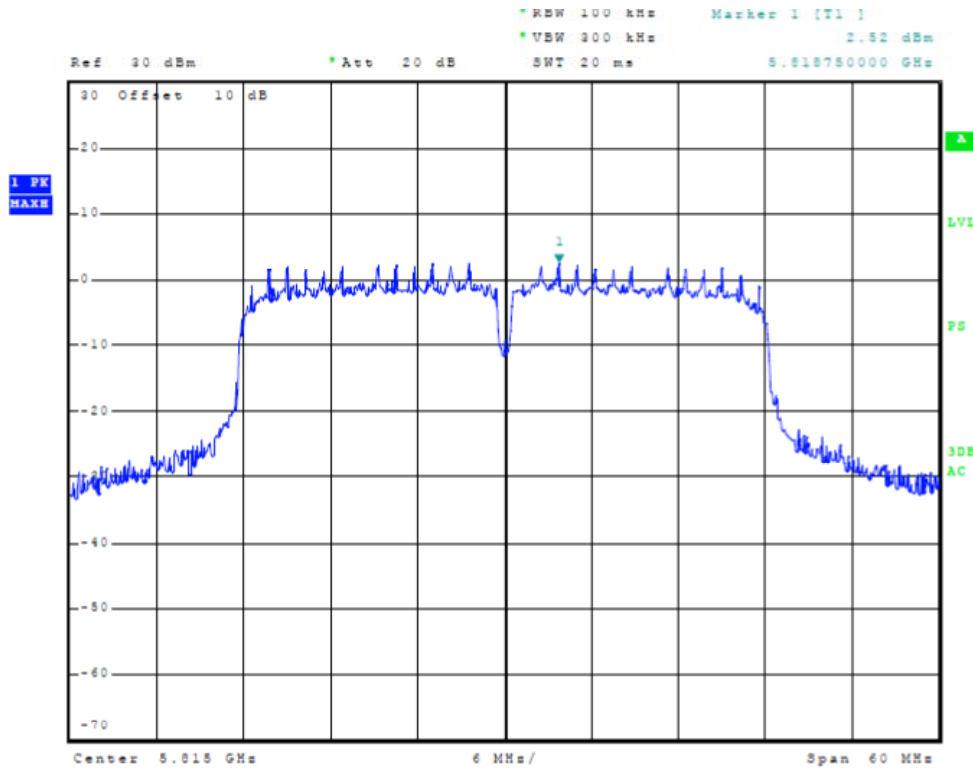


Figure 38 Plot of Power Spectral Density (5815 MHz, Chain 1, 40 MHz Mode)

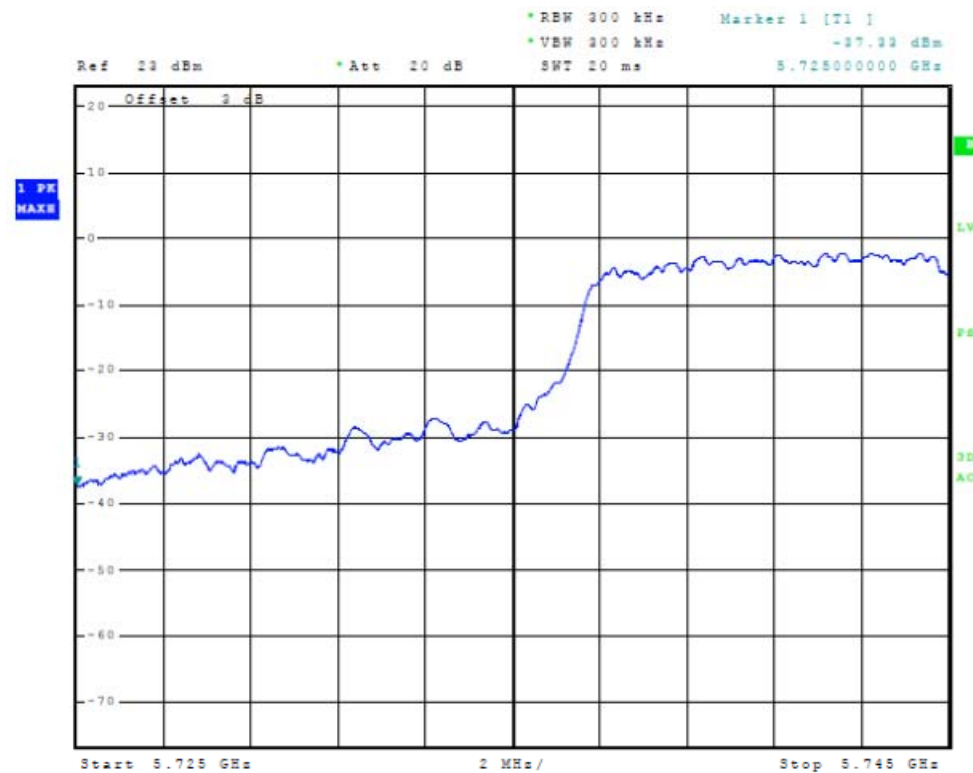


Figure 39 Plot of Low Band Edge Compliance (5745 MHz, Chain 0, 20 MHz Mode)

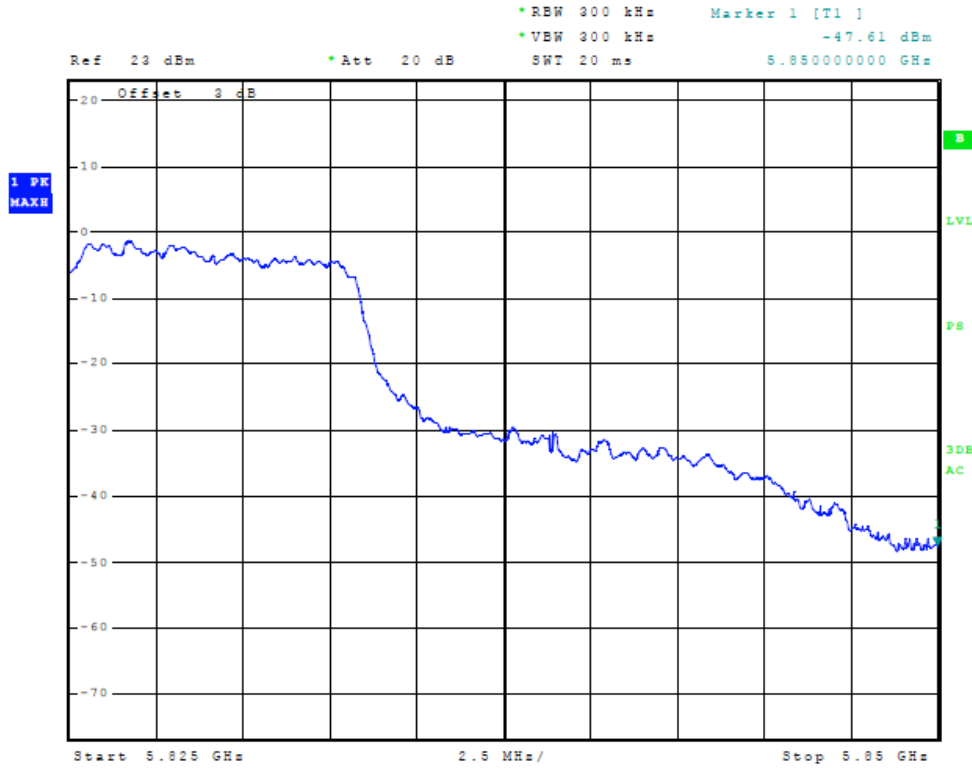


Figure 40 Plot of High Band Edge Compliance (5825 MHz, Chain 0, 20 MHz Mode)

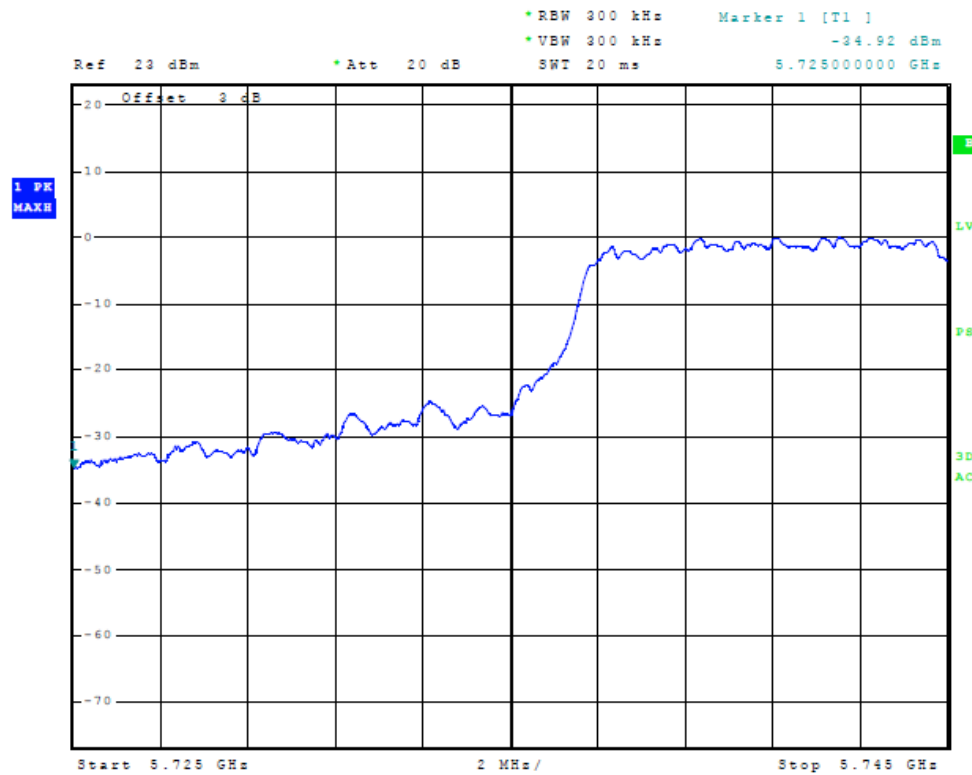


Figure 41 Plot of Low Band Edge Compliance (5745 MHz, Chain 1, 20 MHz Mode)

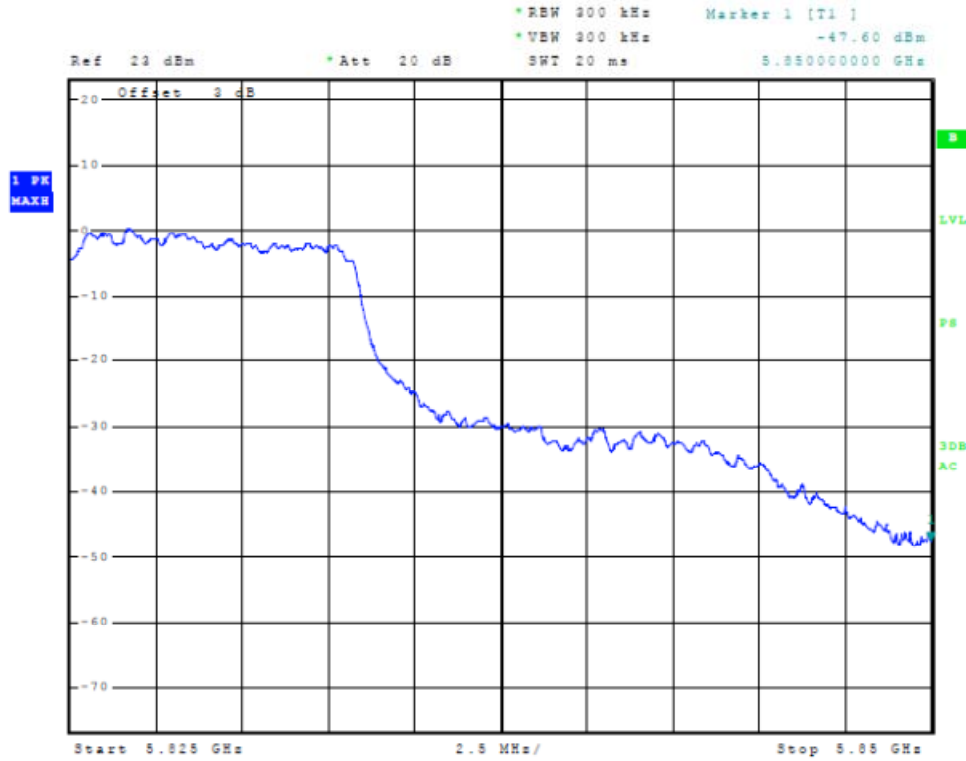


Figure 42 Plot of High Band Edge Compliance (5825 MHz, Chain 1, 20 MHz Mode)

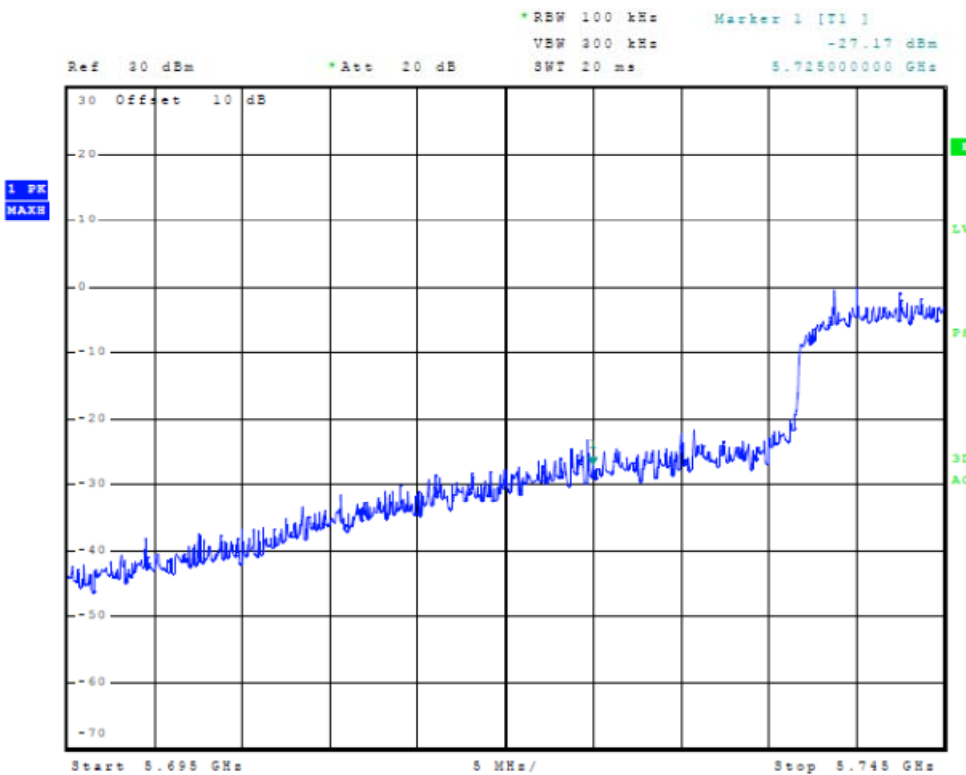


Figure 43 Plot of Low Band Edge Compliance (5755 MHz, Chain 0, 40 MHz Mode)

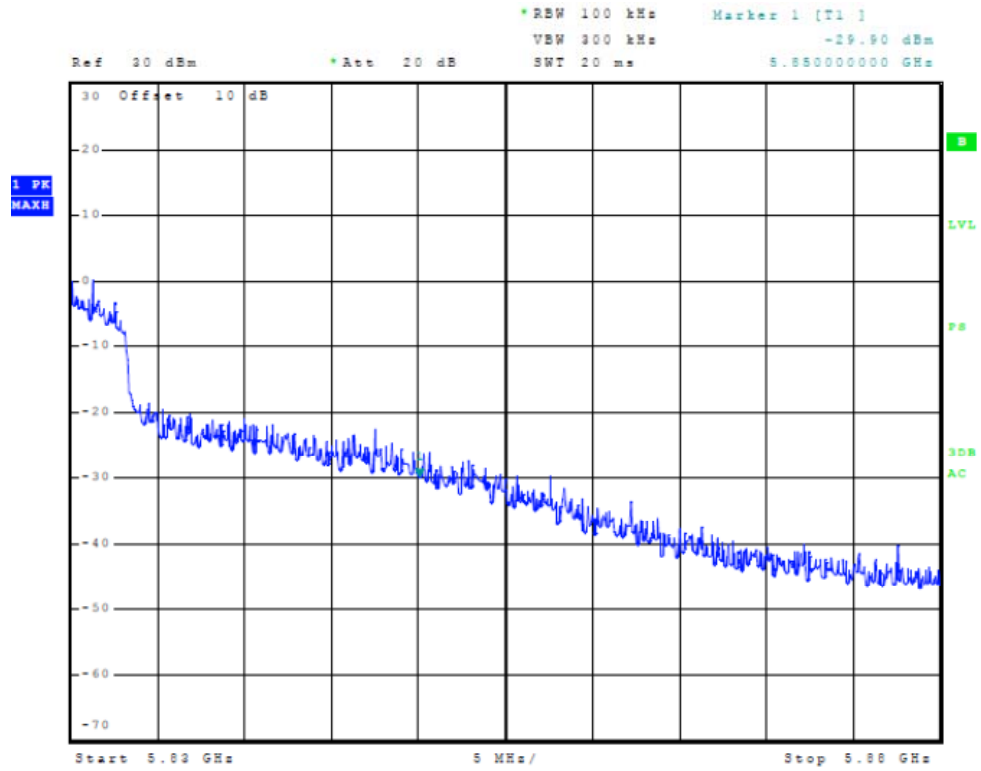


Figure 44 Plot of High Band Edge Compliance (5815 MHz, Chain 0, 40 MHz Mode)

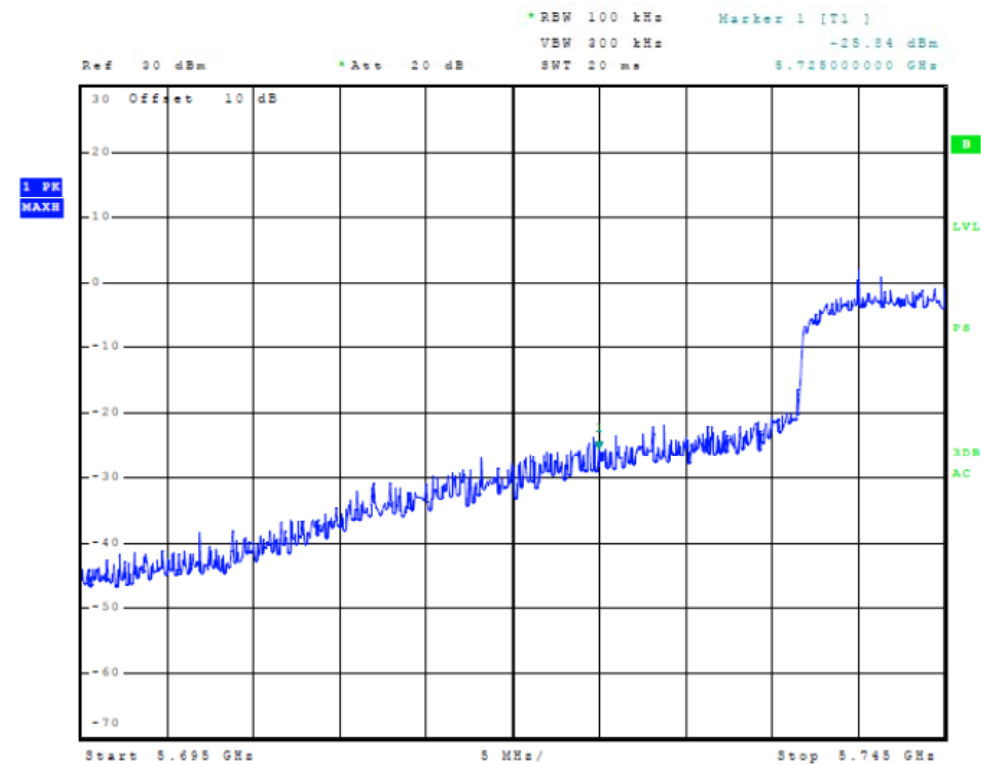


Figure 45 Plot of Low Band Edge Compliance (5755 MHz, Chain 1, 40 MHz Mode)

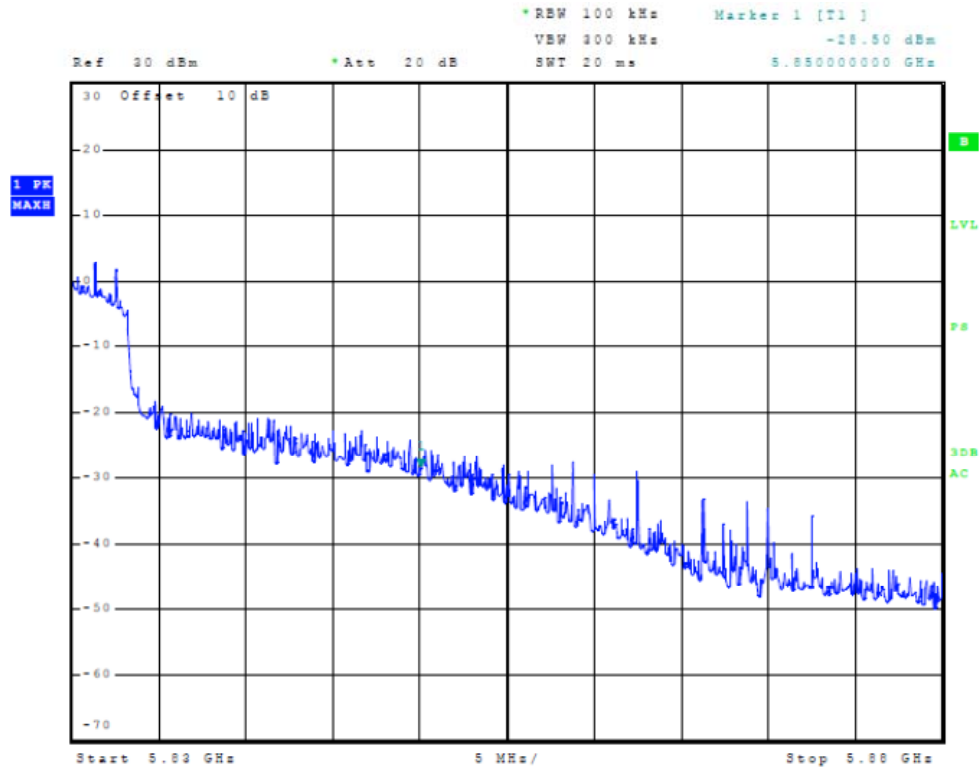


Figure 46 Plot of High Band Edge Compliance (5815 MHz, Chain 1, 40 MHz Mode)

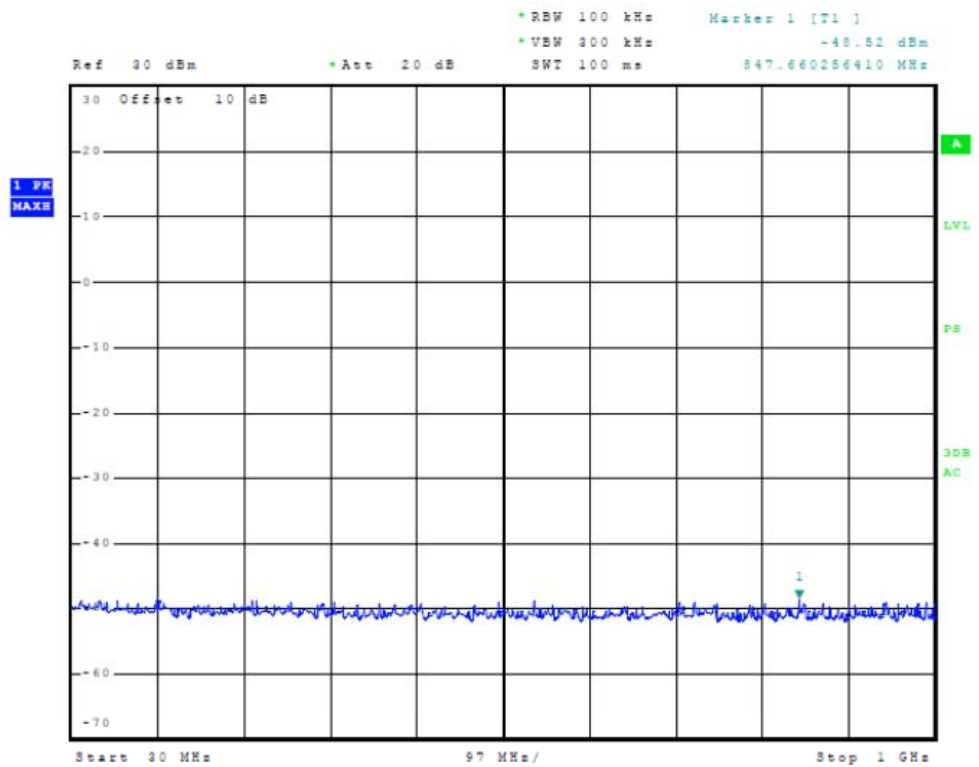


Figure 47 Plot of Antenna Port Conducted Emissions (Chain 0)

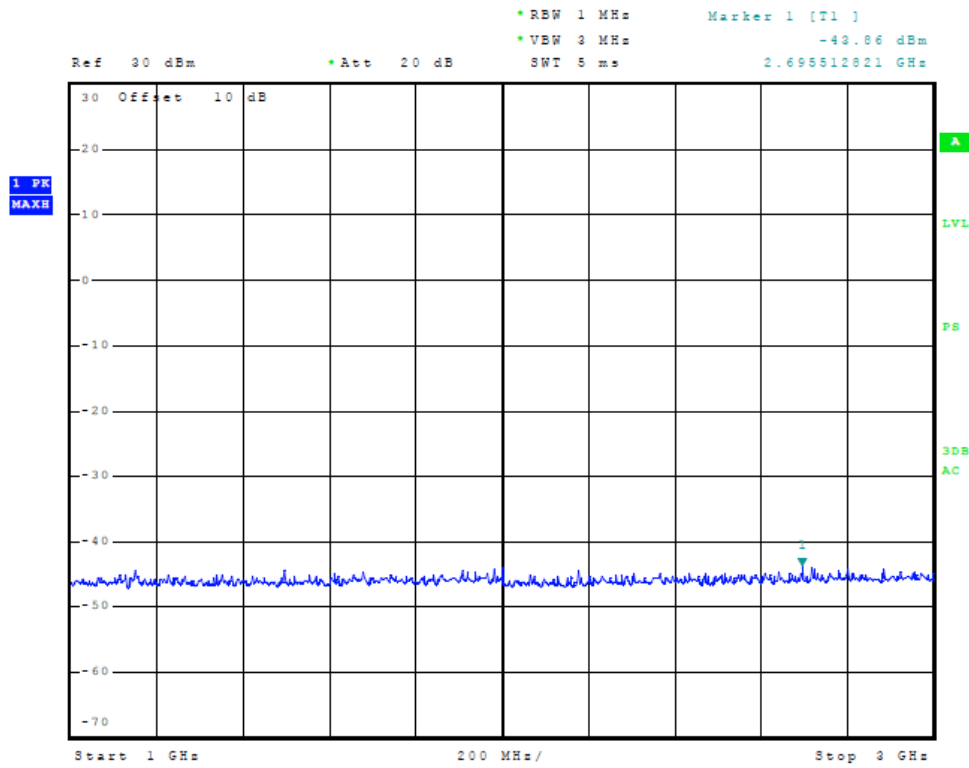


Figure 48 Plot of Antenna Port Conducted Emissions (Chain 0)

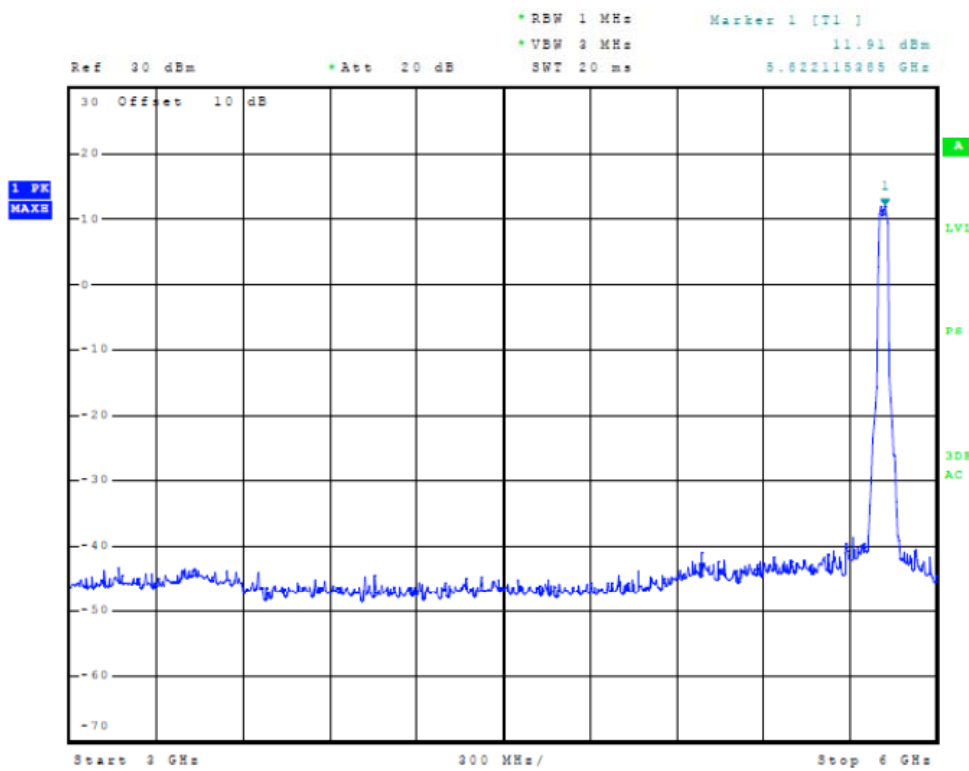


Figure 49 Plot of Antenna Port Conducted Emissions (Chain 0)

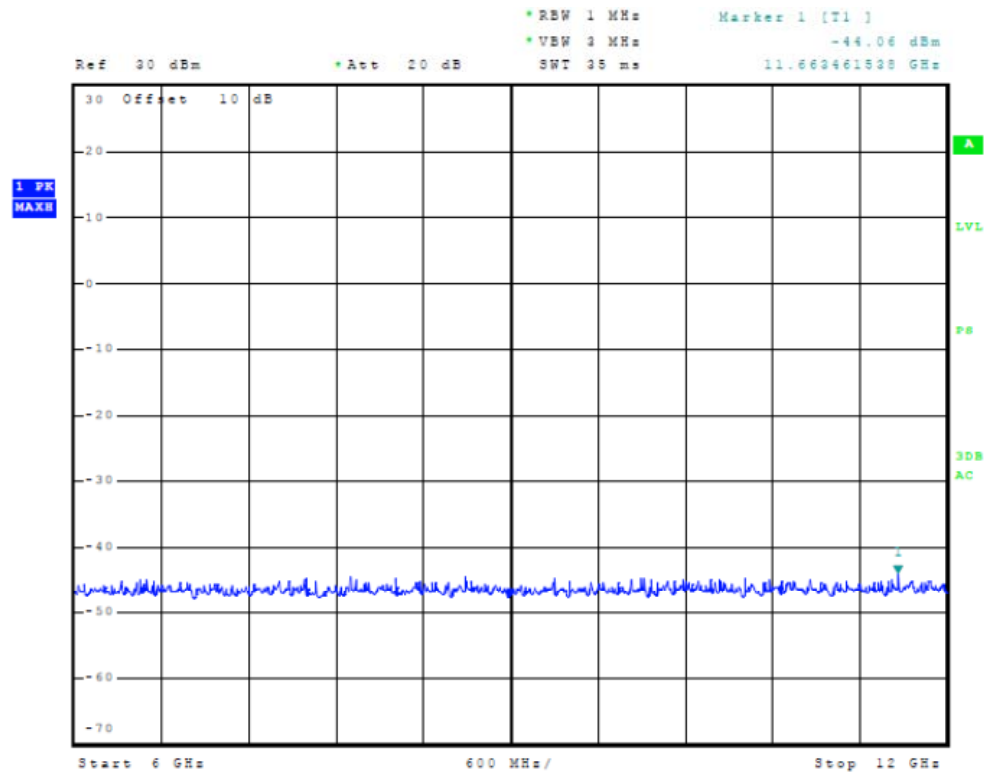


Figure 50 Plot of Antenna Port Conducted Emissions (Chain 0)

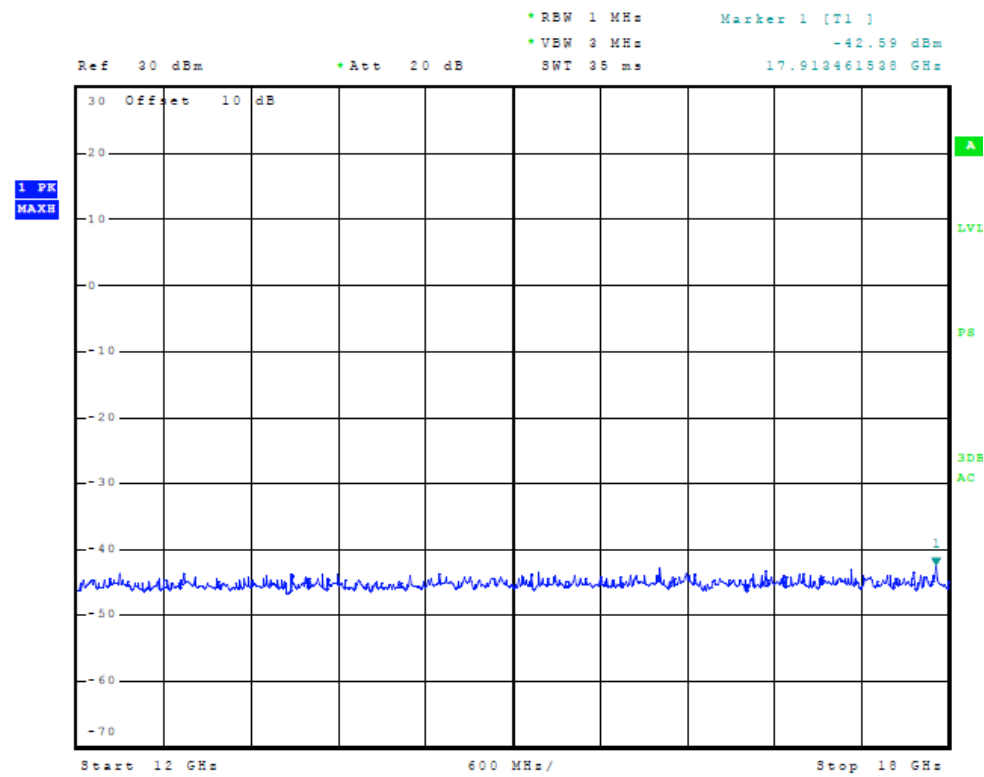


Figure 51 Plot of Antenna Port Conducted Emissions (Chain 0)

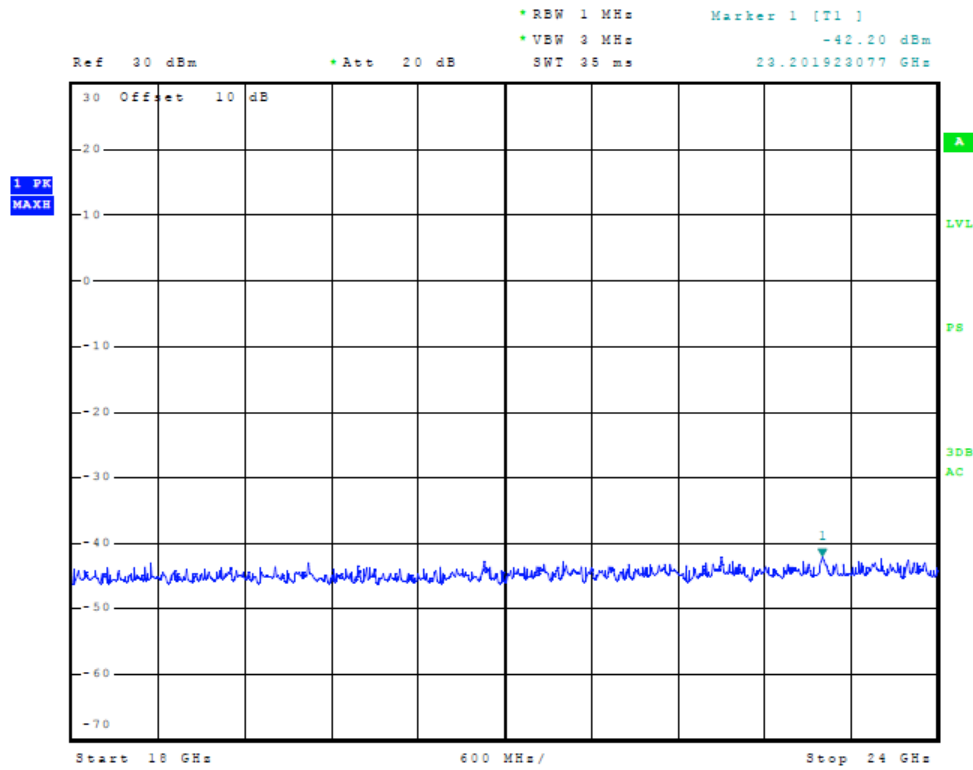


Figure 52 Plot of Antenna Port Conducted Emissions (Chain 0)

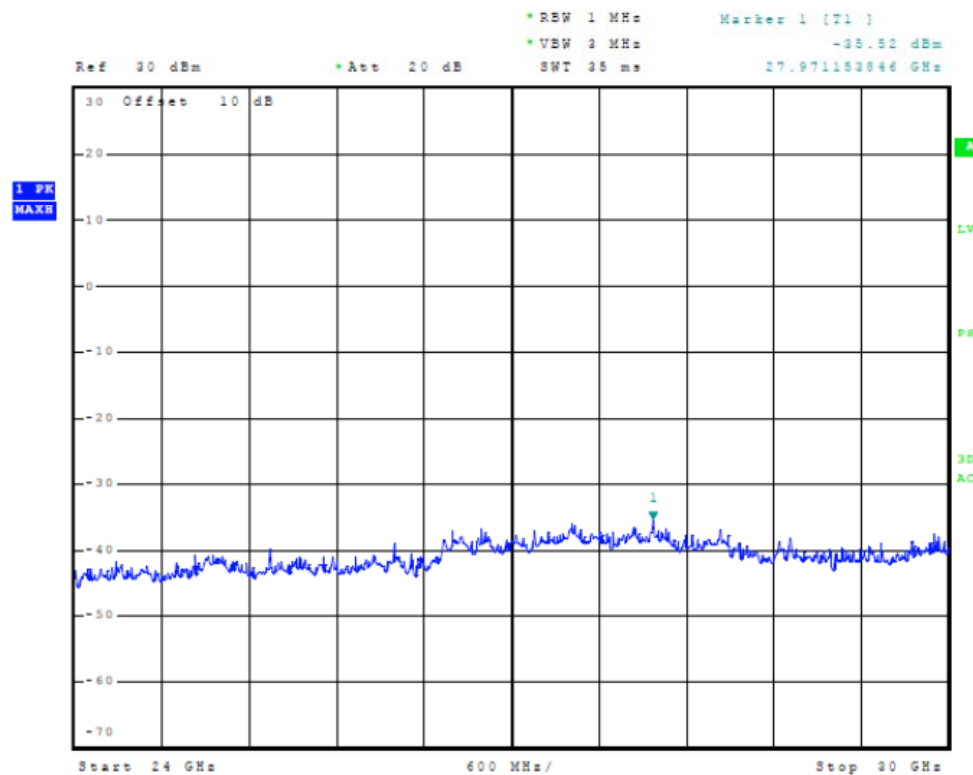


Figure 53 Plot of Antenna Port Conducted Emissions (Chain 0)

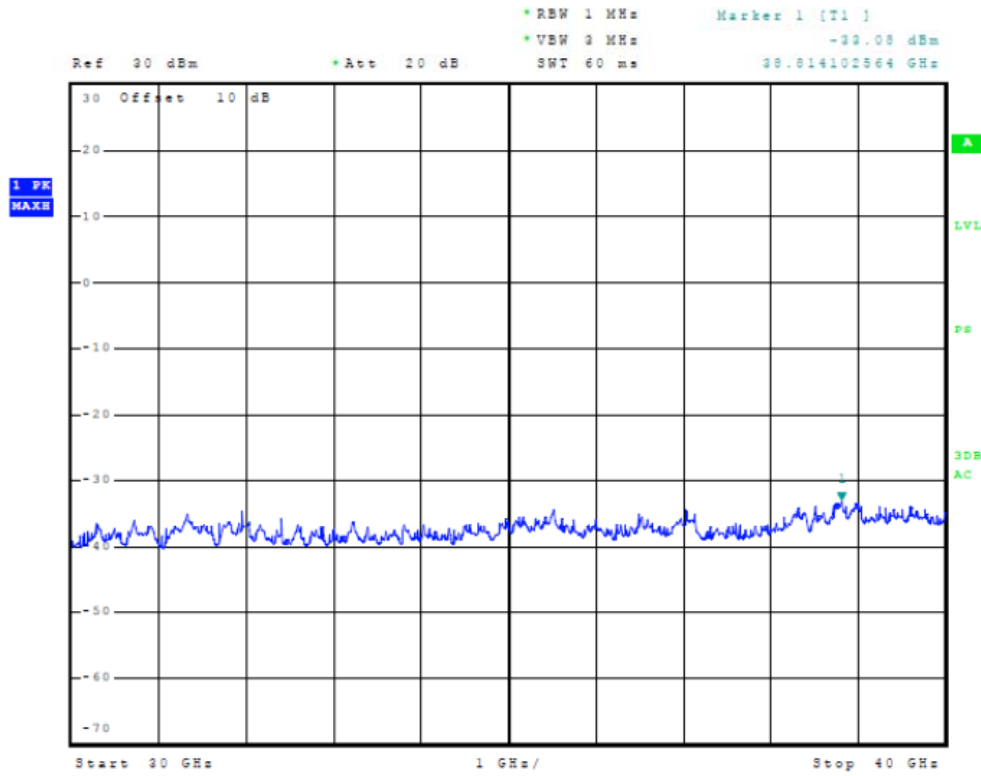


Figure 54 Plot of Antenna Port Conducted Emissions (Chain 0)

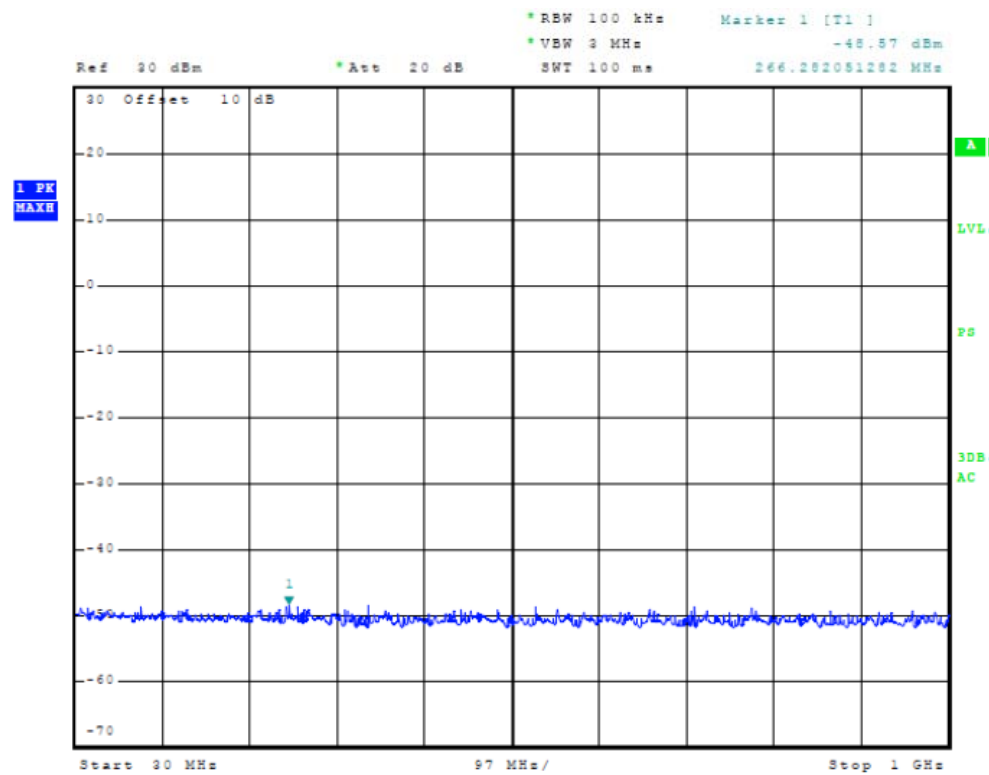


Figure 55 Plot of Antenna Port Conducted Emissions (Chain 1)

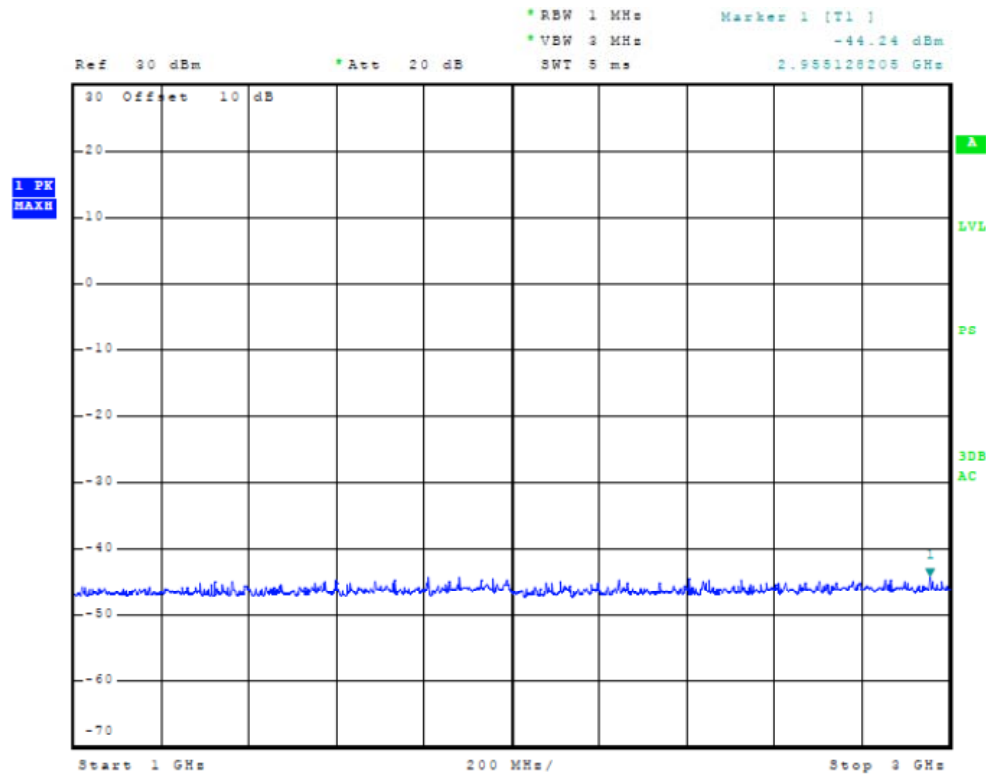


Figure 56 Plot of Antenna Port Conducted Emissions (Chain 1)

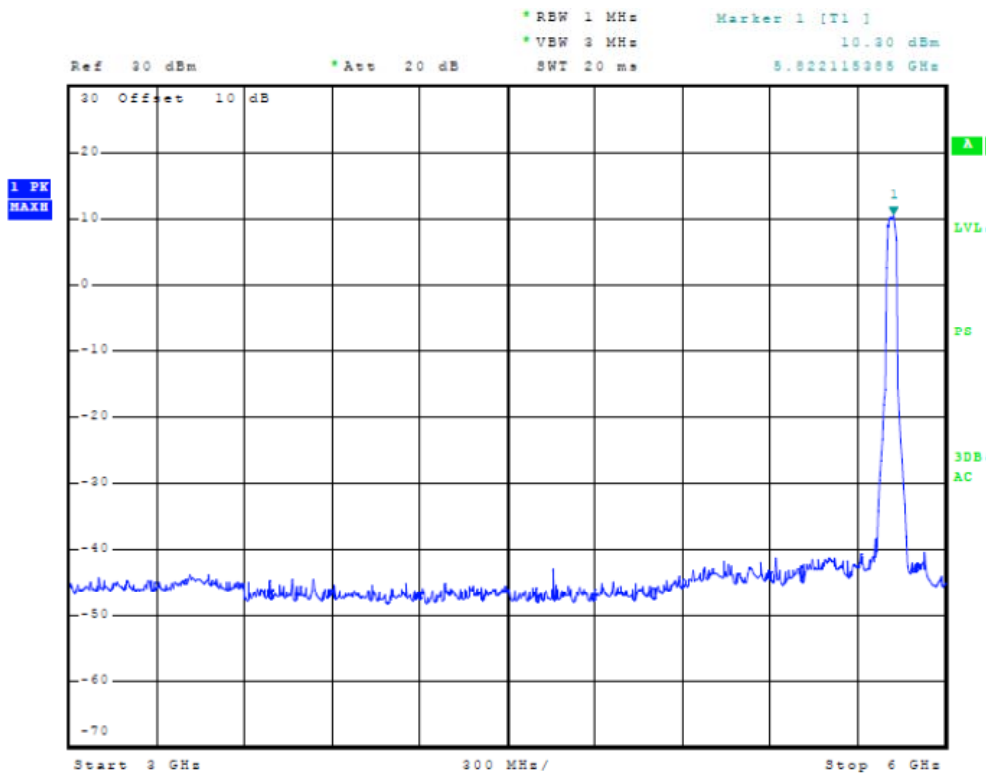


Figure 57 Plot of Antenna Port Conducted Emissions (Chain 1)

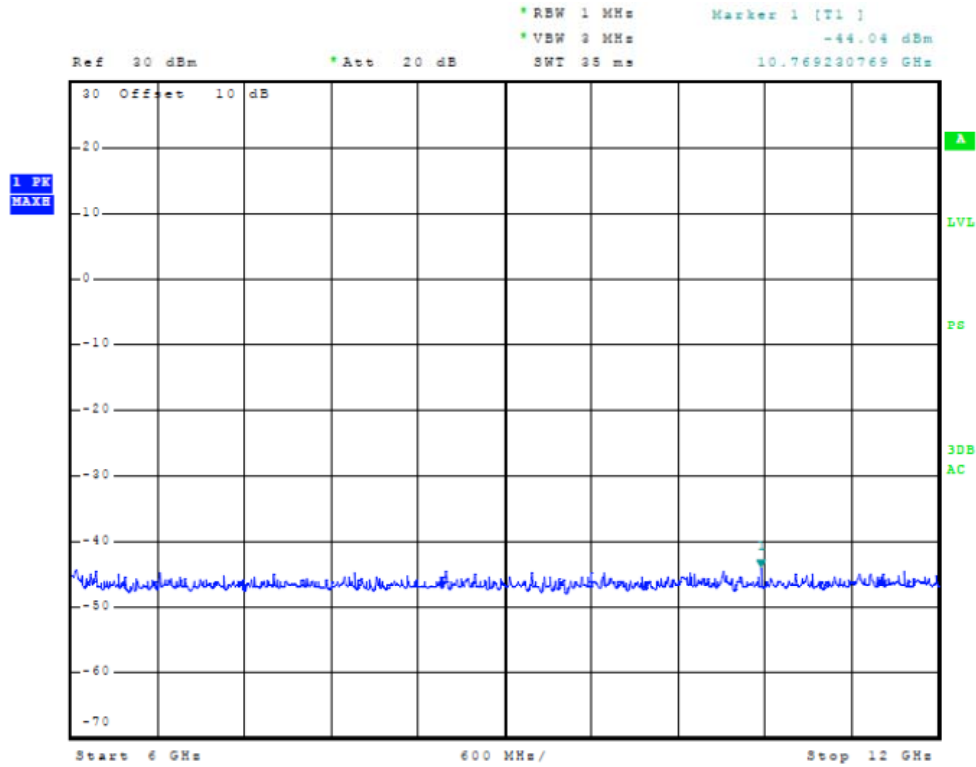


Figure 58 Plot of Antenna Port Conducted Emissions (Chain 1)

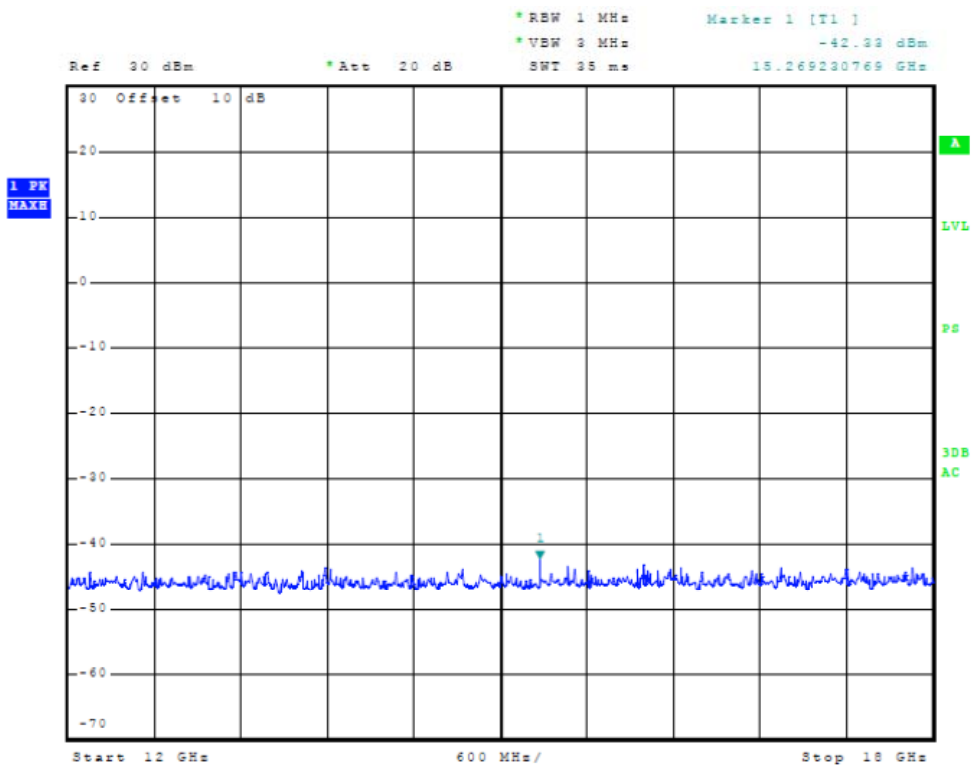


Figure 59 Plot of Antenna Port Conducted Emissions (Chain 1)

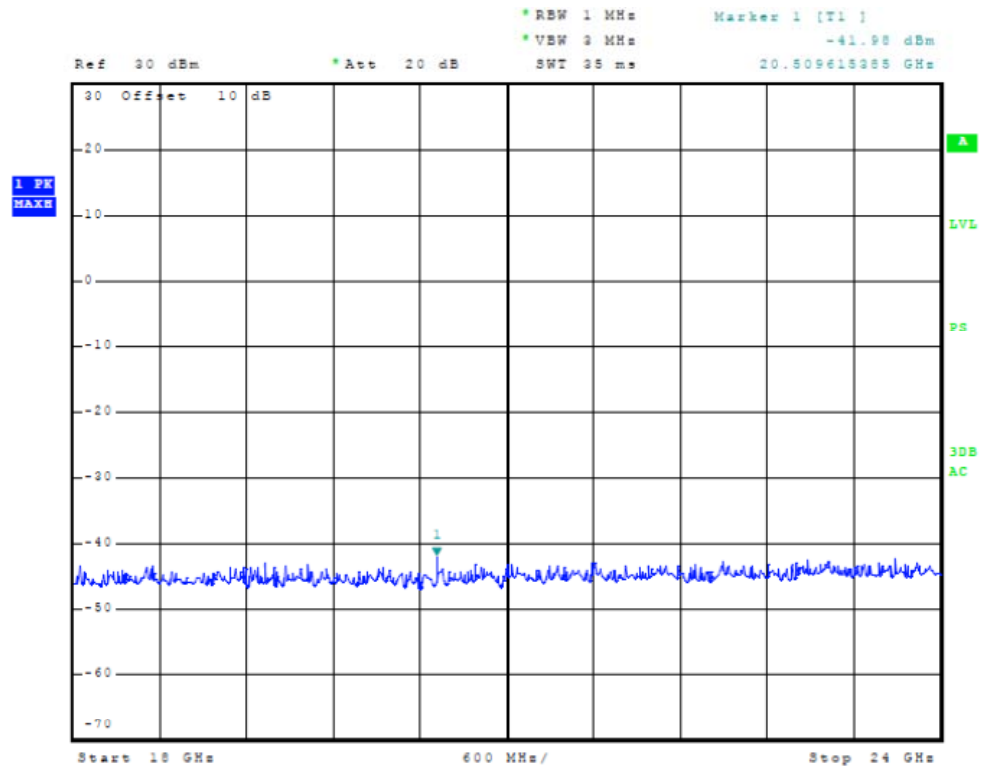


Figure 60 Plot of Antenna Port Conducted Emissions (Chain 1)

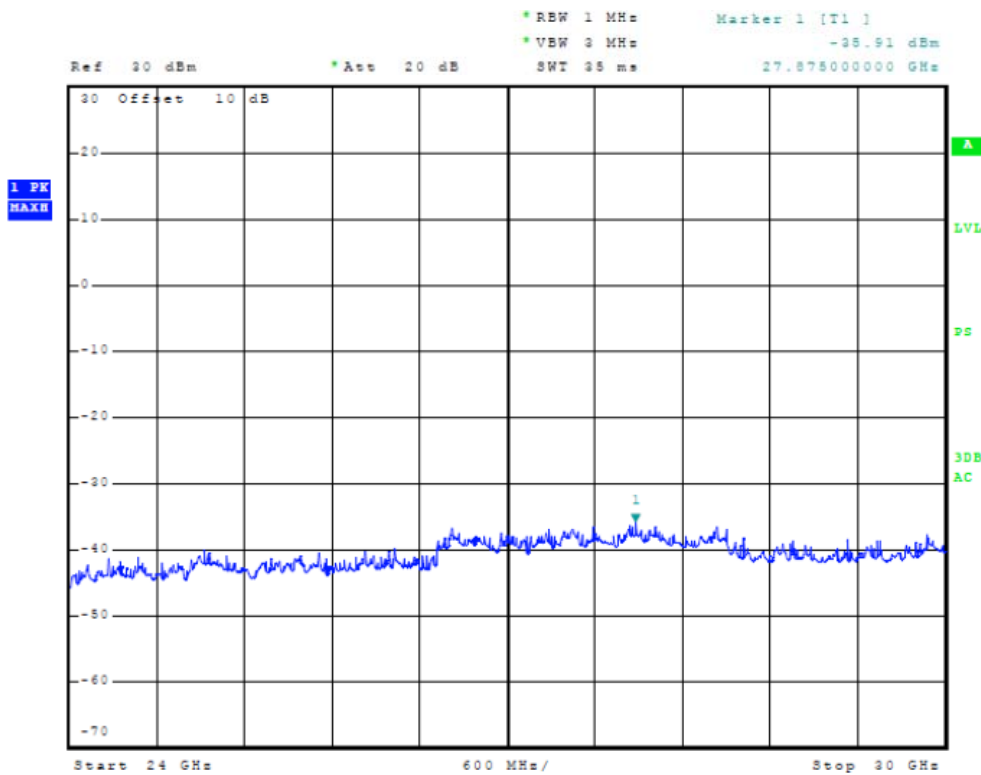


Figure 61 Plot of Antenna Port Conducted Emissions (Chain 1)

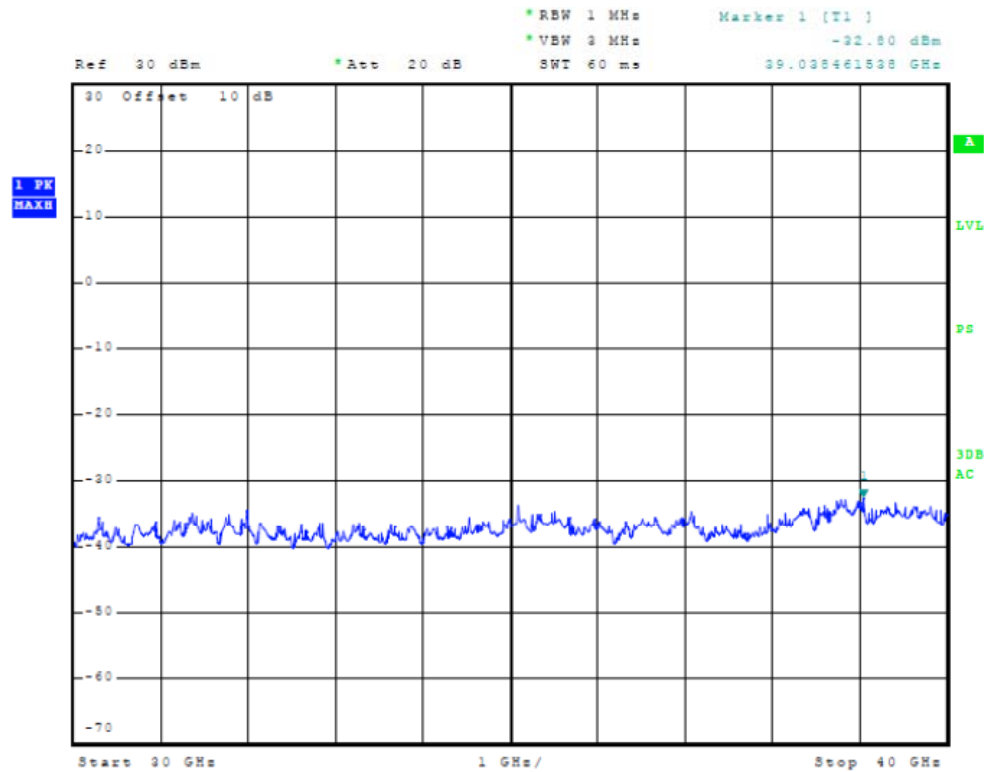


Figure 62 Plot of Antenna Port Conducted Emissions (Chain 1)

Transmitter Emissions Data

Transmitter Antenna Port Conducted Emissions Data (Total for Both Chains)

Channel Mode	Total Output Power dBm	Total Output Power milliwatt	Total Power Spectral Density (dBm)
CCK	16.5	45	-14.9
OFDM	29.9	990	-5.8
HT Mixed 20 MHz	29.9	983	-5.6
HT Green Field 40 MHz	29.9	975	-8.9



Transmitter Antenna Port Conducted Emissions Data

Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth MHz	Power Spectral Density dBm
CCK Mode 20MHz Chain 0			
5745	12.13	15384.6	-17.82
5785	13.44	15384.6	-16.84
5825	14.35	15384.6	-16.10
CCK Mode 20MHz Chain 1			
5745	11.96	15336.5	-18.01
5785	12.44	15336.5	-17.57
5825	11.55	15336.5	+17.75
OFDM Mode 20MHz Chain 0			
5745	25.84	17163.4	-9.86
5785	27.11	17115.4	-8.47
5825	27.65	17211.5	-7.87
OFDM Mode 20MHz Chain 1			
5745	26.11	17115.4	-9.93
5785	25.80	17115.4	-9.66
5825	25.64	17163.5	-9.97



Frequency MHz	Antenna Conducted Output Power dBm	Occupied Bandwidth MHz	Power Spectral Density dBm
HT Mixed Mode 20MHz Chain 0			
5745	25.98	18076.9	-10.06
5785	27.04	18125.0	-8.92
5825	27.66	18076.9	-7.71
HT Mixed Mode 20MHz Chain 1			
5745	25.64	18125.0	-9.78
5785	25.93	18028.8	-9.73
5825	26.02	18076.9	-9.97
HT Green Field Mode 40MHz Chain 0			
5755	25.98	37307.7	-12.60
5785	26.93	37307.7	-11.43
5815	27.63	37211.5	-11.25
HT Green Field Mode 40MHz Chain 1			
5755	26.24	27115.4	-12.90
5785	25.82	37211.5	-12.90
5815	25.97	37115.4	-12.68



Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 0, HT Mixed Mode)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
5745.0	11490.0	-48.34	-74.3
	17235.0	-48.76	-74.7
	22980.0	-47.86	-73.8
	28725.0	-47.13	-73.1
	34470.0	-43.64	-69.6
5785.0	11570.0	-46.36	-73.3
	17355.0	-47.86	-74.8
	23140.0	-47.91	-74.8
	28925.0	-46.24	-73.2
	34710.0	-44.58	-71.5
5825.0	11650.0	-48.23	-75.9
	17475.0	-48.95	-76.6
	23300.0	-48.38	-76.0
	29125.0	-47.00	-74.6
	34950.0	-44.20	-71.8



Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 1, HT Mixed Mode)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
5745.0	11490.0	-48.19	-74.2
	17235.0	-48.71	-74.7
	22980.0	-47.74	-73.7
	28725.0	-46.72	-72.7
	34470.0	-44.53	-70.5
5785.0	11570.0	-47.91	-74.8
	17355.0	-48.95	-75.9
	23140.0	-47.76	-74.7
	28925.0	-46.87	-73.8
	34710.0	-44.55	-71.5
5825.0	11650.0	-48.84	-76.5
	17475.0	-48.49	-76.1
	23300.0	-47.86	-75.5
	29125.0	-46.63	-74.3
	34950.0	-43.97	-71.6



Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 0, HT Green Field)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
5755.0	11510.0	-48.49	-74.5
	17265.0	-48.41	-74.4
	23020.0	-48.03	-74.0
	28775.0	-46.75	-72.7
	34530.0	-44.58	-70.6
5785.0	11570.0	-47.98	-74.9
	17355.0	-48.65	-75.6
	23140.0	-48.23	-75.2
	28925.0	-46.18	-73.1
	34710.0	-44.33	-71.3
5815.0	11630.0	-48.41	-76.0
	17445.0	-49.07	-76.7
	23260.0	-48.79	-76.4
	29075.0	-45.98	-73.6
	34890.0	-45.30	-72.9



Transmitter Antenna Port Conducted Spurious Emissions Data (Chain 1, HT Green Field)

Channel MHz	Spurious Freq (MHz)	Measured Level (dBm)	Level Below Carrier (dBc)
5755.0	11510.0	-47.94	-73.9
	17265.0	-48.68	-74.7
	23020.0	-48.34	-74.3
	28775.0	-46.75	-72.7
	34530.0	-44.48	-70.5
5785.0	11570.0	48.65	21.7
	17355.0	-48.79	-75.7
	23140.0	-48.26	-75.2
	28925.0	-46.73	-73.7
	34710.0	-44.97	-71.9
5815.0	11630.0	-49.00	-76.6
	17445.0	-47.50	-75.1
	23260.0	-47.62	-75.3
	29075.0	-45.98	-73.6
	34890.0	-44.89	-72.5

Transmitter Radiated Emission (23 dBi Panel, Worst-case)

Frequency in MHz	Horizontal Peak (dBµV/m)	Horizontal Average (dBµV/m)	Vertical Peak (dBµV/m)	Vertical Average (dBµV/m)	Limit @ 3m (dBµV/m)
5745.0	122.8	111.1	122.6	110.9	--
11490.0	47.6	34.8	46.7	34.6	54.0
17235.0	55.2	42.5	53.0	40.5	54.0
22980.0	35.3	22.8	34.7	32.7	54.0
28725.0	36.4	24.7	37.4	24.9	54.0
5785.0	123.5	111.7	122.5	110.9	--
11570.0	47.9	34.8	47.5	34.4	54.0
17355.0	52.8	40.4	52.5	40.5	54.0
23140.0	37.5	33.9	36.9	34.3	54.0
28925.0	38.2	26.3	38.9	26.3	54.0
5825.0	123.5	111.7	122.1	110.2	--
11650.0	48.5	35.1	47.5	35.0	54.0
17475.0	54.5	41.5	53.6	41.5	54.0
23300.0	35.6	33.0	35.3	32.9	54.0
29125.0	37.3	24.6	37.9	24.6	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.

Transmitter Radiated Emission (32 dBi Dish, Worst-case)

Frequency in MHz	Horizontal Peak (dBμV/m)	Horizontal Average (dBμV/m)	Vertical Peak (dBμV/m)	Vertical Average (dBμV/m)	Limit @ 3m (dBμV/m)
5745.0	134.9	122.0	25.8	121.6	--
11490.0	46.6	34.0	46.7	34.0	54.0
17235.0	52.8	40.2	52.5	40.2	54.0
22980.0	35.7	33.2	36.3	33.1	54.0
28725.0	37.6	24.9	37.6	25.0	54.0
5785.0	135.3	122.6	133.7	121.7	--
11570.0	46.4	34.1	46.5	34.1	54.0
17355.0	53.6	40.2	52.7	40.3	54.0
23140.0	36.6	33.9	36.7	26.2	54.0
28925.0	38.5	26.2	38.3	26.2	54.0
5825.0	136.9	123.0	132.1	121.0	--
11650.0	47.4	34.8	47.1	34.9	54.0
17475.0	54.7	41.5	54.6	41.5	54.0
23300.0	35.2	31.9	36.0	31.6	54.0
29125.0	37.0	24.4	37.0	24.5	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Quasi-Peak amplitude emissions are recorded above for frequency range of 30-1000 MHz.

Average amplitude emissions are recorded above for frequency range above 1000 MHz.



Summary of Results for Transmitter Radiated Emissions of Intentional Radiator

The EUT demonstrated compliance with the conducted and radiated emissions requirements of CFR47 Part 15.247. Conducted antenna port power of 27.66 dBm, 0.5 Watts (chain 0), 26.24 dBm, 0.5 Watts (chain 1) was measured. The EUT demonstrated a minimum radiated harmonic emission margin of -11.5 dB below requirements. There were no other significantly measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the requirements. The specifications of CFR47 paragraph 15.247 and RSS-210 were met; there are no deviations or exceptions to the requirements.

Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to demonstrate compliance with the CFR47 Part 15C or RSS-210 emissions requirements. There were no deviations to the specifications.



NVLAP Lab Code 200087-0

Annex

- Annex A Measurement Uncertainty Calculations
- Annex B Rogers Labs Test Equipment List
- Annex C Rogers Qualifications
- Annex D FCC Site Registration Letter
- Annex E Industry Canada Site Registration Letter

Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Antenna factor calibration	normal (k = 2)	±0.58
Cable loss calibration	normal (k = 2)	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	±0.1
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	±0.1
Measurement distance variation	rectangular	±0.2
Site Imperfections	rectangular	±1.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[\frac{1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2}{3}\right]}$$

$$U_c(y) = \pm 1.6 \text{ dB}$$

It is probable that $u_c(y) / s(q_k) > 3$, where $s(q_k)$ is estimated standard deviation from a sample of n readings unless the repeatability of the EUT is particularly poor, and a coverage factor of $k = 2$ will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^n (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 \times \pm 1.6 \text{ dB} = \pm 3.2 \text{ dB}$$

Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with $k = 2$.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 1.4 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
 - Unwanted reflections from adjacent objects.
 - Ground plane imperfections: reflection coefficient, flatness, and edge effects.
 - Losses or reflections from "transparent" cabins for the EUT or site coverings.
 - Earth currents in antenna cable (mainly effect Biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

Contribution	Probability Distribution	Uncertainty (dB)
Receiver specification	rectangular	± 1.5
LISN coupling specification	rectangular	± 1.5
Cable and input attenuator calibration	normal (k=2)	± 0.5
Combined standard uncertainty $u_c(y)$ is		

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that $u_c(y) / s(q_k) > 3$ and a coverage factor of $k = 2$ will suffice, therefore:

$$U = 2 U_c(y) = 2 \times \pm 1.2 \text{ dB} = \pm 2.4 \text{ dB}$$



Annex B Rogers Labs Test Equipment List

List of Test Equipment

Calibration Date

Spectrum Analyzer: Rohde & Schwarz ESU40	5/11
Spectrum Analyzer: HP 8562A, HP Adapters: 11518, 11519, and 11520 Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	5/11
Spectrum Analyzer: HP 8591EM	5/11
Antenna: EMCO Biconilog Model: 3143	5/11
Antenna: Sunol Biconilog Model: JB6	10/12
Antenna: EMCO Log Periodic Model: 3147	10/12
Antenna: Com Power Model: AH-118	10/12
Antenna: Antenna Research Biconical Model: BCD 235	10/12
LISN: Compliance Design Model: FCC-LISN-2.Mod.cd, 50 µHy/50 ohm/0.1 µf	10/12
R.F. Preamp CPPA-102	10/12
Attenuator: HP Model: HP11509A	10/12
Attenuator: Mini Circuits Model: CAT-3	10/12
Attenuator: Mini Circuits Model: CAT-3	10/12
Cable: Belden RG-58 (L1)	10/12
Cable: Belden RG-58 (L2)	10/12
Cable: Belden 8268 (L3)	10/12
Cable: Time Microwave: 4M-750HF290-750	10/12
Cable: Time Microwave: 10M-750HF290-750	10/12
Frequency Counter: Leader LDC825	2/11
Oscilloscope Scope: Tektronix 2230	2/11
Wattmeter: Bird 43 with Load Bird 8085	2/11
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/11
R.F. Generators: HP 606A, HP 8614A, HP 8640B	2/11
R.F. Power Amp 65W Model: 470-A-1010	2/11
R.F. Power Amp 50W M185- 10-501	2/11
R.F. Power Amp A.R. Model: 10W 1010M7	2/11
R.F. Power Amp EIN Model: A301	2/11
LISN: Compliance Eng. Model 240/20	2/11
LISN: Fischer Custom Communications Model: FCC-LISN-50-16-2-08	2/11
Antenna: EMCO Dipole Set 3121C	2/11
Antenna: C.D. B-101	2/11
Antenna: Solar 9229-1 & 9230-1	2/11
Antenna: EMCO 6509	2/11
Audio Oscillator: H.P. 201CD	2/11
ELGAR Model: 1751	2/11
ELGAR Model: TG 704A-3D	2/11
ESD Test Set 2010i	2/11
Fast Transient Burst Generator Model: EFT/B-101	2/11
Field Intensity Meter: EFM-018	2/11
KEYTEK Ecat Surge Generator	2/11
Shielded Room 5 M x 3 M x 3.0 M	



Annex C Rogers Qualifications

Scot D. Rogers, Engineer

Rogers Labs, Inc.

Mr. Rogers has approximately 17 years experience in the field of electronics. Engineering experience includes six years in the automated controls industry and remaining years working with the design, development and testing of radio communications and electronic equipment.

Positions Held

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

Educational Background

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers



NVLAP Lab Code 200087-0

Annex D FCC Site Registration Letter

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

November 01, 2011

Registration Number: 90910

Rogers Labs, Inc.
4405 West 259th Terrace,
Louisburg, KS 66053

Attention: Scot Rogers,

Re: Measurement facility located at Louisburg
3 & 10 meter site
Date of Renewal: November 01, 2011

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Phyllis Parrish
Industry Analyst

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

SAF Tehnika AS
Models: Z05FEE01 and Z05FEE02
Test #: 120209
Test to: CFR47 (15.247), RSS-210
File: SAF Tehnika Freemile 5 TstRpt 120209

FCC ID#: W9Z-FREEMILE5
IC#: 8855A-FREEMILE5
SN: 363710100002
Date: March 13, 2012
Page 64 of 65



NVLAP Lab Code 200087-0

Annex E Industry Canada Site Registration Letter



December 28, 2011

OUR FILE: 46405-3041
Submission No: 152685

Rogers Labs Inc.
4405 West 259th Terrace
Louisburg, KS, 66053
USA

Attention: Mr. Scot D. Rogers

Dear Sir/Madame:

The Bureau has received your application for the renewal of 3/10m OATS. Be advised that the information received was satisfactory to Industry Canada. The following number(s) is now associated to the site(s) for which registration / renewal was sought (**Site# 3041A-1**). Please reference the appropriate site number in the body of test reports containing measurements performed on the site. In addition, please keep for your records the following information;

- The company address code associated to the site(s) located at the above address is: **3041A**

Furthermore, to obtain or renew a unique site number, the applicant shall demonstrate that the site has been accredited to ANSI C63.4-2003 or later. A scope of accreditation indicating the accreditation by a recognized accreditation body to ANSI C63.4-2003 or later shall be accepted. Please indicate in a letter the previous assigned site number if applicable and the type of site (example: 3 metre OATS or 3 metre chamber). If the test facility is not accredited to ANSI C63.4-2003 or later, the test facility shall submit test data demonstrating full compliance with the ANSI standard. The Bureau will evaluate the filing to determine if recognition shall be granted.

The frequency for re-validation of the test site and the information that is required to be filed or retained by the testing party shall comply with the requirements established by the accrediting organization. However, in all cases, test site re-validation shall occur on an interval not to **exceed three years**. There is no fee or form associated with an OATS filing. OATS submissions are encouraged to be submitted electronically to the Bureau using the following URL;
http://strategis.ic.gc.ca/epic/internet/inceb-bhst.nsf/en/h_tt00052e.html.

If you have any questions, you may contact the Bureau by e-mail at certification.bureau@ic.gc.ca Please reference our file and submission number above for all correspondence.

Yours sincerely,

Dalwinder Gill
For: Wireless Laboratory Manager
Certification and Engineering Bureau
3701 Carling Ave., Building 94
P.O. Box 11490, Station "H"
Ottawa, Ontario K2H 8S2
Email: dalwinder.gill@ic.gc.ca
Tel. No. (613) 998-8363
Fax. No. (613) 990-4752

Rogers Labs, Inc.
4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214
Revision 1

SAF Tehnika AS
Models: Z05FEE01 and Z05FEE02
Test #: 120209
Test to: CFR47 (15.247), RSS-210
File: SAF Tehnika Freemile 5 TstRpt 120209

FCC ID#: W9Z-FREEMILE5
IC#: 8855A-FREEMILE5
SN: 363710100002
Date: March 13, 2012
Page 65 of 65