

TEST REPORT

of

FCC CFR 47 part 1, 1.1307(b), 1.1310


FCC ID: 21484-ST4950

- 1. Equipment Under Test : GPS Tracker
- 2. Model Name : ST4950
- 3. Variant Model Name(s) : -
- 4. Applicant : Suntech International Ltd.
- 5. Manufacturer : Suntech International Ltd.
- 6. Date of Receipt : 2020.06.05
- 7. Date of Test(s) : 2020.06.08 ~ 2020.07.10
- 8. Date of Issue : 2020.07.10

In the configuration tested, the EUT complied with the standards specified above. This test report does not assure KOLAS accreditation.

- 1) The results of this test report are effective only to the items tested.
- 2) The SGS Korea is not responsible for the sampling, the results of this test report apply to the sample as received.

Tested by:

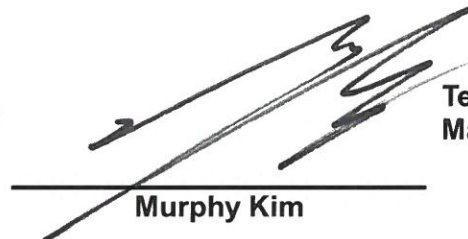

Murphy Kim

Technical
Manager:



Patrick Kang

SGS Korea Co., Ltd. Gunpo Laboratory



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
Tel. +82 31 428 5700 / Fax. +82 31 427 2370
<http://www.sgsgroup.kr>

Report Number: F690501-RF-RTL000930

Page: 2 of 6

INDEX

<u>Table of Contents</u>	Page
1. General Information -----	3
2. RF Exposure Evaluation -----	4

1. General Information

1.1. Testing Laboratory

SGS Korea Co., Ltd. (Gunpo Laboratory)

- 10-2, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- 4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, Korea, 15807
- Designation number: KR0150

All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.

Telephone : +82 31 688 0901

FAX : +82 31 688 0921

1.2. Details of Applicant

Applicant : Suntech International Ltd.
 Address : A-1705, 1706, Greatvalley, 32, Digital-ro 9-gil, Geumcheon-gu, Seoul,
 Republic of Korea, 08512
 Contact Person : Kim, Yo-han
 Phone No. : +82 10 4148 3458

1.3. Details of Manufacturer

Company : Same as applicant
 Address : Same as applicant

1.4. Description of EUT

Kind of Product	GPS Tracker
Model Name	ST4950
Power Supply	DC 3.6 V
Frequency Range	2 402 MHz ~ 2 480 MHz (Bluetooth Low Energy) 2 412 MHz ~ 2 462 MHz (11b/g/n_HT20)
Modulation Technique	DSSS, OFDM, GFSK
Number of Channels	40 channels (Bluetooth Low Energy) 11 channels (11b/g/n_HT20)
Antenna Type	PCB & Cable Assembly antenna
Antenna Gain	2 400 MHz ~ 2 483.5 MHz: 1.99 dB i (Bluetooth Low Energy) 2 400 MHz ~ 2 483.5 MHz: 1.99 dB i (WLAN 2.4 G)

1.5. Test Report Revision

Revision	Report Number	Date of Issue	Description
0	F690501-RF-RTL000930	2020.07.10	Initial

2. RF Exposure Evaluation

2.1. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1 500	-	-	f/300	6
1 500-100 000	-	-	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
<u>300-1 500</u>	-	-	<u>f/1500</u>	<u>30</u>
<u>1 500-100 000</u>	-	-	<u>1.0</u>	<u>30</u>

2.1.1. Friis transmission formula: $P_d = (P_{out} \cdot G) / (4 \cdot \pi \cdot R^2)$

Where P_d = power density in mW/cm²

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in cm

P_d the limit of MPE, 1 mW/cm². If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

2.1.2. Test Result of RF Exposure Evaluation

Test Item : RF Exposure Evaluation Data

Test Mode : Normal Operation

2.1.3. Output Power into Antenna & RF Exposure Evaluation Distance

Bluetooth Low Energy

- Maximum tune up tolerance

Frequency (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
2 400 ~ 2 483.5	-1	1.99	0.000 250	1

WLAN (2.4G)

- Maximum tune up tolerance

Frequency (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
2 400 ~ 2 483.5	15	1.99	0.009 948	1

LTE - Band 2

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
1 850 ~ 1 910	24	5.21	0.165 856	1

LTE - Band 4

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
1 710 ~ 1 755	23	3.0	0.079 201	1

LTE - Band 5

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
824 ~ 849	24	0.42	0.055 047	0.55

LTE - Band 12

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
699 ~ 716	24	-1.78	0.033 169	0.47

LTE - Band 13

- Maximum tune up tolerance

Frequency Range (MHz)	Output Average Power to Antenna (dB m)	Antenna Gain (dB i)	Power Density at 20 cm (mW/cm ²)	Limits (mW/cm ²)
777 ~ 787	24	0.77	0.059 666	0.52

Note;

- Bluetooth low energy and WLAN can not transmitter simultaneously.
- Bluetooth low energy and WWAN can transmitter simultaneously.
- WLAN and WWAN can transmitter simultaneously.
- The power density Pd (5th column) at a distance of 20 cm calculated from the friis transmission formula is far below the limit of 1 mW/cm².
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.
- This equipment should be installed and operated with minimum 20 cm between the radiator and your body.
- The antenna gain of this transmitter is less than 6 dB i and must not be collocated or operating in conjunction with any other antenna or transmitter unless authorized to do so by the FCC.
- According to KDB 447498 D01 RF Exposure Guidance 4.1.

Simultaneous transmission of RF Exposure test exclusion for worst case configuration.

WLAN: the ratio is 0.009 948 / 1
 WWAN: the ratio is 0.165 856 / 1

Confirm the sum result of individual MPEs ratio is ≤ 1.0;
 WLAN + WWAN: (0.009 948 / 1) + (0.165 856 / 1) = 0.175 804 ≤ 1.0

- End of the Test Report -