

FCC Part 15B Measurement and Test Report

For

Verykool USA Inc

3636 Nobel Drive, Suite 325, San Diego, CA 92122 USA

FCC ID: WA6I133

Test Standards:	<u>FCC Part 15 Subpart B</u>
Product Description:	<u>Mobile Phone</u>
Tested Model:	<u>I133</u>
Report No.:	<u>STR13058022I-3</u>
Tested Date:	<u>2013-05-10 to 2013-05-31</u>
Issued Date:	<u>2013-06-17</u>
Tested By:	<u>Susan Su / Engineer</u> <i>Susan Su</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

SEM.Test Compliance Service Co., Ltd
3/F, Jinbao Commerce Building, Xin'an Fanshen Road,
Bao'an District, Shenzhen, P.R.C. (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3
1.2 TEST STANDARDS.....4
1.3 TEST METHODOLOGY4
1.4 TEST FACILITY4
1.5 EUT SETUP AND OPERATION MODE5

2. SUMMARY OF TEST RESULTS6

3. CONDUCTED EMISSIONS7
3.1 MEASUREMENT UNCERTAINTY7
3.2 TEST EQUIPMENT LIST AND DETAILS7
3.3 TEST PROCEDURE.....7
3.4 BASIC TEST SETUP BLOCK DIAGRAM.....7
3.5 ENVIRONMENTAL CONDITIONS8
3.6 SUMMARY OF TEST RESULTS/PLOTS8
3.7 CONDUCTED EMISSIONS TEST DATA.....8

4. RADIATED EMISSIONS.....11
4.1 MEASUREMENT UNCERTAINTY11
4.2 TEST EQUIPMENT LIST AND DETAILS11
4.3 TEST PROCEDURE.....11
4.4 TEST RECEIVER SETUP12
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....12
4.6 ENVIRONMENTAL CONDITIONS12
4.7 SUMMARY OF TEST RESULTS/PLOTS12

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Verykool USA Inc
 Address of applicant: 3636 Nobel Drive, Suite 325, San Diego, CA 92122 USA
 Manufacturer: Shenzhen Ginwave Technologies Ltd
 Address of manufacturer: Room 913 Software building, GaoXin M.1st Ave, Nanshan, Shenzhen, China

General Description of EUT	
Product Name:	Mobile Phone
Trade Name:	Verykool
Model No.:	I133
Adding Model(s):	I132
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i> <i>Adding model: I132 basis of the tested model I133</i> <i>This model is identical circuit and PCB Layout to the original model except I132 has a camera but I133 has no.</i></p>	

Technical Characteristics of EUT	
Rated Voltage:	DC 3.7V battery
Rated Current:	/
Rated Power:	/
Power Adapter Model:	NBT-050B-B050UA
Highest Internal Frequency:	26 MHz
Lowest Internal Frequency:	32.768 kHz
Classification of ITE:	Class B

1.2 Test Standards

The following report is prepared on behalf of the Verykool USA Inc in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart B, and section 15.205, 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Operation Mode

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted according to the operation manual for use, more detailed description as follows:

Test Mode List:

Test Mode	Description	Remark
TM1	Charging & Playing	1kHz Audio
TM2	Downloading	Test Software: CT3

EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
USB Cable	0.8	Shielded	Without Ferrite
Earphone Cable	1.5	Unshielded	Without Ferrite

Auxiliary Equipment List and Details

Description	Manufacturer	Model	Serial Number
Notebook	ThinkPak	E10	/

Special Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.107 (a)	Conducted Emissions	Compliant
§ 15.109 (a)	Radiated Emissions	Compliant

N/A: not applicable

3. Conducted Emissions

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.


3.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2013-05-07	2014-05-06
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2013-05-07	2014-05-06
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2013-05-07	2014-05-06

3.3 Test Procedure

Test is conducting under the description of ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

3.4 Basic Test Setup Block Diagram

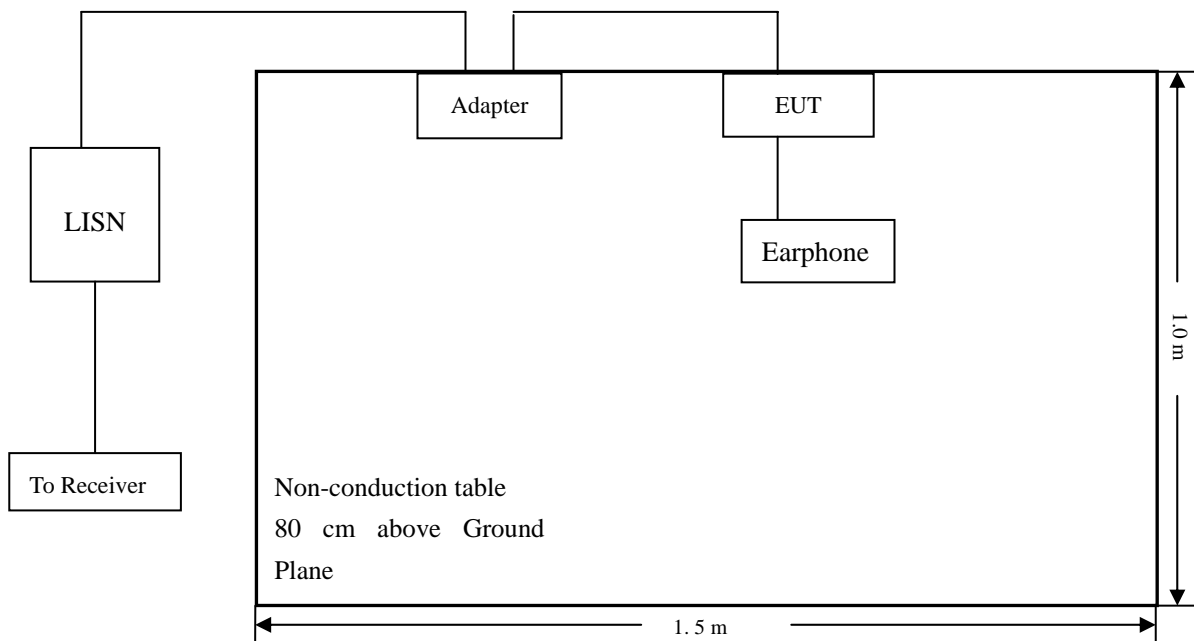

3.5 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar

3.6 Summary of Test Results/Plots

According to the data in section 3.7, the EUT complied with the FCC Part 15.107(a) Conducted margin for a Class B device, with the *worst* margin reading of:


-5.13 dB at 6.034 MHz in the Line mode, QP detector, 0.15-30MHz

3.7 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data


EUT: *Mobile Phone*
 Tested Model: *I133*
 Operating Condition: *Charging & Playing*
 Comment: *AC 120V/60Hz; adapter DC 5V*

Test Specification: *Neutral*

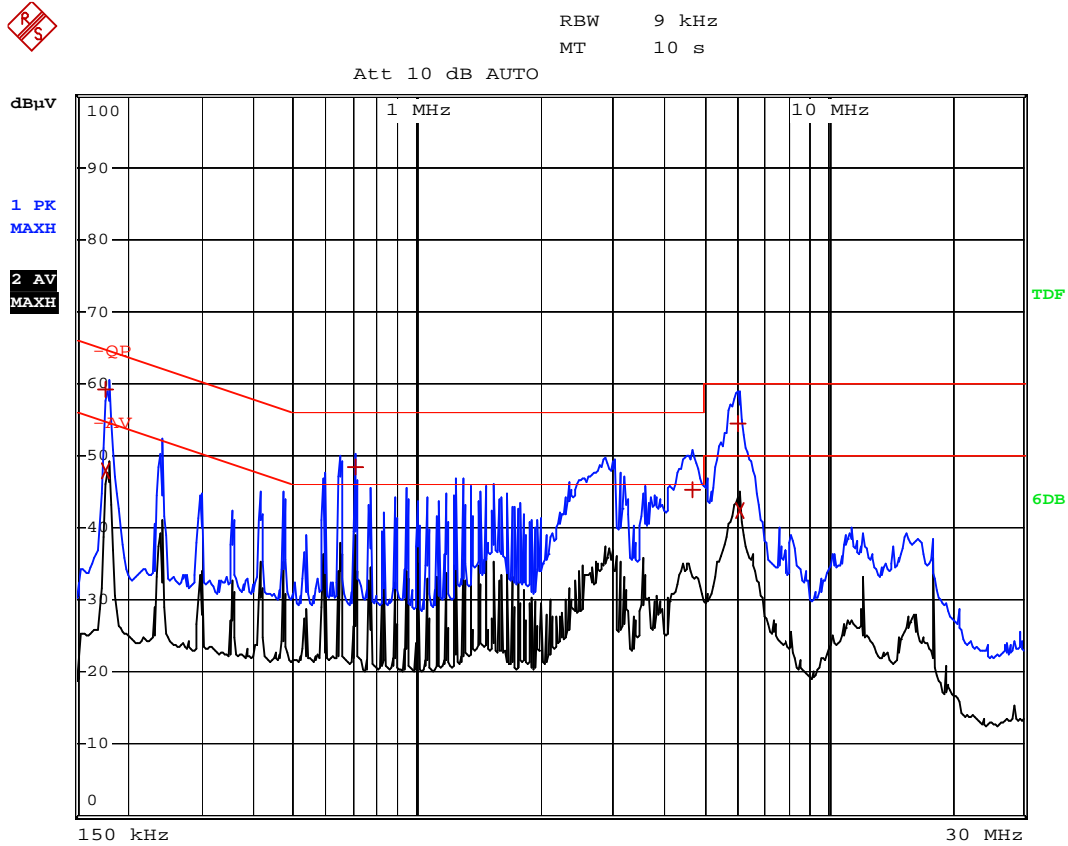

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
1 Quasi Peak	178 kHz	59.28	-5.29
2 Average	178 kHz	47.95	-6.62
1 Quasi Peak	710 kHz	48.38	-7.61
1 Quasi Peak	4.682 MHz	45.15	-10.84
1 Quasi Peak	6.03 MHz	54.37	-5.62
2 Average	6.09 MHz	42.30	-7.69

Test Specification: Line

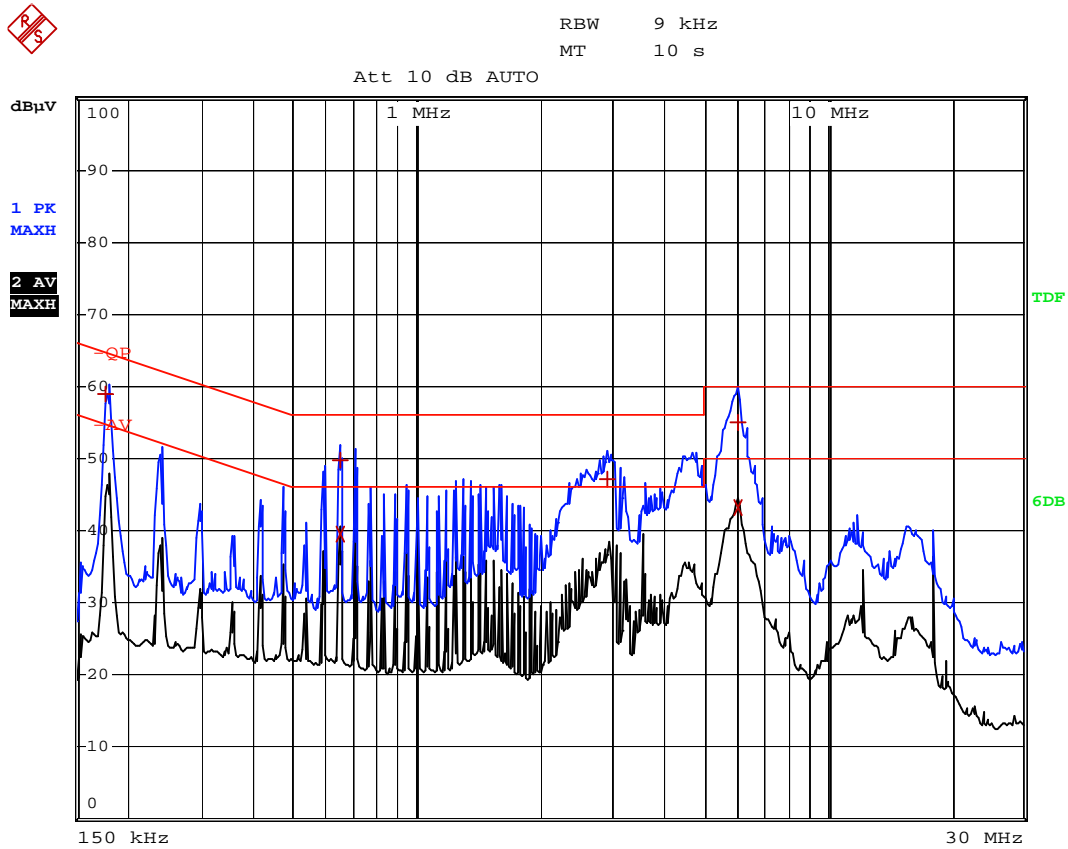

EDIT PEAK LIST (Final Measurement Results)			
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1 Quasi Peak	178 kHz	58.97	-5.60
1 Quasi Peak	650 kHz	49.68	-6.31
2 Average	650 kHz	39.45	-6.55
1 Quasi Peak	2.898 MHz	47.15	-8.84
2 Average	6.03 MHz	43.27	-6.72
1 Quasi Peak	6.034 MHz	54.86	-5.13

4. Radiated Emissions

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.


4.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2013-05-07	2014-05-06
EMI Test Receiver	R&S	ESVB	825471/005	2013-05-07	2014-05-06
Pre-amplifier	Agilent	8447F	3113A06717	2013-05-07	2014-05-06
Pre-amplifier	Compliance Direction	PAP-0118	24002	2013-05-07	2014-05-06
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2013-04-20	2014-04-19
Horn Antenna	ETS	3117	00086197	2013-04-20	2014-04-19
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2013-04-20	2014-04-19

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

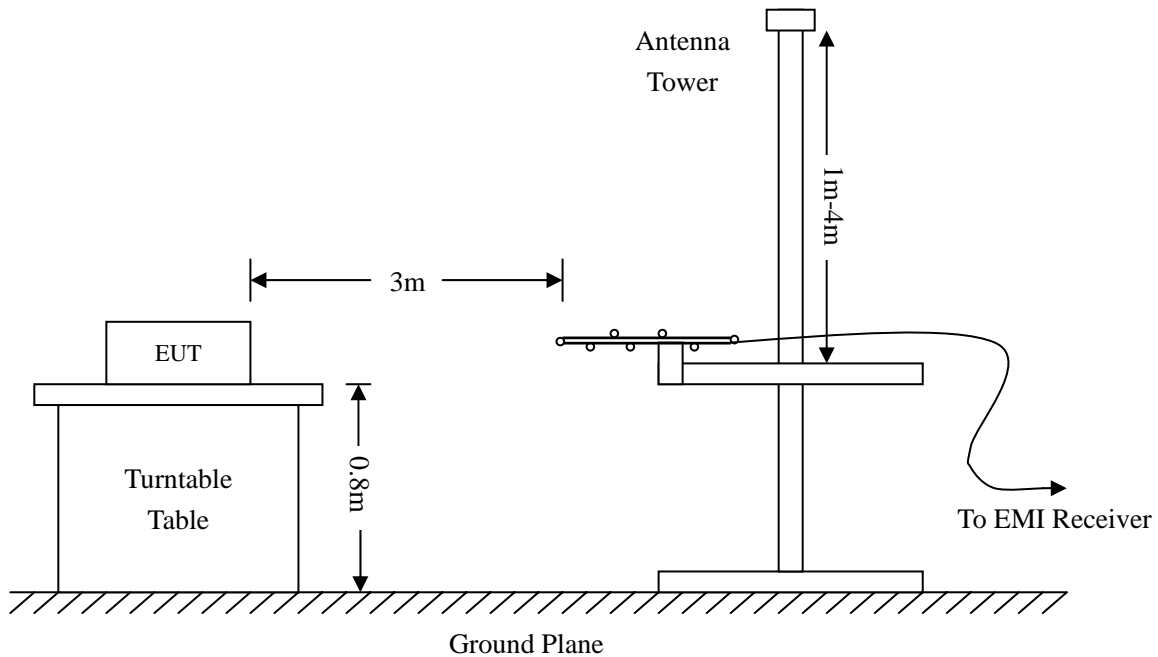

4.4 Test Receiver Setup

During the radiated emission test for above 1GHz, the test receiver was set with the following configurations:

For peak detector:

RBW = 1000kHz, VBW = 3000kHz, Sweep Time = Auto

For average detector:

RBW = 1000kHz, VBW = 10Hz, Sweep Time = Auto

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for a Class B device. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.109(a) Limit}$$

4.6 Environmental Conditions

Temperature:	23 °C
Relative Humidity:	55 %
ATM Pressure:	1011 mbar


4.7 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15.109(a) rule, and had the worst margin of:

-3.15 dB at 30.8535 MHz in the Vertical polarization, Charging & Playing mode, 9 kHz to 1 GHz, 3Meters


Plot of Radiated Emissions Test Data

EUT: *Mobile Phone*
 Tested Model: *I133*
 Operating Condition: *Charring & Playing*
 Comment: *AC 120V/60Hz; Adapter DC 5V*
 Test Specification: *Horizontal*

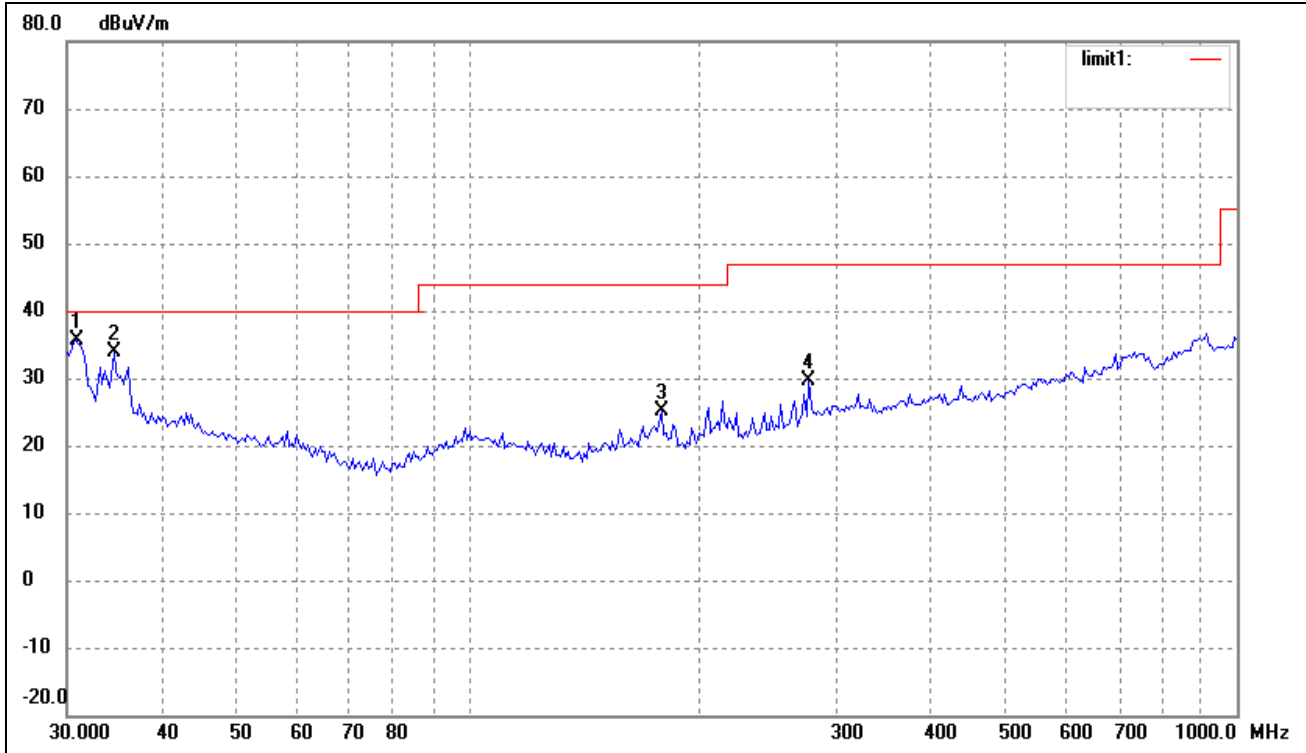

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.8535	27.50	8.19	35.69	40.00	-4.31	235	100	peak
2	34.5173	25.10	8.80	33.90	40.00	-6.10	44	100	peak
3	178.1327	21.29	3.74	25.03	43.50	-18.47	79	100	peak
4	277.0935	20.72	9.01	29.73	46.00	-16.27	292	100	peak

Test Specification: Vertical

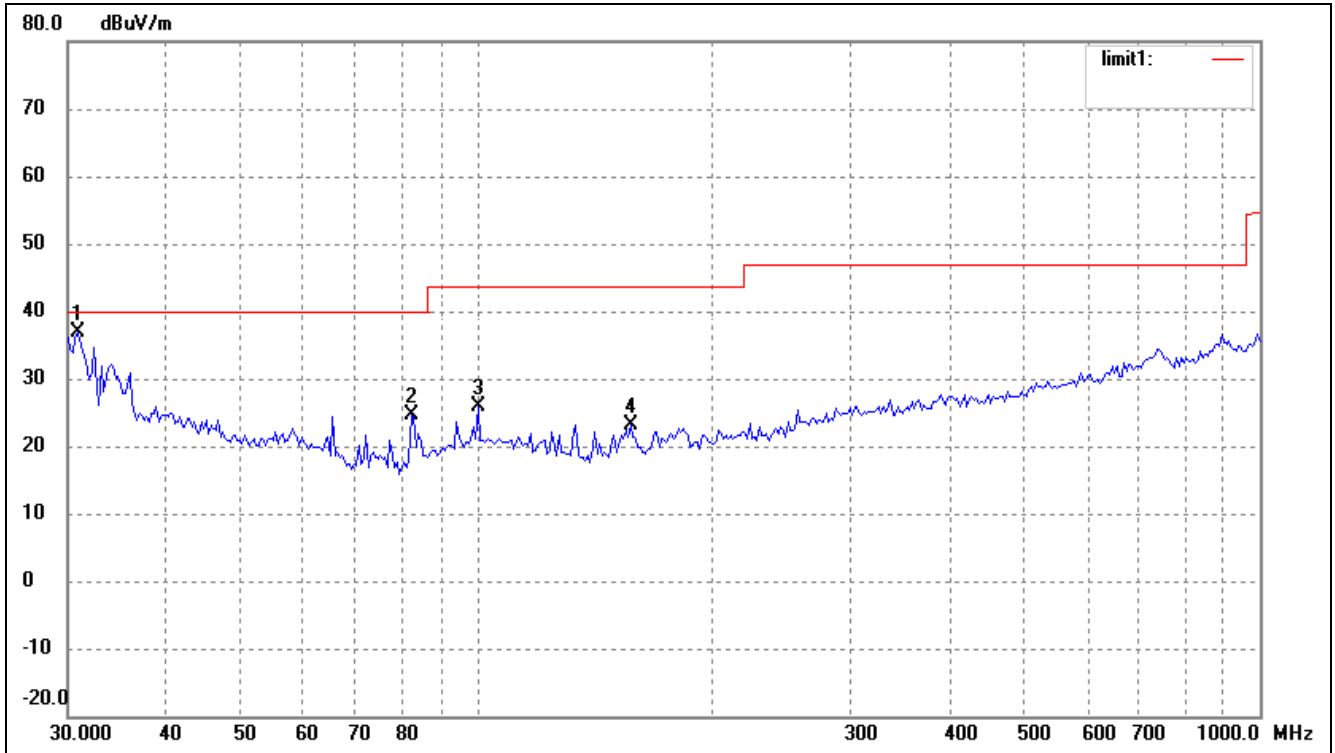


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	30.8535	28.66	8.19	36.85	40.00	-3.15	306	100	peak
2	82.3589	22.25	2.34	24.59	40.00	-15.41	54	100	peak
3	100.2286	19.01	6.81	25.82	43.50	-17.68	57	100	peak
4	157.0074	19.56	3.63	23.19	43.50	-20.31	51	100	peak

Plot of Radiated Emissions Test Data


EUT: *Mobile Phone*
 Tested Model: *I133*
 Operating Condition: *Downloading*
 Comment: *Connected to PC*

 Test Specification: *Horizontal*

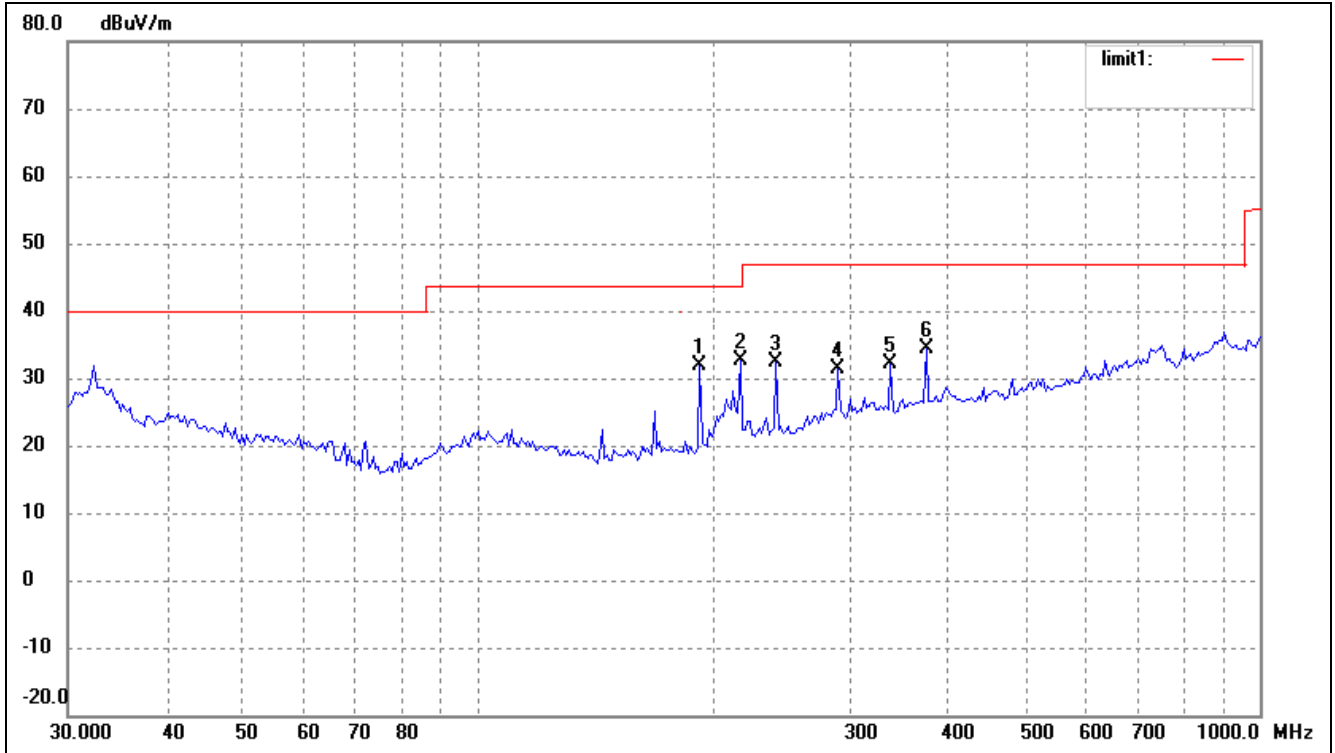

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	192.4186	27.47	4.31	31.78	43.50	-11.72	245	100	peak
2	216.7828	26.91	5.72	32.63	46.00	-13.37	15	100	peak
3	240.8304	25.30	7.02	32.32	46.00	-13.68	32	100	peak
4	289.0021	21.82	9.67	31.49	46.00	-14.51	54	100	peak
5	337.2155	21.90	10.14	32.04	46.00	-13.96	288	100	peak
6	374.6226	23.68	10.63	34.31	46.00	-11.69	231	100	peak

Test Specification: Vertical

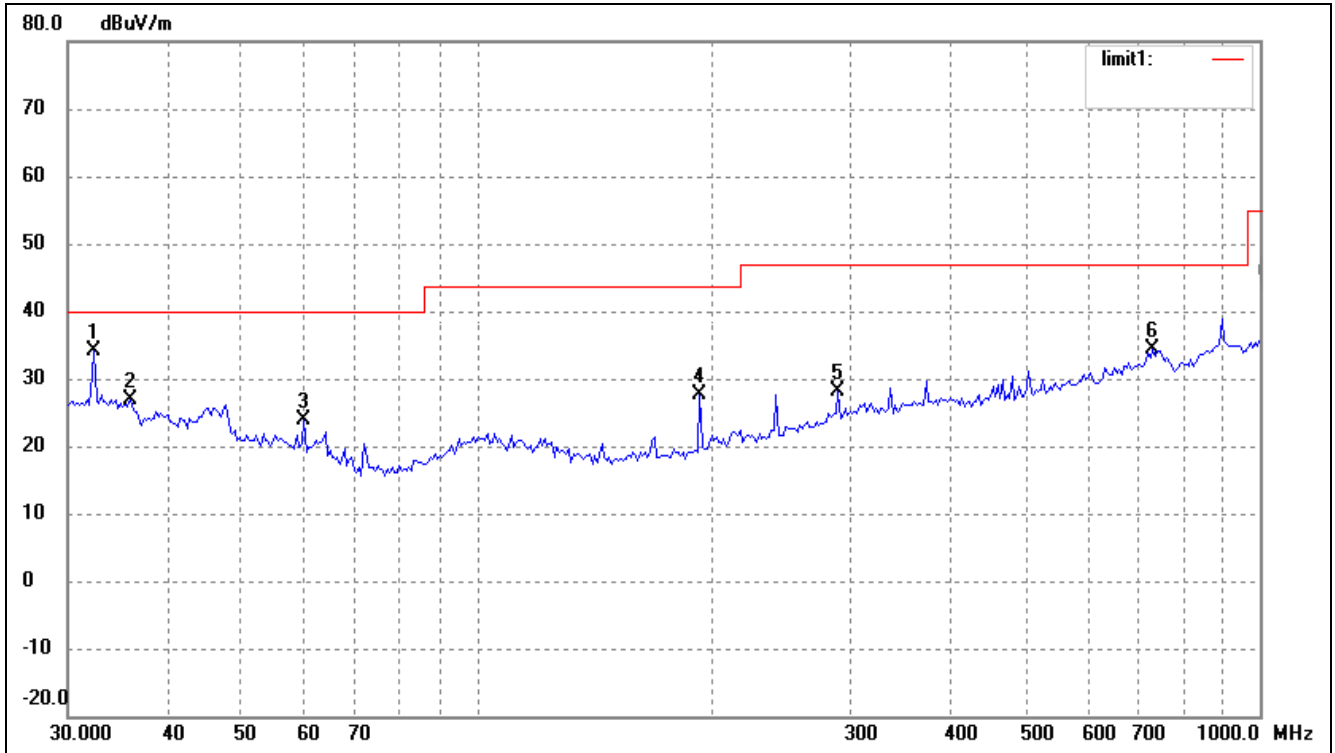


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	25.68	8.44	34.12	40.00	-5.88	0	100	peak
2	36.0007	17.83	9.04	26.87	40.00	-13.13	15	100	peak
3	60.0691	18.27	5.67	23.94	40.00	-16.06	114	100	peak
4	192.4186	23.34	4.31	27.65	43.50	-15.85	111	100	peak
5	289.0021	18.35	9.67	28.02	46.00	-17.98	254	100	peak
6	729.3583	17.18	17.31	34.49	46.00	-11.51	134	100	peak

Plot of Radiated Emissions Test Data


EUT: *Mobile Phone*
 Tested Model: *I132*
 Operating Condition: *Charring & Playing*
 Comment: *AC 120V/60Hz; Adapter DC 5V*

 Test Specification: *Horizontal*

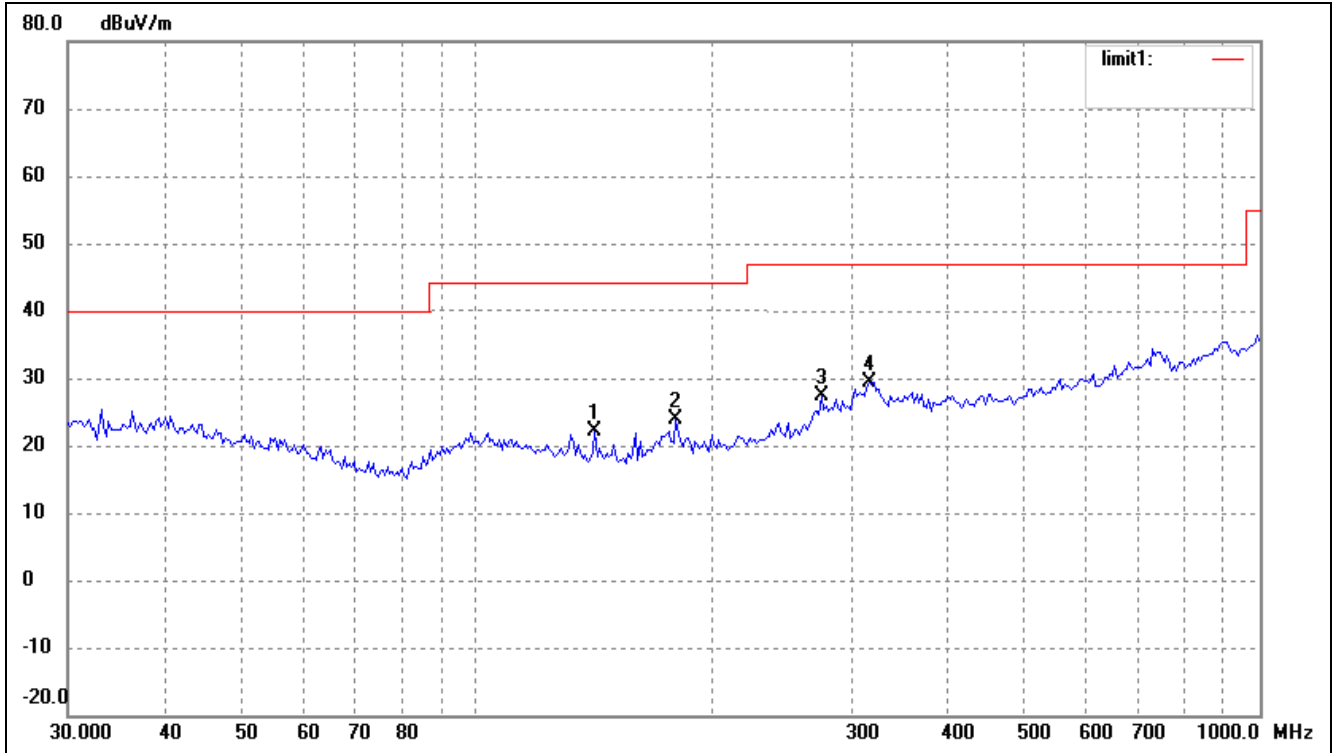

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	141.3298	18.83	3.41	22.24	43.50	-21.26	155	100	peak
2	179.3864	20.10	3.74	23.84	43.50	-19.66	21	100	peak
3	275.1570	18.48	8.88	27.36	46.00	-18.64	136	100	peak
4	316.5890	19.02	10.44	29.46	46.00	-16.54	18	100	peak

Test Specification: Vertical

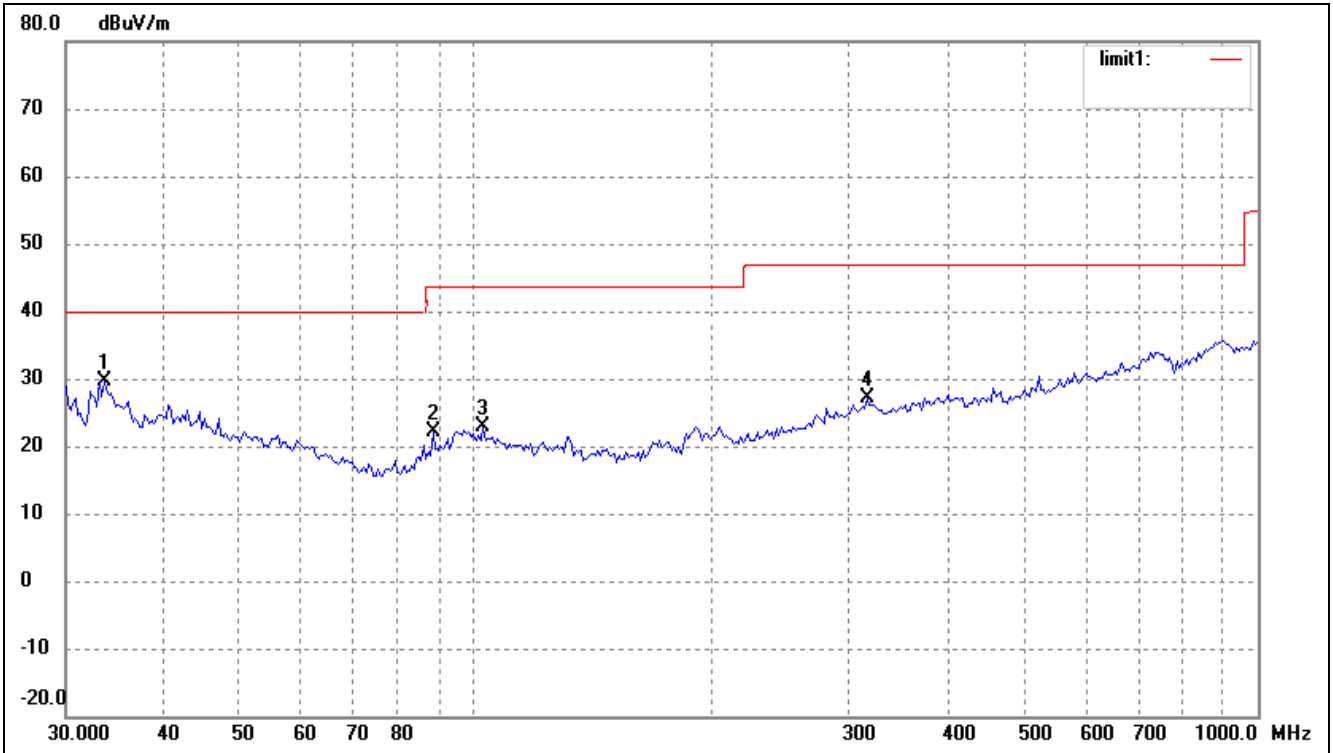


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.5624	21.05	8.63	29.68	40.00	-10.32	51	100	peak
2	88.3421	18.13	3.94	22.07	43.50	-21.43	54	100	peak
3	102.3597	16.33	6.61	22.94	43.50	-20.56	0	100	peak
4	316.5890	16.60	10.44	27.04	46.00	-18.96	69	100	peak

Plot of Radiated Emissions Test Data


EUT: *Mobile Phone*
 Tested Model: *I132*
 Operating Condition: *Downloading*
 Comment: *Connected to PC*

 Test Specification: *Horizontal*

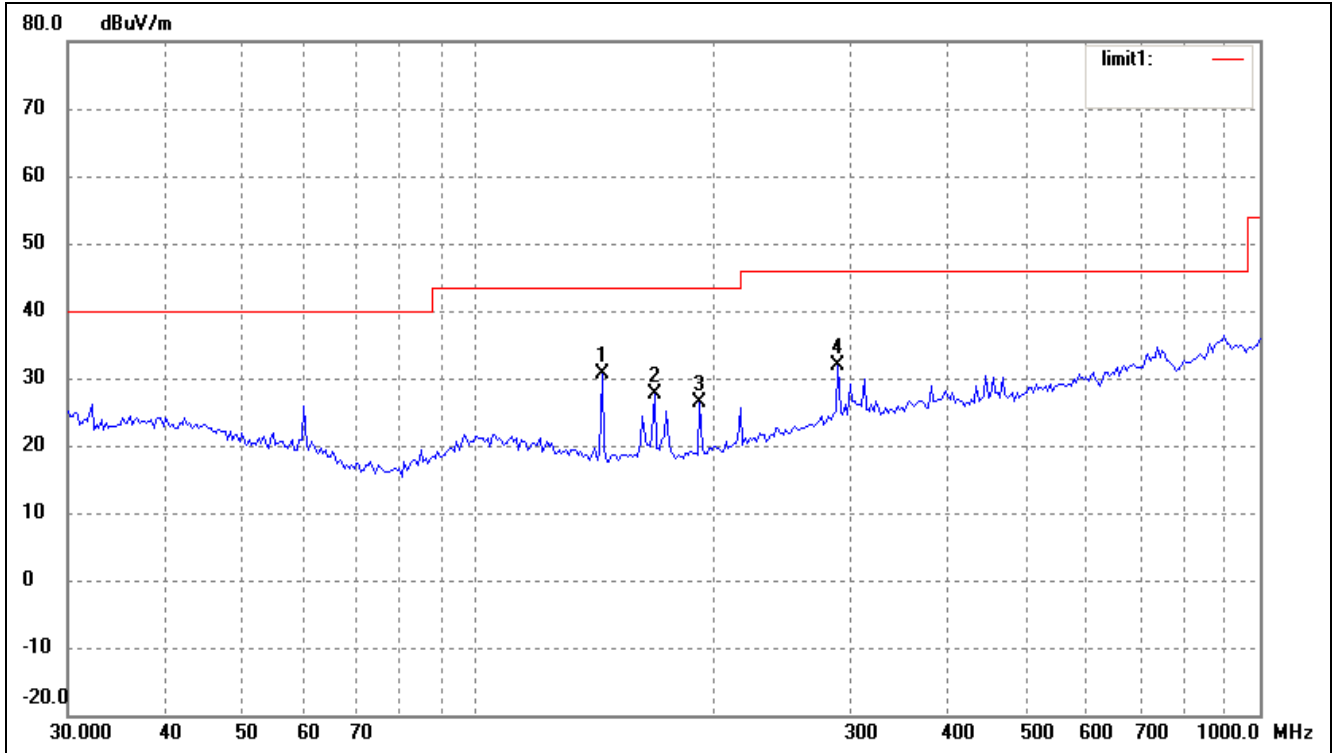

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	144.3348	27.21	3.46	30.67	43.50	-12.83	10	100	peak
2	168.4138	23.99	3.69	27.68	43.50	-15.82	20	100	peak
3	192.4186	22.14	4.31	26.45	43.50	-17.05	0	100	peak
4	289.0021	22.29	9.67	31.96	46.00	-14.04	54	100	peak

Test Specification: Vertical

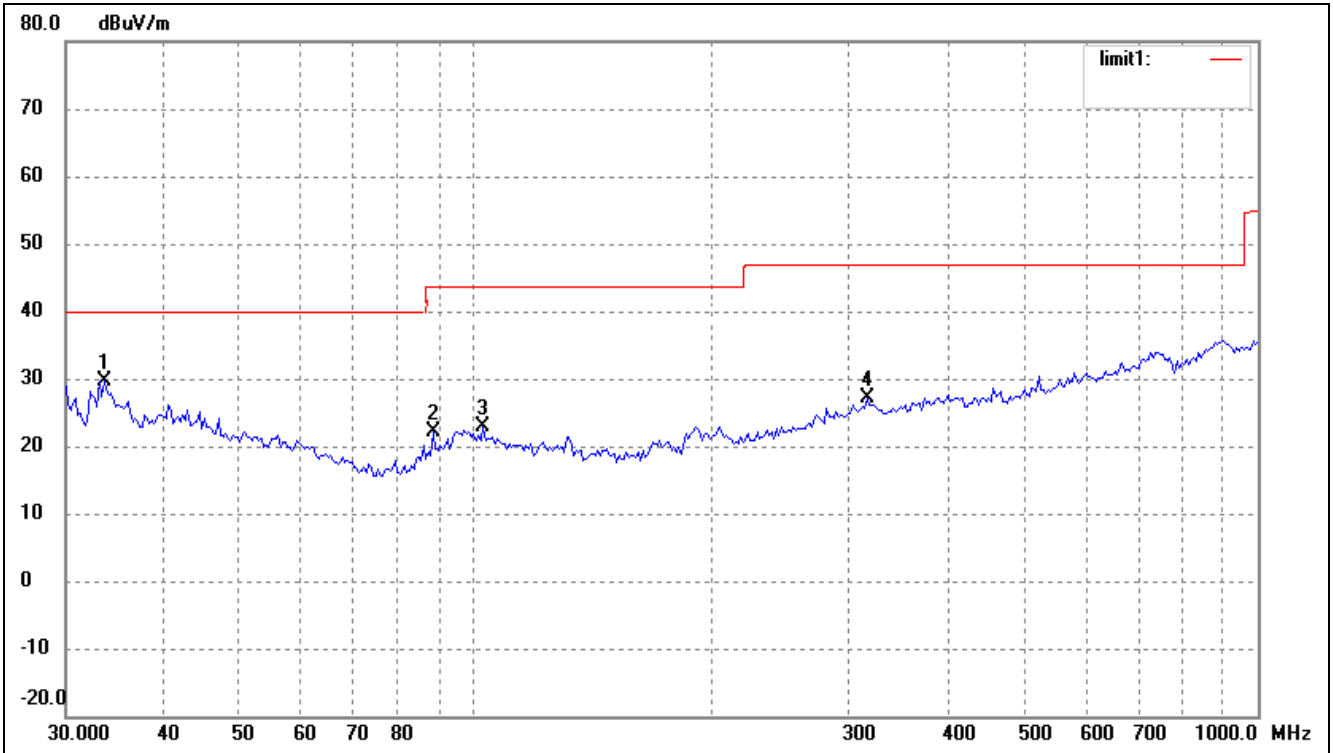

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.5624	21.05	8.63	29.68	40.00	-10.32	157	100	peak
2	88.3421	18.13	3.94	22.07	43.50	-21.43	36	100	peak
3	102.3597	16.33	6.61	22.94	43.50	-20.56	244	100	peak
4	316.5890	16.60	10.44	27.04	46.00	-18.96	21	100	peak

Note: Testing is carried out with frequency rang 9kHz to 1GHz. The measurements greater than 20dB below the limit from 9kHz to 30MHz..

***** END OF REPORT *****