

# **FCC Part 22H and 24E Test Report**

*For*

**GSM Dual Band GPRS Digital Mobile Phone**

**Model Name: i305**

**Brand Name: verykool**

**FCC ID: WA6I305**

**Report No.: AGC101409085202E1**

**Date of Issue: August 30, 2009**

*Prepared For*

**Verykool USA, Inc.**

**4350 Executive Drive. Suite 100 ,San Diego, CA 92121**

**California, United States**

TEL: +1-858-373-1600

FAX: +1-858-373-1505

*Prepared By*

**Attestation of Global Compliance Co., Ltd.**

**2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei,**

**Xixiang, Baoan District, Shenzhen, China**

TEL: 86-755-2908 1966

FAX: 86-755-2600 8484

## VERIFICATION OF COMPLIANCE

Applicant:	Verykool USA, Inc.
	4350 Executive Drive. Suite 100 ,San Diego, CA 92121, California, United States
Manufacturer:	SHENZHEN KONKA TELECOMMUNICATION TECHNOLOGY CO., LTD.
	NO.9008 SHENNAN ROAD, OVERSEAS CHINESE TOWN, SHENZHEN, GUANGDONG, CHINA
Product Description:	GSM Dual Band GPRS Digital Mobile Phone
Brand Name:	verykool
Model Number:	i305
FCC ID:	WA6I305
Date of Test:	August 20, 2009 to August 31, 2009

### We hereby certify that:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 22H and 24E

The test results of this report relate only to the tested sample identified in this report.

Checked By: Tony Tian  
Tony Tian      August 31, 2009

Authorized By King Zhang  
King Zhang      August 31, 2009

## TABLE OF CONTENTS

<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION .....	4
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	4
1.3 TEST METHODOLOGY .....	4
1.4 TEST FACILITY .....	4
1.5 MEASUREMENT INSTRUMENTS .....	5
1.6 SPECIAL ACCESSORIES.....	5
1.7 EQUIPMENT MODIFICATIONS.....	5
<b>2. SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
2.1 EUT CONFIGURATION.....	6
2.2 EUT EXERCISE .....	6
2.3 GENERAL TECHNICAL REQUIREMENTS .....	6
2.4 CONFIGURATION OF EUT SYSTEM.....	6
<b>3. SUMMARY OF TEST RESULTS .....</b>	<b>7</b>
<b>4. DESCRIPTION OF TEST MODES .....</b>	<b>7</b>
<b>5. OUTPUT POWER .....</b>	<b>8</b>
<b>5.1 CONDUCTED OUTPUT POWER.....</b>	<b>8</b>
5.1.1 MEASUREMENT METHOD.....	8
5.1.2 PROVISIONS APPLICABLE .....	8
5.1.3 MEASUREMENT RESULT .....	8
<b>5.2 RADIATED OUTPUT POWER .....</b>	<b>9</b>
5.2.1 MEASUREMENT METHOD.....	9
5.2.2 PROVISIONS APPLICABLE .....	9
5.2.3 MEASUREMENT RESULT .....	10
<b>6. SPURIOUS EMISSION.....</b>	<b>8</b>
<b>6.1 CONDUCTED SPURIOUS EMISSION.....</b>	<b>8</b>
6.1.1 MEASUREMENT METHOD.....	11
6.1.2 PROVISIONS APPLICABLE .....	11
6.1.3 MEASUREMENT RESULT .....	12
<b>6.2 RADIATED SPURIOUS EMISSION .....</b>	<b>9</b>
6.2.1 MEASUREMENT METHOD.....	12
6.2.2 PROVISIONS APPLICABLE .....	14
6.2.3 MEASUREMENT RESULT .....	14
<b>7. MAINS CONDUCTED EMISSION .....</b>	<b>8</b>
7.1 MEASUREMENT METHOD.....	15
7.2 PROVISIONS APPLICABLE .....	15

7.3 MEASUREMENT RESULT .....	15
<b>8. FREQUENCY STABILITY .....</b>	<b>8</b>
8.1 MEASUREMENT METHOD.....	17
8.2 PROVISIONS APPLICABLE .....	17
8.3 MEASUREMENT RESULT .....	18
<b>9. OCCUPIED BANDWIDTH.....</b>	<b>8</b>
9.1 MEASUREMENT METHOD.....	19
9.2 PROVISIONS APPLICABLE .....	19
9.3 MEASUREMENT RESULT .....	19
<b>10. EMISSION BANDWIDTH(-26DBC) .....</b>	<b>8</b>
10.1 MEASUREMENT METHOD.....	19
10.2 PROVISIONS APPLICABLE .....	19
10.3 MEASUREMENT RESULT .....	19
<b>11. BAND EDGE .....</b>	<b>8</b>
11.1 MEASUREMENT METHOD.....	21
11.2 PROVISIONS APPLICABLE .....	21
11.3 MEASUREMENT RESULT .....	21
<b>APPENDIX I .....</b>	<b>22</b>
TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION.....	22
<b>APPENDIX II .....</b>	<b>31</b>
TEST PLOTS FOR RADIATED SPURIOUS EMISSION .....	31
<b>APPENDIX III .....</b>	<b>38</b>
TEST PLOTS FOR OCCUPIED BANDWIDTH (99%) .....	38
<b>APPENDIX IV .....</b>	<b>45</b>
TEST PLOTS FOR EMISSION BANDWIDTH (-26DBC).....	45
<b>APPENDIX V .....</b>	<b>52</b>
TEST PLOTS FOR BAND EDGES.....	52
<b>APPENDIX VI.....</b>	<b>57</b>
PHOTOGRAPHS OF TEST SETUP .....	57
<b>APPENDIX VII.....</b>	<b>59</b>
PHOTOGRAPHS OF EUT .....	59

# 1. GENERAL INFORMATION

## 1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Name:	GSM Dual Band GPRS Digital Mobile Phone
Model:	i305
Brand:	verykool
FCC Identifier:	FCC ID:WA6I305
Frequency:	GSM 850 MHz; PCS 1900 MHz
Antenna:	Internal
Power Supply:	Battery
Output Power:	29.56 dBm Maximum ERP measured for GSM 850 1.78 W Maximum Conducted Power for GSM 850 23.35 dBm Maximum ERP measured for GSM 850 0.85 W Maximum Conducted Power for GSM 850
Extreme Vol. Limits:	3.5 VDC to 4.2 VDC (Nominal 3.7 VDC)
Extreme Temp. Tolerance	-30°C to +50°C

## 1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID:WA6I305 filing to comply with the FCC Part 22H and 24E requirements.

## 1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2003; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

## 1.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of World Standardization Certification & Testing Co., Ltd. 1-2/F, Dachong Keji Building, No.28 of Tonggu Road, Nanshan District, Shenzhen, China. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

FCC register No.: 276008 and IC register No.: 7700A-1.

### 1.5 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2009.06
TEST RECEIVER	R&S	ESCI	A0304218	2009.06
COMMUNICATION TESTER	AGILENT	8960	3104A03367	2009.06
COMMUNICATION TESTER	R&S	CMU200	A0304247	2009.06
TEST RECEIVER	R&S	FCKL1528	A0304230	2009.06
LISN	SCHWARZBECK	NSLK8127	A0304233	2009.06
Climate Chamber	Albatross	--	--	2009.12
LOOP ANTENNA	R&S	HFH2-Z2	A0304220	2009.06
BROADBAND ANT.	R&S	HL562	A0304224	2009.06
HORN ANT.	R&S	HF906	100150	2009.06

### 1.6 SPECIAL ACCESSORIES

The battery and travel charger supplied by the applicant were used as accessories and being tested with EUT intended for FCC grant together.

### 1.7 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

## 2. SYSTEM TEST CONFIGURATION

### 2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

### 2.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

### 2.3 GENERAL TECHNICAL REQUIREMENTS

Item Number	Item Description		FCC Rules
1	Output Power	Conducted	22.913(a) / 24.232 (b)
		Radiated	
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238
		Radiated Spurious Emission	
3	Mains Conducted Emission		15.107 / 15.207
4	Frequency Stability		2.1055 / 24.235
5	Occupied Bandwidth		2.1049 (h)(i)
6	Emission Bandwidth		22.917(b) / 24.238 (b)
7	Band Edge		22.917(b) / 24.238 (b)

### 2.4 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	Identifier	Note
1	GSM Dual Band GPRS Digital Mobile Phone	I305	FCC ID: WA6I305	EUT
--	--	--	--	--

### 3. SUMMARY OF TEST RESULTS

Item Number	Item Description		FCC Rules	Result
1	Output Power	Conducted Output Power	22.913(a) / 24.232 (b)	Pass
		Radiated Output Power		
2	Spurious Emission	Conducted Spurious Emission	2.1051 / 22.917 / 24.238	Pass
		Radiated Spurious Emission		
3	Mains Conducted Emission		15.107 / 15.207	Pass
4	Frequency Stability		2.1055 /24.235	Pass
5	Occupied Bandwidth		2.1049 (h)(i)	Pass
6	Emission Bandwidth		22.917(b) / 24.238 (b)	Pass
7	Band Edge		22.917(b) / 24.238 (b)	Pass

### 4. DESCRIPTION OF TEST MODES

During the testing, the EUT (GSM Dual Band GPRS Digital Mobile Phone) was controlled via Rhode & Schwarz Digital Radio Communication Tester(CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.



## 5. OUTPUT POWER

### 5.1 Conducted Output Power

#### 5.1.1 MEASUREMENT METHOD

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM, GPRS, EGPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

#### 5.1.2 PROVISIONS APPLICABLE

Conducted Output Power Limits for GSM 850 MHZ			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	5	33 dBm (2W)	+/- 2
GPRS	3	33 dBm (2W)	+/- 2

Conducted Output Power Limits for PCS 1900 MHZ			
Mode	Power Step	Nominal Peak Power	Tolerance(dB)
GSM	0	30 dBm (1W)	+/- 2
GPRS	3	30 dBm (1W)	+/- 2

#### 5.1.3 MEASUREMENT RESULT

Conducted Output Power for GSM 850 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Peak Power (dBm)	Tolerance (dB)	
GSM	824.2	5	32.50	-0.5	Pass
	836.6	5	31.92	-1.08	Pass
	848.8	5	31.54	-1.46	Pass
GPRS	824.2	3	32.36	-0.64	Pass
	836.6	3	31.77	-1.23	Pass
	848.8	3	31.34	-1.66	Pass

Conducted Output Power for PCS 1900 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Peak Power (dBm)	Tolerance (dB)	
GSM	1850.2	0	29.30	-0.7	Pass
	1880.0	0	28.96	-1.04	Pass
	1909.8	0	29.10	-0.9	Pass
GPRS	1850.2	3	29.27	-0.73	Pass
	1880.0	3	28.94	-1.06	Pass
	1909.8	3	29.06	-0.94	Pass

## 5.2 Radiated Output Power

### 5.2.1 MEASUREMENT METHOD

The measurements procedures specified in TIA-603C-2004 were applied.

- 1 In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
- 2 The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
- 3 The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
- 4 From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
- 5 The EUT is then put into continuously transmitting mode at its maximum power level.
- 6 Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step1 is added to this result.
- 7 This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
- 8 ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15dBi$ .

### 5.2.2 PROVISIONS APPLICABLE

This is the test for the maximum radiated power from the EUT. Rule Part 24.232(b) specifies, "Mobile/portable stations are limited to 2 watts e.i.r.p. Peak power" and 24.232(c) specifies that "Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage." Rule Part 22.913(a) specifies "Maximum ERP. The effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts."

Radiated Power Limits for GSM 850 MHZ (ERP)		
Mode	Power Step	Nominal Peak Power
GSM	5	$\leq 38.45$ dBm (7W)
GPRS	3	$\leq 38.45$ dBm (7W)

Radiated Power Limits for PCS 1900 MHZ (E.I.R.P.)		
Mode	Power Step	Nominal Peak Power
GSM	0	$\leq 33$ dBm (2W)
GPRS	3	$\leq 33$ dBm (2W)

### 5.2.3 MEASUREMENT RESULT

Radiated Power (ERP) for GSM 850 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak ERP (dBm)	Polarization Of Max. ERP	
GSM	824.2	5	27.60	Horizontal	Pass
	836.6	5	28.29	Horizontal	Pass
	848.8	5	29.56	Horizontal	Pass
GPRS	824.2	3	27.74	Horizontal	Pass
	836.6	3	28.41	Horizontal	Pass
	848.8	3	29.09	Horizontal	Pass

Radiated Power (E.I.R.P) for PCS 1900 MHZ					
Mode	Frequency	Power Step	Result		Conclusion
			Max. Peak E.I.R.P.(dBm)	Polarization Of Max. E.I.R.P.	
GSM	1850.2	0	23.31	Horizontal	Pass
	1880.0	0	22.54	Horizontal	Pass
	1909.8	0	22.26	Horizontal	Pass
GPRS	1850.2	3	23.35	Horizontal	Pass
	1880.0	3	22.46	Horizontal	Pass
	1909.8	3	22.36	Horizontal	Pass

## 6. SPURIOUS EMISSION

### 6.1 CONDUCTED SPURIOUS EMISSION

#### 6.1.1 MEASUREMENT METHOD

The following steps outline the procedure used to measure the conducted emissions from the EUT.

- 1, Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
- 2, Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.

Typical Channels for testing of GSM 850 MHz	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

Typical Channels for testing of PCS 1900 MHz	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

#### 6.1.2 PROVISIONS APPLICABLE

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.

### 6.1.3 MEASUREMENT RESULT

Conducted Spurious Emission for GSM 850 MHz						
Harmonic	Tx ch. 128 Freq. (MHz)	Level (dBm)	Tx ch. 190 Freq. (MHz)	Level (dBm)	Tx ch. Freq. (MHz) 251	Level (dBm)
2	1648.4	B.I.N.F	1673.2	nf	1697.6	B.I.N.F
3	2472.6	B.I.N.F	2509.8	nf	2546.4	B.I.N.F
4	3296.8	B.I.N.F	3346.4	nf	3395.2	B.I.N.F
5	4121	B.I.N.F	4183	nf	4244	B.I.N.F
6	4945.2	B.I.N.F	5019.6	nf	5092.8	B.I.N.F
7	5769.4	B.I.N.F	5856.2	nf	5941.6	B.I.N.F
8	6593.6	B.I.N.F	6692.8	nf	6790.4	B.I.N.F
9	7417.8	B.I.N.F	7529.4	nf	7639.2	B.I.N.F
10	8242	B.I.N.F	8366	nf	8488	B.I.N.F
● B.I.N.F: Below Instruments Noise floor						

Conducted Spurious Emission for PCS 1900 MHz						
Harmonic	Tx ch. 512 Freq. (MHz)	Level (dBm)	Tx ch. 661 Freq. (MHz)	Level (dBm)	Tx ch. 810 Freq. (MHz)	Level (dBm)
2	3700.4	B.I.N.F	3760	nf	3819.6	B.I.N.F
3	5550.6	B.I.N.F	5640	nf	5729.4	B.I.N.F
4	7400.8	B.I.N.F	7520	nf	7639.2	B.I.N.F
5	9251.0	B.I.N.F	9400	nf	9549.0	B.I.N.F
6	11101.2	B.I.N.F	11280	nf	11458.8	B.I.N.F
7	12951.4	B.I.N.F	13160	nf	13368.6	B.I.N.F
8	14801.6	B.I.N.F	15040	nf	15278.4	B.I.N.F
9	16651.8	B.I.N.F	16920	nf	17188.2	B.I.N.F
10	18502.0	B.I.N.F	18800	nf	19098.0	B.I.N.F
● B.I.N.F: Below Instruments Noise floor						


## 6.2 Radiated Spurious Emission

### 6.2.1 MEASUREMENT METHOD


The measurements procedures specified in TIA-603C-2004 were used for testing. The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set 1MHz as outlined in Part 24.238. The measurements were performed on all modes(GSM, GPRS, EGPRS) at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for both GSM band and PCS band.

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as,  $RSE = R_x (\text{dBuV}) + CL (\text{dB}) + SA (\text{dB}) + \text{Gain} (\text{dBi}) - 107 (\text{dBuV to dBm})$  The SA is calibrated using following setup.

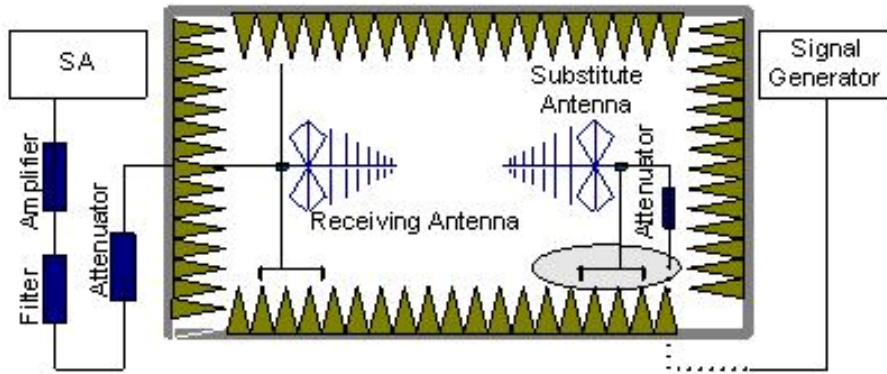

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

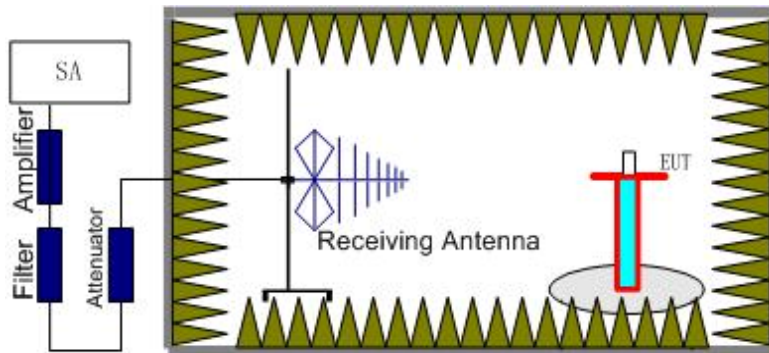

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of the PCS band (1850.2 MHz, 1880 MHz and 1909.8 MHz) ,GSM850 band (824.2MHz, 836.6MHz, 848.8MHz) . It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the PCS1900 ,GSM850 into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below:  $\text{Power} = P_{\text{Mea}} + A_{Rpl}$

## 6.2.2 PROVISIONS APPLICABLE

(a) On any frequency outside a licensee's frequency block (e.g. A, D, B, etc.) within the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power (P, in Watts) by at least  $43+10\log(P)$  dB. The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log (P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

## 6.2.3 MEASUREMENT RESULT

<b>The Worst Test Results for Channel 128 / 824.2 MHz</b>					
Frequency(GHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1.6485	-41.39	-2.95	-38.44	-13	Horizontal
2.4730	-44.55	0.15	-44.70	-13	Horizontal

<b>The Worst Test Results for Channel 190/836.6 MHz</b>					
Frequency(GHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1.6730	-43.28	-2.85	-40.43	-13	Horizontal
2.5100	-40.31	-0.25	-40.06	-13	Horizontal
4.1835	-46.05	2.55	-48.60	-13	Horizontal

<b>The Worst Test Results for Channel 251/848.8 MHz</b>					
Frequency(GHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
1.6975	-41.72	-2.25	-39.47	-13	Horizontal
2.5465	-46.62	0.35	-46.97	-13	Vertical

<b>The Worst Test Results for Channel 512/1850.2 MHz</b>					
Frequency(GHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3.7000	-40.74	3.10	-43.84	-13	Vertical
12.9510	-40.95	12.3	-53.25	-13	Vertical

<b>The Worst Test Results for Channel 661/1880.0 MHz</b>					
Frequency(GHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3.7595	-43.94	3.6	-47.54	-13	Vertical
13.1604	-40.3	14.3	-54.6	-13	Vertical

<b>The Worst Test Results for Channel 810/1909.8 MHz</b>					
Frequency(GHz)	Power(dBm)	A <sub>Rpl</sub> (dBm)	P <sub>Mea</sub> (dBm)	Limit (dBm)	Polarity
3.8195	-44.46	3.8	-48.26	-13	Vertical
13.3686	-40.16	11.8	-51.96	-13	Vertical

## 7. CONDUCTED EMISSION

### 7.1 MEASUREMENT METHOD


The measurement procedure specified in ANSI C63.4-2003 was used for testing. Conducted Emission was measured with travel charger.

### 7.2 PROVISIONS APPLICABLE

Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with the logarithm of the frequency.

### 7.3 MEASUREMENT RESULT

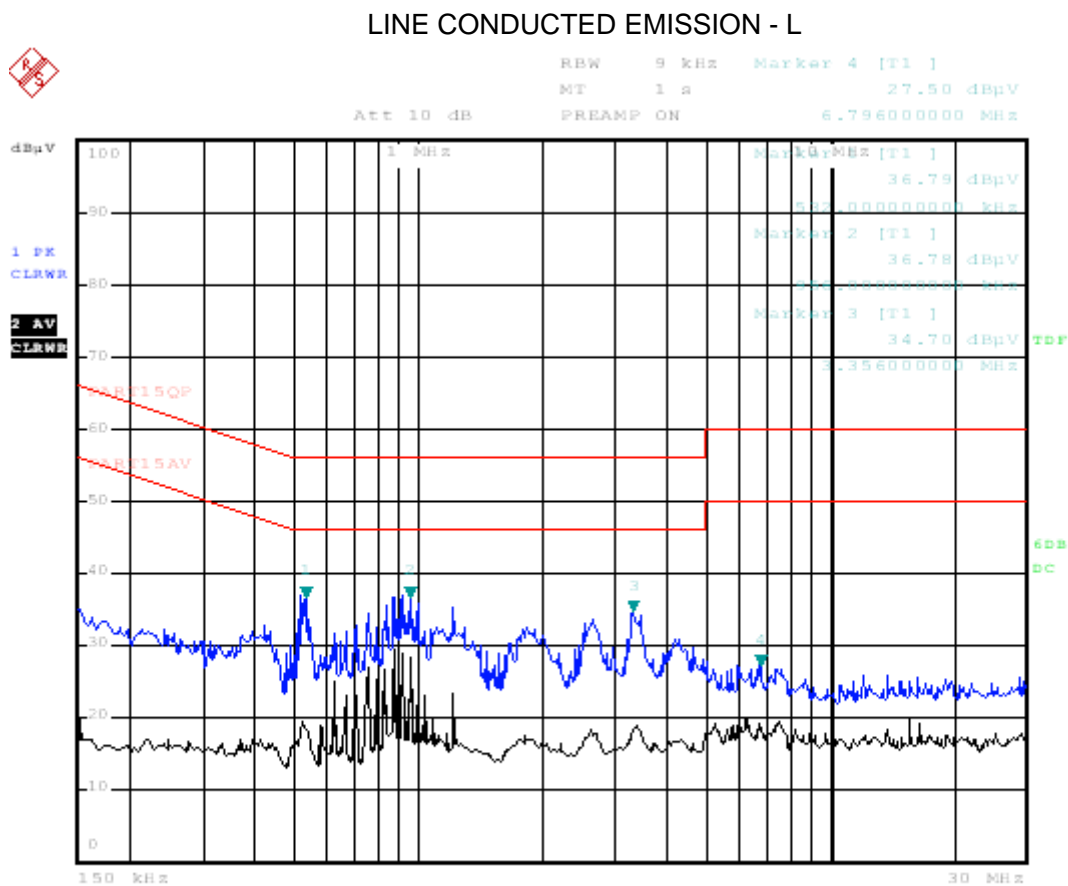




# LINE CONDUCTED EMISSION - N



RBW 9 kHz Marker 3 [T1 1]  
 MT 1 a 31.34 dBpV  
 Att 10 dB PREAMP ON 3.320000000 MHz

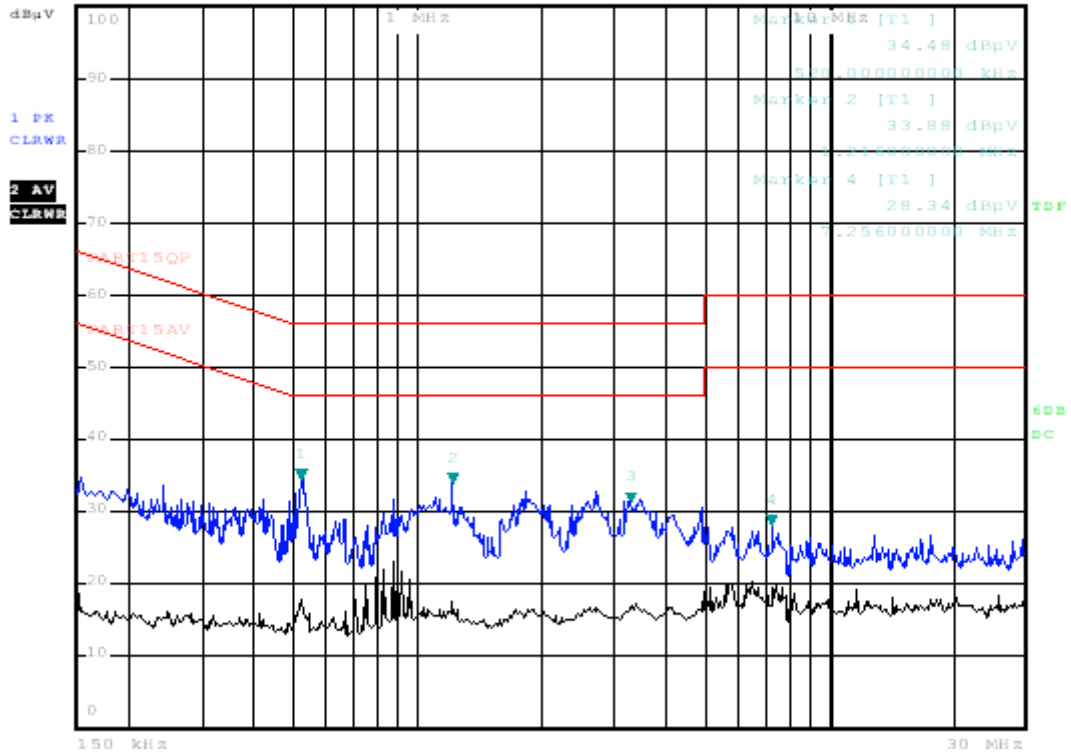

## 8. FREQUENCY STABILITY

### 8.1 MEASUREMENT METHOD

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of R&S CMU200 DIGITAL RADIO COMMUNICATION TESTER.

- 1 , Measure the carrier frequency at room temperature.
- 2 , Subject the EUT to overnight soak at -30°C.
- 3 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on channel 661 for PCS 1900 , channel 190 for GSM850 measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 4 , Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 5 , Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
- 6 , Subject the EUT to overnight soak at +50°C.
- 7 , With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
- 8 , Repeat the above measurements at 10 C increments from +50°C to -30°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
- 9 , At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

### 8.2 PROVISIONS APPLICABLE

#### 8.2.1 For Hand carried battery powered equipment

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of between 3.5VDC and 4.2VDC, with a nominal voltage of 3.8VDC. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress. These voltages represent a tolerance of -10 % and +12.5 %. For the purposes of measuring frequency stability these voltage limits are to be used.

#### 8.2.2 For equipment powered by primary supply voltage

According to the JTC standard the frequency stability of the carrier shall be accurate to within 0.1 ppm of the received frequency from the base station. This accuracy is sufficient to meet Sec. 24.235, Frequency Stability. The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. For this EUT section 2.1055(d)(1) applies. This requires

varying primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

### 8.3 MEASUREMENT RESULT

Frequency Error Against Voltage for GSM 850 MHz		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	15	0.018
3.8	18	0.021
4.2	18	0.021

Frequency Error Against Temperature for GSM 850 MHz		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	29	0.035
-20	29	0.035
-10	27	0.032
0	25	0.030
10	22	0.026
20	17	0.020
30	18	0.021
40	22	0.026
50	26	0.031

Frequency Error Against Voltage for PCS 1900 MHz		
Voltage(V)	Frequency error(Hz)	Frequency error(ppm)
3.5	29	0.015
3.8	27	0.015
4.2	31	0.016

Frequency Error Against Temperature for PCS 1900 MHz		
temperature(°C)	Frequency error(Hz)	Frequency error(ppm)
-30	38	0.021
-20	38	0.021
-10	38	0.021
0	37	0.020
10	37	0.020
20	30	0.015
30	31	0.016
40	38	0.020
50	41	0.022

## 9. OCCUPIED BANDWIDTH

### 9.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 9.2 PROVISIONS APPLICABLE

The occupied bandwidth (99%) shall not exceed 300 KHz.

### 9.3 MEASUREMENT RESULT

Occupied Bandwidth (99%) for GSM 850 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
GSM	824.2	245.192
	836.6	243.590
	848.8	246.795
GPRS	824.2	245.192
	836.6	245.192
	848.8	243.590

Occupied Bandwidth (99%) for PCS 1900 MHz		
Mode	Frequency(MHz)	Occupied Bandwidth (99%)( kHz)
GSM	1850.2	246.795
	1880.0	243.590
	1909.8	245.192
GPRS	1850.2	243.590
	1880.0	245.192
	1909.8	248.397

## 10. Emission Bandwidth

### 10.1 MEASUREMENT METHOD

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### 10.2 PROVISIONS APPLICABLE

The emission bandwidth (99%) shall not exceed 300 KHz.

### 10.3 MEASUREMENT RESULT

<b>Emission Bandwidth (-26dBc) for GSM 850 MHz</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)
GSM	824.2	306.090
	836.6	304.487
	848.8	307.692
GPRS	824.2	307.692
	836.6	306.090
	848.8	307.692

<b>Emission Bandwidth (-26dBc) for PCS 1900 MHz</b>		
Mode	Frequency(MHz)	Occupied Bandwidth (-26dBc)( kHz)
GSM	1850.2	304.487
	1880.0	306.090
	1909.8	306.090
GPRS	1850.2	304.487
	1880.0	306.090
	1909.8	304.487

## **11. BAND EDGE**

### **11.1 MEASUREMENT METHOD**

The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.

### **11.2 PROVISIONS APPLICABLE**

as Specified in FCC rules of 22.917(b) and 24.238(b)

### **11.3 MEASUREMENT RESULT**


Please refers to Appendix V for compliance test plots for band edges

## **APPENDIX I**


### **TEST PLOTS FOR CONDUCTED SPURIOUS EMISSION**

# CONDUCTED EMISSION IN GSM BAND

## Conducted Emission Transmitting Mode CH 128 30MHz – 4GHz

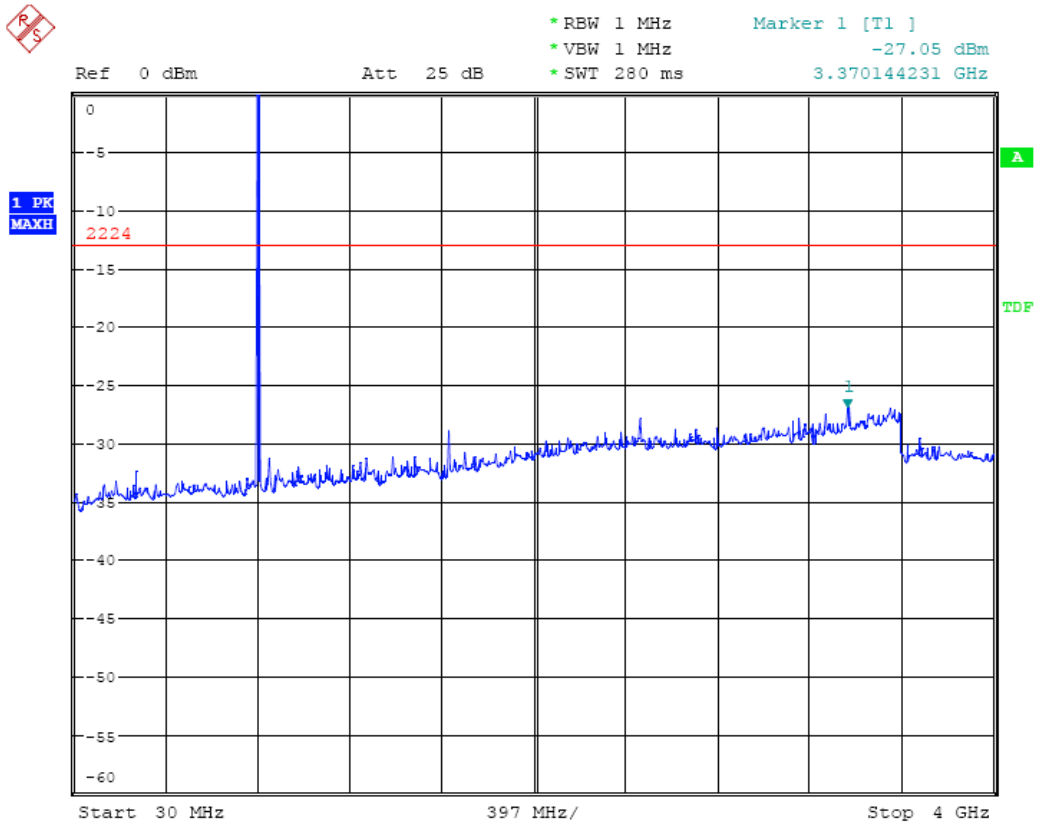


## Conducted Emission Transmitting Mode CH 128 4GHz – 10GHz

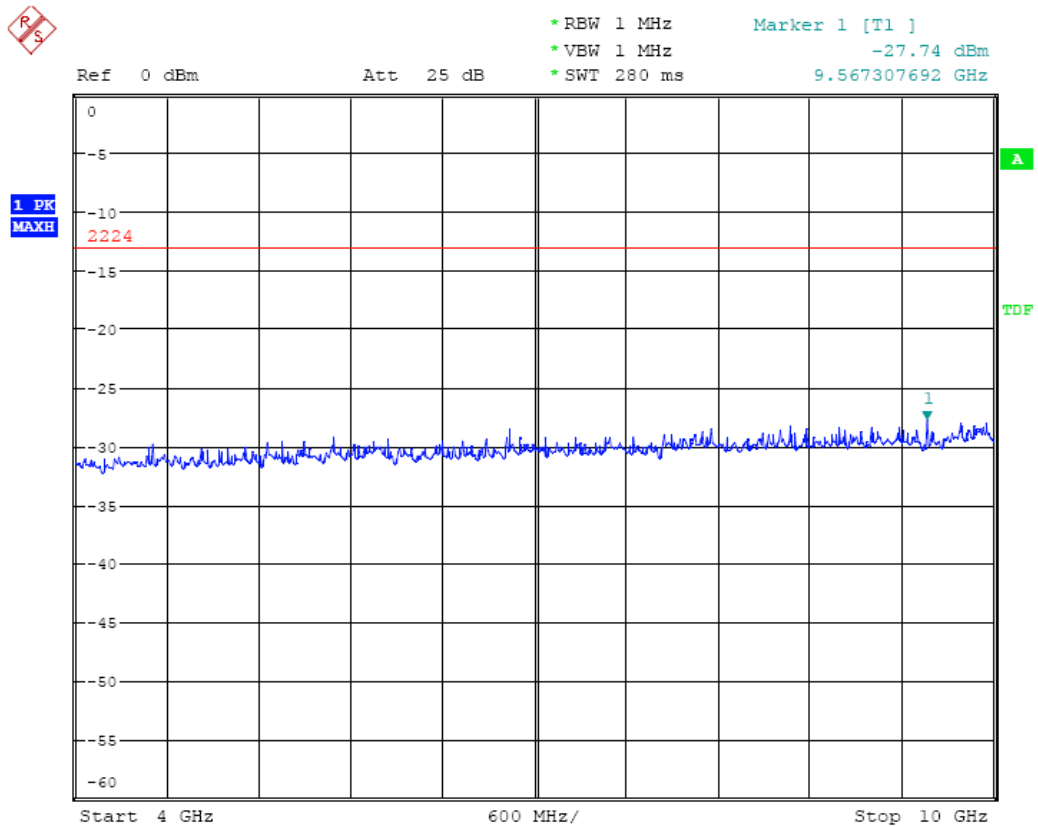





### Conducted Emission Transmitting Mode CH 190 30MHz – 4GHz

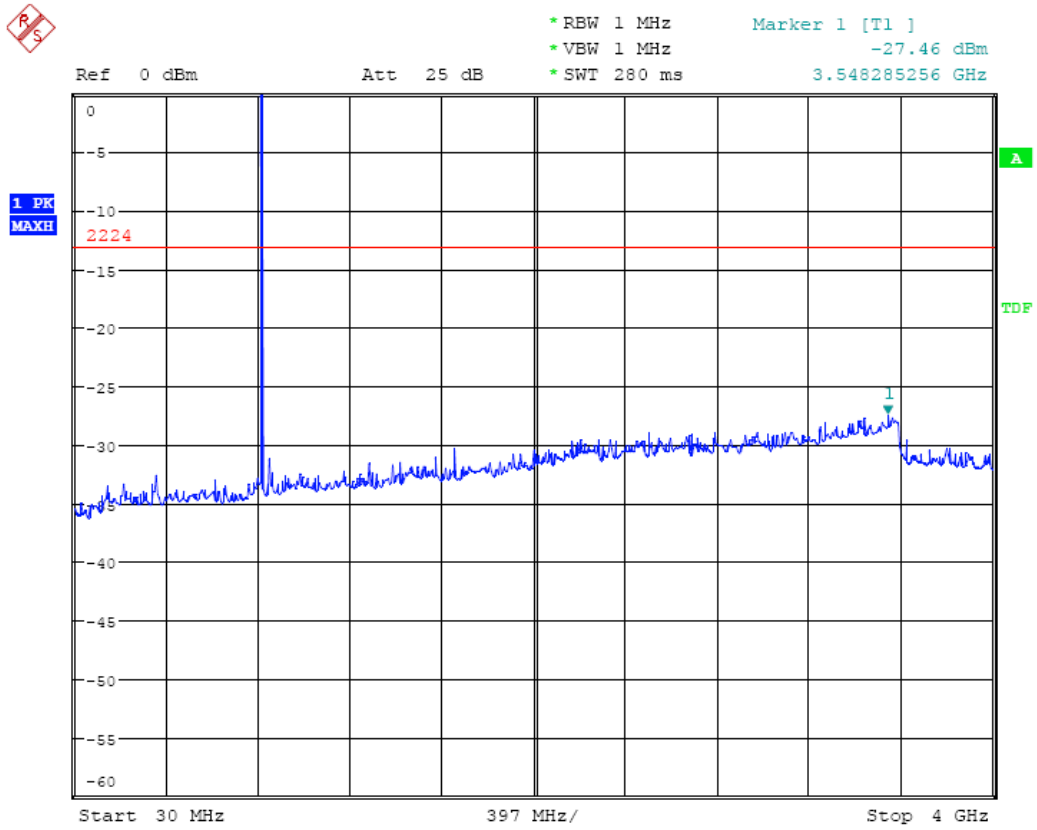


### Conducted Emission Transmitting Mode CH 190 4GHz – 10GHz

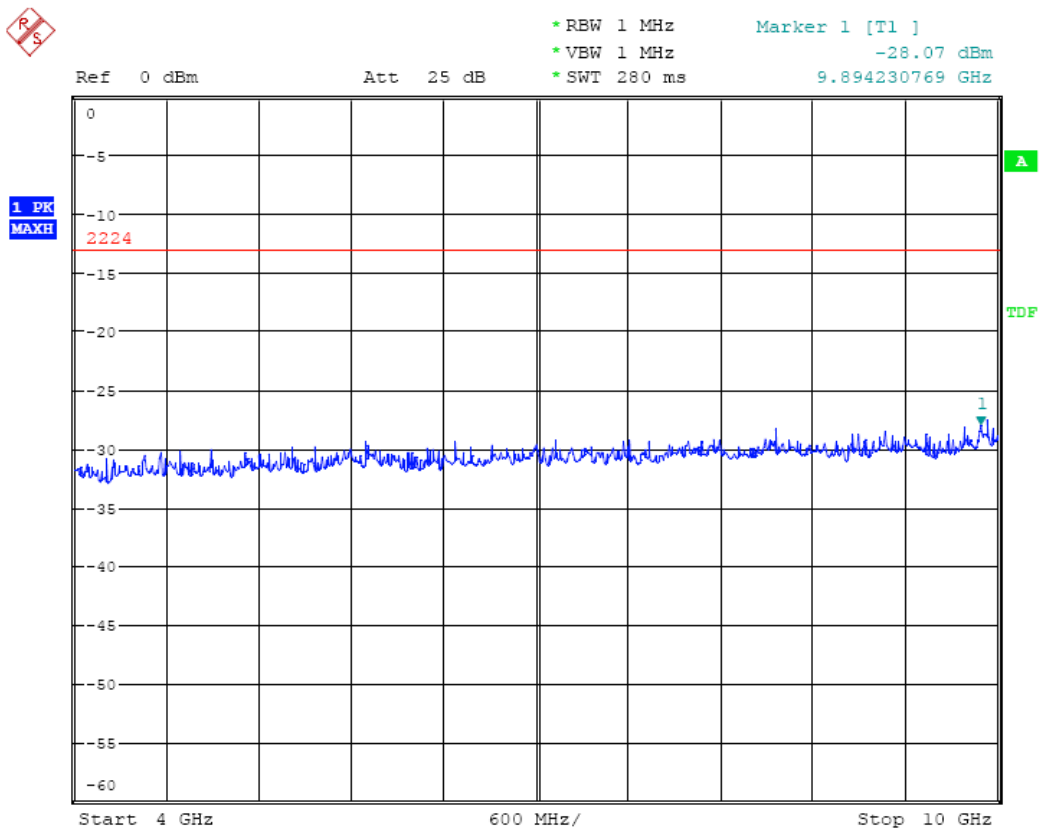


### Conducted Emission Transmitting Mode CH 251 30MHz – 4GHz

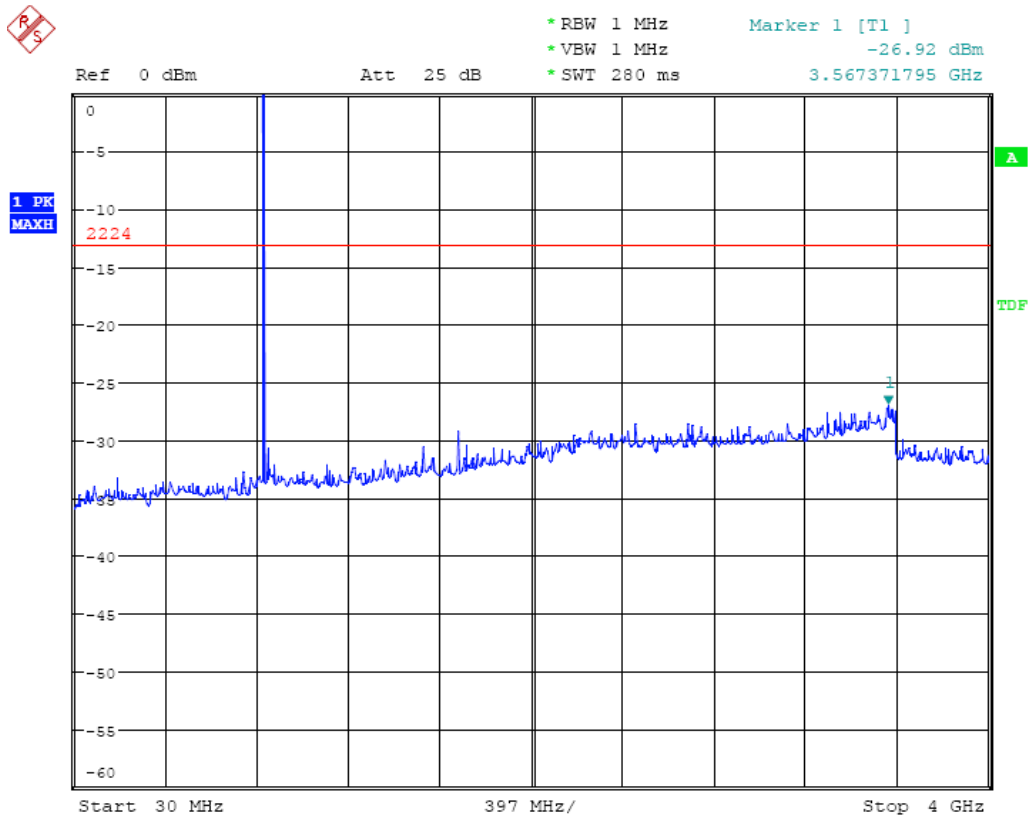


### Conducted Emission Transmitting Mode CH 251 4GHz – 10GHz

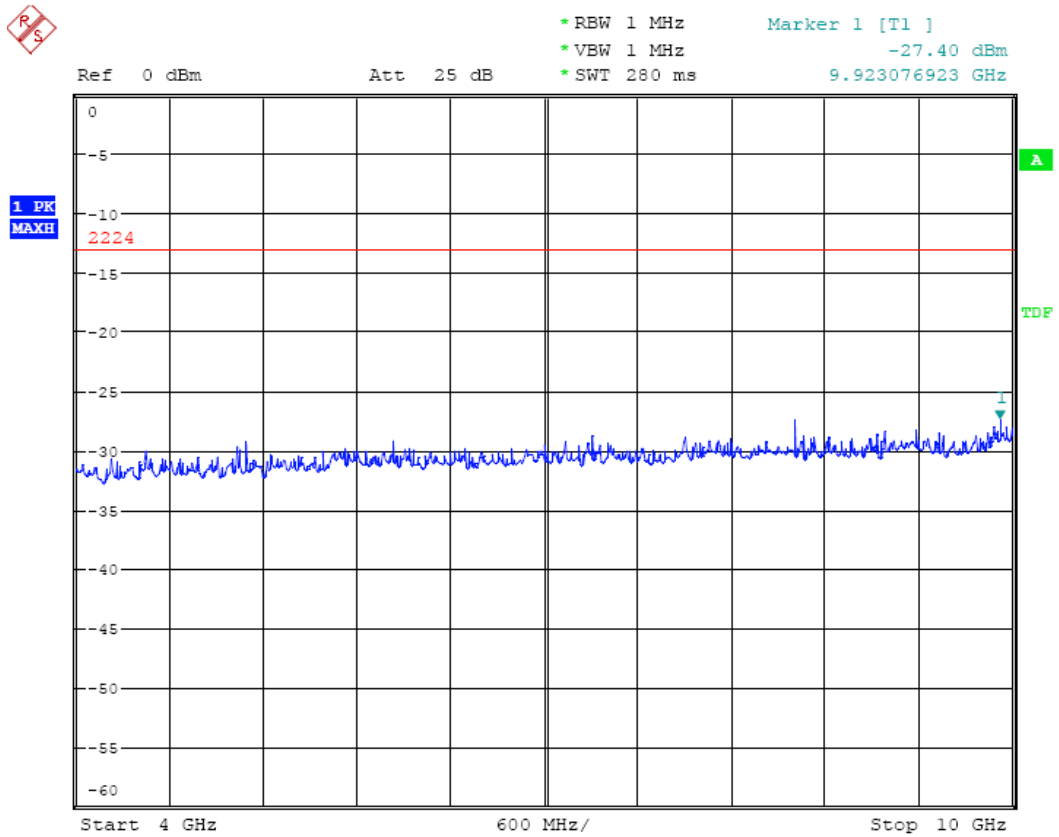

### Conducted Emission Idle Mode 30MHz – 4GHz

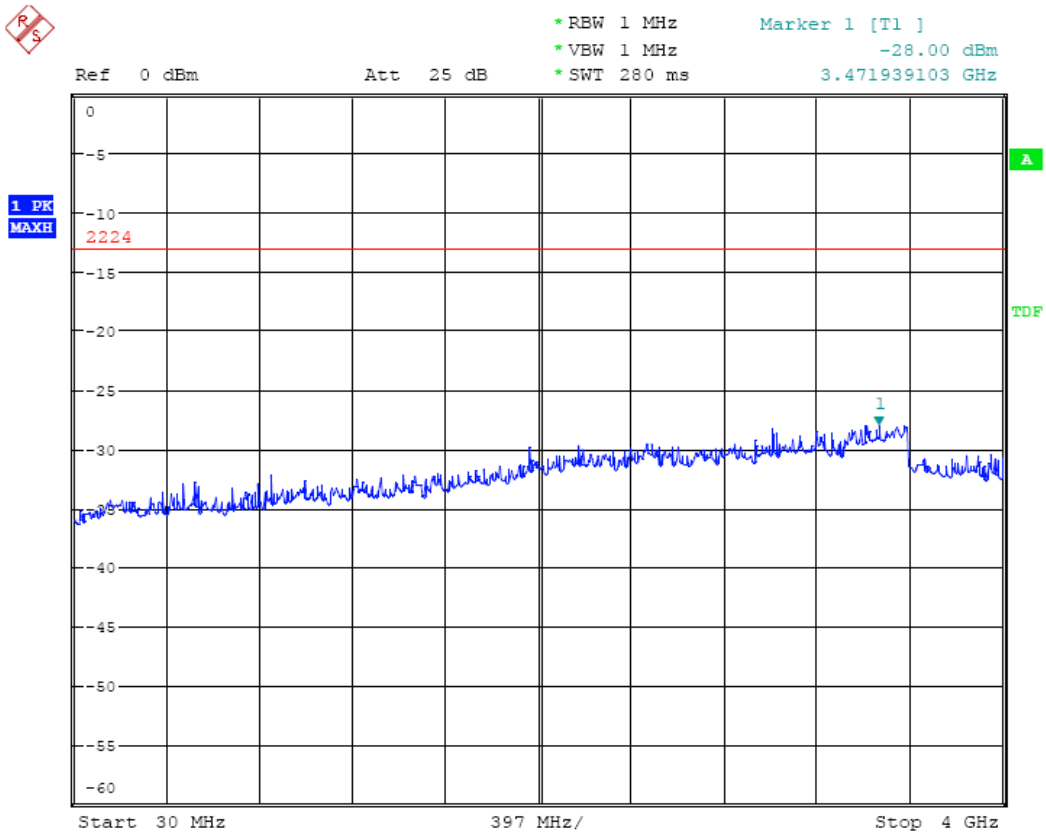


### Conducted Emission Idle Mode 4GHz – 10GHz

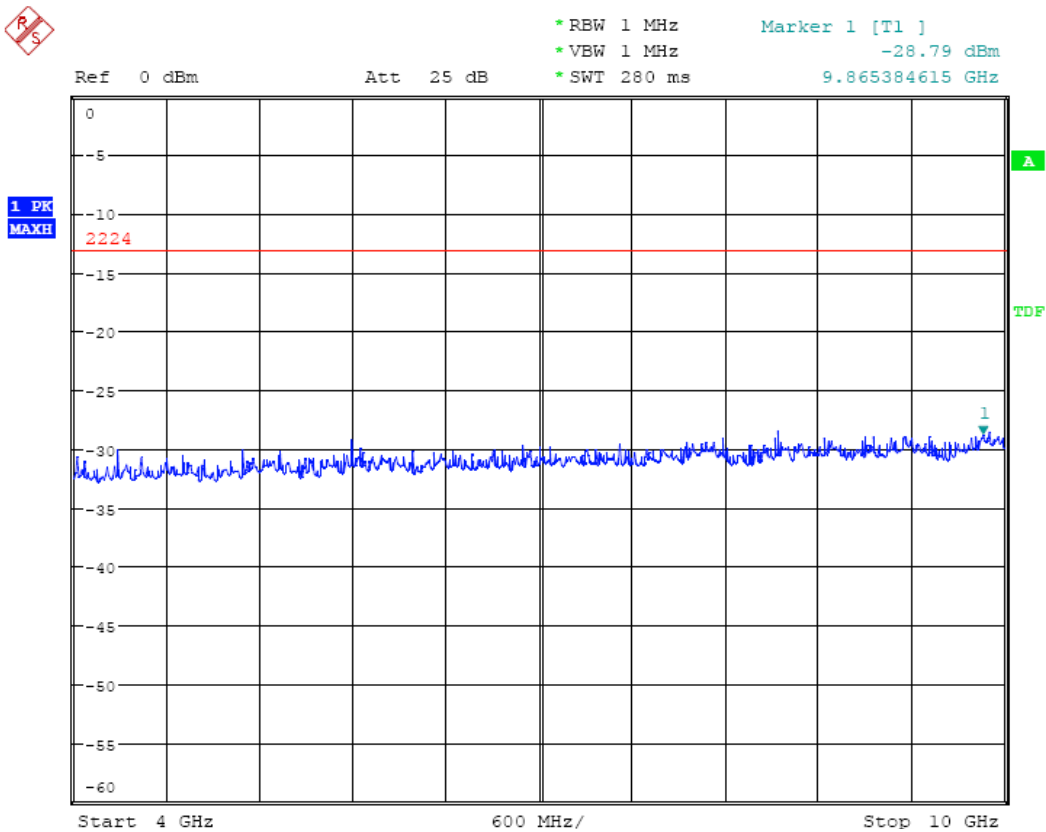


# CONDUCTED EMISSION IN PCS BAND


## Conducted Emission Transmitting Mode CH 512 30MHz – 4GHz

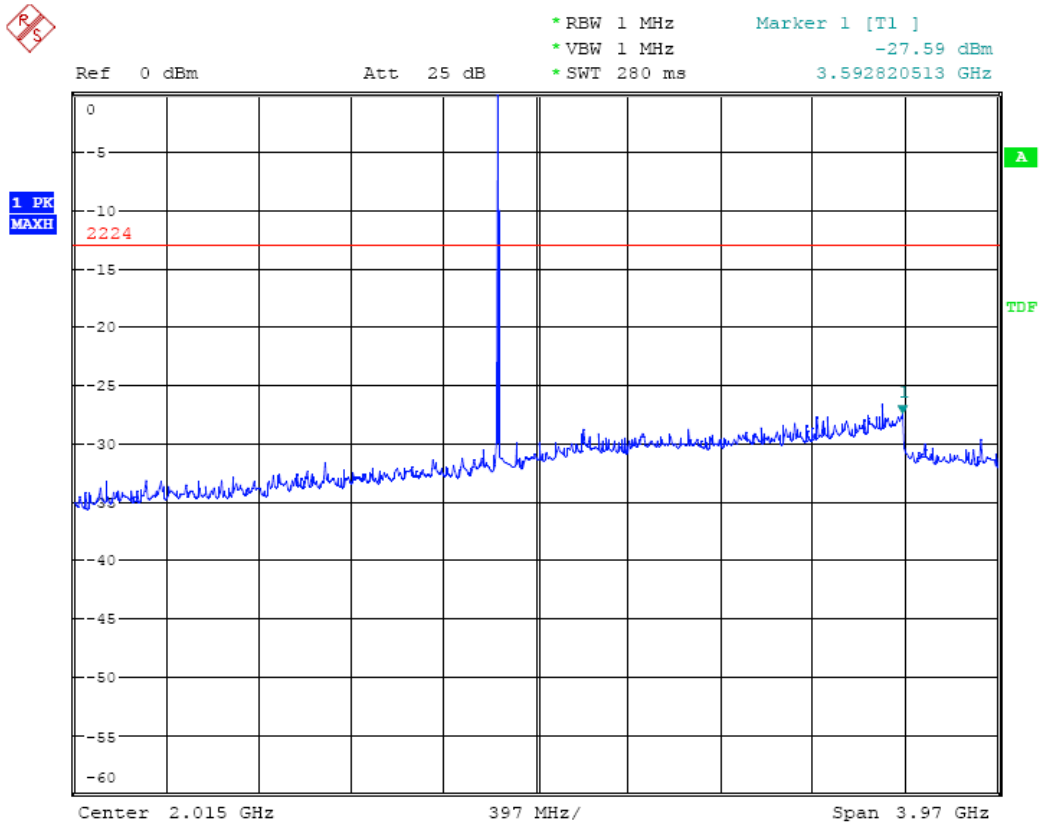


## Conducted Emission Transmitting Mode CH 512 4GHz – 20GHz

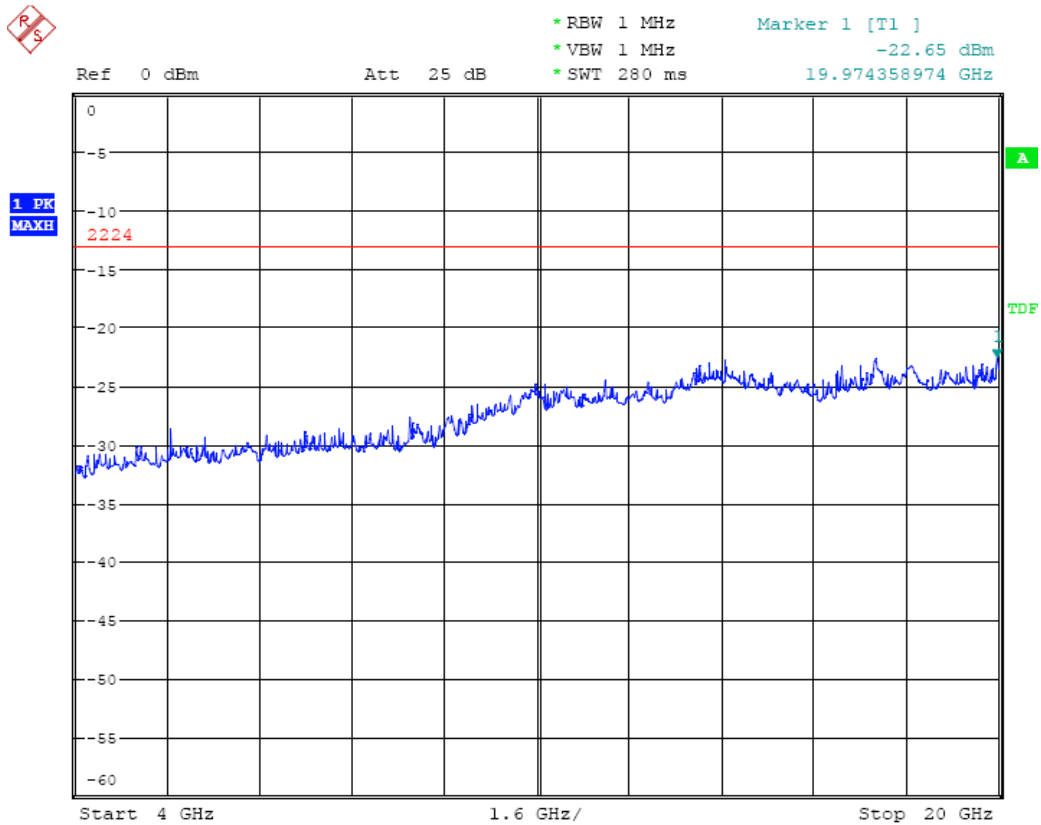


### Conducted Emission Transmitting Mode CH 661 30MHz – 4GHz

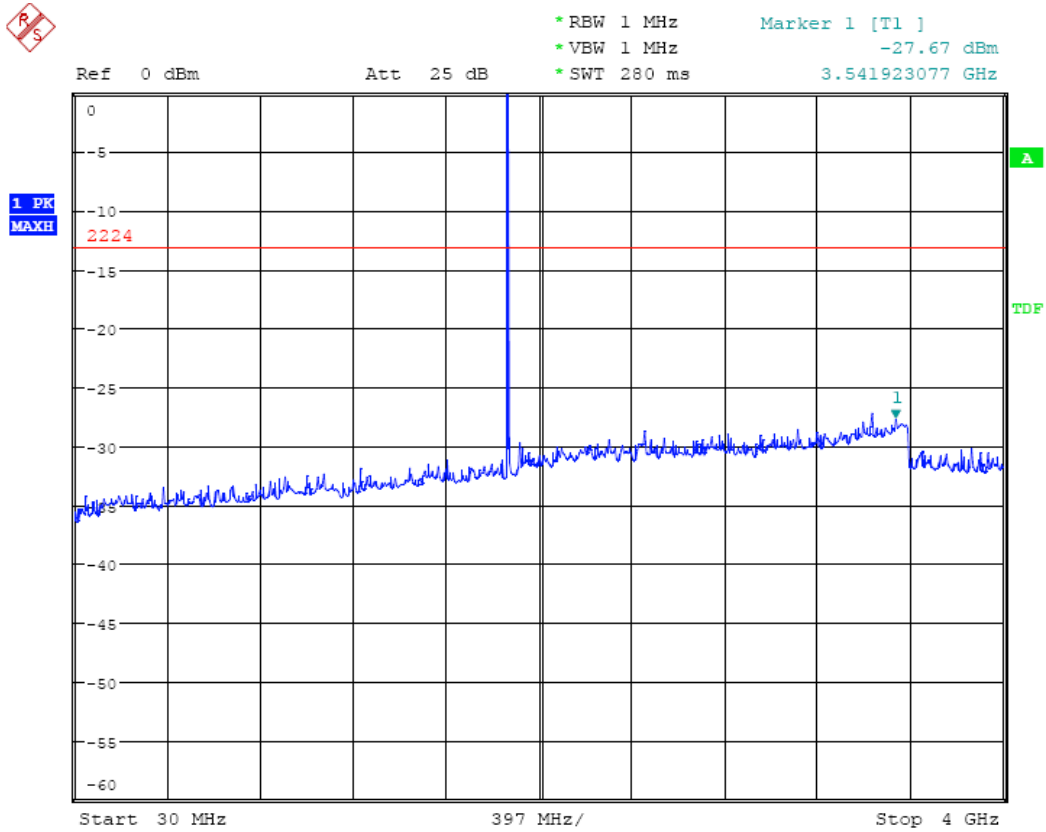


### Conducted Emission Transmitting Mode CH 661 4GHz – 20GHz

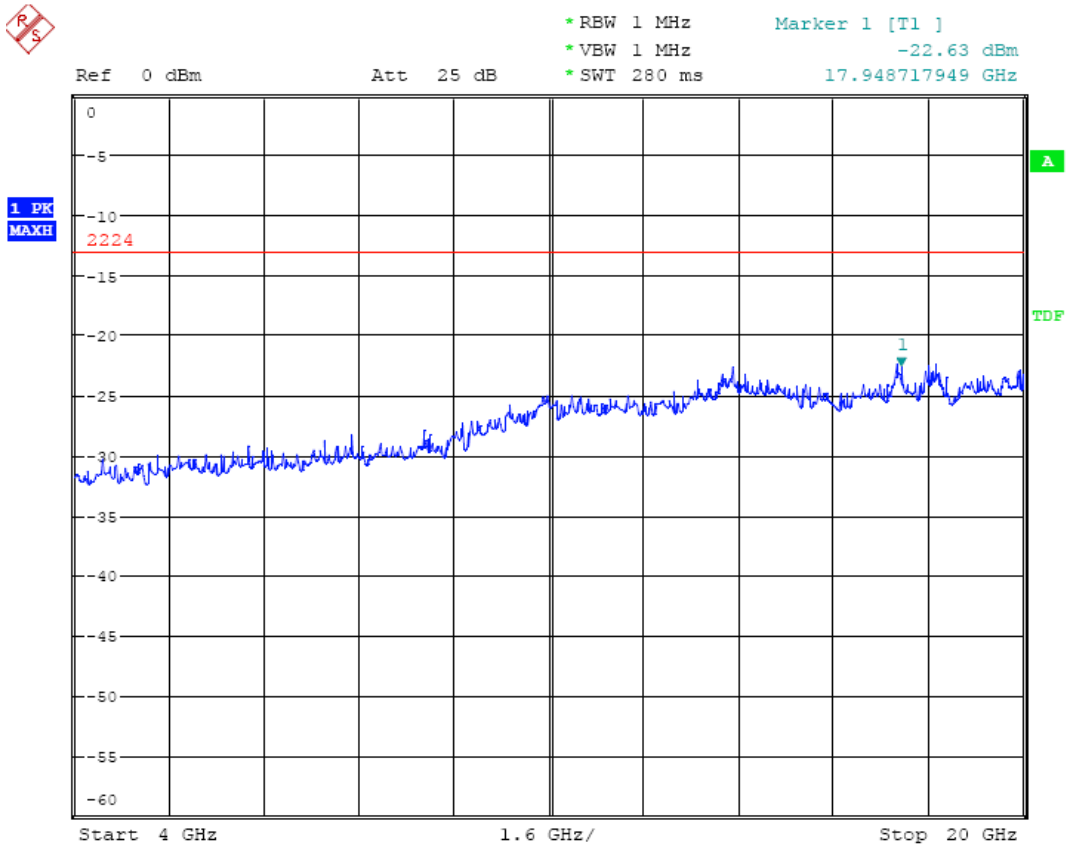


### Conducted Emission Transmitting Mode CH 810 30MHz – 4GHz

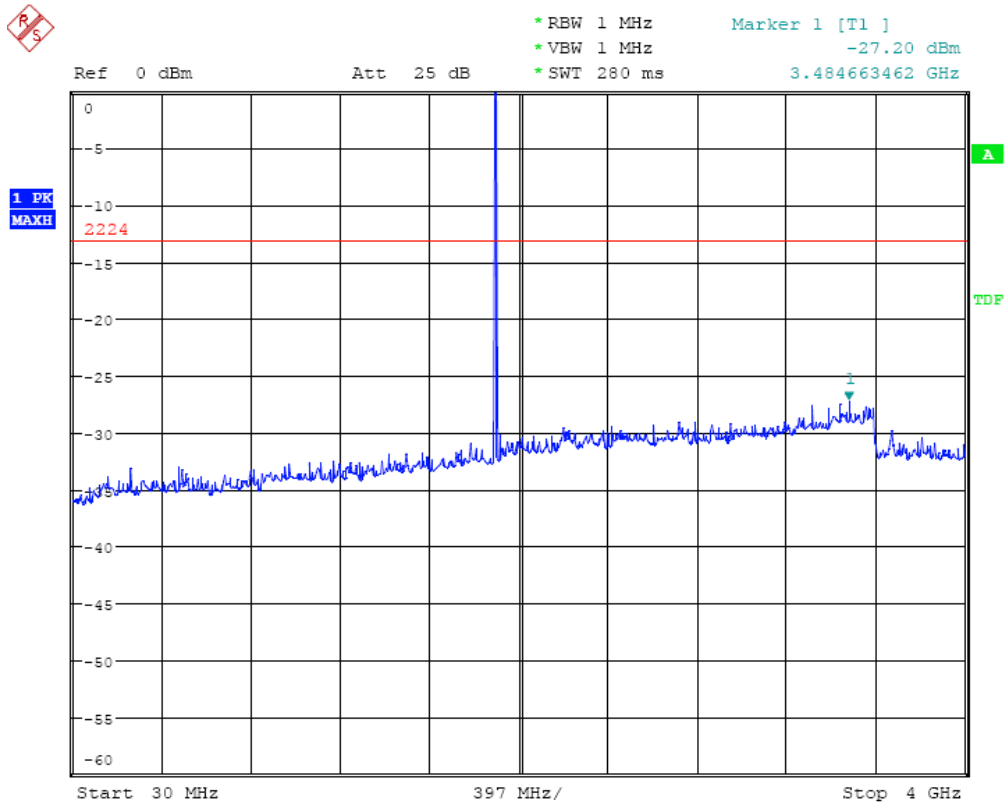


### Conducted Emission Transmitting Mode CH 810 4GHz – 20GHz

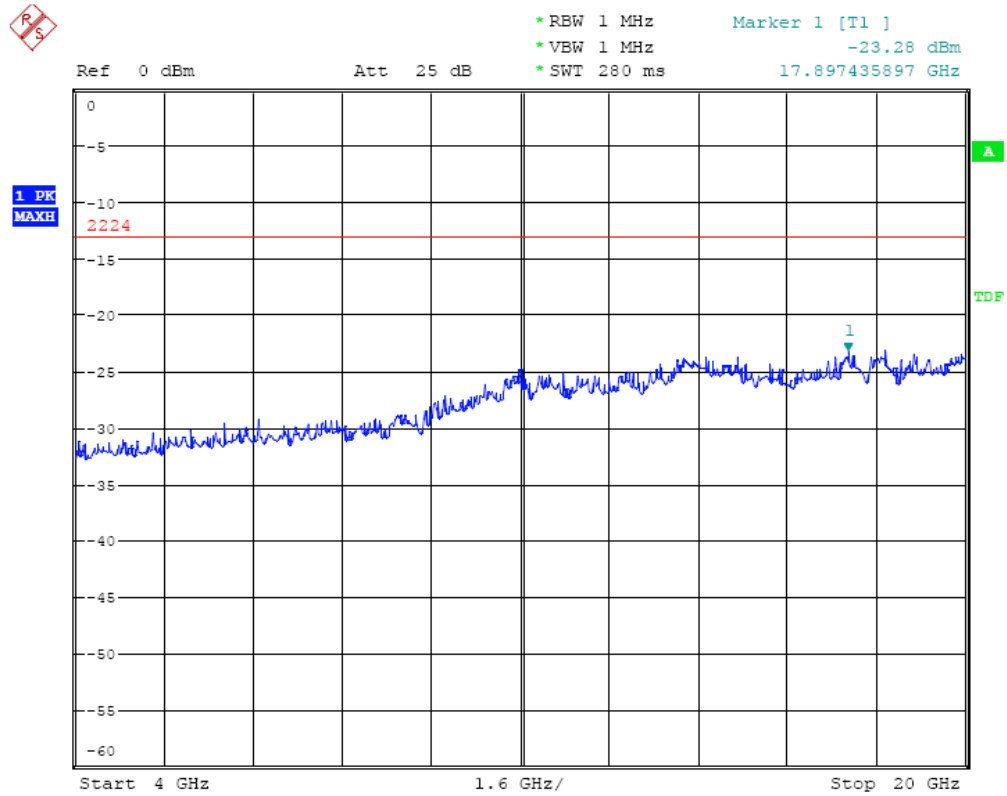

### Conducted Emission Idle Mode 30MHz – 4GHz

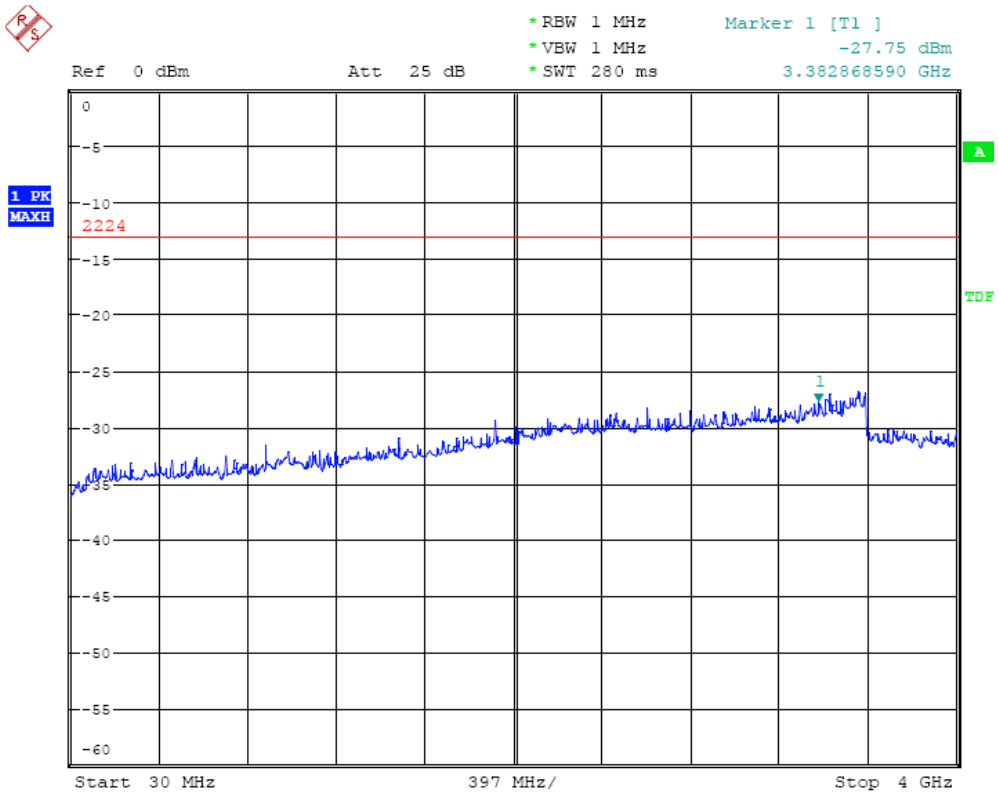

### Conducted Emission Idle Mode 4GHz – 20GHz

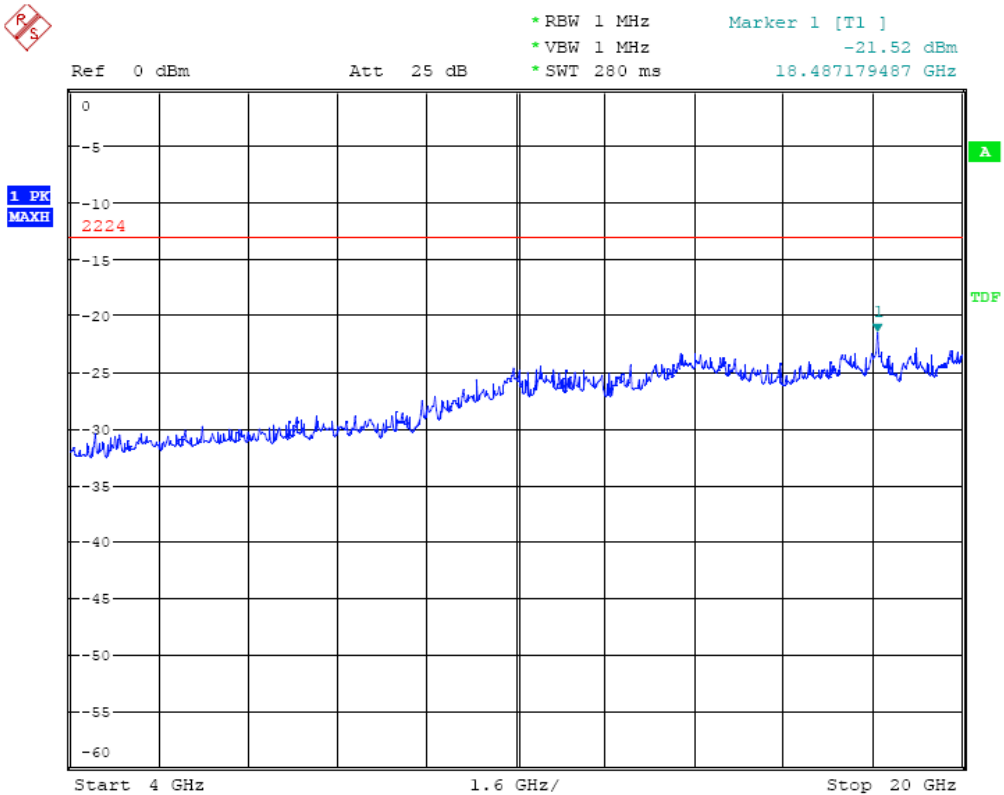


## **APPENDIX II**

### **TEST PLOTS FOR RADIATED SPURIOUS EMISSION**




# SPURIOUS EMISSION IN GSM BAND


## Spurious Emission Transmitting Mode CH 128 30MHz – 1GHz

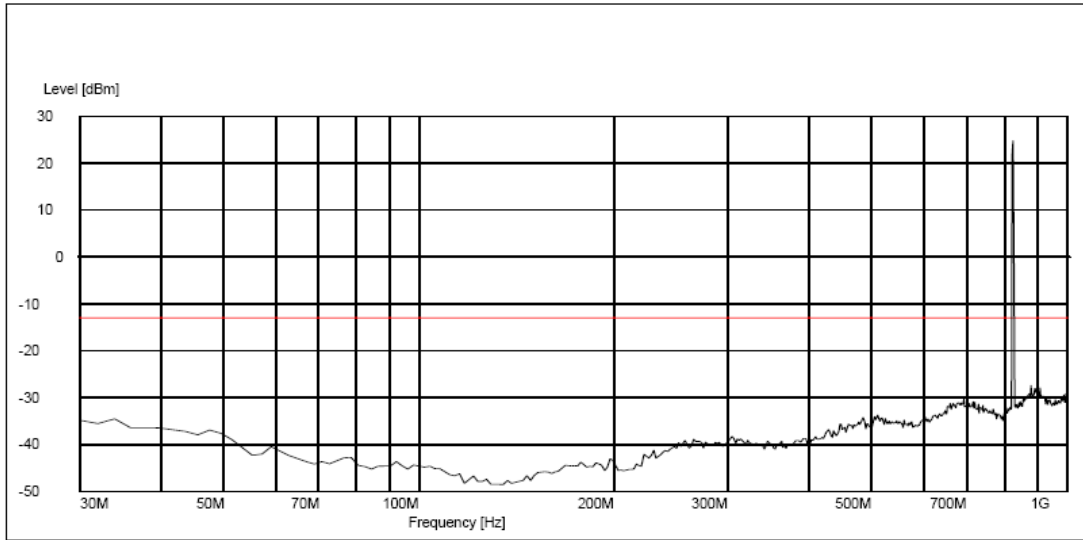


## Spurious Emission Transmitting Mode CH 190 30MHz – 1GHz

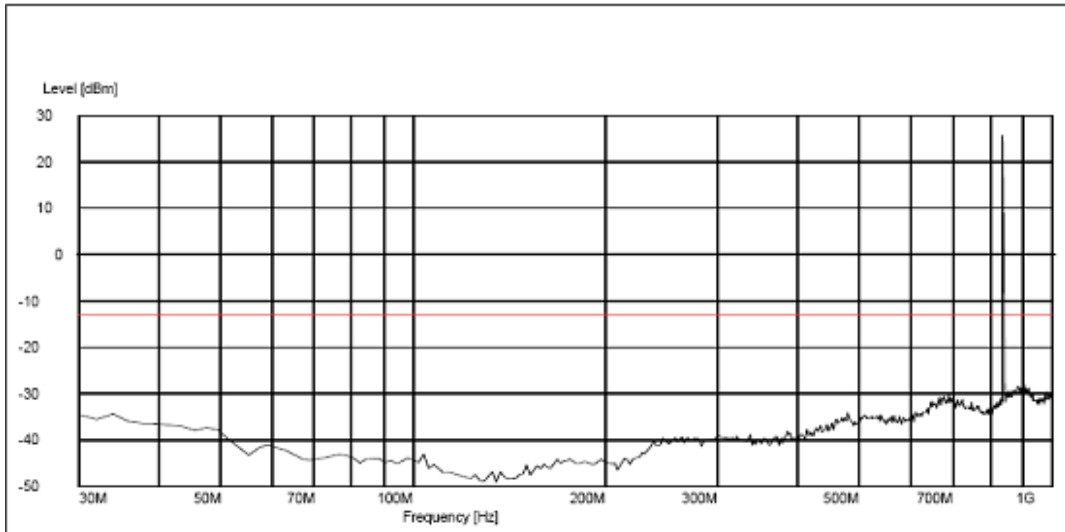


## Spurious Emission Transmitting Mode CH 251 30MHz – 1GHz

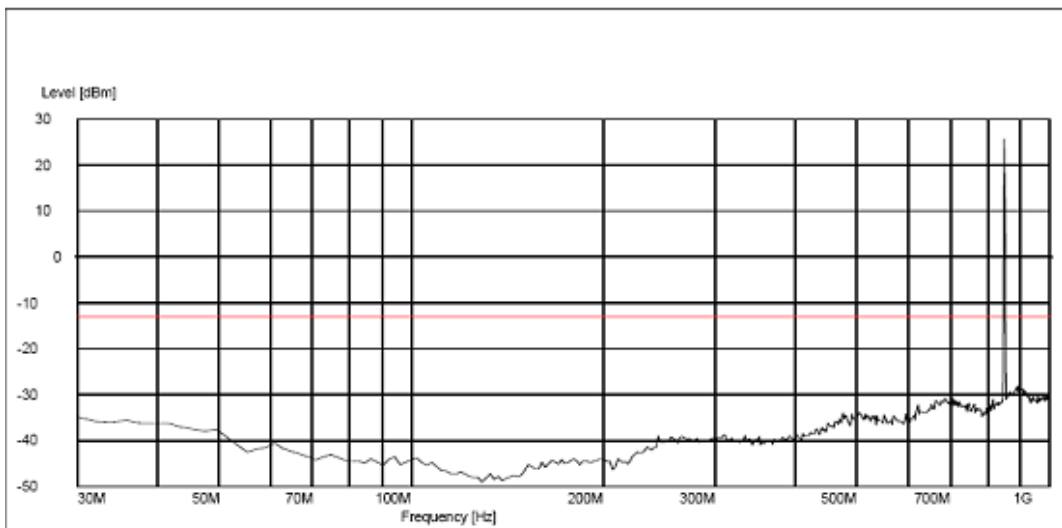


### Spurious Emission Transmitting Mode CH 128 1GHz – 10GHz

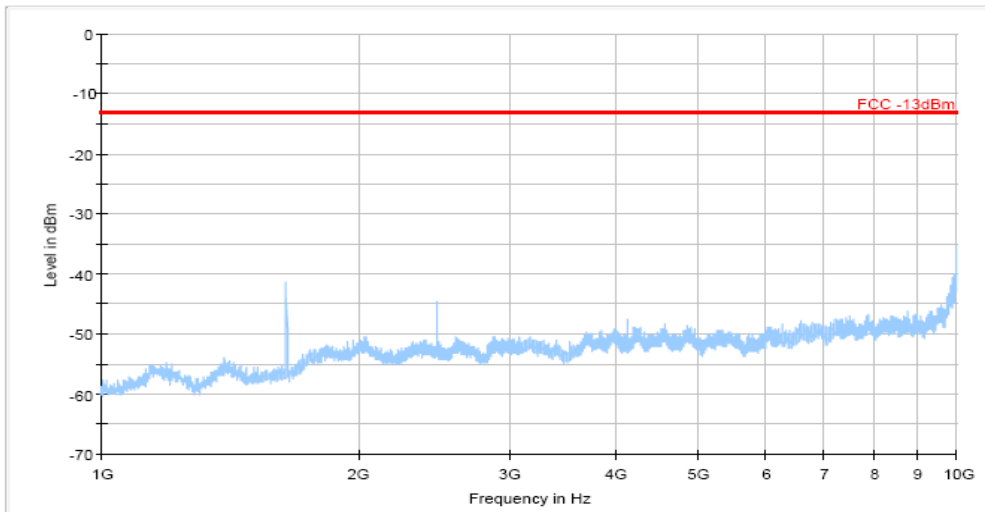


### Spurious Emission Transmitting Mode CH 190 1GHz – 10GHz

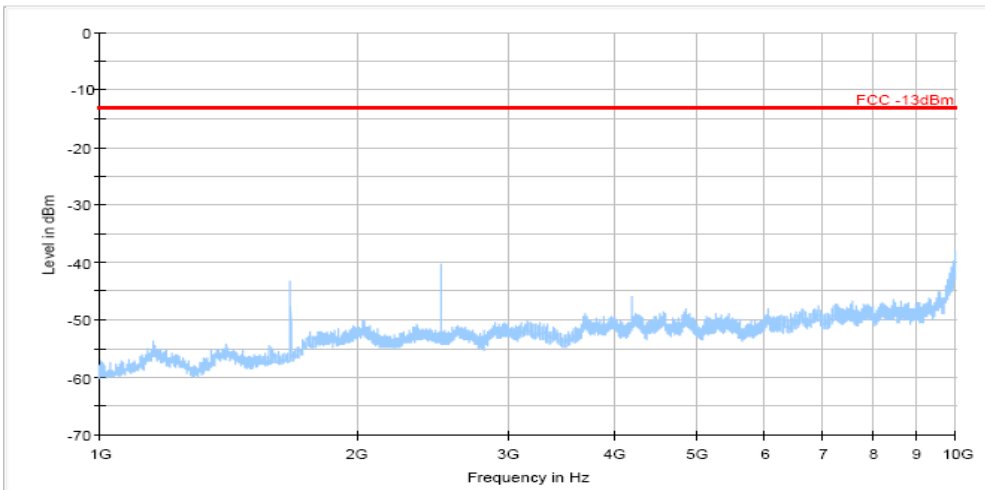


### Spurious Emission Transmitting Mode CH 251 1GHz – 10GHz

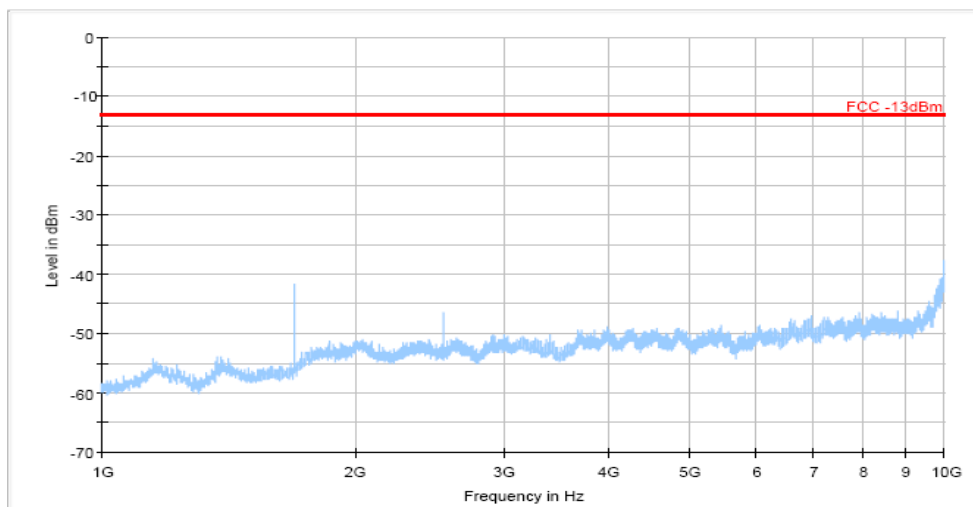

### Spurious Emission Idle Mode 30MHz – 1GHz

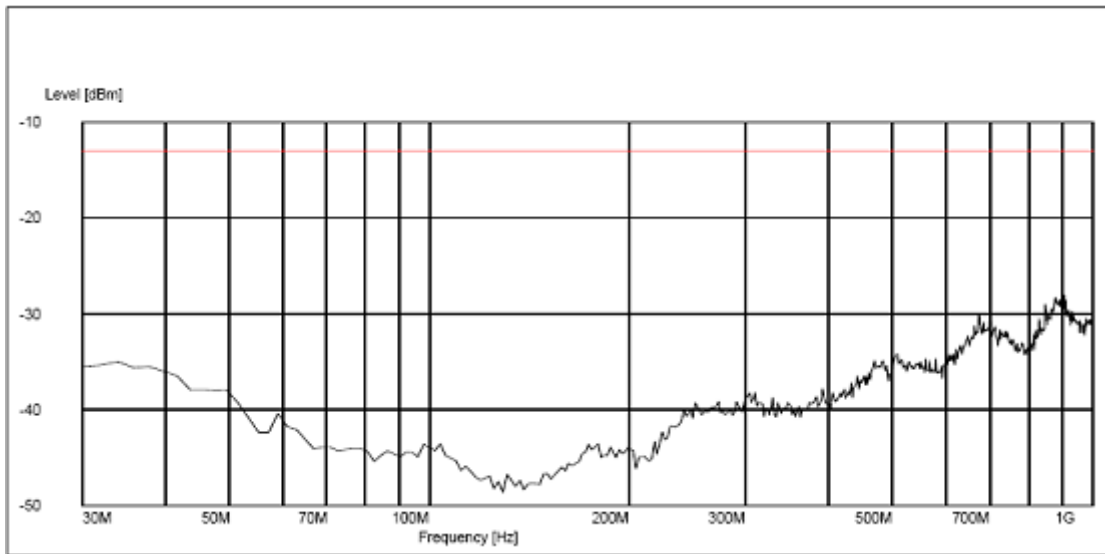


### Spurious Emission Idle Mode 1GHz – 10GHz

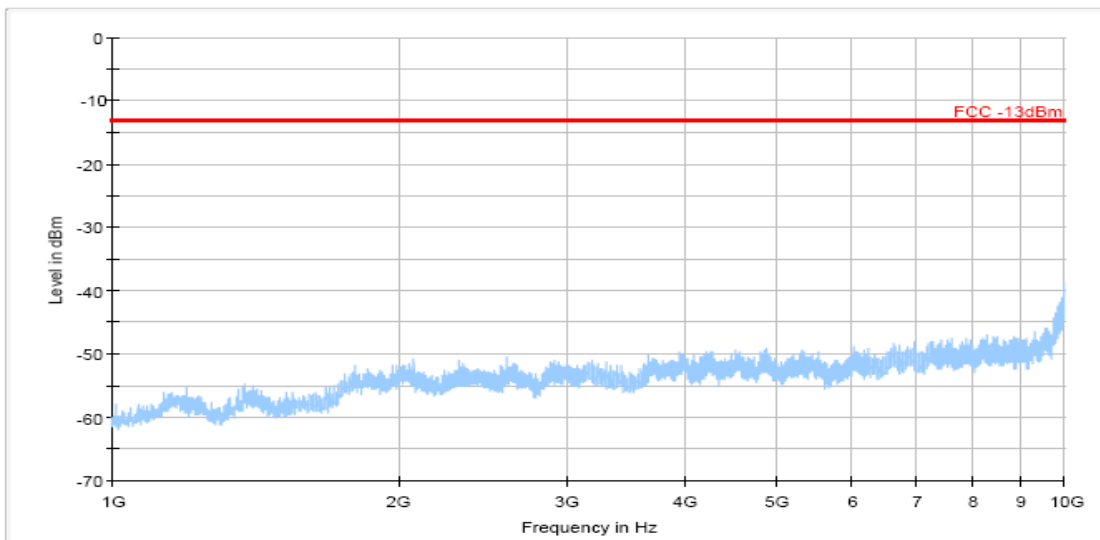


### SPURIOUS EMISSION IN PCS BAND


#### Spurious Emission Transmitting Mode CH 512 30MHz – 2GHz

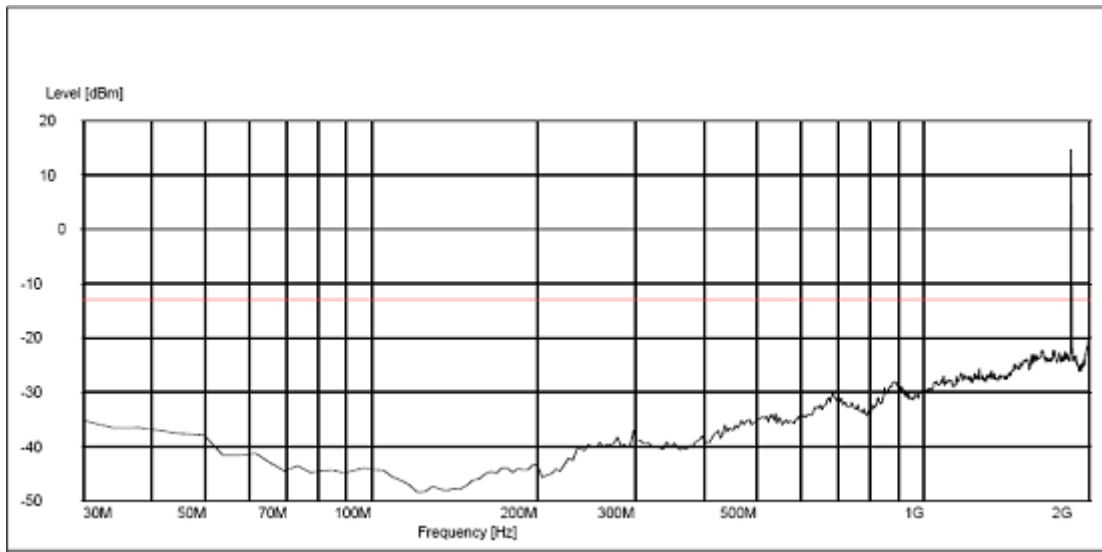


#### Spurious Emission Transmitting Mode CH 661 30MHz – 2GHz

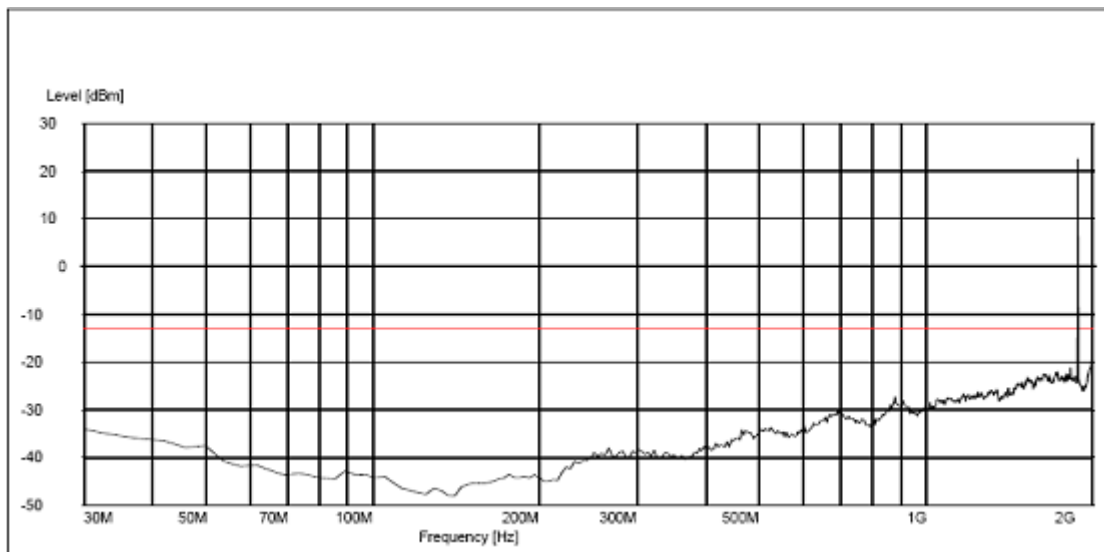


#### Spurious Emission Transmitting Mode CH 810 30MHz – 2GHz

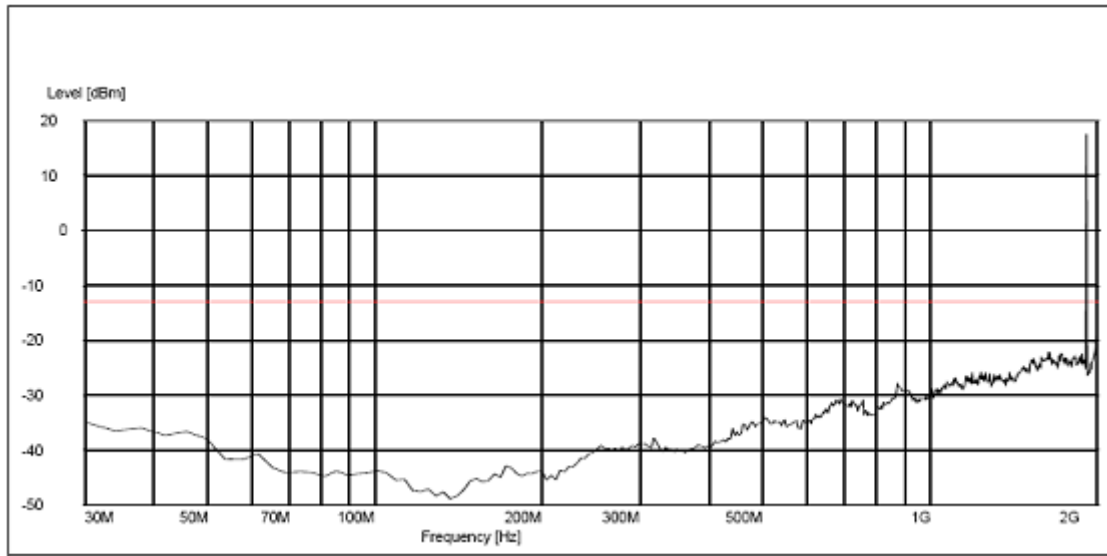


Spurious Emission Transmitting Mode CH 512 2GHz – 10GHz

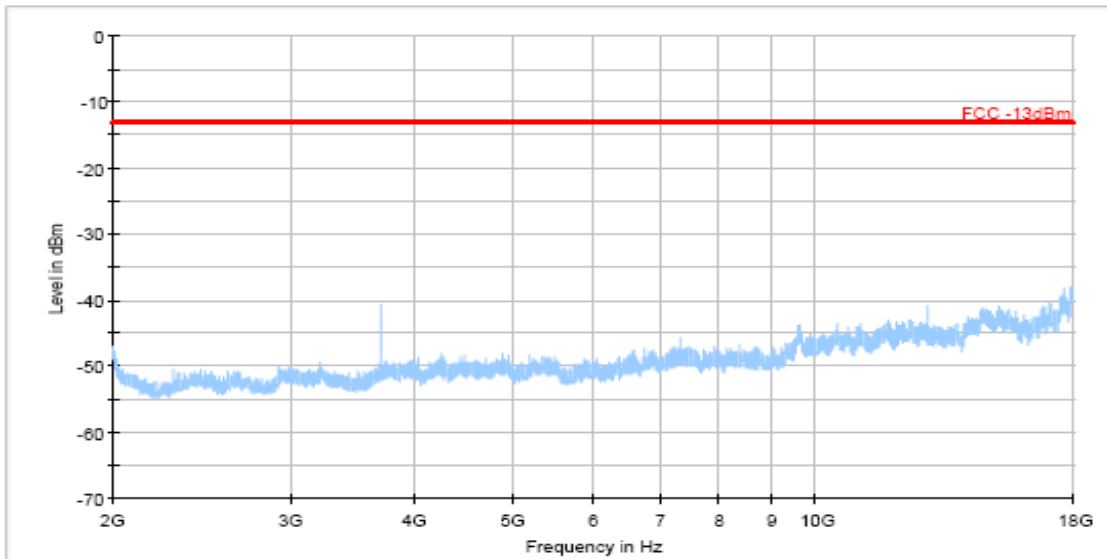


Spurious Emission Transmitting Mode CH 661 2GHz – 10GHz

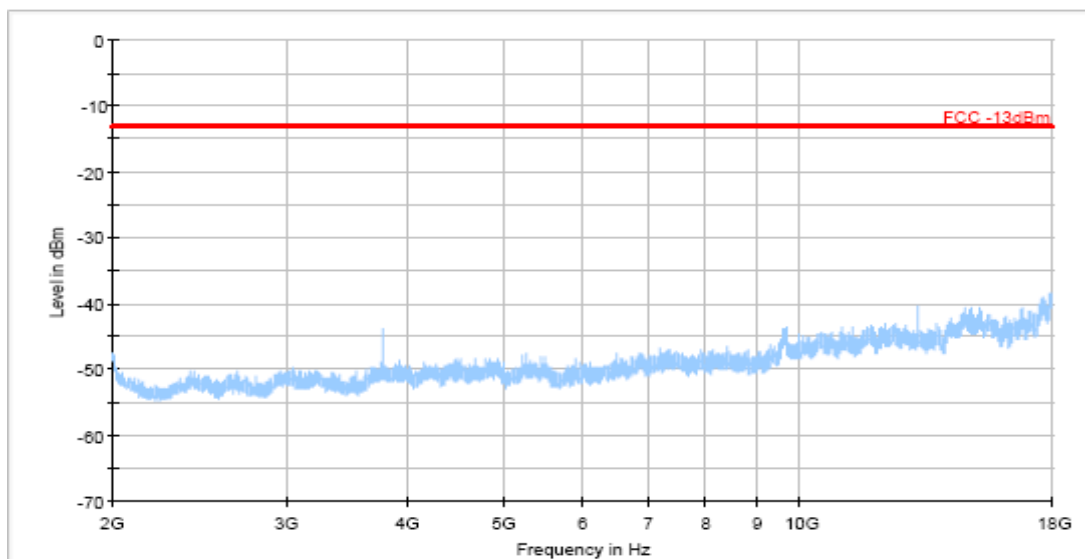


### Spurious Emission Transmitting Mode CH 810 2GHz – 10GHz

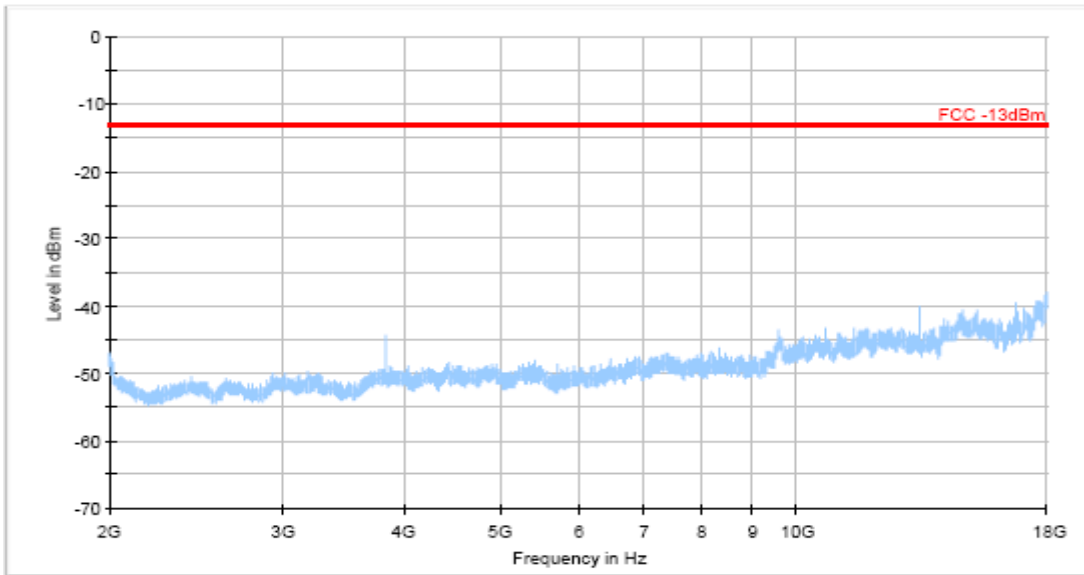

### Radiated Emission Idle Mode 30MHz – 2GHz

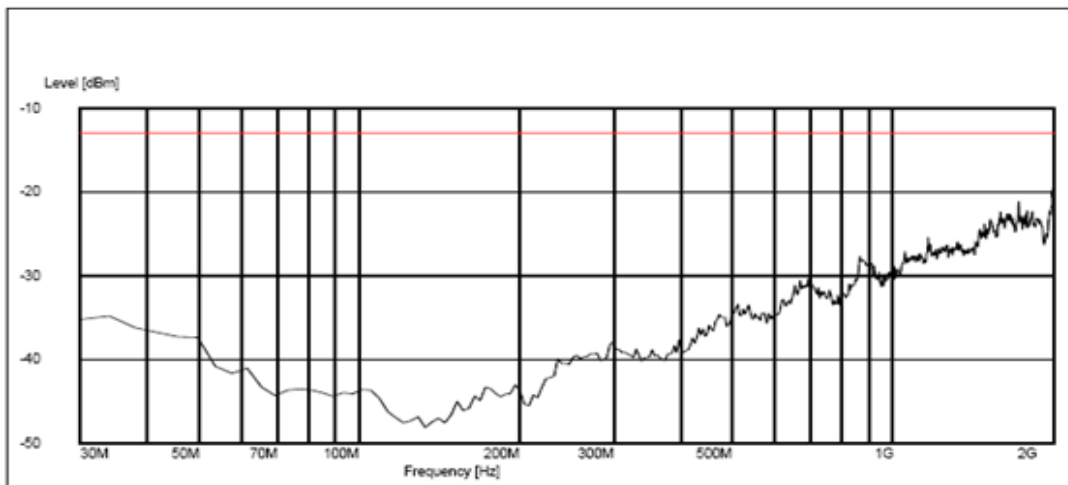


### Radiated Emission Idle Mode 2GHz – 18GHz

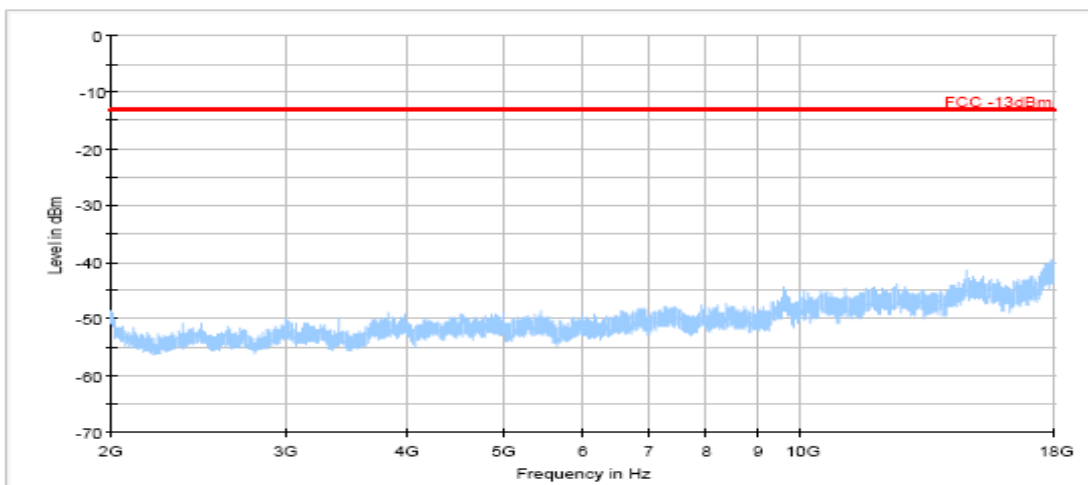


## **APPENDIX III**

### **TEST PLOTS FOR OCCUPIED BANDWIDTH (99%)**

### Occupied Bandwidth (99%) GSM 850 BAND CH 128

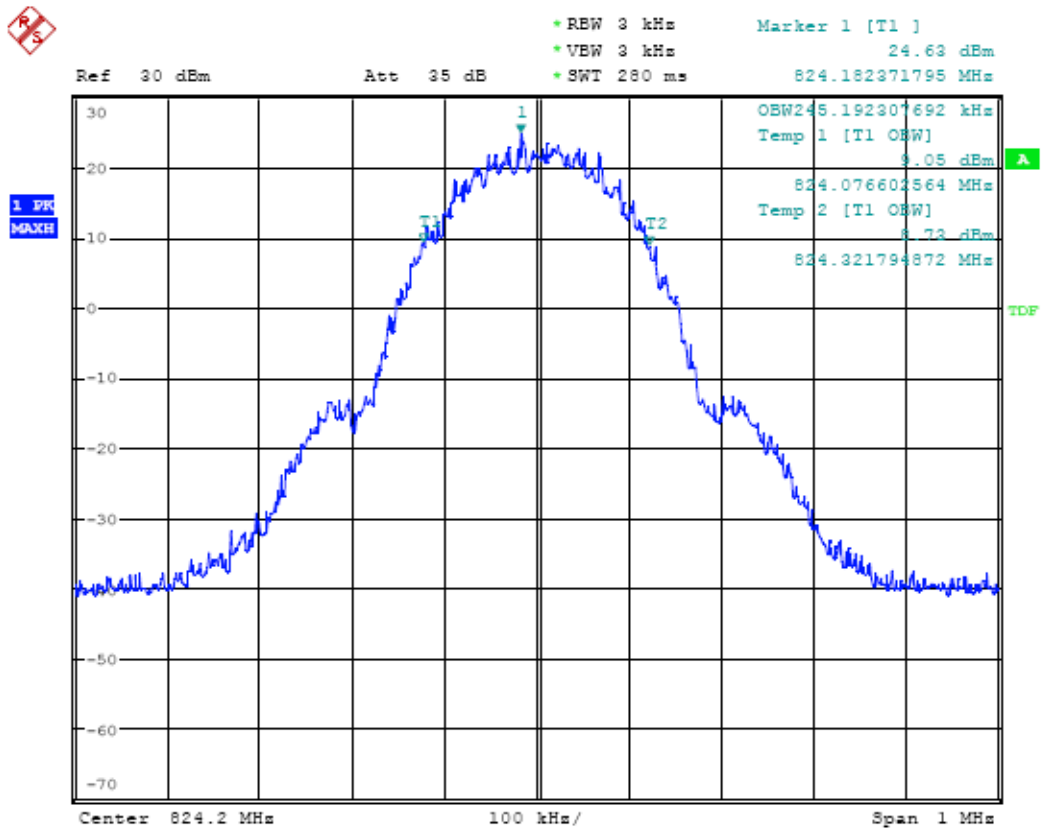


### Occupied Bandwidth (99%) GSM 850 BAND CH 190

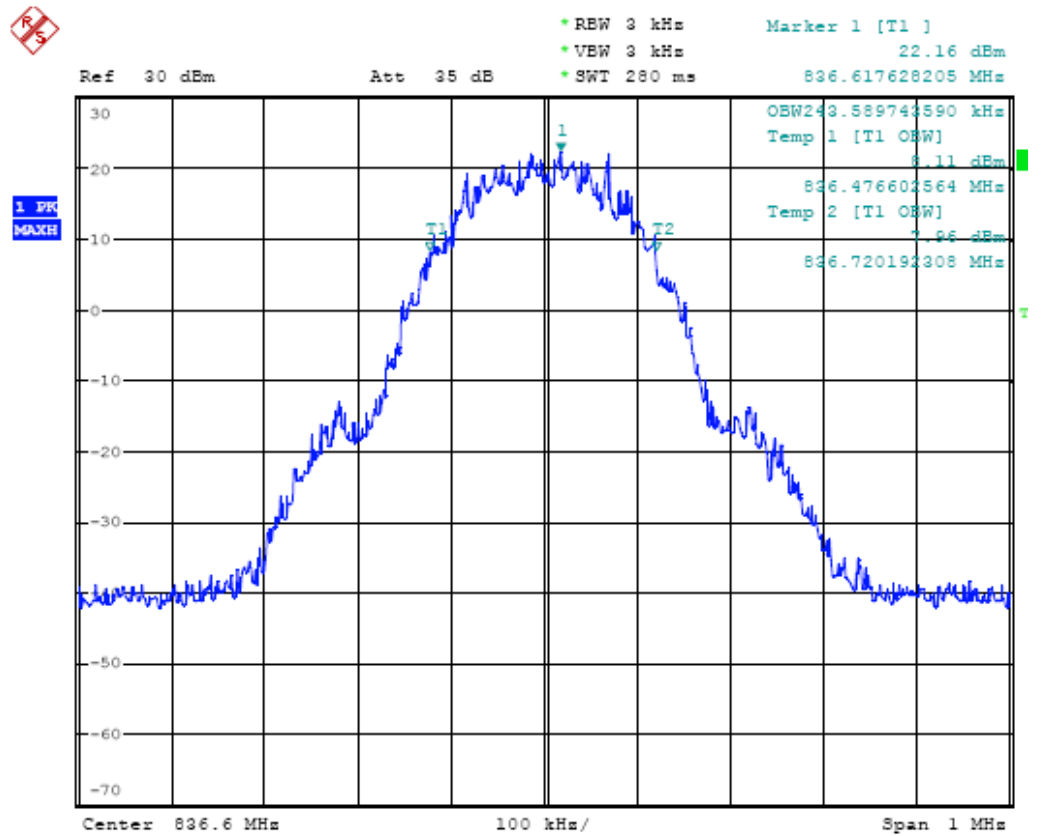





### Occupied Bandwidth (99%) GSM 850 BAND CH 251

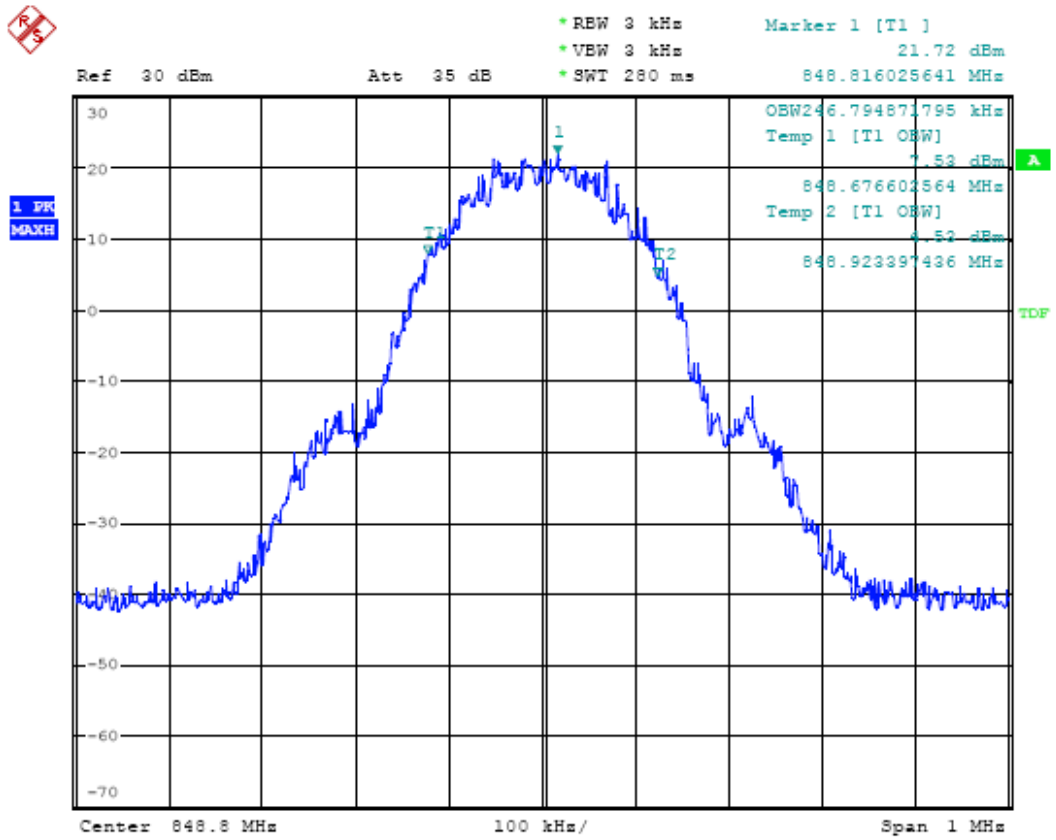


### Occupied Bandwidth (99%) GPRS 850 BAND CH 128

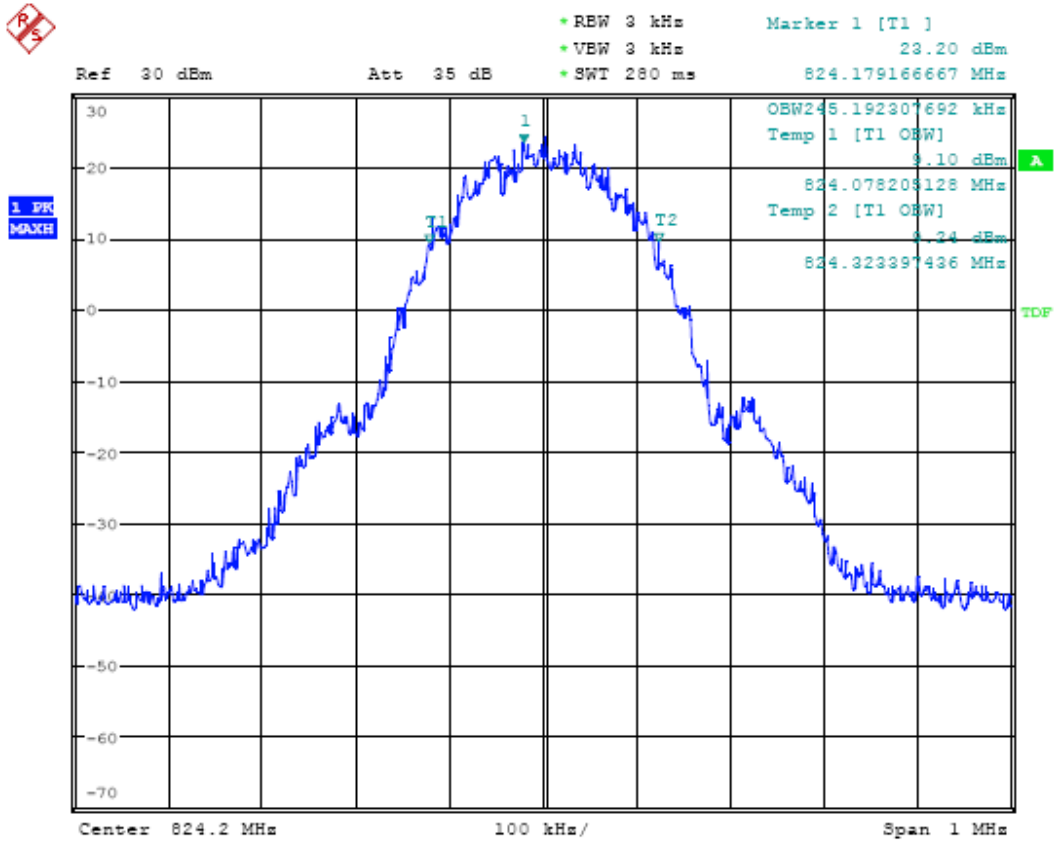


Occupied Bandwidth (99%) GPRS 850 BAND CH 190

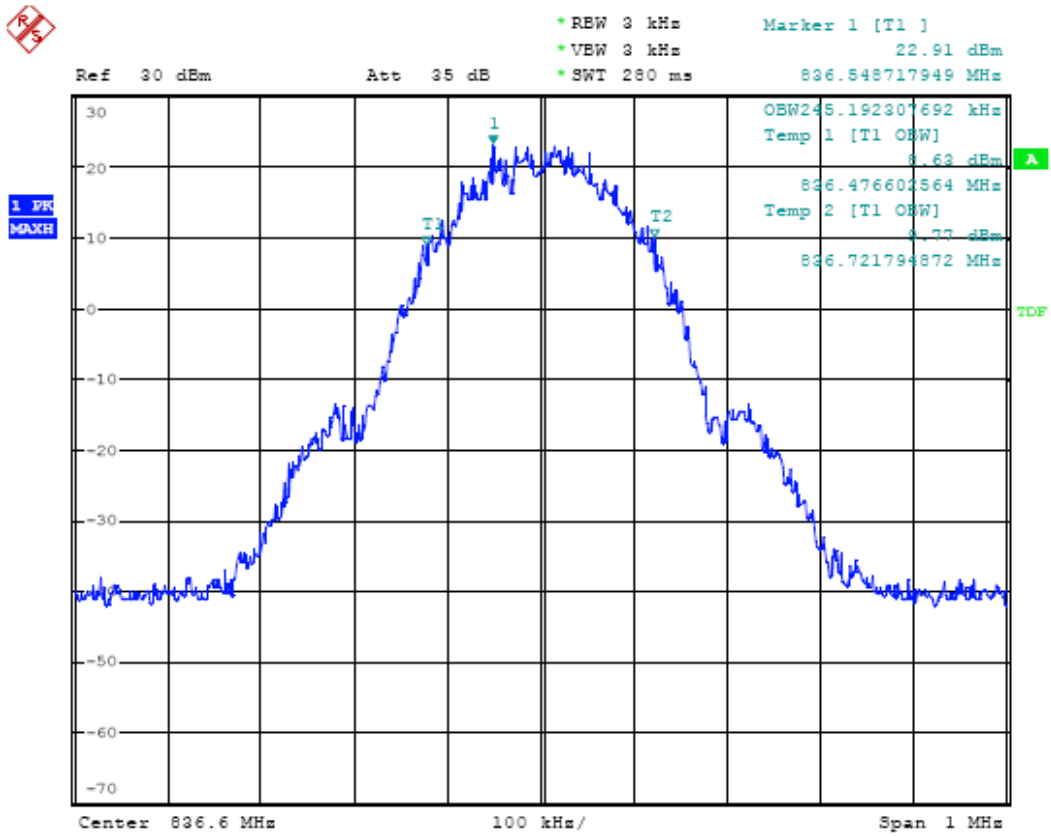


Occupied Bandwidth (99%) GPRS 850 BAND CH 251

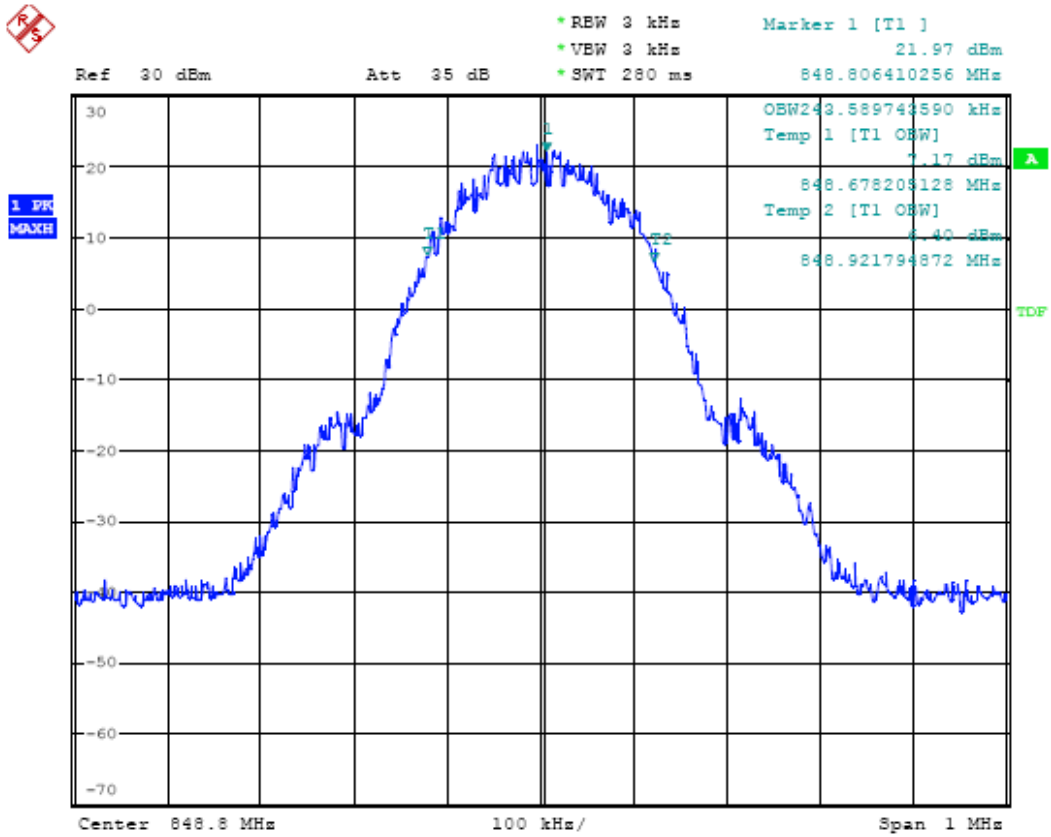


### Occupied Bandwidth (99%) PCS 1900 BAND CH 512

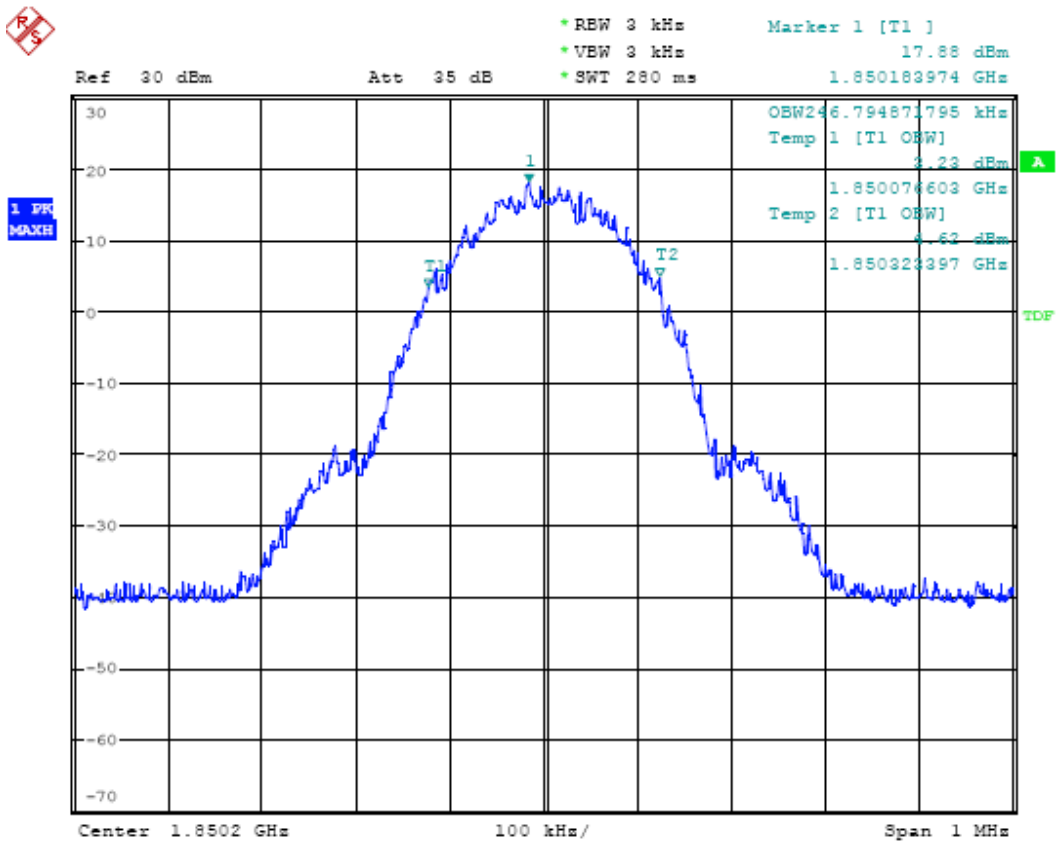


### Occupied Bandwidth (99%) PCS 1900 BAND CH 661

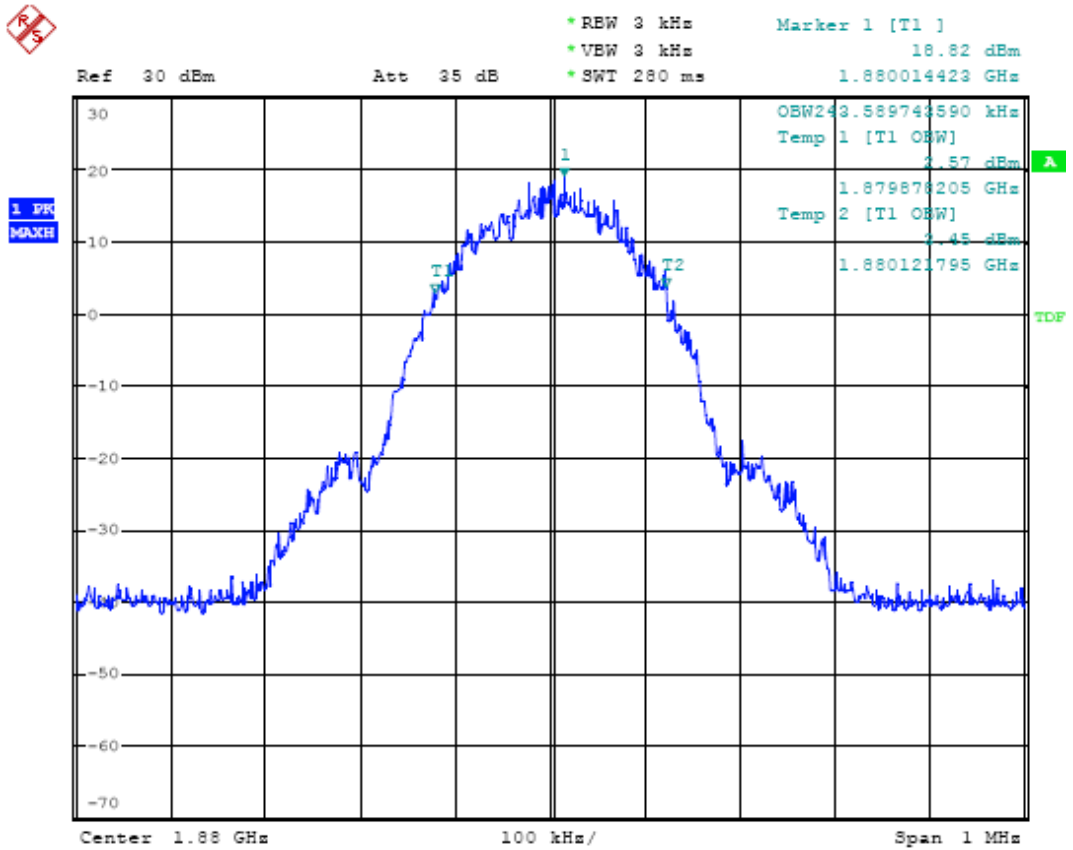


### Occupied Bandwidth (99%) PCS 1900 BAND CH 810

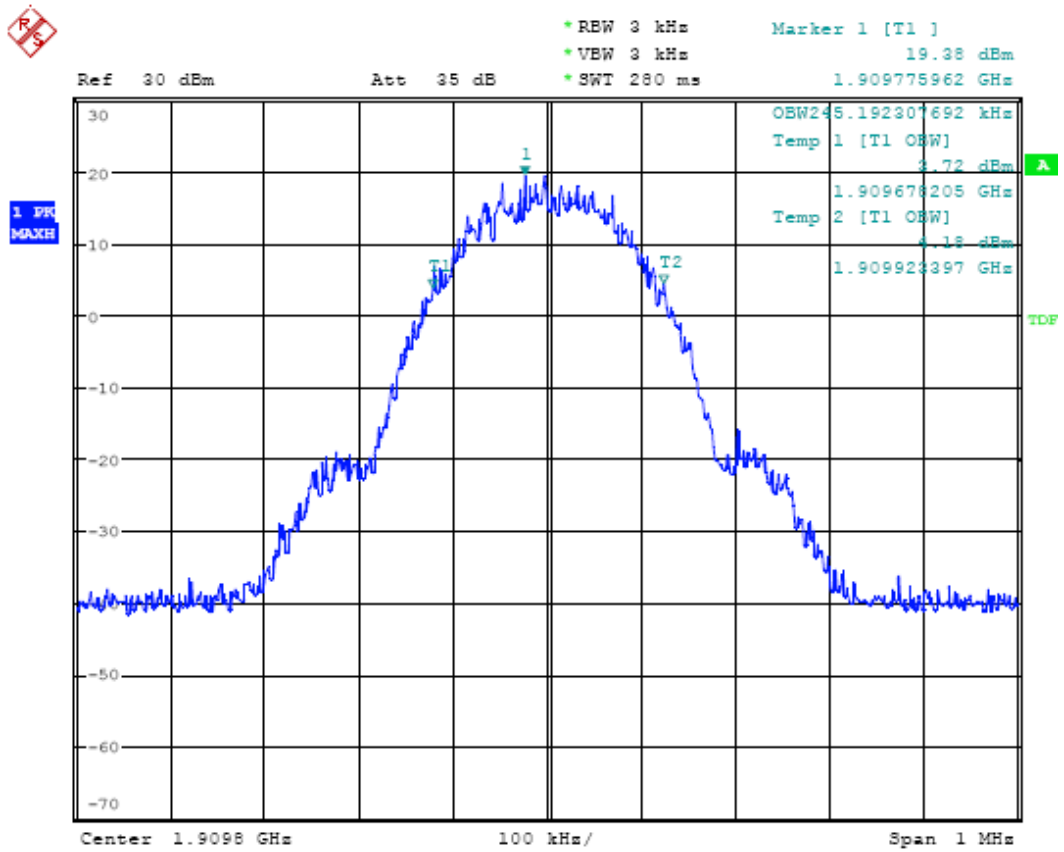


### Occupied Bandwidth (99%) GPRS 1900 BAND CH 512

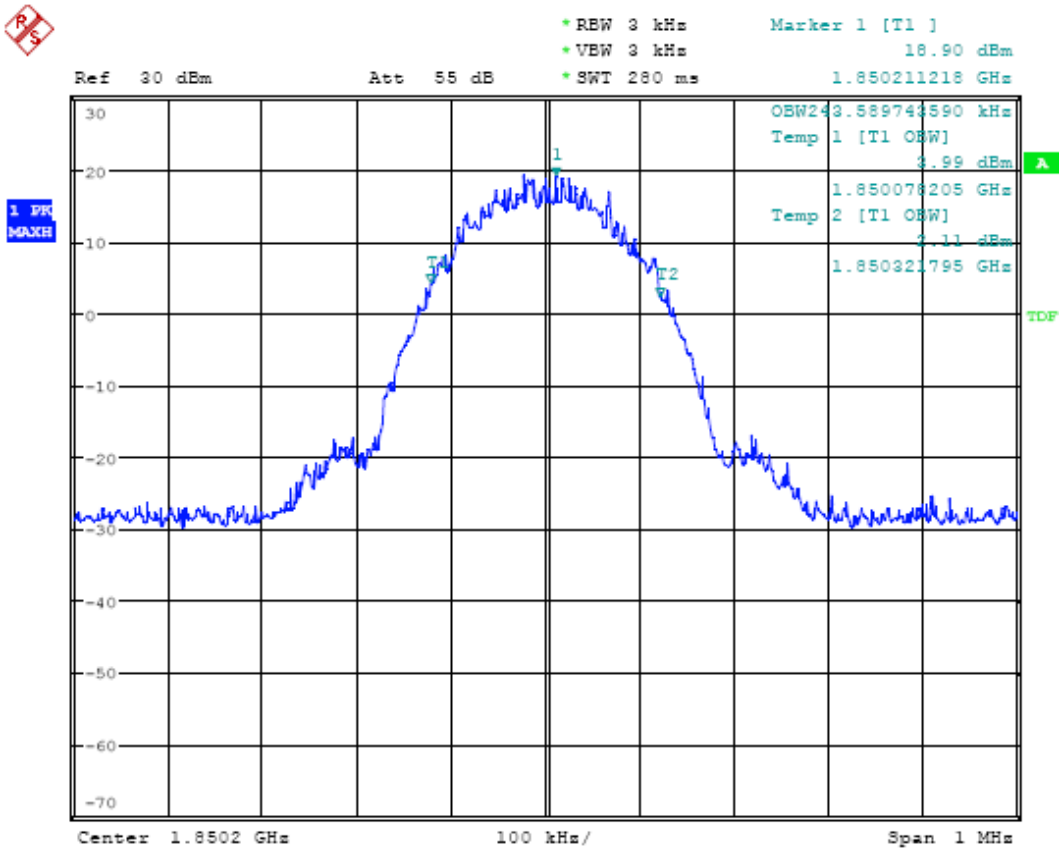

### Occupied Bandwidth (99%) GPRS 1900 BAND CH 661

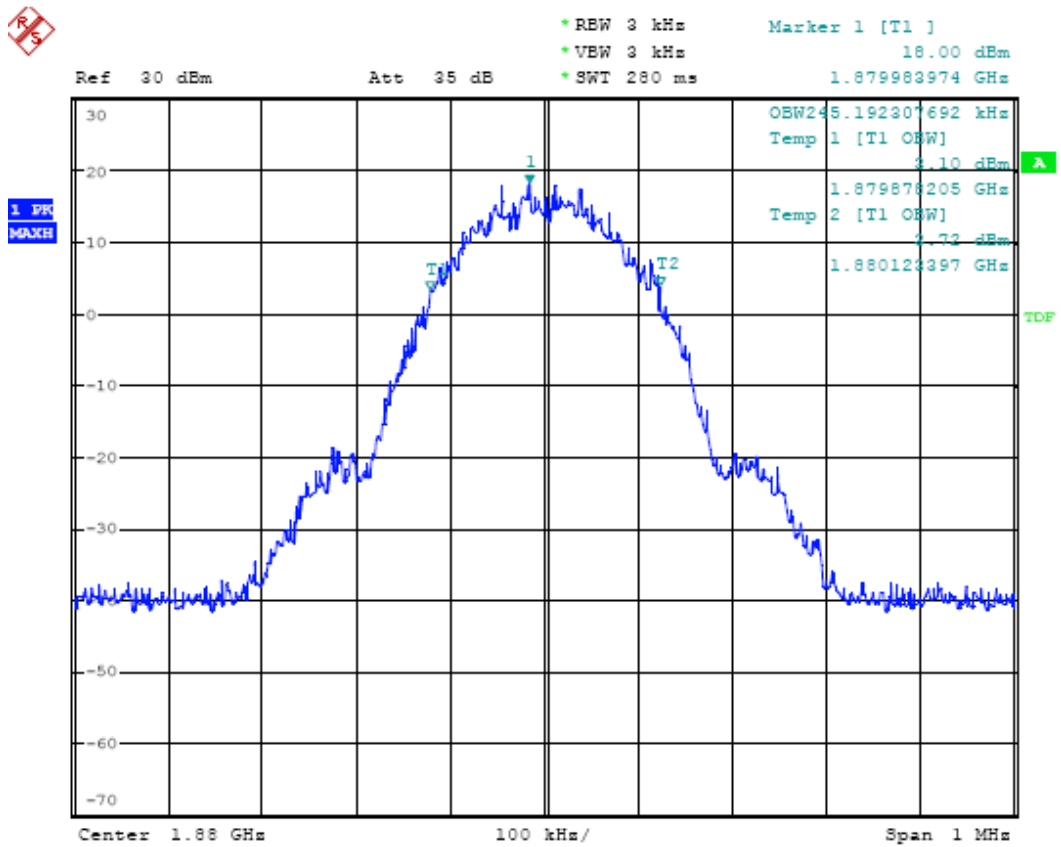


### Occupied Bandwidth (99%) GPRS 1900 BAND CH 810

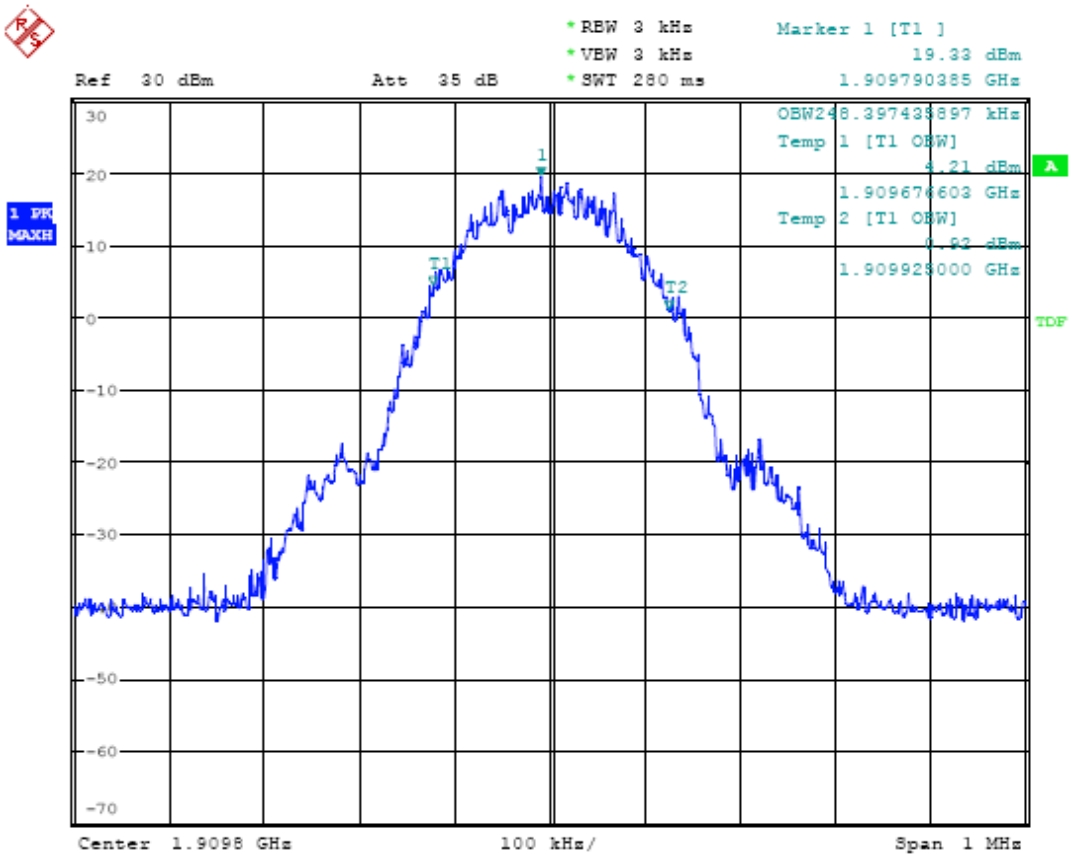


## **APPENDIX IV**

### **TEST PLOTS FOR EMISSION BANDWIDTH (-26dBc)**


### Bandwidth (26dB) GSM 850 BAND CH 128

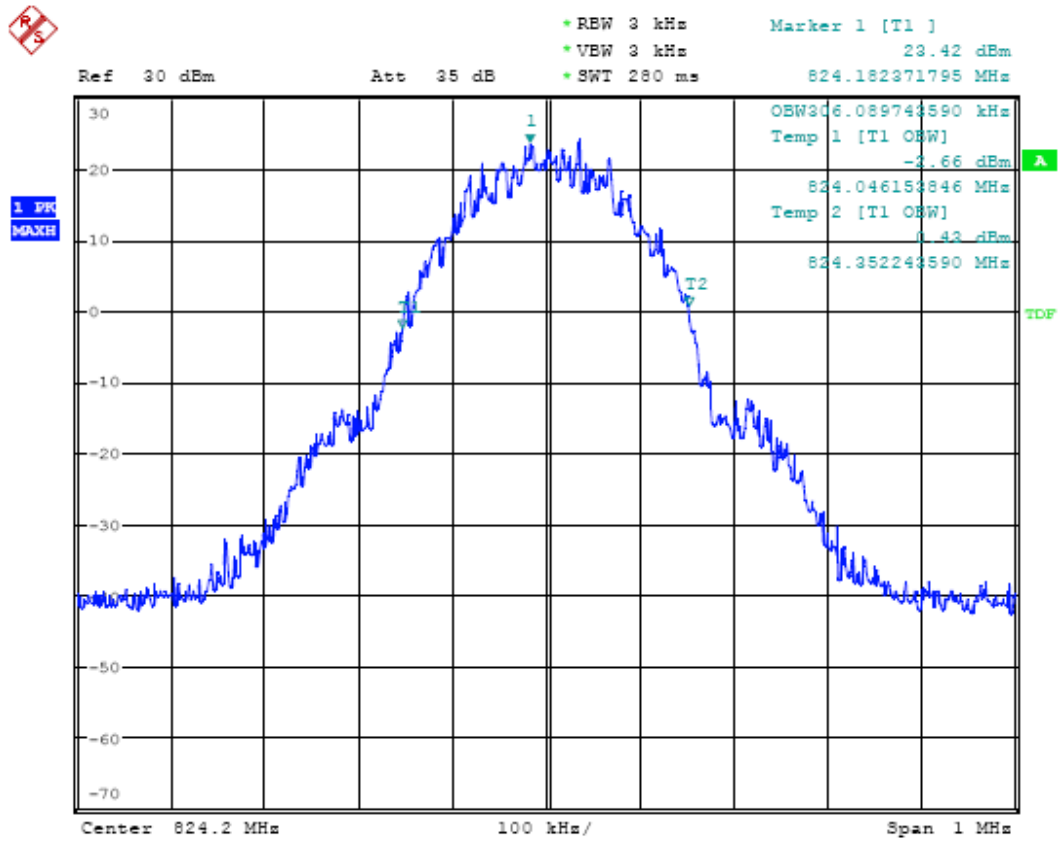


### Bandwidth (26dB) GSM 850 BAND CH 190

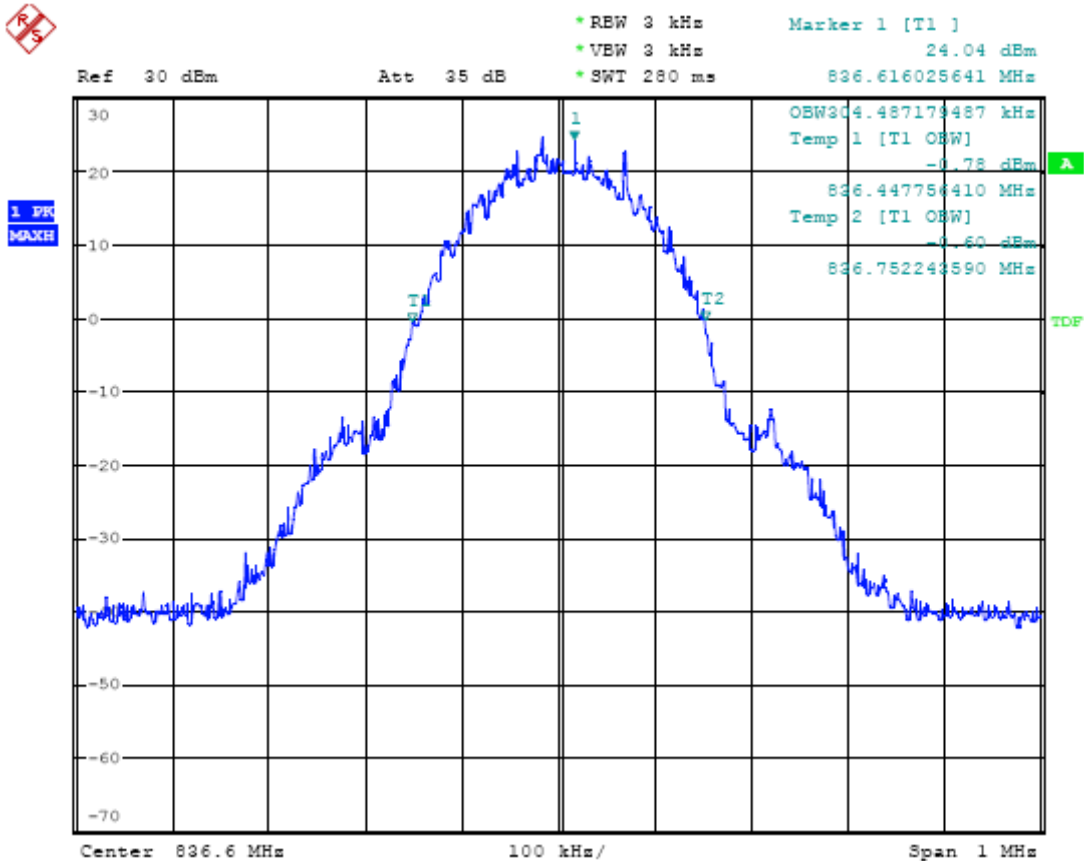

Bandwidth (26dB) GSM 850 BAND CH 251

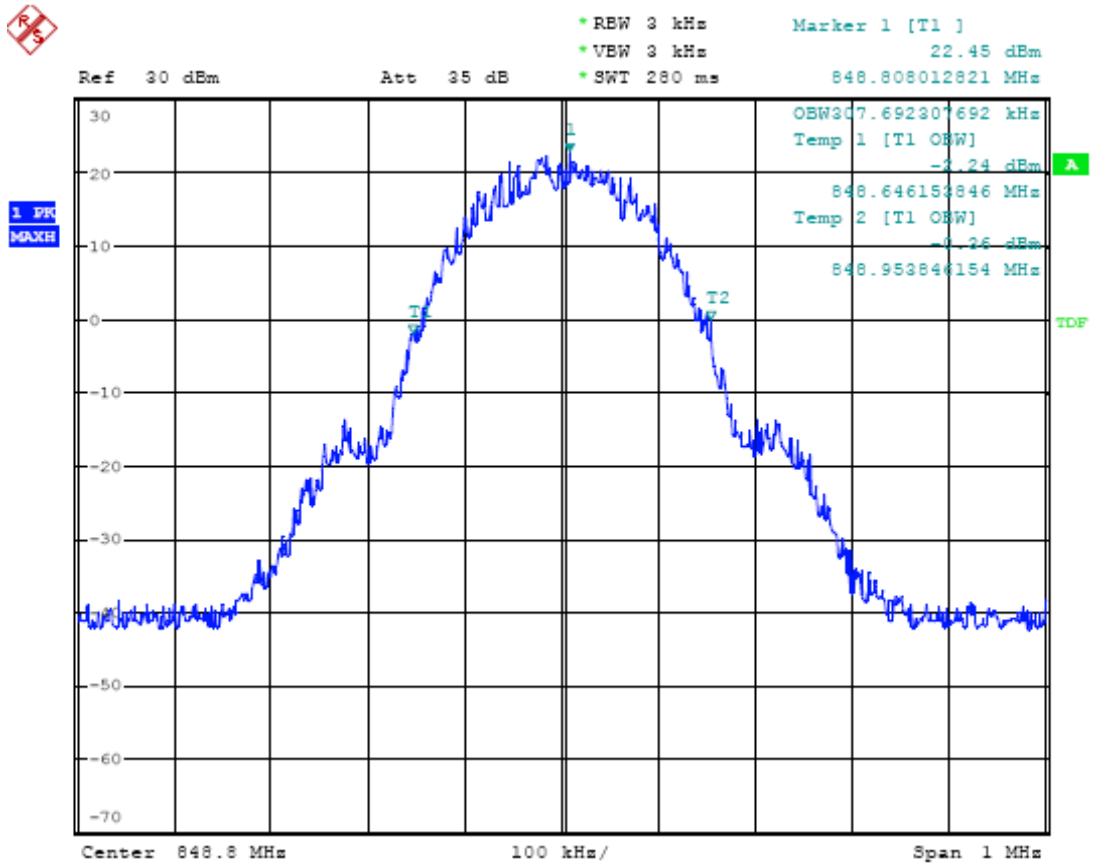


Bandwidth (26dB) GPRS 850 BAND CH 128

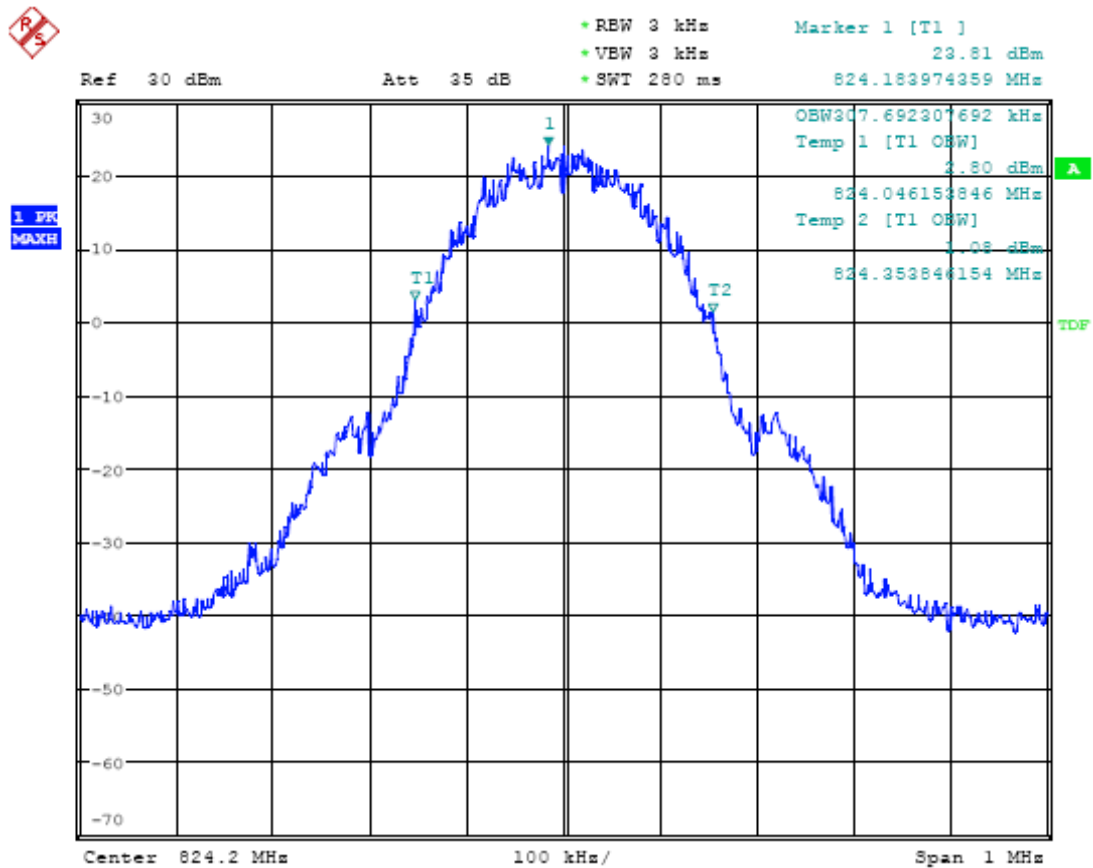





### Bandwidth (26dB) GPRS 850 BAND CH 190

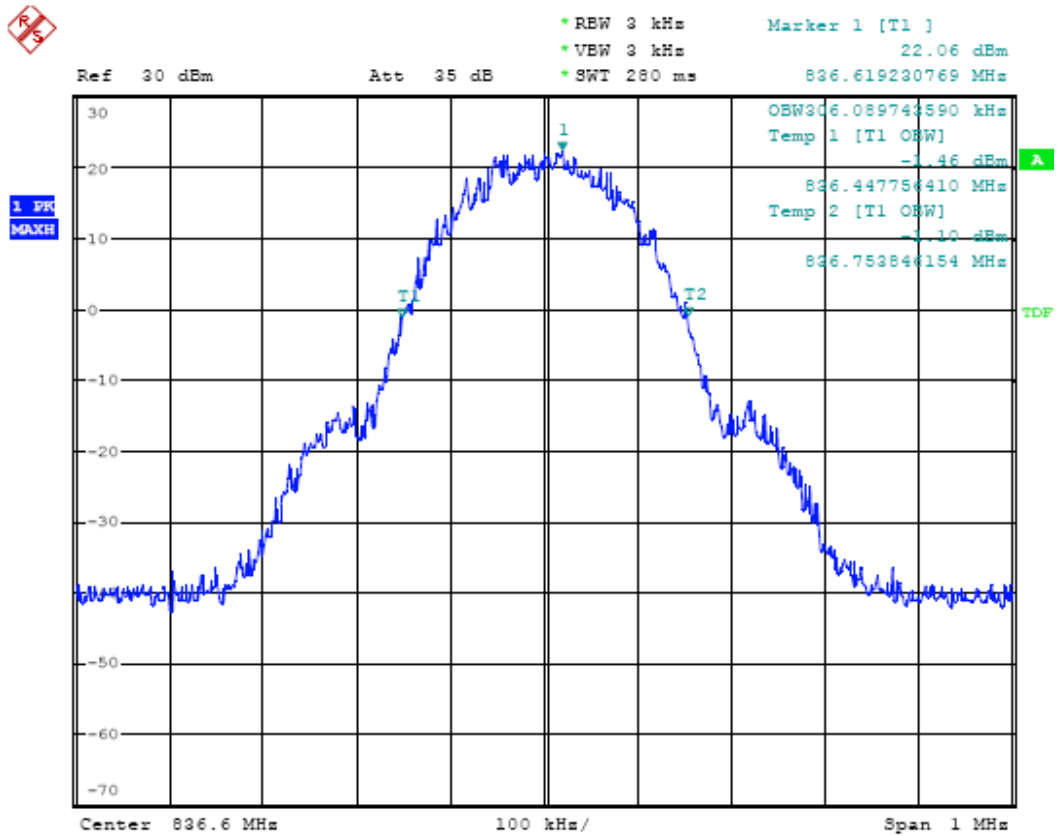


### Bandwidth (26dB) GPRS 850 BAND CH 251

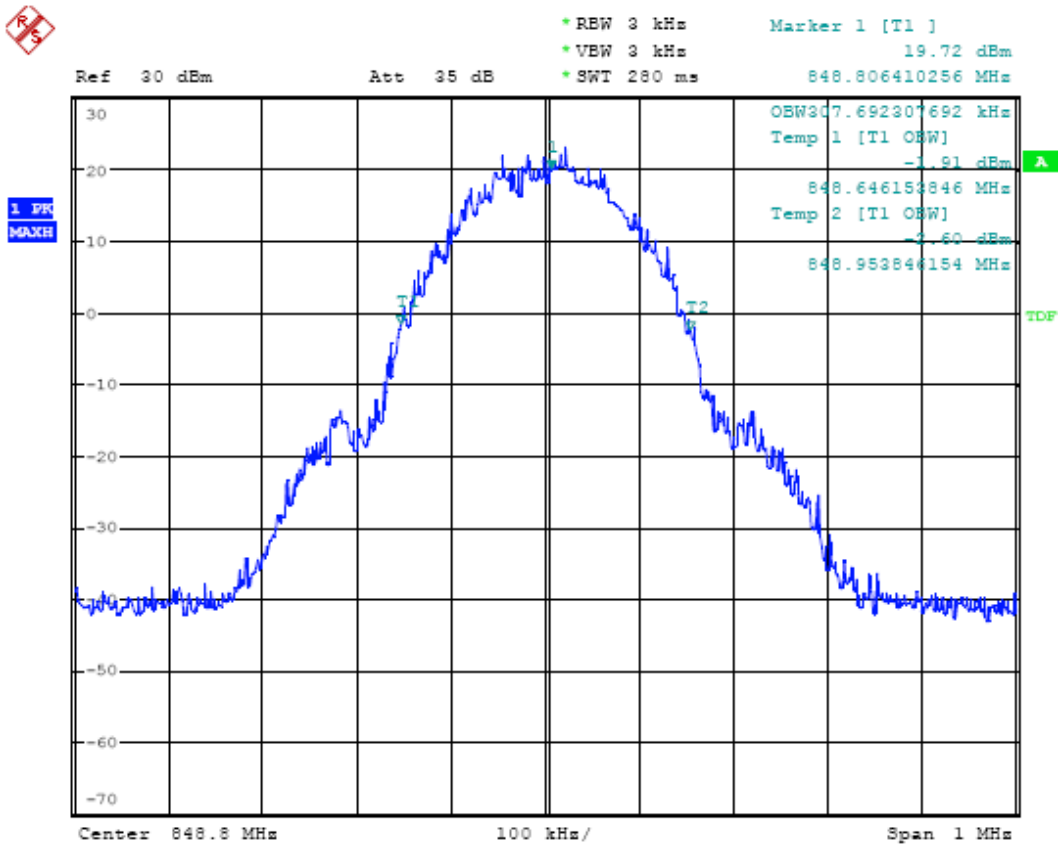


### Bandwidth (26dBC) PCS 1900 BAND CH 512

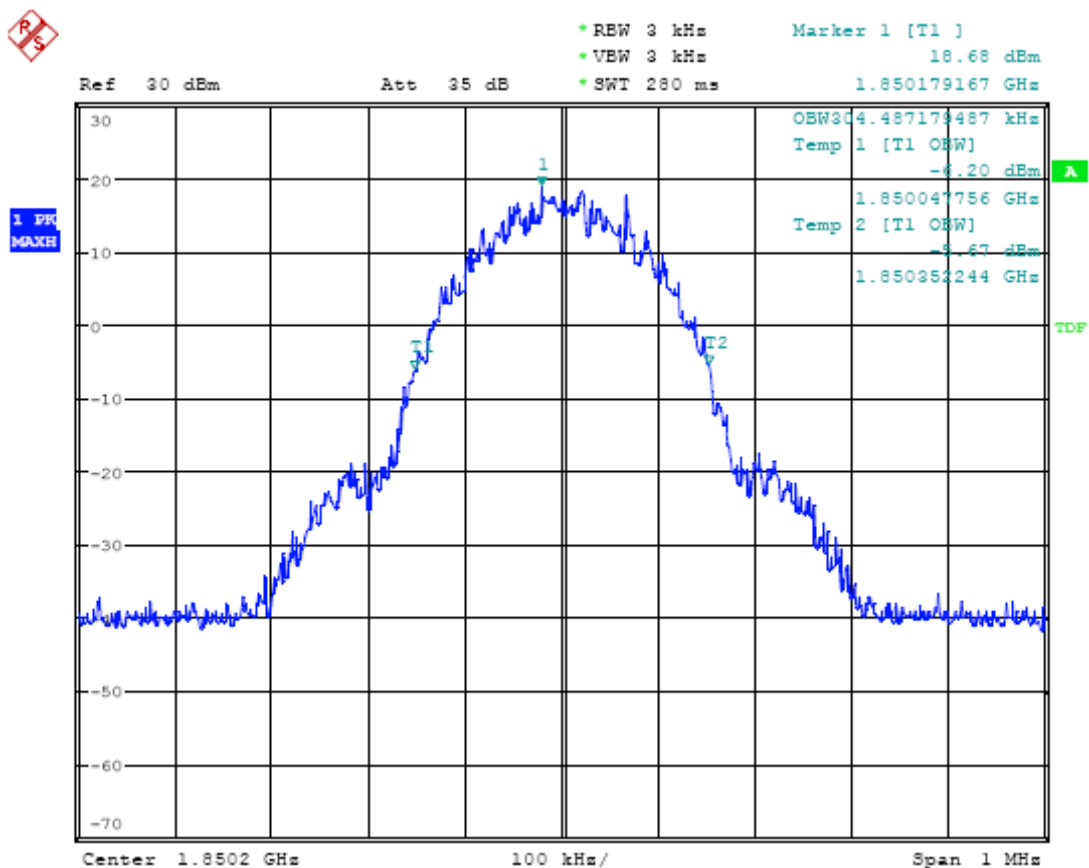


### Bandwidth (26dBC) PCS 1900 BAND CH 661

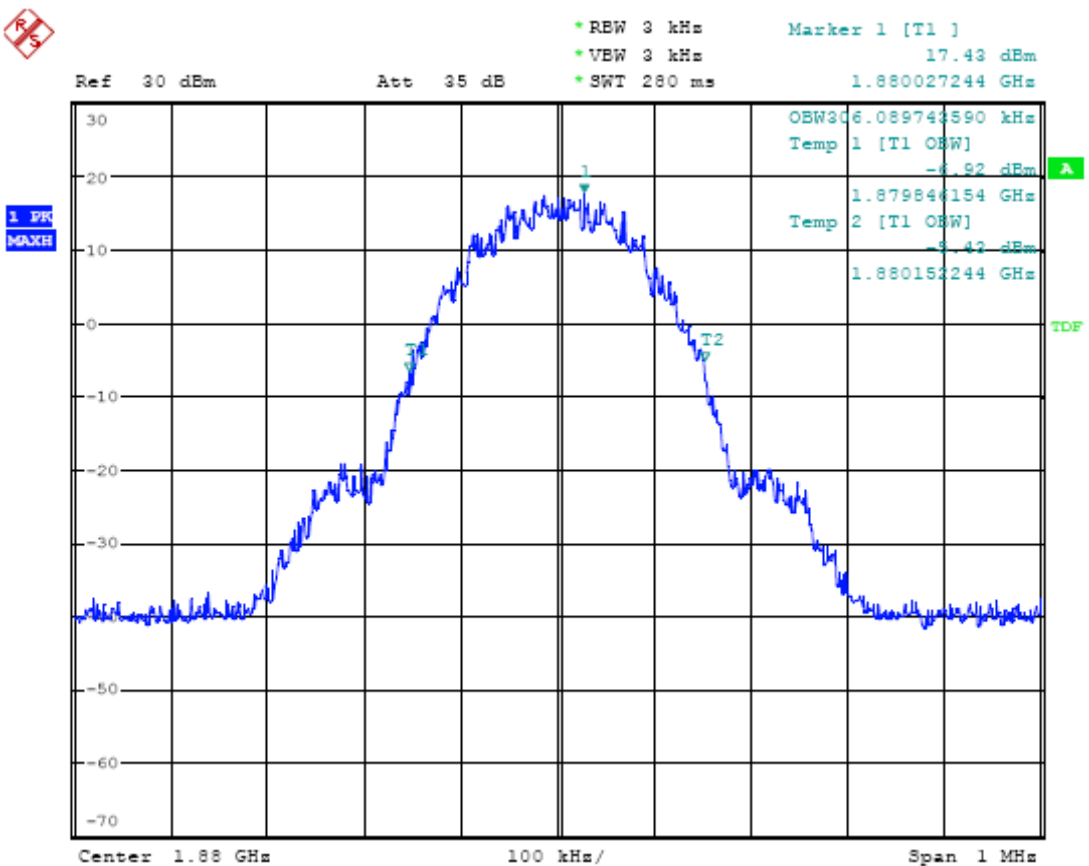


### Bandwidth (26dB) PCS 1900 BAND CH 810

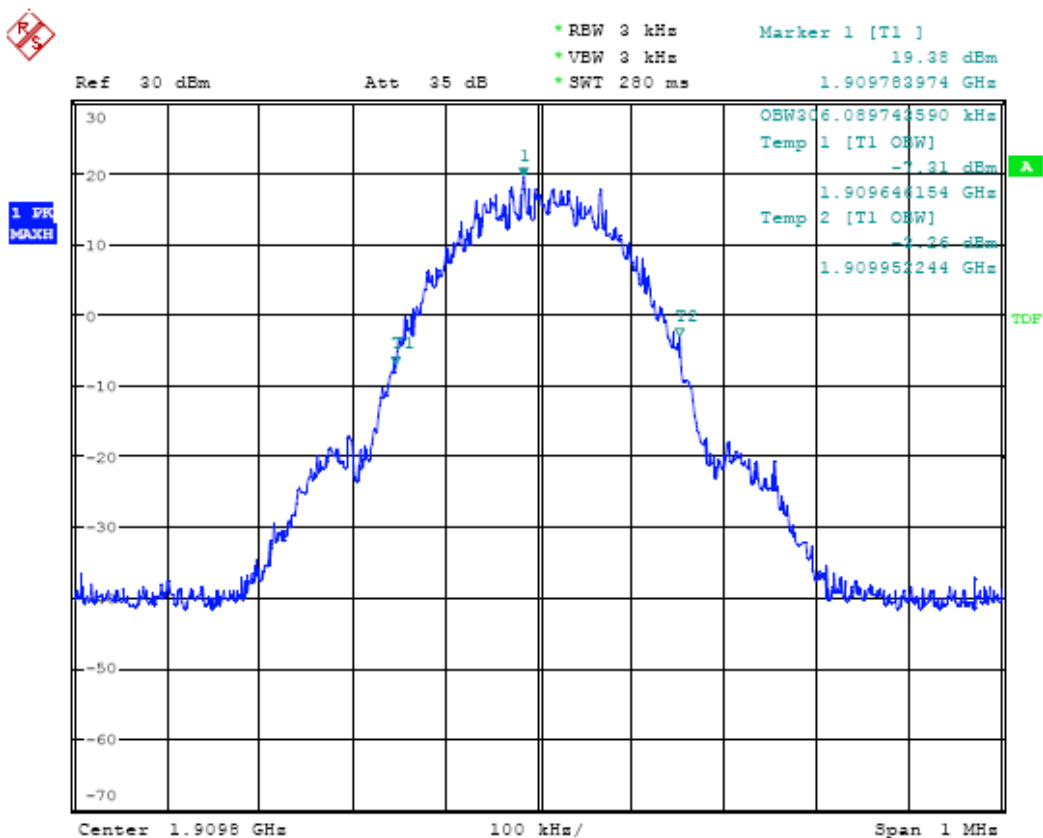


### Bandwidth (26dB) GPRS 1900 BAND CH 512

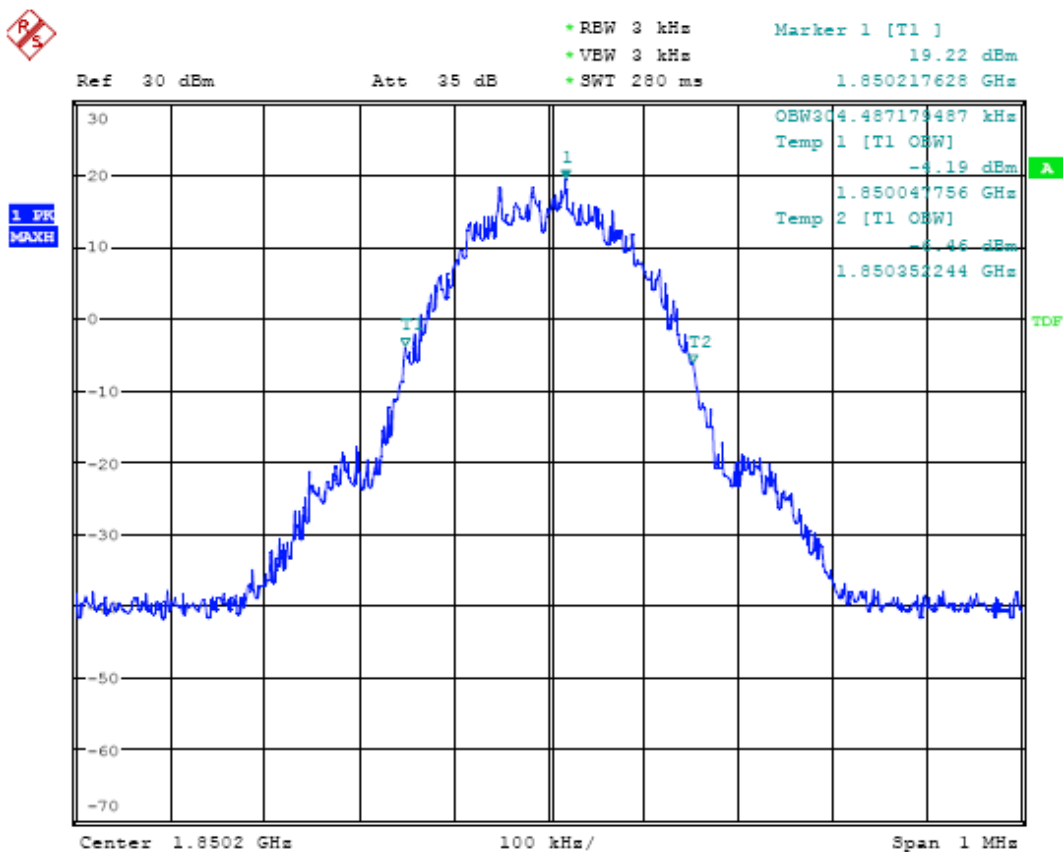

Bandwidth (26dBC) GPRS 1900 BAND CH 661

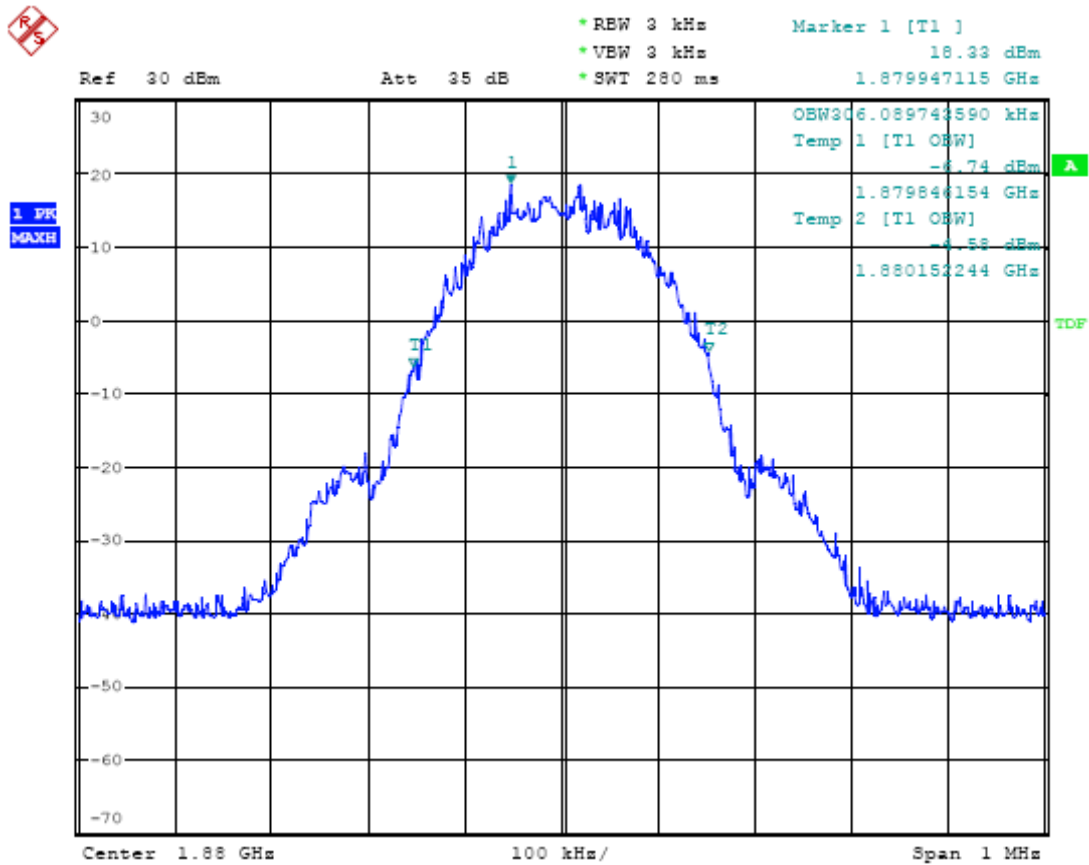


Bandwidth (26dBC) GPRS 1900 BAND CH 810

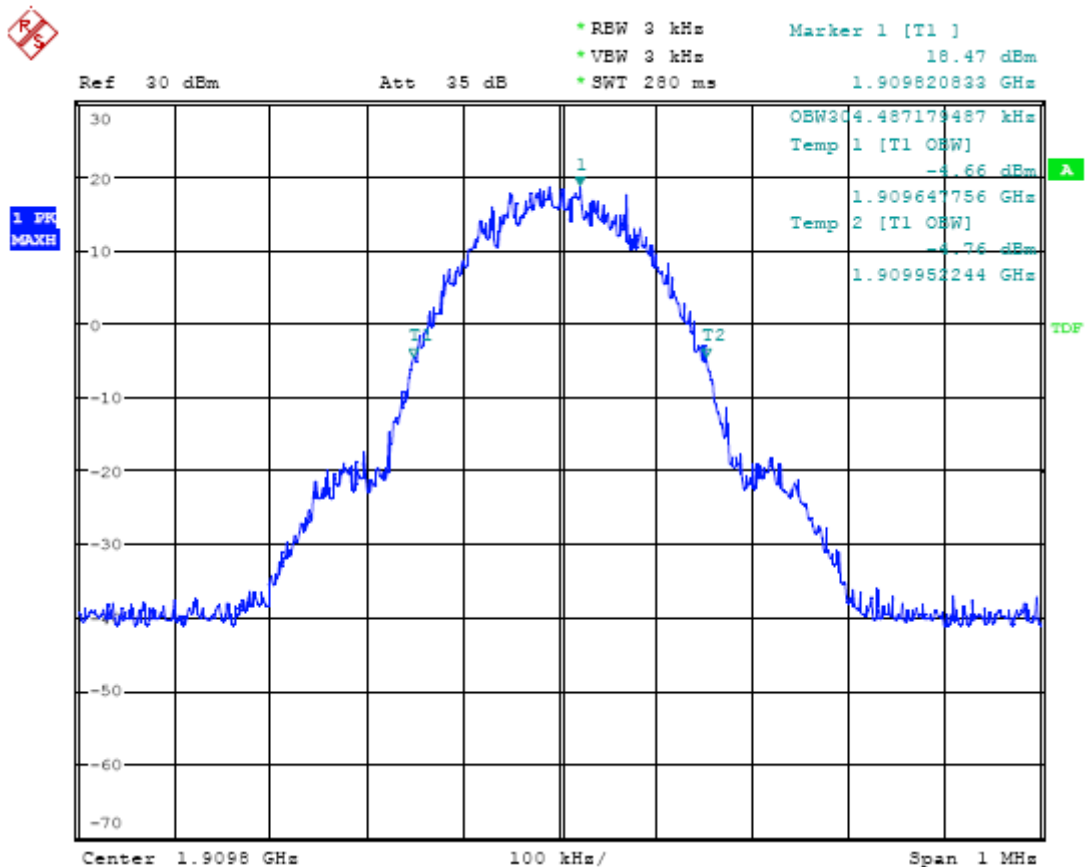


## **APPENDIX V**

### **TEST PLOTS FOR BAND EDGES**


### Low Band Edge GSM 850 BAND CH 128

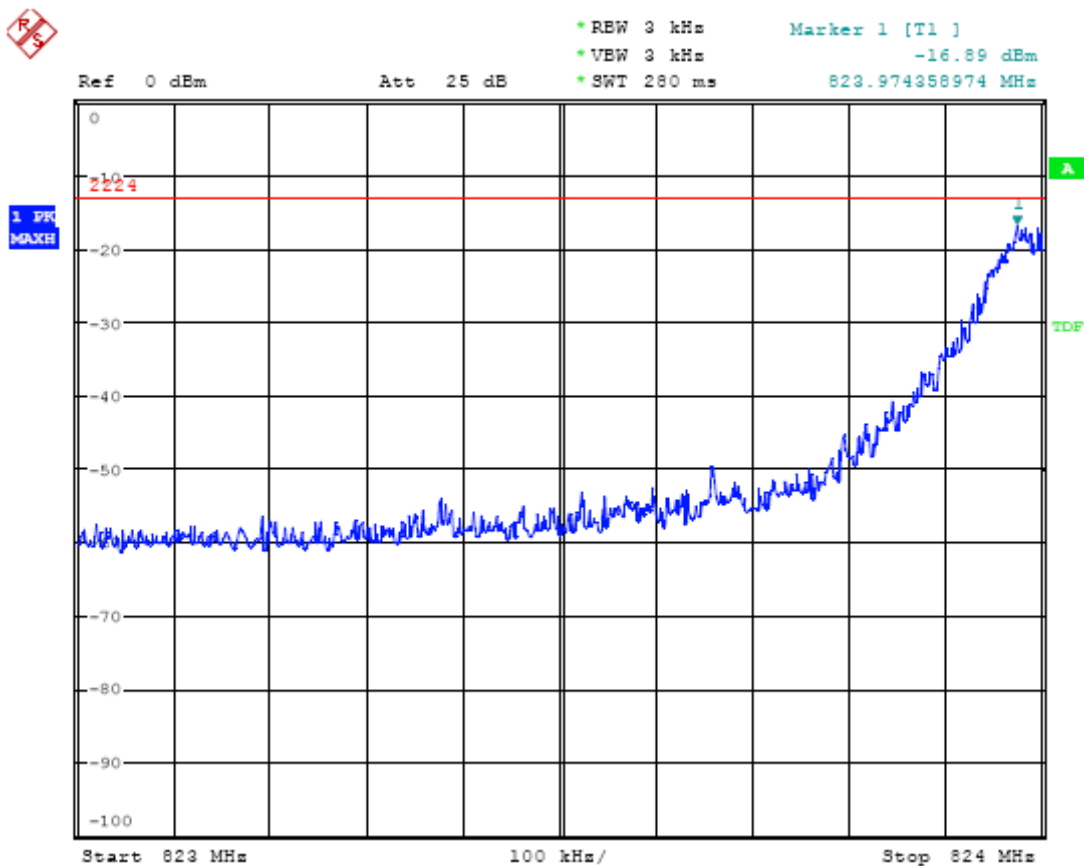


### High Band Edge GSM 850 BAND CH 251

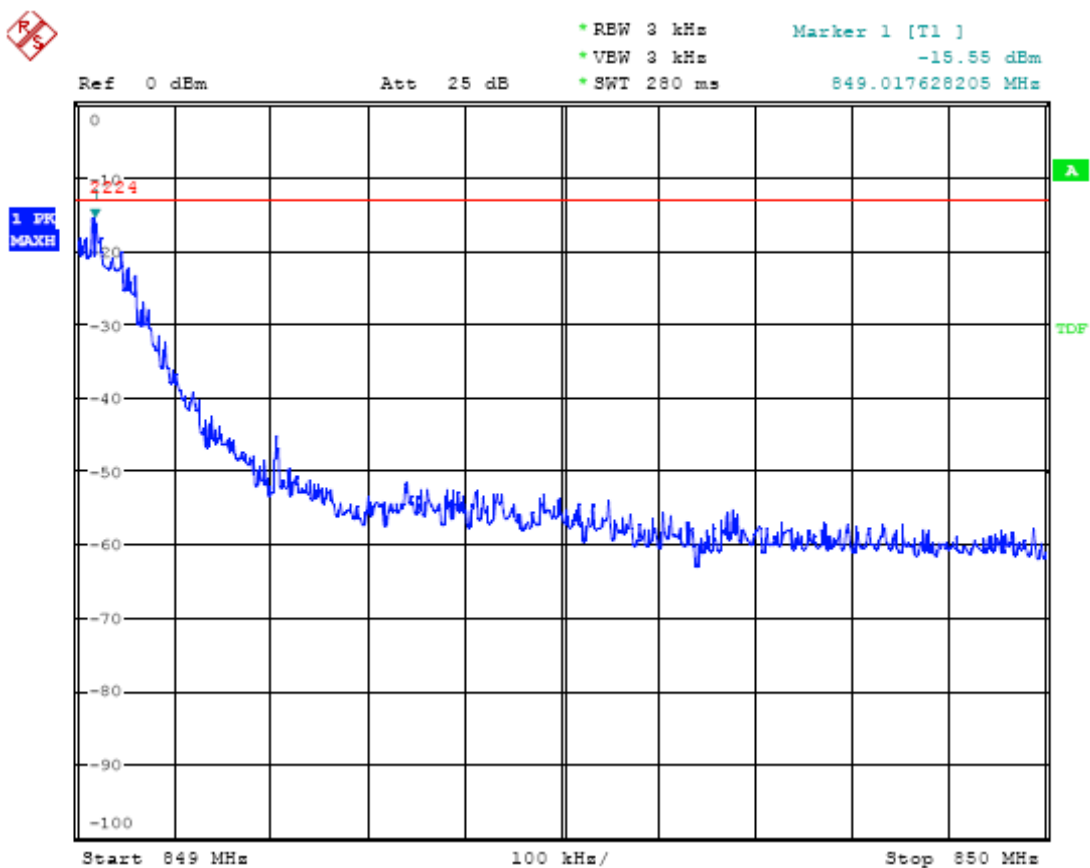


### Low Band Edge GPRS 850 BAND CH 128

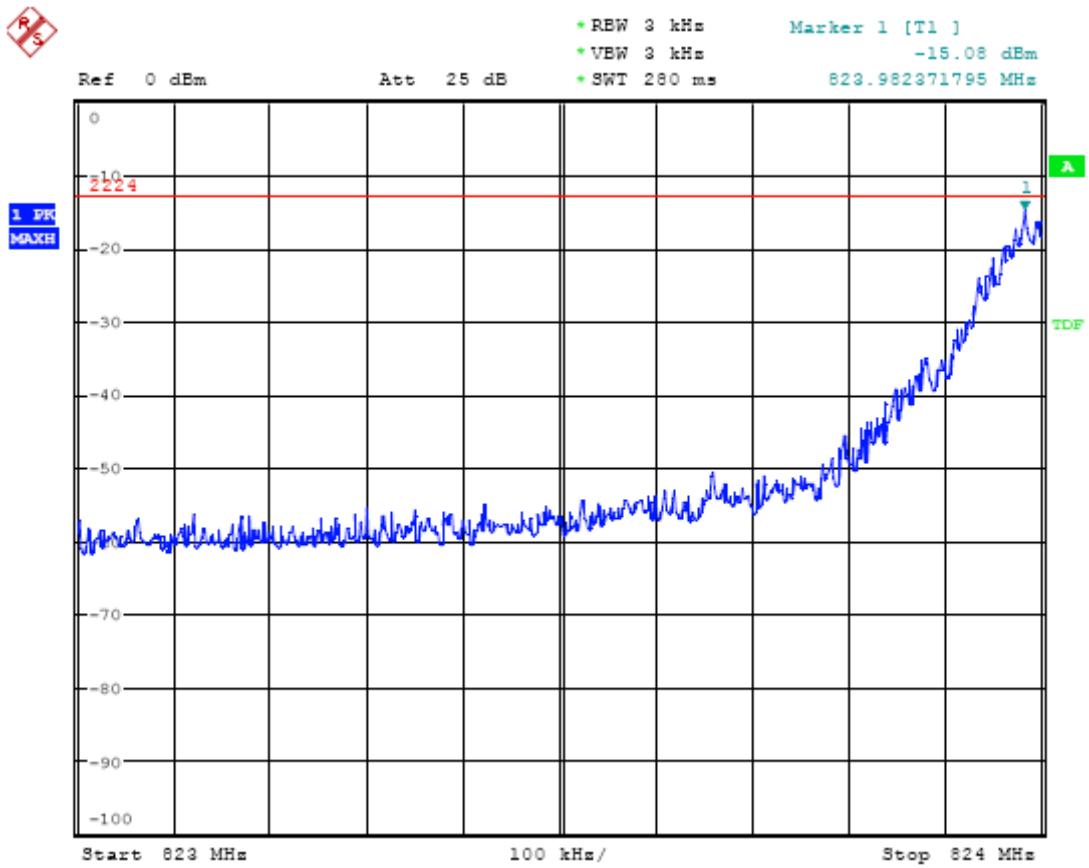


### High Band Edge GPRS 850 BAND CH 251

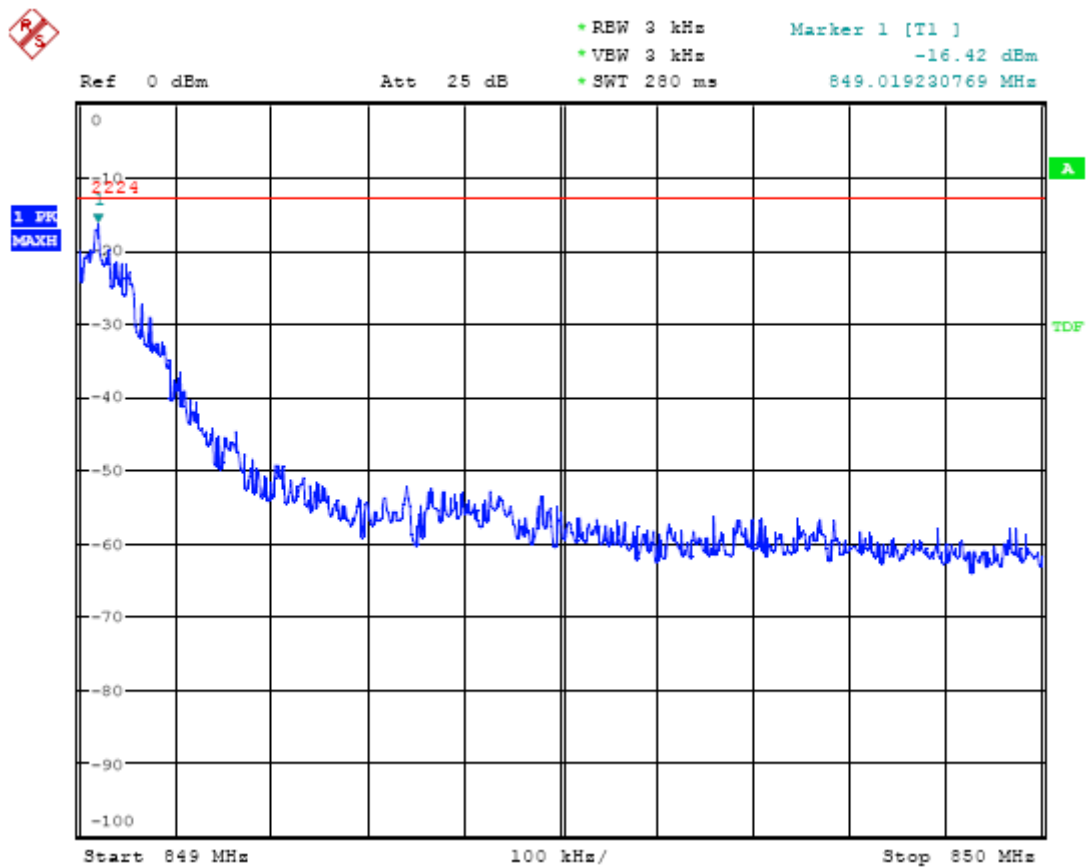

### Low Band Edge PCS 1900 BAND CH 512

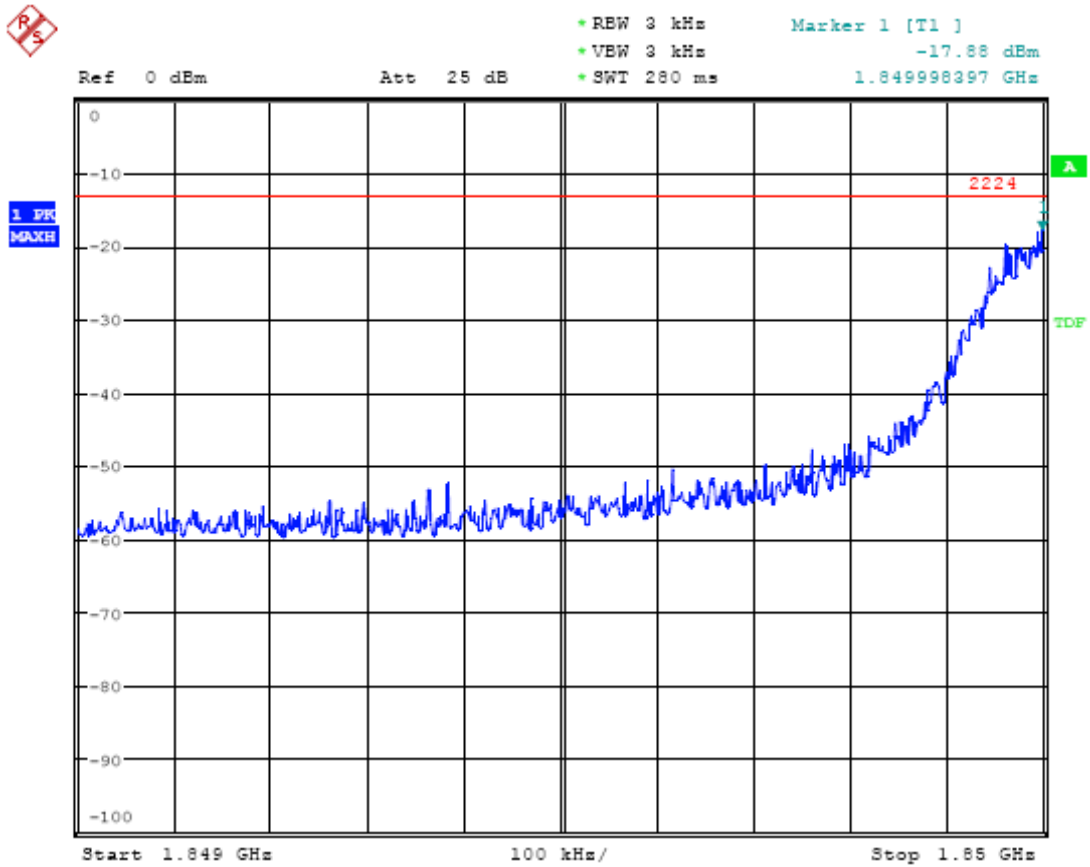


### High Band Edge PCS 1900 BAND CH 810

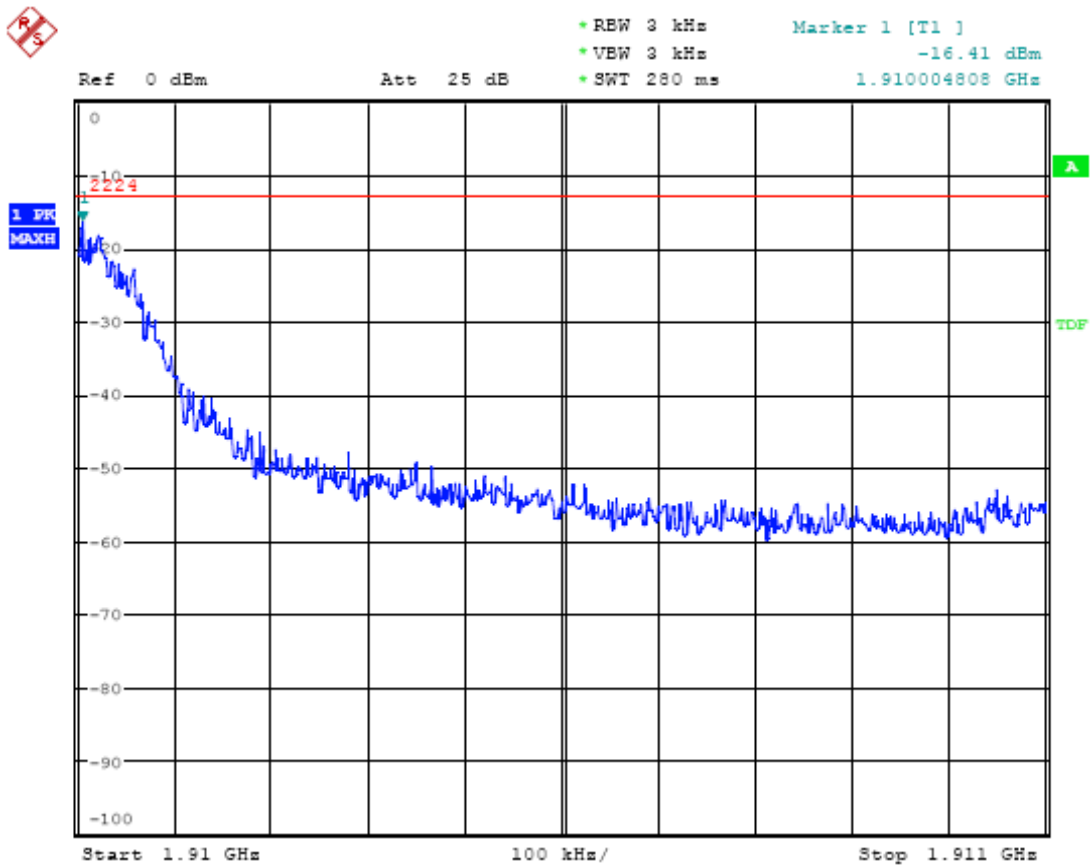




### Low Band Edge GPRS 1900 BAND CH 512

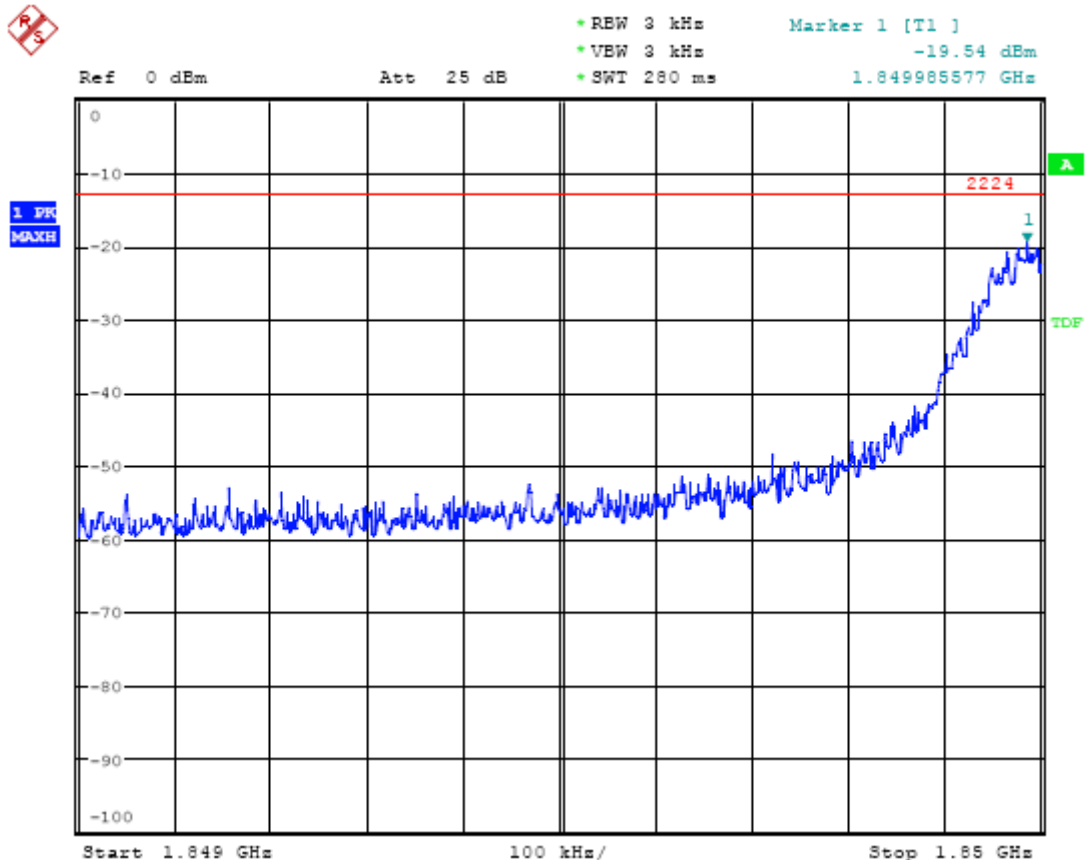

### High Band Edge GPRS 1900 BAND CH 810

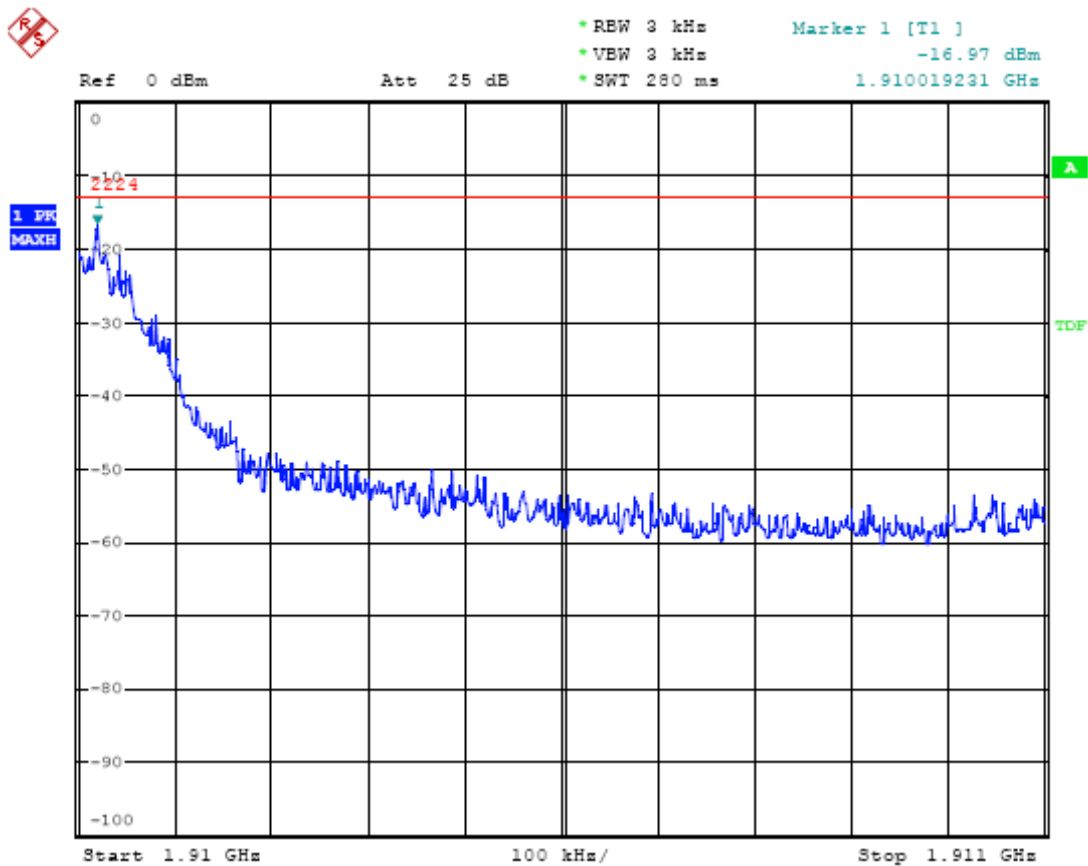

## **APPENDIX VI**

### **PHOTOGRAPHS OF TEST SETUP**

### Conducted Emission Test Setup



### Radiated Emission Test Setup



**APPENDIX VII**

**PHOTOGRAPHS OF EUT**

TOP VIEW OF EUT




BOTTOM VIEW OF EUT



OPEN VIEW



INTERNAL VIEW OF EUT-1

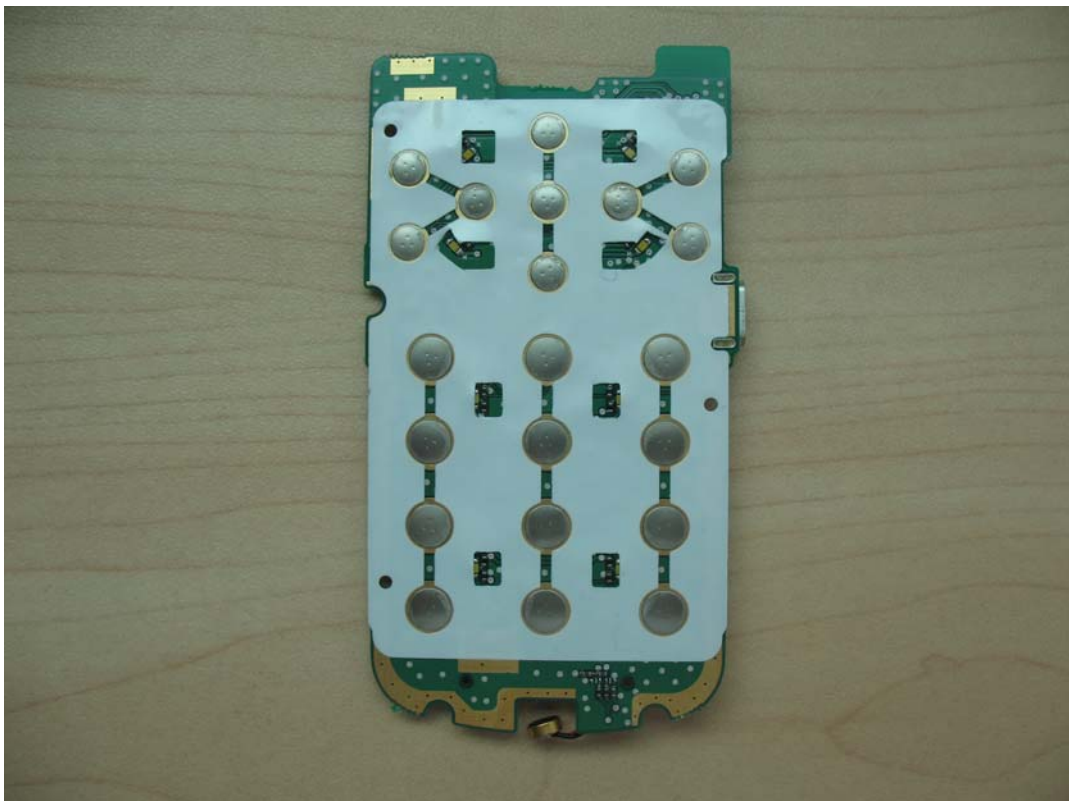




INTERNAL VIEW OF EUT-2




INTERNAL VIEW OF EUT-3



INTERNAL VIEW OF EUT-4

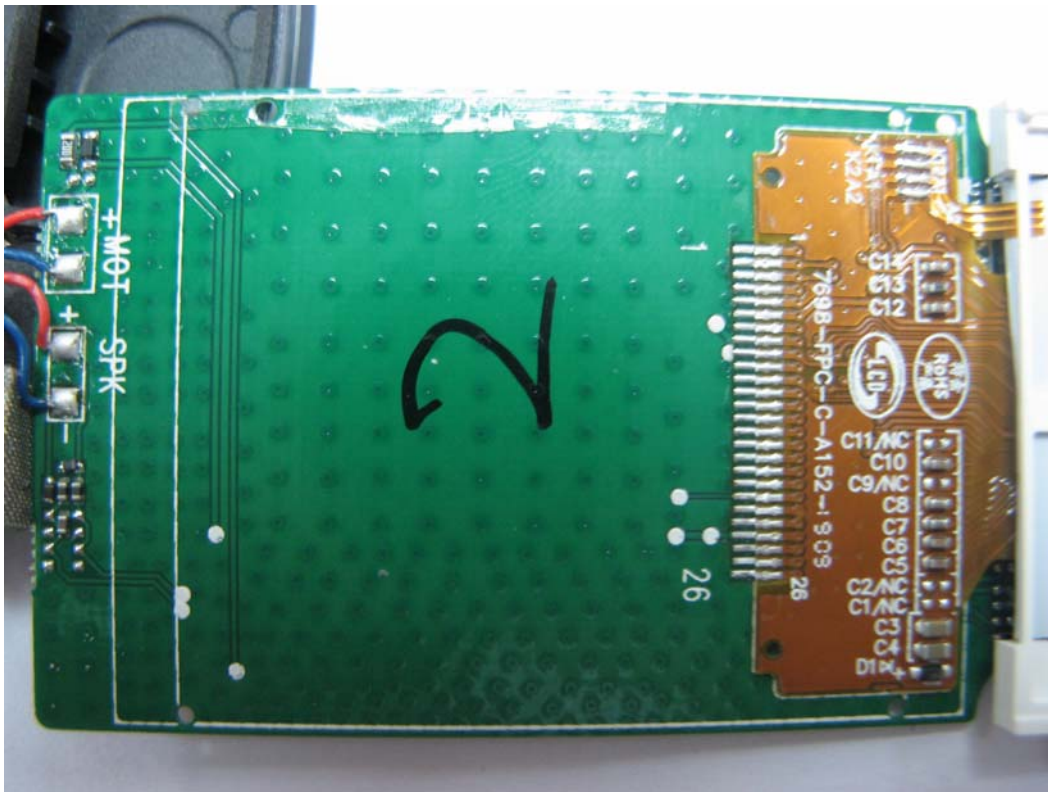


INTERNAL VIEW OF EUT - 5

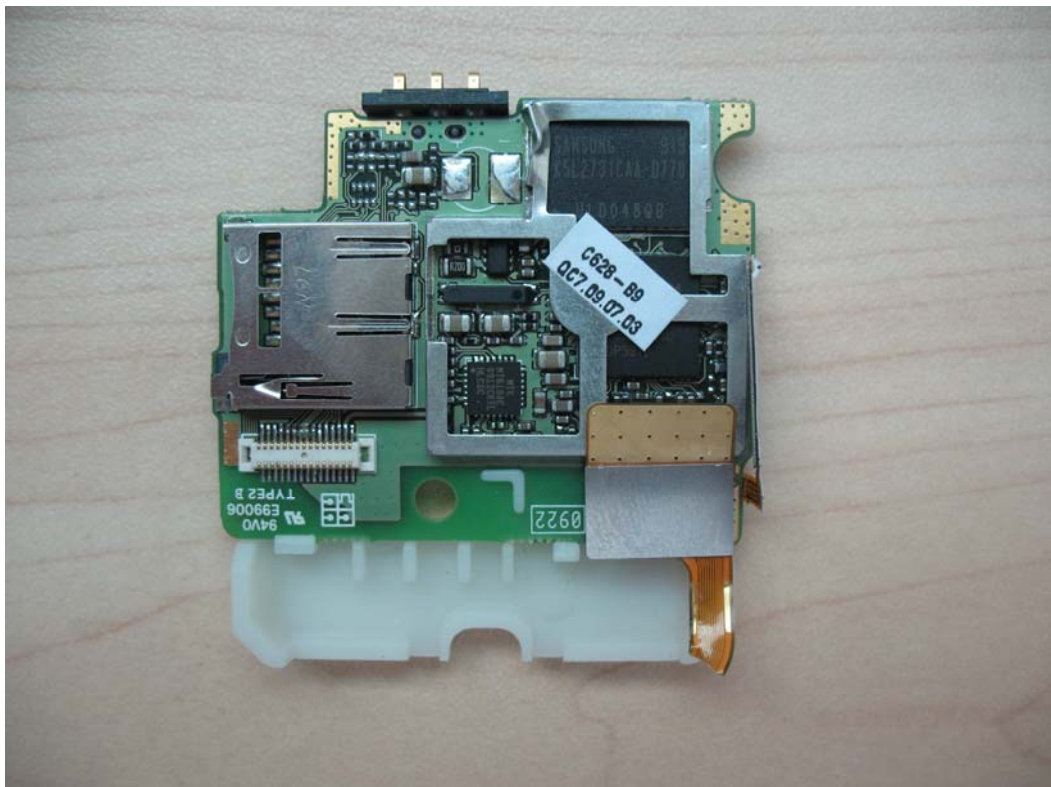



INTERNAL VIEW OF EUT – 6

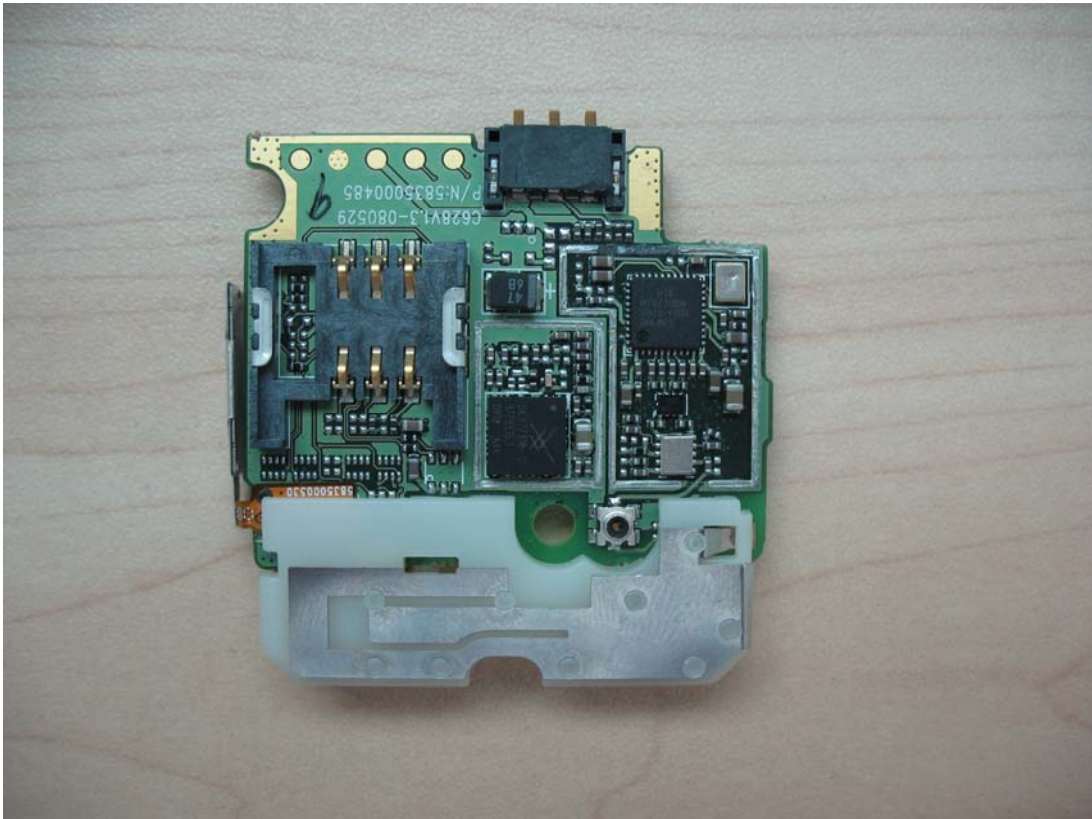

----END OF REPORT----