

# FCC REPORT

**Applicant:** Verykool USA Inc

**Address of Applicant:** 3636 Nobel Drive, Suite 325, San Diego, CA 92122

**Equipment Under Test (EUT)**

Product Name: Mobile Phone

Model No.: i316

**FCC ID:** WA6I316

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart B: 2011

**Date of sample receipt:** 10 May 2013

**Date of Test:** 11 May to 26 2013

**Date of report issued:** 28 May 2013

**Test Result :** Pass \*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2 Version

| Version No. | Date        | Description |
|-------------|-------------|-------------|
| 00          | 28 May 2013 | Original    |
|             |             |             |
|             |             |             |
|             |             |             |
|             |             |             |

**Prepared by:**

*Sera*

**Date:**

28 May 2013

**Report Clerk**

**Reviewed by:**

*Roger Feng*

**Date:**

28 May 2013

**Project Engineer**

### 3 Contents

|   | Page |
|---|------|
| 1 COVER PAGE .....                        | 1    |
| 2 VERSION .....                           | 2    |
| 3 CONTENTS .....                          | 3    |
| 4 TEST SUMMARY .....                      | 4    |
| 5 GENERAL INFORMATION .....               | 5    |
| 5.1 CLIENT INFORMATION .....              | 5    |
| 5.2 GENERAL DESCRIPTION OF E.U.T. ....    | 5    |
| 5.3 OPERATING MODES .....                 | 5    |
| 5.4 DESCRIPTION OF SUPPORT UNITS .....    | 6    |
| 5.5 LABORATORY FACILITY .....             | 6    |
| 5.6 LABORATORY LOCATION .....             | 6    |
| 5.7 TEST INSTRUMENTS LIST .....           | 7    |
| 6 TEST RESULTS AND MEASUREMENT DATA ..... | 8    |
| 6.1 CONDUCTED EMISSION .....              | 8    |
| 6.2 RADIATED EMISSION .....               | 11   |
| 7 TEST SETUP PHOTO .....                  | 17   |
| 8 EUT CONSTRUCTIONAL DETAILS .....        | 18   |

## 4 Test Summary

| Test Item          | Section in CFR 47 | Result |
|--------------------|-------------------|--------|
| Conducted Emission | Part15.107        | Pass   |
| Radiated Emission  | Part15.109        | Pass   |

*Pass: The EUT complies with the essential requirements in the standard.*

## 5 General Information

### 5.1 Client Information

|                          |  |
|--------------------------|--|
| Applicant:               | Verykool USA Inc   |
| Address of Applicant:    | 3636 Nobel Drive, Suite 325, San Diego, CA 92122   |
| Manufacturer:            | Verykool Wireless Technology Ltd.  |
| Address of Manufacturer: | Room 1701(5 <sup>th</sup> floor),Reward Building c,No.2032 <sup>nd</sup> Section of Wang Jing, Li Ze Zhong Yuan ,Chaoyang District.Beijing, P.R. of China 100102 |

### 5.2 General Description of E.U.T.

|               |   |
|---------------|---|
| Product Name: | Mobile Phone  |
| Model No.:    | i316  |
| AC adapter:   | Input:100-300V AC,50/60Hz 0.2A<br>Output:5.0V DC MAX500mA |
| Power supply: | Rechargeable Li-ion Battery DC3.7V/800mAh                 |

### 5.3 Operating Modes

| Operating mode   | Detail description                           |
|------------------|--|
| Downloading mode | Keep the EUT in Downloading mode(Worst case) |
| Playing mode     | Keep the EUT in Playing mode                 |
| Recording mode   | Keep the EUT in Recording mode               |
| FM mode          | Keep the EUT in FM receiver mode             |

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

## 5.4 Description of Support Units

| Manufacturer | Description | Model       | Serial Number | FCC ID/DoC |
|--------------|-------------|-------------|---------------|------------|
| DELL         | PC          | OPTIPLEX745 | N/A           | DoC        |
| DELL         | MONITOR     | E178FPC     | N/A           | DoC        |
| DELL         | KEYBOARD    | SK-8115     | N/A           | DoC        |
| DELL         | MOUSE       | MOC5UO      | N/A           | DoC        |
| HP           | Printer     | CB495A      | 05257893      | DoC        |

## 5.5 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

**FCC - Registration No.: 817957**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in out files. Registration 817957, February 27, 2012.

**IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

**CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

## 5.6 Laboratory Location

Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
 Address: No.B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
 Bao'an District, Shenzhen, Guangdong, China  
 Tel: 0755-23118282  
 Fax: 0755-23116366

## 5.7 Test Instruments list

| Radiated Emission: |                               |                                      |                   |               |                     |                         |
|--------------------|-------------------------------|--------------------------------------|-------------------|---------------|---------------------|-------------------------|
| Item               | Test Equipment                | Manufacturer                         | Model No.         | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                  | 3m Semi- Anechoic Chamber     | SAEMC                                | 9(L)*6(W)* 6(H)   | CCIS0001      | June 09 2012        | June 08 2013            |
| 2                  | EMI Test Receiver             | Rohde & Schwarz                      | ESPI              | CCIS0022      | Apr.01 2013         | Mar. 31 2014            |
| 3                  | BiConiLog Antenna             | SCHWARZBECK<br>MESS-ELEKTRONIK       | VULB9163          | CCIS0005      | June 04 2012        | June 03 2013            |
| 4                  | Double -ridged waveguide horn | SCHWARZBECK<br>MESS-ELEKTRONIK       | BBHA9120D         | CCIS0006      | May 30 2012         | May. 29 2013            |
| 5                  | EMI Test Software             | AUDIX                                | E3                | N/A           | N/A                 | N/A                     |
| 6                  | Coaxial Cable                 | CCIS                                 | N/A               | CCIS0016      | Apr. 01 2013        | Mar. 31 2014            |
| 7                  | Coaxial Cable                 | CCIS                                 | N/A               | CCIS0017      | Apr. 01 2013        | Mar. 31 2014            |
| 8                  | Coaxial cable                 | CCIS                                 | N/A               | CCIS0018      | Apr. 01 2013        | Mar. 31 2014            |
| 9                  | Coaxial Cable                 | CCIS                                 | N/A               | CCIS0019      | Apr. 01 2013        | Mar. 31 2014            |
| 10                 | Coaxial Cable                 | CCIS                                 | N/A               | CCIS0087      | Apr. 01 2013        | Mar. 31 2014            |
| 11                 | Amplifier(10KHz-1.3GHz)       | HP                                   | 8447D             | CCIS0003      | Apr. 01 2013        | Mar. 31 2014            |
| 12                 | Amplifier(1GHz-18GHz)         | Compliance<br>Direction Systems Inc. | PAP-1G18          | CCIS0011      | June 09 2012        | June 08 2013            |
| 13                 | Spectrum analyzer             | Rohde & Schwarz                      | FSP               | CCIS0023      | May 29 2013         | May 28 2014             |
| 14                 | Printer                       | HP                                   | HP LaserJet P1007 | N/A           | N/A                 | N/A                     |
| 15                 | Positioning Controller        | UC                                   | UC3000            | CCIS0015      | N/A                 | N/A                     |

| Conducted Emission: |                   |                    |                       |               |                     |                         |
|---------------------|-------------------|--------------------|-----------------------|---------------|---------------------|-------------------------|
| Item                | Test Equipment    | Manufacturer       | Model No.             | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1                   | Shielding Room    | ZhongShuo Electron | 11.0(L)x4.0(W)x3.0(H) | CCIS0061      | June 09 2012        | June 08 2013            |
| 2                   | EMI Test Receiver | Rohde & Schwarz    | ESCI                  | CCIS0002      | May 25 2013         | May. 24 2014            |
| 3                   | LISN              | CHASE              | MN2050D               | CCIS0074      | Apr. 01 2013        | Mar. 31 2014            |
| 4                   | Coaxial Cable     | CCIS               | N/A                   | CCIS0086      | Apr. 01 2013        | Mar. 31 2014            |

## 6 Test results and Measurement Data


### 6.1 Conducted Emission

| Test Requirement:     | FCC Part15 B Section 15.107  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
|-----------------------|--|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|--------|----|----|
| Test Method:          | ANSI C63.4:2003  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Test Frequency Range: | 150kHz to 30MHz  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Class / Severity:     | Class B  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Receiver setup:       | RBW=9kHz, VBW=30kHz  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Limit:                | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>0.5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>  | Frequency range (MHz) | Limit (dBμV) |  | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 0.5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBμV)   |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
|                       | Quasi-peak   | Average               |              |  |            |         |          |           |           |       |    |    |        |    |    |
| 0.15-0.5              | 66 to 56*  | 56 to 46*             |              |  |            |         |          |           |           |       |    |    |        |    |    |
| 0.5-5                 | 56   | 46                    |              |  |            |         |          |           |           |       |    |    |        |    |    |
| 0.5-30                | 60   | 50                    |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Test setup:           | <p>Remark:<br/> E.U.T: Equipment Under Test<br/> LISN: Line Impedance Stabilization Network<br/> Test table height=0.8m</p>  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Test procedure        | <ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.</li> </ol> |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Test environment:     | Temp.: 23 °C Humid.: 56% Press.: 1 01kPa   |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Measurement Record:   | Uncertainty: 3.28dB  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Test Instruments:     | Refer to section 5.7 for details   |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Test mode:            | Pre-scan all test mode in the section 5.3, and found the blew mode which it is worse case mode.  |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |
| Test results:         | Pass   |                       |              |  |            |         |          |           |           |       |    |    |        |    |    |



Measurement data:

Line:

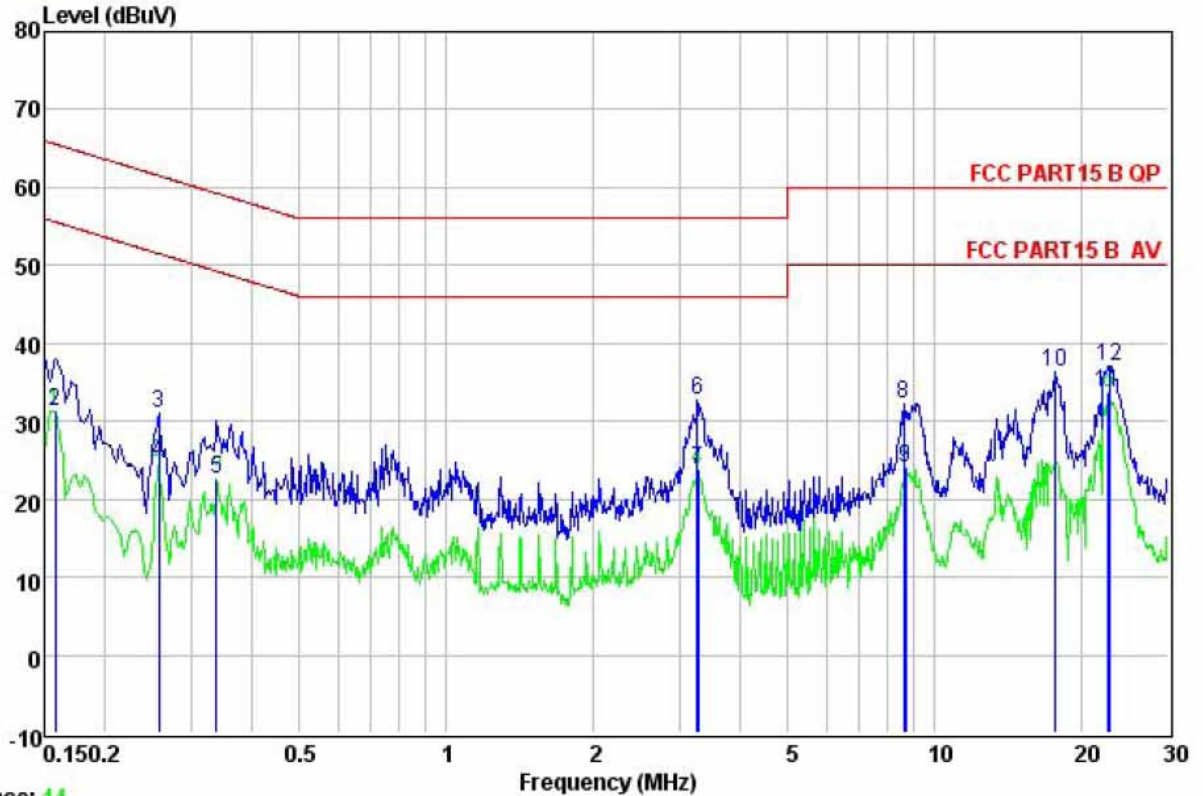


Trace: 44

Site : CCIS Conducted Test Site  
 Condition : FCC PART15 B QP LISN LINE  
 Job NO. : 131RF  
 Model : i 316  
 Test Mode : Downloading  
 Power Rating : AC 120V/60Hz  
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa  
 Test Engineer: Roger

|      | Read   | LISN   | Cable | Limit | Over  |                      |
|------|--------|--------|-------|-------|-------|----------------------|
| Freq | Level  | Factor | Loss  | Line  | Limit | Remark               |
| MHz  | dBuV   | dB     | dB    | dBuV  | dB    |                      |
| 1    | 0.150  | 27.29  | 10.25 | 0.79  | 38.33 | 66.00 -27.67 QP      |
| 2    | 0.158  | 20.15  | 10.24 | 0.79  | 31.18 | 55.56 -24.38 Average |
| 3    | 0.258  | 20.01  | 10.24 | 0.75  | 31.00 | 61.51 -30.51 QP      |
| 4    | 0.258  | 13.77  | 10.24 | 0.75  | 24.76 | 51.51 -26.75 Average |
| 5    | 0.337  | 11.69  | 10.27 | 0.73  | 22.69 | 49.27 -26.58 Average |
| 6    | 3.258  | 21.47  | 10.29 | 0.90  | 32.66 | 56.00 -23.34 QP      |
| 7    | 3.276  | 12.70  | 10.29 | 0.90  | 23.89 | 46.00 -22.11 Average |
| 8    | 8.637  | 21.18  | 10.26 | 0.89  | 32.33 | 60.00 -27.67 QP      |
| 9    | 8.683  | 12.84  | 10.26 | 0.89  | 23.99 | 50.00 -26.01 Average |
| 10   | 17.661 | 25.11  | 10.29 | 0.92  | 36.32 | 60.00 -23.68 QP      |
| 11   | 22.655 | 22.20  | 10.45 | 0.90  | 33.55 | 50.00 -16.45 Average |
| 12   | 22.775 | 25.73  | 10.46 | 0.89  | 37.08 | 60.00 -22.92 QP      |

Neutral:

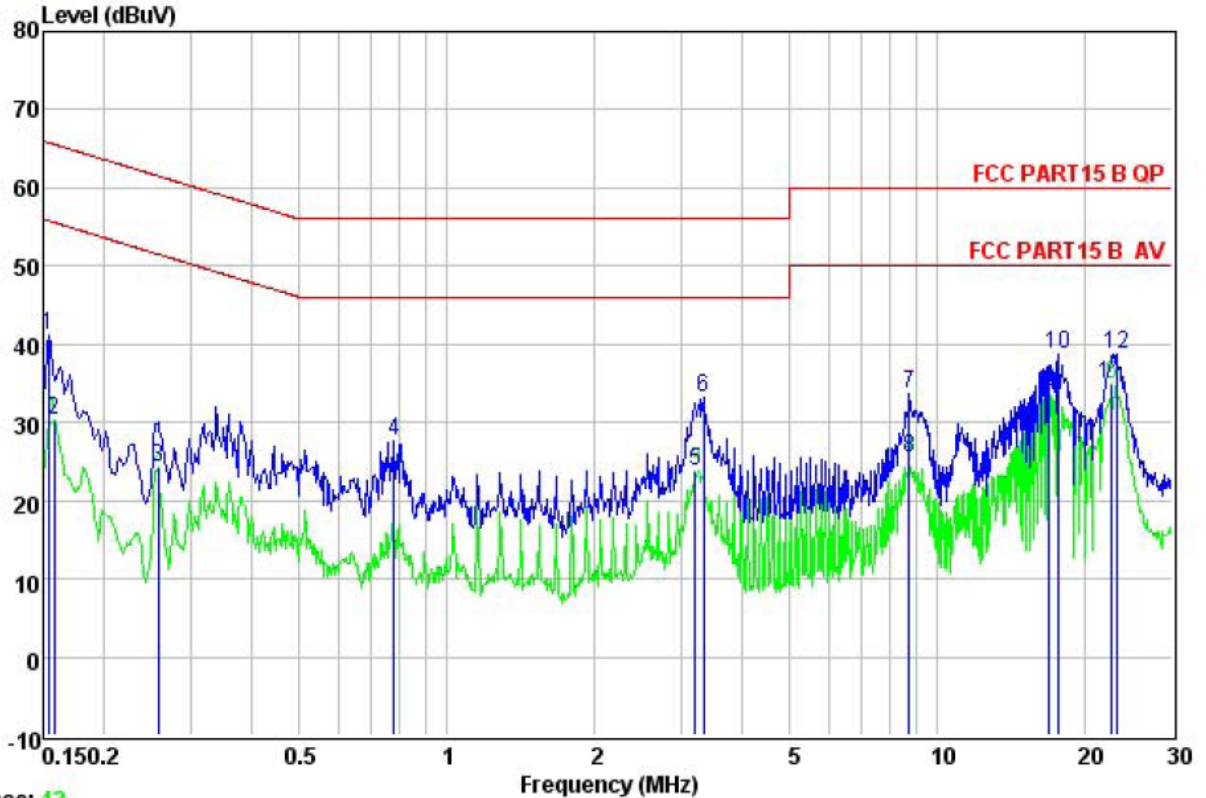

Trace: 42

Site : CCIS Conducted Test Site  
 Condition : FCC PART15 B QP LISN NEUTRAL  
 Job NO. : 131RF  
 Model : i 316  
 Test Mode : Downloading  
 Power Rating : AC 120V/60Hz  
 Environment : Temp: 23 °C Humi:56% Atmos:101KPa  
 Test Engineer: Roger

|      | Read   | LISN   | Cable | Limit | Over  |                      |
|------|--------|--------|-------|-------|-------|----------------------|
| Freq | Level  | Factor | Loss  | Line  | Limit | Remark               |
| MHz  | dBuV   | dB     | dB    | dBuV  | dB    |                      |
| 1    | 0.154  | 30.10  | 10.27 | 0.79  | 41.16 | 65.78 -24.62 QP      |
| 2    | 0.158  | 19.20  | 10.26 | 0.79  | 30.25 | 55.56 -25.31 Average |
| 3    | 0.258  | 13.20  | 10.24 | 0.75  | 24.19 | 51.51 -27.32 Average |
| 4    | 0.779  | 16.60  | 10.17 | 0.79  | 27.56 | 56.00 -28.44 QP      |
| 5    | 3.207  | 12.57  | 10.28 | 0.91  | 23.76 | 46.00 -22.24 Average |
| 6    | 3.328  | 21.99  | 10.28 | 0.90  | 33.17 | 56.00 -22.83 QP      |
| 7    | 8.729  | 22.49  | 10.24 | 0.89  | 33.62 | 60.00 -26.38 QP      |
| 8    | 8.729  | 14.44  | 10.24 | 0.89  | 25.57 | 50.00 -24.43 Average |
| 9    | 16.839 | 22.62  | 10.27 | 0.91  | 33.80 | 50.00 -16.20 Average |
| 10   | 17.568 | 27.52  | 10.29 | 0.92  | 38.73 | 60.00 -21.27 QP      |
| 11   | 22.655 | 23.55  | 10.45 | 0.90  | 34.90 | 50.00 -15.10 Average |
| 12   | 23.140 | 27.41  | 10.48 | 0.89  | 38.78 | 60.00 -21.22 QP      |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

## 6.2 Radiated Emission

|                       |  |                    |               |                  |                  |
|-----------------------|--|--------------------|---------------|------------------|------------------|
| Test Requirement:     | FCC Part15 B Section 15.109                      |                    |               |                  |                  |
| Test Method:          | ANSI C63.4:2003                                  |                    |               |                  |                  |
| Test Frequency Range: | 30MHz to 6000MHz                                 |                    |               |                  |                  |
| Test site:            | Measurement Distance: 3m (Semi-Anechoic Chamber) |                    |               |                  |                  |
| Receiver setup:       | Frequency  | Detector           | RBW           | VBW              | Remark           |
|                       | 30MHz-1GHz                                       | Quasi-peak         | 100KHz        | 300KHz           | Quasi-peak Value |
|                       | Above 1GHz                                       | Peak               | 1MHz          | 3MHz             | Peak Value       |
| Limit:                | Frequency  | Limit (dBuV/m @3m) |               | Remark           |                  |
|                       | 30MHz-88MHz                                      | 40.0               |               | Quasi-peak Value |                  |
|                       | 88MHz-216MHz                                     | 43.5               |               | Quasi-peak Value |                  |
|                       | 216MHz-960MHz                                    | 46.0               |               | Quasi-peak Value |                  |
|                       | 960MHz-1GHz                                      | 54.0               |               | Quasi-peak Value |                  |
| Above 1GHz            | 54.0   |                    | Average Value |                  |                  |
|                       | 74.0   |                    | Peak Value    |                  |                  |
| Test setup:           | Below 1GHz                                       |                    |               |                  |                  |
|                       |  |                    |               |                  |                  |
| Test setup:           | Above 1GHz                                       |                    |               |                  |                  |
|                       |  |                    |               |                  |                  |

|                     |   |
|---------------------|---|
| Test Procedure:     | <ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol> |
| Test environment:   | Temp.: 24 °C Humid.: 65% Press.: 1 01kPa  |
| Measurement Record: | Uncertainty: 4.88dB   |
| Test Instruments:   | Refer to section 5.7 for details  |
| Test mode:          | Pre-scan all test mode in the section 5.3, and found the bleed mode which it is worse case mode.  |
| Test results:       | Passed  |


*Remark:*

1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case.

**Measurement Data**

Below 1GHz


Horizontal:

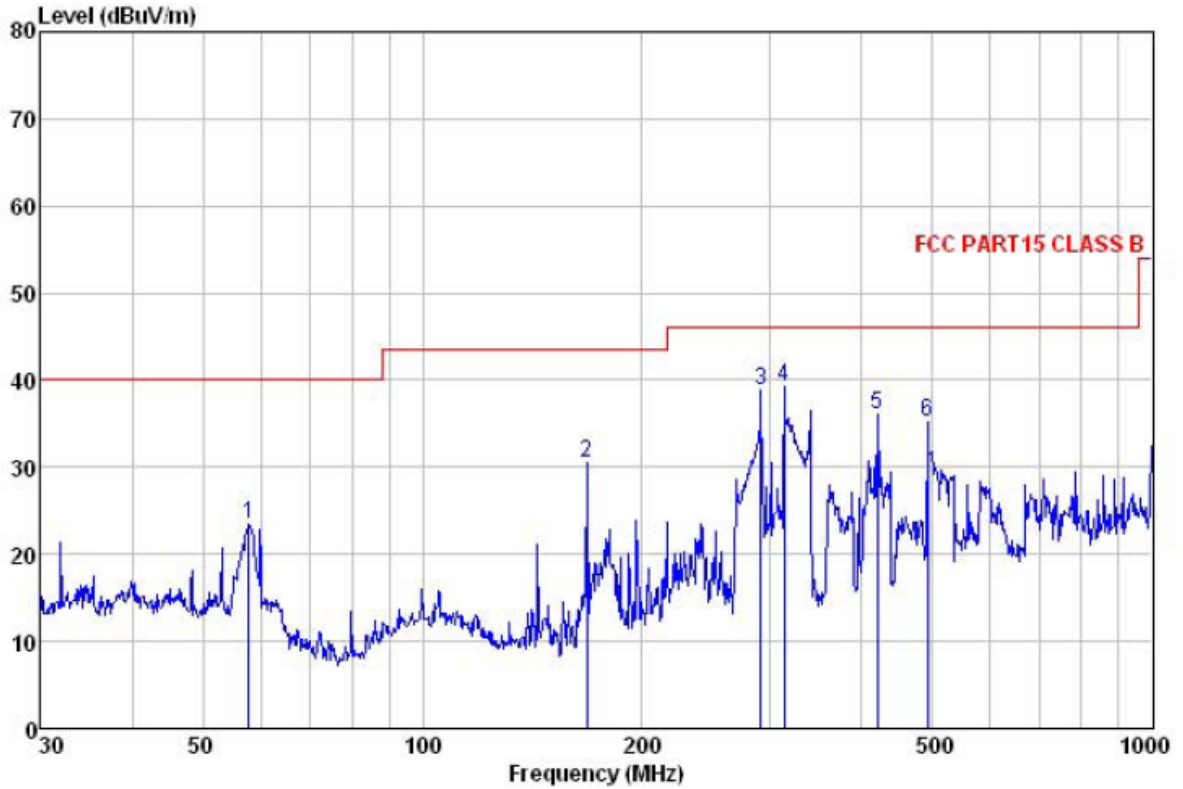

Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) HORIZONTAL  
 Job No. : 131RF  
 EUT : Mobile Phone  
 Model : i 316  
 Test mode : Down Loading  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25°C Humi:55% Atmos:101Kpa  
 Test Engineer: Roger

|      | Read    | Antenna | Cable | Preamp | Limit  | Over   |       |           |
|------|---------|---------|-------|--------|--------|--------|-------|-----------|
| Freq | Level   | Factor  | Loss  | Factor | Level  | Line   | Limit | Remark    |
| MHz  | dBuV    | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB    |           |
| 1    | 57.796  | 38.16   | 12.85 | 1.37   | 29.01  | 23.37  | 40.00 | -16.63 QP |
| 2    | 167.824 | 47.88   | 8.90  | 2.64   | 29.01  | 30.41  | 43.50 | -13.09 QP |
| 3    | 291.036 | 52.45   | 12.89 | 2.92   | 29.46  | 38.80  | 46.00 | -7.20 QP  |
| 4    | 313.276 | 52.47   | 13.24 | 2.98   | 29.50  | 39.19  | 46.00 | -6.81 QP  |
| 5    | 420.580 | 47.62   | 15.47 | 3.13   | 30.17  | 36.05  | 46.00 | -9.95 QP  |
| 6    | 492.469 | 45.79   | 16.39 | 3.55   | 30.52  | 35.21  | 46.00 | -10.79 QP |

Vertical:

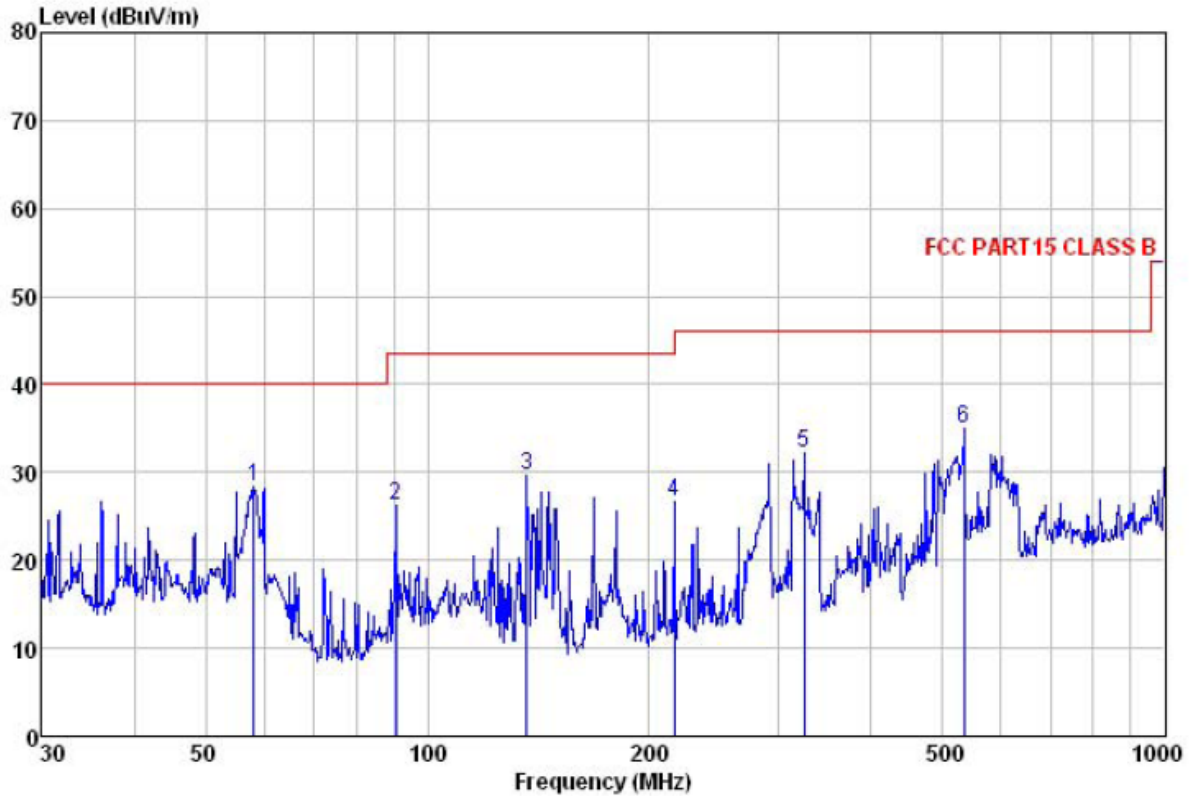


Site : 3m chamber  
 Condition : FCC PART15 CLASS B 3m VULB9163(30M1G) VERTICAL  
 Job No. : 131RF  
 EUT : Mobile Phone  
 Model : i 316  
 Test mode : Down Loading  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25°C Humi:55% Atmos:101Kpa  
 Test Engineer: Roger

|   | Freq<br>MHz | Read          | Antenna        | Cable      | Preamp       | Level<br>dBUV/m | Limit          | Over        | Remark |
|---|-------------|---------------|----------------|------------|--------------|-----------------|----------------|-------------|--------|
|   |             | Level<br>dBUV | Factor<br>dB/m | Loss<br>dB | Factor<br>dB |                 | Line<br>dBUV/m | Limit<br>dB |        |
| 1 | 58.203      | 43.33         | 12.81          | 1.37       | 29.05        | 28.46           | 40.00          | -11.54      | QP     |
| 2 | 90.537      | 42.15         | 12.07          | 2.03       | 30.07        | 26.18           | 43.50          | -17.32      | QP     |
| 3 | 136.460     | 48.37         | 8.45           | 2.36       | 29.43        | 29.75           | 43.50          | -13.75      | QP     |
| 4 | 216.024     | 42.52         | 11.07          | 2.85       | 29.74        | 26.70           | 46.00          | -19.30      | QP     |
| 5 | 324.456     | 45.25         | 13.53          | 3.02       | 29.56        | 32.24           | 46.00          | -13.76      | QP     |
| 6 | 533.832     | 44.36         | 17.26          | 3.80       | 30.53        | 34.89           | 46.00          | -11.11      | QP     |

Above 1GHz


Horizontal:

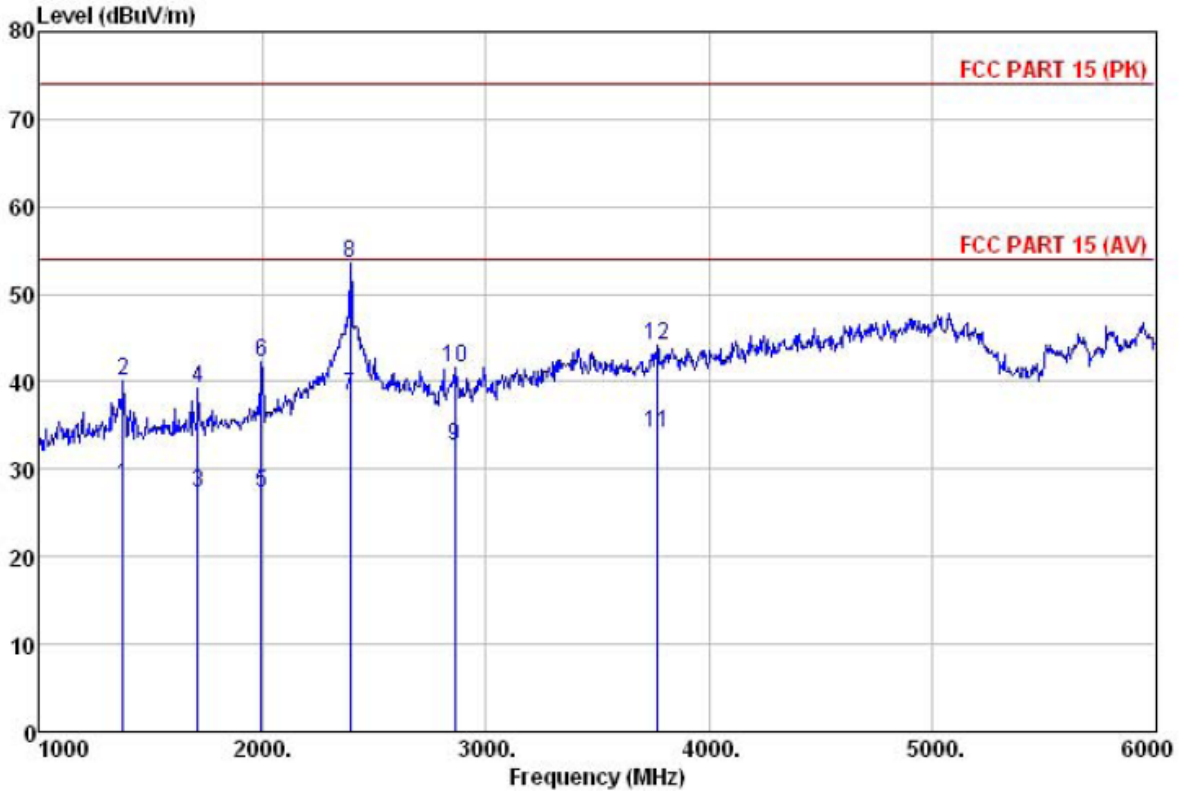

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) HORIZONTAL  
 Job No. : 131RF  
 EUT : Mobile Phone  
 Model : i 316  
 Test mode : Down loading  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25°C Humi:55% Atmos:101Kpa  
 Test Engineer: Roger

|      | Read     | Antenna | Cable | Preamp | Limit  | Over   |                      |
|------|----------|---------|-------|--------|--------|--------|----------------------|
| Freq | Level    | Factor  | Loss  | Factor | Line   | Limit  | Remark               |
| MHz  | dBuV     | dB/m    | dB    | dB     | dBuV/m | dBuV/m | dB                   |
| 1    | 1375.000 | 39.74   | 25.61 | 3.68   | 40.93  | 28.10  | 54.00 -25.90 Average |
| 2    | 1375.000 | 51.74   | 25.61 | 3.68   | 40.93  | 40.10  | 74.00 -33.90         |
| 3    | 1710.000 | 38.80   | 24.98 | 4.42   | 40.98  | 27.22  | 54.00 -26.78 Average |
| 4    | 1710.000 | 50.80   | 24.98 | 4.42   | 40.98  | 39.22  | 74.00 -34.78         |
| 5    | 1995.000 | 37.22   | 26.13 | 4.83   | 40.84  | 27.34  | 54.00 -26.66 Average |
| 6    | 1995.000 | 52.22   | 26.13 | 4.83   | 40.84  | 42.34  | 74.00 -31.66         |
| 7    | 2390.000 | 36.60   | 27.58 | 5.67   | 31.35  | 38.50  | 54.00 -15.50 Average |
| 8    | 2390.000 | 51.60   | 27.58 | 5.67   | 31.35  | 53.50  | 74.00 -20.50         |
| 9    | 2860.000 | 38.88   | 28.38 | 6.01   | 40.61  | 32.66  | 54.00 -21.34 Average |
| 10   | 2860.000 | 47.88   | 28.38 | 6.01   | 40.61  | 41.66  | 74.00 -32.34         |
| 11   | 3765.000 | 37.94   | 29.47 | 7.28   | 40.54  | 34.15  | 54.00 -19.85 Average |
| 12   | 3765.000 | 47.94   | 29.47 | 7.28   | 40.54  | 44.15  | 74.00 -29.85         |

Vertical:

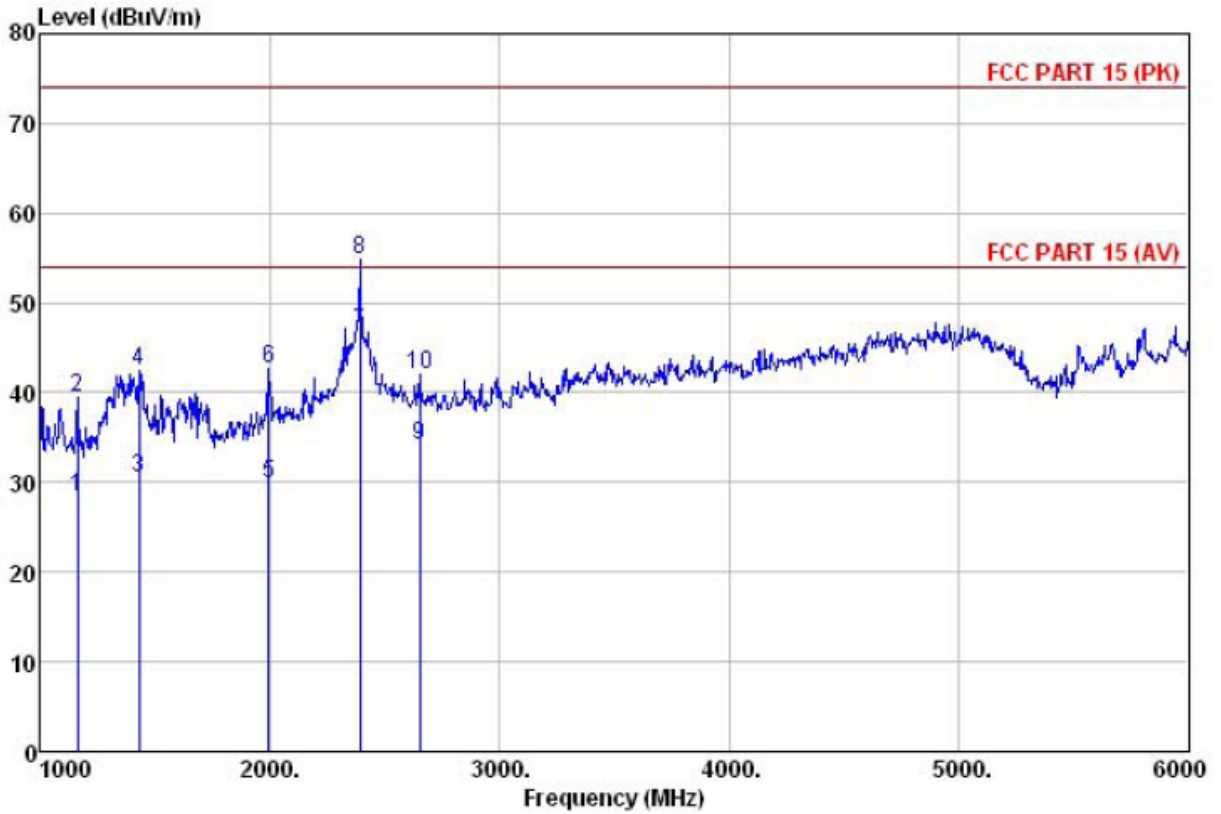

Site : 3m chamber  
 Condition : FCC PART 15 (PK) 3m BBHA9120(1G18) VERTICAL  
 Job No. : 131RF  
 EUT : Mobile Phone  
 Model : i 316  
 Test mode : Down loading  
 Power Rating : AC 120V/60Hz  
 Environment : Temp:25°C Humi:55% Atmos:101Kpa  
 Test Engineer: Roger

|    | Freq     | ReadLevel | Antenna Factor | Cable Loss | Preamp Factor | Level  | Limit  | Over   | Remark  |
|----|----------|-----------|----------------|------------|---------------|--------|--------|--------|---------|
|    | MHz      | dBuV      | dB/m           | dB         | dB            | dBuV/m | dBuV/m | dB     |         |
| 1  | 1160.000 | 41.27     | 24.61          | 3.42       | 40.92         | 28.38  | 54.00  | -25.62 | Average |
| 2  | 1160.000 | 52.27     | 24.61          | 3.42       | 40.92         | 39.38  | 74.00  | -34.62 |         |
| 3  | 1430.000 | 42.29     | 25.41          | 3.75       | 40.94         | 30.51  | 54.00  | -23.49 | Average |
| 4  | 1430.000 | 54.29     | 25.41          | 3.75       | 40.94         | 42.51  | 74.00  | -31.49 |         |
| 5  | 1995.000 | 39.65     | 26.13          | 4.83       | 40.84         | 29.77  | 54.00  | -24.23 | Average |
| 6  | 1995.000 | 52.65     | 26.13          | 4.83       | 40.84         | 42.77  | 74.00  | -31.23 |         |
| 7  | 2390.000 | 44.92     | 27.58          | 5.67       | 31.35         | 46.82  | 54.00  | -7.18  | Average |
| 8  | 2390.000 | 52.92     | 27.58          | 5.67       | 31.35         | 54.82  | 74.00  | -19.18 |         |
| 9  | 2650.000 | 40.33     | 27.92          | 6.09       | 40.29         | 34.05  | 54.00  | -19.95 | Average |
| 10 | 2650.000 | 48.33     | 27.92          | 6.09       | 40.29         | 42.05  | 74.00  | -31.95 |         |