



FCC REPORT (Bluetooth)

Applicant: VeryKool USA Inc
Address of Applicant: 4350 Executive Dr.#100, San Diego, CA 92121
Equipment Under Test (EUT)
Product Name: GSM Quad Band GPRS Digital Mobile Phone
Model No.: i610
Trade mark: Verykool
FCC ID: WA6I610
Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2010
Date of sample receipt: 08 Apr., 2011
Date of Test: 08-11 Apr., 2011
Date of report issued: 12 Apr., 2011
Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS International Electrical Approvals or testing done by GTS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by GTS International Electrical Approvals in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."

2 Version

Version No.	Date	Description
<i>00</i>	<i>2011-04-12</i>	<i>Original</i>

Prepared By: Collin.He **Date:** 2011-04-12
Project Engineer

Check By: Hans.Hu **Date:** 2011-04-12
Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF E.U.T.....	5
5.3 E.U.T OPERATION MODE	7
5.4 TEST FACILITY.....	7
5.5 TEST LOCATION.....	7
5.6 OTHER INFORMATION REQUESTED BY THE CUSTOMER	7
5.7 TEST INSTRUMENTS LIST.....	8
6 TEST RESULTS AND MEASUREMENT DATA	9
6.1 ANTENNA REQUIREMENT:.....	9
6.2 CONDUCTED PEAK OUTPUT POWER.....	10
6.3 20dB OCCUPY BANDWIDTH	16
6.4 CARRIER FREQUENCIES SEPARATION	22
6.5 HOPPING CHANNEL NUMBER.....	29
6.6 DWELL TIME.....	32
6.7 BAND EDGE	35
6.8 PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	37
6.9 RADIATED EMISSION	38
6.9.1 Radiated emission below 1GHz.....	40
6.9.2 Transmitter emission above 1GHz.....	41
6.10 CONDUCTED EMISSION.....	43
7 TEST SETUP PHOTO	46
8 EUT CONSTRUCTIONAL DETAILS	48

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	PASS
Conducted Emission	15.207	PASS
Conducted Peak Output Power	15.247 (b)(1)	PASS
20dB Occupied Bandwidth	15.247 (a)(1)	PASS
Carrier Frequencies Separation	15.247 (a)(1)	PASS
Hopping Channel Number	15.247 (a)(1)	PASS
Dwell Time	15.247 (a)(1)	PASS
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List	PASS
Radiated Emission	15.205/15.209	PASS
RF Exposure Compliance Requirement	15.247(b)(4)& TCB Exclusion List (7 July 2002)	PASS

Remark:

Pass: The EUT complies with the essential requirements in the standard.

5 General Information

5.1 Client Information

Applicant:	VeryKool USA Inc
Address of Applicant:	4350 Executive Dr.#100, San Diego, CA 92121
Manufacturer/Factory:	SHENZHEN KONKA TELECOMMUNICATION TECHNOLOGY CO.,LTD
Address of Manufacturer/Factory :	No.9008 Shennan Road,Overseas Chinese Town, ShenZhen, Guangdong,China

5.2 General Description of E.U.T.

Product Name:	GSM Quad Band GPRS Digital Mobile Phone
Model No.:	i610
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi-4QPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	2dBi
Power supply:	DC 3.7V Li-ion rechargeable Battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz

5.3 E.U.T Operation mode

Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1012 mbar
Test mode:	
Bluetooth mode	Keep the EUT in Bluetooth communicating mode.

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- FCC –Registration No.: 600491
Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, July 20, 2010.
- Industry Canada (IC)
The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-1.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.
Address: 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road Baoan District, Shenzhen, China
Tel: 0755-27798480
Fax: 0755-27798960

5.6 Other Information Requested by the Customer

None.


5.7 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	3m Semi-Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS201	Mar. 30 2011	Mar. 30 2012
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS202	N/A	N/A
3	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	Sept. 10 2010	Sept. 10 2011
4	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS204	Feb. 26 2011	Feb. 26 2012
5	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS205	June 30 2010	June 30 2011
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Coaxial Cable	GTS	N/A	GTS400	Apr. 01 2011	Apr. 01 2012
8	Coaxial Cable	GTS	N/A	GTS401	Apr. 01 2011	Apr. 01 2012
9	Coaxial cable	GTS	N/A	GTS402	Apr. 01 2011	Apr. 01 2012
10	Coaxial Cable	GTS	N/A	GTS407	Apr. 01 2011	Apr. 01 2012
11	Coaxial Cable	GTS	N/A	GTS408	Apr. 01 2011	Apr. 01 2012
12	Amplifier(10KHz-5GHz)	Sonnoma Instrument	305-1052	GTS210	Apr. 01 2011	Apr. 01 2012
13	Amplifier(2GHz-20GHz)	HP	8349B	GTS231	Apr. 01 2011	Apr. 01 2012
14	Universal radio communication tester	Rohde & Schwarz	CMU200	GTS235	May 11 2010	May 11 2011
15	Signal Generator	Rohde & Schwarz	SML03	GTS236	May 11 2010	May 11 2011
16	Temp. Humidity/Barometer	Oregon Scientific	BA-888	GTS248	May 11 2010	May 11 2011
17	D.C. Power Supply	Instek	PS-3030	GTS232	NA	NA
18	Splitter	Agilent	11636B	GTS237	May 11 2010	May 11 2011


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (dd-mm-yy)	Cal.Due date (dd-mm-yy)
1	Shielding Room	ZhongYu Electron	7.0(L)x3.0(W)x3.0(H)	GTS206	Apr. 10 2011	Apr. 10 2012
2	EMI Test Receiver	Rohde & Schwarz	ESCS30	GTS208	Sept. 14 2010	Sept. 14 2011
3	10dB Pulse Limita	Rohde & Schwarz	N/A	GTS209	Sept. 14 2010	Sept. 14 2011
4	LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	GTS207	Apr. 14 2010	Apr. 14 2011
5	Coaxial Cable	GTS	N/A	GTS406	Apr. 01 2011	Apr. 01 2012
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A

6 Test results and Measurement Data

6.1 Antenna requirement:

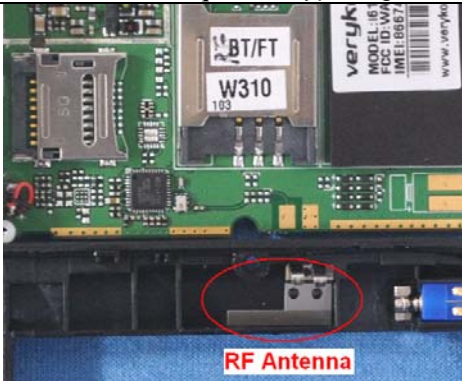Standard requirement:	FCC Part15 C Section 15.203 /247(c)
<p><i>15.203 requirement:</i> <i>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</i></p> <p><i>15.247(c) (1)(i) requirement:</i> <i>(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</i></p>	
E.U.T Antenna:	
The antenna is unique, the typical gain of the antenna is 2dBi.	
	


6.2 Conducted Peak Output Power

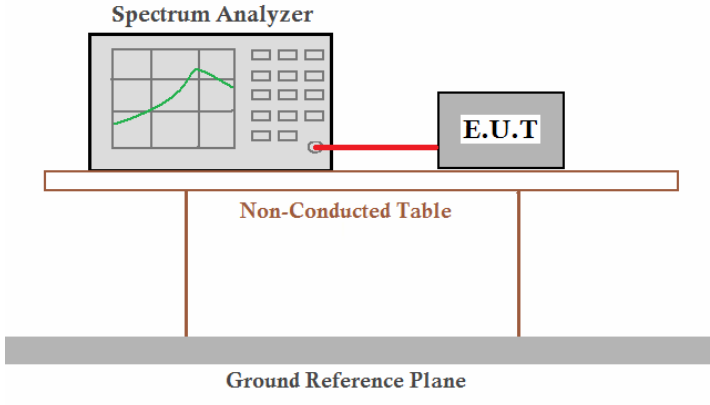Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=1MHz, VBW=1MHz, Detector=Peak
Limit:	21dBm
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data

GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	3.11	21.00	Pass
Middle	3.64	21.00	Pass
Highest	2.11	21.00	Pass
Pi/4QPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.13	21.00	Pass
Middle	2.62	21.00	Pass
Highest	0.84	21.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	2.23	21.00	Pass
Middle	2.75	21.00	Pass
Highest	1.05	21.00	Pass


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

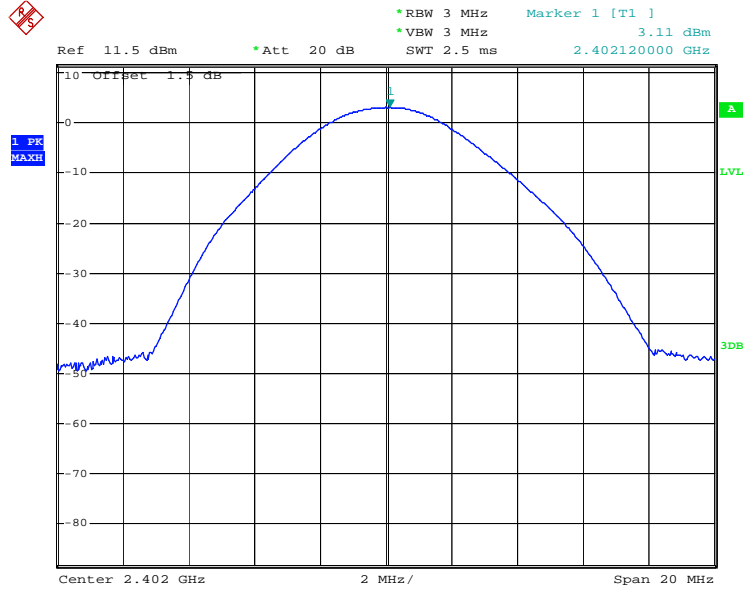


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

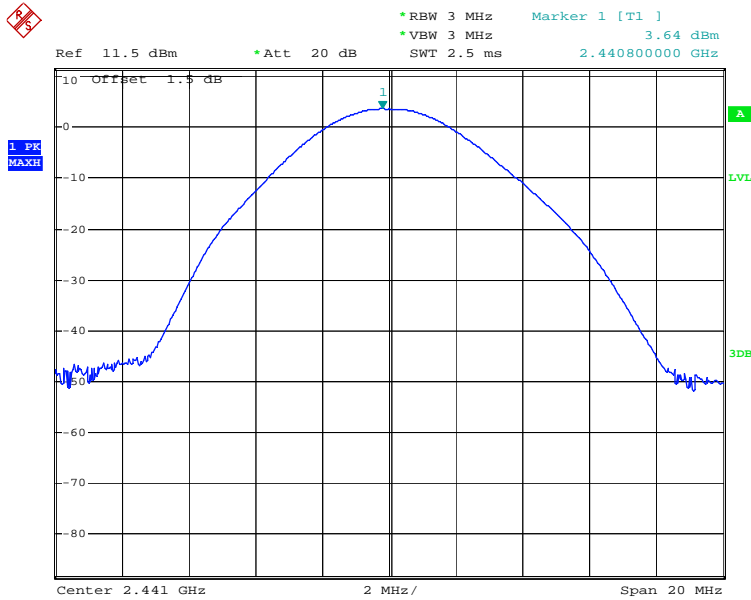


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

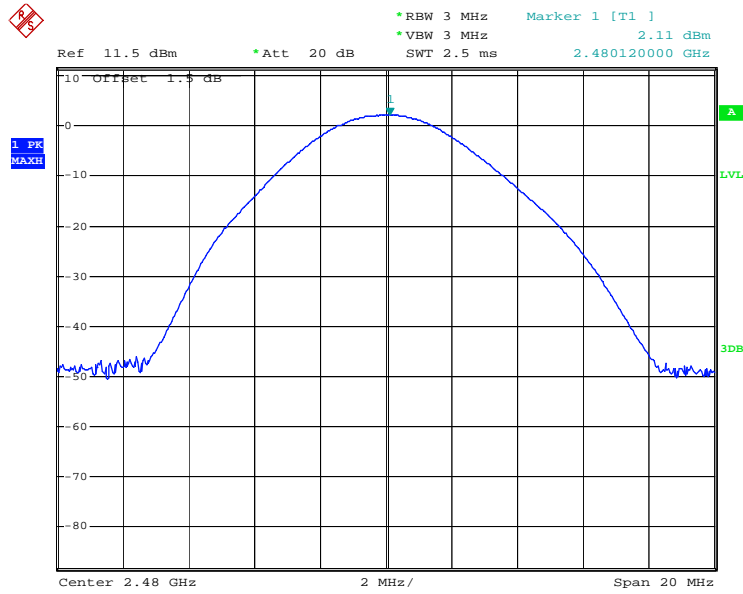


Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

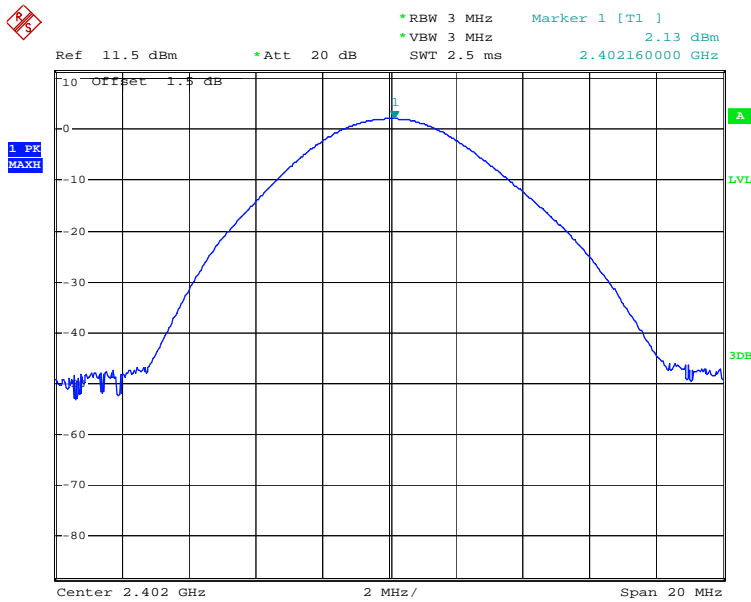


Test mode:	Pi/4QPSK	Test channel:	Middle
------------	----------	---------------	--------

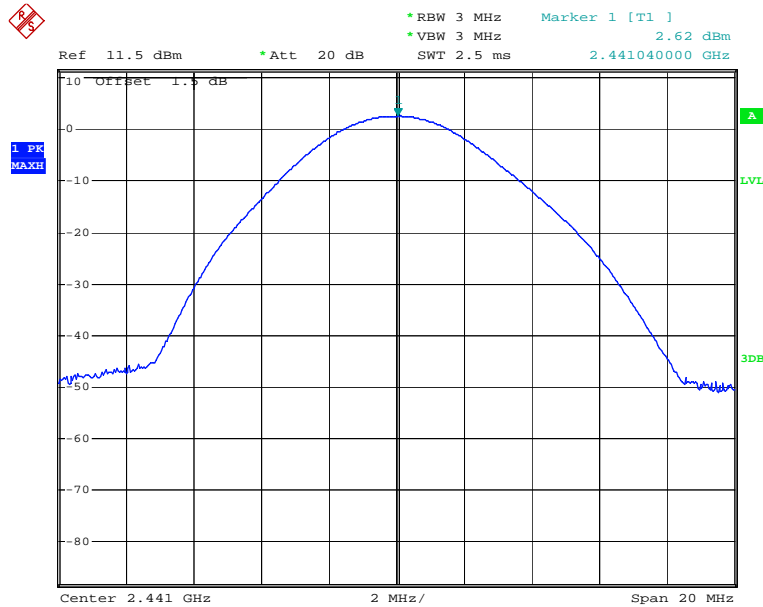

Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

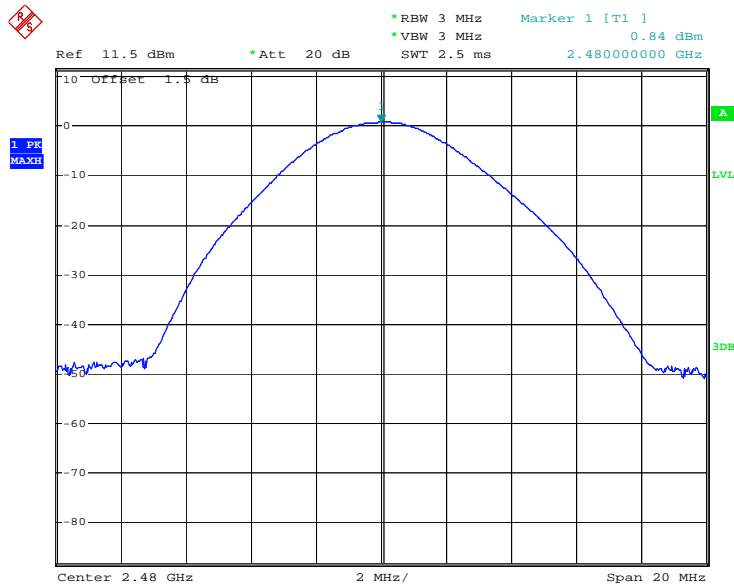


6.3 20dB Occupy Bandwidth

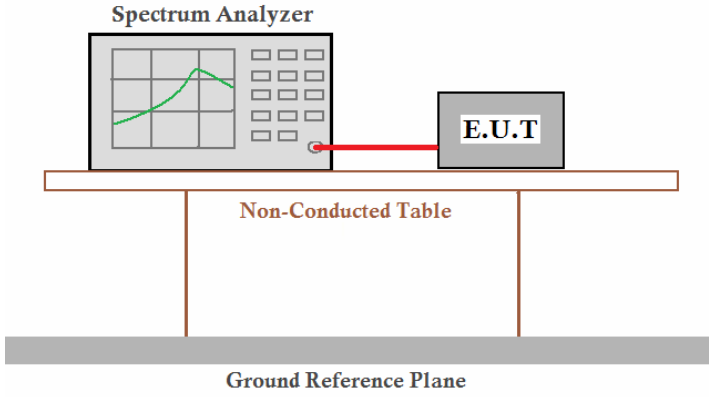Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=30KHz, VBW=100KHz,detector=Peak
Limit:	NA
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data			
Test channel	20dB Occupy Bandwidth (KHz)		
	GFSK	Pi/4QPSK	8DPSK
Lowest	796	1204	1208
Middle	796	1208	1204
Highest	792	1204	1204

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

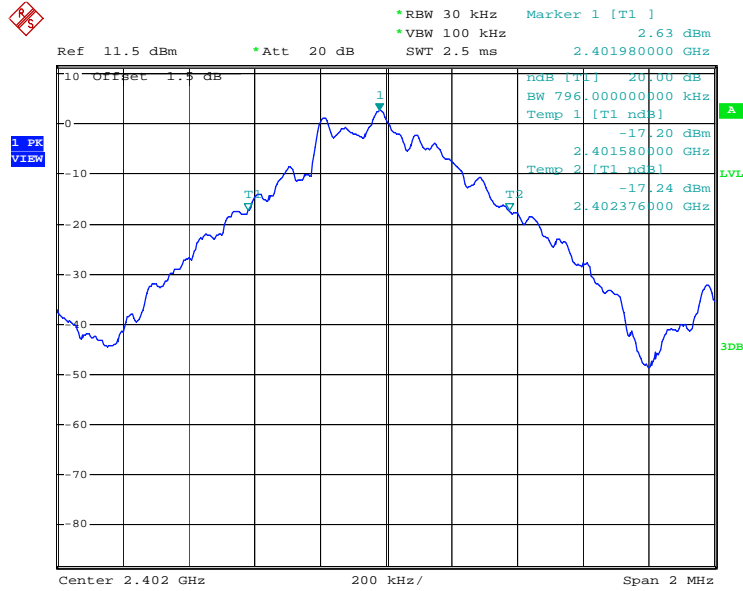


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

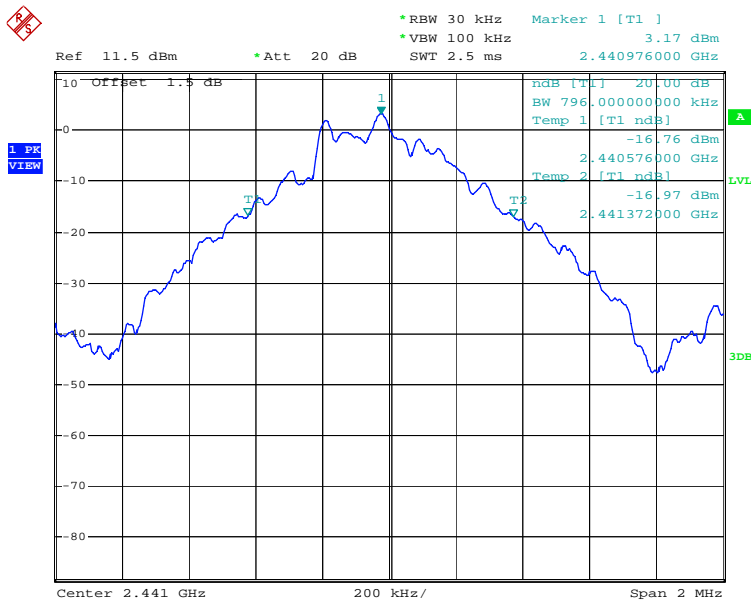


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

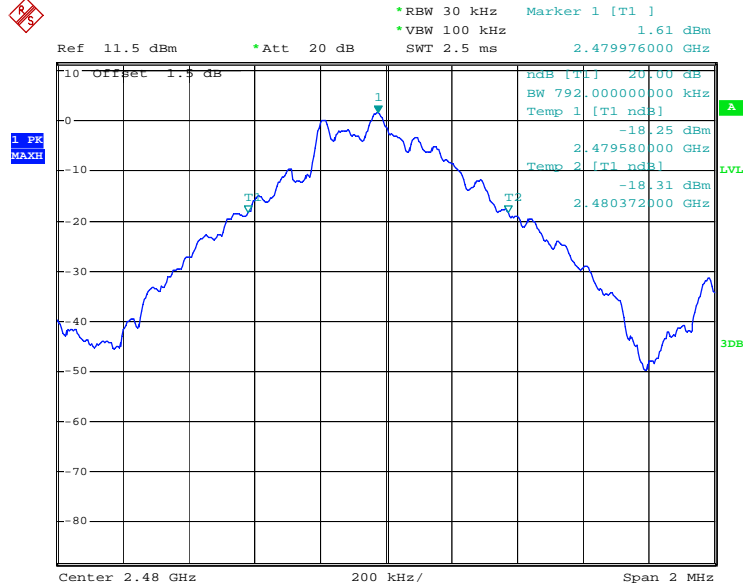


Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

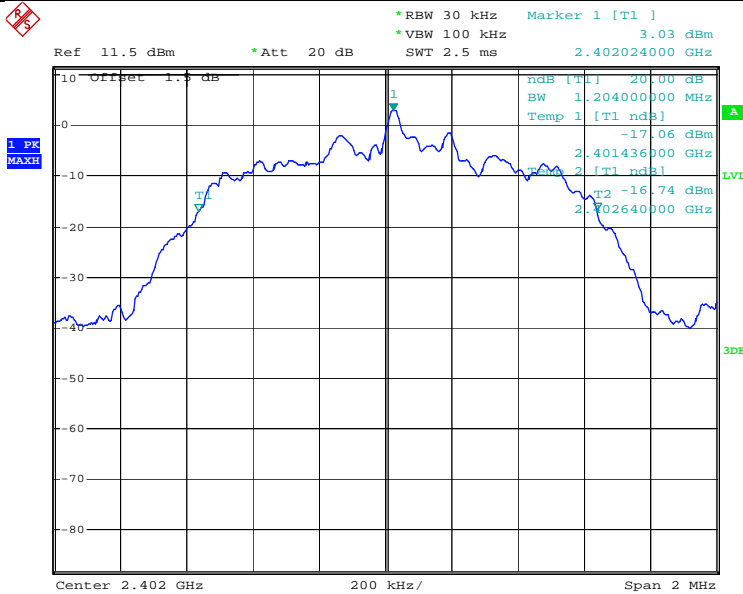


Test mode:	Pi/4QPSK	Test channel:	Middle
------------	----------	---------------	--------

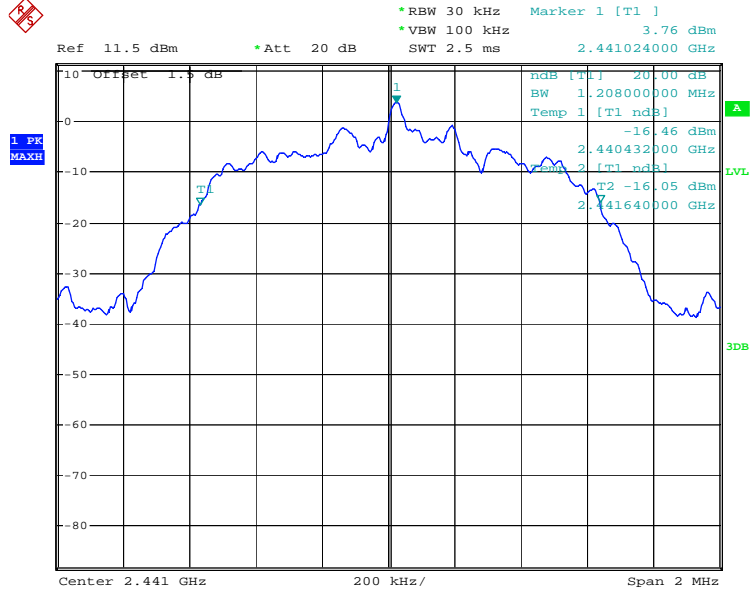


Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

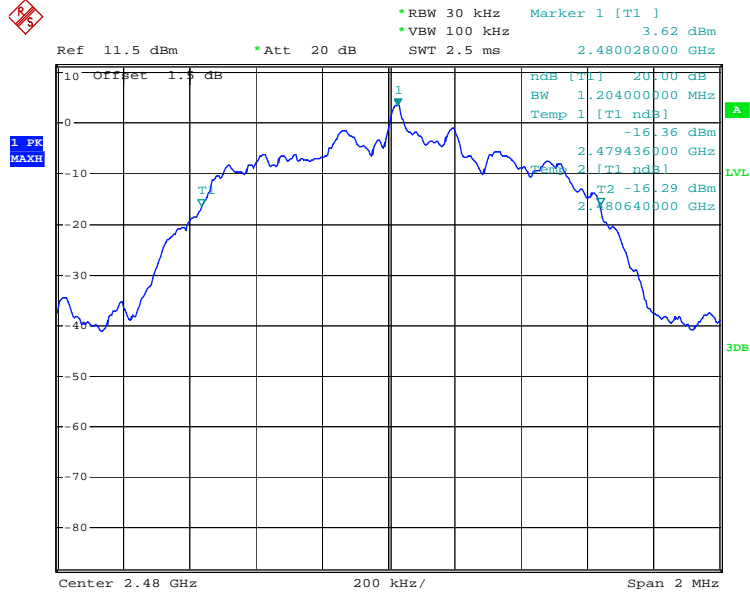


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

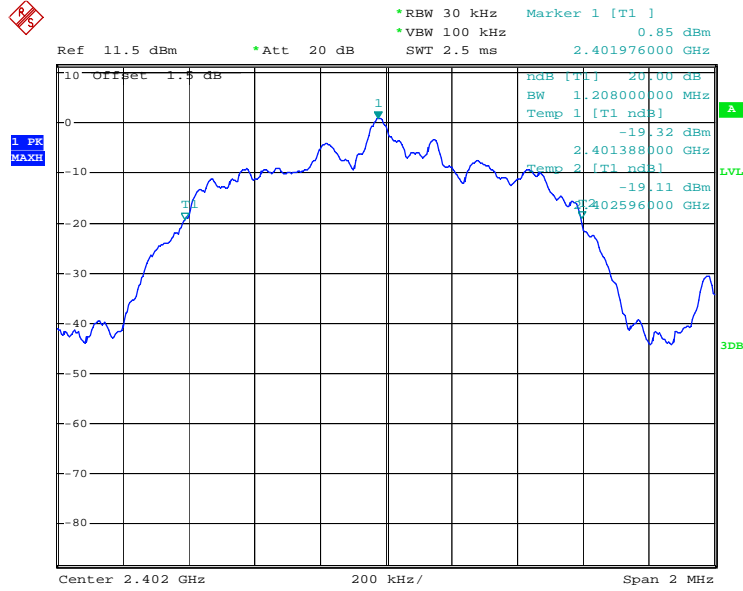


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

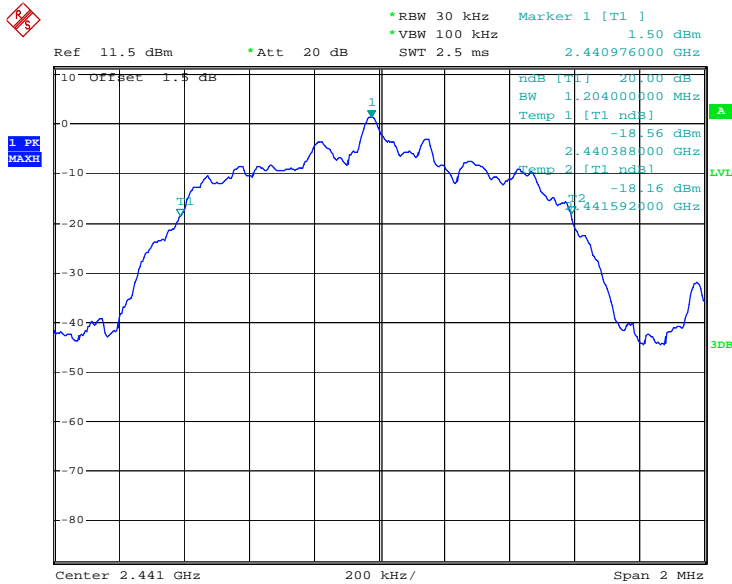

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

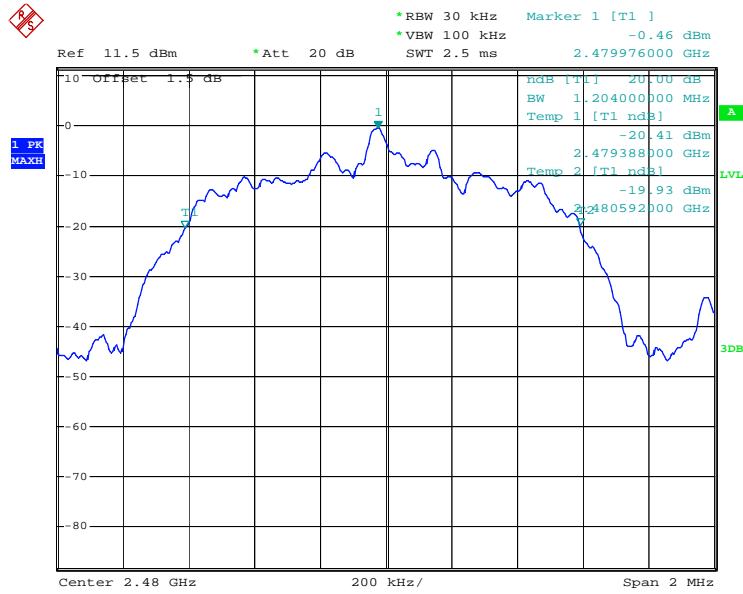

6.4 Carrier Frequencies Separation

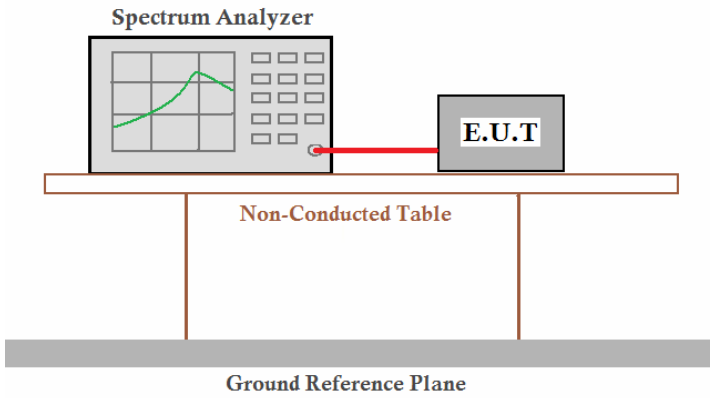Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak
Limit:	0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data			
GFSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1000	528	Pass
Middle	1004	528	Pass
Highest	1000	528	Pass
Pi/4QPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1004	805.3	Pass
Middle	1000	805.3	Pass
Highest	1004	805.3	Pass
8DPSK mode			
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result
Lowest	1004	805.3	Pass
Middle	1008	805.3	Pass
Highest	1004	805.3	Pass

Note: According to section 6.3,


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	792	528
PI/4QPSK	1208	805.3
8DPSK	1208	805.3

Test plot as follows:


Test mode:	GFSK	Test channel:	Lowest
------------	------	---------------	--------

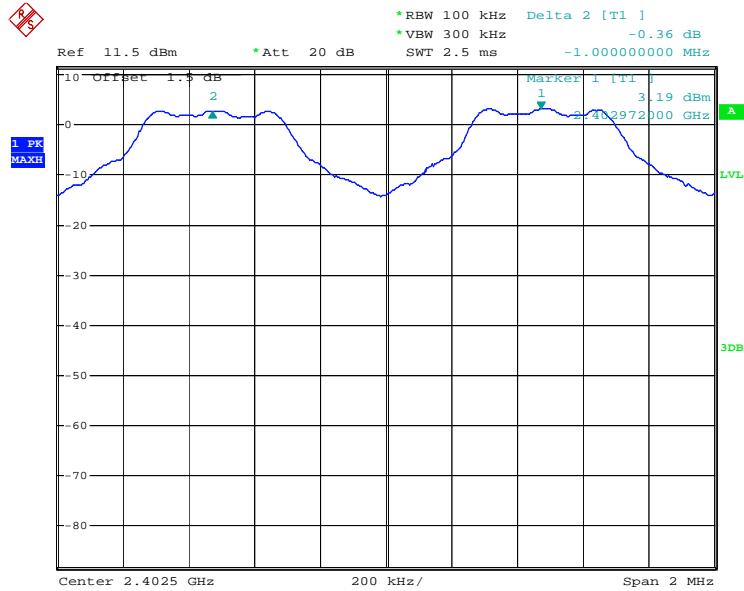


Test mode:	GFSK	Test channel:	Middle
------------	------	---------------	--------

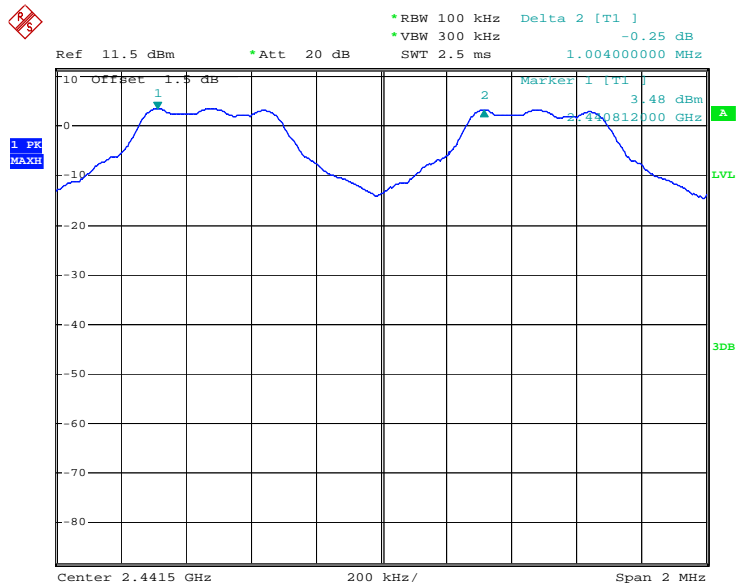


Test mode:	GFSK	Test channel:	Highest
------------	------	---------------	---------

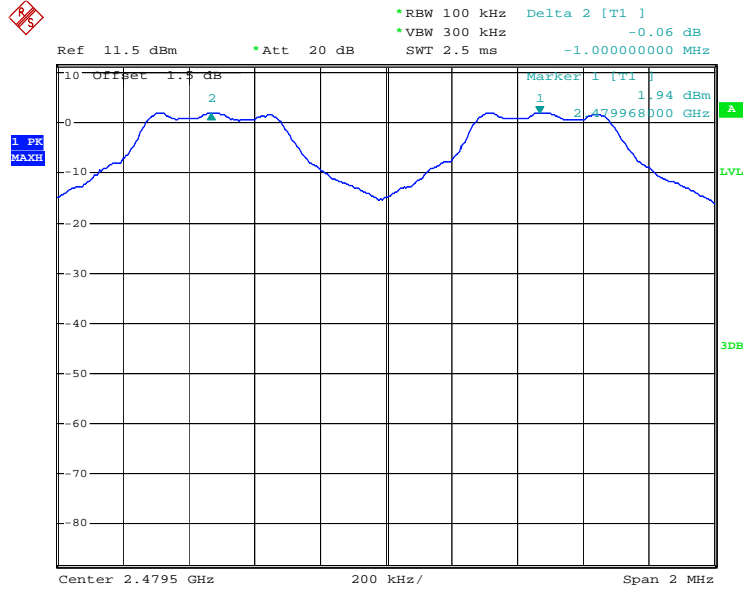


Test mode:	Pi/4QPSK	Test channel:	Lowest
------------	----------	---------------	--------

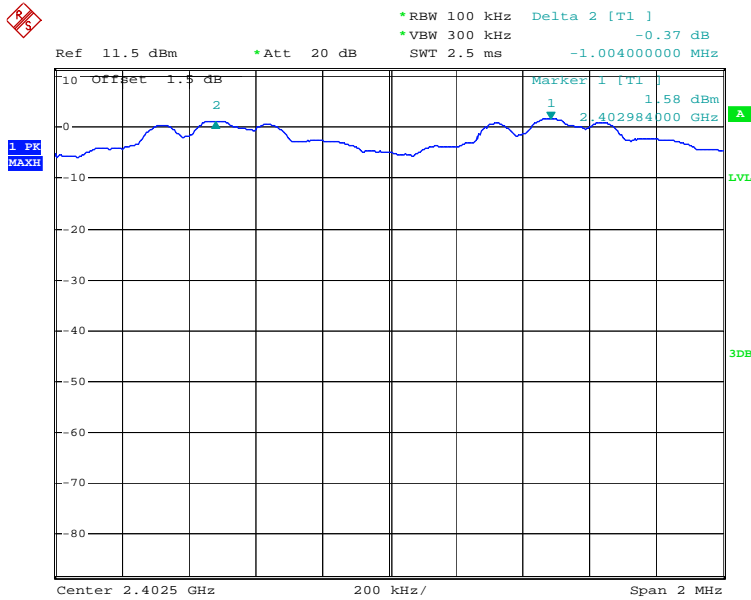


Test mode:	Pi/4QPSK	Test channel:	Middle
------------	----------	---------------	--------

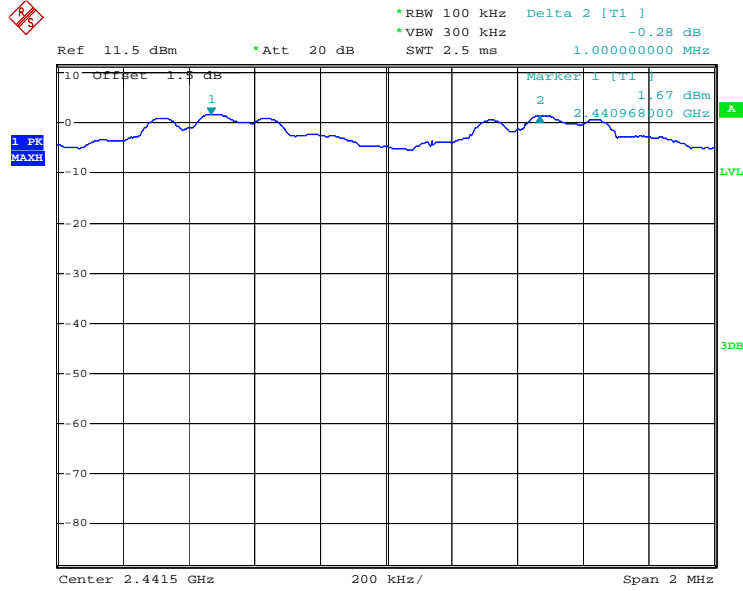


Test mode:	Pi/4QPSK	Test channel:	Highest
------------	----------	---------------	---------

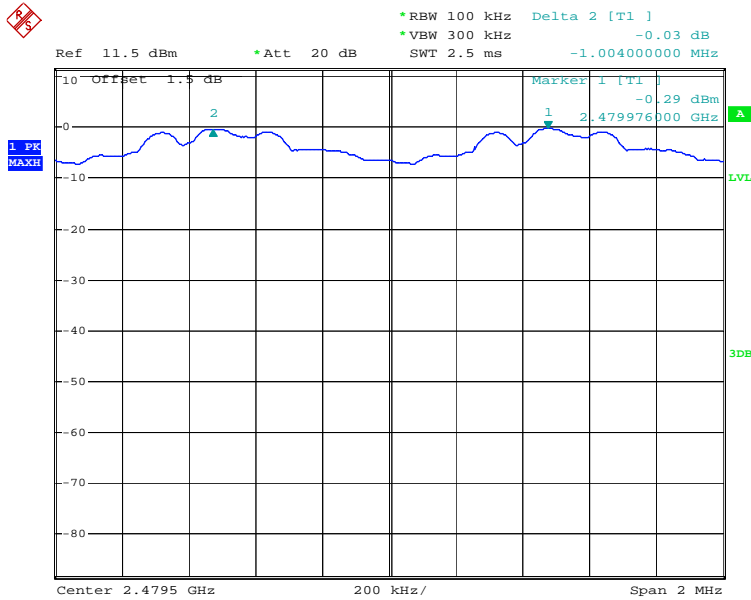


Test mode:	8DPSK	Test channel:	Lowest
------------	-------	---------------	--------

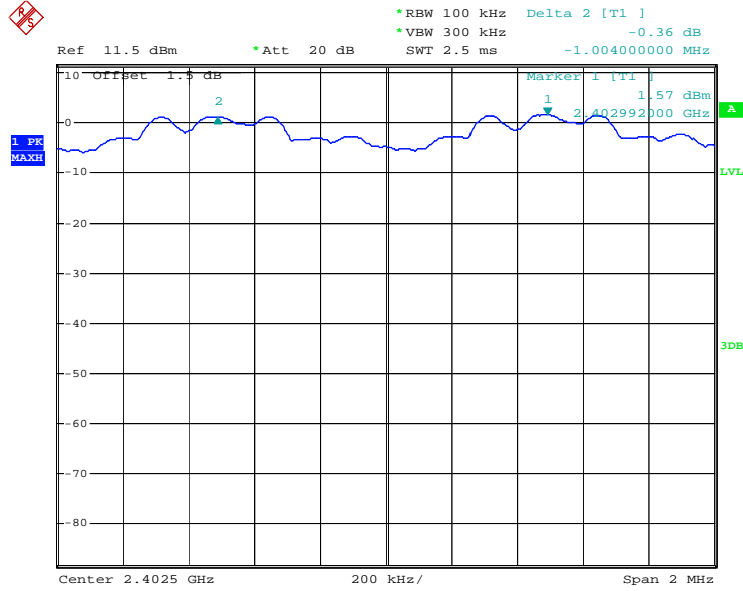


Test mode:	8DPSK	Test channel:	Middle
------------	-------	---------------	--------

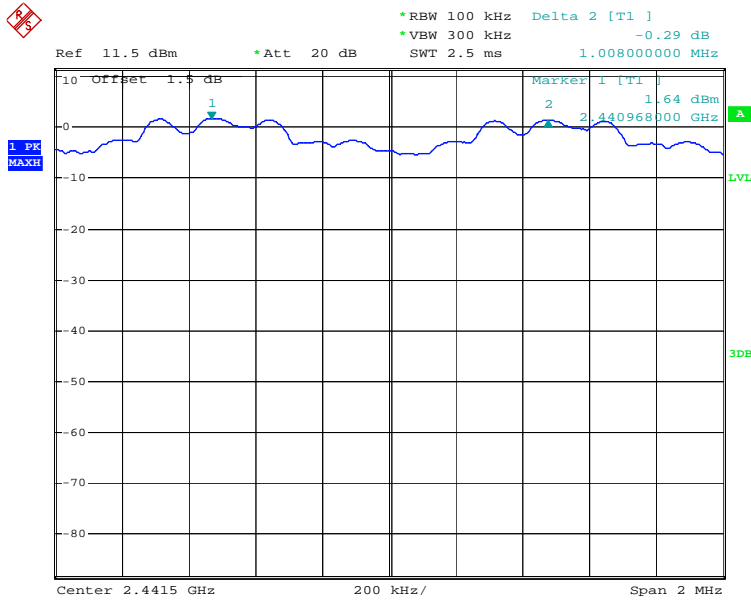

Test mode:	8DPSK	Test channel:	Highest
------------	-------	---------------	---------

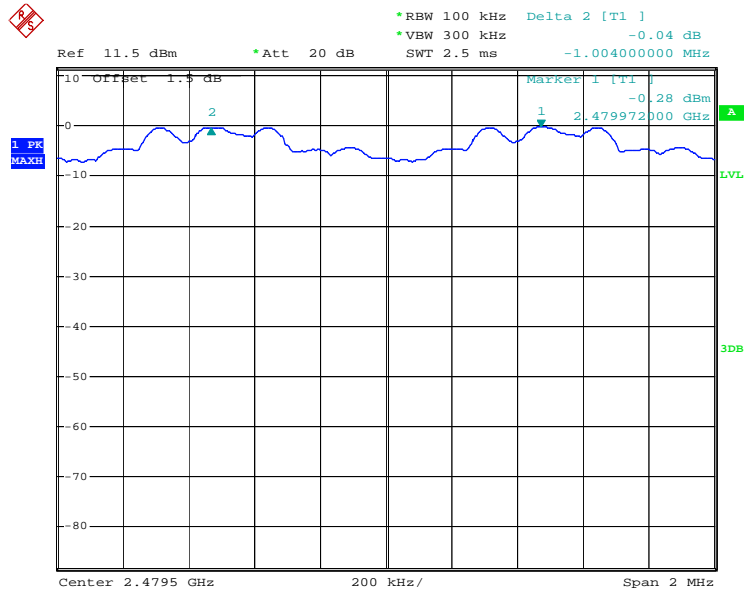


6.5 Hopping Channel Number

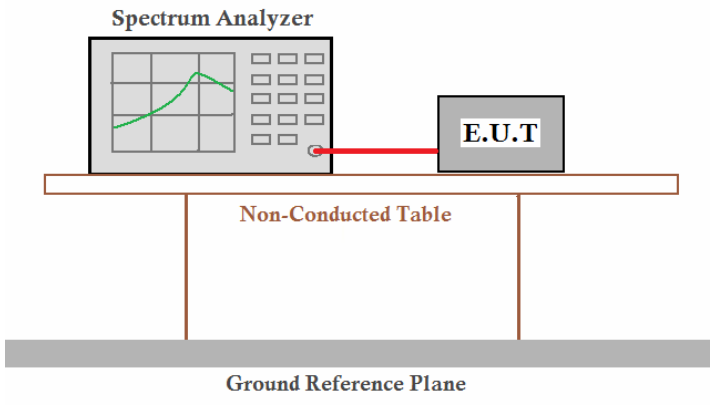Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=100KHz, VBW=300KHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak
Limit:	15channels
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Measurement Data		
Mode	Hopping channel numbers	Limit
GFSK	79	15
Pi/4QPSK	79	15
8DPSK	79	15

Test plot as follows


Test mode:	GFSK	
------------	------	--

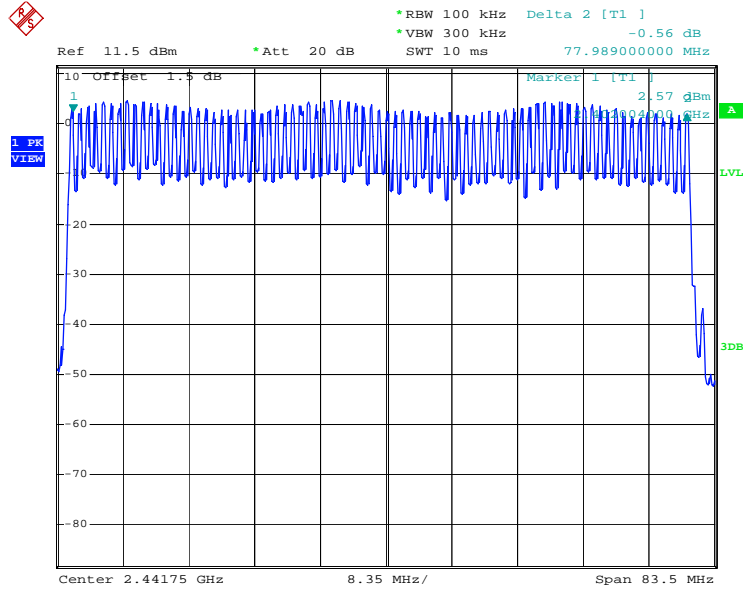


Test mode:	Pi/4QPSK	
------------	----------	--

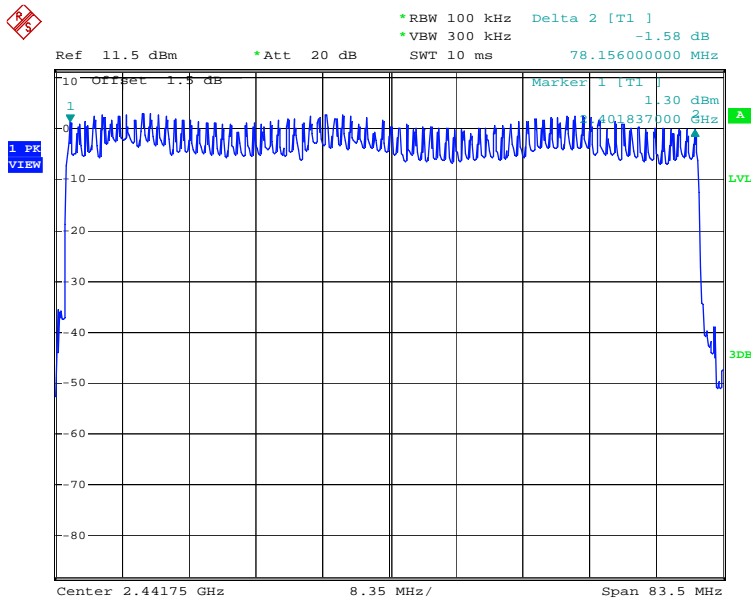

Test mode:	8DPSK	
------------	-------	--

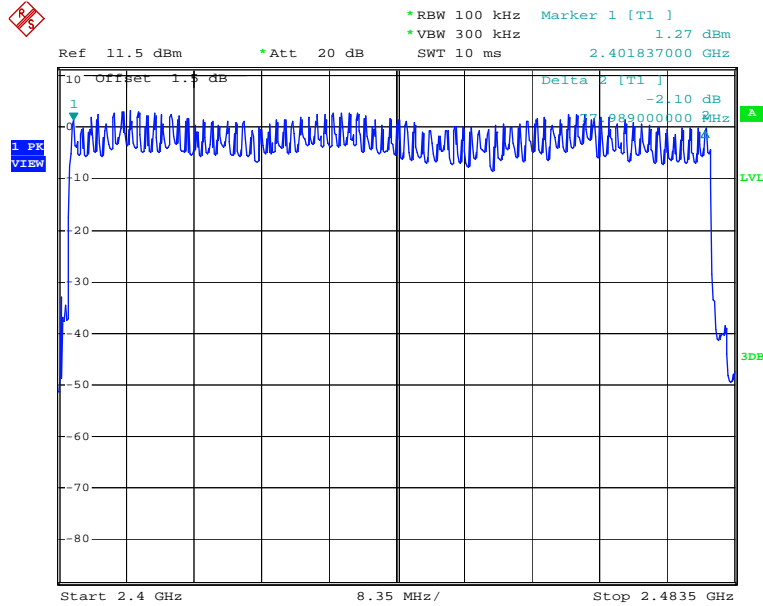

6.6 Dwell Time

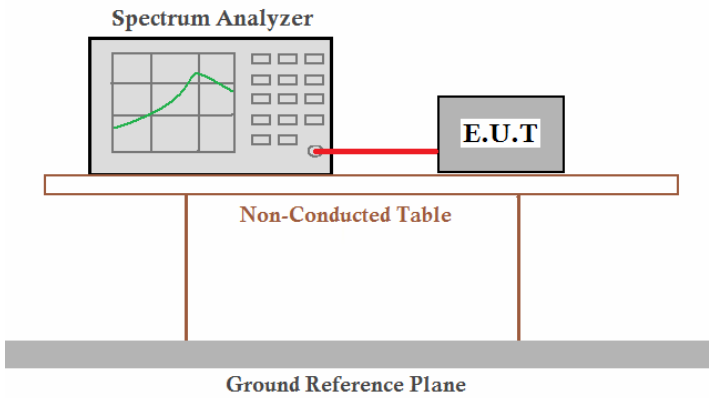Test Requirement:	FCC Part15 C Section 15.247 (a)(1)
Test Method:	ANSI C63.4:2003 and KDB DA00-705
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak
Limit:	0.4 Second
Test setup:	
Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Measurement Data			
Mode	Packet	Dwell time (second)	Limit (second)
GFSK Pi/4QPSK 8DPSK	DH1	0.168	0.4
	DH3	0.285	0.4
	DH5	0.324	0.4

Dwell time


DH1: Dwell time = Pulse time*(1600/2/79)*31.6S;

DH3: Dwell time = Pulse time*(1600/4/79)*31.6S;


DH5: Dwell time = Pulse time*(1600/6/79)*31.6S;

Test plot as follows


Test mode:	GFSK/ Pi/4QPSK / 8DPSK	Test Packet:	DH1
------------	------------------------	--------------	-----

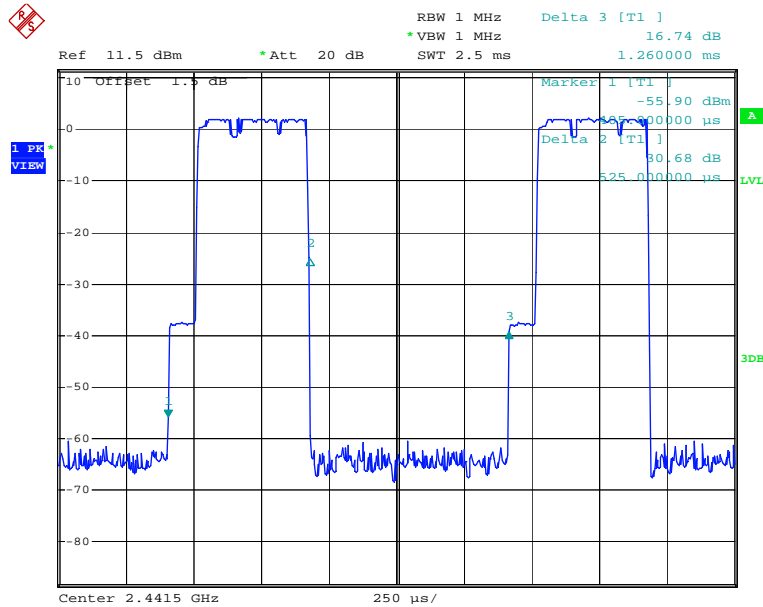


Test mode:	GFSK/ Pi/4QPSK / 8DPSK	Test Packet:	DH3
------------	------------------------	--------------	-----

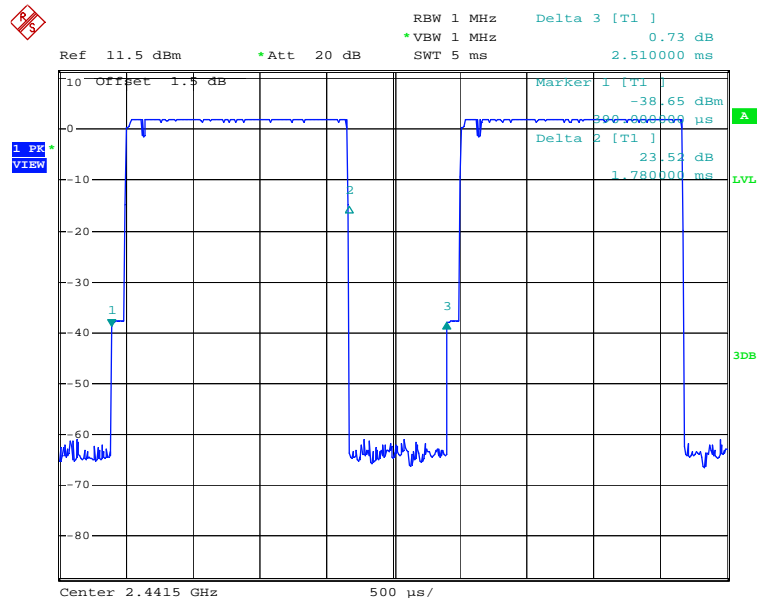

Test mode:	GFSK/ Pi/4QPSK / 8DPSK	Test Packet:	DH5
------------	------------------------	--------------	-----

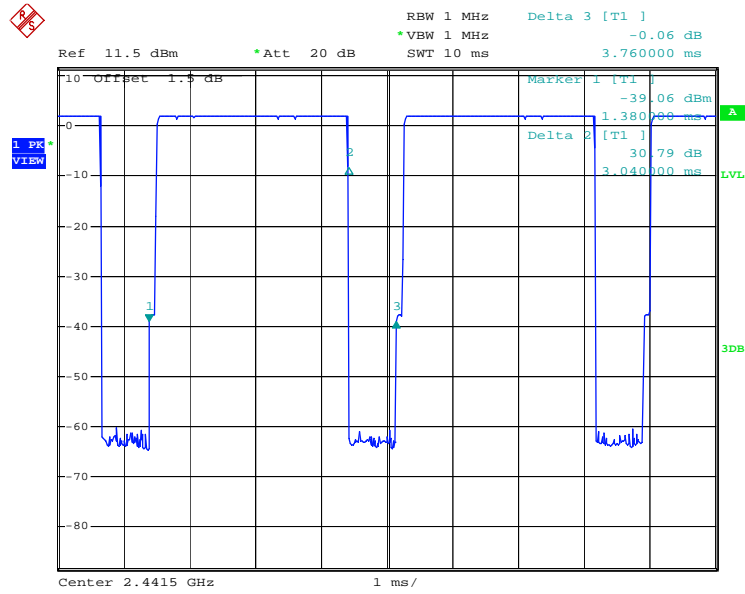

6.7 Band Edge

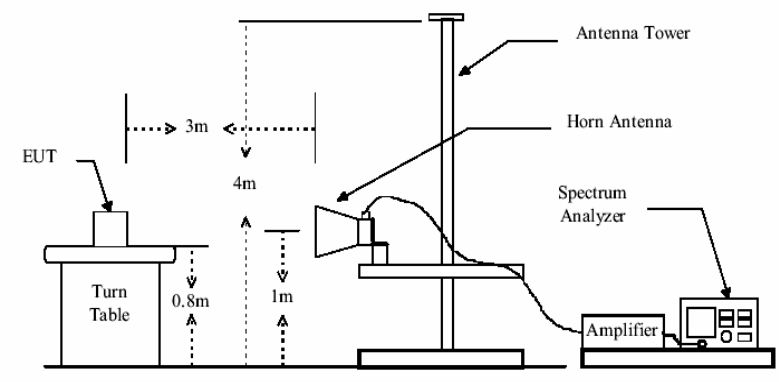Test Requirement:	FCC Part15 C Section 15.209 and 15.205														
Test Method:	ANSI C63.4: 2003														
Test Frequency Range:	2400MHz to 2483.5MHz														
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)														
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value
Frequency	Detector	RBW	VBW	Remark											
Above 1GHz	Peak	1MHz	3MHz	Peak Value											
	Peak	1MHz	10Hz	Average Value											
Limit:	<table border="1"> <thead> <tr> <th>Above 1GHz</th> <th>Value</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td></td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td></td> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Above 1GHz	Value	Remark		54.0	Average Value		74.0	Peak Value					
Above 1GHz	Value	Remark													
	54.0	Average Value													
	74.0	Peak Value													
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report. 														
Test setup:															


Test Instruments:	Refer to section 5.7 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed

Remark:


During test the item, Pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

Test plot as follows:



Worse case mode:	GFSK	Test channel:	Lowest
------------------	------	---------------	--------

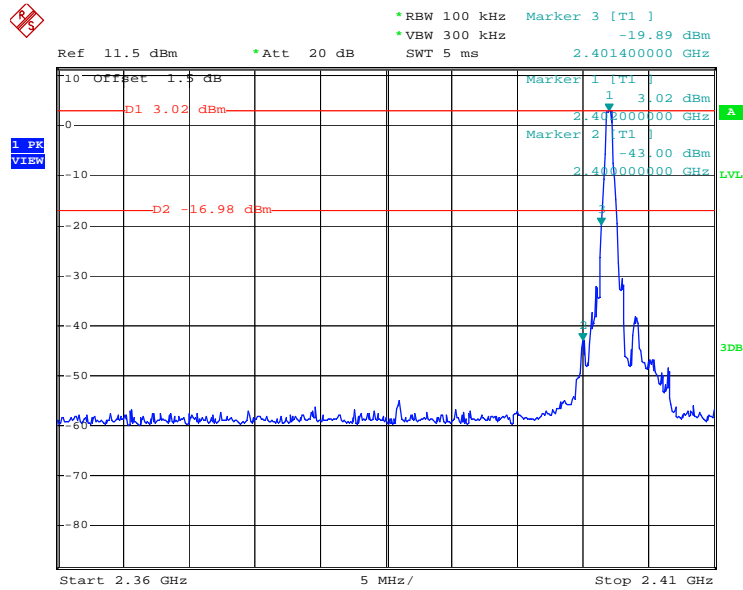

Worse case mode:	GFSK	Test channel:	Highest
------------------	------	---------------	---------


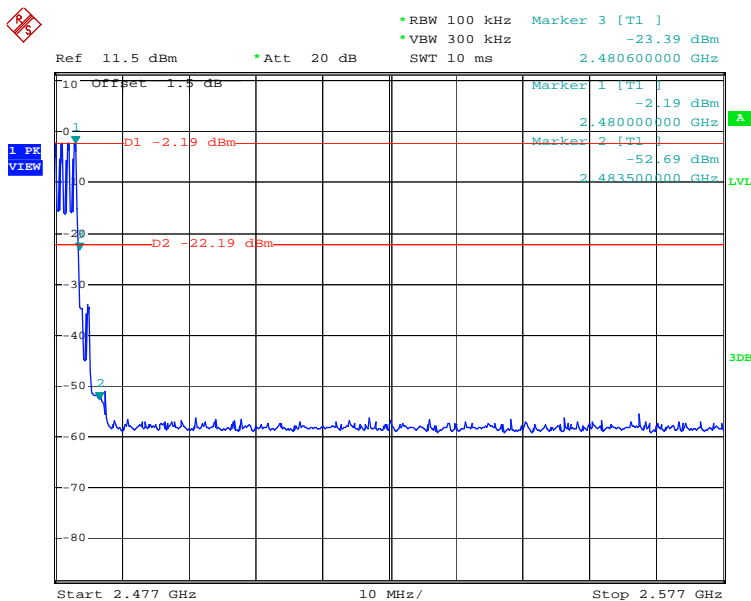


6.8 Pseudorandom Frequency Hopping Sequence

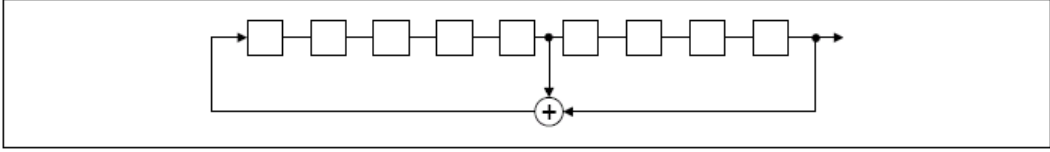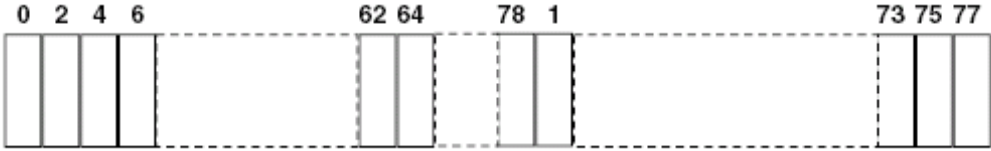Test Requirement:	FCC Part15 C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 	
	
<p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	

6.9 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205																							
Test Method:	ANSI C63.4: 2003																							
Test Frequency Range:	30MHz to 25GHz																							
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)																							
Receiver setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>100KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>				Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value	
	Frequency	Detector	RBW	VBW	Remark																			
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value																			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value																			
Peak		1MHz	10Hz	Average Value																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>				Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
	Frequency	Limit (dBuV/m @3m)	Remark																					
	30MHz-88MHz	40.0	Quasi-peak Value																					
	88MHz-216MHz	43.5	Quasi-peak Value																					
	216MHz-960MHz	46.0	Quasi-peak Value																					
	960MHz-1GHz	54.0	Quasi-peak Value																					
Above 1GHz	54.0	Average Value																						
	74.0	Peak Value																						
Test Procedure:	a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.																							
	b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.																							
	c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.																							
	d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.																							
	e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.																							
	f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.																							
	g. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.																							
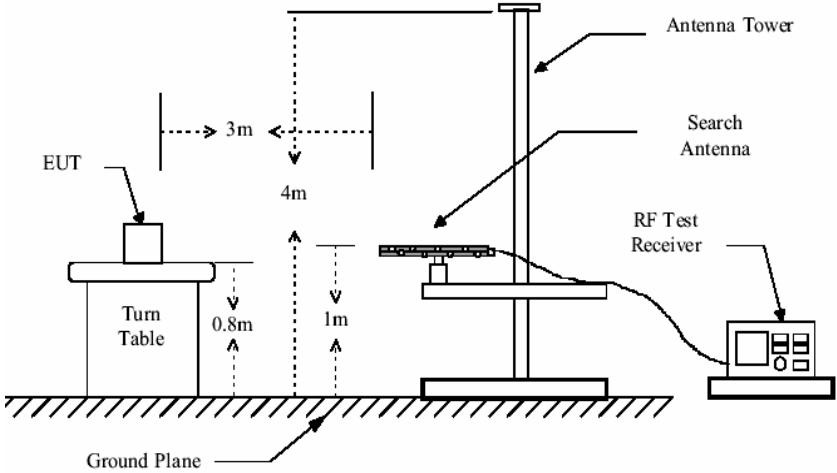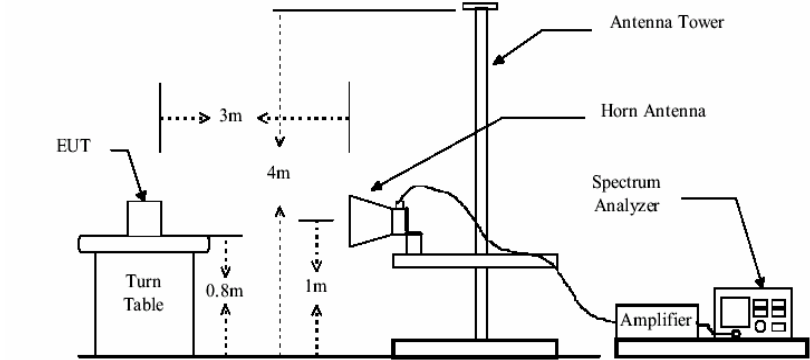
<p>Test setup:</p>	<p>Below 1GHz</p>  <p>Above 1GHz</p> 
<p>Test Instruments:</p>	<p>Refer to section 5.7 for details</p>
<p>Test mode:</p>	<p>Refer to section 5.3 for details</p>
<p>Test results:</p>	<p>Passed</p>

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

$$\text{Final Test Level} = \text{Receiver Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Preamplifier Factor}$$

6.9.1 Radiated emission below 1GHz

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
57.84	0.69	12.61	25.71	37.18	24.77	40.00	-15.23	Vertical
97.79	0.96	12.14	25.68	38.57	25.99	40.00	-14.01	Vertical
146.92	1.50	10.06	25.64	41.54	27.46	43.50	-16.04	Vertical
172.79	1.64	13.36	25.63	38.85	28.22	43.50	-15.28	Vertical
309.83	2.09	16.66	25.59	36.32	29.48	46.00	-16.52	Vertical
334.20	2.11	16.86	25.58	37.68	31.07	46.00	-14.93	Vertical
56.99	0.69	10.55	25.71	40.77	26.30	40.00	-13.70	Horizontal
126.45	1.35	11.41	25.65	39.46	26.57	43.50	-16.93	Horizontal
148.92	1.50	10.20	25.64	38.07	24.13	43.50	-19.37	Horizontal
172.79	1.64	10.58	25.63	40.54	27.13	43.50	-16.37	Horizontal
194.77	1.74	11.28	25.62	39.64	27.04	43.50	-16.46	Horizontal
559.73	2.58	21.34	25.54	36.52	34.90	46.00	-11.10	Horizontal

6.9.2 Transmitter emission above 1GHz

Worse case mode:	GFSK	Test channel:	Lowest	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2394.25	6.34	30.03	38.87	45.36	42.86	74.00	-31.14	Vertical
2400.00	6.34	30.03	38.87	45.29	42.79	74.00	-31.21	Vertical
4804.00	9.36	34.25	41.53	43.45	45.53	74.00	-28.47	Vertical
7206.00	13.38	37.23	40.98	46.15	55.78	74.00	-18.22	Vertical
9608.00	13.39	37.99	37.56	41.62	55.44	74.00	-18.56	Vertical
2394.25	6.34	30.03	38.87	45.61	43.11	74.00	-30.89	Horizontal
2400.00	6.34	30.03	38.87	45.56	43.06	74.00	-30.94	Horizontal
4804.00	9.36	34.25	41.53	44.06	46.14	74.00	-27.86	Horizontal
7206.00	13.38	37.23	40.98	45.66	55.29	74.00	-18.71	Horizontal
9608.00	13.39	37.99	37.56	41.69	55.51	74.00	-18.49	Horizontal

Worse case mode:	GFSK	Test channel:	Lowest	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2398.25	6.34	30.03	38.87	32.84	30.34	54.00	-23.66	Vertical
2400.00	6.34	30.03	38.87	32.88	30.38	54.00	-23.62	Vertical
4804.00	9.36	34.25	41.53	32.54	34.62	54.00	-19.38	Vertical
7206.00	13.38	37.23	40.98	33.14	42.77	54.00	-11.23	Vertical
9608.00	13.39	37.99	37.56	29.35	43.17	54.00	-10.83	Vertical
2398.25	6.34	30.03	38.87	32.85	30.35	54.00	-23.65	Horizontal
2400.00	6.34	30.03	38.87	32.88	30.38	54.00	-23.62	Horizontal
4804.00	9.36	34.25	41.53	32.57	34.65	54.00	-19.35	Horizontal
7206.00	13.38	37.23	40.98	33.12	42.75	54.00	-11.25	Horizontal
9608.00	13.39	37.99	37.56	29.33	43.15	54.00	-10.85	Horizontal

Worse case mode:	GFSK	Test channel:	Middle	Remark:	Peak
------------------	------	---------------	--------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2400.00	6.34	30.03	38.87	44.73	42.23	74.00	-31.77	Vertical
2483.50	6.22	30.32	39.53	49.93	46.94	74.00	-27.06	Vertical
4882.00	10.57	34.35	40.33	45.83	50.42	74.00	-23.58	Vertical
7323.00	12.91	37.31	40.40	47.53	57.35	74.00	-16.65	Vertical
9764.00	13.89	38.03	37.94	41.71	55.69	74.00	-18.31	Vertical
2400.00	6.34	30.03	38.87	45.35	42.85	74.00	-31.15	Horizontal
2483.50	6.22	30.32	39.53	48.28	45.29	74.00	-28.71	Horizontal
4882.00	10.57	34.35	40.33	43.80	48.39	74.00	-25.61	Horizontal
7323.00	12.91	37.31	40.40	46.79	56.61	74.00	-17.39	Horizontal
9764.00	13.89	38.03	37.94	41.61	55.59	74.00	-18.41	Horizontal

Worse case mode:	GFSK	Test channel:	Middle	Remark:	Average
------------------	------	---------------	--------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2400.00	6.34	30.03	38.87	32.61	30.11	54.00	-23.89	Vertical
2483.50	6.22	30.32	39.53	32.63	29.64	54.00	-24.36	Vertical
4882.00	10.57	34.35	40.33	31.88	36.47	54.00	-17.53	Vertical
7323.00	12.91	37.31	40.40	33.10	42.92	54.00	-11.08	Vertical
9764.00	13.89	38.03	37.94	29.24	43.22	54.00	-10.78	Vertical
2400.00	6.34	30.03	38.87	32.55	30.05	54.00	-23.95	Horizontal
2483.50	6.22	30.32	39.53	32.60	29.61	54.00	-24.39	Horizontal
4882.00	10.57	34.35	40.33	31.89	36.48	54.00	-17.52	Horizontal
7323.00	12.91	37.31	40.40	33.10	42.92	54.00	-11.08	Horizontal
9764.00	13.89	38.03	37.94	29.21	43.19	54.00	-10.81	Horizontal


Worse case mode:	GFSK	Test channel:	Highest	Remark:	Peak
------------------	------	---------------	---------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.50	6.22	30.32	39.53	54.09	51.10	74.00	-22.90	Vertical
2500.00	5.76	30.37	39.15	45.47	42.45	74.00	-31.55	Vertical
4960.00	10.43	34.45	41.03	45.43	49.28	74.00	-24.72	Vertical
7440.00	12.72	37.37	40.01	47.00	57.08	74.00	-16.92	Vertical
9920.00	14.24	38.08	37.78	41.65	56.19	74.00	-17.81	Vertical
2483.50	6.22	30.32	39.53	46.91	43.92	74.00	-30.08	Horizontal
2500.00	5.76	30.37	39.15	46.71	43.69	74.00	-30.31	Horizontal
4960.00	10.43	34.45	41.03	44.50	48.35	74.00	-25.65	Horizontal
7440.00	12.72	37.37	40.01	46.17	56.25	74.00	-17.75	Horizontal
9920.00	14.24	38.08	37.78	41.09	55.63	74.00	-18.37	Horizontal

Worse case mode:	GFSK	Test channel:	Highest	Remark:	Average
------------------	------	---------------	---------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
2483.50	6.22	30.32	39.53	32.72	29.73	54.00	-24.27	Vertical
2500.00	5.76	30.37	39.15	32.77	29.75	54.00	-24.25	Vertical
4960.00	10.43	34.45	41.03	32.04	35.89	54.00	-18.11	Vertical
7440.00	12.72	37.37	40.01	33.22	43.30	54.00	-10.70	Vertical
9920.00	14.24	38.08	37.78	28.54	43.08	54.00	-10.92	Vertical
2483.50	6.22	30.32	39.53	32.68	29.69	54.00	-24.31	Horizontal
2500.00	5.76	30.37	39.15	32.74	29.72	54.00	-24.28	Horizontal
4960.00	10.43	34.45	41.03	32.99	36.84	54.00	-17.16	Horizontal
7440.00	12.72	37.37	40.01	33.23	43.31	54.00	-10.69	Horizontal
9920.00	14.24	38.08	37.78	28.55	43.09	54.00	-10.91	Horizontal


6.10 Conducted Emission

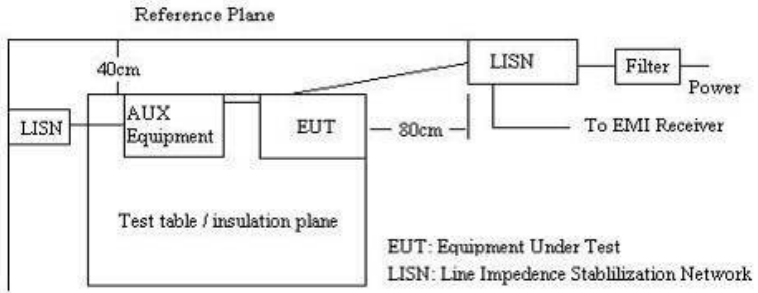Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.4: 2003														
Test Frequency Range:	150kHz to 30MHz														
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency</th> <th colspan="2">Limits dB(uV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15MHz-0.50MHz</td> <td>66-56</td> <td>56-46</td> </tr> <tr> <td>0.50MHz-5MHz</td> <td>56</td> <td>46</td> </tr> <tr> <td>5MHz-30MHz</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency	Limits dB(uV)		Quasi-peak	Average	0.15MHz-0.50MHz	66-56	56-46	0.50MHz-5MHz	56	46	5MHz-30MHz	60	50
Frequency	Limits dB(uV)														
	Quasi-peak	Average													
0.15MHz-0.50MHz	66-56	56-46													
0.50MHz-5MHz	56	46													
5MHz-30MHz	60	50													
Test Procedure:	<p>a. The EUT was placed on a table which is 0.8m above ground plane.</p> <p>b. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.</p> <p>c. Repeat above procedures until all frequency measured were complete.</p>														
Test setup:															
Test Instruments:	Refer to section 5.7 for details														
Test mode:	Refer to section 5.3 for details														
Test results:	Passed														

Measurement Result:

Test mode: Bluetooth mode


Line:

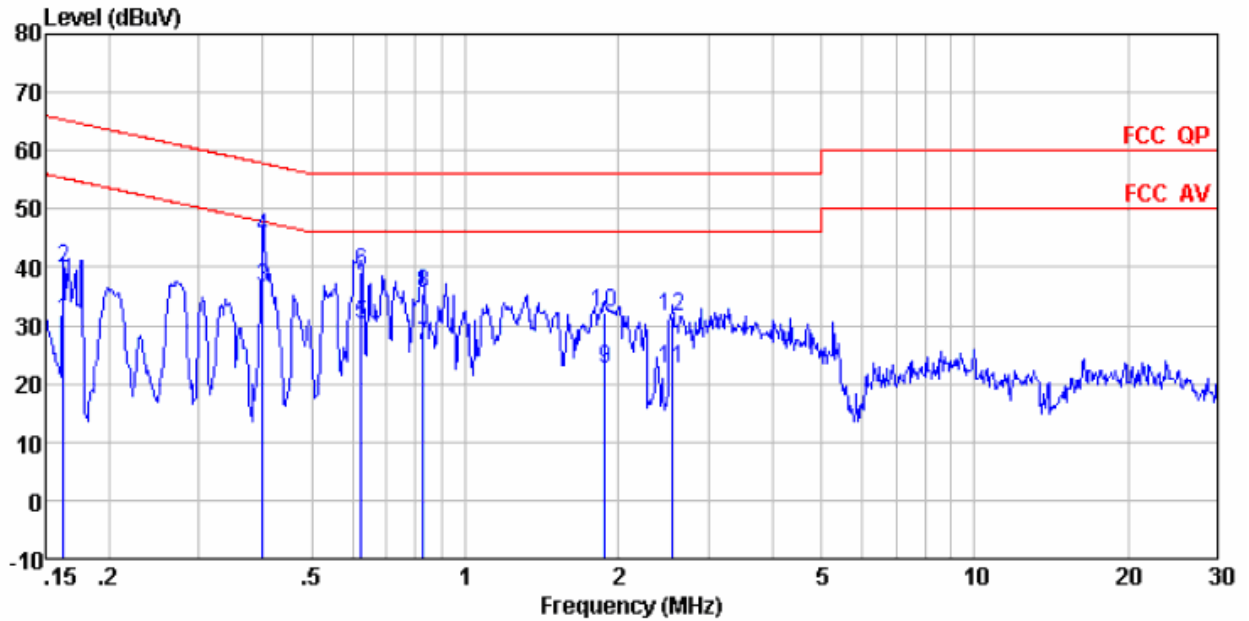

Condition : FCC QP LISN(2011) LINE
 Job No. : 166RF

	Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.162	30.17	0.68	0.10	30.95	55.34	-24.39	Average
2	0.162	38.89	0.68	0.10	39.67	65.34	-25.67	QP
3	0.400	35.89	0.58	0.10	36.57	47.86	-11.29	Average
4	0.400	44.58	0.58	0.10	45.26	57.86	-12.60	QP
5	0.624	29.47	0.53	0.10	30.10	46.00	-15.90	Average
6	0.624	38.50	0.53	0.10	39.13	56.00	-16.87	QP
7	0.826	25.81	0.50	0.10	26.41	46.00	-19.59	Average
8	0.826	34.97	0.50	0.10	35.57	56.00	-20.43	QP
9	1.878	22.19	0.41	0.10	22.70	46.00	-23.30	Average
10	1.878	31.65	0.41	0.10	32.16	56.00	-23.84	QP
11	2.554	22.18	0.37	0.10	22.65	46.00	-23.35	Average
12	2.554	30.95	0.37	0.10	31.42	56.00	-24.58	QP

Neutral:

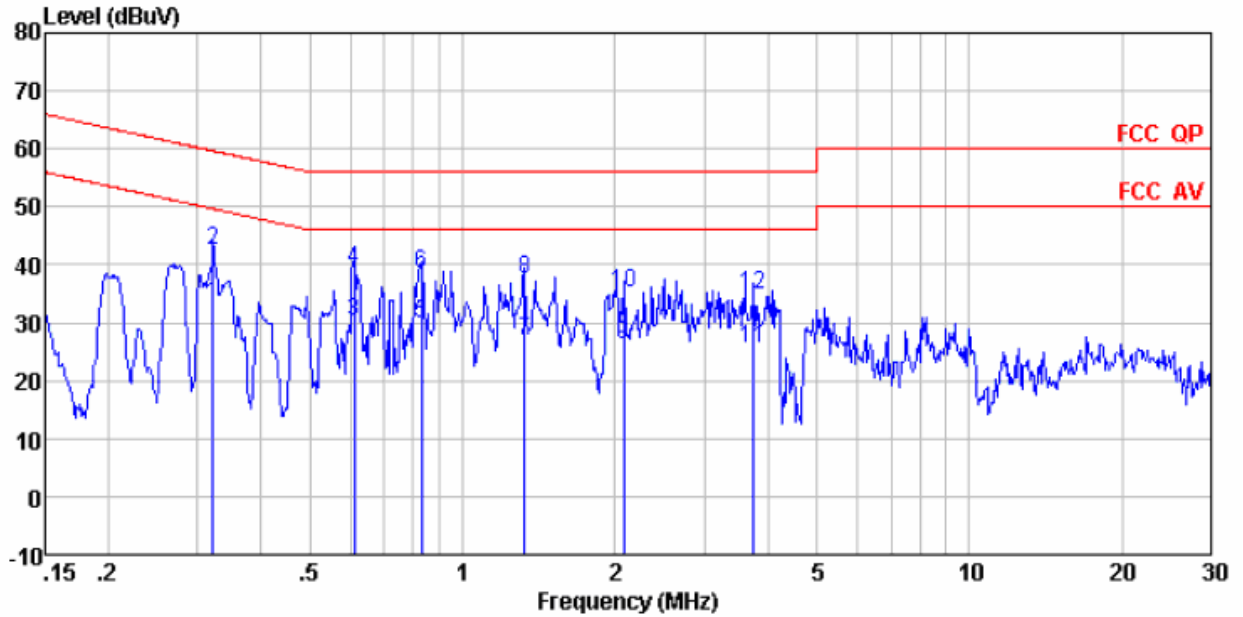

Condition : FCC QP LISN(2011) NEUTRAL
 Job No. : 166RF

	Read Freq	Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.322	32.47	0.60	0.10	33.17	49.66	-16.49	Average
2	0.322	41.76	0.60	0.10	42.46	59.66	-17.20	QP
3	0.611	29.51	0.53	0.10	30.14	46.00	-15.86	Average
4	0.611	38.44	0.53	0.10	39.07	56.00	-16.93	QP
5	0.830	29.15	0.50	0.10	29.75	46.00	-16.25	Average
6	0.830	37.93	0.50	0.10	38.53	56.00	-17.47	QP
7	1.324	26.48	0.45	0.10	27.03	46.00	-18.97	Average
8	1.324	37.10	0.45	0.10	37.65	56.00	-18.35	QP
9	2.077	25.79	0.40	0.10	26.29	46.00	-19.71	Average
10	2.077	34.55	0.40	0.10	35.05	56.00	-20.95	QP
11	3.759	25.03	0.33	0.10	25.46	46.00	-20.54	Average
12	3.759	34.53	0.33	0.10	34.96	56.00	-21.04	QP