

FCC PART 15B MEASUREMENT AND TEST REPORT FOR

Verykool USA Inc

4350 Executive Dr. #100, San Diego

FCC ID: WA6R16

| | |
|--|--|
| Report Concerns: Original Report | Equipment Type: GSM/GPRS Quad-band Mobile Phone |
| Model: | <u>R16</u> |
| Report No.: | <u>STR11128374I-3</u> |
| Test Date: | <u>2011-12-26 to 2012-01-08</u> |
| Issue Date: | <u>2012-01-13</u> |
| Tested By: | <u>Jason Jiang / Engineer</u>  |
| Reviewed By: | <u>Lahm Peng / EMC Manager</u>  |
| Approved & Authorized By: | <u>Jandy so / PSQ Manager</u>  |
| Prepared By: | <p style="text-align: center;">SEM.Test Compliance Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn</p> |

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

- 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3
- 1.2 TEST STANDARDS.....3
- 1.3 TEST METHODOLOGY3
- 1.4 TEST FACILITY4
- 1.5 EUT EXERCISE SOFTWARE4
- 1.6 ACCESSORIES EQUIPMENT LIST AND DETAILS4
- 1.7 EUT CABLE LIST AND DETAILS4

2. SUMMARY OF TEST RESULTS5

3. §15.107 (A)- CONDUCTED EMISSION6

- 3.1 MEASUREMENT UNCERTAINTY6
- 3.2 TEST EQUIPMENT LIST AND DETAILS6
- 3.3 TEST PROCEDURE.....6
- 3.4 BASIC TEST SETUP BLOCK DIAGRAM.....6
- 3.5 ENVIRONMENTAL CONDITIONS7
- 3.6 TEST RECEIVER SETUP7
- 3.7 SUMMARY OF TEST RESULTS/PLOTS7
- 3.8 CONDUCTED EMISSIONS TEST DATA.....7

4. §15.109(A)- RADIATED EMISSION10

- 4.1 MEASUREMENT UNCERTAINTY10
- 4.2 TEST EQUIPMENT LIST AND DETAILS10
- 4.3 TEST PROCEDURE.....10
- 4.4 CORRECTED AMPLITUDE & MARGIN CALCULATION.....11
- 4.5 ENVIRONMENTAL CONDITIONS11
- 4.6 SUMMARY OF TEST RESULTS/PLOTS11

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Verykool USA Inc
Address of applicant: 4350 Executive Dr. #100, San Diego

Manufacturer: Verykool Hong Kong Limited
Address of manufacturer: Suite 2311, Tower 2, Times Square 1 Matheson Street, Causeway Bay Hong Kong

General Description of E.U.T

| Items | Description |
|---|--|
| EUT Description: | GSM/GPRS Quad-band Mobile Phone |
| Trade Name: | Verykool |
| Model No.: | R16 |
| Rated Voltage: | Battery DC 3.7V, Adapter DC USB 5V |
| Rated Current: | 2A |
| Battery: | M/N: 423450AR; DC 3.7V/800mAh |
| Power Adapter: | M/N: ASUC1-050050; Input: 100-240V ~ 50/60Hz, 0.3A |
| For more information refer to the circuit diagram form and the user's manual. | |

The test data is gathered from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report is prepared on behalf of the Verykool USA Inc in accordance with Part 2, Subpart J, and Part 15, Subparts A and B of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15.107, and 15.109 rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible susceptibility against the tested phenomena. The test modes were adapted accordingly in reference to the Operating Instructions.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Exercise Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the system components. The test software, provided by the customer, is started while the EUT is on to simulate the normal work.

1.6 Accessories Equipment List and Details

| Description | Manufacturer | Model | Serial Number |
|-------------|--------------|-------|---------------|
| Notebook | ASUS | X50R | 74N0AS297138 |

1.7 EUT Cable List and Details

| Cable Description | Length (M) | Shielded/Unshielded | With Core/Without Core |
|-------------------|------------|---------------------|------------------------|
| USB Cable | 1.0 | Shielded | Without Core |
| Earphone Cable | 1.6 | Unshielded | Without Core |

2. SUMMARY OF TEST RESULTS

| Description of Test | Result |
|--------------------------------|-----------|
| §15.107 (a) Conducted Emission | Compliant |
| §15.109(a) Radiated Emission | Compliant |

3. §15.107 (a)- CONDUCTED EMISSION

3.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

3.2 Test Equipment List and Details

| Description | Manufacturer | Model | Serial Number | Cal. Date | Due. Date |
|-------------------|-----------------|----------|---------------|------------|------------|
| EMI Test Receiver | Rohde & Schwarz | ESPI | 101611 | 2011-12-20 | 2012-12-19 |
| L.I.S.N | Schwarz beck | NSLK8126 | 8126-224 | 2011-12-20 | 2012-12-19 |
| Pulse Limiter | Rohde & Schwarz | ESH3-Z2 | 100911 | 2011-12-20 | 2012-12-19 |


3.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.107 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.4 Basic Test Setup Block Diagram

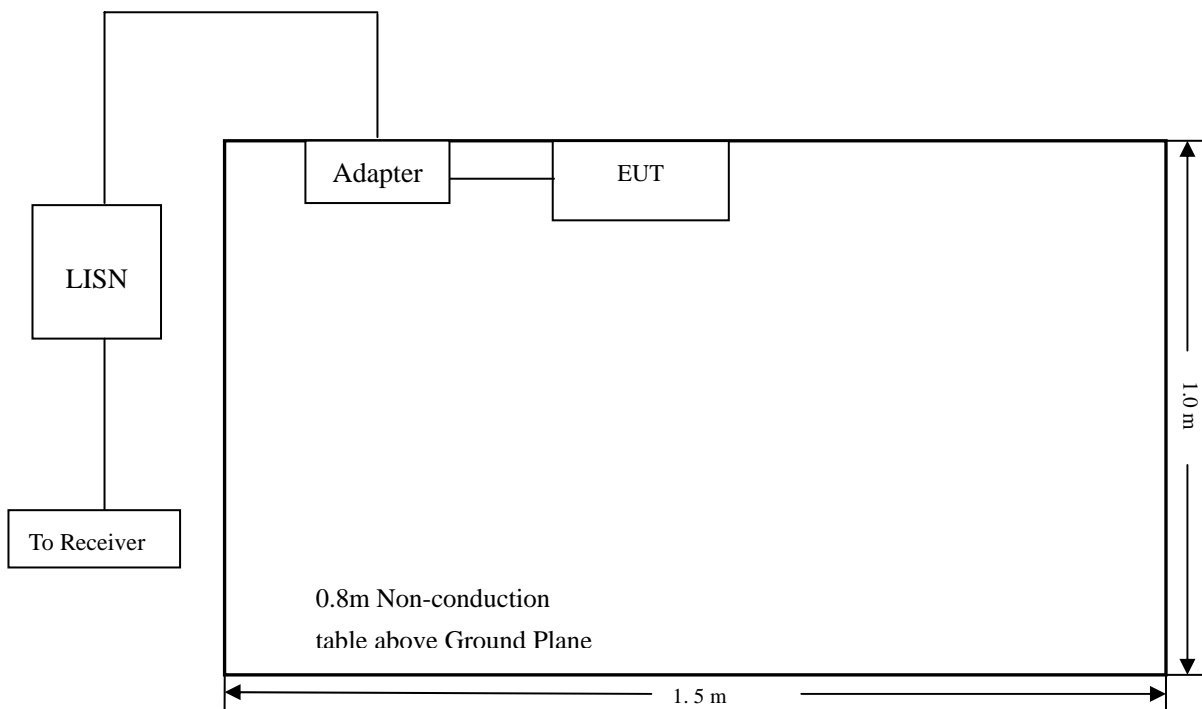

3.5 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 52% |
| ATM Pressure: | 1012 mbar |

3.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency..... 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

3.7 Summary of Test Results/Plots

According to the data in section 3.8, the EUT complied with the FCC Part 15B Conducted margin for a Class B device, with the *worst* margin reading of:

-3.65 dB μ V at 0.194 MHz in the Neutral, Peak detector, 0.15-30MHz

3.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data

Conducted Disturbance

EUT: GSM/GPRS Quad-band Mobile Phone

M/N: R16

Operating Condition: Charging


Test Specification: N

Comment: 120V/60Hz



RBW 9 kHz
MT 100 ms

Att 10 dB AUTO

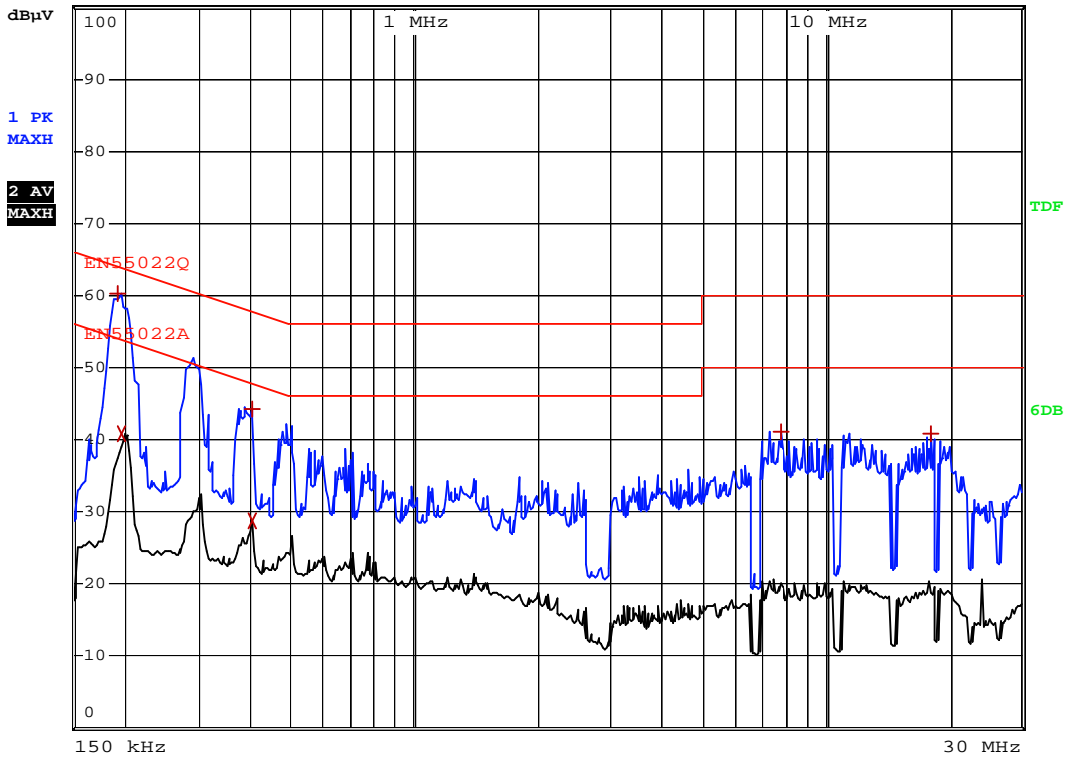

| EDIT PEAK LIST (Prescan Results) | | | |
|----------------------------------|------------|------------|----------------|
| Trace1: | EN55022Q | | |
| Trace2: | EN55022A | | |
| Trace3: | --- | | |
| TRACE | FREQUENCY | LEVEL dBµV | DELTA LIMIT dB |
| 1 Max Peak | 194 kHz | 60.20 | -3.65 |
| 2 Average | 198 kHz | 40.70 | -12.99 |
| 1 Max Peak | 402 kHz | 44.28 | -13.52 |
| 2 Average | 402 kHz | 28.62 | -19.18 |
| 1 Max Peak | 7.77 MHz | 41.07 | -18.92 |
| 1 Max Peak | 17.962 MHz | 40.89 | -19.10 |

Plot of Conducted Emissions Test Data

Conducted Disturbance

EUT: GSM/GPRS Quad-band Mobile Phone

M/N: R16

Operating Condition: Charging


Test Specification: L

Comment: 120V/60Hz



RBW 9 kHz
MT 10 s

Att 10 dB AUTO

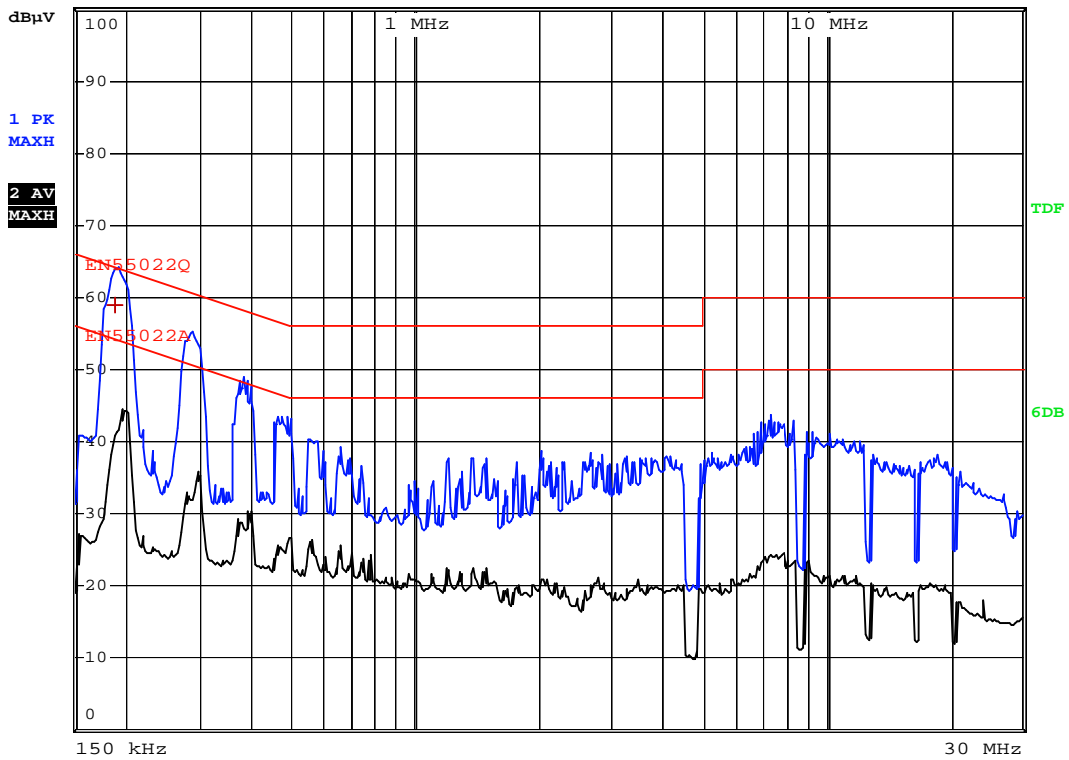

| EDIT PEAK LIST (Final Measurement Results) | | | |
|--|-----------|------------|----------------|
| Trace1: | EN55022Q | | |
| Trace2: | EN55022A | | |
| Trace3: | --- | | |
| TRACE | FREQUENCY | LEVEL dBµV | DELTA LIMIT dB |
| 1 Quasi Peak | 190 kHz | 58.84 | -5.19 |

4. §15.109(a)- RADIATED EMISSION

4.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any radiation emissions measurement is ± 5.10 dB.

4.2 Test Equipment List and Details


| Description | Manufacturer | Model | Serial Number | Cal. Date | Due. Date |
|--------------------------|----------------------|----------|---------------|------------|------------|
| Spectrum Analyzer | R&S | FSP | 836079/035 | 2011-12-20 | 2012-12-19 |
| EMI Test Receiver | R&S | ESVB | 825471/005 | 2011-12-20 | 2012-12-19 |
| Positioning Controller | C&C | CC-C-1F | N/A | 2011-12-20 | 2012-12-19 |
| RF Switch | EM | EMSW18 | SW060023 | 2011-12-20 | 2012-12-19 |
| Pre-amplifier | Agilent | 8447F | 3113A06717 | 2011-12-20 | 2012-12-19 |
| Pre-amplifier | Compliance Direction | PAP-0118 | 24002 | 2011-12-20 | 2012-12-19 |
| Trilog Broadband Antenna | SCHWARZBECK | VULB9163 | 9163-333 | 2011-01-09 | 2012-01-08 |
| Horn Antenna | ETS | 3117 | 00086197 | 2011-01-09 | 2012-01-08 |

4.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 and FCC Part 15.109 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

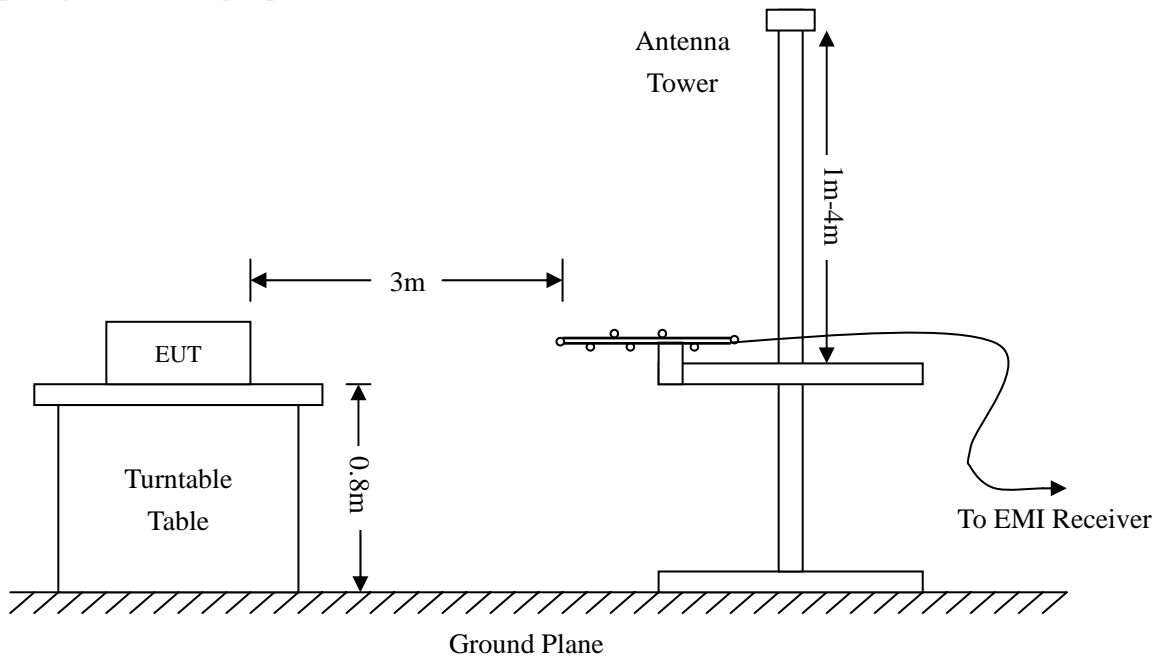

4.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} - \text{Corr. Factor}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15B Limit}$$

4.5 Environmental Conditions

| | |
|--------------------|-----------|
| Temperature: | 25 °C |
| Relative Humidity: | 54% |
| ATM Pressure: | 1011 mbar |

4.6 Summary of Test Results/Plots

According to the data, the EUT complied with the FCC Part 15B Class B standards, and had the worst margin of:

-9.27 dBμV at 863.0562 MHz in the Horizontal polarization, Charging mode, 9 kHz to 1 GHz, 3Meters

Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

Plot of Radiation Emissions Test Data

Radiated Disturbance

EUT: GSM/GPRS Quad-band Mobile Phone


M/N: R16

Operating Condition: Downloading

Test Specification: Horizontal & Vertical


Comment: AC 120V/60Hz

Horizontal

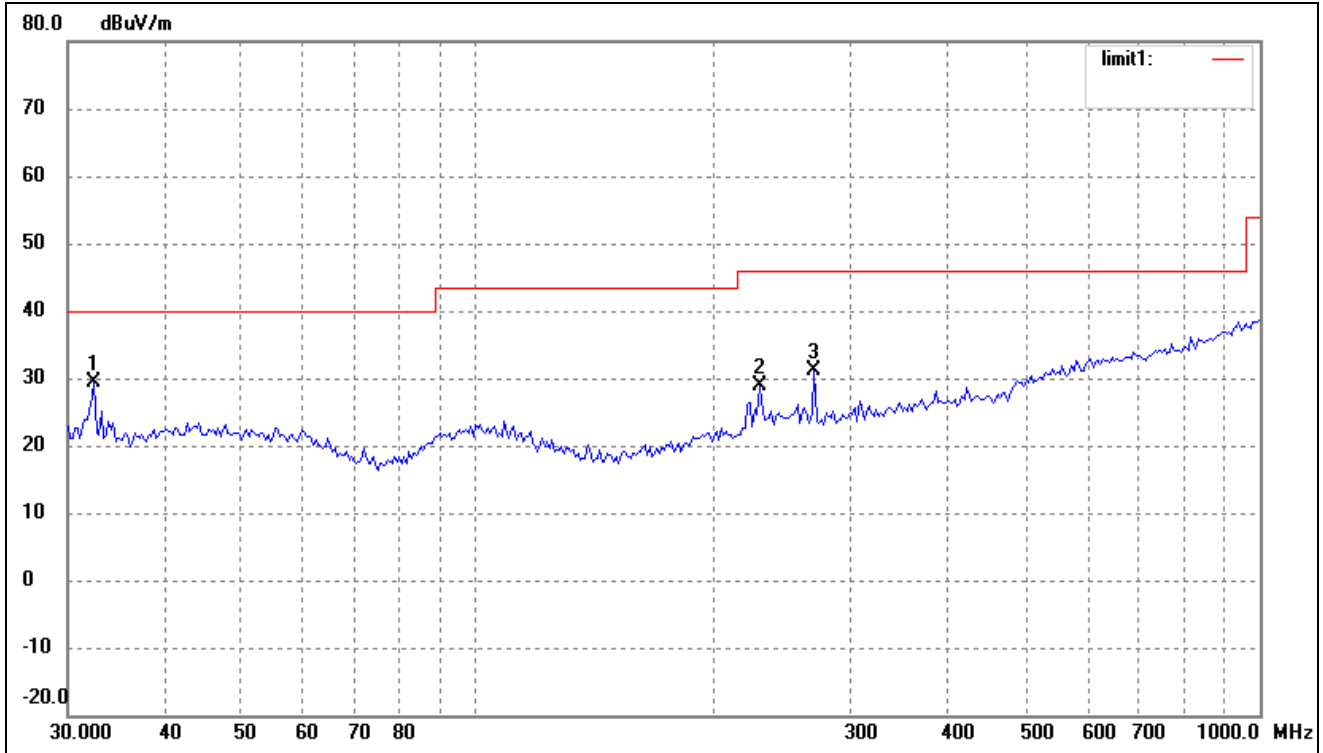

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1 | 32.4059 | 22.57 | 6.77 | 29.34 | 40.00 | -10.66 | 360 | 100 | peak |
| 2 | 229.2931 | 21.13 | 7.82 | 28.95 | 46.00 | -17.05 | 360 | 100 | peak |
| 3 | 269.4284 | 22.00 | 9.22 | 31.22 | 46.00 | -14.78 | 360 | 100 | peak |

Vertical

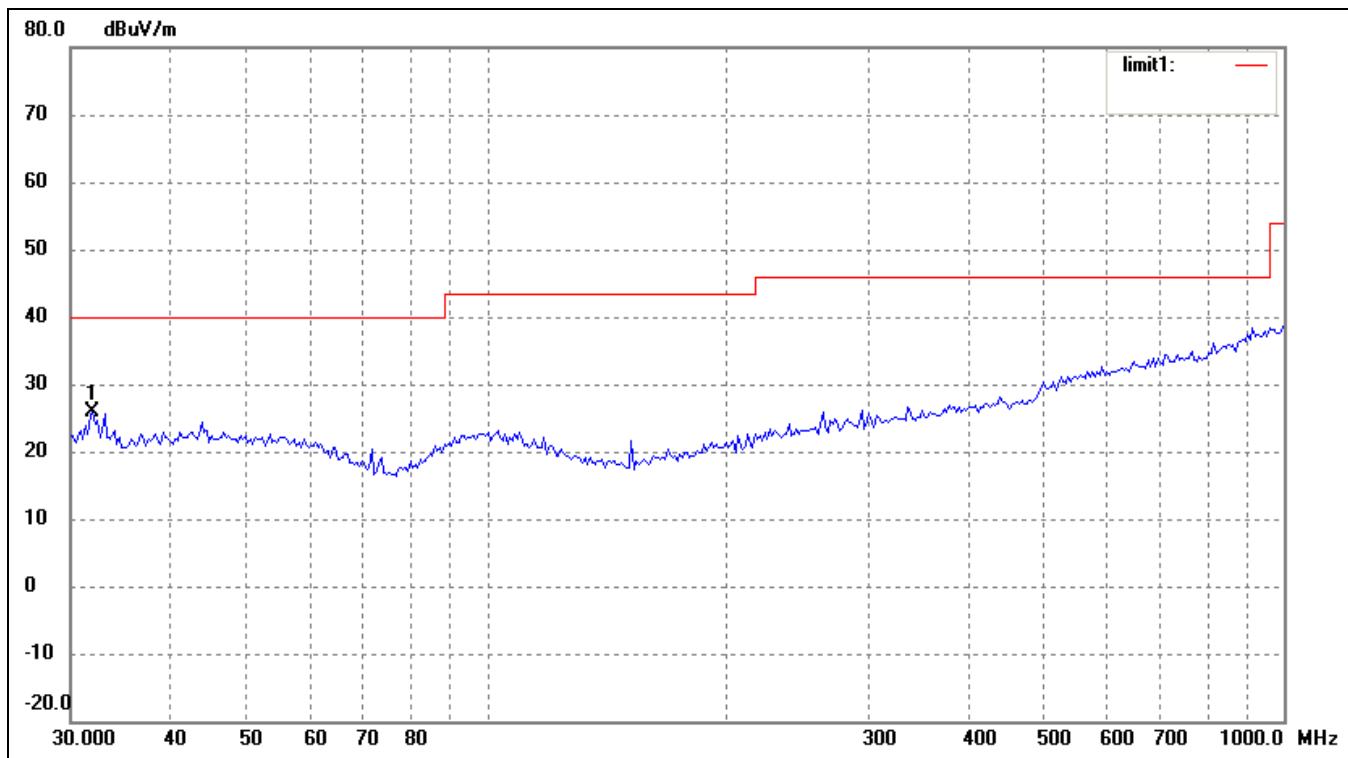

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1 | 31.9546 | 19.11 | 6.77 | 25.88 | 40.00 | -14.12 | 360 | 100 | peak |

Radiated Disturbance

EUT: GSM/GPRS Quad-band Mobile Phone


M/N: R16

Operating Condition: Charging

Test Specification: Horizontal & Vertical


Comment: AC 120V/60Hz

Horizontal

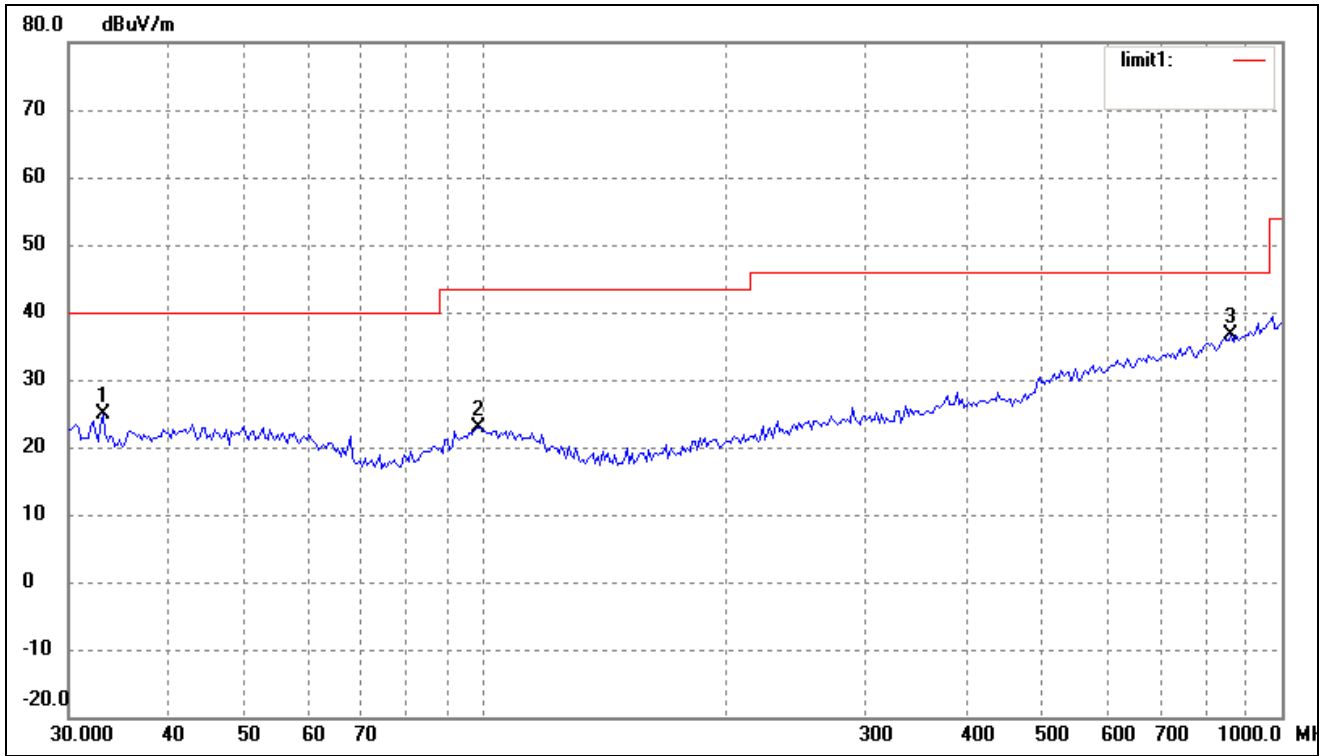

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct dB/m | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|--------------------|---------------------|-----------------|--------------------|-------------------|----------------|-----------------|----------------|--------|
| 1 | 33.0950 | 18.13 | 6.77 | 24.90 | 40.00 | -15.10 | 360 | 100 | peak |
| 2 | 98.1419 | 14.64 | 8.30 | 22.94 | 43.50 | -20.56 | 360 | 100 | peak |
| 3 | 863.0562 | 16.52 | 20.21 | 36.73 | 46.00 | -9.27 | 360 | 100 | peak |

Vertical

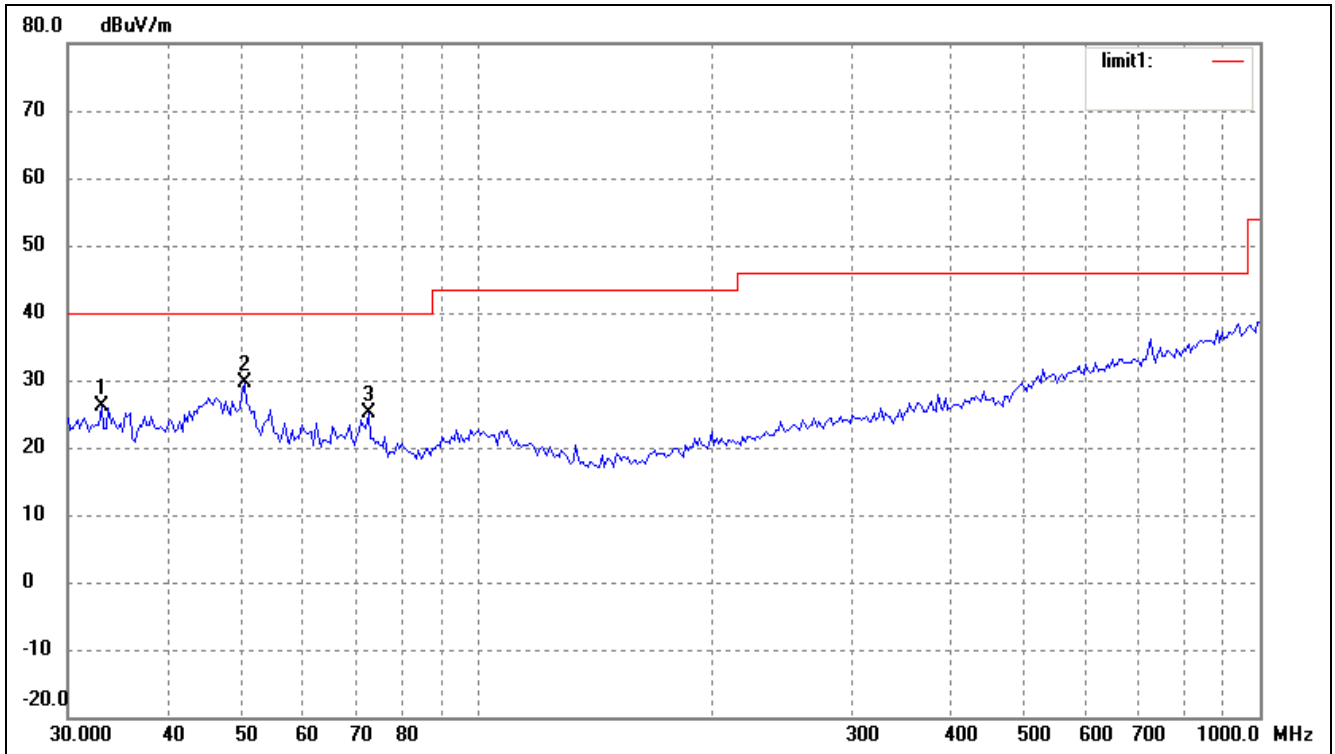

| No. | Frequency (MHz) | Reading (dBuV/m) | Correct (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Degree (°) | Height (cm) | Remark |
|-----|-----------------|------------------|----------------|-----------------|----------------|-------------|--------------|-------------|--------|
| 1 | 33.0950 | 19.42 | 6.77 | 26.19 | 40.00 | -13.81 | 360 | 100 | peak |
| 2 | 50.4089 | 21.56 | 7.95 | 29.51 | 40.00 | -10.49 | 360 | 100 | peak |
| 3 | 72.5917 | 21.91 | 3.22 | 25.13 | 40.00 | -14.87 | 360 | 100 | peak |

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics is close to the noise base even antenna close up to 1meter distance according the measurement of ANSI C63.4. The measurements greater than 20dB below the limit from 9kHz to 30MHz..

***** END OF REPORT *****