

FCC Part 15C Measurement and Test Report

For

VeryKool USA Inc

3636 Nobel Drive, Suite 325, San Diego, CA 92122 USA

FCC ID: WA6R623

FCC Rules:	<u>FCC Part 15C</u>	
Product Description:	<u>GSM/GPRS Dual-band Mobile Phone</u>	
Tested Model:	<u>R623</u>	
Report No.:	<u>STR12098307I-2</u>	
Tested Date:	<u>2012-10-09 to 2012-10-29</u>	
Issued Date:	<u>2012-10-29</u>	
Tested By:	<u>Seven Song / Engineer</u>	<i>Seven Song</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u>	<i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u>	<i>Jandyso</i>
Prepared By:	<p>SEM.Test Compliance Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn</p>	

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by SEM.Test Compliance Service Co., Ltd

TABLE OF CONTENTS

1. GENERAL INFORMATION.....3

 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....3

 1.2 TEST STANDARDS.....4

 1.3 TEST METHODOLOGY4

 1.4 TEST FACILITY4

 1.5 EUT SETUP AND TEST MODE.....5

2. SUMMARY OF TEST RESULTS6

3. RF EXPOSURE7

 3.1 STANDARD APPLICABLE.....7

 3.2 TEST RESULT.....7

4. ANTENNA REQUIREMENT8

 4.1 STANDARD APPLICABLE.....8

 4.2 EVALUATION INFORMATION8

5. POWER SPECTRAL DENSITY9

 5.1 STANDARD APPLICABLE.....9

 5.2 TEST EQUIPMENT LIST AND DETAILS9

 5.3 TEST PROCEDURE.....9

 5.4 ENVIRONMENTAL CONDITIONS9

 5.5 SUMMARY OF TEST RESULTS/PLOTS10

6. 6DB BANDWIDTH17

 6.1 STANDARD APPLICABLE.....17

 6.2 TEST EQUIPMENT LIST AND DETAILS17

 6.3 TEST PROCEDURE.....17

 6.4 ENVIRONMENTAL CONDITIONS17

 6.5 SUMMARY OF TEST RESULTS/PLOTS18

7. RF OUTPUT POWER25

 7.1 STANDARD APPLICABLE.....25

 7.2 TEST EQUIPMENT LIST AND DETAILS25

 7.3 TEST PROCEDURE.....25

 7.4 ENVIRONMENTAL CONDITIONS25

 7.5 SUMMARY OF TEST RESULTS/PLOTS26

8. FIELD STRENGTH OF SPURIOUS EMISSIONS39

 8.1 MEASUREMENT UNCERTAINTY39

 8.2 STANDARD APPLICABLE.....39

 8.3 TEST EQUIPMENT LIST AND DETAILS39

 8.4 TEST PROCEDURE.....40

 8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....40

 8.6 ENVIRONMENTAL CONDITIONS40

 8.7 SUMMARY OF TEST RESULTS/PLOTS41

9. OUT OF BAND EMISSIONS.....70

 9.1 STANDARD APPLICABLE.....70

 9.2 TEST EQUIPMENT LIST AND DETAILS70

 9.3 TEST PROCEDURE.....70

 9.4 ENVIRONMENTAL CONDITIONS71

 9.5 SUMMARY OF TEST RESULTS/PLOTS71

10. CONDUCTED EMISSIONS90

 10.1 MEASUREMENT UNCERTAINTY90

 10.2 TEST EQUIPMENT LIST AND DETAILS90

 10.3 TEST PROCEDURE.....90

 10.4 BASIC TEST SETUP BLOCK DIAGRAM.....90

 10.5 ENVIRONMENTAL CONDITIONS91

 10.6 TEST RECEIVER SETUP91

 10.7 SUMMARY OF TEST RESULTS/PLOTS91

 10.8 CONDUCTED EMISSIONS TEST DATA.....91

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: Verykool USA Inc
 Address of applicant: 3636 Nobel Drive, Suite 325, San Diego, CA 92122 USA

Manufacturer: Verykool Wireless Technology Ltd.
 Address of manufacturer: Room 1701, Reward Building C, No.203, 2nd Section of WangJing, Li Ze Zhong Yuan, ChaoYang District, Beijing, P.R. of China 100102

General Description of EUT	
Product Name:	GSM/GPRS Dual-band Mobile Phone
Trade Name:	verykool
Model No.:	R623
Rated Voltage:	DC 3.7V Li-ion Battery
Power Adapter Model:	CYSK05-050050 (Input: AC 100-240V, Output: DC 5V)
<i>Note: The test data is gathered from a production sample, provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Support Standards:	802.11b/g/n
Frequency Range:	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
RF Output Power:	17.53 dBm (Conducted)
Data Rate:	1-11Mbps, 6-54Mbps, up to 150Mbps
Modulation:	CCK, BPSK, QPSK, 16QAM, 64QAM
Quantity of Channels:	11 for 802.11b/g/n-HT20, 7 for 802.11n-HT40
Channel Separation:	5MHz
Antenna Type:	Integral Antenna
Antenna Gain:	1.0 dBi
Lowest Internal Frequency of EUT:	26MHz
Device Category:	Portable Device

1.2 Test Standards

The following report is prepared on behalf of the VeryKool USA Inc in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The public notice KDB 558074 for digital transmission systems shall be performed also.

1.4 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

- **CNAS Registration No.: L4062**

Shenzhen SEM.Test Electronics Service Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C (518101)

1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	802.11b	2412MHz, 2437MHz, 2462MHz
TM2	802.11g	2412MHz, 2437MHz, 2462MHz
TM3	802.11n-HT20	2412MHz, 2437MHz, 2462MHz
TM4	802.11n-HT40	2422MHz, 2437MHz, 2452MHz

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.0	Shielded	Without Ferrite

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
15.247(i), 1.1307(b)(1), 2.1093,	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)(d)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

3. RF Exposure

3.1 Standard Applicable

According to Part 15.247(i), 1.1307(b)(1), and 2.1093, the portable transmitter must comply the RF exposure requirements.

3.2 Test Result

This product complied with the requirement of the RF exposure, please see the SAR report.

4. Antenna Requirement

4.1 Standard Applicable

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

4.2 Evaluation Information

This product complied with the requirement of the RF exposure, please see the SAR report.

5. Power Spectral Density

5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

According to the KDB 558074, the test method of power spectral density as below:

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW=100 kHz, VBW=100 kHz, Span 5-30 % greater than the EBW.
4. Repeat above procedures until all frequency measured was complete.
5. (BWCF) where $BWCF = 10\log(3\text{ kHz}/100\text{kHz} = -15.2\text{ dB})$.

5.4 Environmental Conditions


Temperature:	20° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

5.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/100kHz	BWCF	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
802.11b	2412	5.002	-15.2	-10.198	8
	2437	4.507	-15.2	-10.693	8
	2462	4.615	-15.2	-10.585	8
802.11g	2412	-2.889	-15.2	-18.089	8
	2437	-4.656	-15.2	-19.856	8
	2462	-5.435	-15.2	-20.635	8
802.11n HT20	2412	-3.157	-15.2	-18.357	8
	2437	-3.712	-15.2	-18.912	8
	2462	-4.616	-15.2	-19.816	8
802.11n HT40	2422	-5.788	-15.2	-20.988	8
	2437	-5.727	-15.2	-20.927	8
	2452	-6.297	-15.2	-21.497	8

Please refer to the following test plots:


802.11b-Low Channel

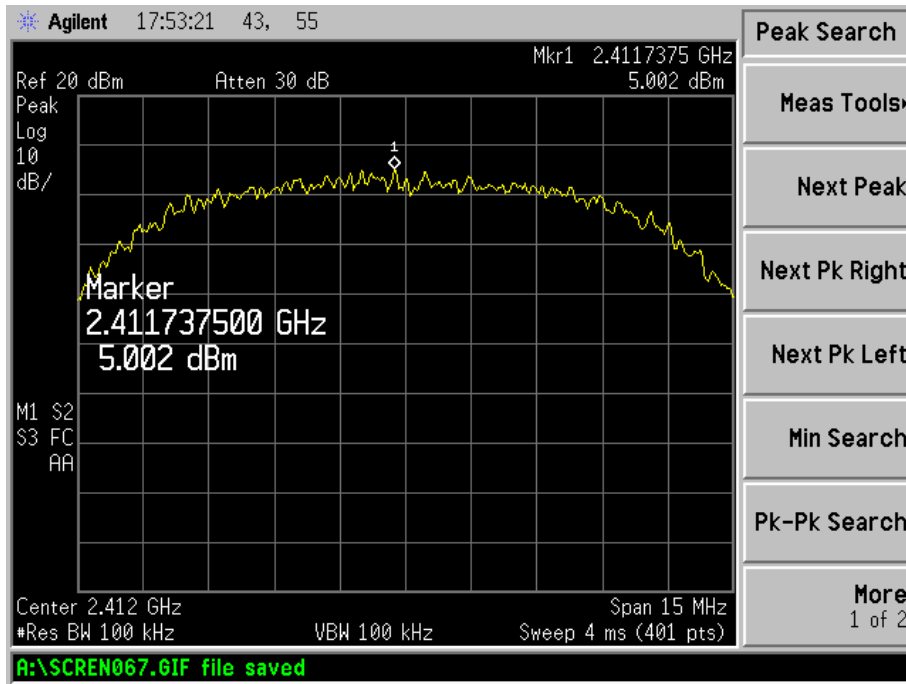


802.11b-Middle Channel

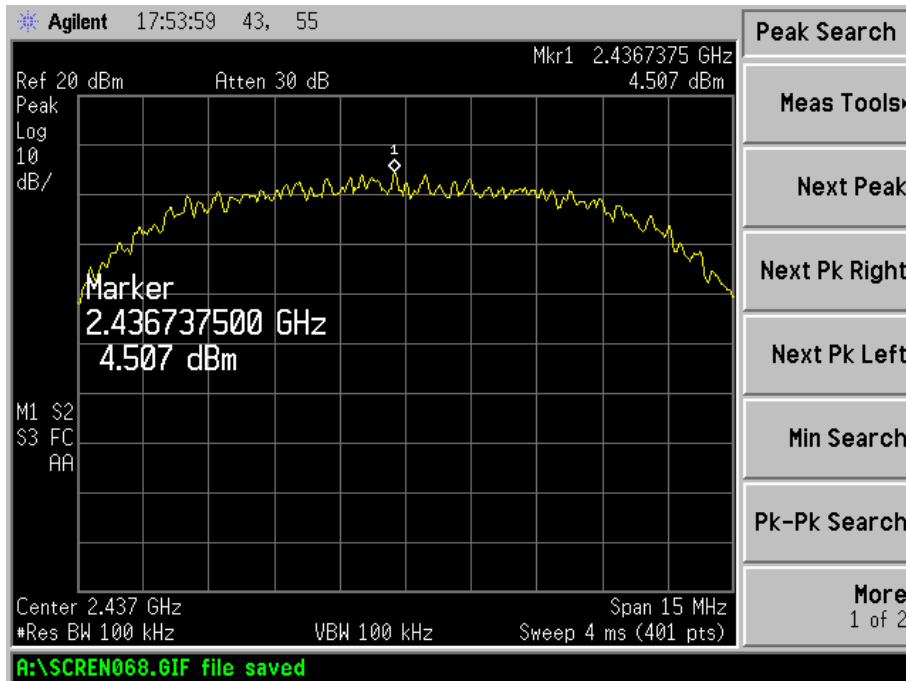


802.11b-High Channel

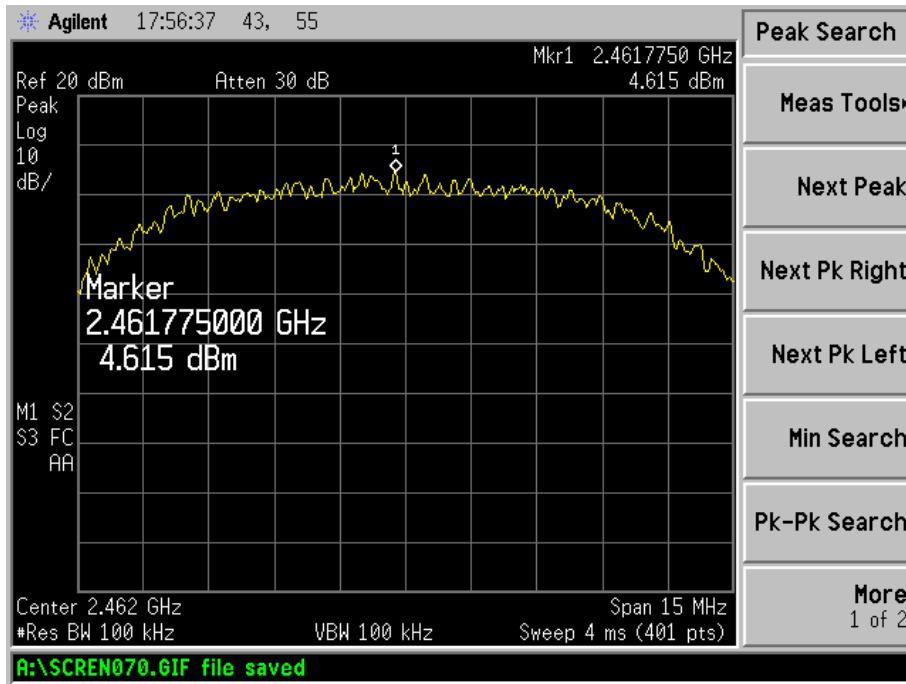


802.11g-Low Channel

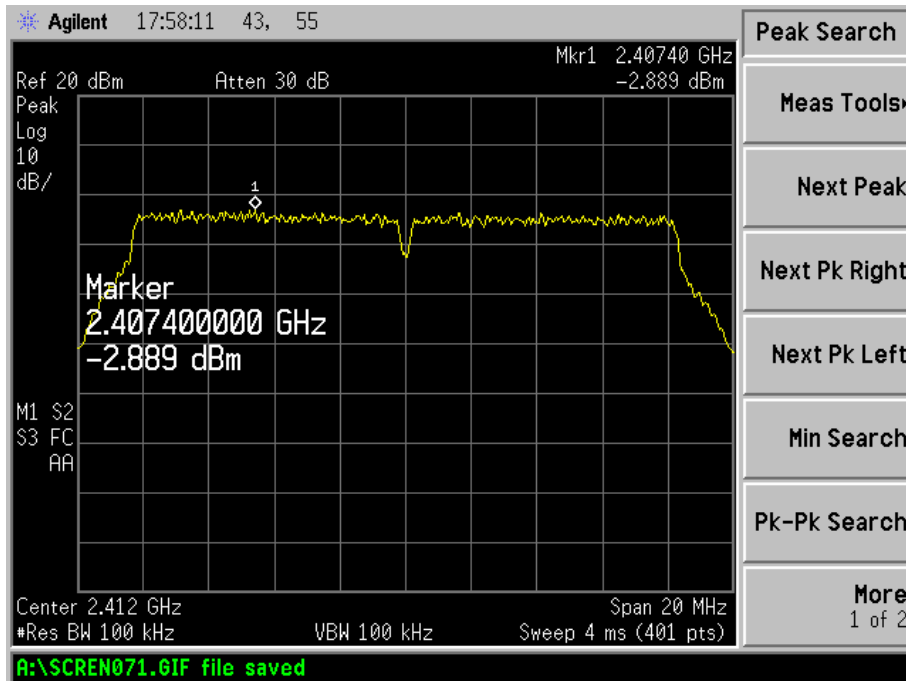


802.11g-Middle Channel

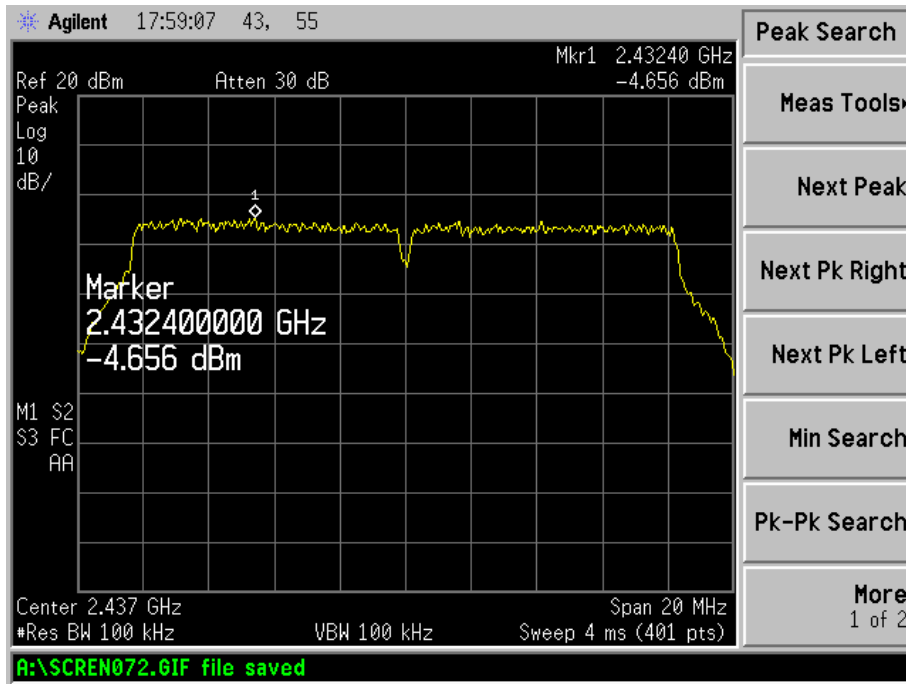


802.11g-High Channel

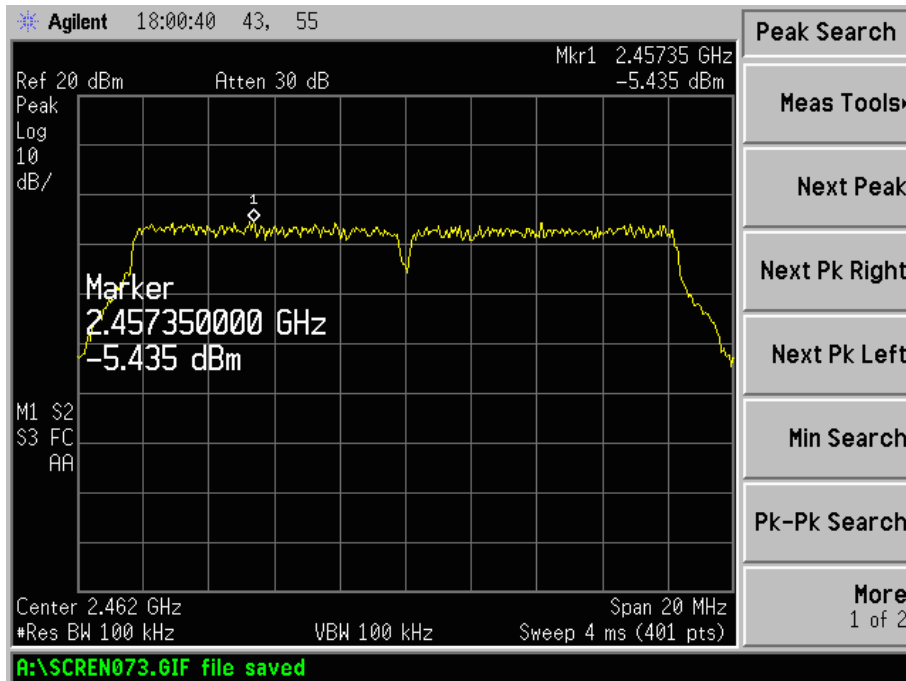


802.11n-HT20-Low Channel

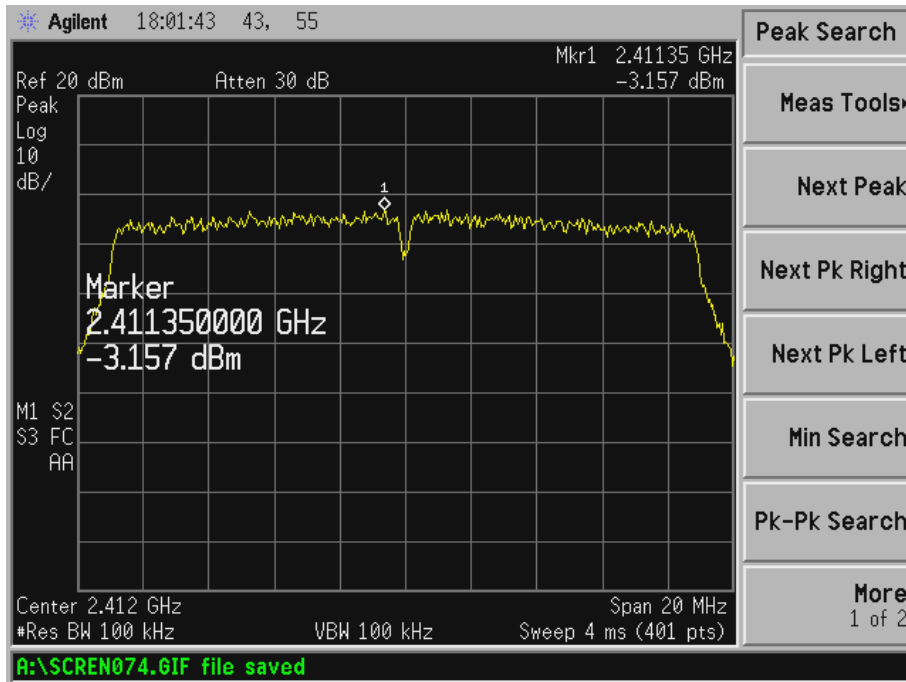


802.11n-HT20-Middle Channel

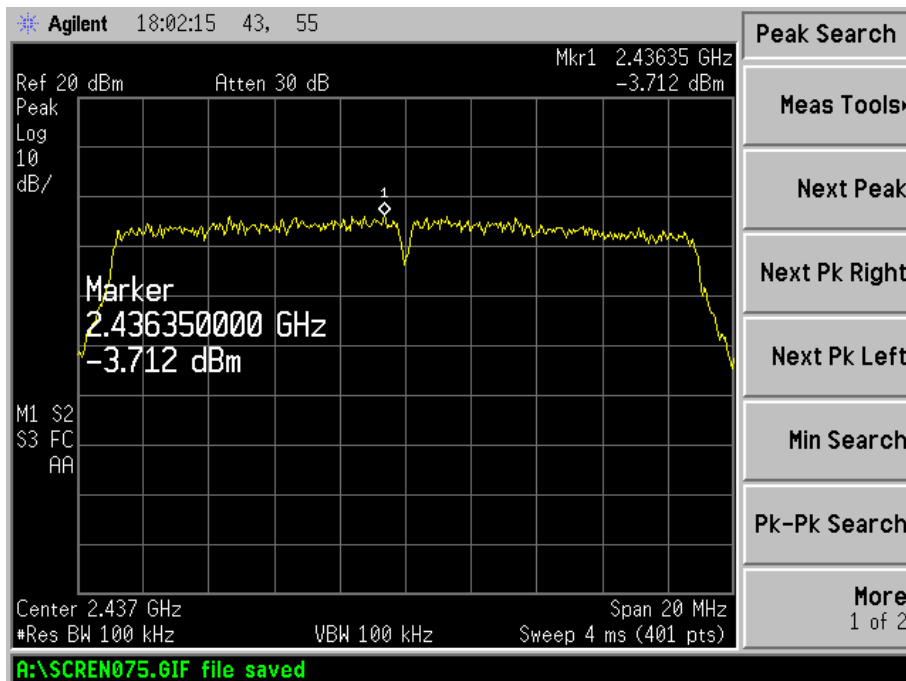


802.11n-HT20-High Channel

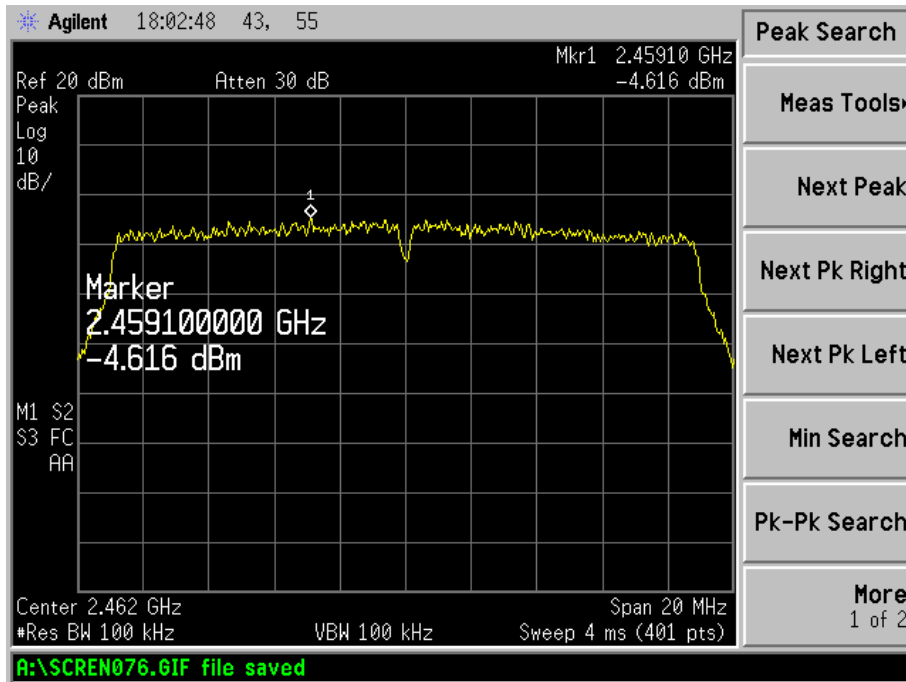


802.11n-HT40-Low Channel

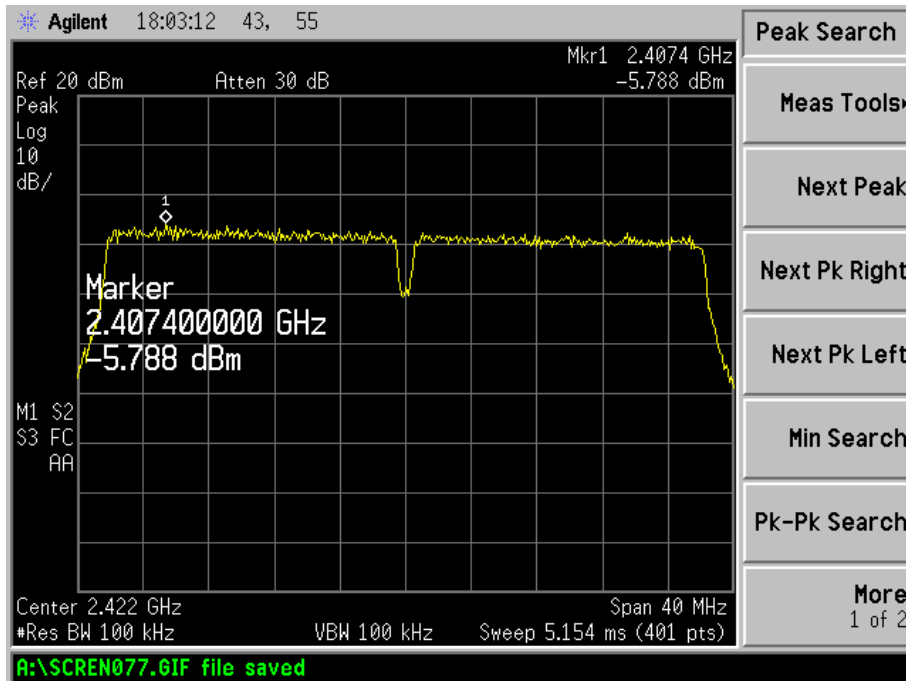

802.11n-HT40-Middle Channel

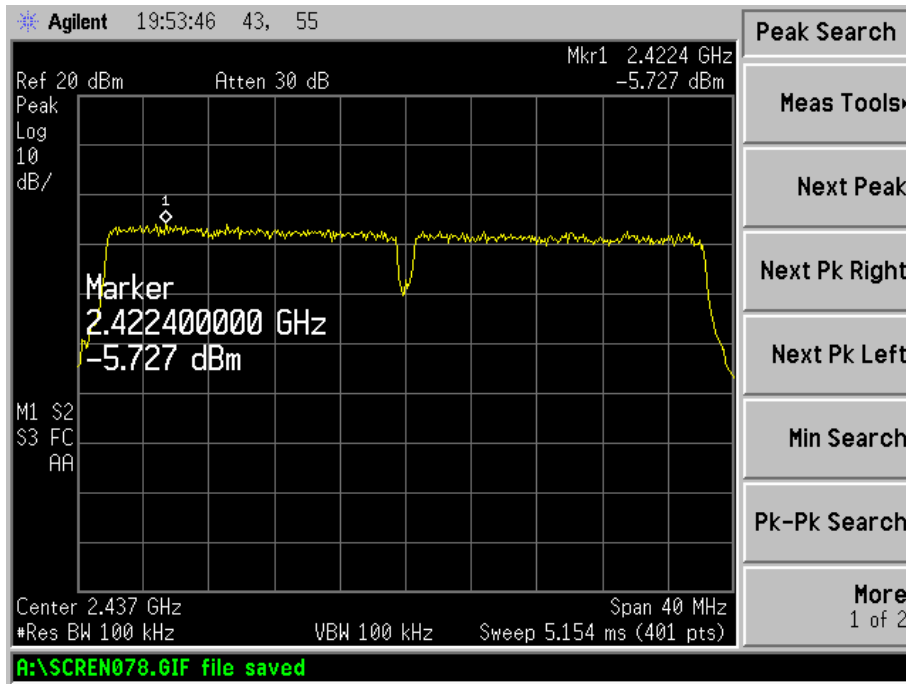

802.11n-HT40-High Channel

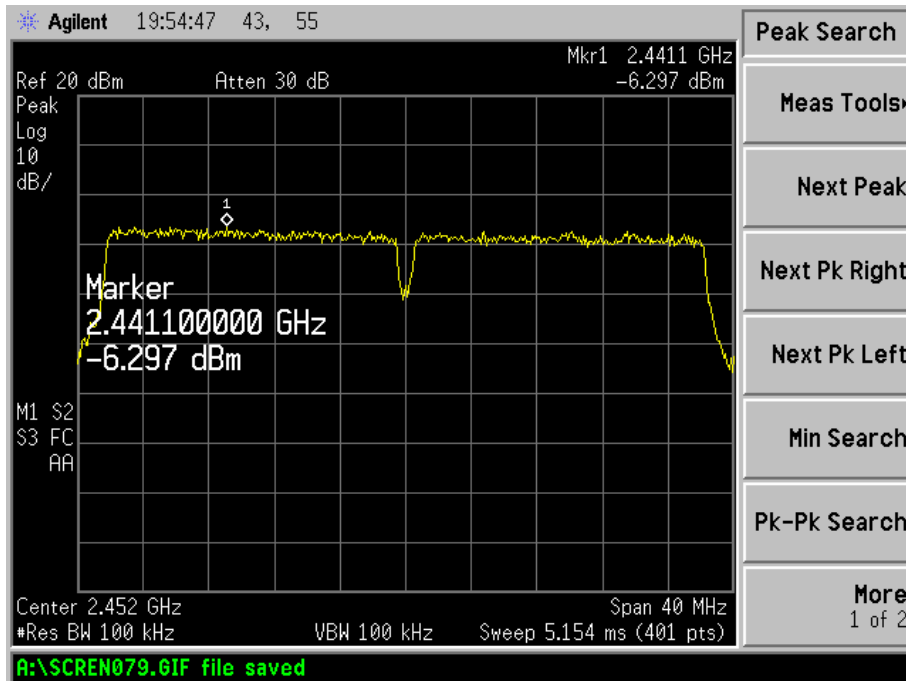

6. 6dB Bandwidth

6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

6.3 Test Procedure

1. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set center frequency of spectrum analyzer = operating frequency.
3. The spectrum analyzer as RBW=300kHz (1 % of Bandwidth.), Sweep=auto
4. Mark the peak frequency and –6dB (upper and lower) frequency.

6.4 Environmental Conditions


Temperature:	24° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

6.5 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	Limit kHz
802.11b	2412	10018	500
	2437	9995	500
	2462	10016	500
802.11g	2412	16642	500
	2437	16587	500
	2462	16752	500
802.11n-HT20	2412	17592	500
	2437	17646	500
	2462	17660	500
802.11n-HT40	2422	36511	500
	2437	36510	500
	2452	36496	500

Please refer to the following test plots:


802.11b-Low Channel

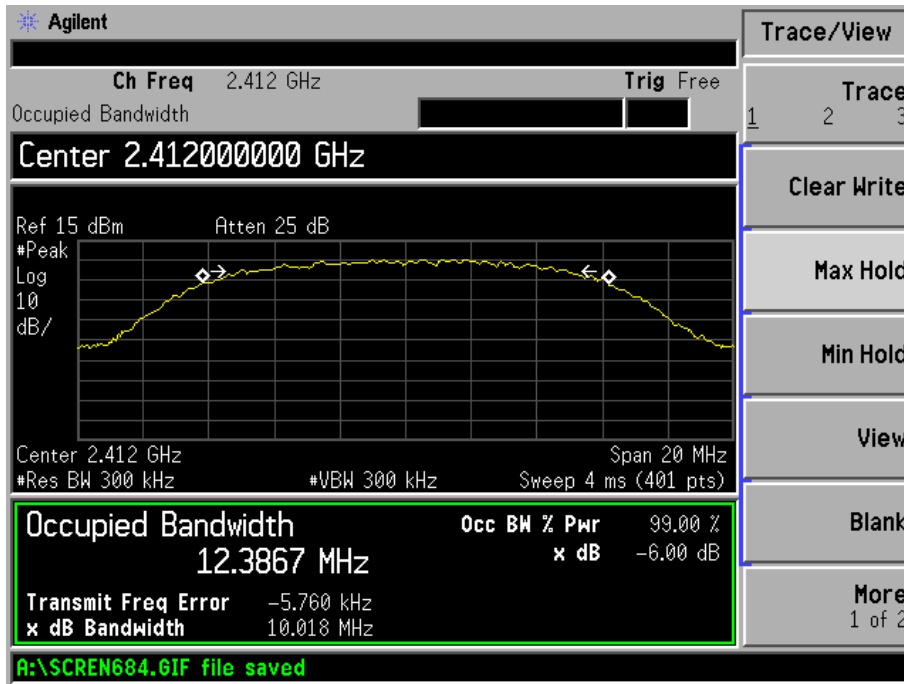


802.11b-Middle Channel

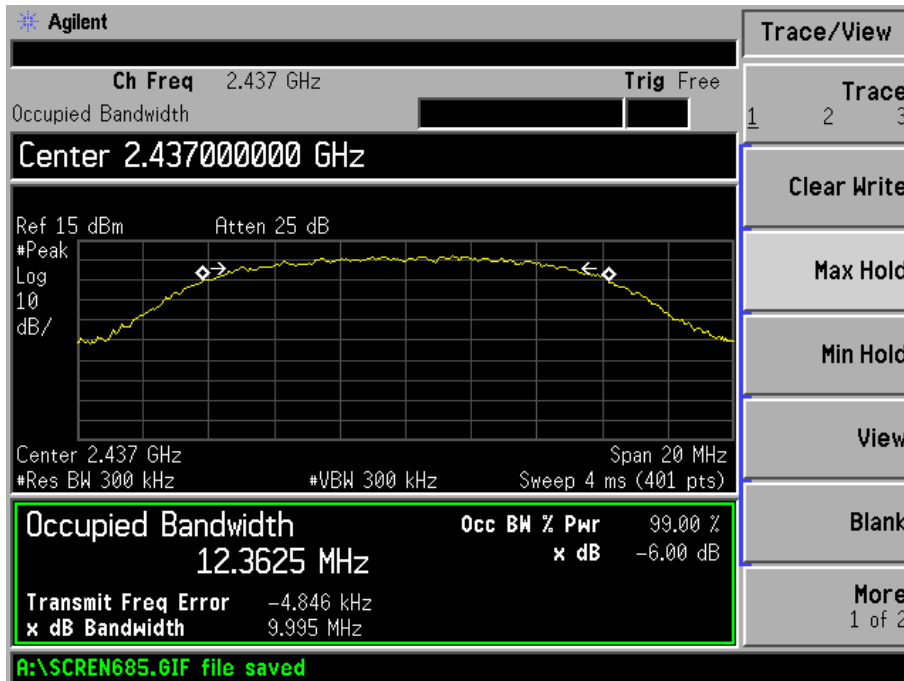


802.11b-High Channel

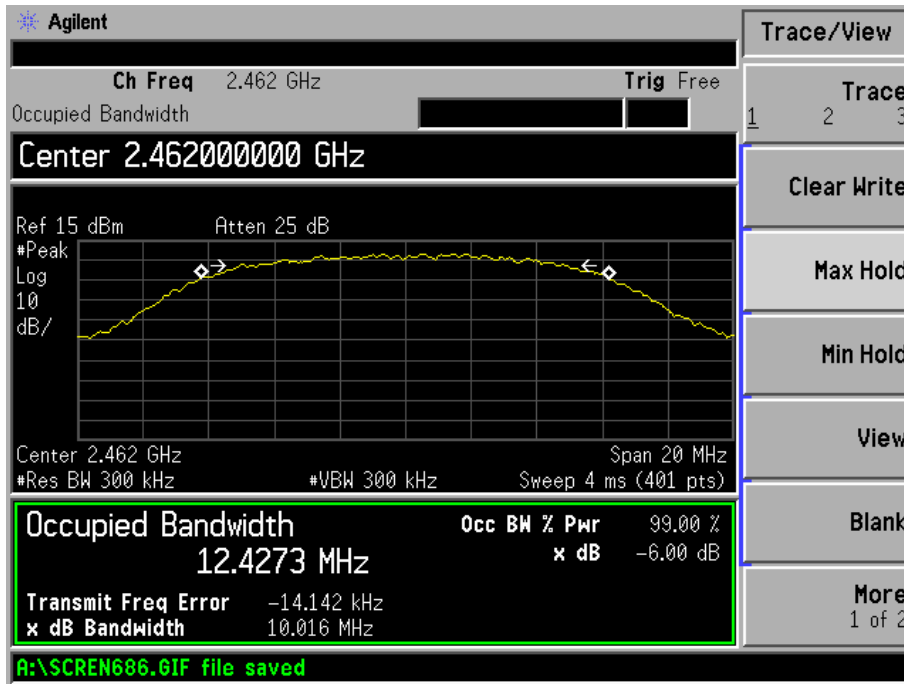


802.11g-Low Channel

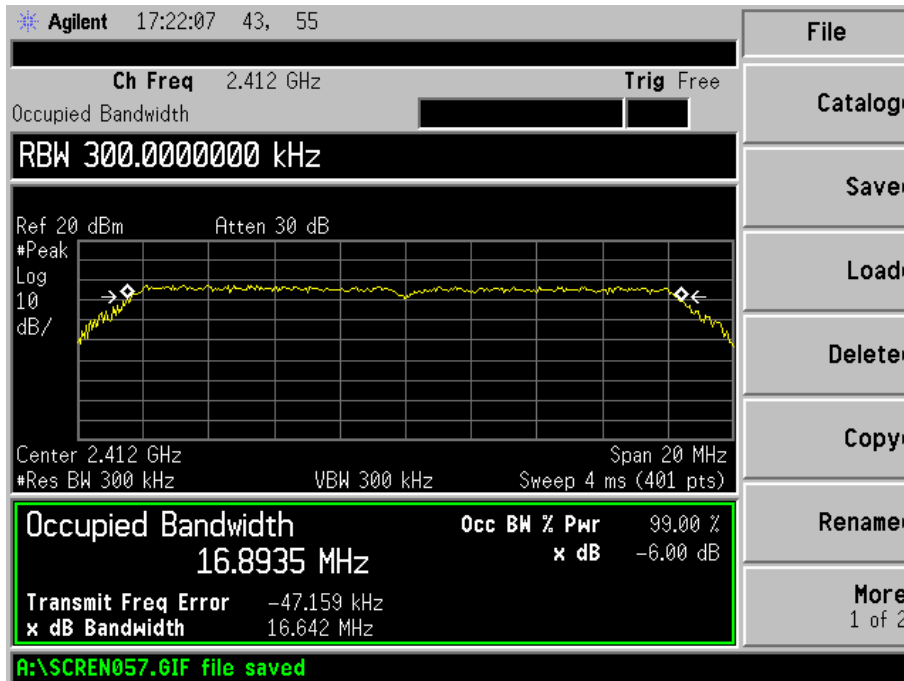


802.11g-Middle Channel

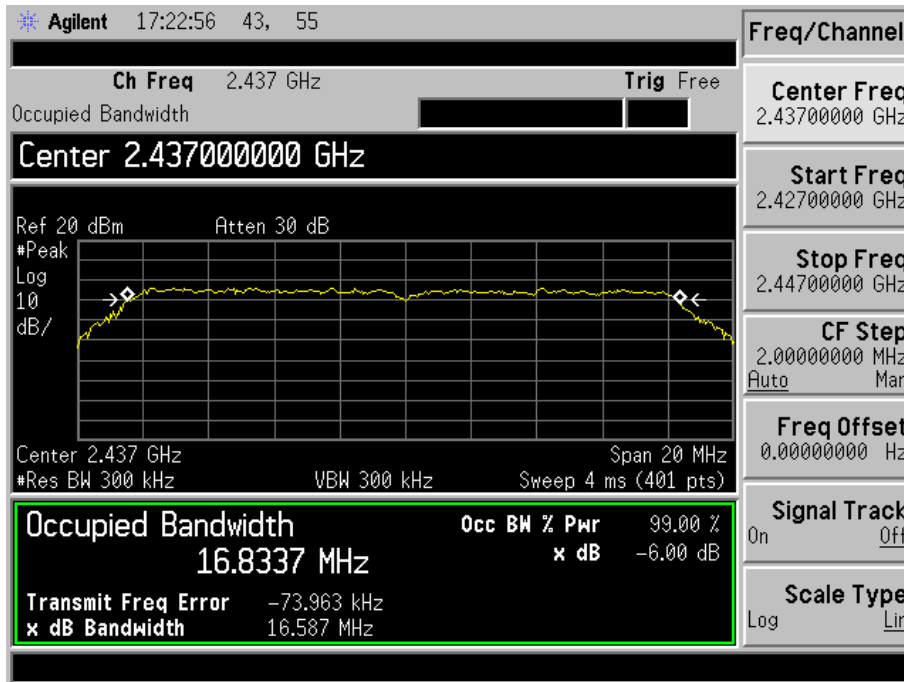


802.11g-High Channel

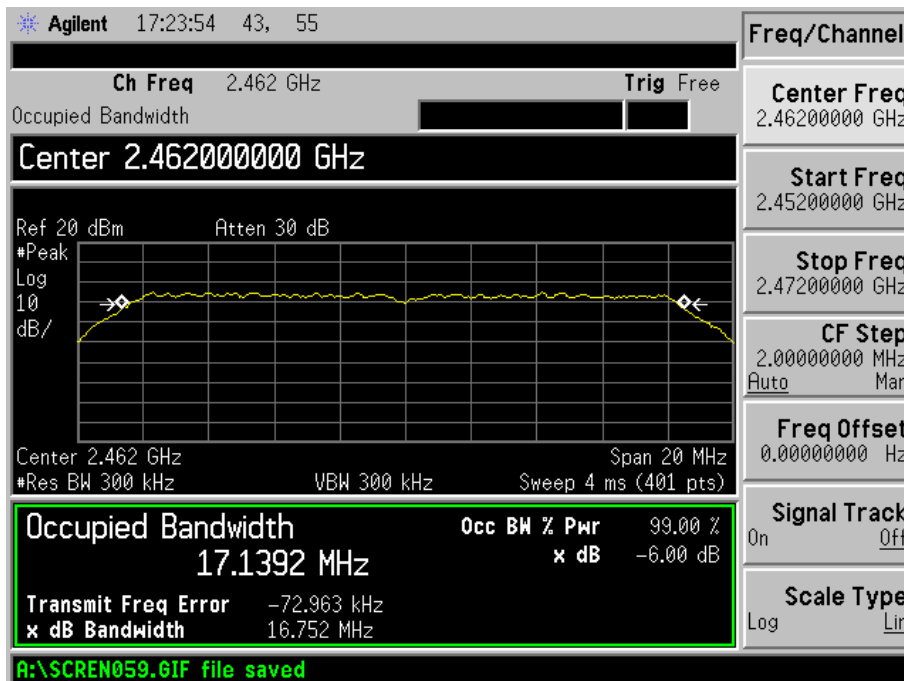


802.11n-HT20-Low Channel

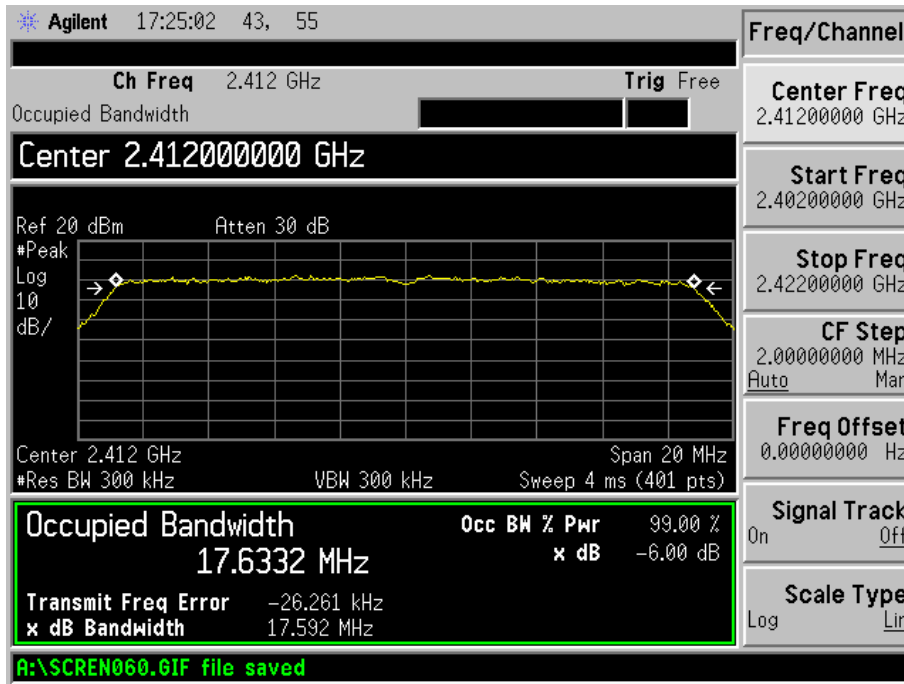


802.11n-HT20-Middle Channel

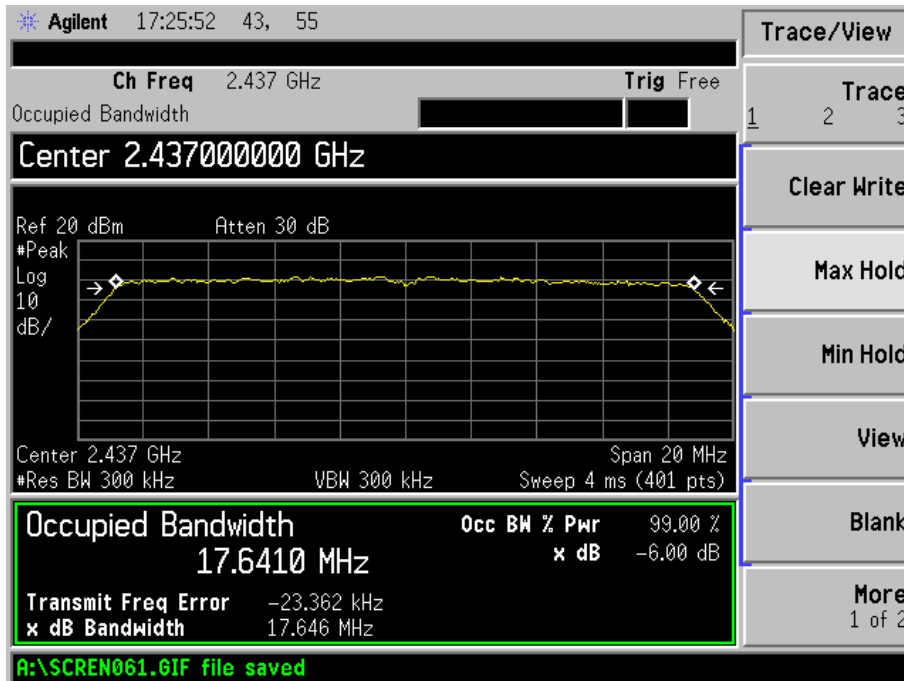


802.11n-HT20-High Channel

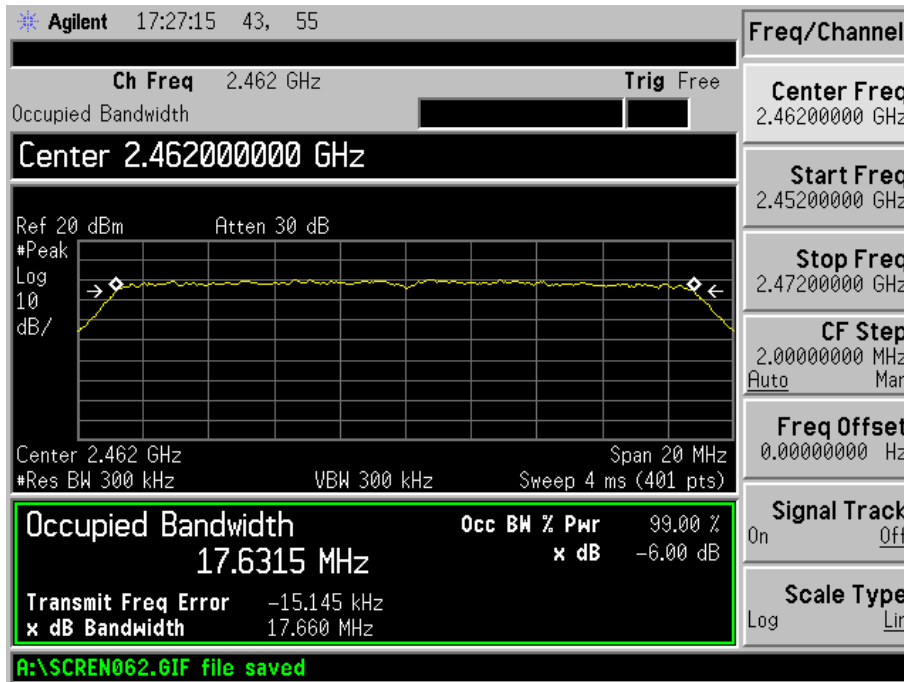


802.11n-HT40-Low Channel

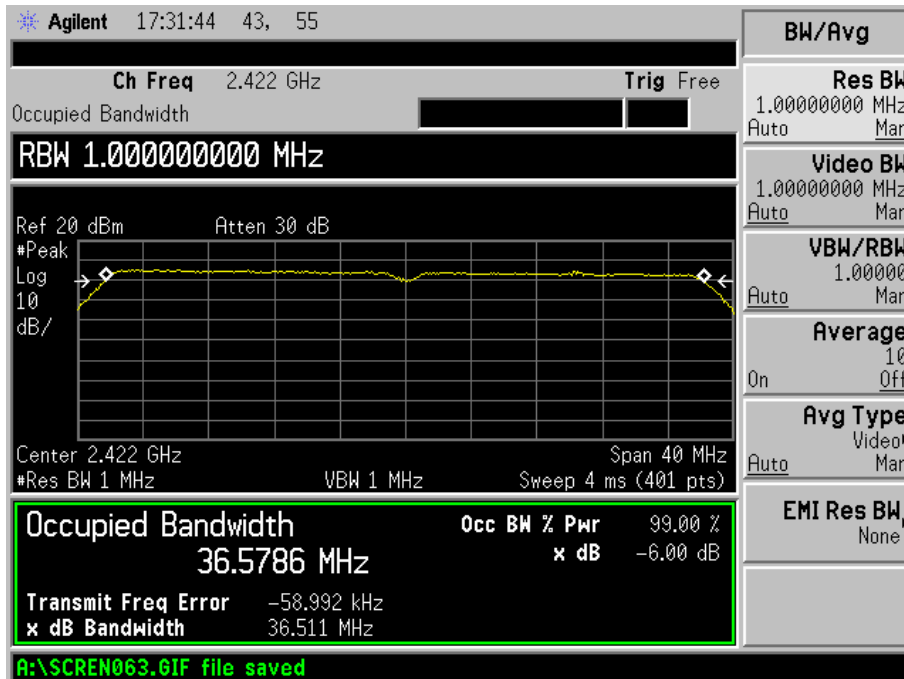

802.11n-HT40-Middle Channel

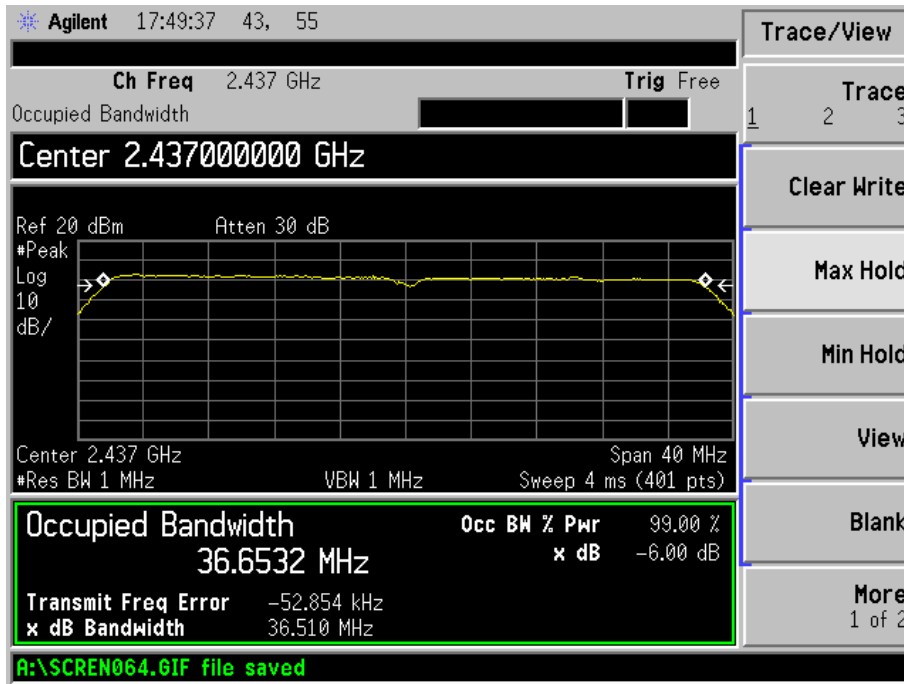

802.11n-HT40-High Channel

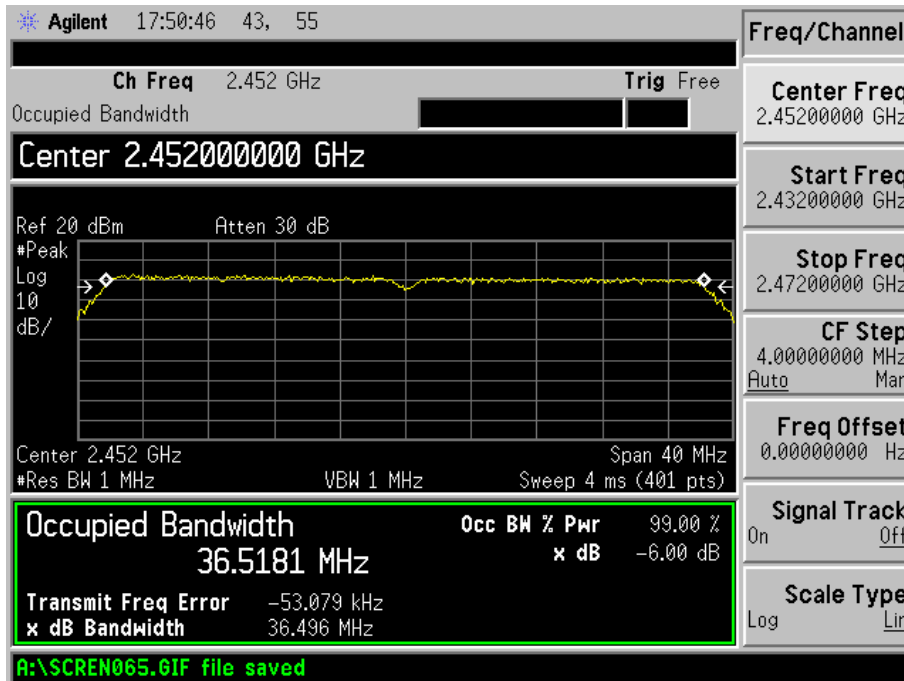

7. RF Output Power

7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

7.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2012-03-28	2013-03-27
Attenuator	ATTEN	ATS100-4-20	/	2012-03-28	2013-03-27

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

7.3 Test Procedure

According to section 15.247(b)-power output of the KDB-558074 (2012),

1. This procedure provides an integrated measurement alternative when the maximum available RBW < EBW.
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Set the span to a value that is 5-30 % greater than the EBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the spectrum analyzer’s integrated band power measurement function with band limits set equal to the EBW band edges (for some analyzers, this may require a manual override to ensure use of peak detector). If the spectrum analyzer does not have a band power function, sum the spectrum levels (in linear power units) at 1 MHz intervals extending across the EBW of the spectrum.

7.4 Environmental Conditions


Temperature:	21° C
Relative Humidity:	55%
ATM Pressure:	1011 mbar

7.5 Summary of Test Results/Plots


Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
802.11b_1Mbps	2412	17.34	54.20	1000
	2437	17.35	54.33	1000
	2462	17.15	51.88	1000
802.11b_11Mbps	2412	17.01	50.23	1000
	2437	17.09	51.17	1000
	2462	17.53	56.62	1000
802.11g_6Mbps	2412	15.01	31.70	1000
	2437	15.17	32.89	1000
	2462	15.09	32.28	1000
802.11g_54Mbps	2412	15.46	35.16	1000
	2437	15.66	36.81	1000
	2462	15.54	35.81	1000
802.11n HT20_MCS0	2412	15.05	31.99	1000
	2437	15.66	36.81	1000
	2462	15.03	31.84	1000
802.11n HT20_MCS7	2412	15.01	31.70	1000
	2437	15.30	33.88	1000
	2462	15.54	35.81	1000
802.11n HT40_MCS0	2422	15.16	32.81	1000
	2437	15.58	36.14	1000
	2452	15.06	32.06	1000
802.11n HT40_MCS7	2422	15.09	32.28	1000
	2437	15.68	36.98	1000
	2452	15.13	32.58	1000

Please refer to the following test plots:


802.11b-1Mbps-Low Channel

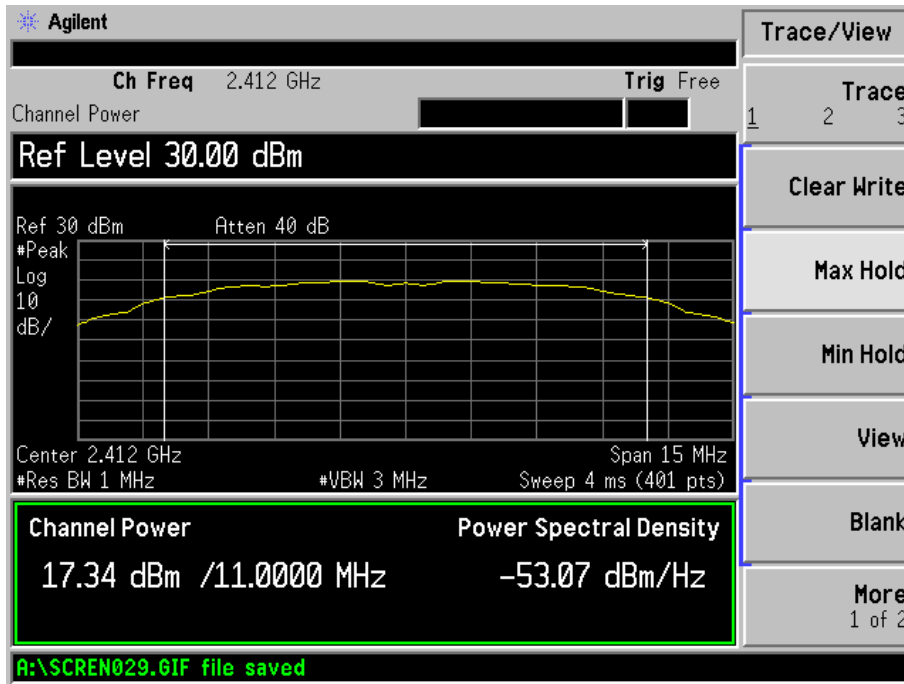


802.11b-1Mbps-Middle Channel

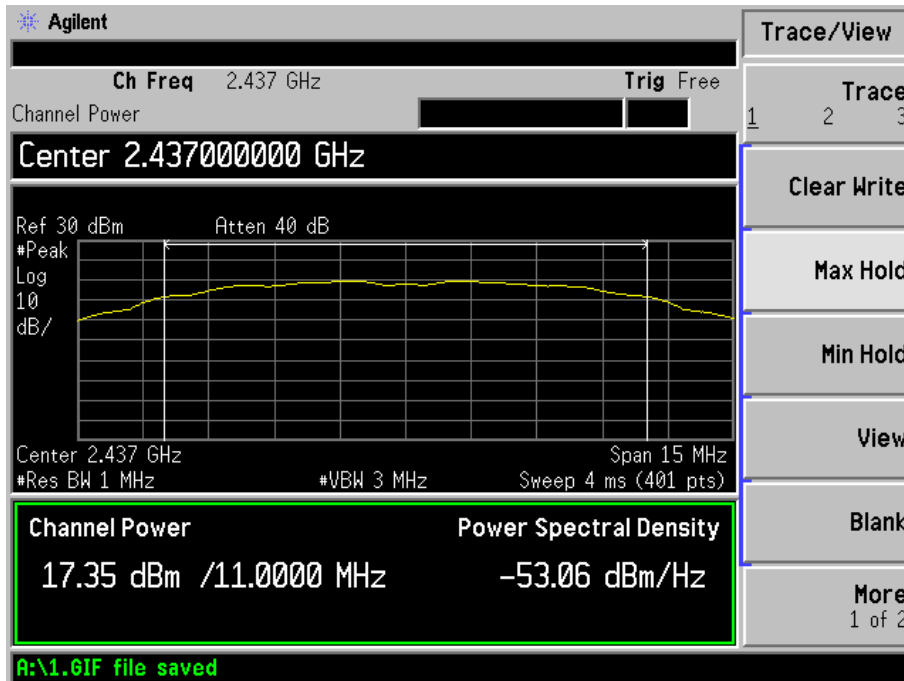


802.11b-1Mbps-High Channel

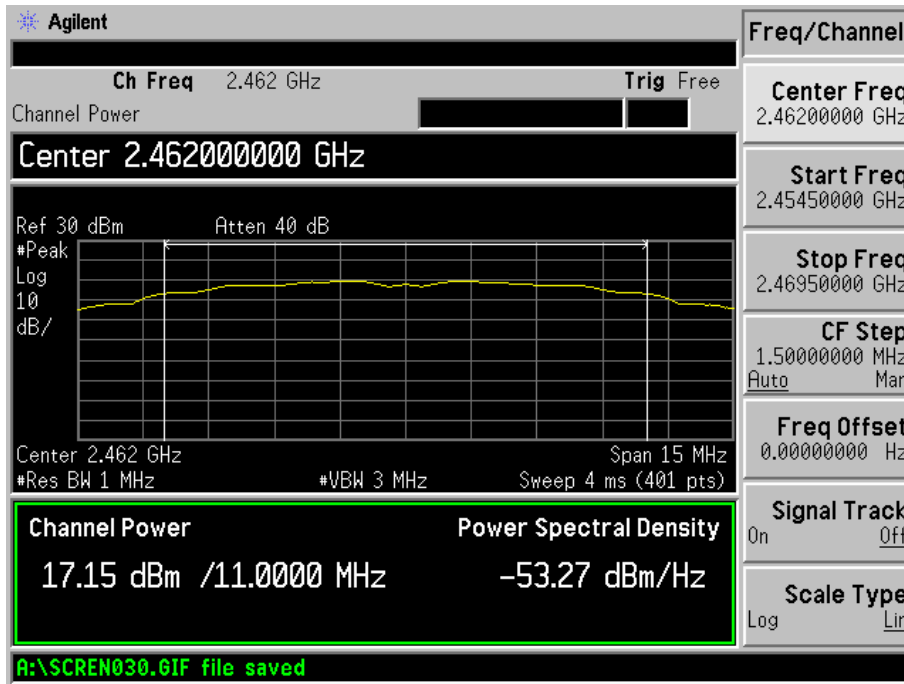


802.11b11Mbps-Low Channel

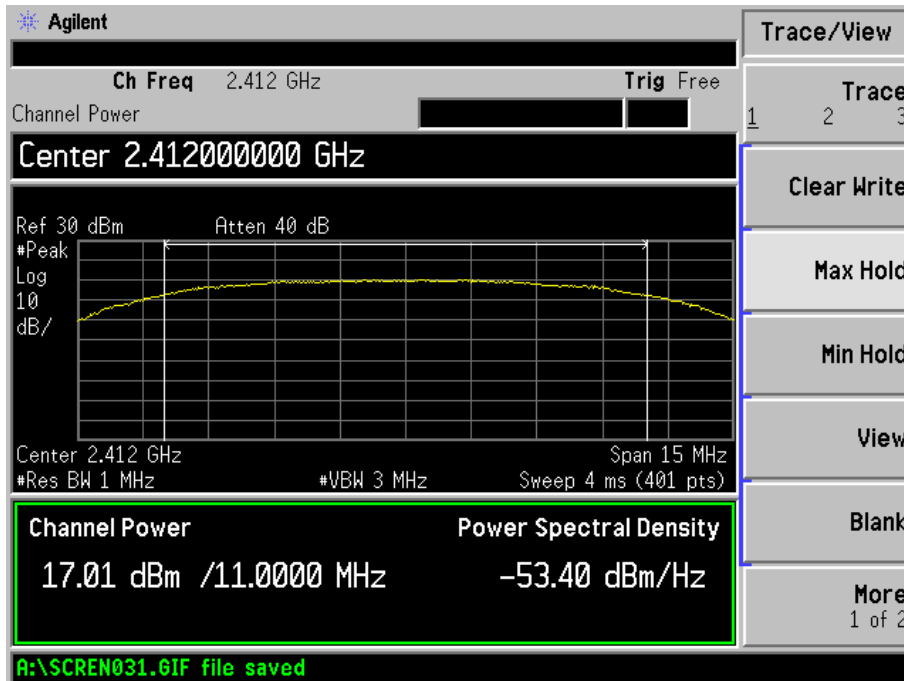


802.11b-11Mbps-Middle Channel

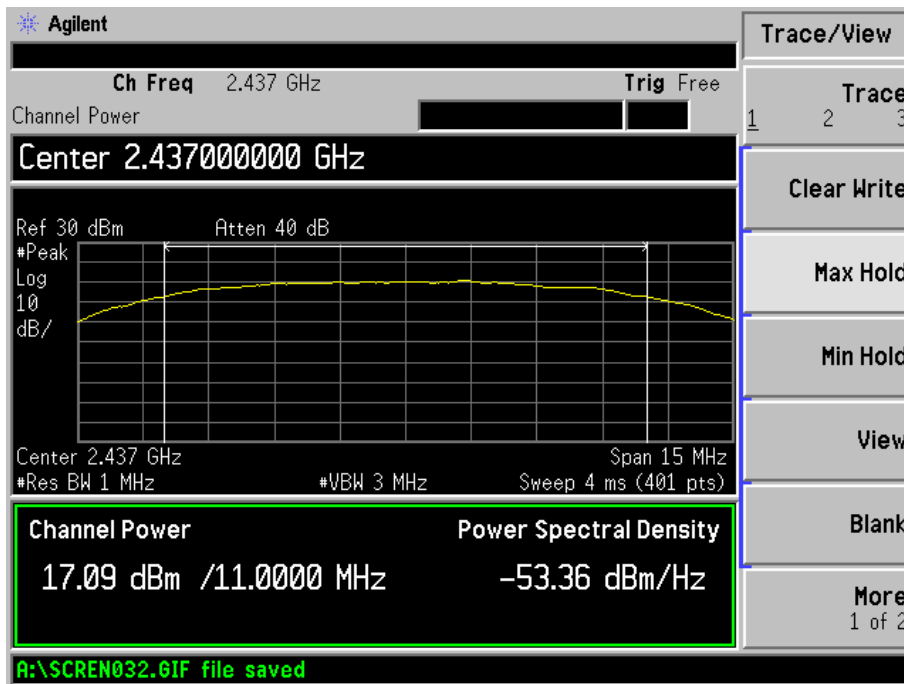


802.11b-11Mbps-High Channel

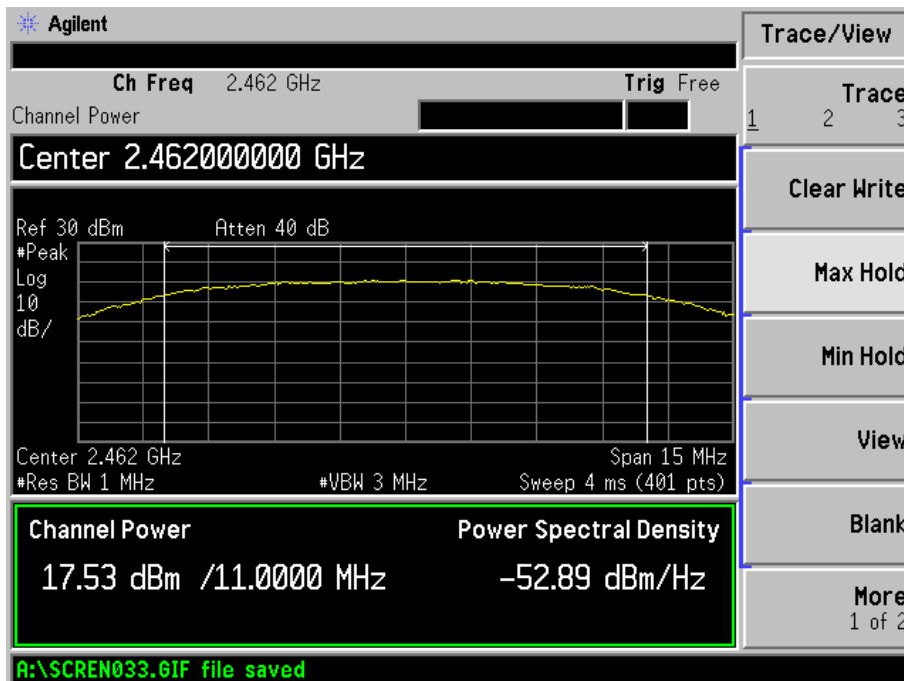


802.11g-6Mbps-Low Channel

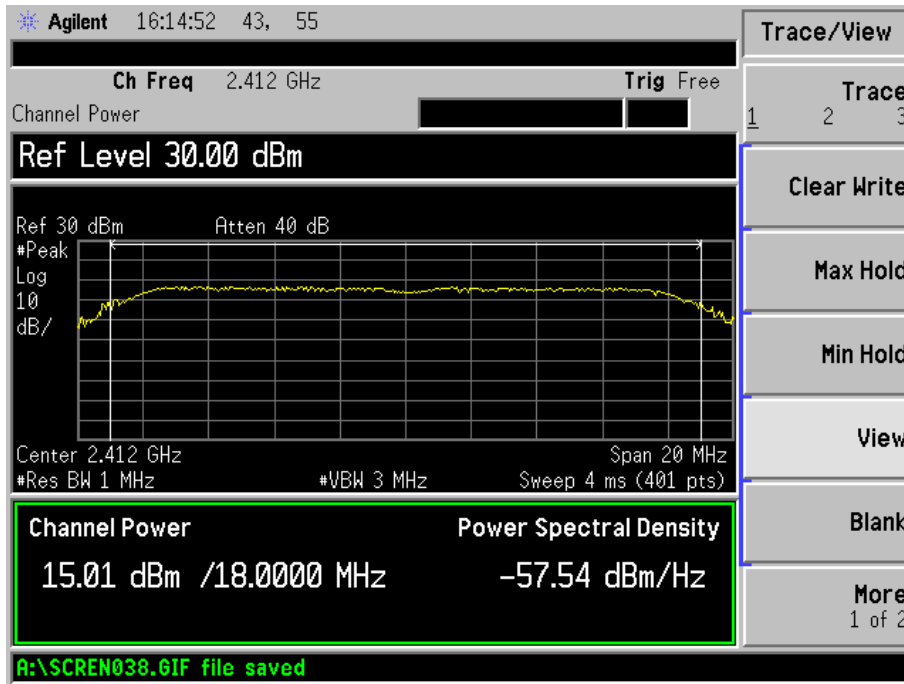


802.11g-6Mbps-Middle Channel

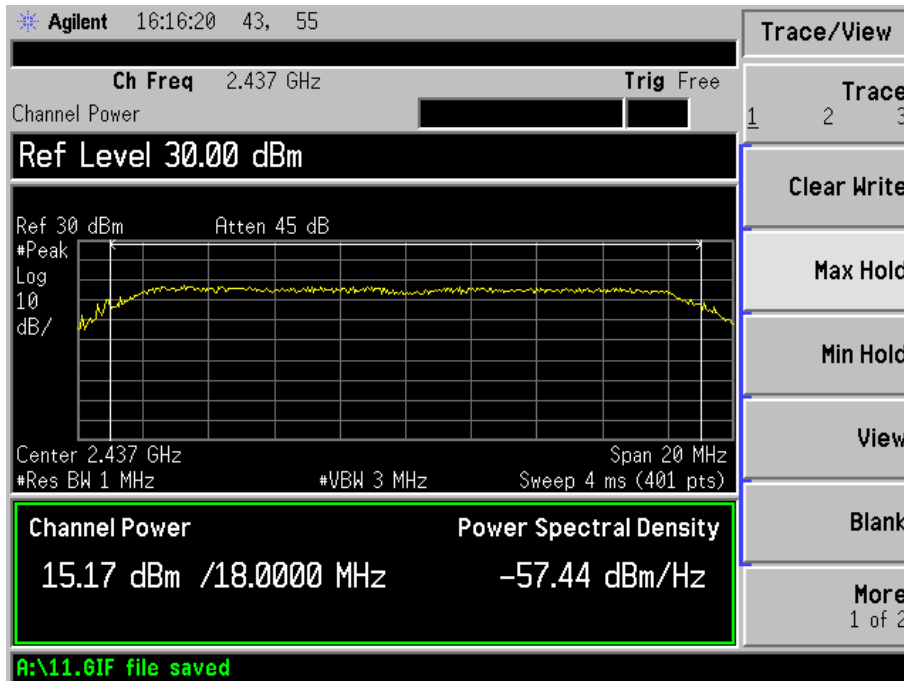


802.11 g-6Mbps-High Channel

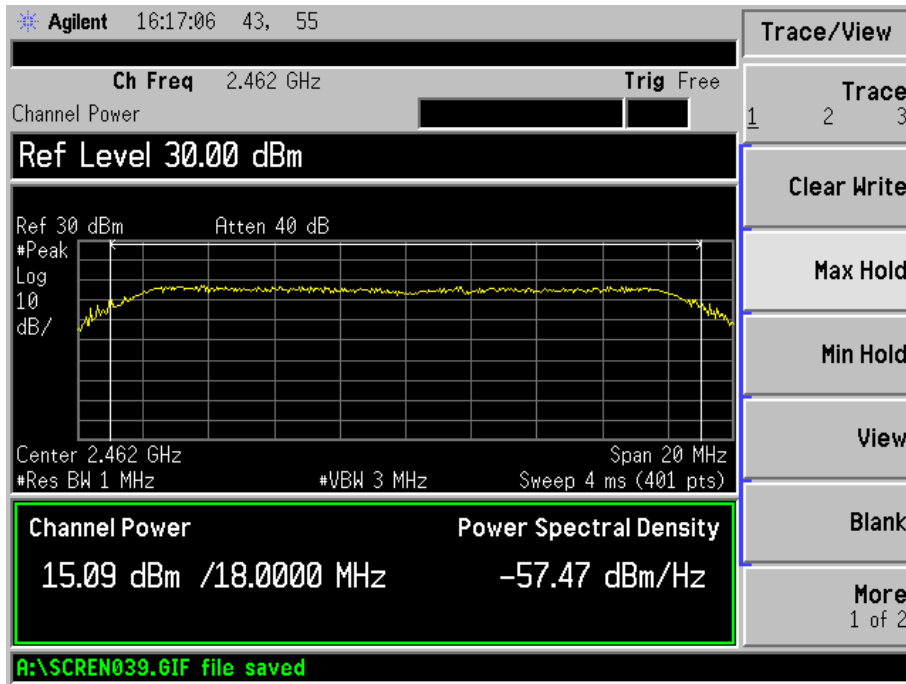


802.11g-54Mbps-Lows Channel

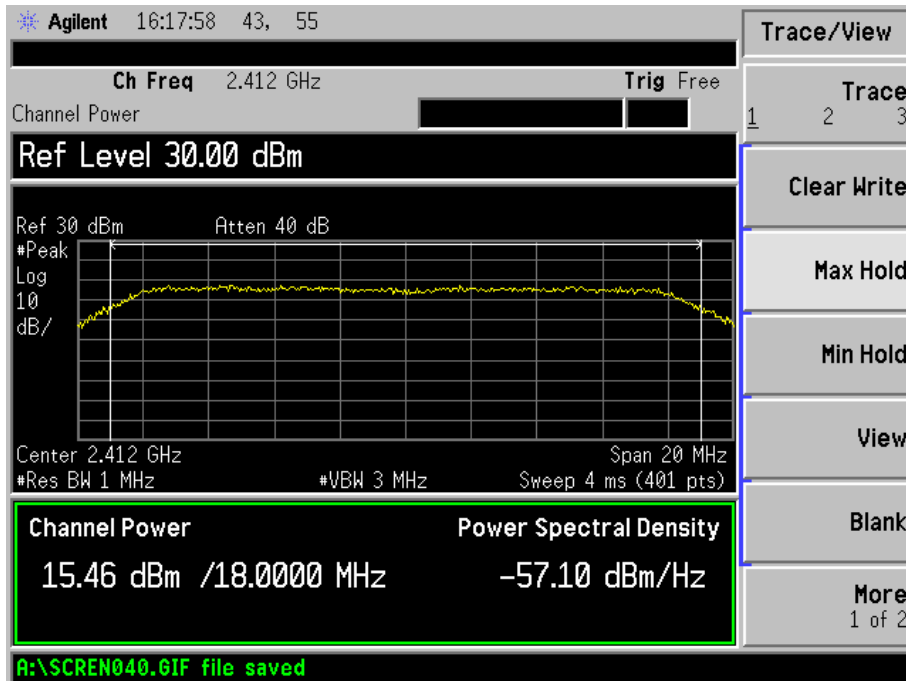


802.11g-54Mbps-Middle Channel

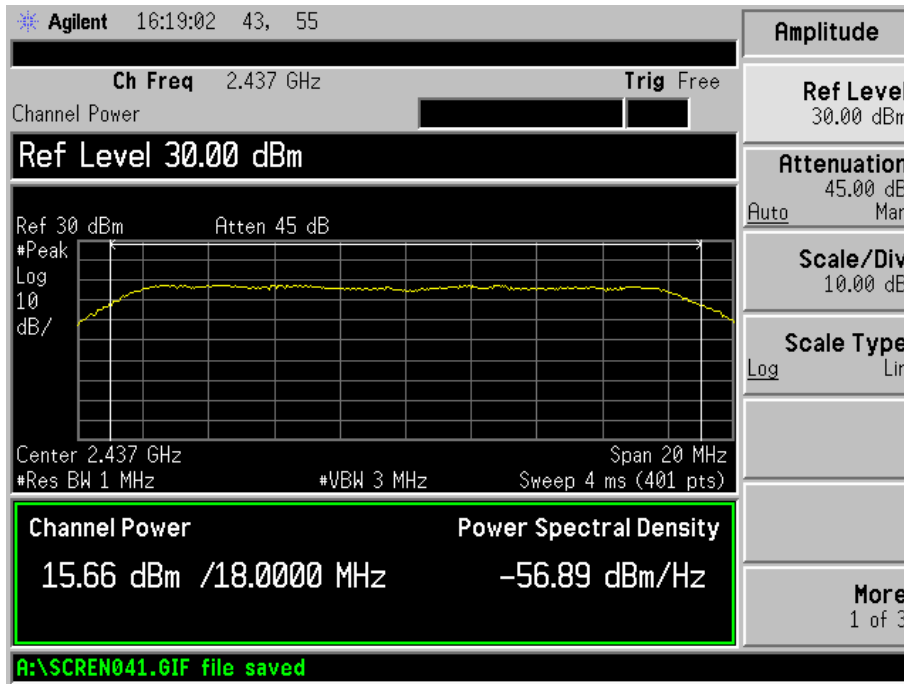


802.11g-54Mbps-High Channel

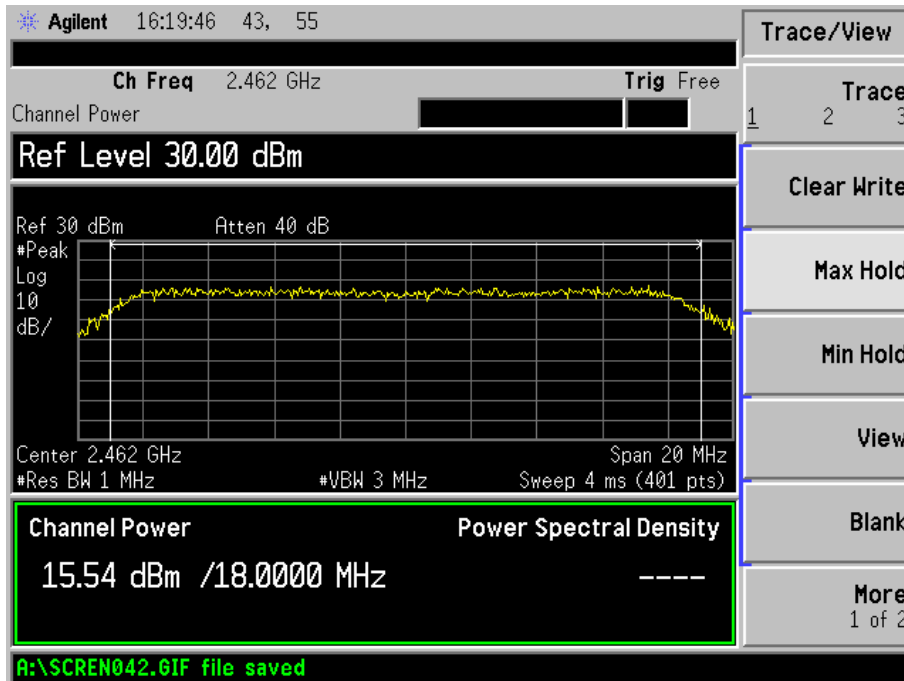


802.11n-HT20-MCS0-Low Channel

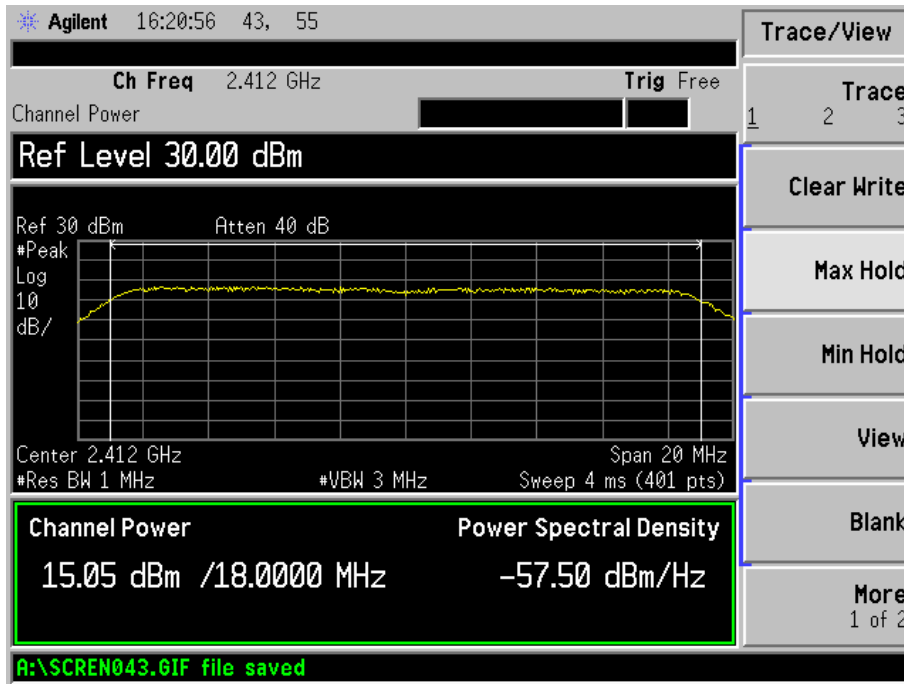


802.11n-HT20-MCS0-Middle Channel

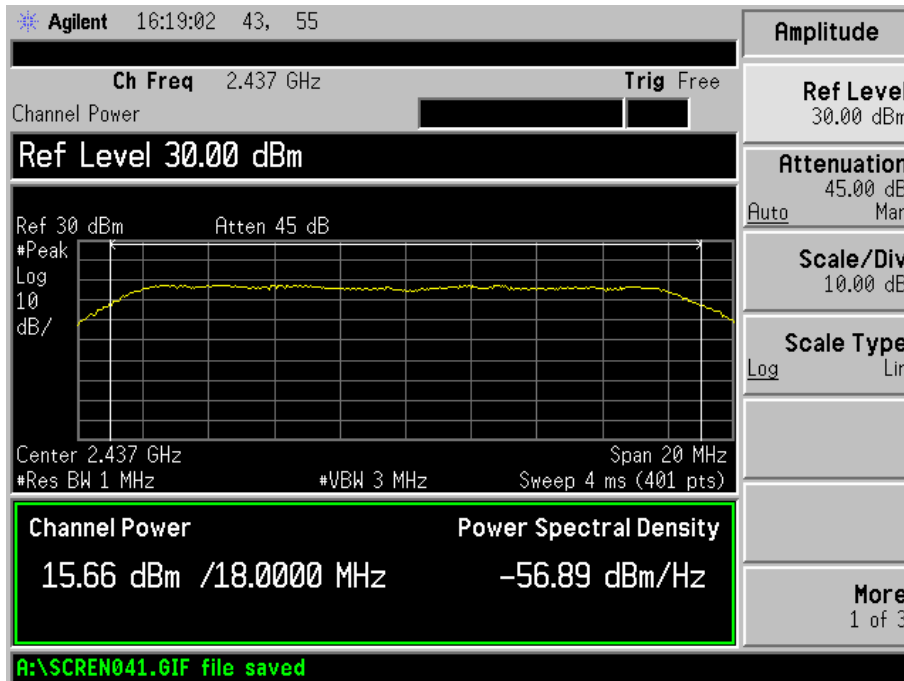


802.11n-HT20-MCS0-High Channel

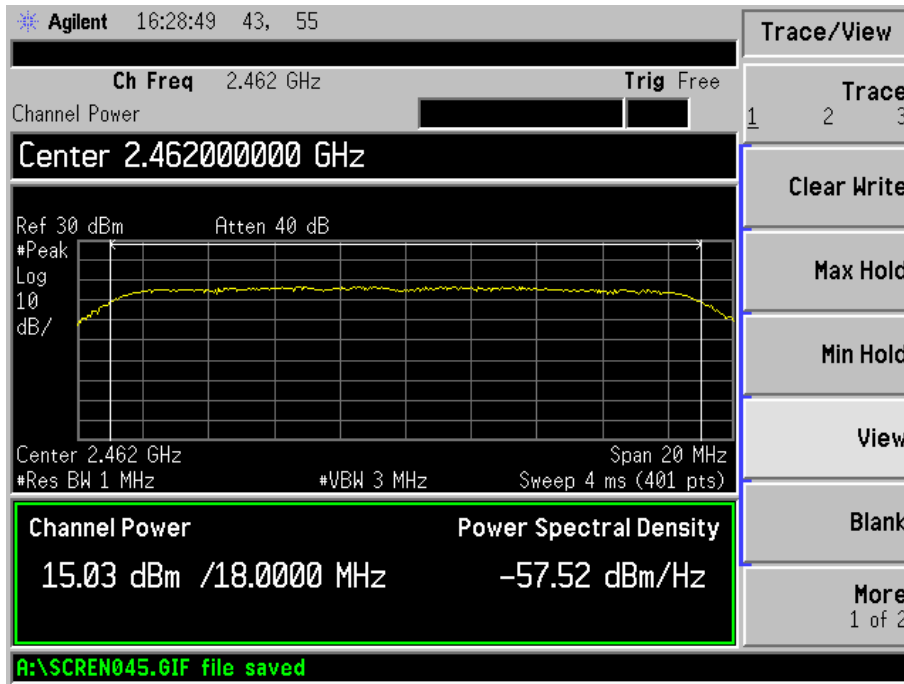


802.11n-HT20-MCS7-Low Channel

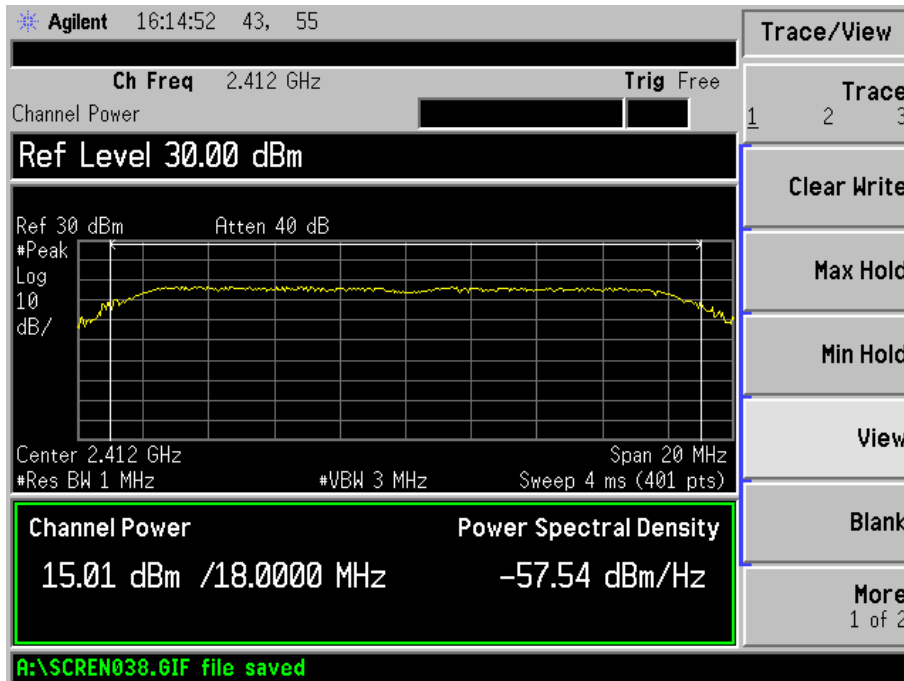


802.11n-HT20-MCS7-Middle Channel

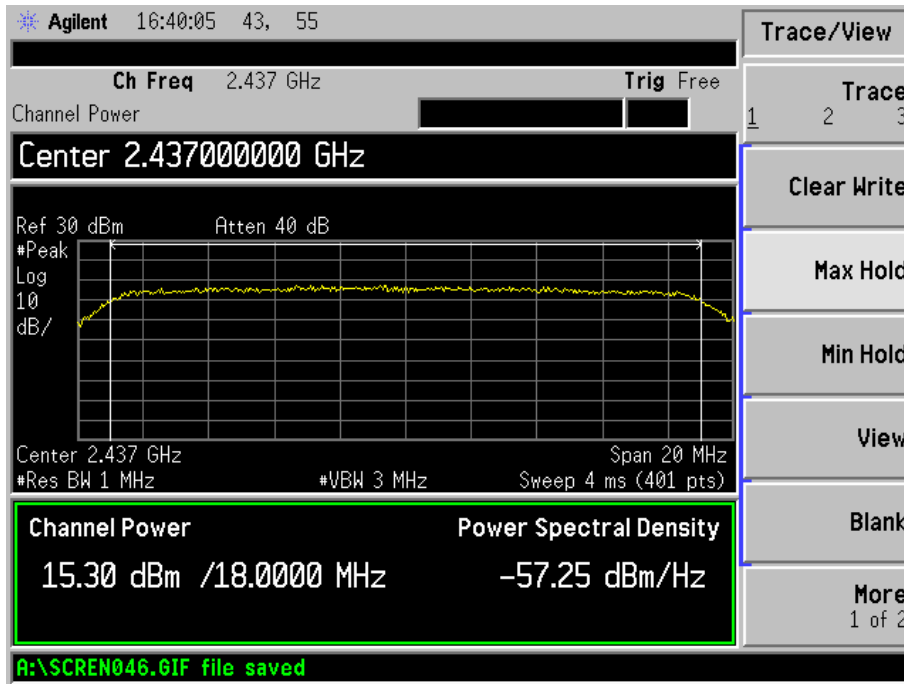


802.11n-HT20-MCS7-High Channel

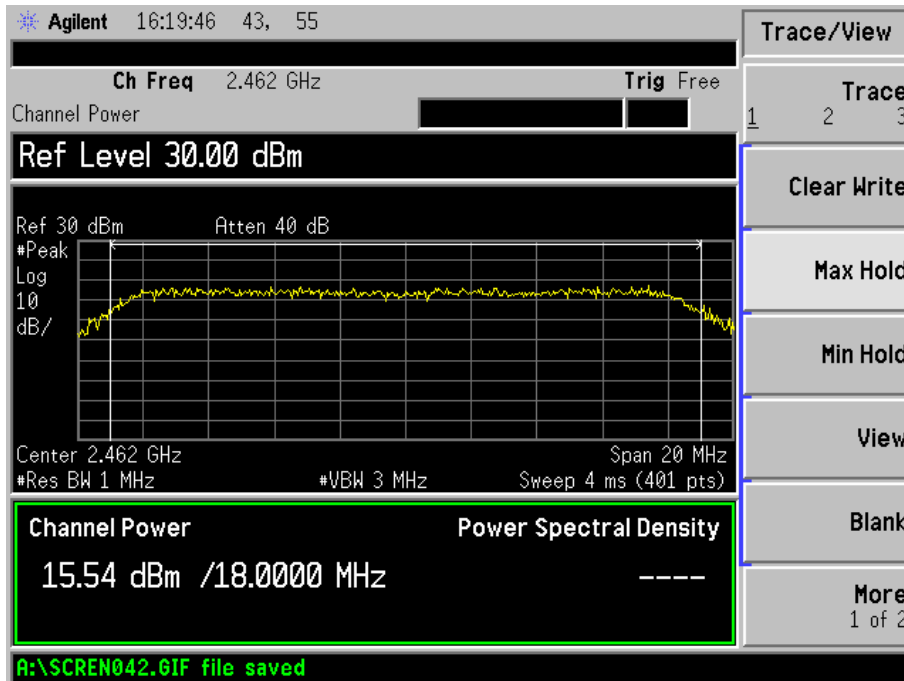


802.11n-HT40-MCS0-Low Channel

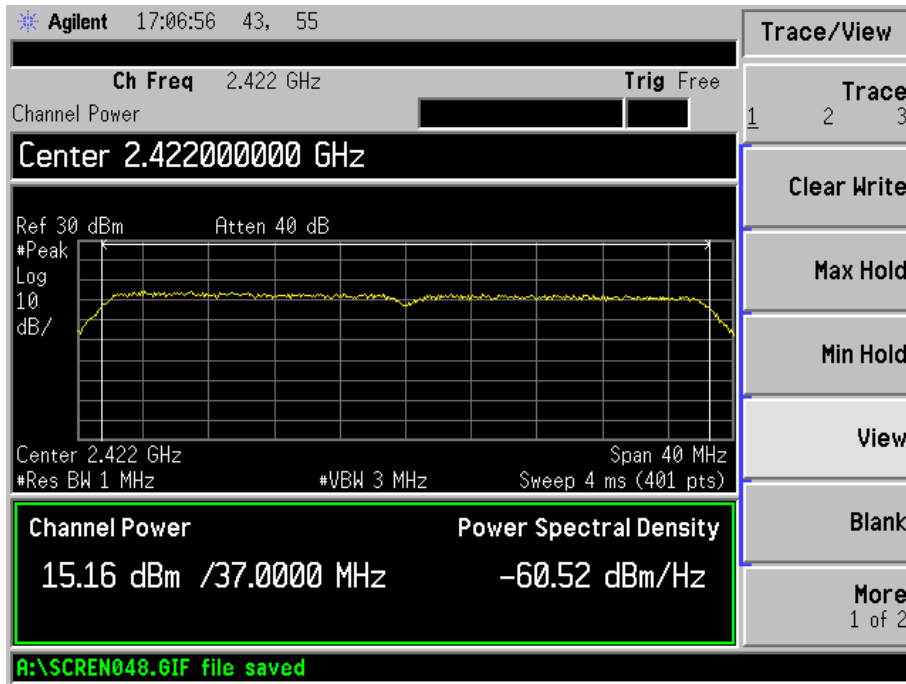


802.11n-HT40-MCS0-Middle Channel

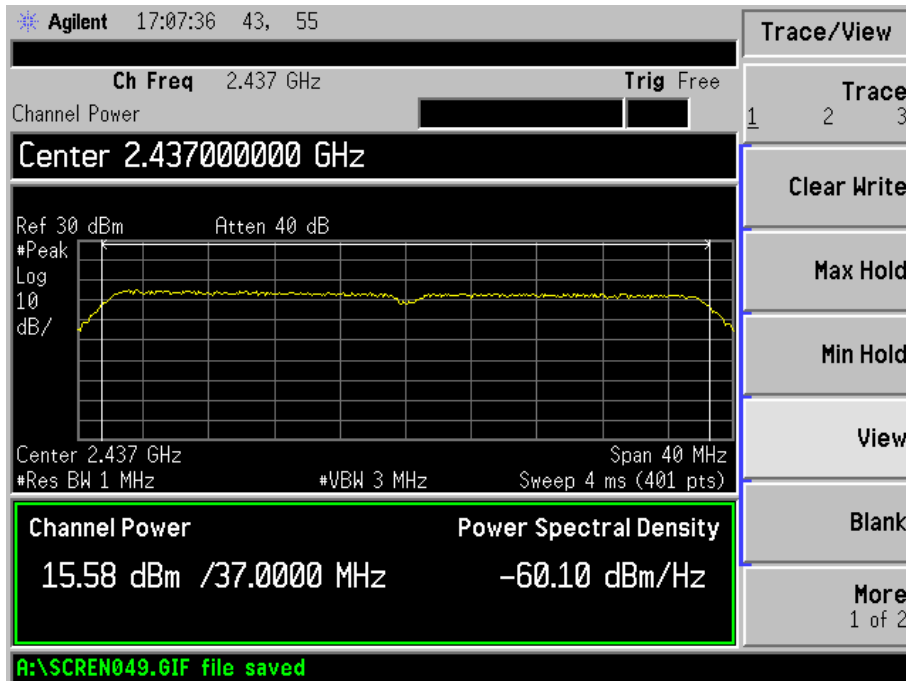


802.11n-HT40-MCS0-High Channel

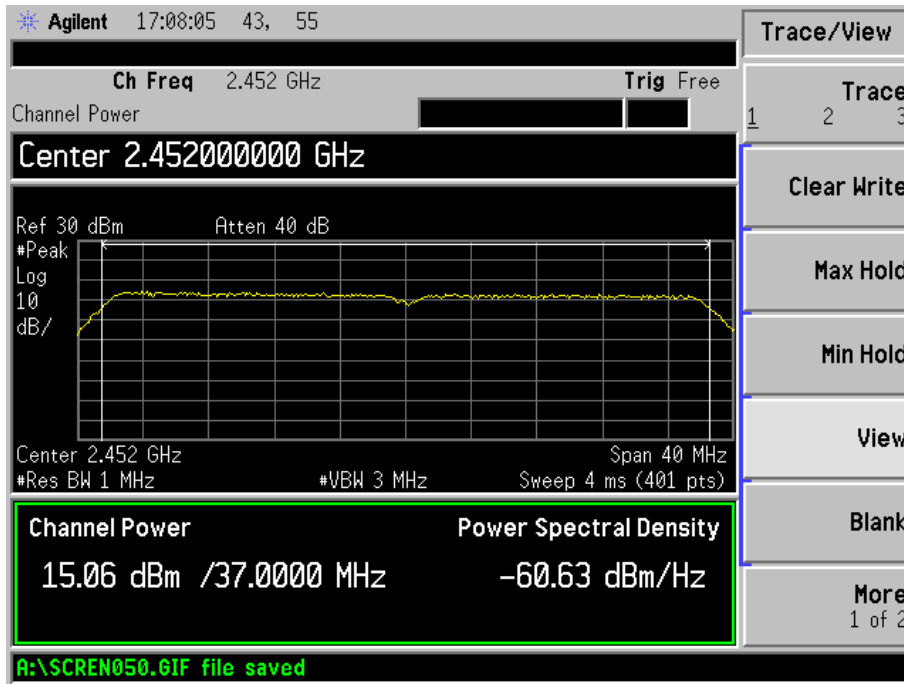


802.11n-HT40-MCS7-Low Channel

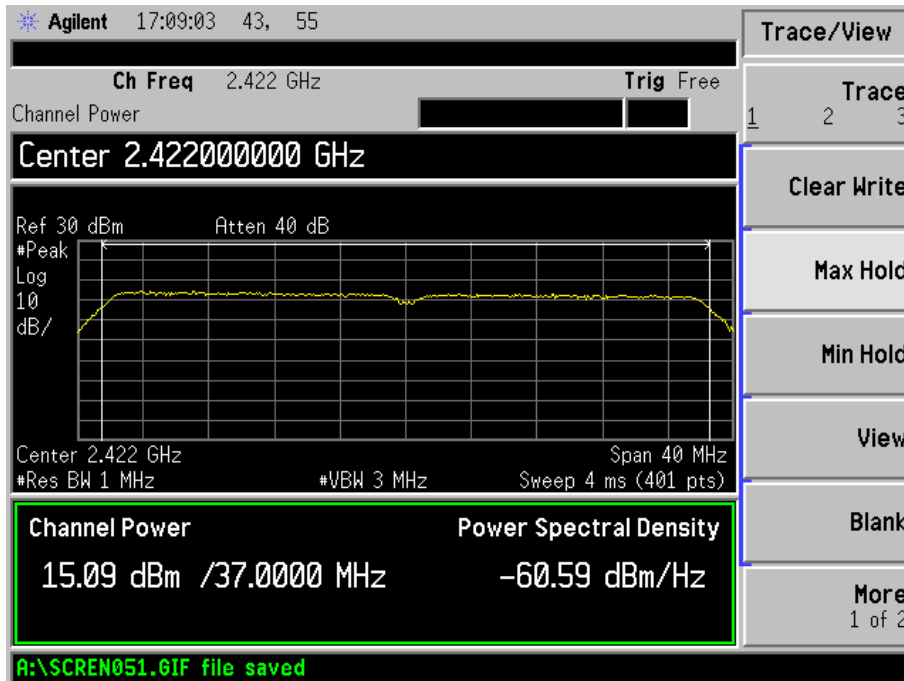

802.11n-HT40-MCS7-Middle Channel

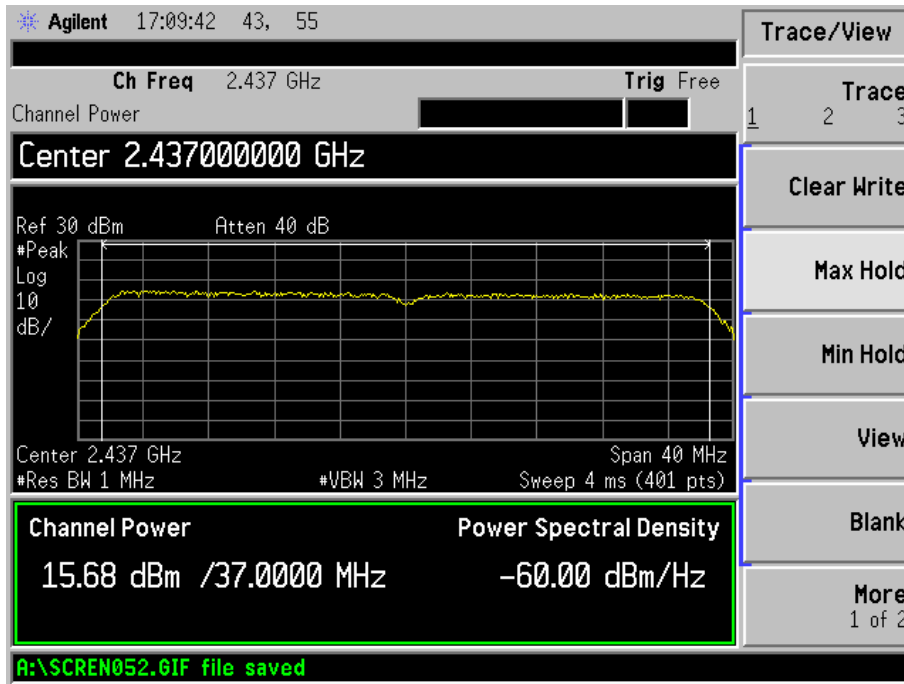

802.11n-HT40-MCS7-High Channel

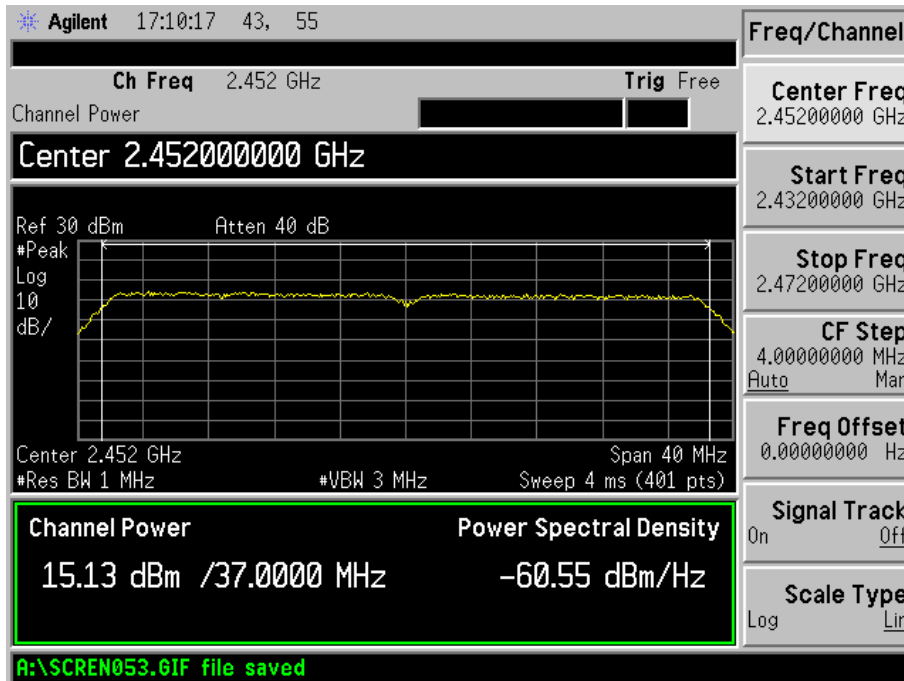

8. Field Strength of Spurious Emissions

8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.


8.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24
Horn Antenna	ETS	3116B	00088203	2012-02-25	2013-02-24
Loop Antenna	SCHWARZECK	HFRA 5165	9365	2012-02-25	2013-02-24

8.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

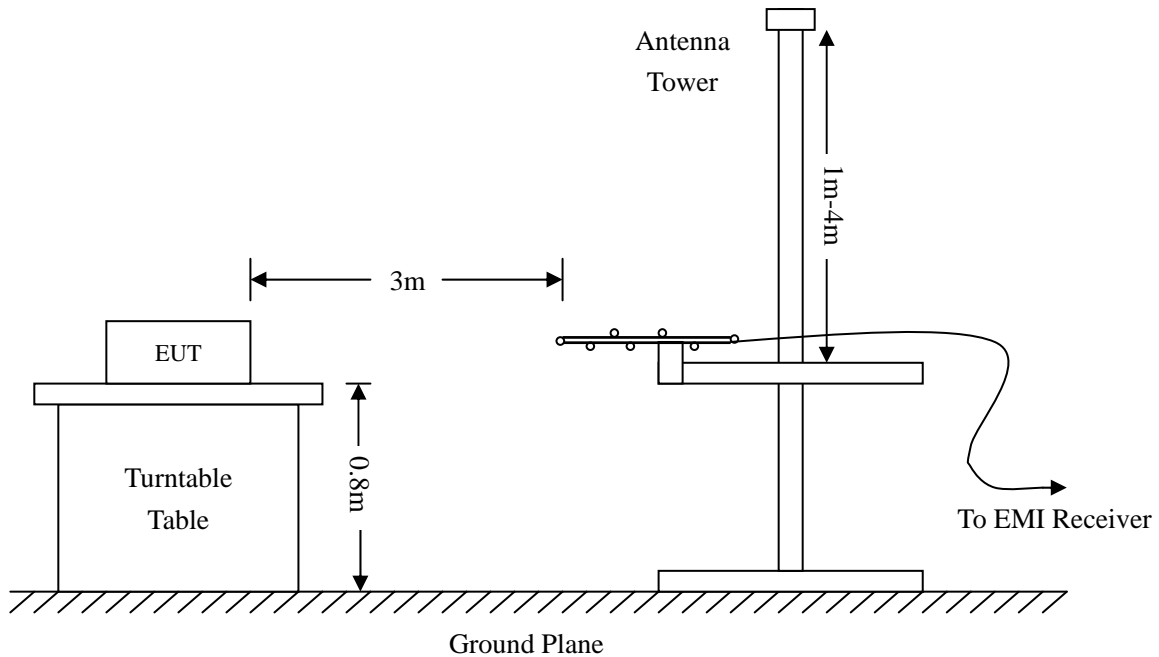

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dBμV means the emission is 6dBμV below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

8.6 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

8.7 Summary of Test Results/Plots


According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst margin of:

**-7.87 dB μ V at 32.4059 MHz in the Vertical polarization for 802.11n-HT20 Transmitting Middle Channel,
9kHz to 25 GHz, 3 Meters**

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: GSM/GPRS Dual-band Mobile Phone
 Tested Model: R623
 Operating Condition: 802.11b Transmitting Low Channel-2412MHz
 Comment: DC 3.7V Battery
 Test Specification: Horizontal

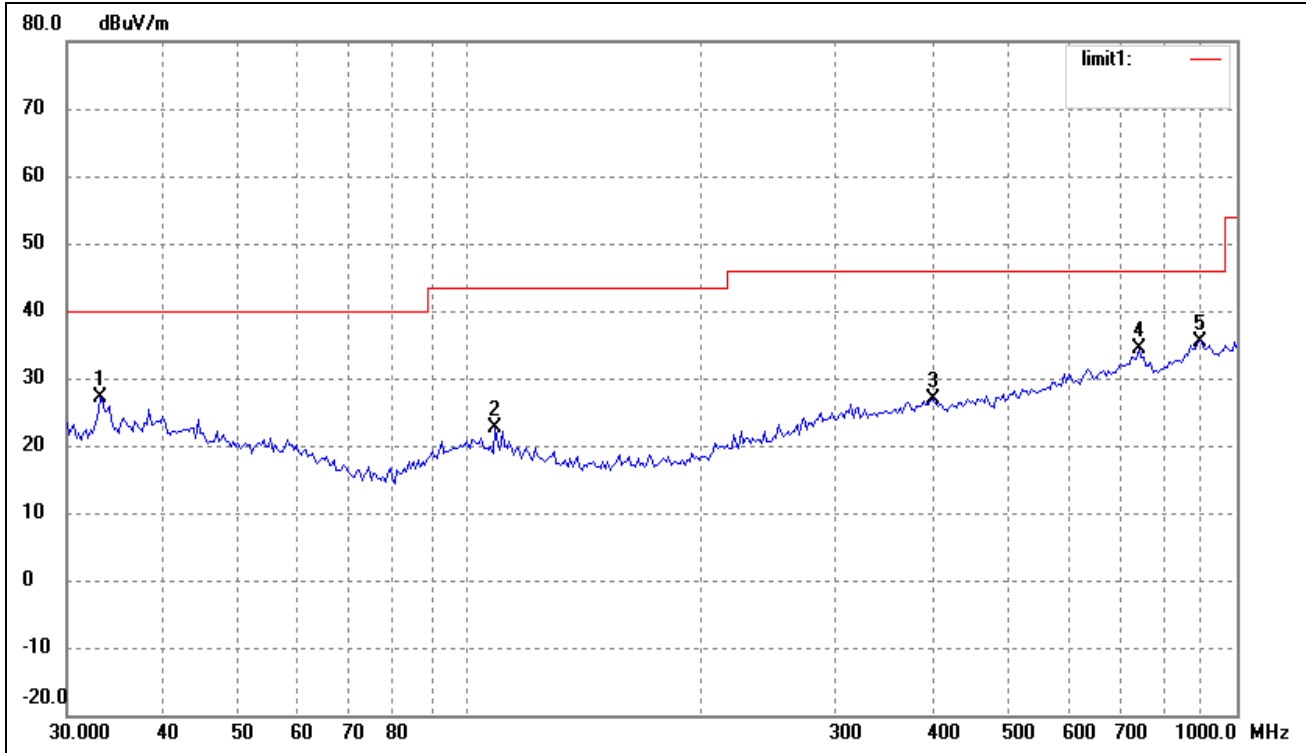

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	18.58	8.56	27.14	40.00	-12.86	254	100	peak
2	108.2667	16.51	6.02	22.53	43.50	-20.97	113	100	peak
3	401.8385	15.51	11.47	26.98	46.00	-19.02	284	100	peak
4	744.8661	16.35	17.95	34.30	46.00	-11.70	360	100	peak
5	893.8567	16.23	19.27	35.50	46.00	-10.50	100	100	peak

Test Specification: Vertical

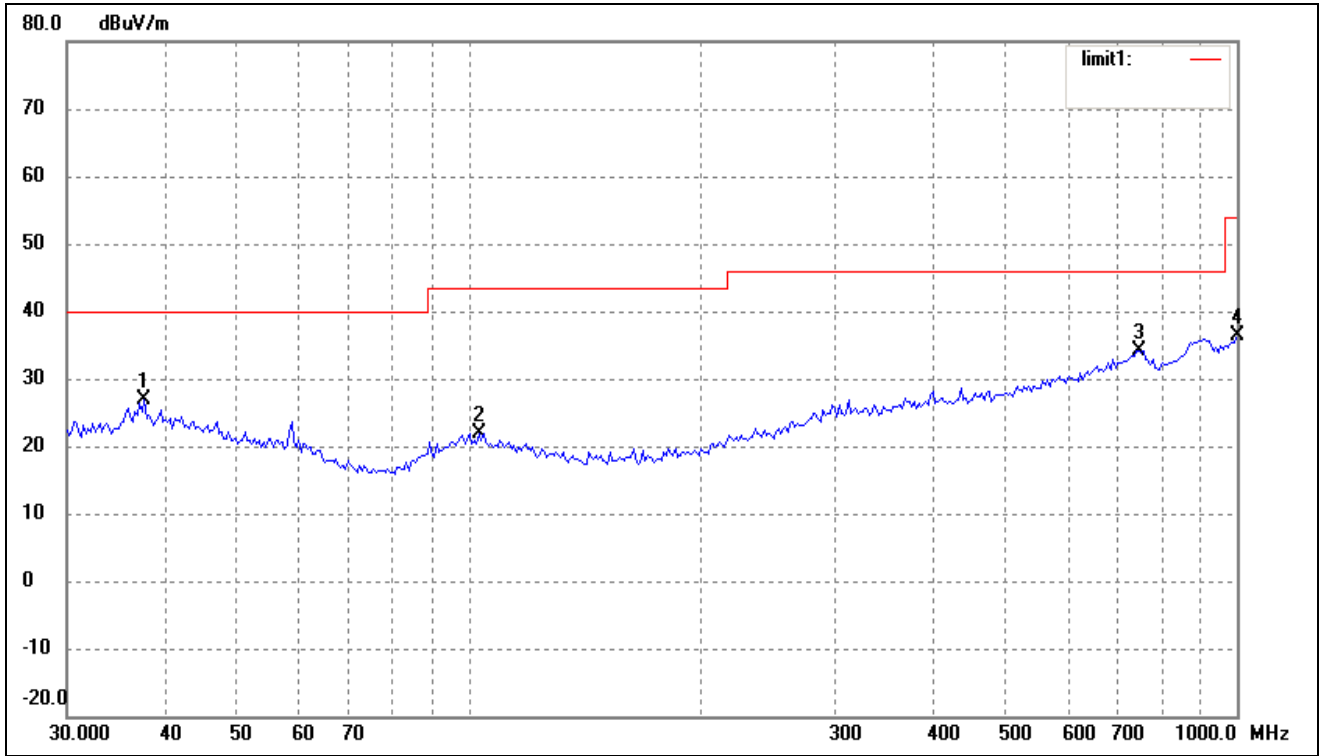


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.8121	17.52	9.33	26.85	40.00	-13.15	114	100	peak
2	103.0800	15.37	6.54	21.91	43.50	-21.59	270	100	peak
3	744.8661	16.16	17.95	34.11	46.00	-11.89	360	100	peak
4	1000.0000	16.41	19.90	36.31	54.00	-17.69	116	100	peak

Operating Condition: 802.11b Transmitting Middle Channel-2437MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

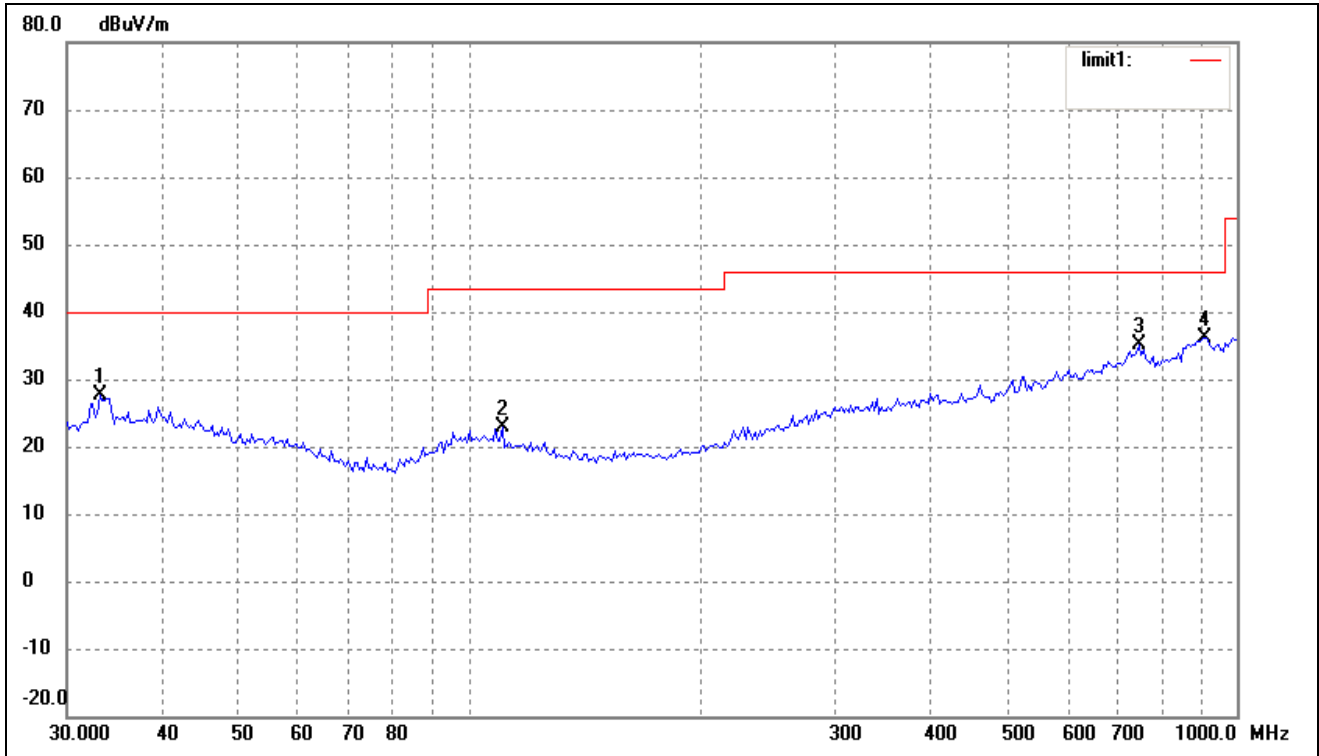

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	19.05	8.56	27.61	40.00	-12.39	178	100	peak
2	110.5687	16.99	5.80	22.79	43.50	-20.71	224	100	peak
3	744.8661	17.06	17.95	35.01	46.00	-10.99	160	100	peak
4	906.4824	16.94	19.15	36.09	46.00	-9.91	290	100	peak

Test Specification: Vertical

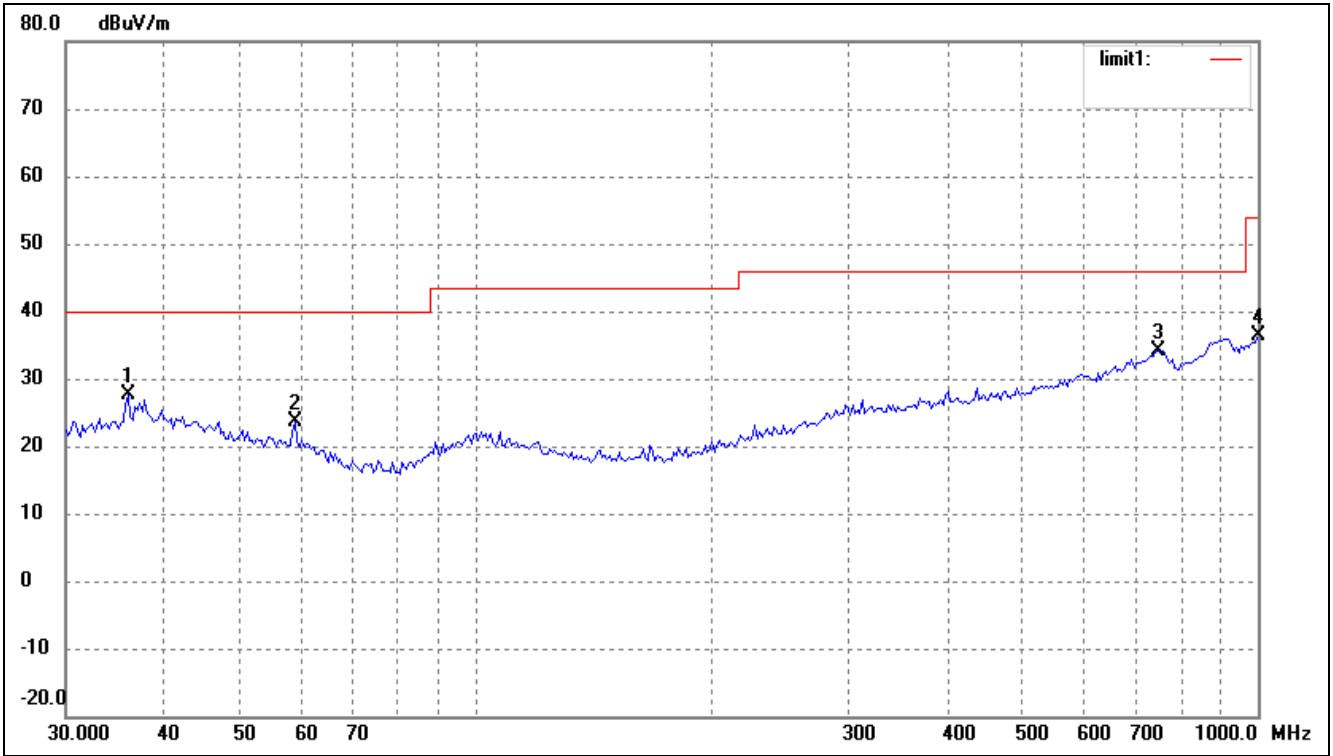


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.0007	18.59	9.04	27.63	40.00	-12.37	256	100	peak
2	58.8185	17.75	5.81	23.56	40.00	-16.44	360	100	peak
3	744.8661	16.16	17.95	34.11	46.00	-11.89	360	100	peak
4	1000.0000	16.41	19.90	36.31	54.00	-17.69	360	100	peak

Operating Condition: 802.11b Transmitting High Channel-2462MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

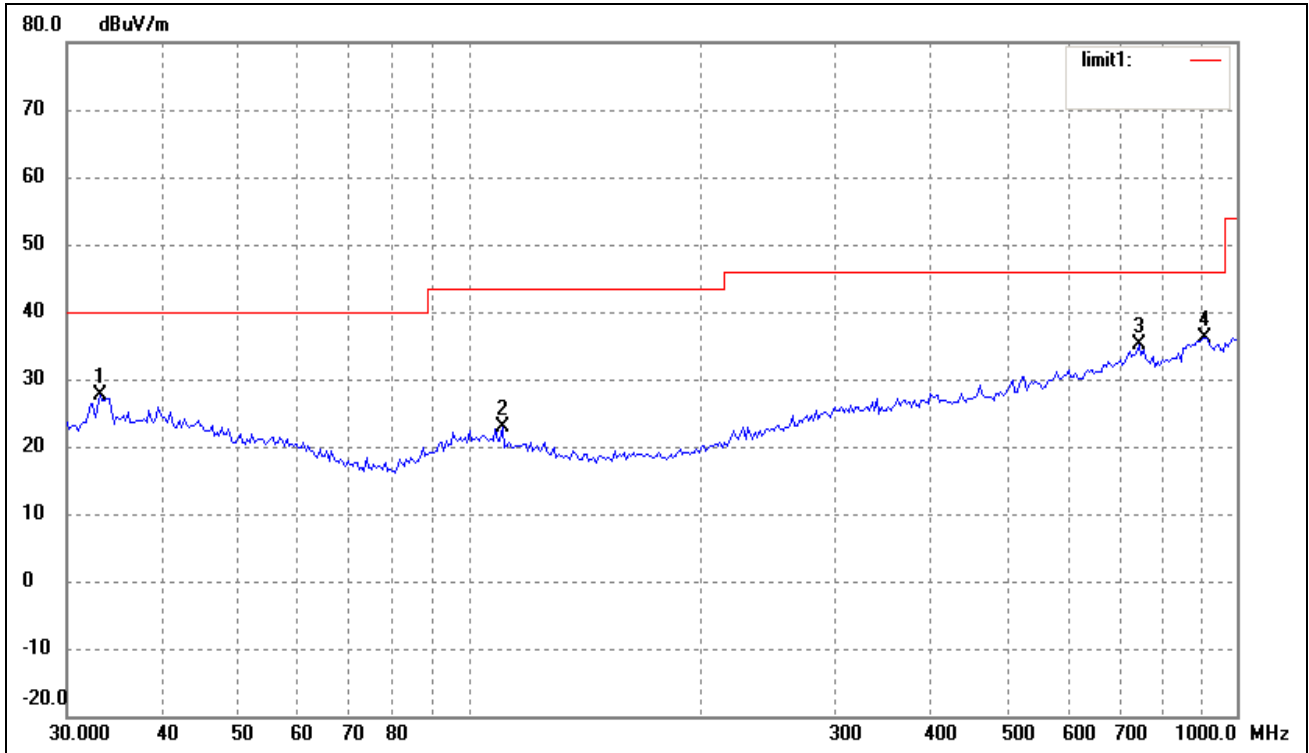

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.0950	19.05	8.56	27.61	40.00	-12.39	176	100	peak
2	110.5687	16.99	5.80	22.79	43.50	-20.71	255	100	peak
3	744.8661	17.06	17.95	35.01	46.00	-10.99	360	100	peak
4	906.4824	16.94	19.15	36.09	46.00	-9.91	178	100	peak


Test Specification: Vertical

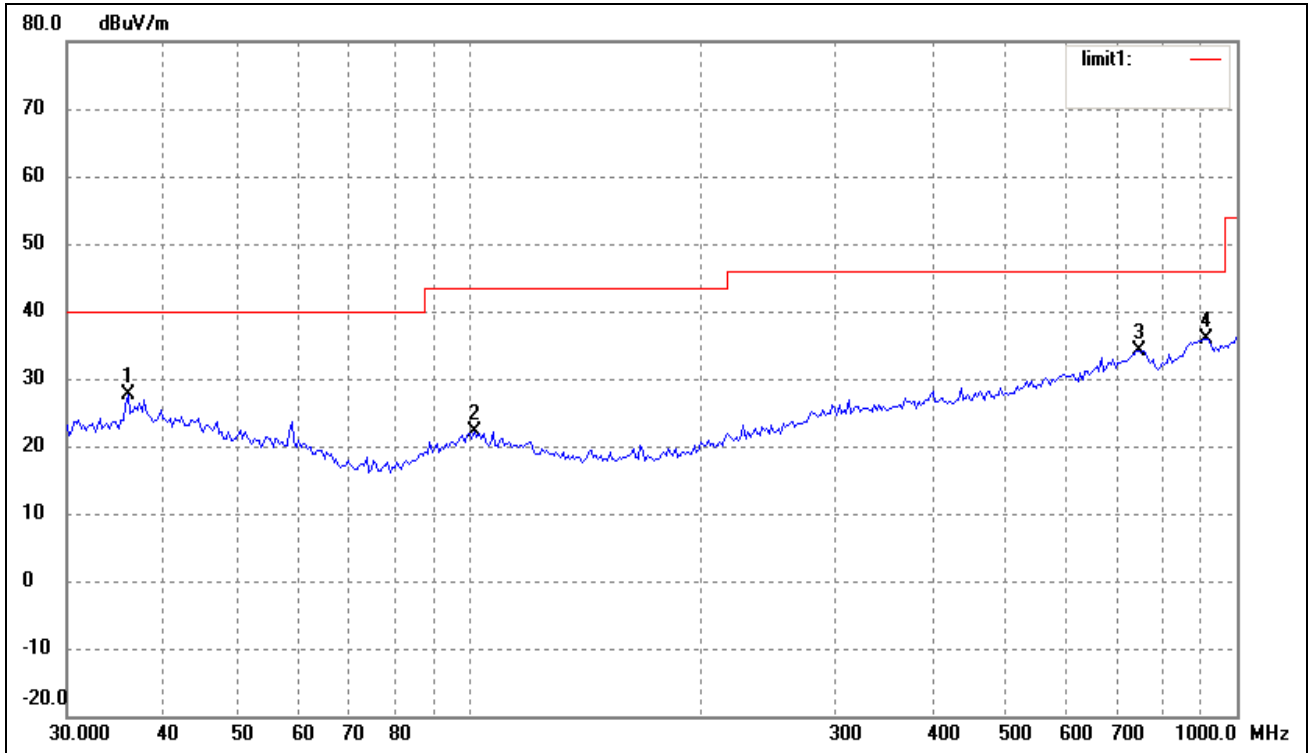

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.0007	18.59	9.04	27.63	40.00	-12.37	360	100	peak
2	101.6443	15.50	6.67	22.17	43.50	-21.33	225	100	peak
3	744.8661	16.16	17.95	34.11	46.00	-11.89	160	100	peak
4	912.8620	16.92	18.93	35.85	46.00	-10.15	310	100	peak


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: GSM/GPRS Dual-band Mobile Phone
 Tested Model: R623
 Operating Condition: 802.11g Transmitting Low Channel-2412MHz
 Comment: DC 3.7V Battery
 Test Specification: Horizontal

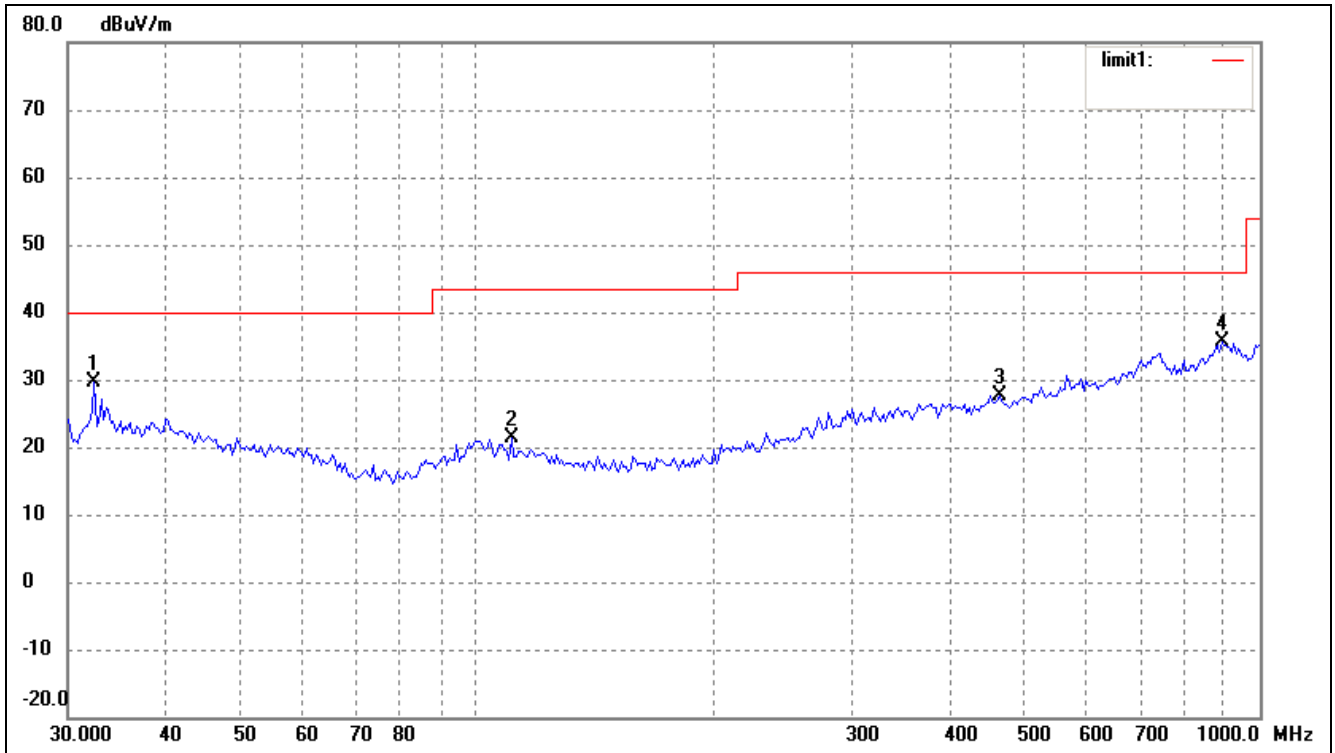

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	21.23	8.44	29.67	40.00	-10.33	174	100	peak
2	110.5687	15.56	5.80	21.36	43.50	-22.14	160	100	peak
3	465.5994	16.02	11.69	27.71	46.00	-18.29	320	100	peak
4	893.8567	16.34	19.27	35.61	46.00	-10.39	360	100	peak

Test Specification: Vertical

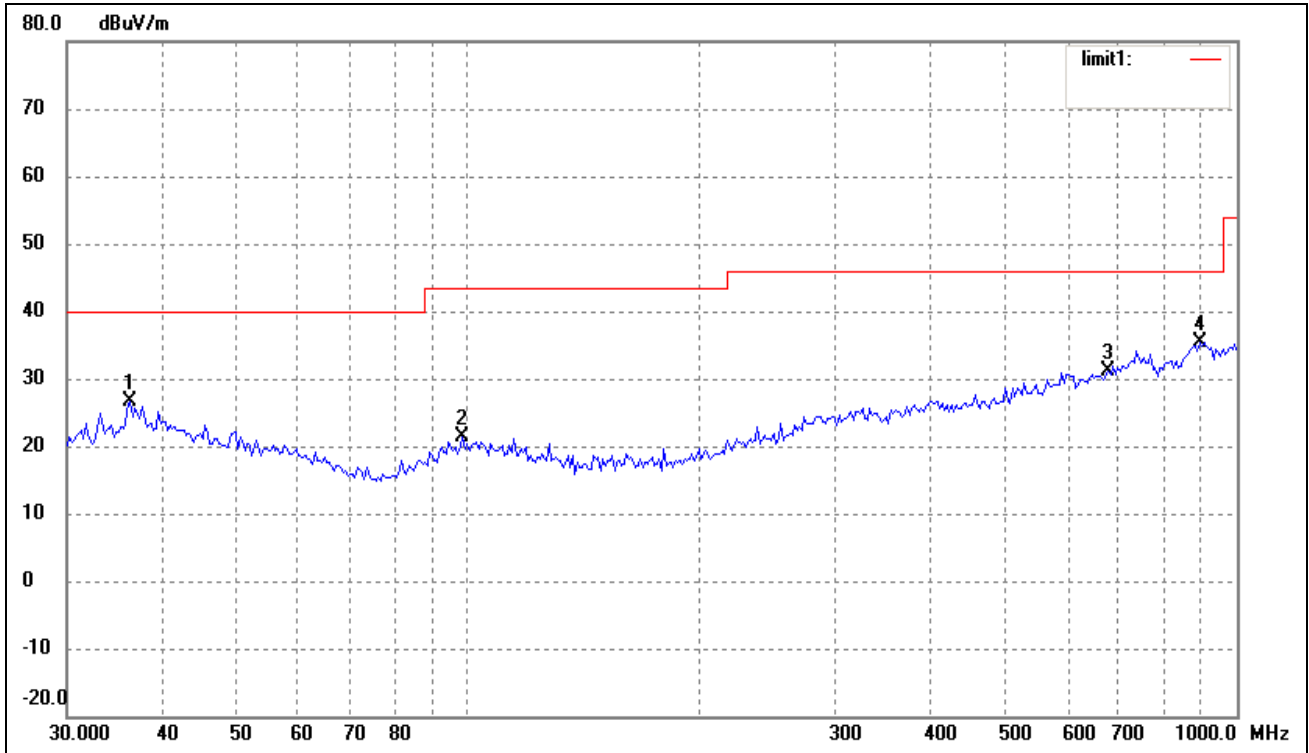


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.2541	17.45	9.09	26.54	40.00	-13.46	177	100	peak
2	98.1419	14.98	6.39	21.37	43.50	-22.13	90	100	peak
3	679.9600	15.48	15.55	31.03	46.00	-14.97	336	100	peak
4	893.8567	16.13	19.27	35.40	46.00	-10.60	360	100	peak

Operating Condition: 802.11g Transmitting Middle Channel-2437MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

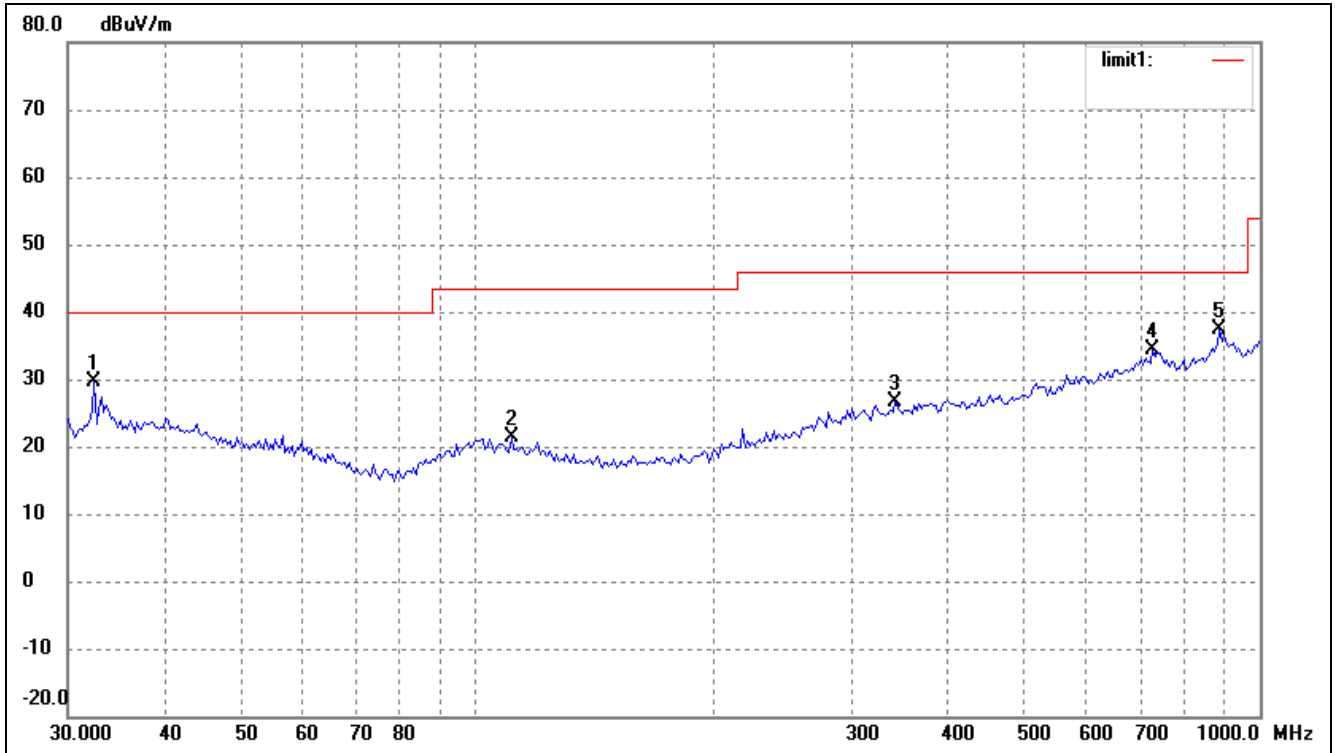

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	21.23	8.44	29.67	40.00	-10.33	270	100	peak
2	110.5687	15.56	5.80	21.36	43.50	-22.14	164	100	peak
3	341.9787	16.40	10.16	26.56	46.00	-19.44	228	200	peak
4	729.3583	17.11	17.31	34.42	46.00	-11.58	130	200	peak
5	887.6099	18.21	19.15	37.36	46.00	-8.64	360	100	peak

Test Specification: Vertical

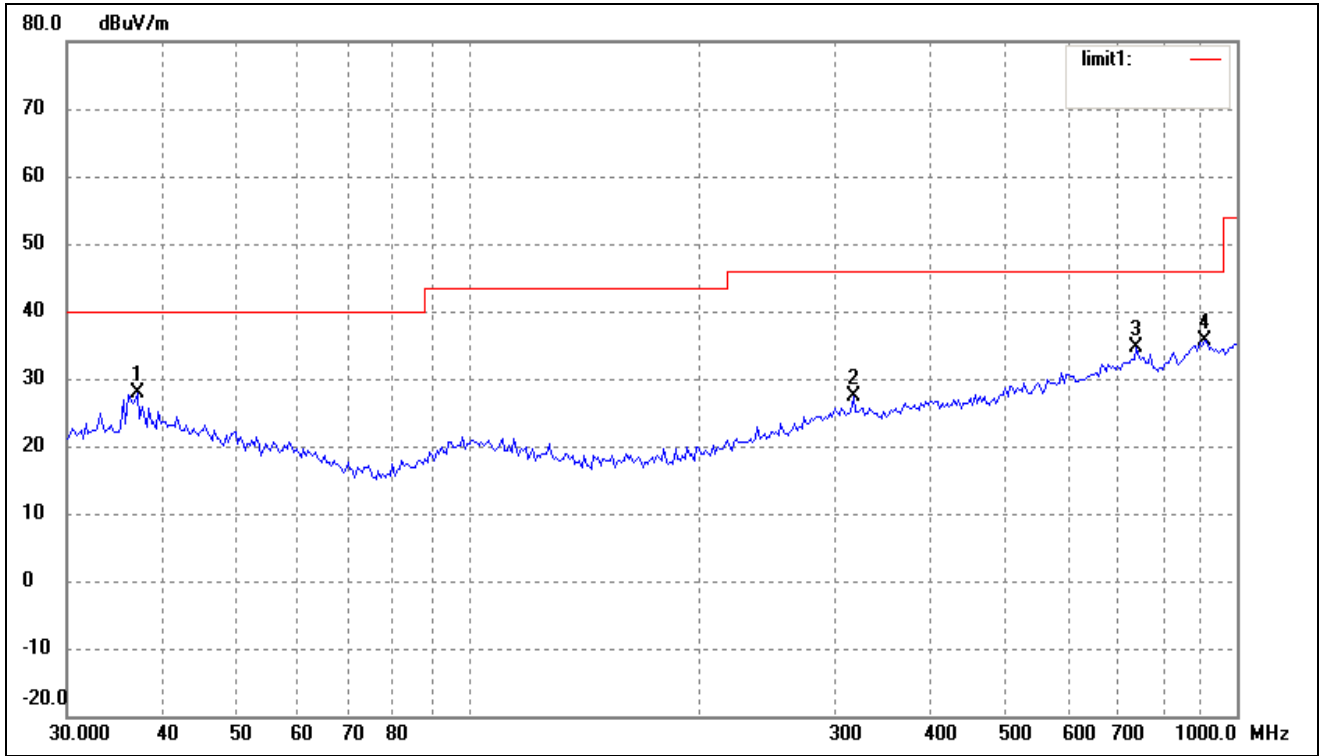


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.0249	18.59	9.21	27.80	40.00	-12.20	360	100	peak
2	316.5890	16.84	10.44	27.28	46.00	-18.72	255	100	peak
3	739.6605	16.54	18.07	34.61	46.00	-11.39	270	100	peak
4	906.4824	16.47	19.15	35.62	46.00	-10.38	180	100	peak

Operating Condition: 802.11g Transmitting High Channel-2462MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

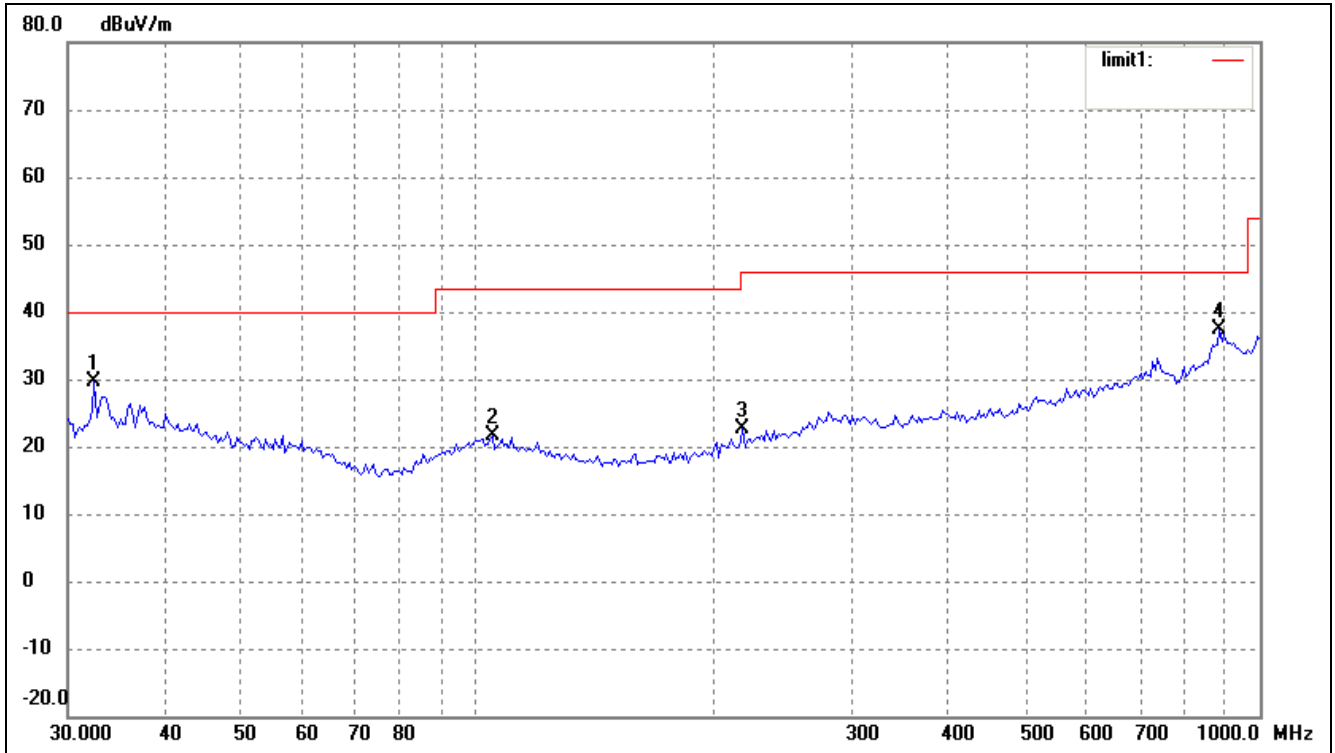

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	21.23	8.44	29.67	40.00	-10.33	270	100	peak
2	104.5361	15.27	6.39	21.66	43.50	-21.84	51	200	peak
3	218.3085	16.82	5.81	22.63	46.00	-23.37	360	200	peak
4	887.6099	18.21	19.15	37.36	46.00	-8.64	360	100	peak


Test Specification: Vertical

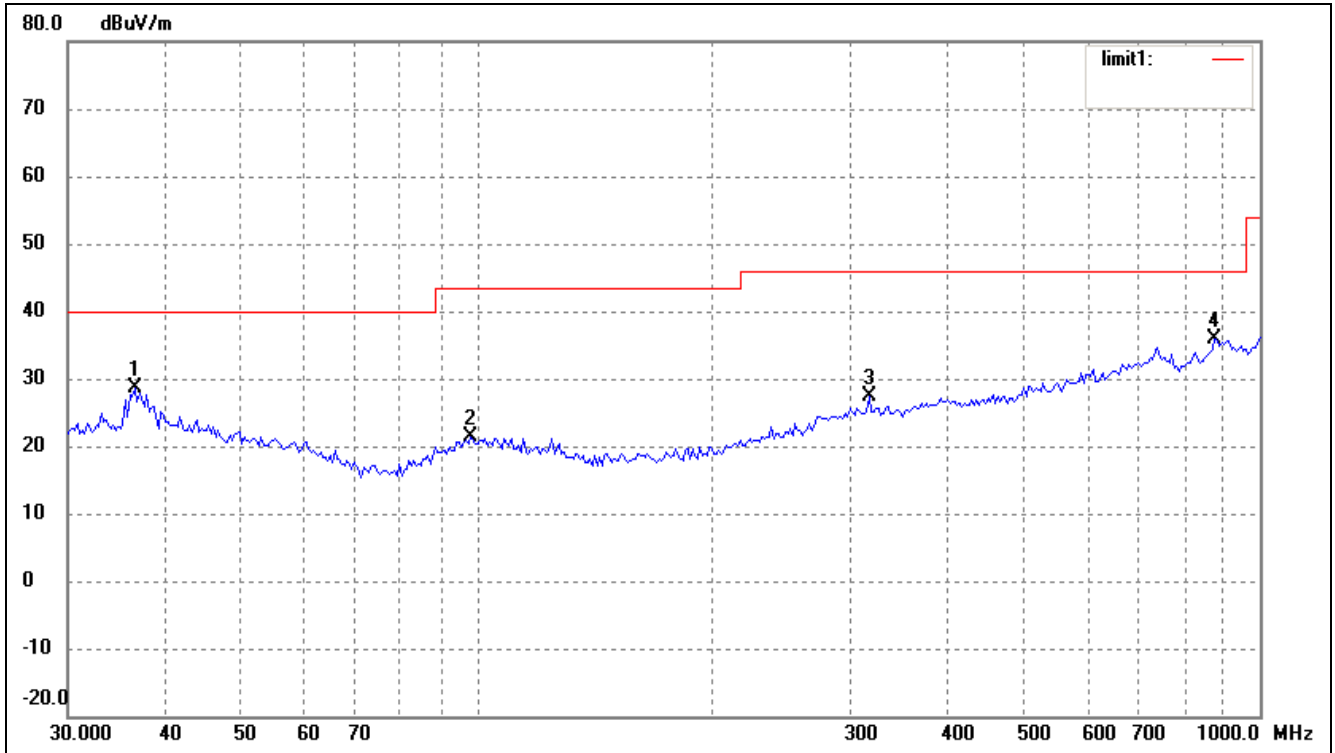

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	36.5092	19.47	9.13	28.60	40.00	-11.40	360	100	peak
2	98.1419	14.98	6.39	21.37	43.50	-22.13	180	100	peak
3	316.5890	16.84	10.44	27.28	46.00	-18.72	225	100	peak
4	875.2470	17.15	18.80	35.95	46.00	-10.05	67	100	peak


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: GSM/GPRS Dual-band Mobile Phone
 Tested Model: R623
 Operating Condition: 802.11n-HT20 Transmitting Low Channel-2412MHz
 Comment: DC 3.7V Battery
 Test Specification: Horizontal

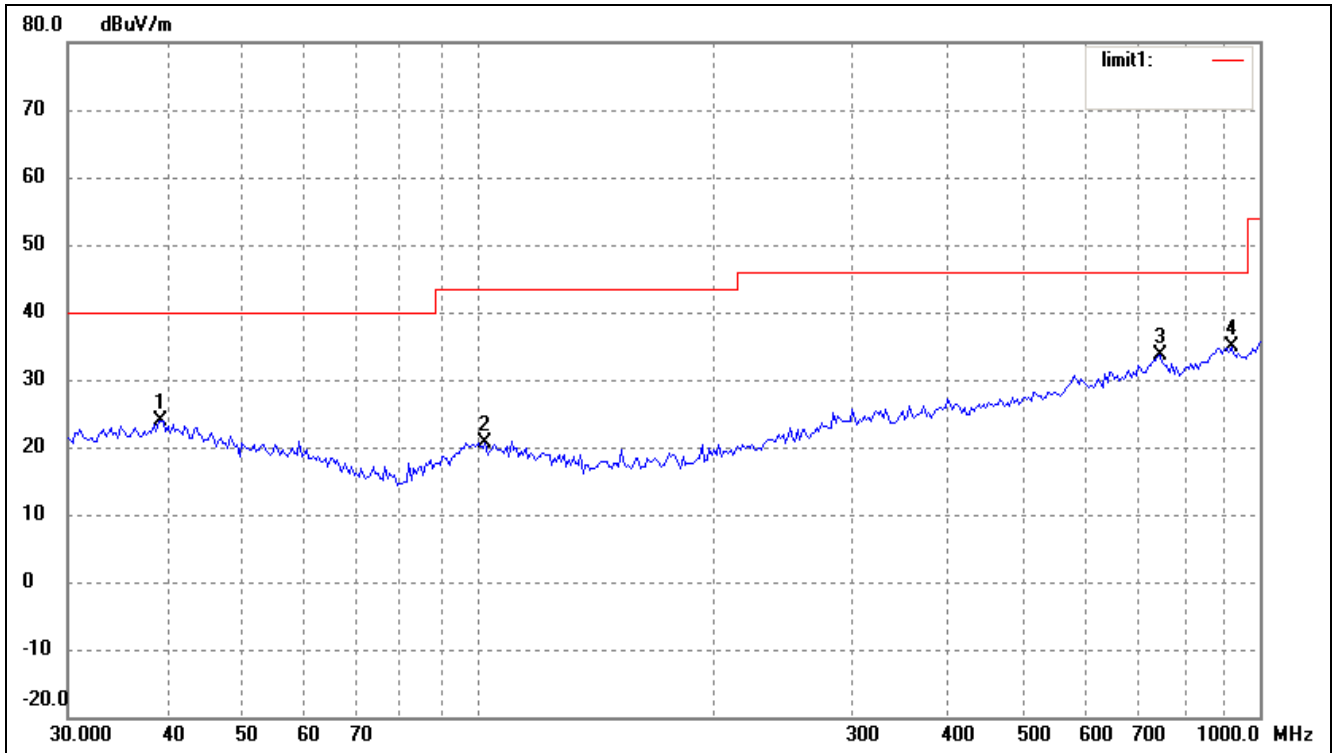

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.4372	14.37	9.60	23.97	40.00	-16.03	260	100	peak
2	102.3597	14.14	6.61	20.75	43.50	-22.75	131	200	peak
3	744.8661	15.61	17.95	33.56	46.00	-12.44	285	200	peak
4	919.2866	16.27	18.70	34.97	46.00	-11.03	224	100	peak

Test Specification: Vertical

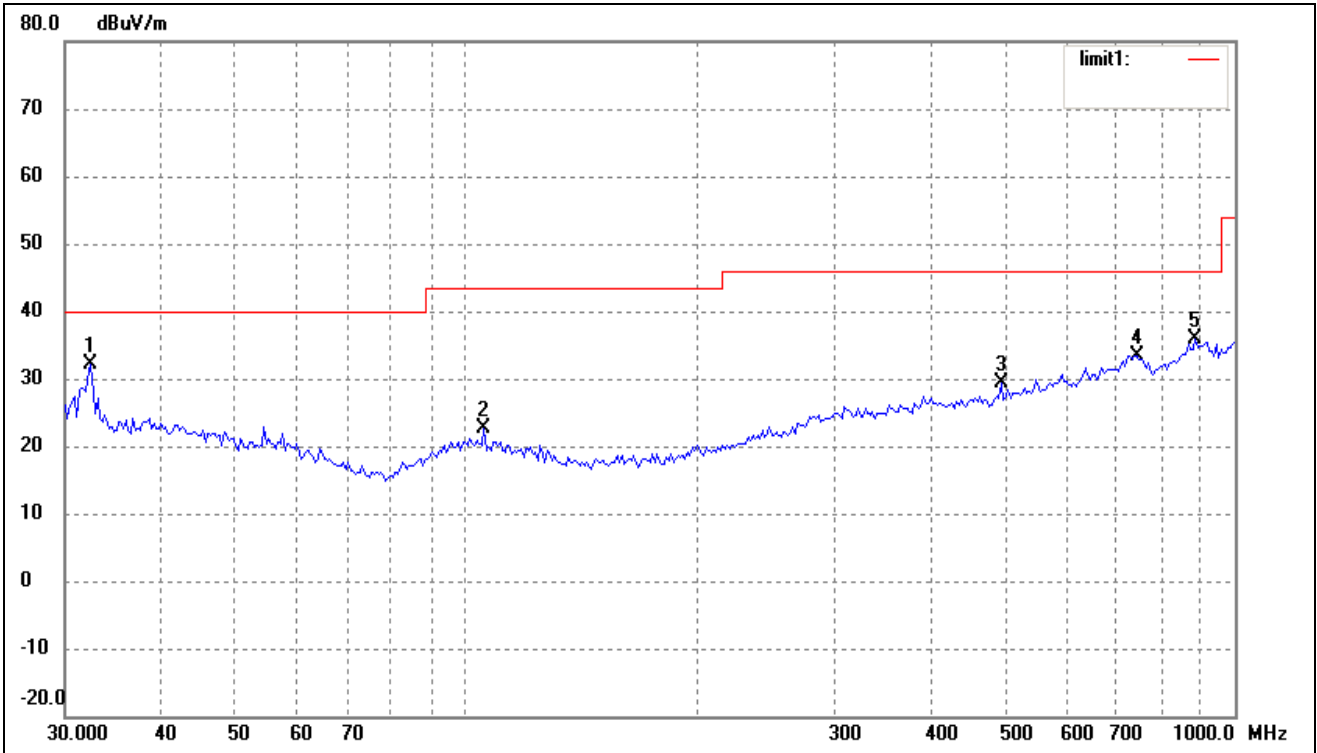


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	23.69	8.44	32.13	40.00	-7.87	155	100	peak
2	105.2718	16.25	6.32	22.57	43.50	-20.93	197	100	peak
3	495.9344	17.25	12.04	29.29	46.00	-16.71	310	100	peak
4	744.8661	15.46	17.95	33.41	46.00	-12.59	229	100	peak
5	887.6099	16.71	19.15	35.86	46.00	-10.14	130	100	peak

Operating Condition: 802.11n-HT20 Transmitting Middle Channel-2437MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

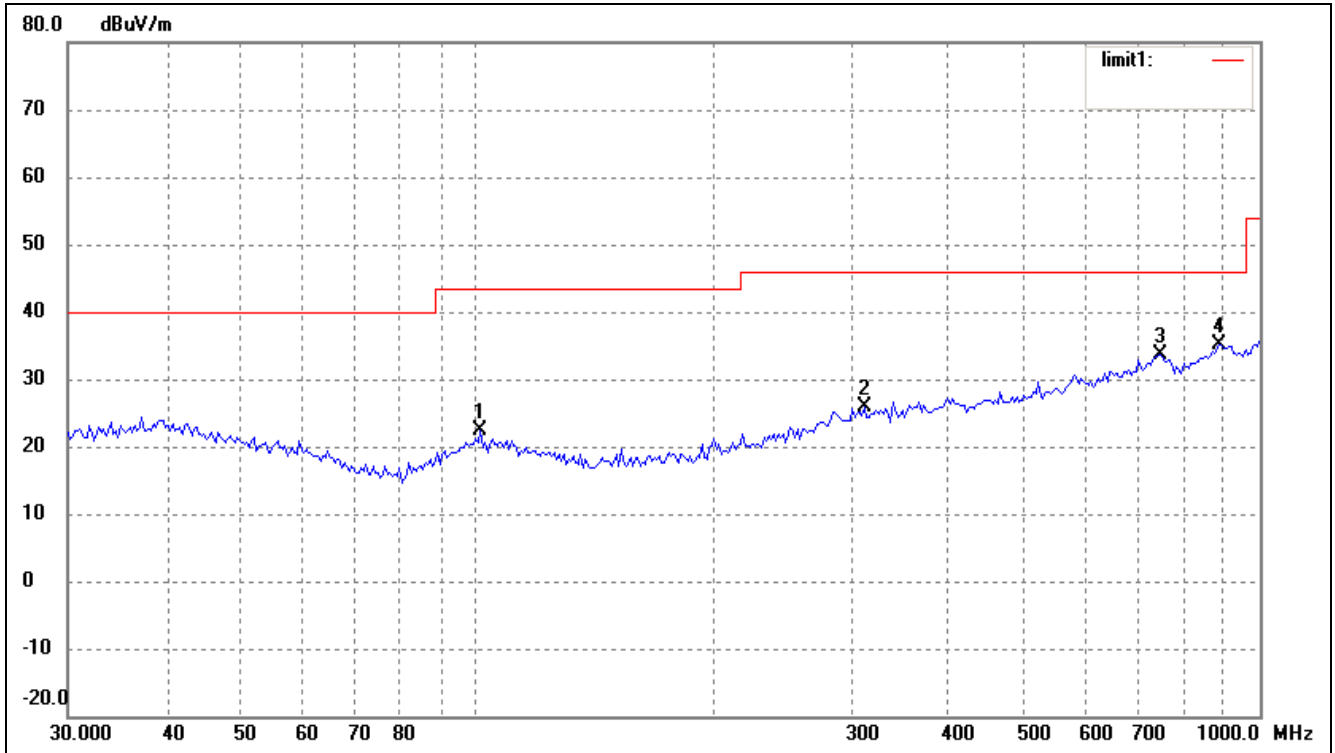

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	100.9340	15.68	6.75	22.43	43.50	-21.07	274	100	peak
2	312.1794	15.59	10.36	25.95	46.00	-20.05	116	100	peak
3	744.8661	15.61	17.95	33.56	46.00	-12.44	82	100	peak
4	887.6099	15.93	19.15	35.08	46.00	-10.92	134	100	peak

Test Specification: Vertical

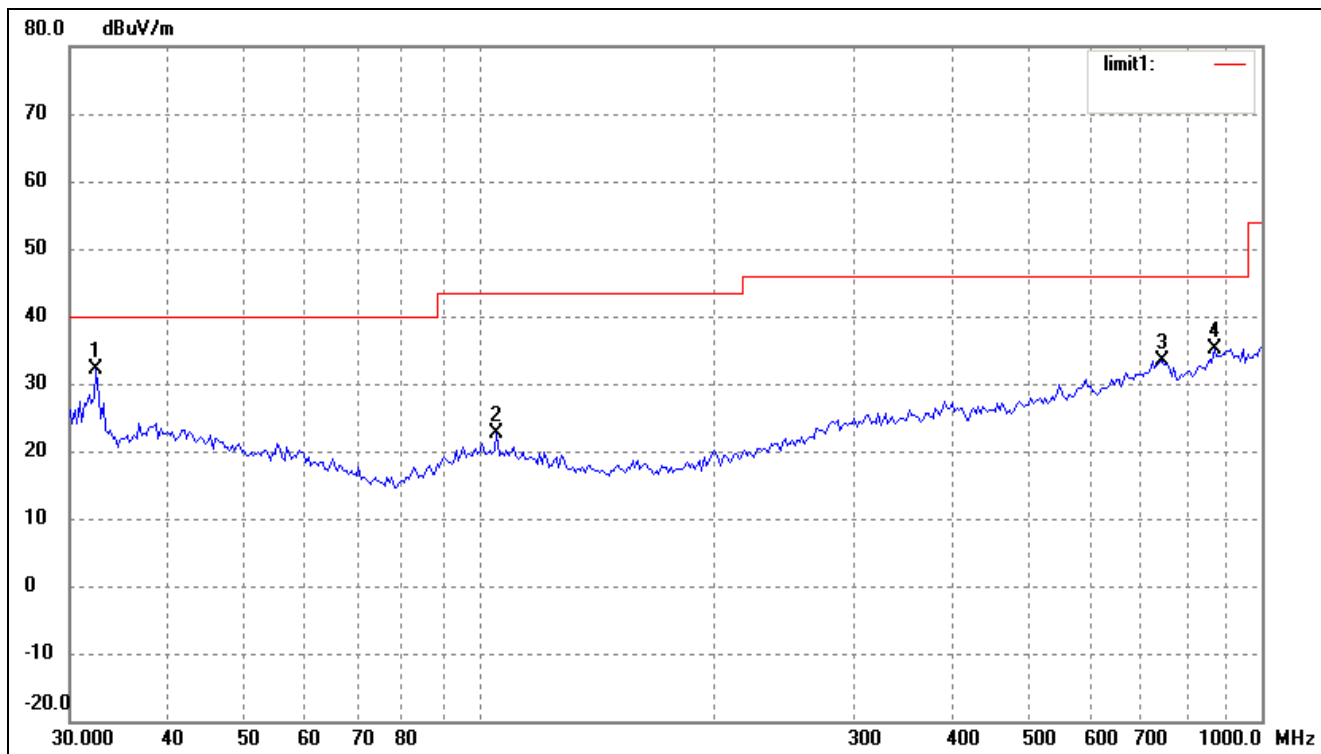


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	32.4059	23.69	8.44	32.13	40.00	-7.87	264	100	peak
2	105.2718	16.25	6.32	22.57	43.50	-20.93	110	100	peak
3	744.8661	15.46	17.95	33.41	46.00	-12.59	136	100	peak
4	869.1302	16.70	18.54	35.24	46.00	-10.76	90	100	peak

Operating Condition: 802.11n-HT20 Transmitting High Channel-2462MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

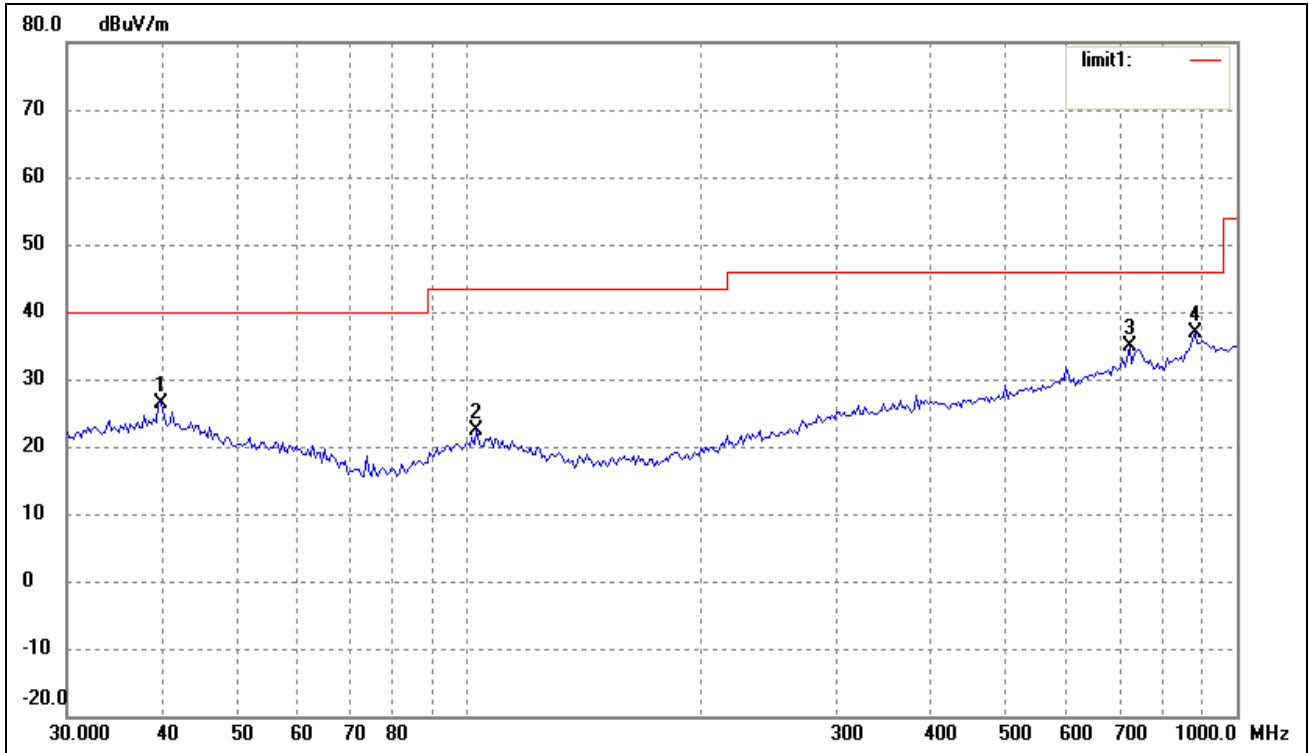

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.7147	16.86	9.64	26.50	40.00	-13.50	360	100	peak
2	102.3597	15.89	6.61	22.50	43.50	-21.00	112	100	peak
3	724.2611	18.01	16.93	34.94	46.00	-11.06	180	200	peak
4	881.4067	17.84	19.03	36.87	46.00	-9.13	270	200	peak


Test Specification: Vertical

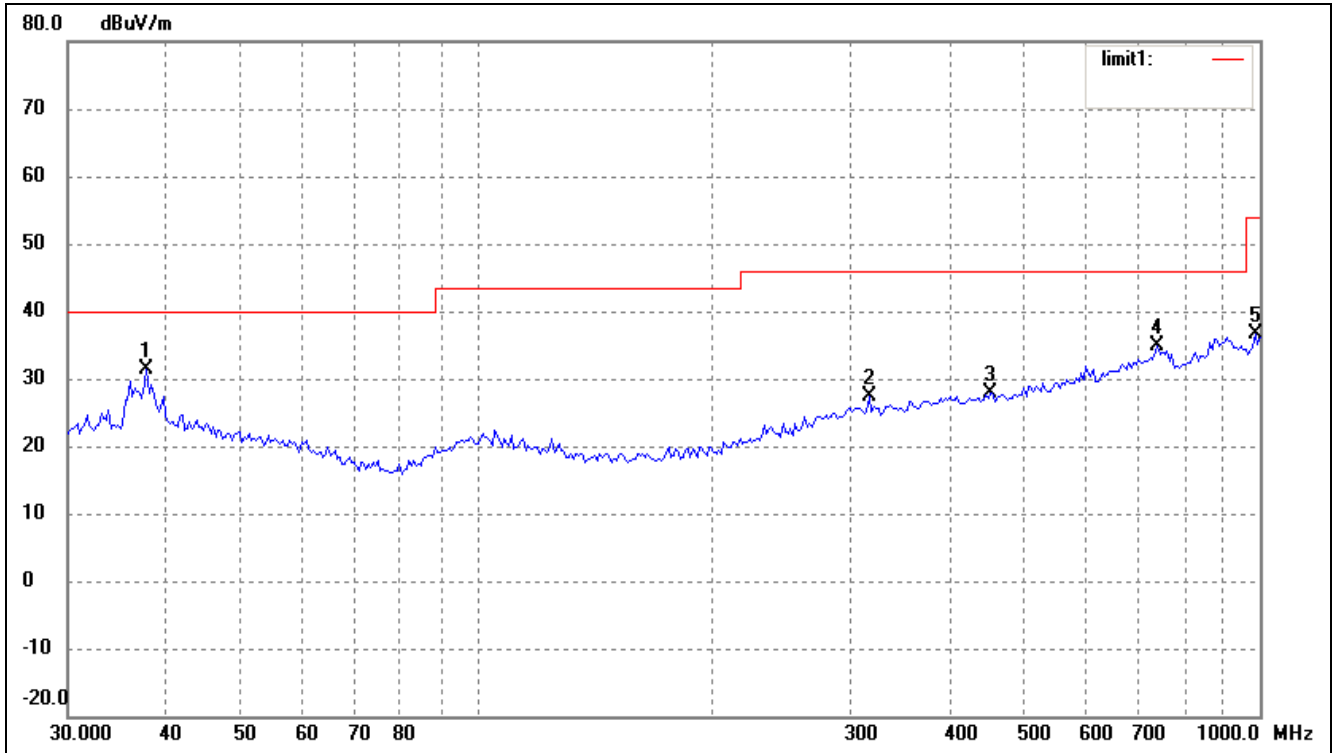

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	37.8121	21.98	9.33	31.31	40.00	-8.69	267	100	peak
2	316.5890	16.84	10.44	27.28	46.00	-18.72	116	100	peak
3	452.7197	16.27	11.58	27.85	46.00	-18.15	360	100	peak
4	739.6605	16.81	18.07	34.88	46.00	-11.12	228	100	peak
5	986.0717	17.36	19.17	36.53	54.00	-17.47	270	100	peak


Plot of Radiated Emissions Test Data (30MHz to 1GHz)

EUT: GSM/GPRS Dual-band Mobile Phone
 Tested Model: R623
 Operating Condition: 802.11n-HT40 Transmitting Low Channel-2422MHz
 Comment: DC 3.7V Battery
 Test Specification: Horizontal

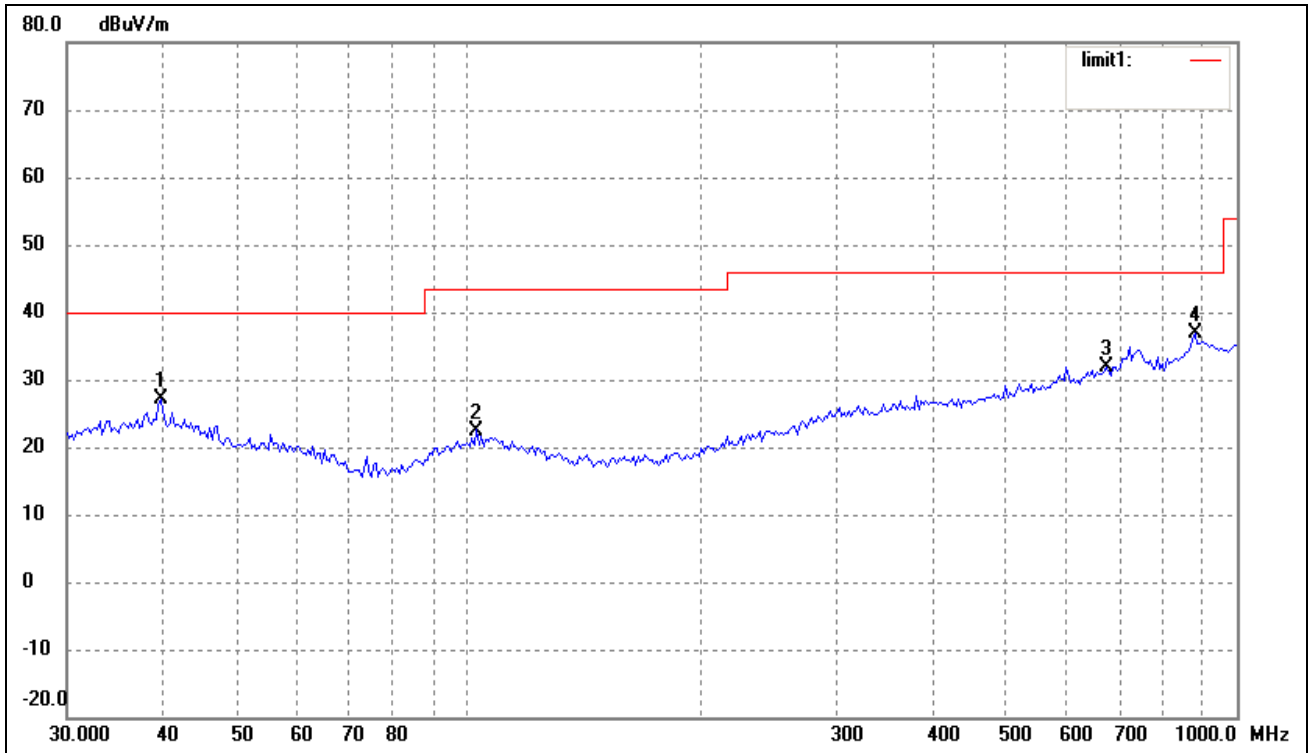

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.7147	17.39	9.64	27.03	40.00	-12.97	267	100	peak
2	102.3597	15.89	6.61	22.50	43.50	-21.00	114	200	peak
3	675.2080	16.60	15.36	31.96	46.00	-14.04	35	200	peak
4	881.4067	17.84	19.03	36.87	46.00	-9.13	81	100	peak

Test Specification: Vertical

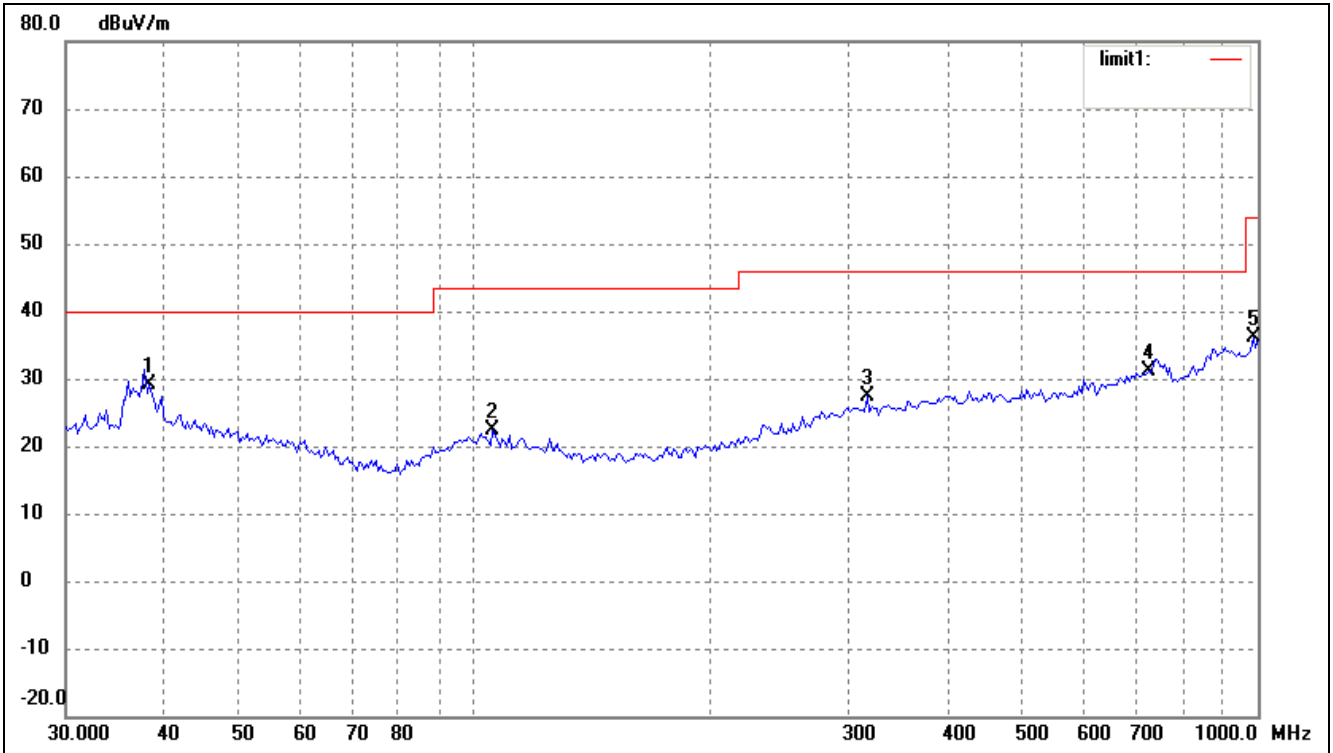


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.3462	19.59	9.42	29.01	40.00	-10.99	360	100	peak
2	105.2718	15.98	6.32	22.30	43.50	-21.20	258	100	peak
3	316.5890	16.84	10.44	27.28	46.00	-18.72	347	100	peak
4	724.2611	14.21	16.93	31.14	46.00	-14.86	270	100	peak
5	986.0717	16.86	19.17	36.03	54.00	-17.97	90	100	peak

Operating Condition: 802.11n-HT40 Transmitting Middle Channel-2437MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

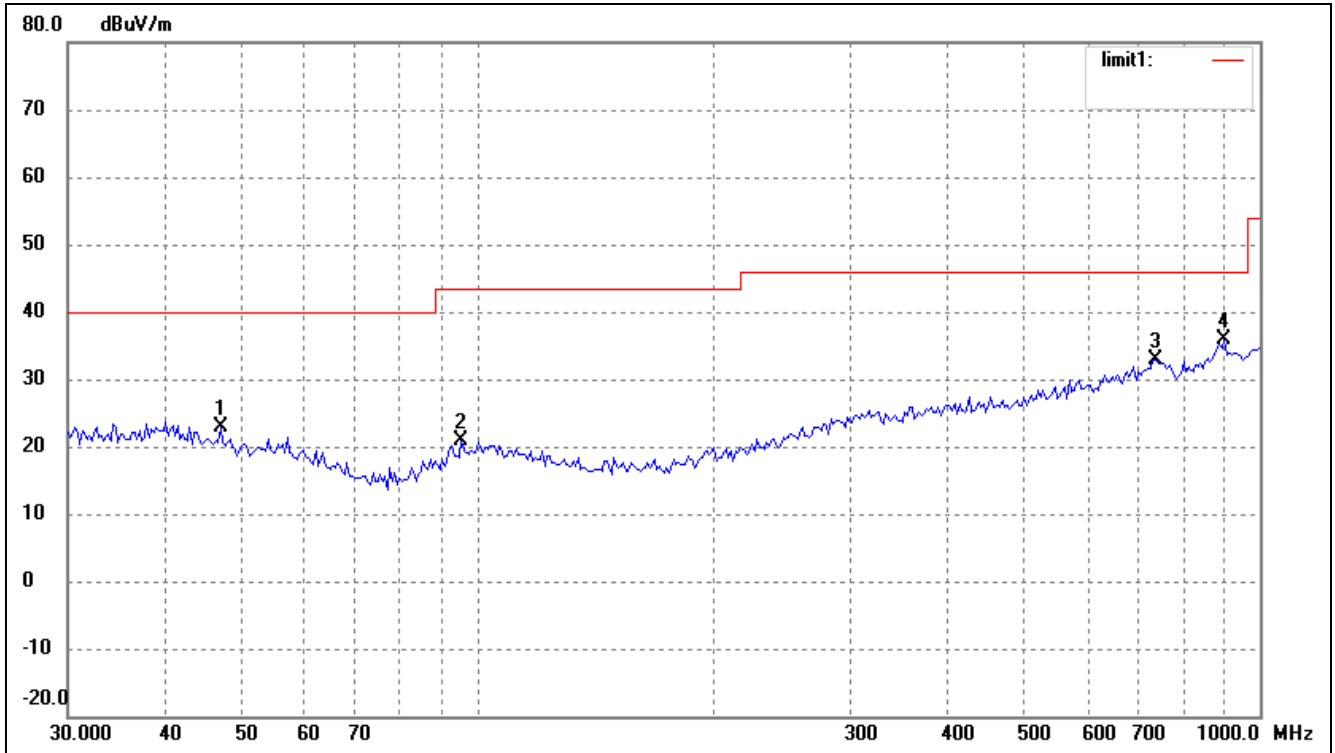

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	46.9948	15.43	7.54	22.97	40.00	-17.03	251	100	peak
2	95.4270	15.15	5.71	20.86	43.50	-22.64	167	100	peak
3	734.4913	15.18	17.68	32.86	46.00	-13.14	44	100	peak
4	900.1474	16.39	19.38	35.77	46.00	-10.23	130	100	peak

Test Specification: Vertical

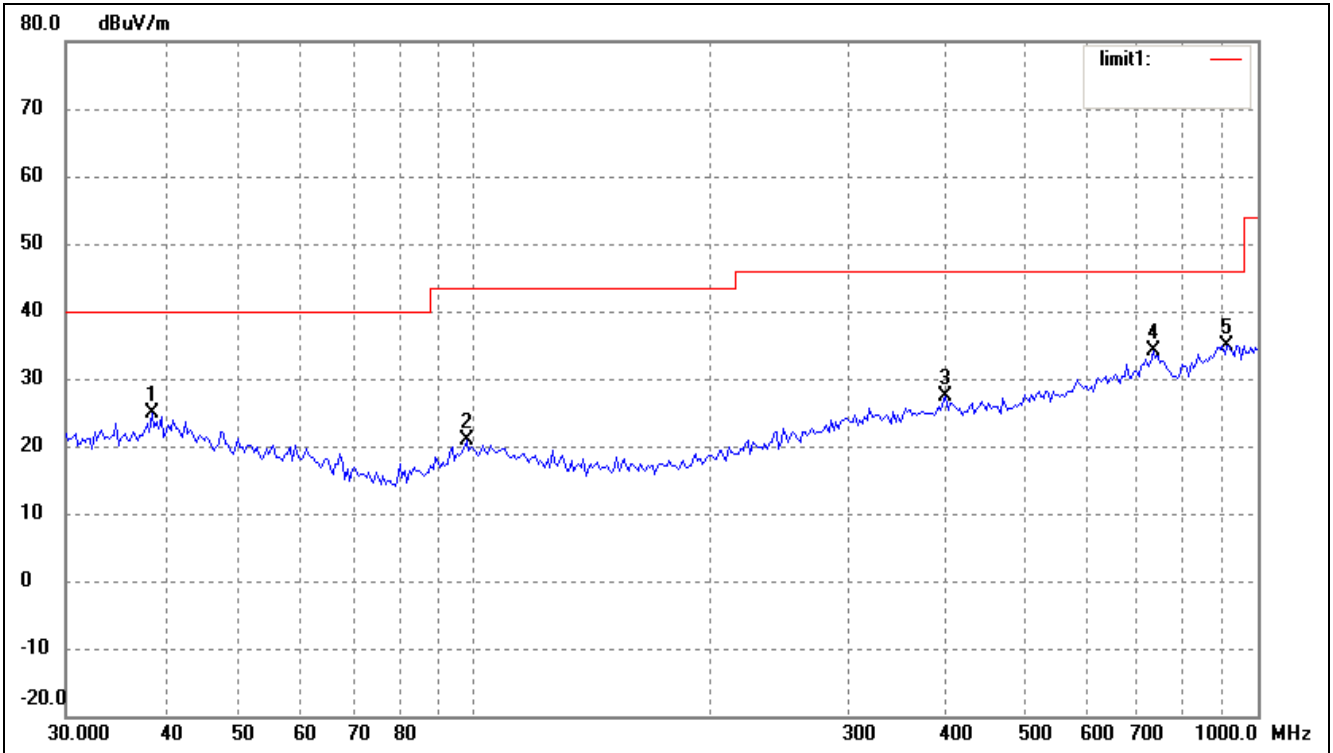


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	38.6161	15.30	9.46	24.76	40.00	-15.24	47	100	peak
2	97.4560	14.68	6.21	20.89	43.50	-22.61	264	100	peak
3	399.0302	15.85	11.50	27.35	46.00	-18.65	225	100	peak
4	734.4913	16.36	17.68	34.04	46.00	-11.96	180	100	peak
5	912.8620	15.86	18.93	34.79	46.00	-11.21	315	100	peak

Operating Condition: 802.11n-HT40 Transmitting High Channel-2452MHz


Comment: DC 3.7V Battery

Test Specification: Horizontal

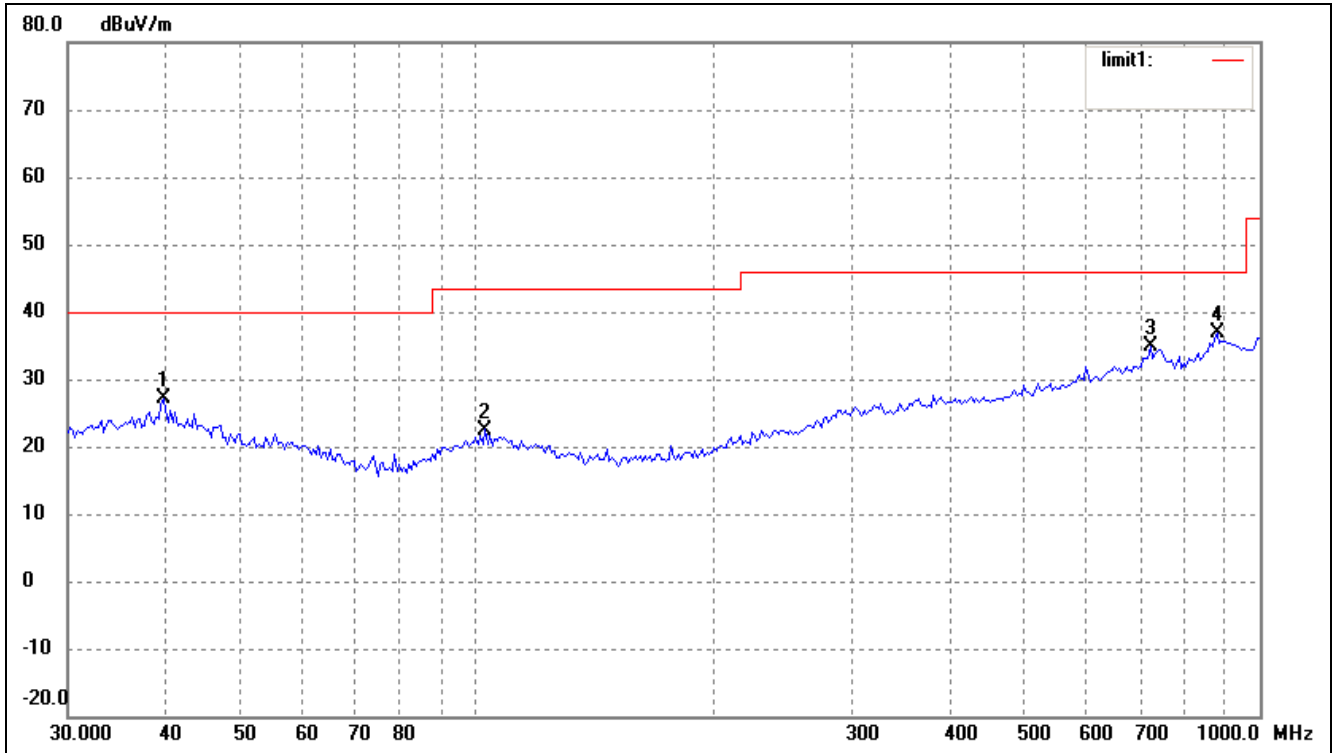

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.7147	17.39	9.64	27.03	40.00	-12.97	360	100	peak
2	102.3597	15.89	6.61	22.50	43.50	-21.00	287	100	peak
3	724.2611	18.01	16.93	34.94	46.00	-11.06	168	100	peak
4	881.4067	17.84	19.03	36.87	46.00	-9.13	122	100	peak

Test Specification: Vertical

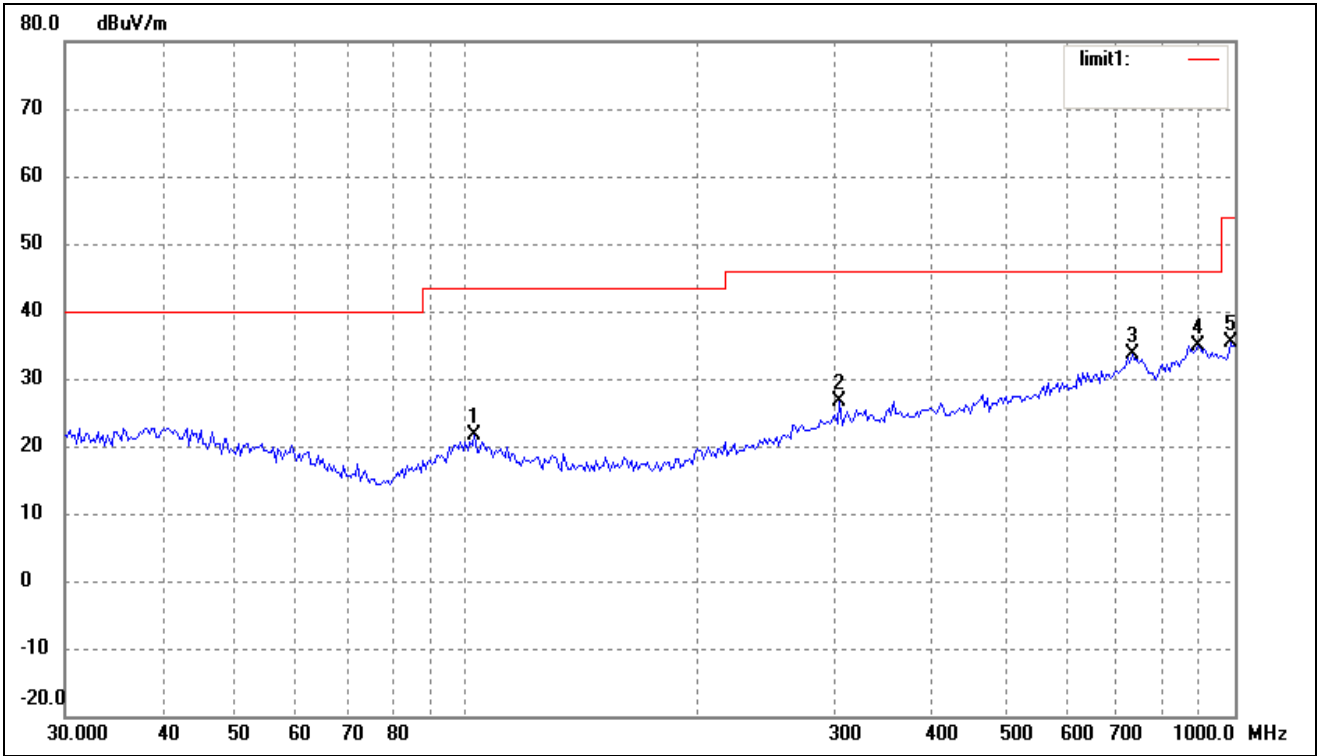

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	102.3597	15.01	6.61	21.62	43.50	-21.88	78	100	peak
2	305.6800	16.44	10.27	26.71	46.00	-19.29	136	100	peak
3	734.4913	15.93	17.68	33.61	46.00	-12.39	284	100	peak
4	893.8567	15.69	19.27	34.96	46.00	-11.04	60	100	peak
5	986.0717	16.20	19.17	35.37	54.00	-18.63	330	100	peak

Spurious Emissions Above 1GHz

Test Mode: 802.11b

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	54.09	-3.87	50.22	74.00	-23.78	H	PK
4824.000	38.84	-3.87	34.97	54.00	-19.03	H	AV
7236.000	46.30	1.14	47.44	74.00	-26.56	H	PK
7236.000	34.98	1.19	36.17	54.00	-17.83	H	AV
4824.000	57.31	-3.86	53.45	74.00	-20.55	V	PK
4824.000	40.50	-3.86	36.64	54.00	-17.36	V	AV
7236.000	49.11	1.10	50.21	74.00	-23.79	V	PK
7236.000	37.44	1.10	38.54	54.00	-15.46	V	AV
Middle Channel-2437MHz							
4874.000	54.74	-3.74	51.00	74.00	-23.00	H	PK
4874.000	39.99	-3.74	36.25	54.00	-17.75	H	AV
7311.000	47.77	1.47	49.24	74.00	-24.76	H	PK
7311.000	33.10	1.47	34.57	54.00	-19.43	H	AV
4874.000	53.97	-3.74	50.23	74.00	-23.77	V	PK
4874.000	40.89	-3.74	37.15	54.00	-16.85	V	AV
7311.000	47.98	1.47	49.45	74.00	-24.55	V	PK
7311.000	34.08	1.47	35.55	54.00	-18.45	V	AV
High Channel-2462MHz							
4924.000	55.82	-3.59	52.23	74.00	-21.77	H	PK
4924.000	41.76	-3.59	38.17	54.00	-15.83	H	AV
7386.000	46.38	1.79	48.17	74.00	-25.83	H	PK
7386.000	34.83	1.79	36.62	54.00	-17.38	H	AV
4924.000	54.94	-3.59	51.35	74.00	-22.65	V	PK
4924.000	42.04	-3.59	38.45	54.00	-15.55	V	AV
7386.000	47.99	1.79	49.78	74.00	-24.22	V	PK
7386.000	35.18	1.79	36.97	54.00	-17.03	V	AV

Test Mode: 802.11g

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.50	-3.86	51.64	74.00	-22.36	H	PK
4824.000	42.23	-3.86	38.37	54.00	-15.63	H	AV
7236.000	48.42	1.10	49.52	74.00	-24.48	H	PK
7236.000	34.40	1.10	35.50	54.00	-18.50	H	AV
4824.000	55.99	-3.86	52.13	74.00	-21.87	V	PK
4824.000	42.65	-3.86	38.79	54.00	-15.21	V	AV
7236.000	49.22	1.10	50.32	74.00	-23.68	V	PK
7236.000	35.54	1.10	36.64	54.00	-17.36	V	AV
Middle Channel-2437MHz							
4874.000	55.10	-3.74	51.36	74.00	-22.64	H	PK
4874.000	43.28	-3.74	39.54	54.00	-14.46	H	AV
7311.000	47.38	1.47	48.85	74.00	-25.15	H	PK
7311.000	35.27	1.47	36.74	54.00	-17.26	H	AV
4874.000	57.07	-3.74	53.33	74.00	-20.67	V	PK
4874.000	43.86	-3.74	40.12	54.00	-13.88	V	AV
7311.000	48.40	1.47	49.87	74.00	-24.13	V	PK
7311.000	35.33	1.47	36.80	54.00	-17.20	V	AV
High Channel-2462MHz							
4924.000	54.00	-3.59	50.41	74.00	-23.59	H	PK
4924.000	40.75	-3.59	37.16	54.00	-16.84	H	AV
7386.000	47.18	1.79	48.97	74.00	-25.03	H	PK
7386.000	34.73	1.79	36.52	54.00	-17.48	H	AV
4924.000	56.11	-3.59	52.52	74.00	-21.48	V	PK
4924.000	42.69	-3.59	39.10	54.00	-14.90	V	AV
7386.000	48.58	1.79	50.37	74.00	-23.63	V	PK
7386.000	35.95	1.79	37.74	54.00	-16.26	V	AV

Test Mode: 802.11n-HT20

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2412MHz							
4824.000	55.60	-3.86	51.74	74.00	-22.26	H	PK
4824.000	40.54	-3.86	36.68	54.00	-17.32	H	AV
7236.000	47.26	1.10	48.36	74.00	-25.64	H	PK
7236.000	34.44	1.10	35.54	54.00	-18.46	H	AV
4824.000	56.71	-3.86	52.85	74.00	-21.15	V	PK
4824.000	43.18	-3.86	39.32	54.00	-14.68	V	AV
7236.000	49.21	1.10	50.31	74.00	-23.69	V	PK
7236.000	35.77	1.10	36.87	54.00	-17.13	V	AV
Middle Channel-2437MHz							
4874.000	54.16	-3.74	50.42	74.00	-23.58	H	PK
4874.000	42.48	-3.74	38.74	54.00	-15.26	H	AV
7311.000	48.74	1.47	50.21	74.00	-23.79	H	PK
7311.000	33.10	1.47	34.57	54.00	-19.43	H	AV
4874.000	54.92	-3.74	51.18	74.00	-22.82	V	PK
4874.000	42.62	-3.74	38.88	54.00	-15.12	V	AV
7311.000	48.49	1.47	49.96	74.00	-24.04	V	PK
7311.000	35.20	1.47	36.67	54.00	-17.33	V	AV
High Channel-2462MHz							
4924.000	53.90	-3.59	50.31	74.00	-23.69	H	PK
4924.000	43.23	-3.59	39.64	54.00	-14.36	H	AV
7386.000	48.31	1.79	50.10	74.00	-23.90	H	PK
7386.000	36.10	1.79	37.89	54.00	-16.11	H	AV
4924.000	55.70	-3.59	52.11	74.00	-21.89	V	PK
4924.000	41.48	-3.59	37.89	54.00	-16.11	V	AV
7386.000	48.55	1.79	50.34	74.00	-23.66	V	PK
7386.000	35.36	1.79	37.15	54.00	-16.85	V	AV

Test Mode: 802.11n-HT40

Frequency	Reading	Correct	Result	Limit	Margin	Polar	Detector
(MHz)	(dBuV/m)	dB/m	(dBuV/m)	(dBuV/m)	(dB)	H/V	
Low Channel-2422MHz							
4844.000	53.25	-3.90	49.35	74.00	-24.65	H	PK
4824.000	38.25	-3.90	34.35	54.00	-19.65	H	AV
7266.000	46.48	1.06	47.54	74.00	-26.46	H	PK
7266.000	32.56	1.06	33.62	54.00	-20.38	H	AV
4844.000	54.22	-3.90	50.32	74.00	-23.68	V	PK
4824.000	39.42	-3.90	35.52	54.00	-18.48	V	AV
7266.000	48.81	1.06	49.87	74.00	-24.13	V	PK
7266.000	34.78	1.06	35.84	54.00	-18.16	V	AV
Middle Channel-2437MHz							
4874.000	52.53	-3.74	48.79	74.00	-25.21	H	PK
4874.000	37.88	-3.74	34.14	54.00	-19.86	H	AV
7311.000	44.88	1.47	46.35	74.00	-27.65	H	PK
7311.000	32.03	1.47	33.50	54.00	-20.50	H	AV
4874.000	53.74	-3.74	50.00	74.00	-24.00	V	PK
4874.000	39.95	-3.74	36.21	54.00	-17.79	V	AV
7311.000	45.78	1.47	47.25	74.00	-26.75	V	PK
7311.000	34.00	1.47	35.47	54.00	-18.53	V	AV
High Channel-2452MHz							
4904.000	52.65	-3.63	49.02	74.00	-24.98	H	PK
4904.000	39.37	-3.63	35.74	54.00	-18.26	H	AV
7356.000	45.63	1.62	47.25	74.00	-26.75	H	PK
7356.000	30.73	1.62	32.35	54.00	-21.65	H	AV
4904.000	54.84	-3.63	51.21	74.00	-22.79	V	PK
4904.000	40.83	-3.63	37.20	54.00	-16.80	V	AV
7356.000	48.18	1.62	49.80	74.00	-24.20	V	PK
7356.000	35.12	1.62	36.74	54.00	-17.26	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 5th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz.

9. Out of Band Emissions

9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

9.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2012-03-28	2013-03-27
EMI Test Receiver	R&S	ESVB	825471/005	2012-03-28	2013-03-27
Pre-amplifier	Agilent	8447F	3113A06717	2012-03-28	2013-03-27
Pre-amplifier	Compliance Direction	PAP-0118	24002	2012-03-28	2013-03-27
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2012-02-25	2013-02-24
Horn Antenna	ETS	3117	00086197	2012-02-25	2013-02-24

9.3 Test Procedure

According to the KDB 558074, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205.

9.4 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

9.5 Summary of Test Results/Plots


Test Mode	Test Frequency MHz	Limit dBuV / dBc	Result
802.11b	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	>20dBc	Pass
	2483.50	<54 dBuV	Pass
802.11g	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	>20dBc	Pass
	2483.50	<54 dBuV	Pass
802.11n-HT20	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2400.00	>20dBc	Pass
	2483.50	<54 dBuV	Pass
802.11n-HT40	2310.00	<54 dBuV	Pass
	2390.00	<54 dBuV	Pass
	2396.94	<54 dBuV	Pass
	2400.00	>20dBc	Pass
	2483.50	<54 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.247(d) requirements.

Please refer to the test plots as below.


Bandedge (Radiated)

802.11b-Lowest Bandedge

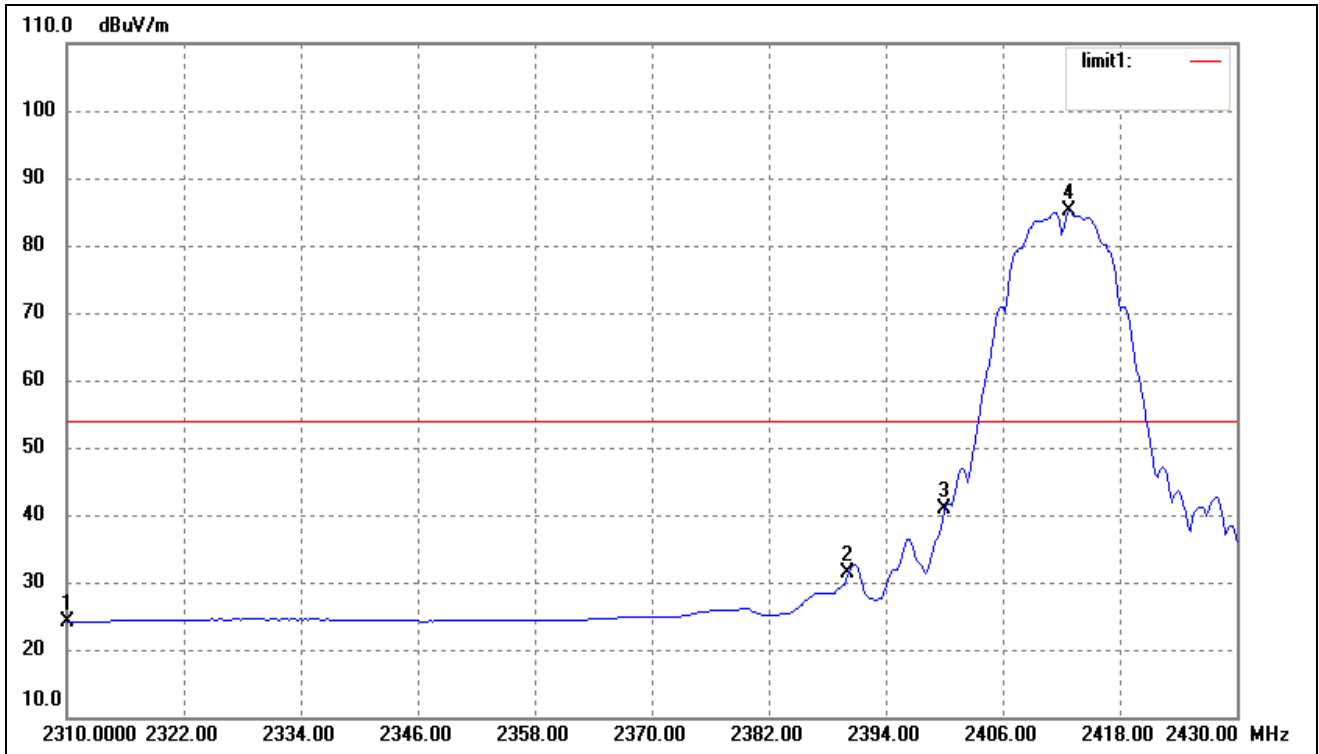


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.92	-11.72	24.20	54.00	-29.80	Average Detector
	2310.000	47.26	-11.72	35.54	74.00	-38.46	Peak Detector
2	2390.000	43.03	-11.75	31.28	54.00	-22.72	Average Detector
	2390.000	52.89	-11.75	41.14	74.00	-32.86	Peak Detector
3	2400.000	52.61	-11.75	40.86	/	/	Average Detector
4	2412.720	96.81	-11.76	85.05	/	/	Average Detector

802.11b-Highest Bandedge

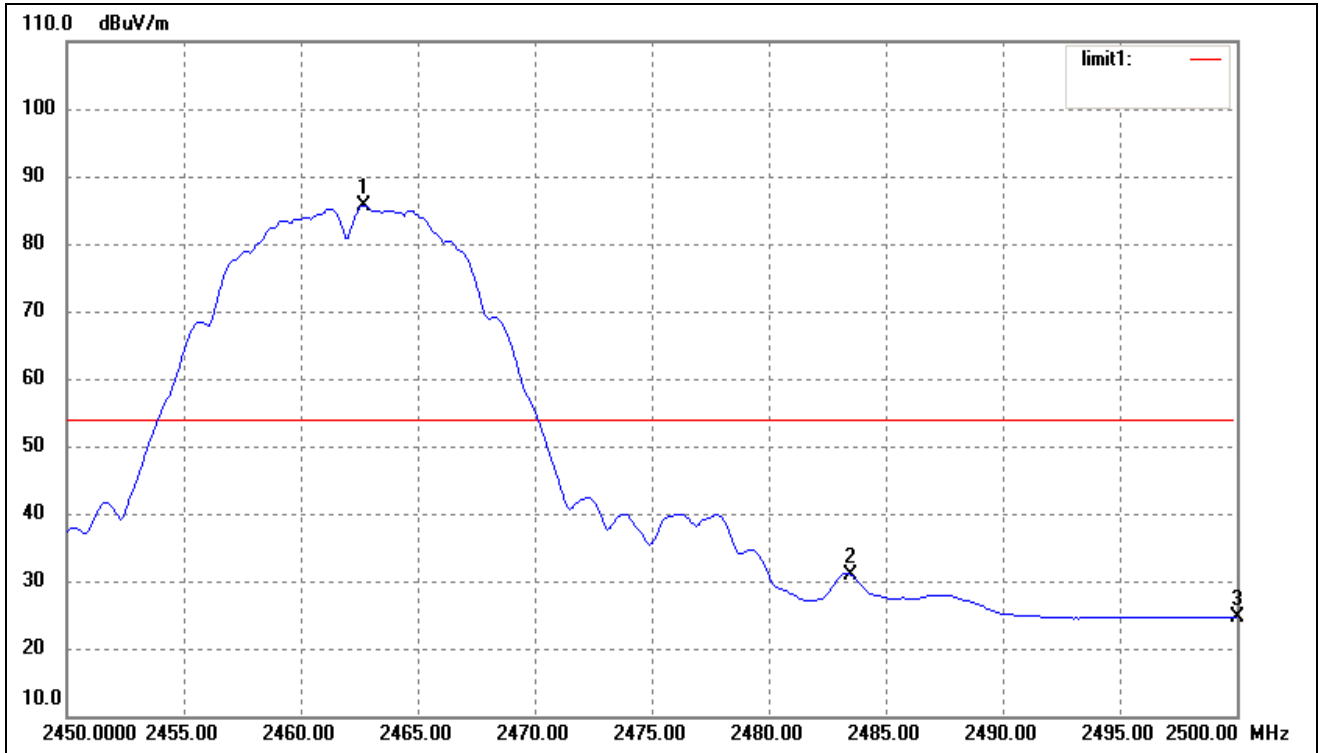


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2462.700	97.36	-11.78	85.58	/	/	Average Detector
	2462.700	97.36	-11.78	95.58	/	/	Peak Detector
2	2483.500	Delta =54.72 dBc		30.86	54.00	-23.14	Average Detector
	2483.500	Delta =54.72 dBc		40.86	74.00	-33.14	Peak Detector
3	2500.000	36.35	-11.78	24.57	54.00	-29.43	Average Detector
	2500.000	49.20	-11.78	37.42	74.00	-36.58	Peak Detector

802.11g-Lowest Bandedge

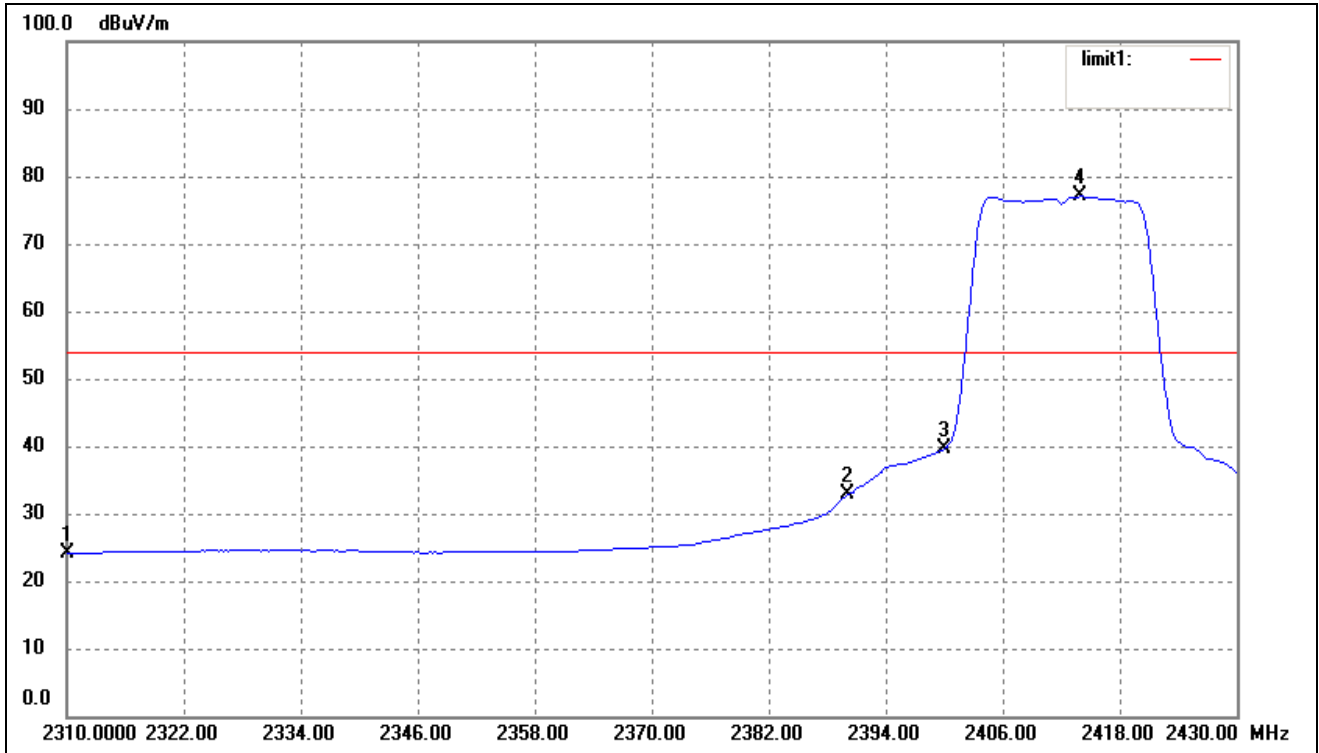


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.92	-11.72	24.20	54.00	-29.80	Average Detector
	2310.000	47.87	-11.72	36.15	74.00	-38.00	Peak Detector
2	2390.000	44.57	-11.75	32.82	54.00	-21.18	Average Detector
	2390.000	56.99	-11.75	45.24	74.00	-28.76	Peak Detector
3	2400.000	51.29	-11.75	39.54	/	/	Average Detector
4	2413.920	88.77	-11.76	77.01	/	/	Average Detector

802.11g-Highest Bandedge

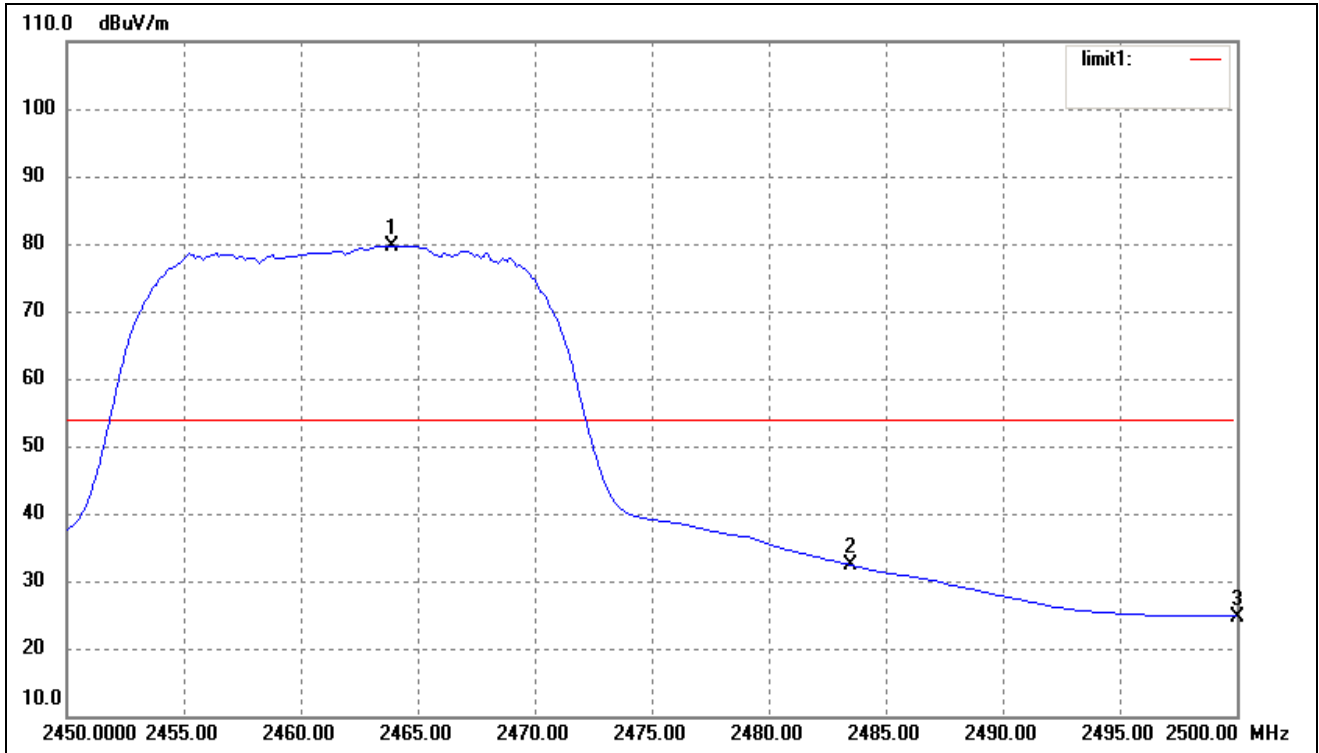


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.900	91.50	-11.77	79.73	/	/	Average Detector
	2463.900	91.50	-11.77	102.08	/	/	Peak Detector
2	2483.500	Delta =47.35 dBc		32.38	54.00	-21.62	Average Detector
	2483.500	Delta =47.35 dBc		54.73	74.00	-19.27	Peak Detector
3	2500.000	36.52	-11.78	24.74	54.00	-29.26	Average Detector
	2500.000	50.90	-11.78	39.12	74.00	-34.88	Peak Detector

802.11n-HT20-Lowest Bandedge

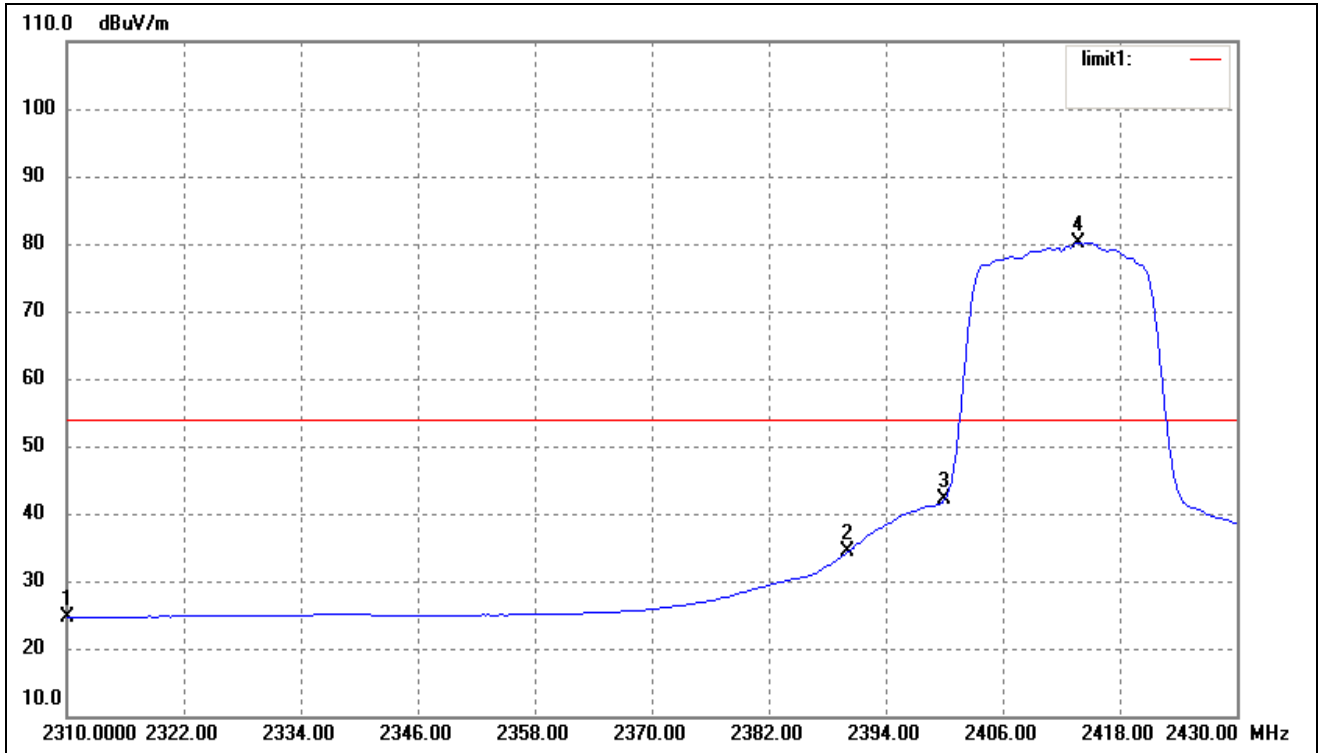


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	36.35	-11.72	24.63	54.00	-29.37	Average Detector
	2310.000	49.88	-11.72	38.16	74.00	-35.84	Peak Detector
2	2390.000	46.15	-11.75	34.40	54.00	-19.60	Average Detector
	2390.000	66.81	-11.75	55.06	74.00	-18.94	Peak Detector
3	2400.000	53.80	-11.75	42.05	/	/	Average Detector
4	2413.680	91.79	-11.76	80.03	/	/	Average Detector

802.11n-HT20-Highest Bandedge

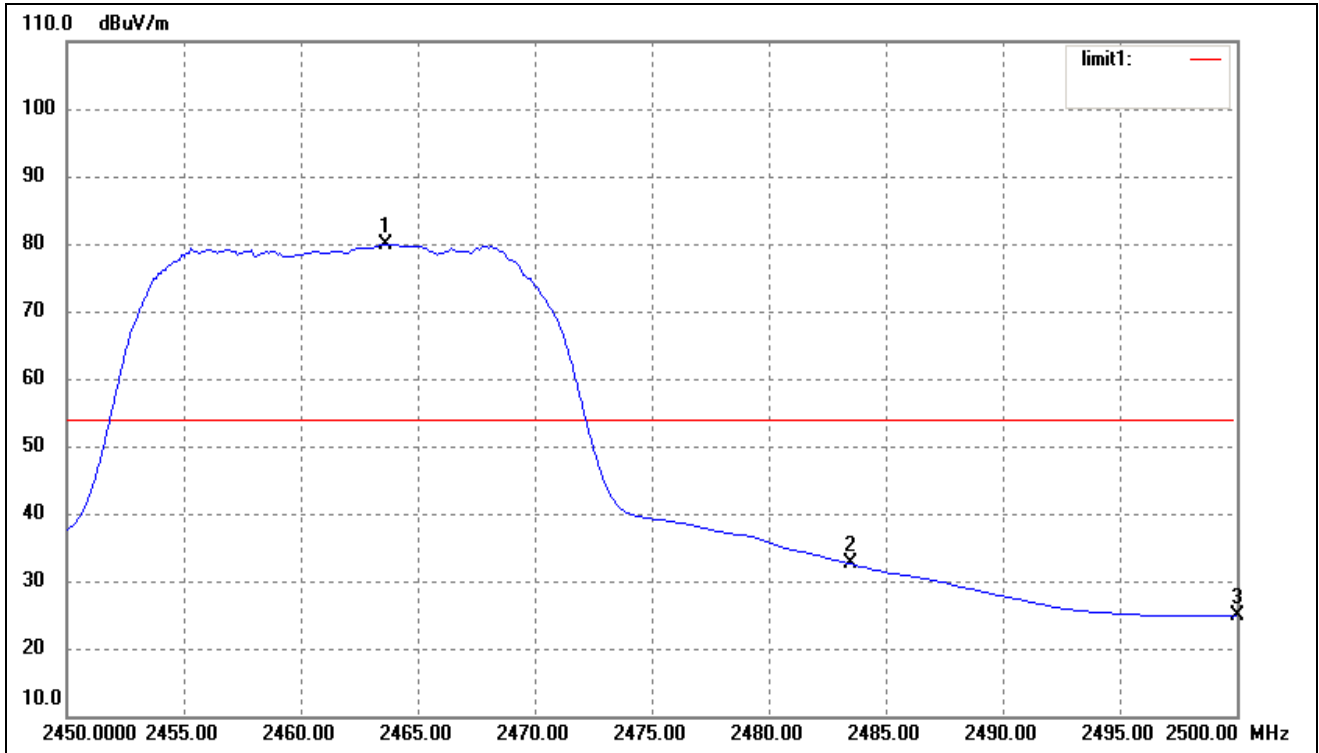


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.600	91.56	-11.77	79.79	/	/	Average Detector
	2463.600	91.56	-11.77	98.87	/	/	Peak Detector
2	2483.500	Delta =47.28 dBc		32.51	54.00	-21.49	Average Detector
	2483.500	Delta =47.28 dBc		51.59	74.00	-22.41	Peak Detector
3	2500.000	36.57	-11.78	24.79	54.00	-29.21	Average Detector
	2500.000	50.19	-11.78	38.41	74.00	-35.59	Peak Detector

802.11n-HT40-Lowest Bandedge

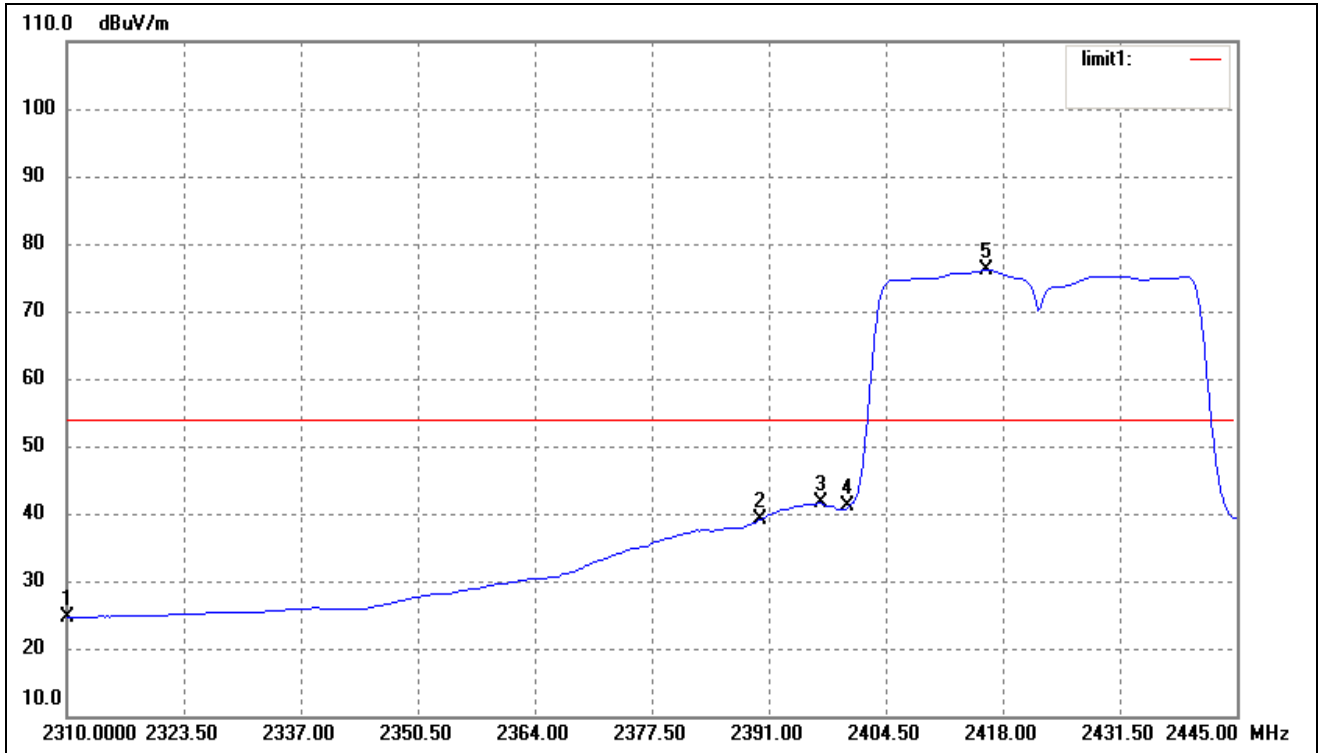

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	36.36	-11.72	24.64	54.00	-29.36	Average Detector
	2310.000	49.19	-11.72	37.47	74.00	-36.53	Peak Detector
2	2390.000	51.00	-11.75	39.25	54.00	-14.75	Average Detector
	2390.000	65.22	-11.75	53.47	74.00	-20.53	Peak Detector
3	2396.940	53.28	-11.75	41.53	54.00	-12.47	Average Detector
	2396.940	69.61	-11.75	57.86	74.00	-16.14	Peak Detector
4	2400.000	52.86	-11.75	41.11	/	/	Average Detector
5	2416.110	87.82	-11.76	76.06	/	/	Average Detector

802.11n-HT40-Highest Bandedge

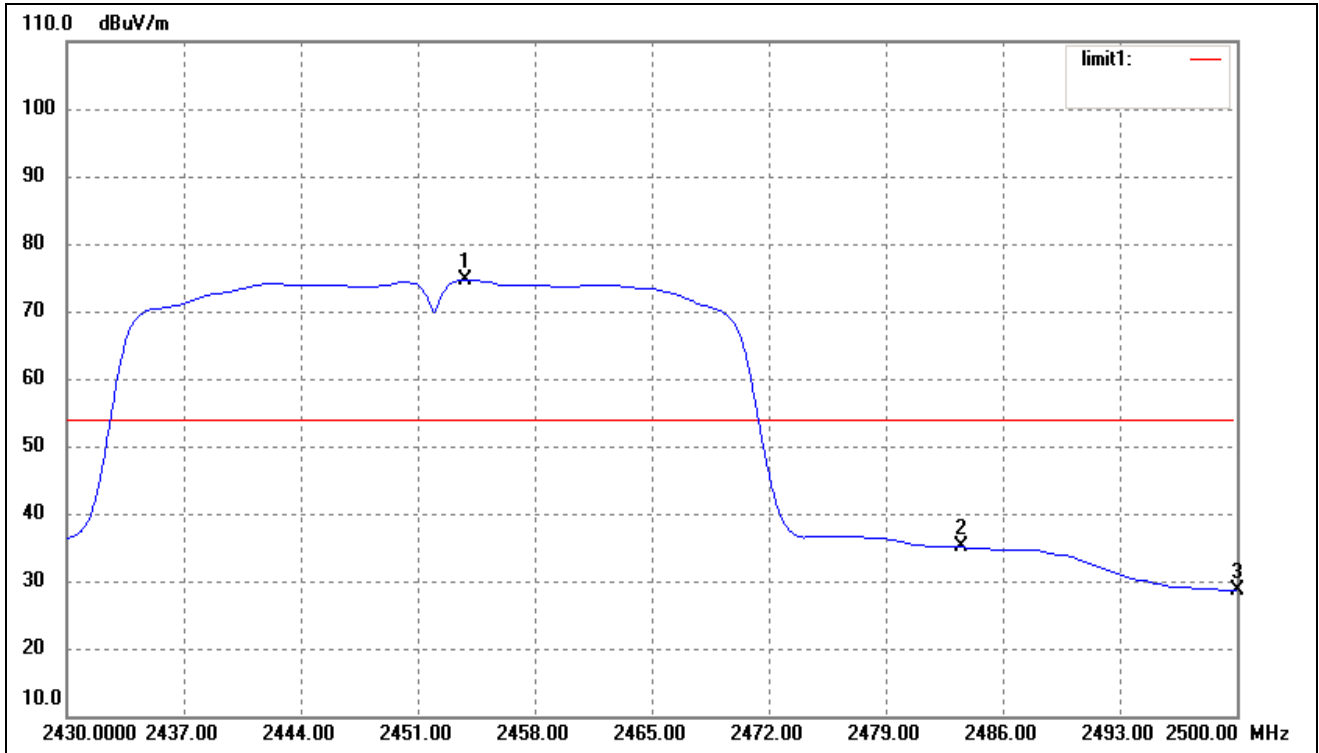


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2453.800	86.43	-11.76	74.67	/	/	Average Detector
	2453.800	86.43	-11.76	95.34	/	/	Peak Detector
2	2483.500	Delta =39.66 dBc		35.01	54.00	-18.99	Average Detector
	2483.500	Delta =39.66 dBc		55.68	74.00	-18.32	Peak Detector
3	2500.000	40.45	-11.78	28.67	54.00	-25.33	Average Detector
	2500.000	57.32	-11.78	45.54	74.00	-28.46	Peak Detector

Bandedge (Conducted)


802.11b-Lowest Bandedge




802.11b-Highest Bandedge

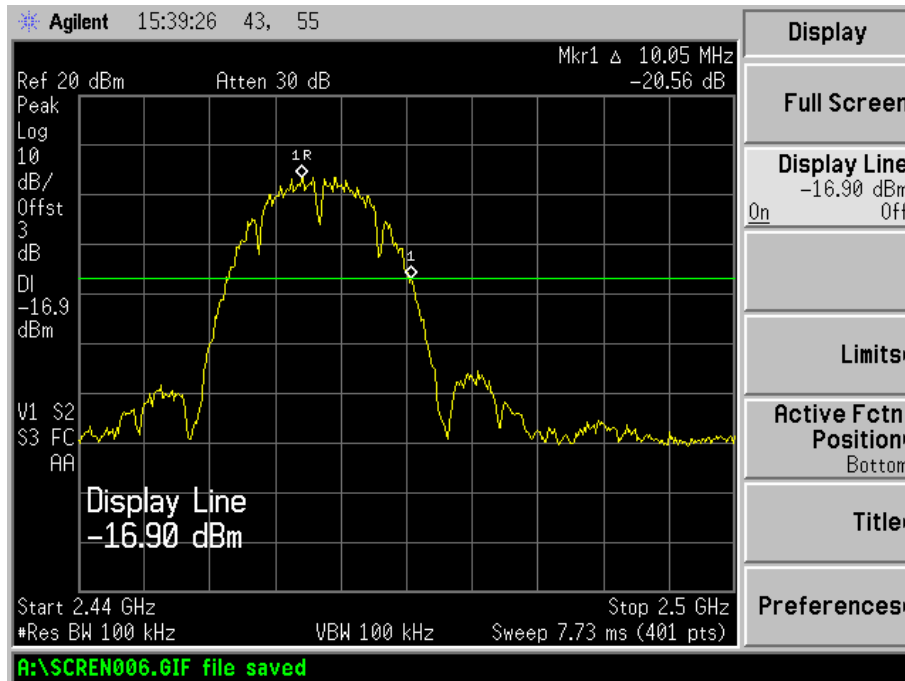


802.11g-Lowest Bandedge

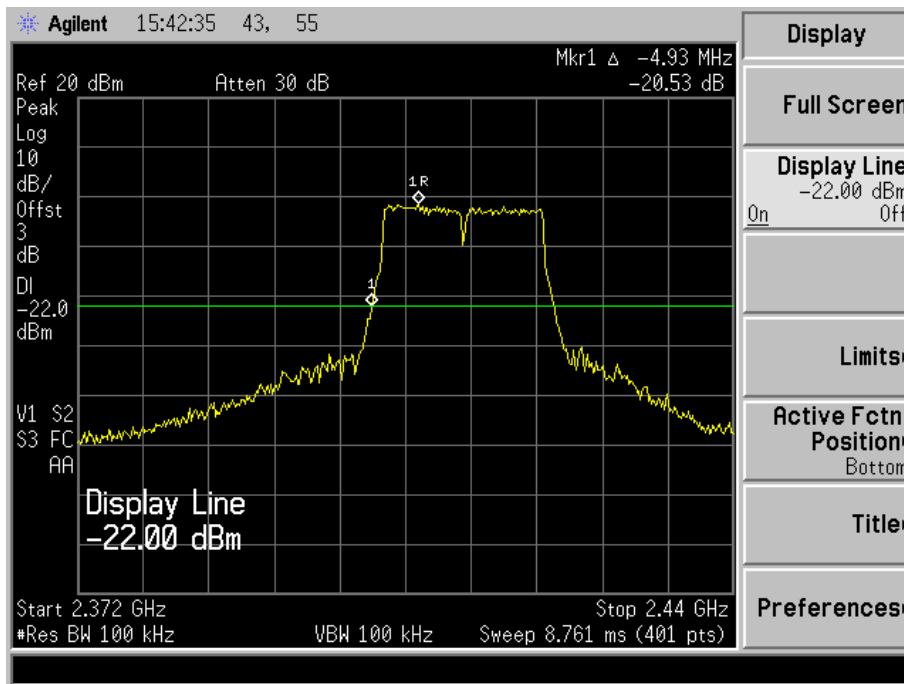


802.11g-Highest Bandedge

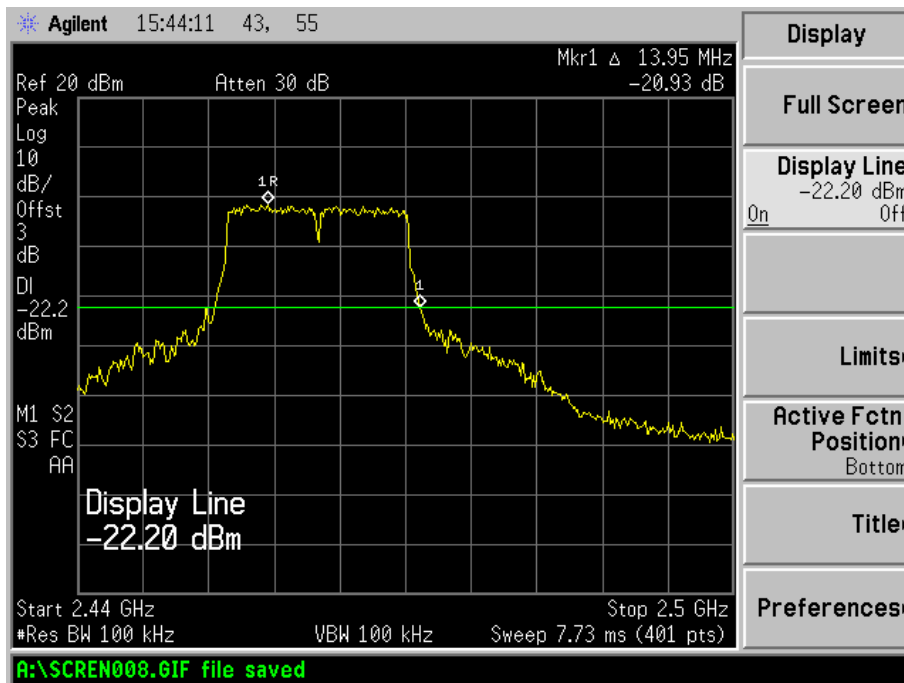


802.11n-HT20-Lowest Bandedge

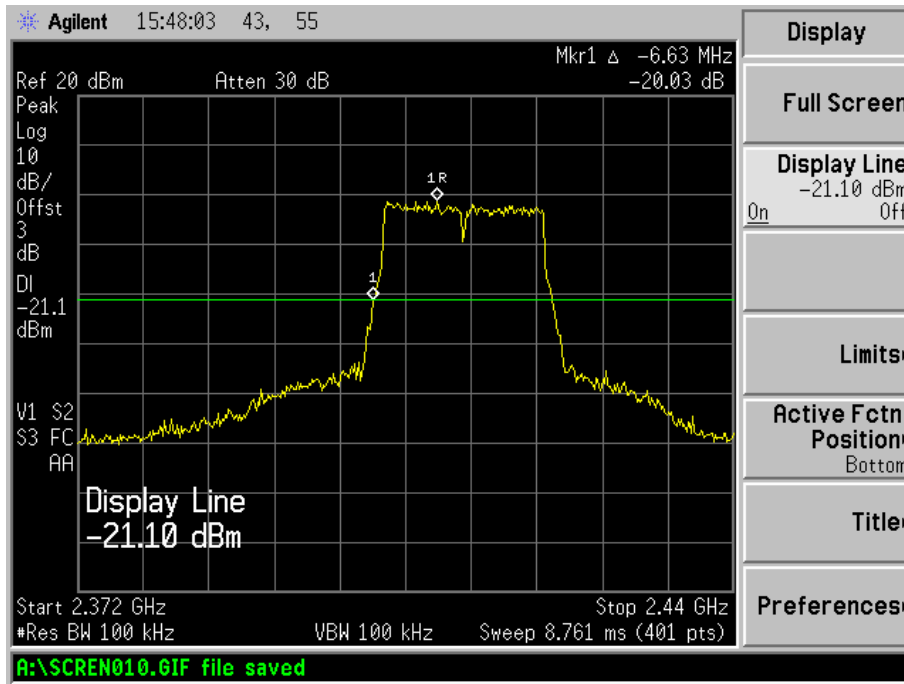


802.11n-HT20-Highest Bandedge

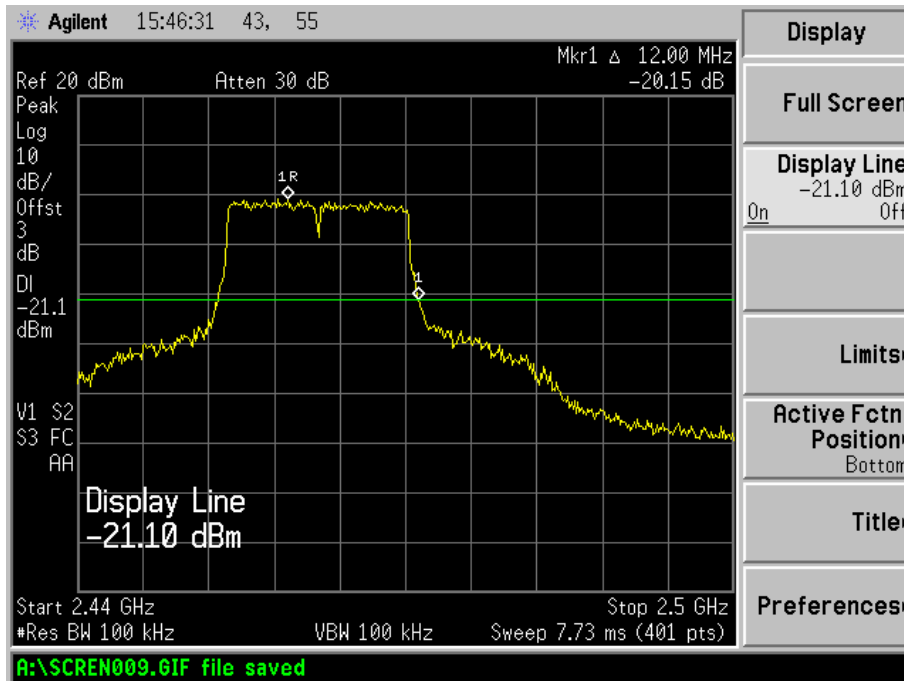

802.11n-HT40-Lowest Bandedge

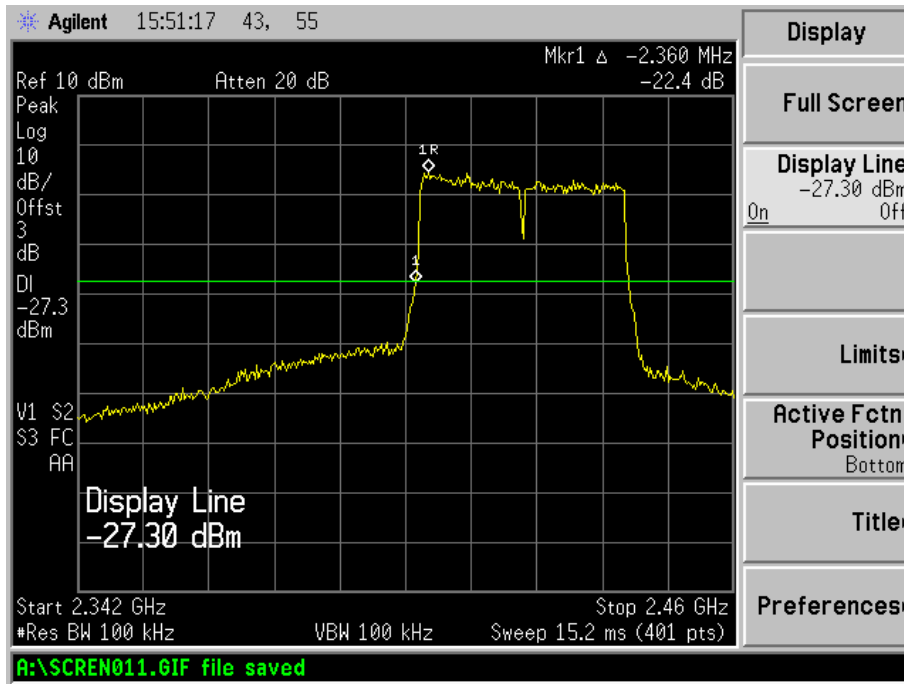


802.11n-HT40-Highest Bandedge

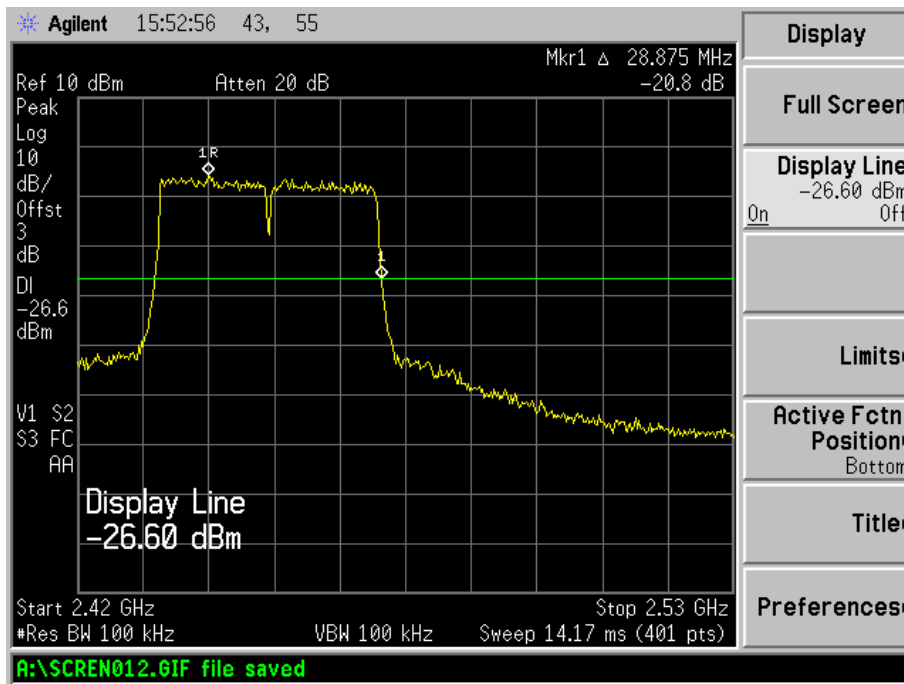


Conducted Spurious Emissions


802.11b Low Bandedge

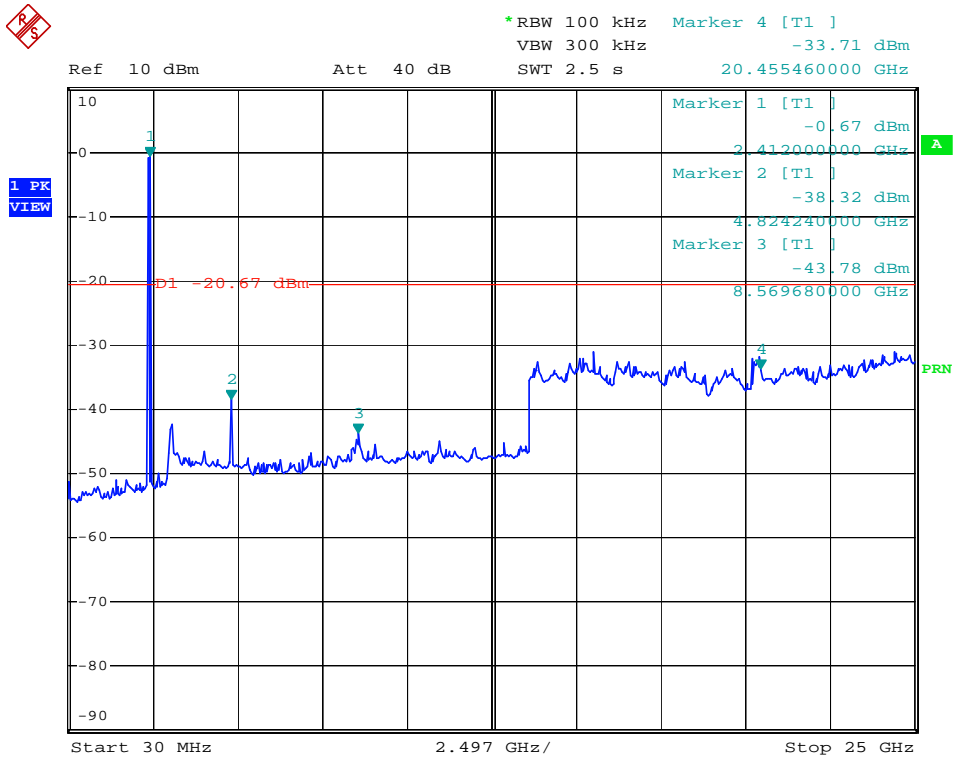


802.11b Middle Bandedge

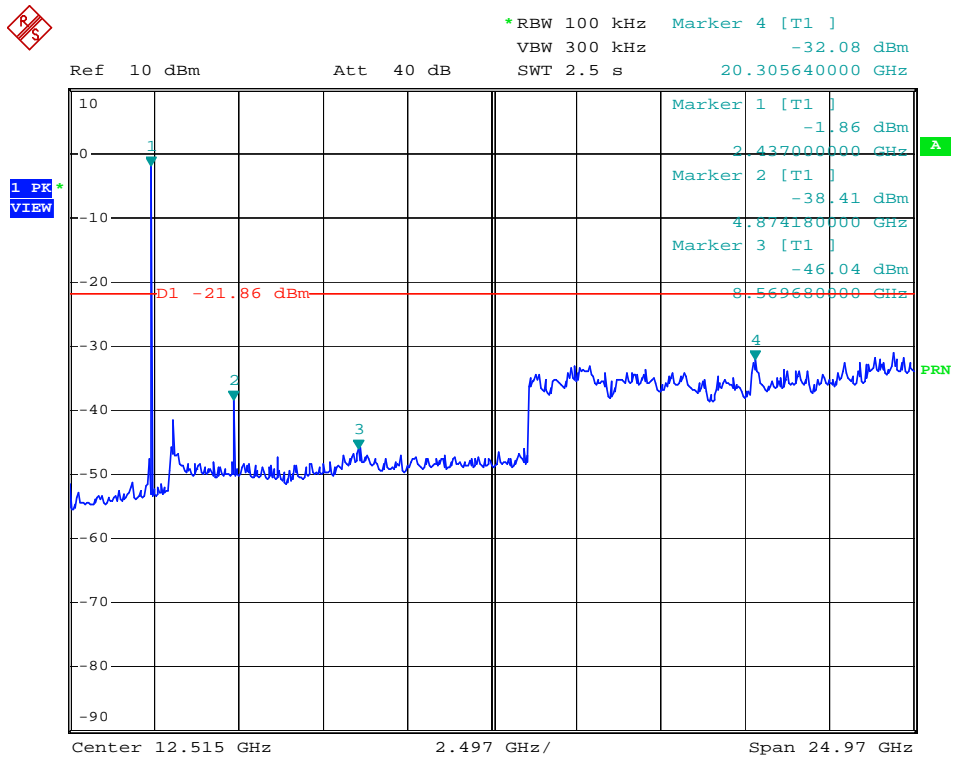


802.11b High Bandedge

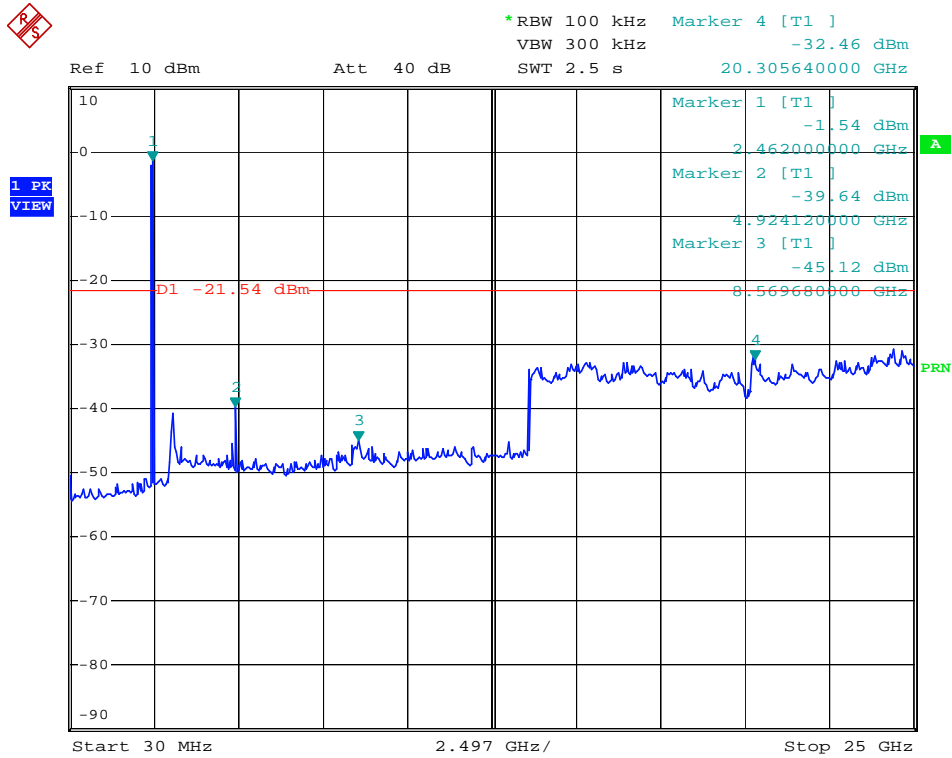


802.11g Low Bandedge

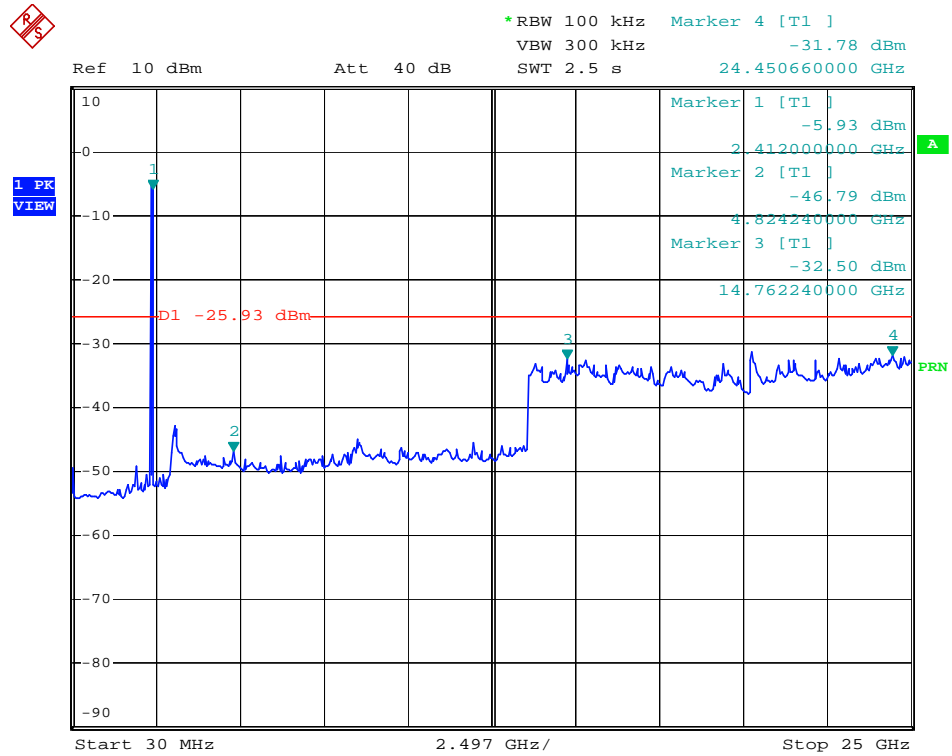


802.11g Middle Bandedge

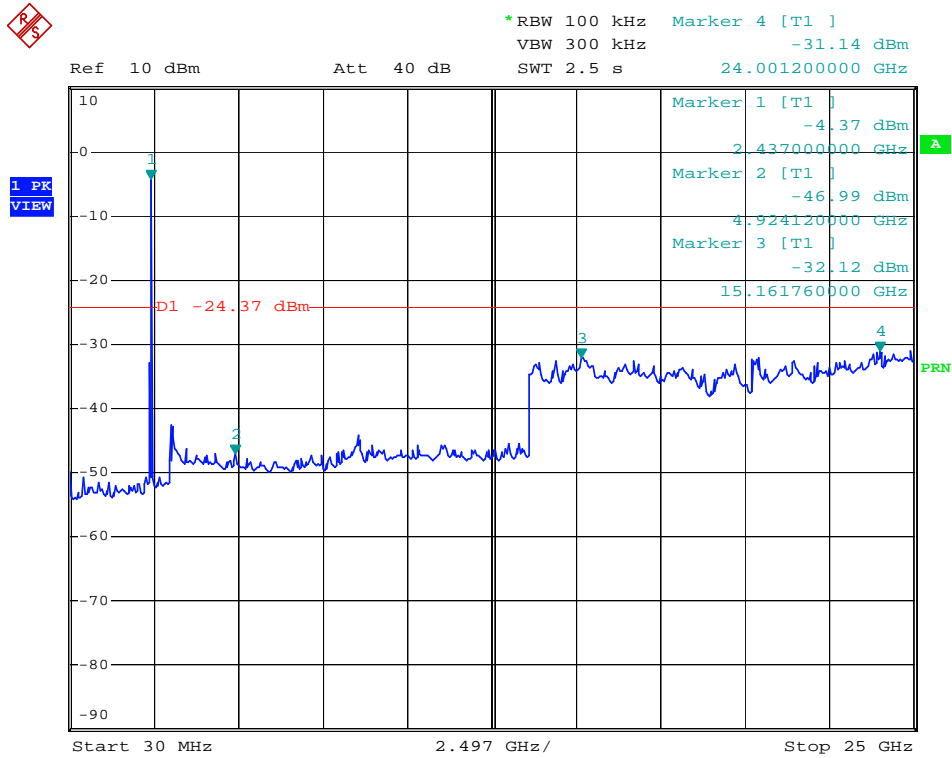


802.11g High Bandedge

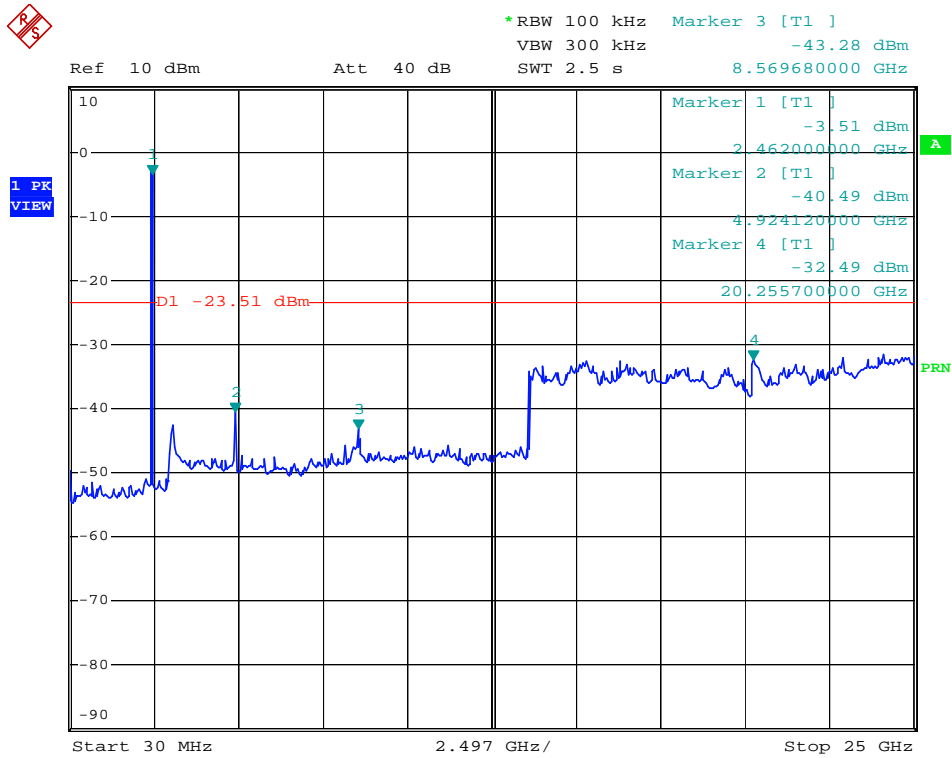


802.11n-HT20 Low Bandedge

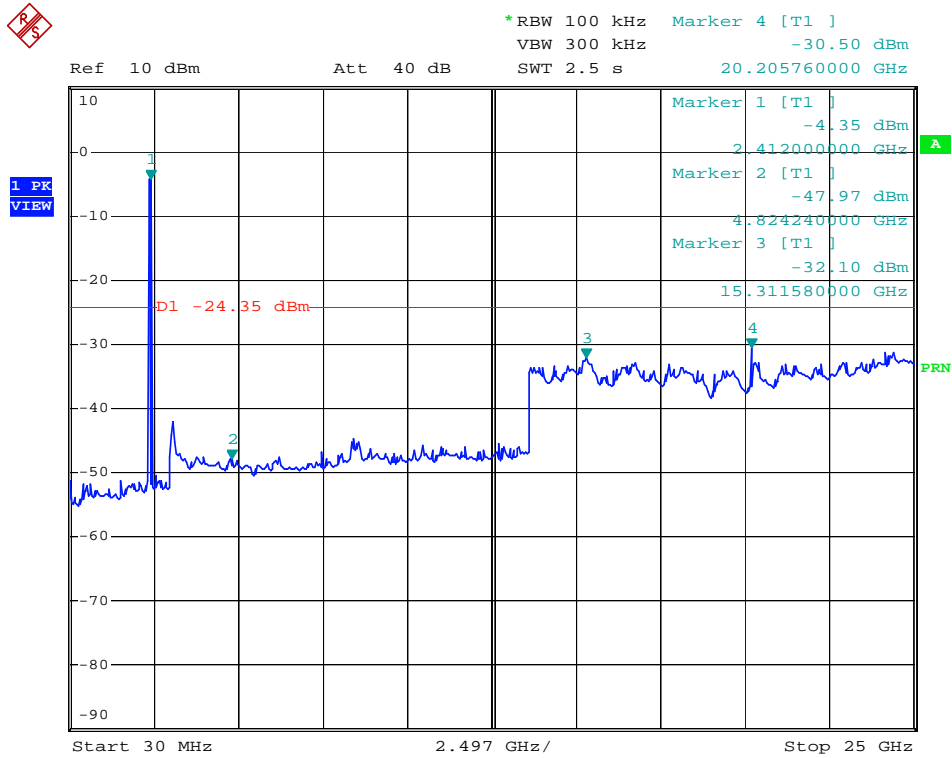


802.11n-HT20 Middle Bandedge

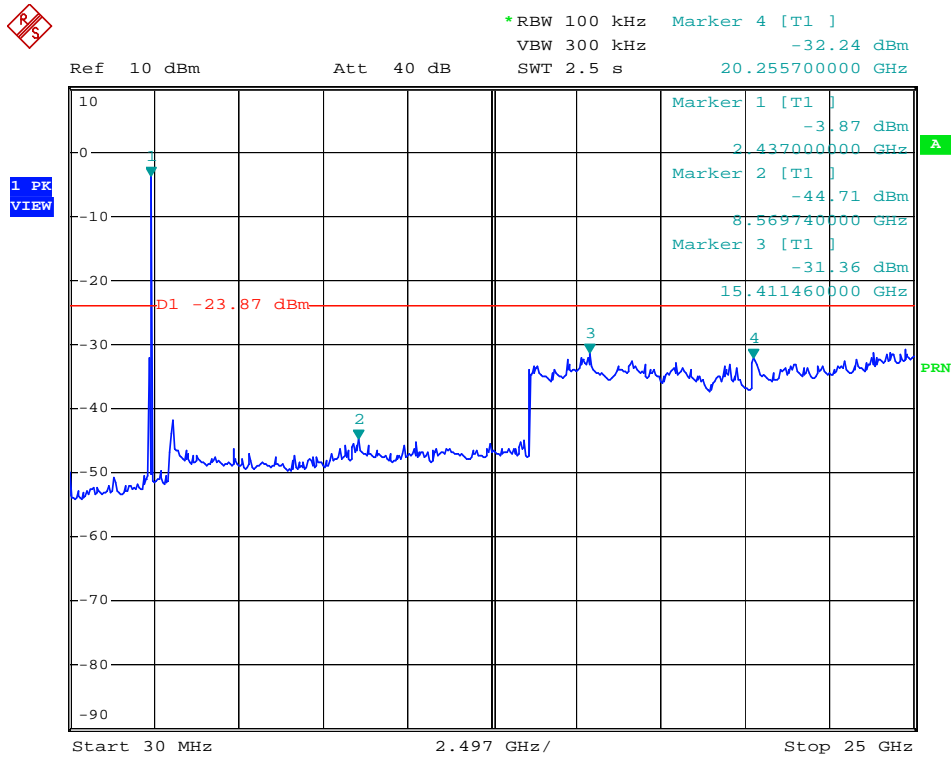


802.11n-HT20 High Bandedge

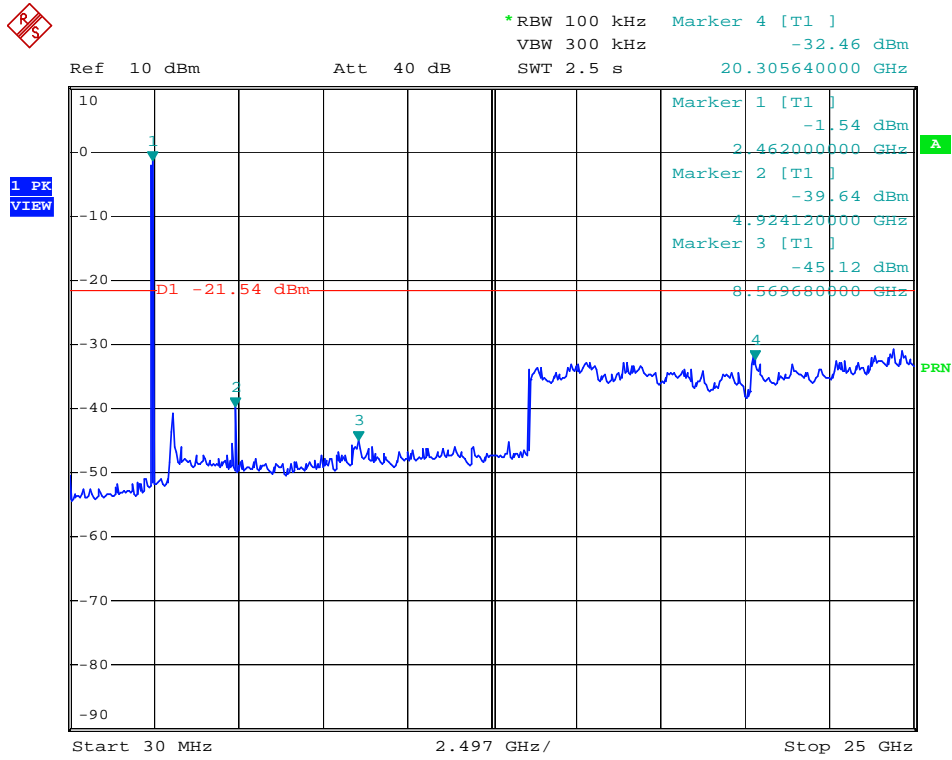


802.11n-HT40 Low Bandedge

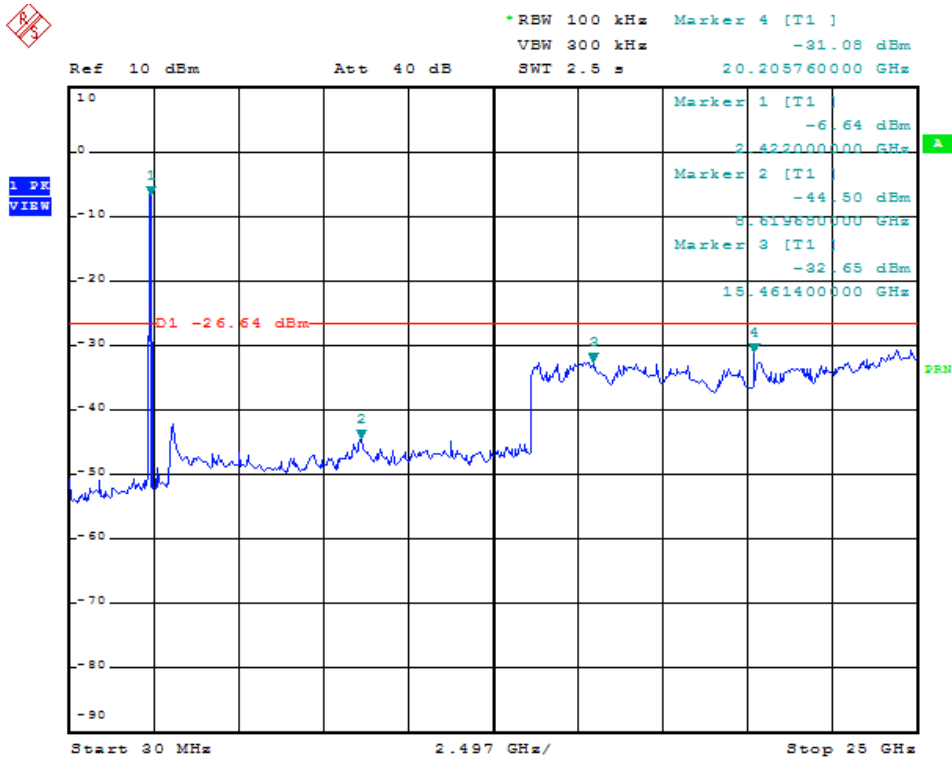

802.11n-HT40 Middle Bandedge

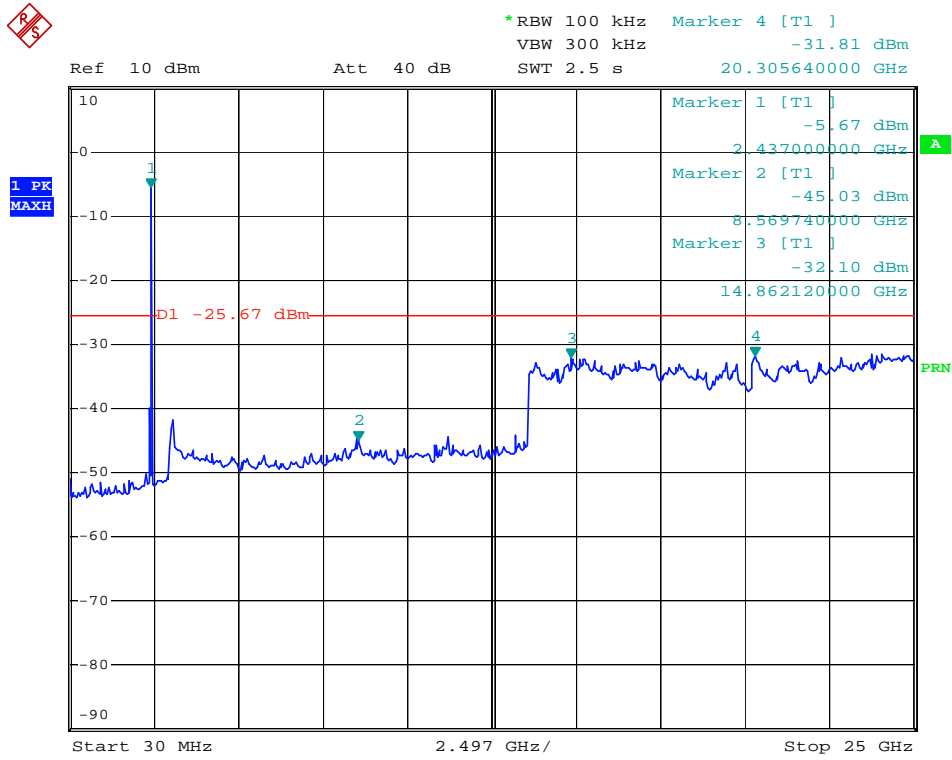

802.11n-HT40 High Bandedge

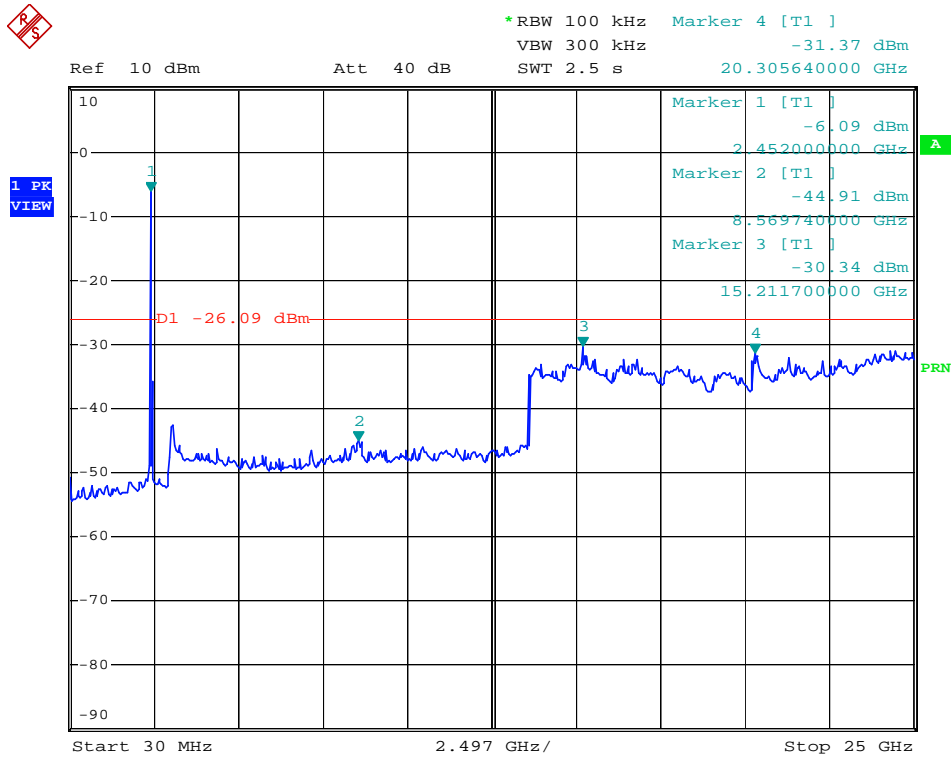

10. Conducted Emissions

10.1 Measurement Uncertainty

Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is ± 2.88 dB.

10.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2012-03-28	2013-03-27
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2012-03-28	2013-03-27
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2012-03-28	2013-03-27


10.3 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

10.4 Basic Test Setup Block Diagram

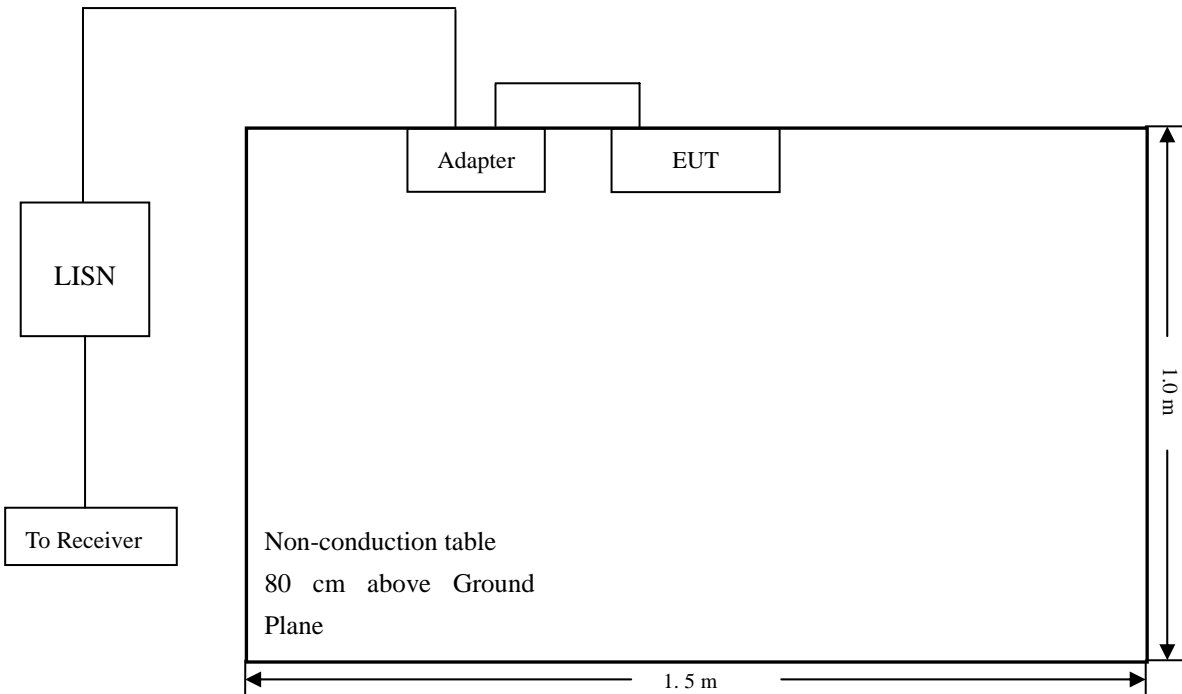

10.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar

10.6 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency 150 kHz
 Stop Frequency..... 30 MHz
 Sweep Speed Auto
 IF Bandwidth..... 10 kHz
 Quasi-Peak Adapter Bandwidth 9 kHz
 Quasi-Peak Adapter Mode Normal

10.7 Summary of Test Results/Plots

According to the data in section 3.8, the EUT complied with the FCC Part 15.207 Conducted margin for a Class B device, with the *worst* margin reading of:

-4.22 dBµV at 0.170 MHz in the Neutral mode, Peak detector, 0.15-30MHz

10.8 Conducted Emissions Test Data

Plot of Conducted Emissions Test Data

EUT: GSM/GPRS Dual-band Mobile Phone

Tested Model: R623

Operating Condition: Charging & Transmitting


Comment: AC 120V/60Hz adapter

Test Specification: Neutral



RBW 9 kHz
MT 10 ms

Att 10 dB AUTO

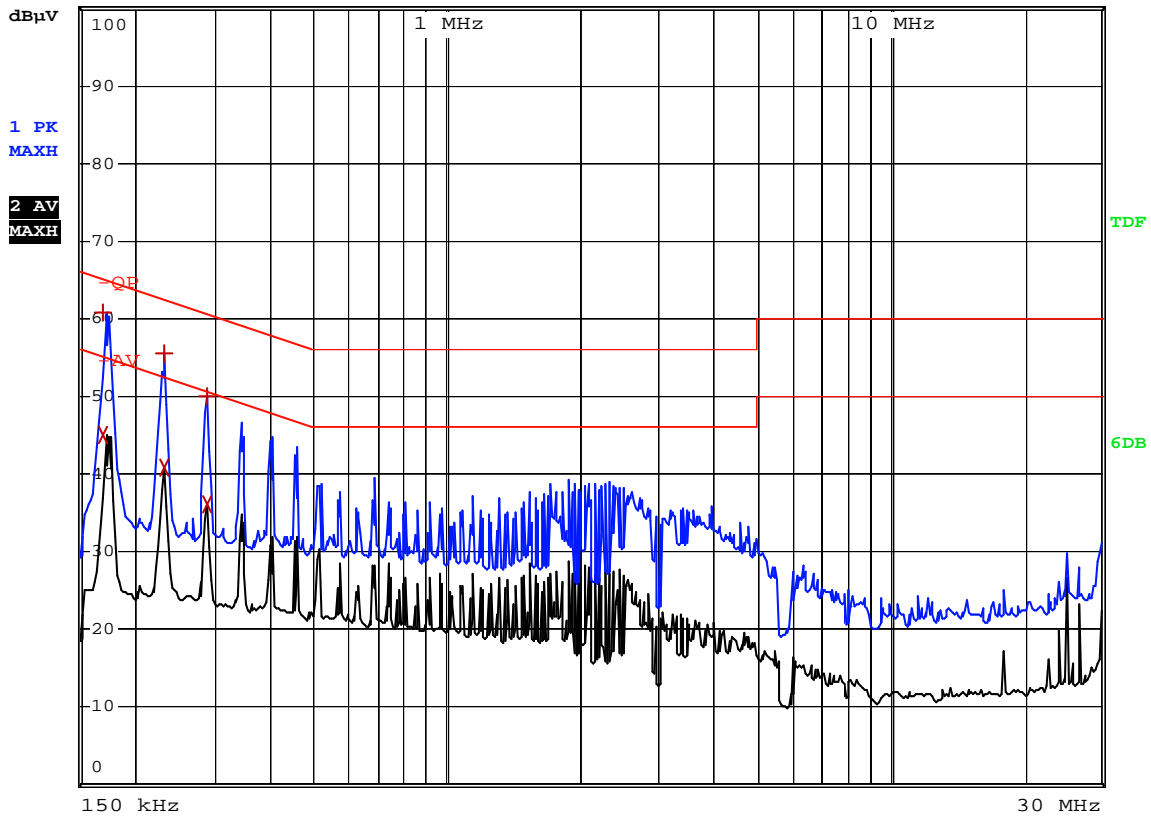


EDIT PEAK LIST (Prescan Results)			
TRACE	FREQUENCY	LEVEL dBµV	DELTA LIMIT dB
Trace1:	-QP		
Trace2:	-AV		
Trace3:	---		
1 Max Peak	170 kHz	60.73	-4.22
2 Average	170 kHz	44.97	-9.98
1 Max Peak	230 kHz	55.52	-6.92
2 Average	230 kHz	40.80	-11.64
1 Max Peak	286 kHz	50.03	-10.60
2 Average	286 kHz	36.11	-14.52

Test Specification: Line



RBW 9 kHz
MT 10 ms

Att 10 dB AUTO

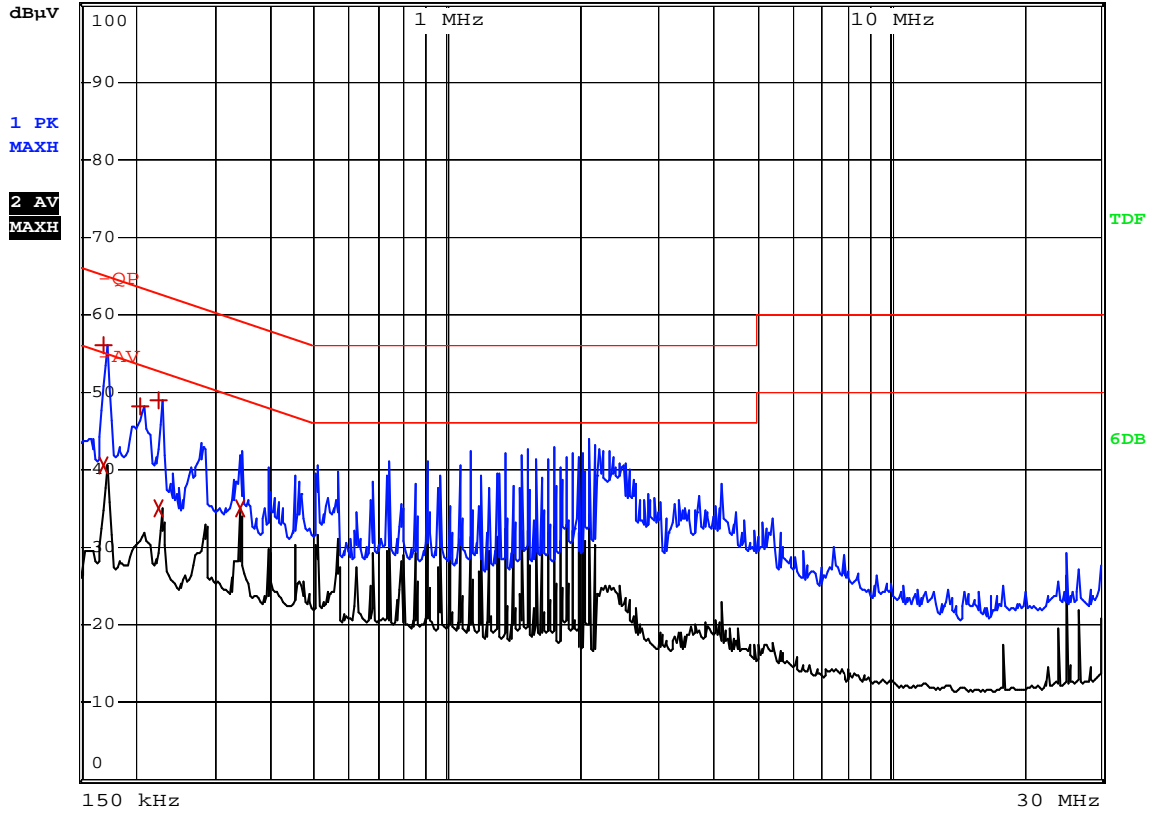

EDIT PEAK LIST (Prescan Results)			
Trace1:		-QP	
Trace2:		-AV	
Trace3:		---	
TRACE		FREQUENCY	LEVEL dBµV
1	Max Peak	170 kHz	56.01
2	Average	170 kHz	40.52
1	Max Peak	206 kHz	48.05
1	Max Peak	226 kHz	48.88
2	Average	226 kHz	35.05
2	Average	338 kHz	34.93
			DELTA LIMIT dB
			-8.94
			-14.43
			-15.30
			-13.71
			-17.54
			-14.31

***** END OF REPORT *****