

SAR measurement Plots




Test mode: GSM850, High channel (Right Head Cheek)

Product Description: GSM Mobile phone

Model: S400

Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	848.8000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	3.90000
SAR 10g (W/Kg)	0.512580
SAR 1g (W/Kg)	0.685912
SURFACE SAR	VOLUME SAR

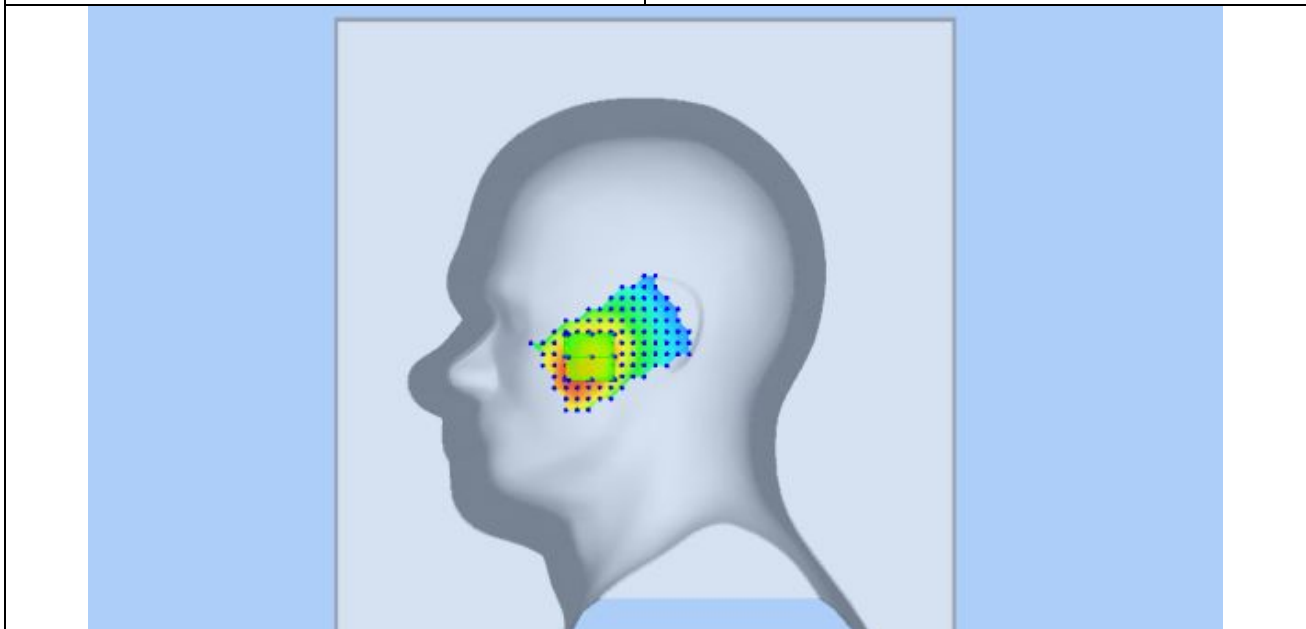
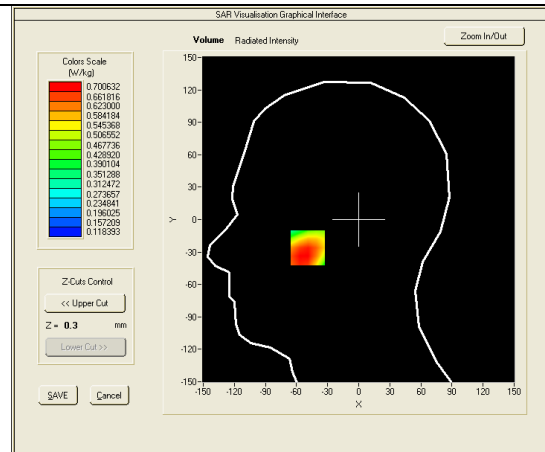
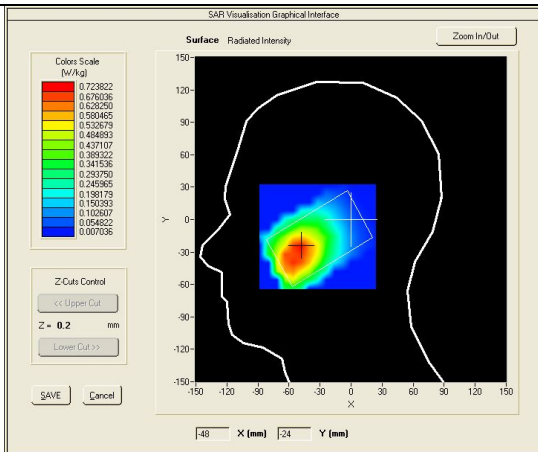


Test mode: GSM850, High channel (Right Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	848.8000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.73000
SAR 10g (W/Kg)	0.394508
SAR 1g (W/Kg)	0.514533

SURFACE SAR

VOLUME SAR

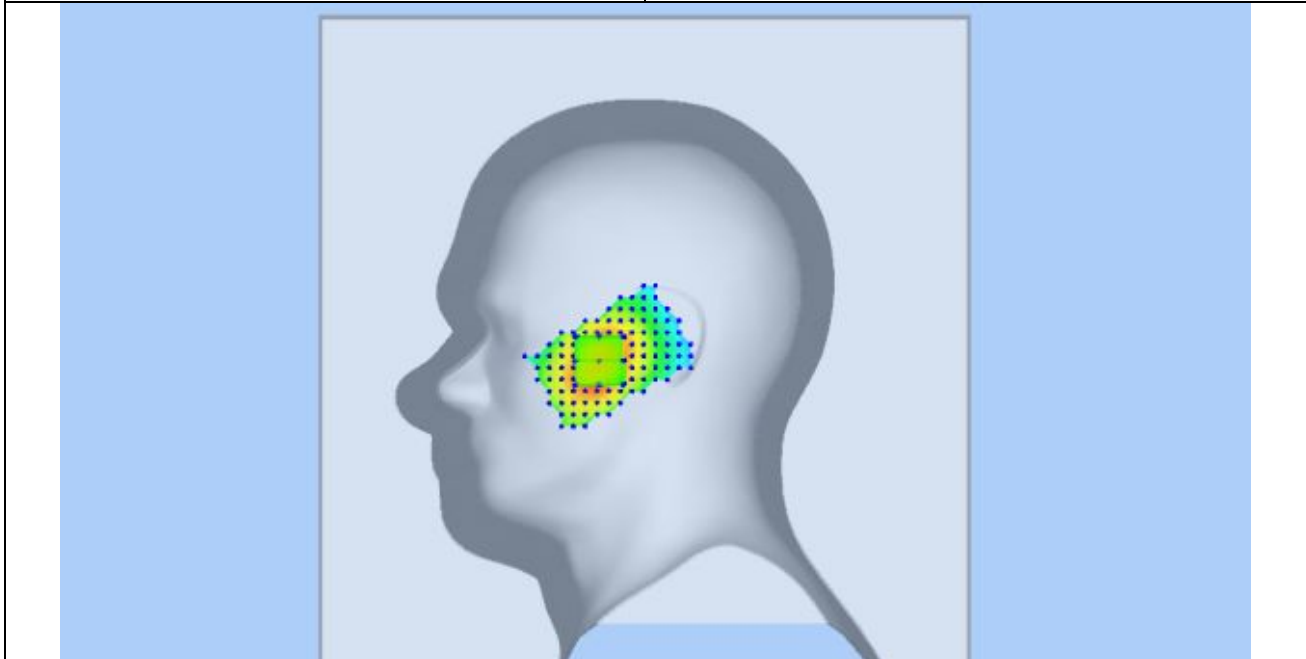
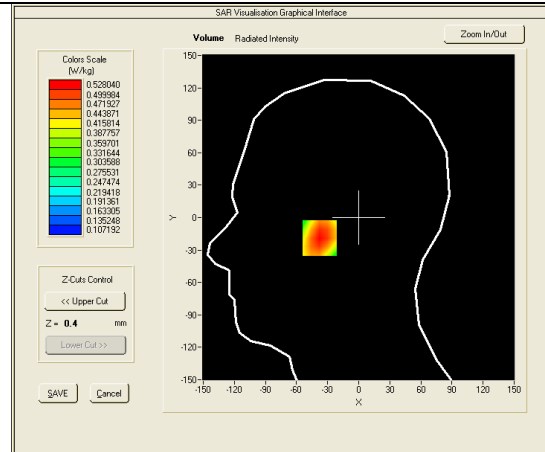
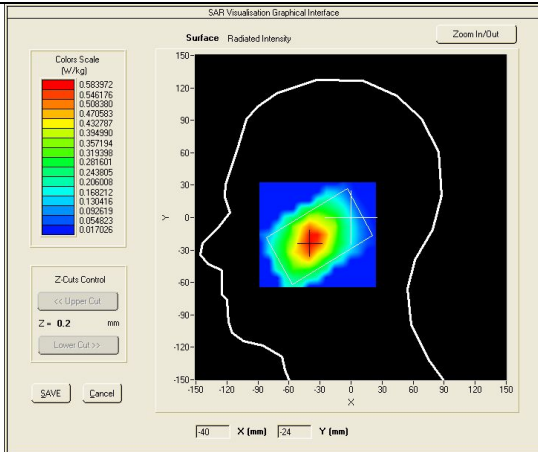


Test mode: GSM850, High channel (Left Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	848.8000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.33000
SAR 10g (W/Kg)	0.509216
SAR 1g (W/Kg)	0.671955

SURFACE SAR

VOLUME SAR

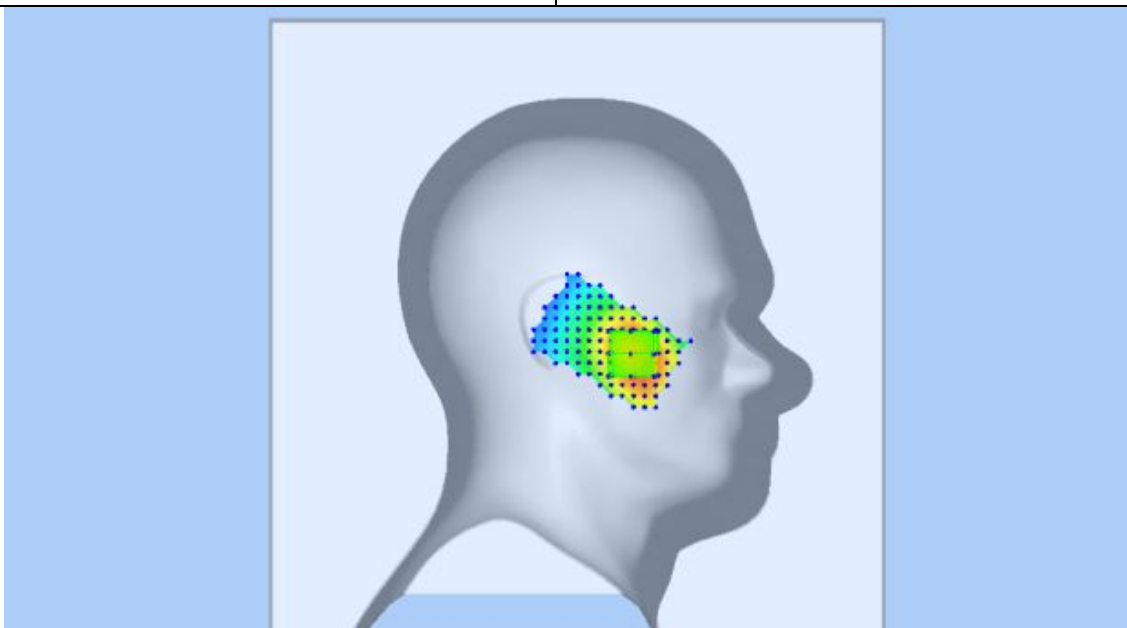
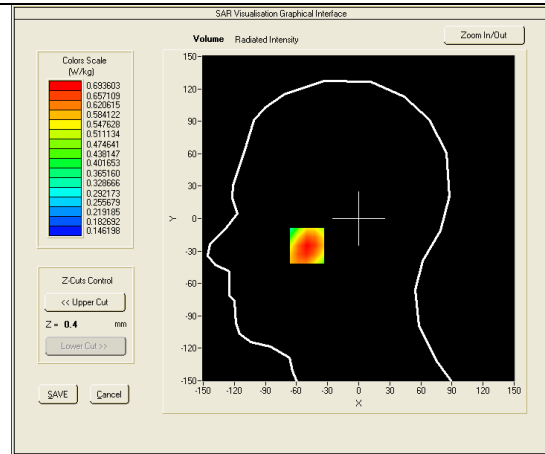
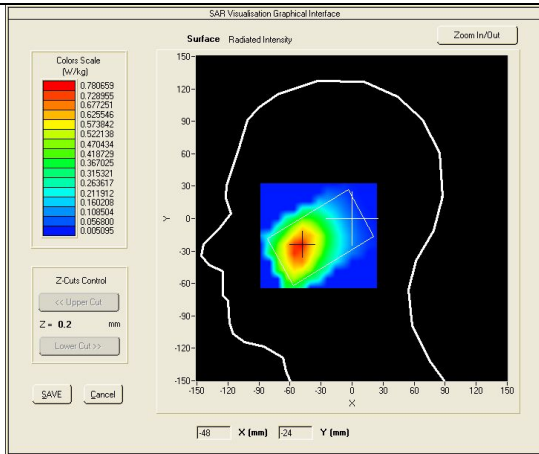


Test mode: GSM850, High channel (Left Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	848.8000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	3.46000
SAR 10g (W/Kg)	0.381728
SAR 1g (W/Kg)	0.521718

SURFACE SAR

VOLUME SAR

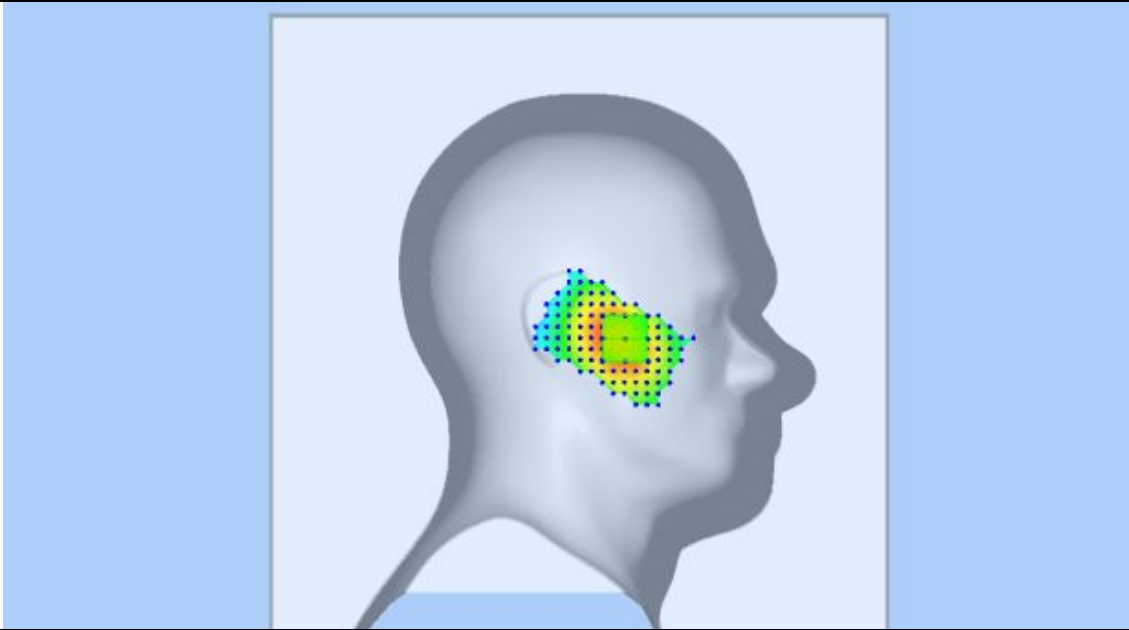
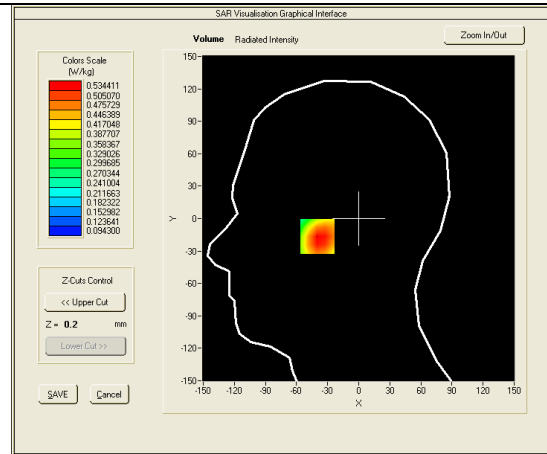
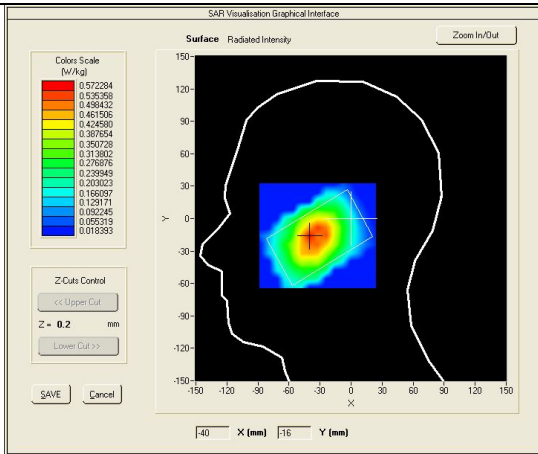


Test mode: GPRS850, High channel (Body-LCD UP)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	MSL_850
Frequency (MHz)	848.8000
Relative permittivity (real part)	54.30
Conductivity (S/m)	0.99
E-Field Probe	SN 09/13 EPG176
Crest factor	4.0
Conversion Factor	3.59
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-3.79000
SAR 10g (W/Kg)	0.422183
SAR 1g (W/Kg)	0.592873

SURFACE SAR

VOLUME SAR

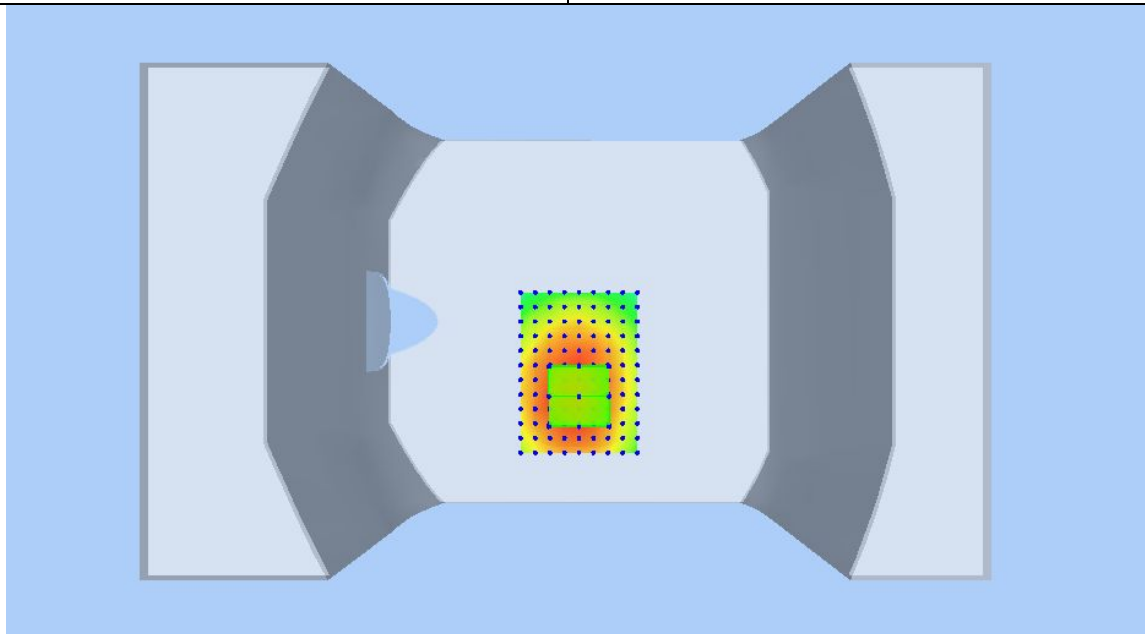
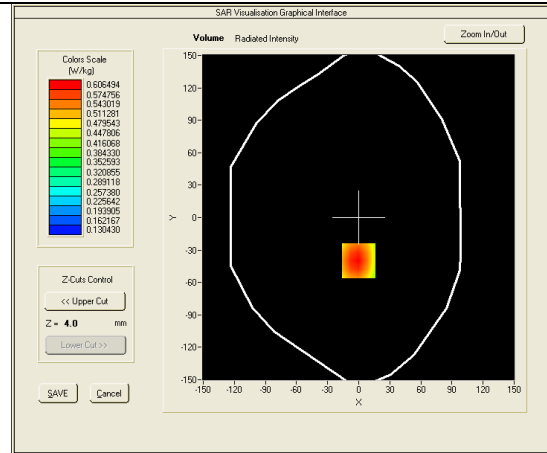
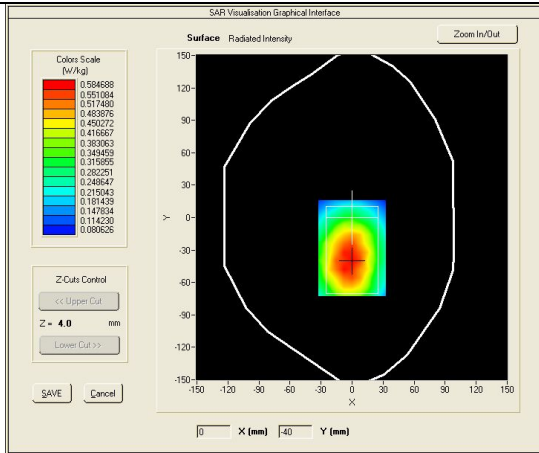


Test mode: GPRS850, High channel (Body-LCD DOWN)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	MSL_850
Frequency (MHz)	848.8000
Relative permittivity (real part)	54.30
Conductivity (S/m)	0.99
E-Field Probe	SN 09/13 EPG176
Crest factor	4.0
Conversion Factor	3.59
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	0.74000
SAR 10g (W/Kg)	0.493981
SAR 1g (W/Kg)	0.700624




SURFACE SAR

VOLUME SAR

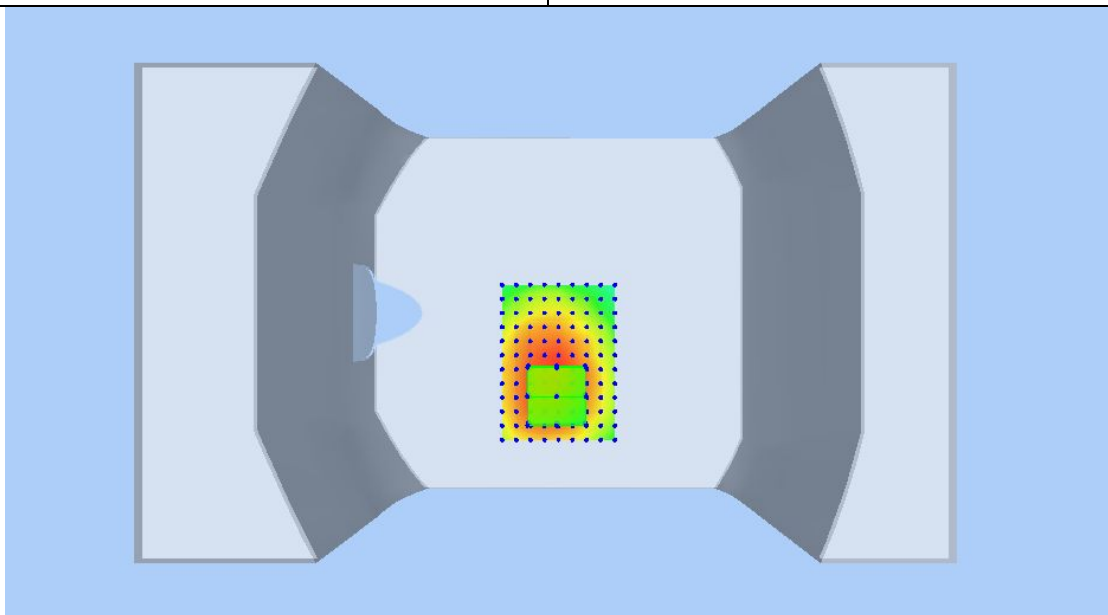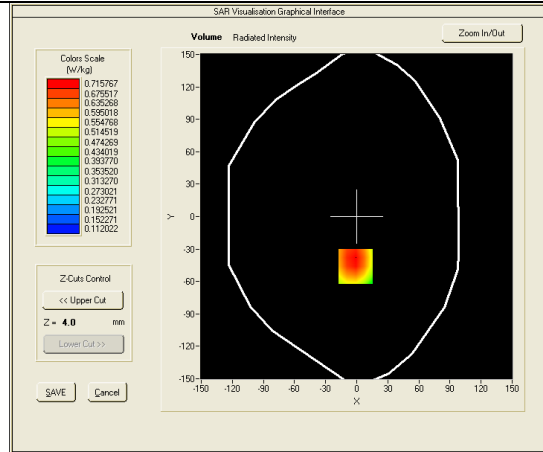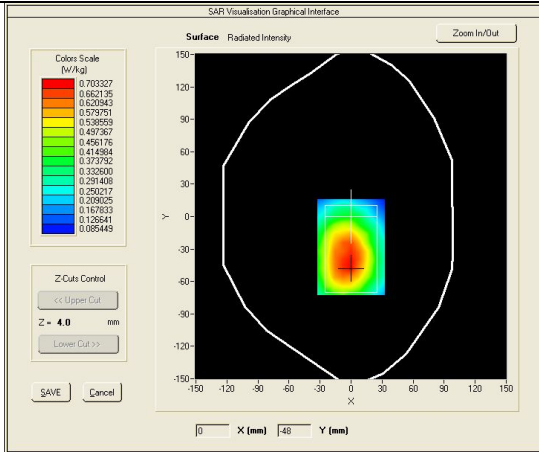

Test mode: WCDMA BAND V , high channel (Right Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	846.4000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	0.29000
SAR 10g (W/Kg)	0.283488
SAR 1g (W/Kg)	0.390019
SURFACE SAR	VOLUME SAR

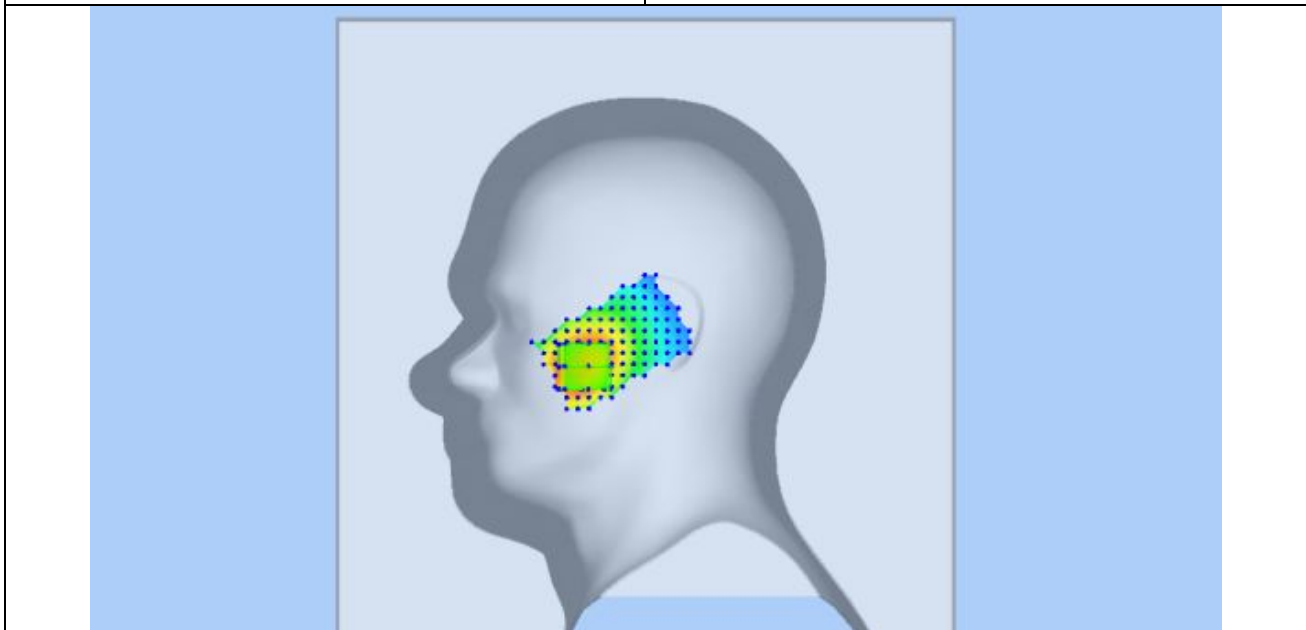
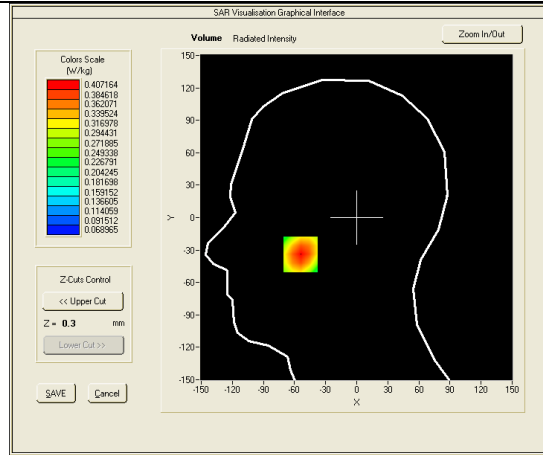
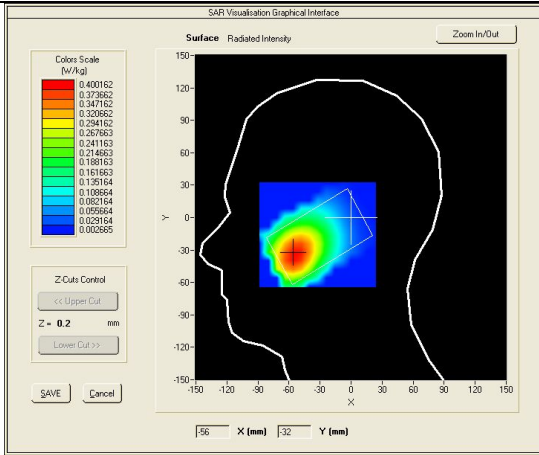


Test mode: WCDMA BAND V, high channel (Right Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	846.4000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	1.30000
SAR 10g (W/Kg)	0.226745
SAR 1g (W/Kg)	0.309760




SURFACE SAR

VOLUME SAR

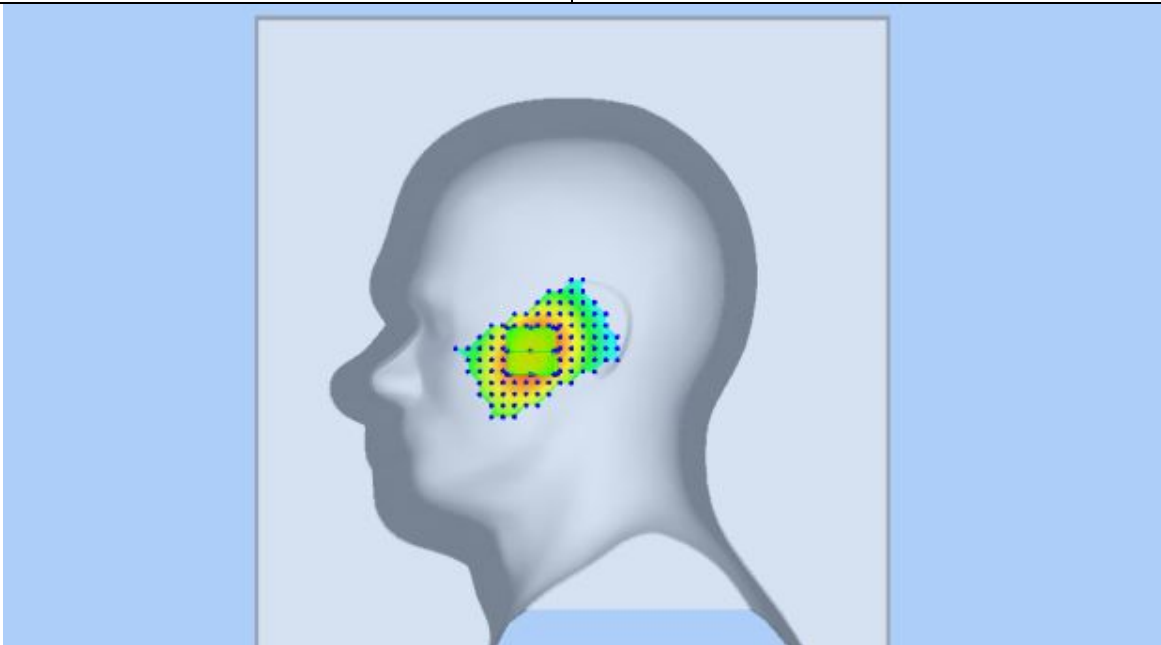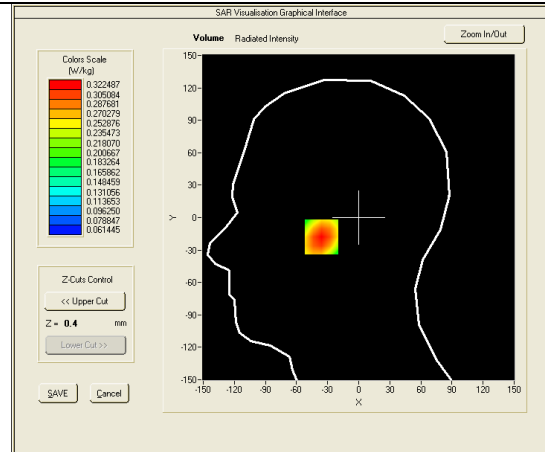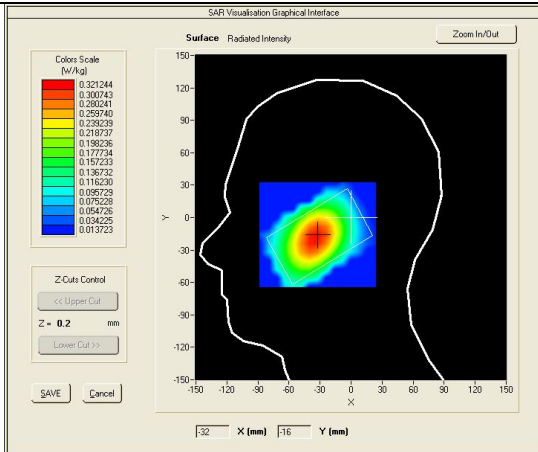




Test mode: WCDMA BAND V , high channel (Left Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	846.4000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.75000
SAR 10g (W/Kg)	0.282111
SAR 1g (W/Kg)	0.387260
SURFACE SAR	VOLUME SAR

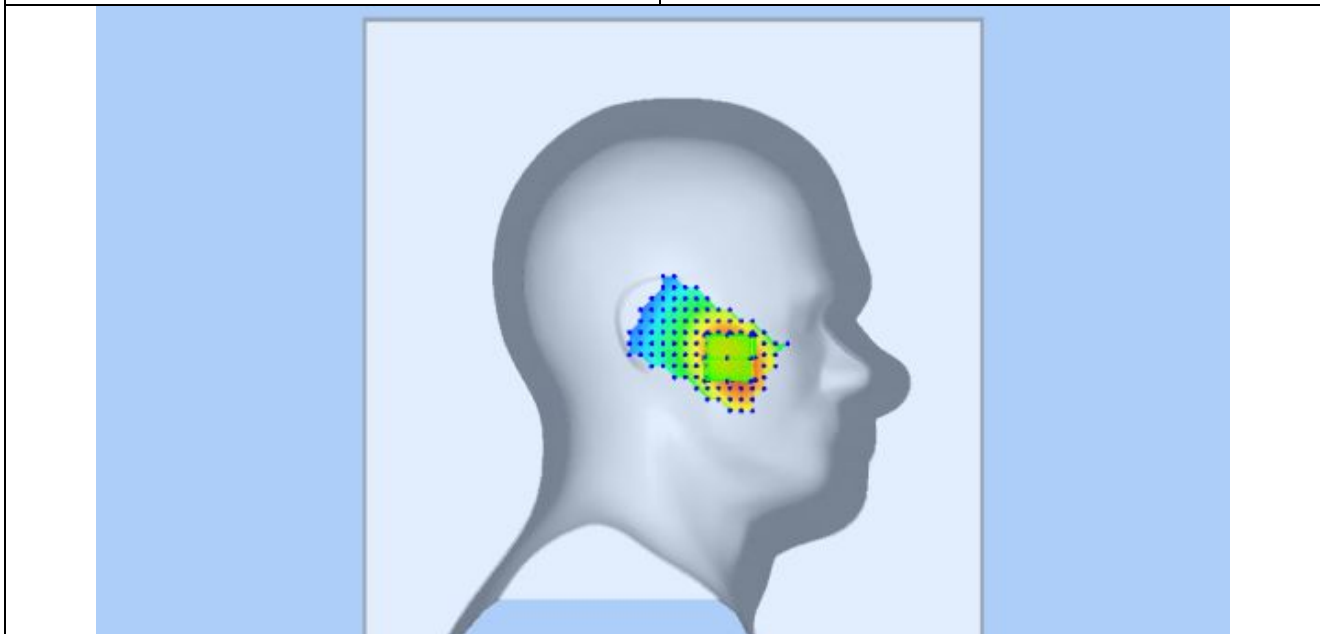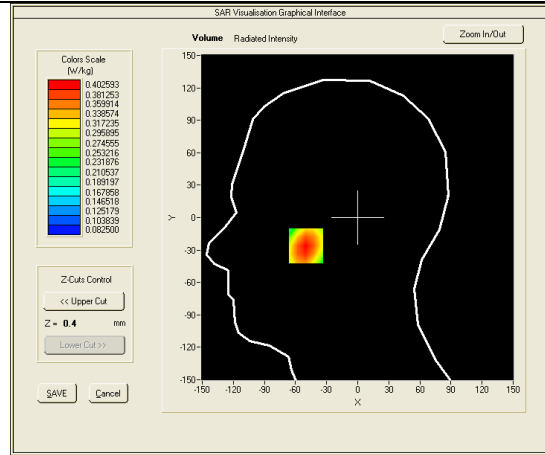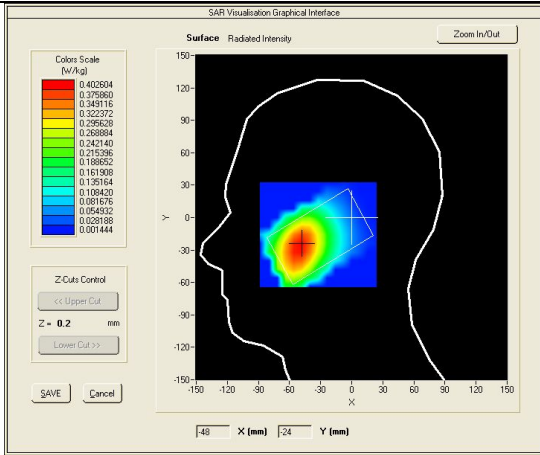




Test mode: WCDMA BAND V , high channel (Left Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	HSL_850
Frequency (MHz)	846.4000
Relative permittivity (real part)	42.70
Conductivity (S/m)	0.87
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	3.49
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.00000
SAR 10g (W/Kg)	0.232600
SAR 1g (W/Kg)	0.319878
SURFACE SAR	VOLUME SAR

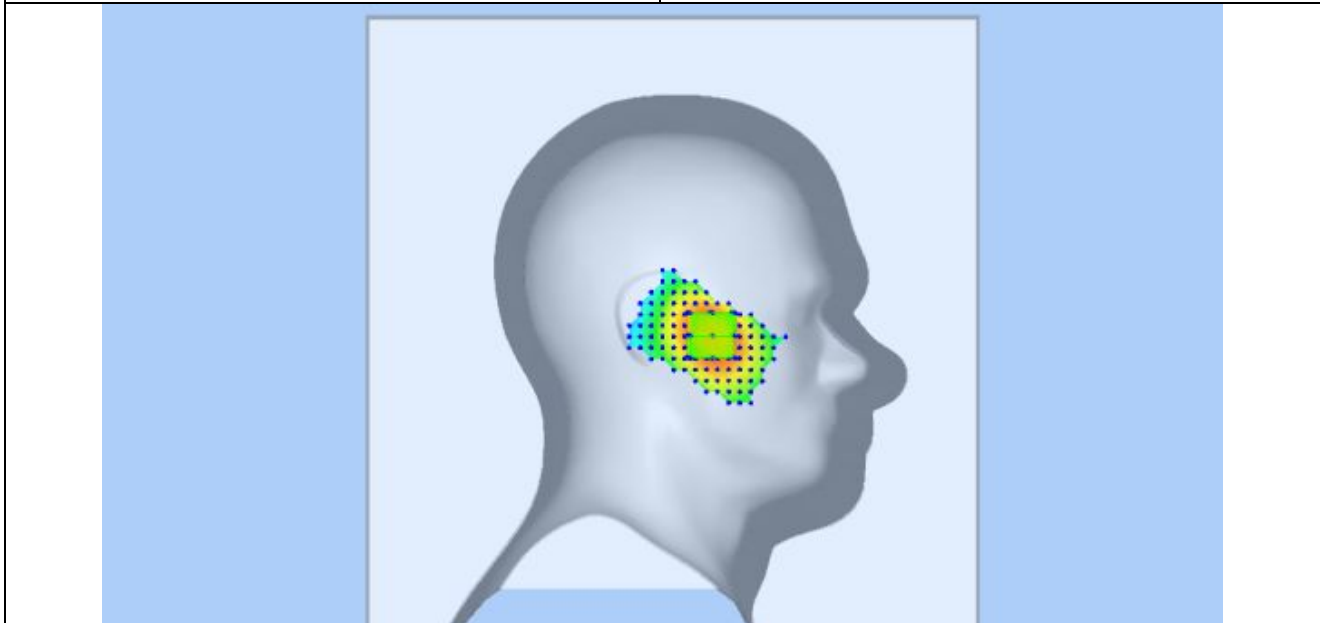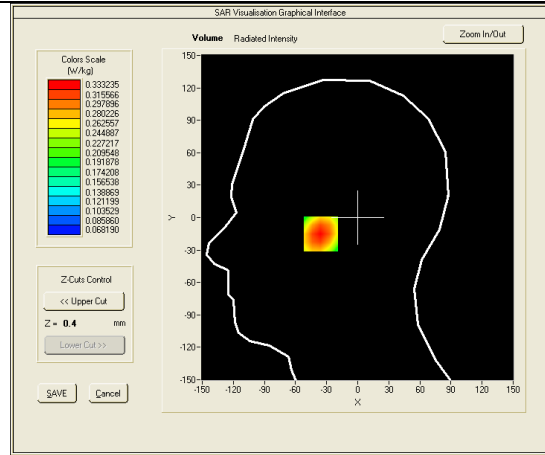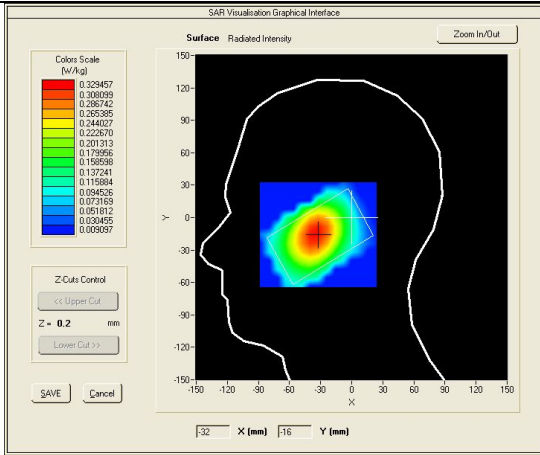




Test mode: WCDMA BAND V , high channel (Body-LCD UP)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	MSL_850
Frequency (MHz)	846.4000
Relative permittivity (real part)	54.30
Conductivity (S/m)	0.99
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	3.59
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-0.11000
SAR 10g (W/Kg)	0.321887
SAR 1g (W/Kg)	0.443624
SURFACE SAR	VOLUME SAR

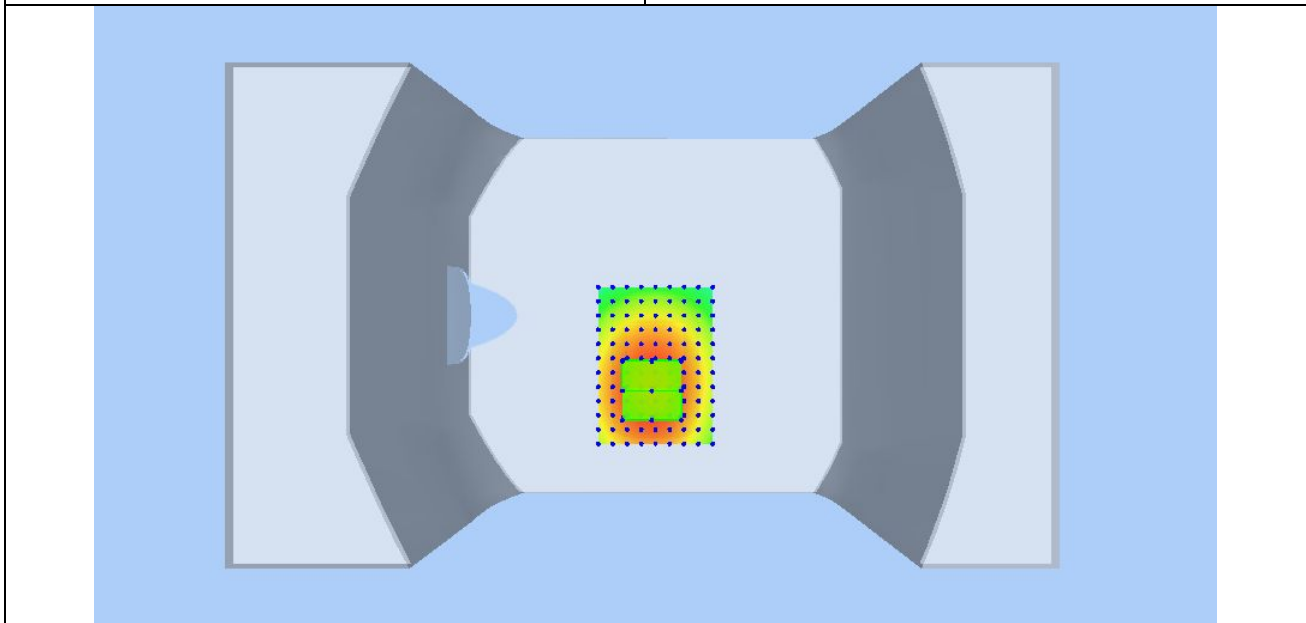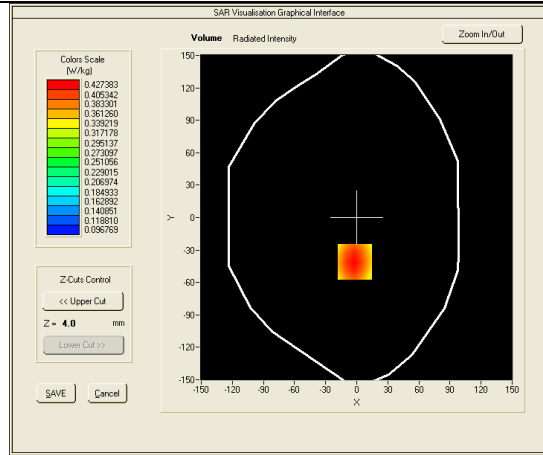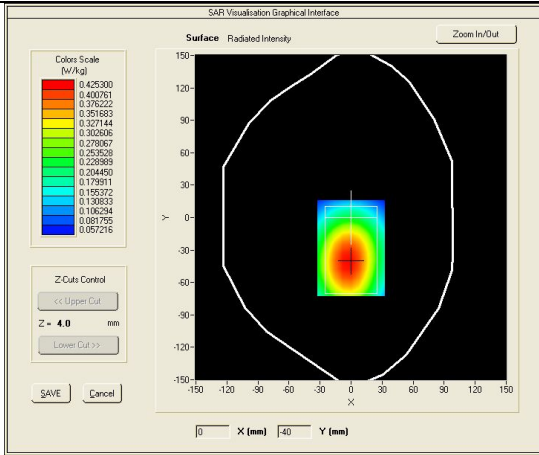




Test mode: WCDMA BAND V , high channel (Body-LCD DOWN)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 23th, 2013

Medium(liquid type)	MSL_850
Frequency (MHz)	846.4000
Relative permittivity (real part)	54.30
Conductivity (S/m)	0.99
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	3.59
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	0.79000
SAR 10g (W/Kg)	0.388319
SAR 1g (W/Kg)	0.538749
SURFACE SAR	VOLUME SAR

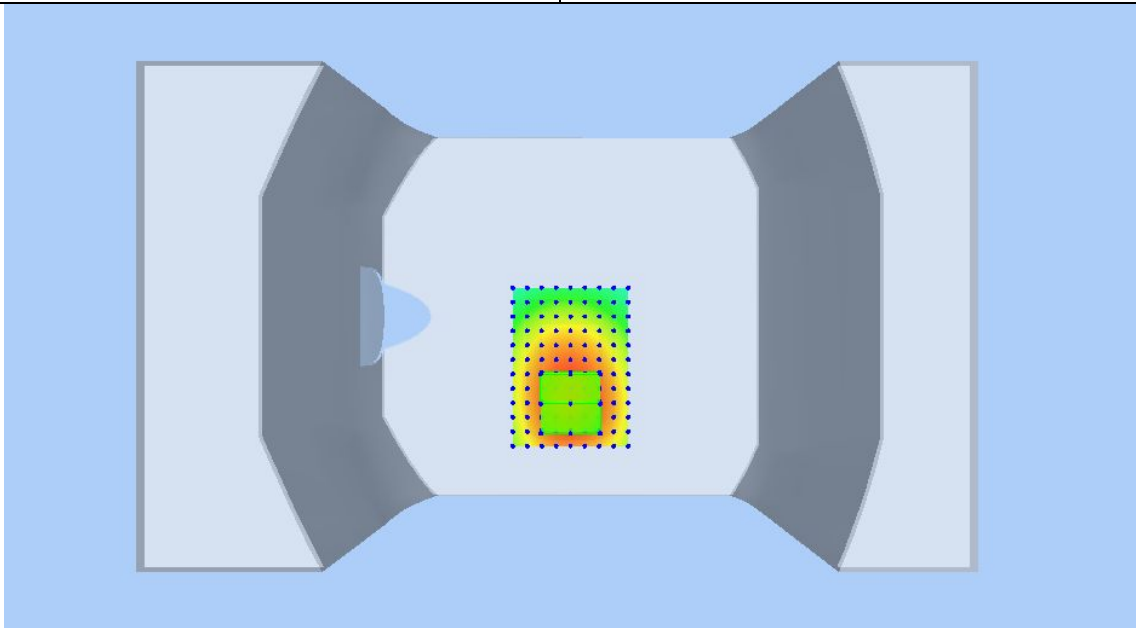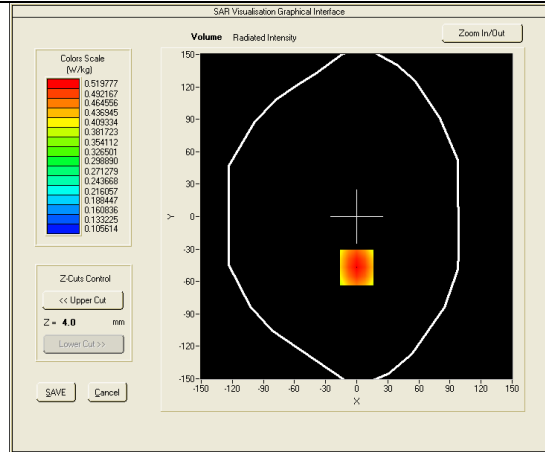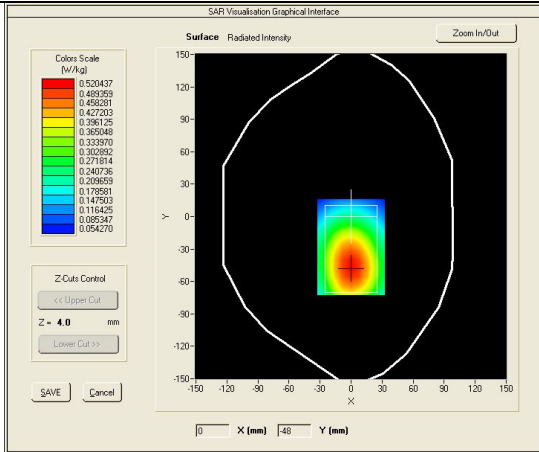

Test mode: GSM1900, High channel (Right Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1909.8000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	2.52000
SAR 10g (W/Kg)	0.317861
SAR 1g (W/Kg)	0.516328
SURFACE SAR	VOLUME SAR

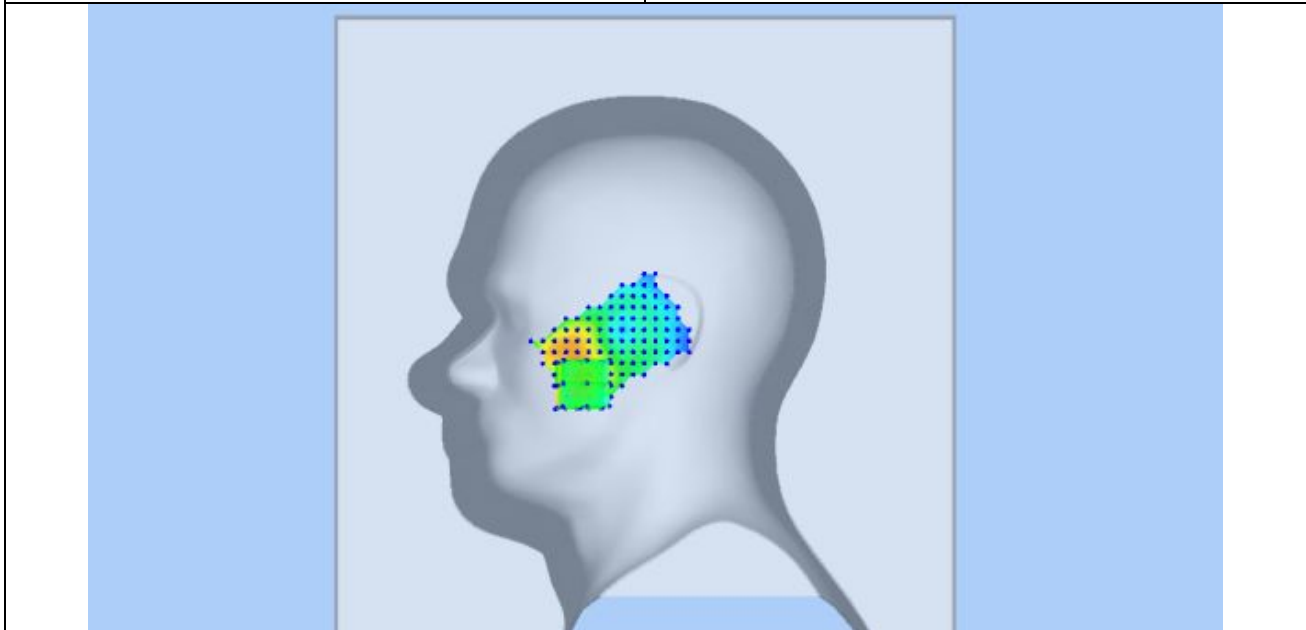
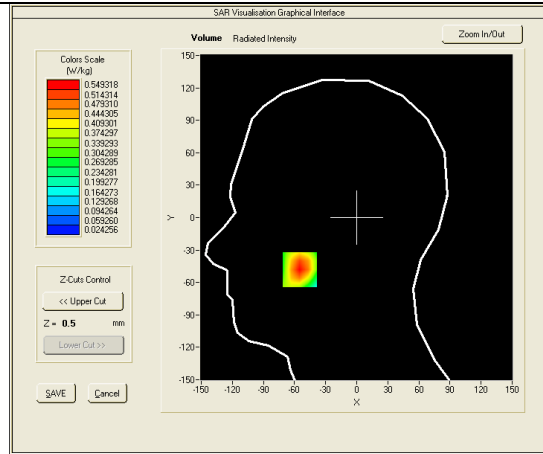
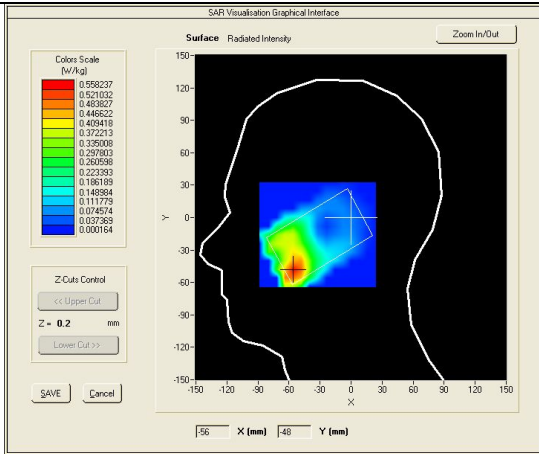


Test mode: GSM1900, High channel (Right Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1909.8000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-2.51000
SAR 10g (W/Kg)	0.106381
SAR 1g (W/Kg)	0.172351




SURFACE SAR

VOLUME SAR

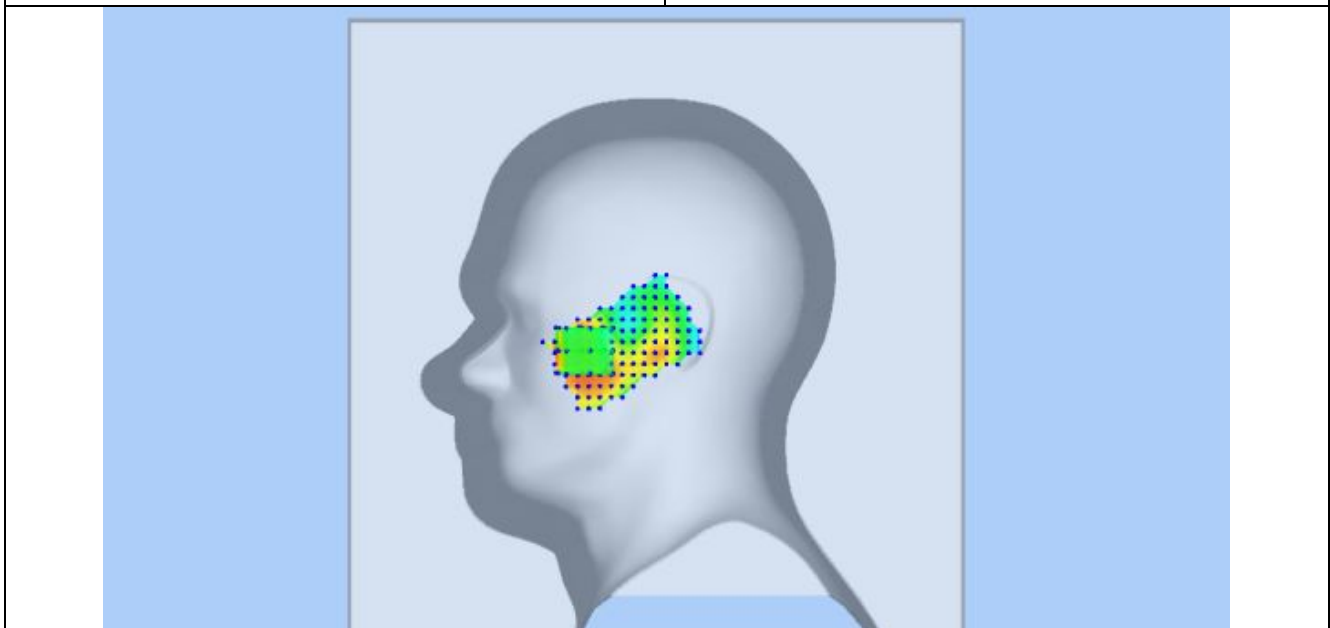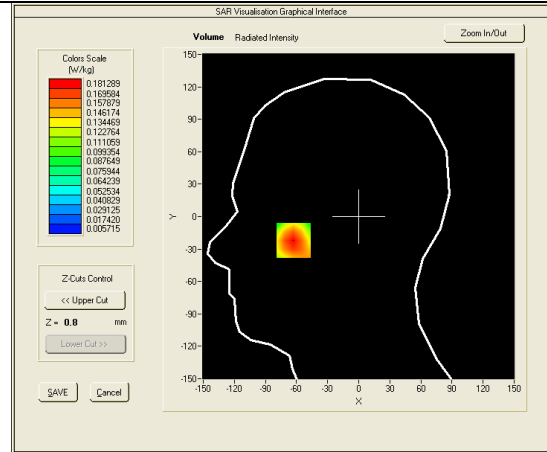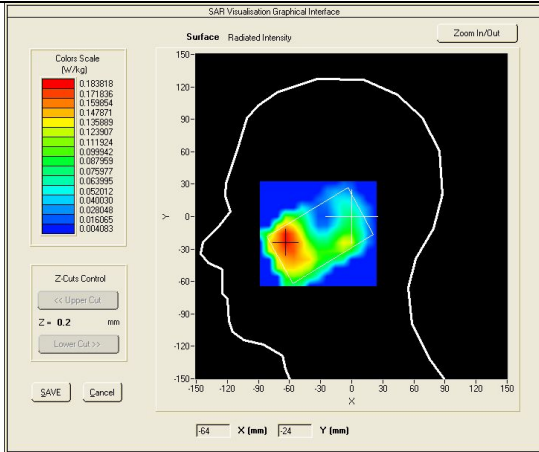

Test mode: GSM1900, High channel (Left Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1909.8000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-3.68000
SAR 10g (W/Kg)	0.339941
SAR 1g (W/Kg)	0.580359
SURFACE SAR	VOLUME SAR

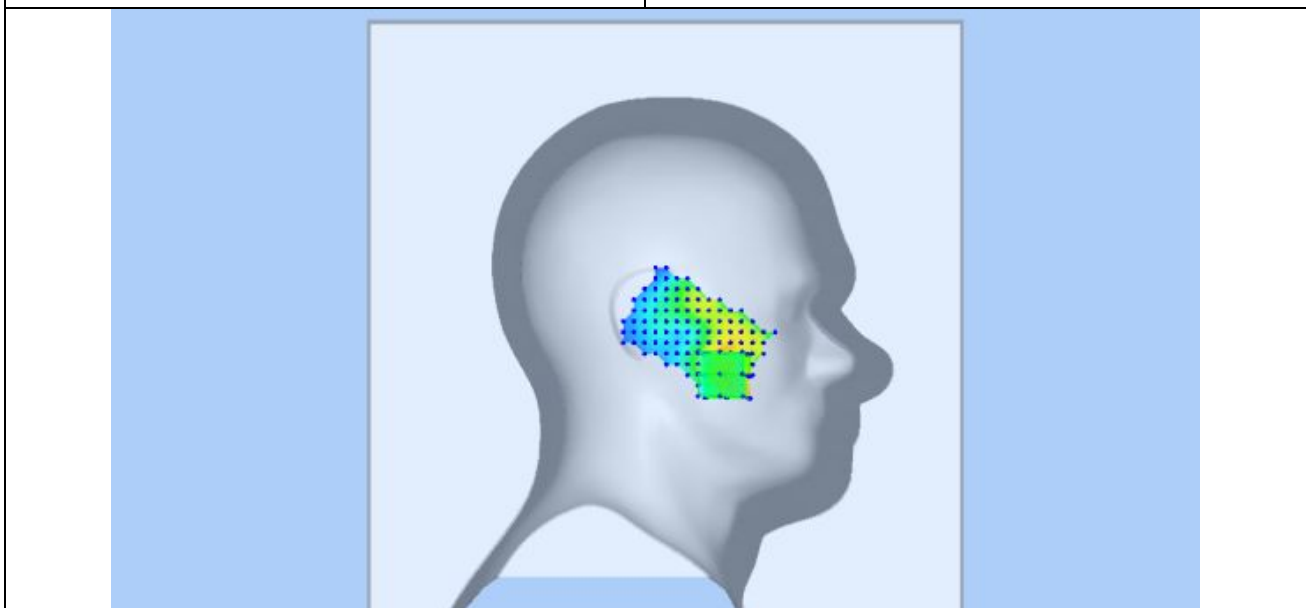
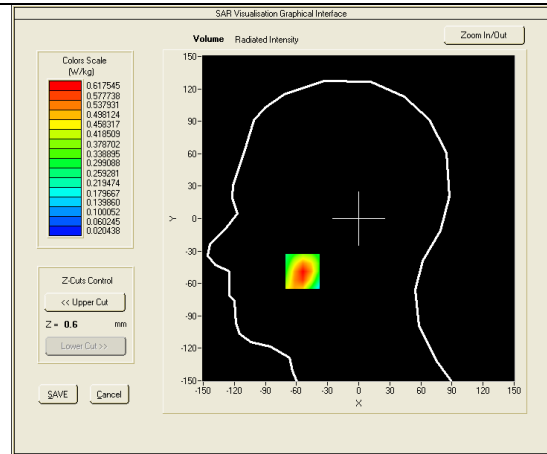
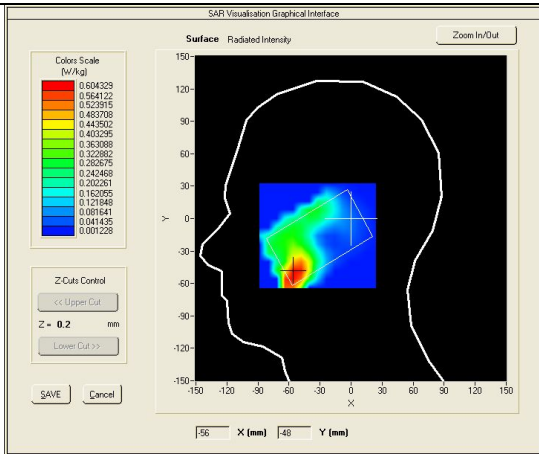


Test mode: GSM1900, High channel (Left Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1909.8000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	8.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.12000
SAR 10g (W/Kg)	0.121683
SAR 1g (W/Kg)	0.214115

SURFACE SAR

VOLUME SAR

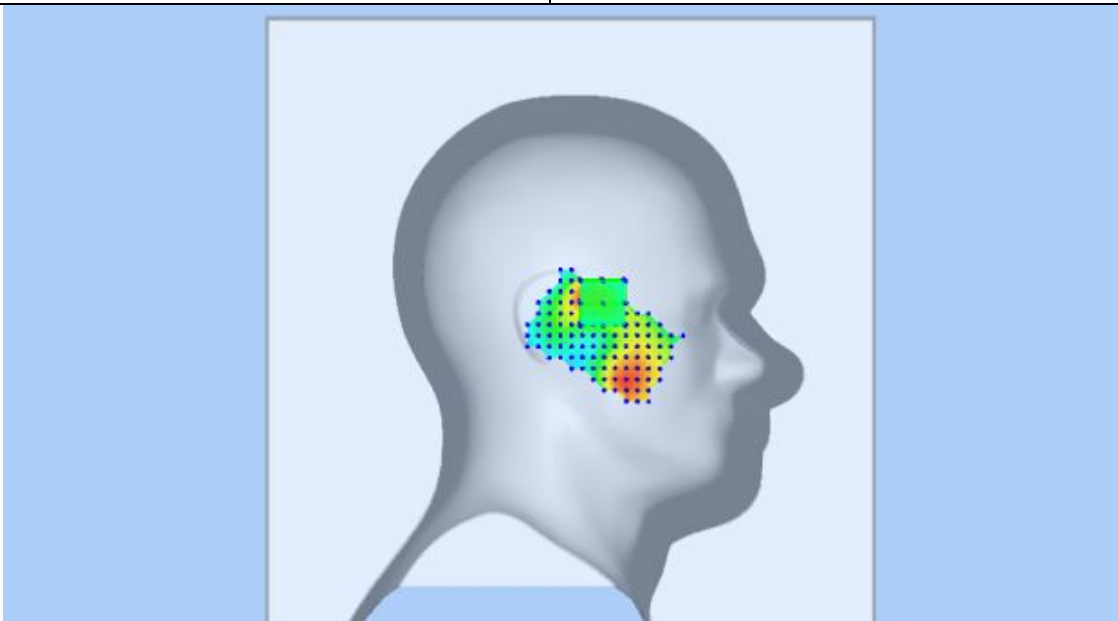
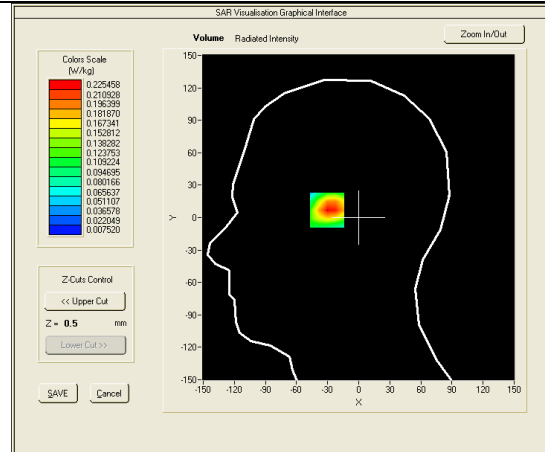
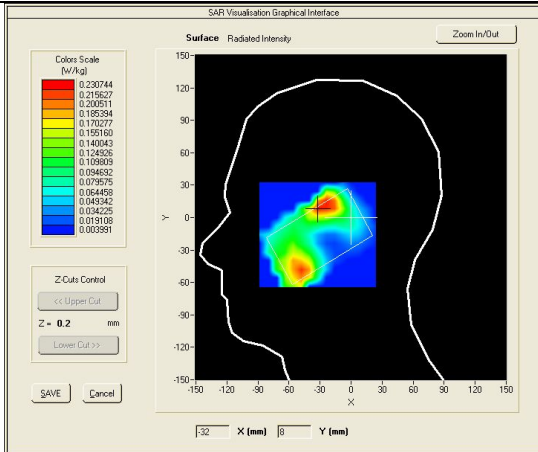


Test mode: GPRS1900, High channel (Body LCD-UP)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1909.8000
Relative permittivity (real part)	54.13
Conductivity (S/m)	1.49
E-Field Probe	SN 09/13 EPG176
Crest factor	2.0
Conversion Factor	4.68
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	0.71000
SAR 10g (W/Kg)	0.353371
SAR 1g (W/Kg)	0.588818




SURFACE SAR

VOLUME SAR

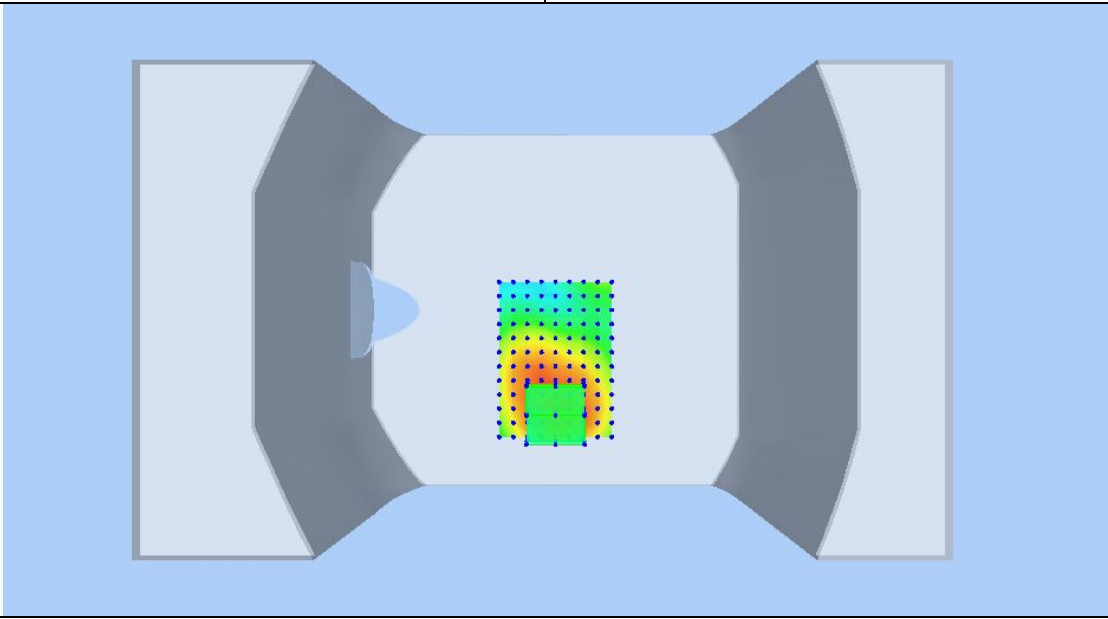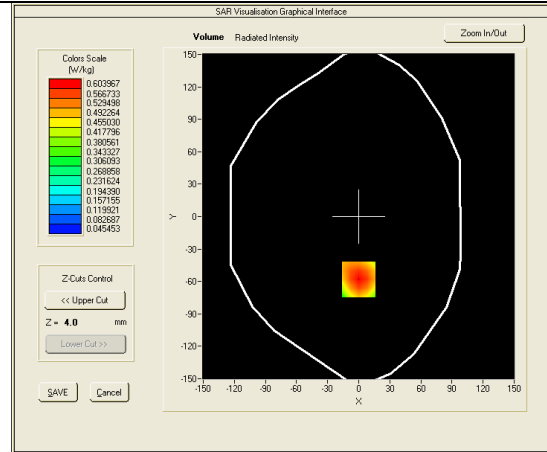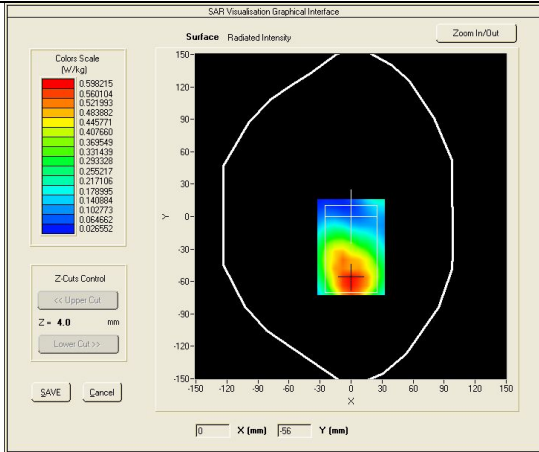




Test mode: GPRS1900, High channel (Body LCD-DOWN)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	MSL_1900
Frequency (MHz)	1909.80000
Relative permittivity (real part)	54.13
Conductivity (S/m)	1.49
E-Field Probe	SN 09/13 EPG176
Crest factor	2.0
Conversion Factor	4.68
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Variation (%)	-3.28000
SAR 10g (W/Kg)	0.399863
SAR 1g (W/Kg)	0.640145
SURFACE SAR	VOLUME SAR

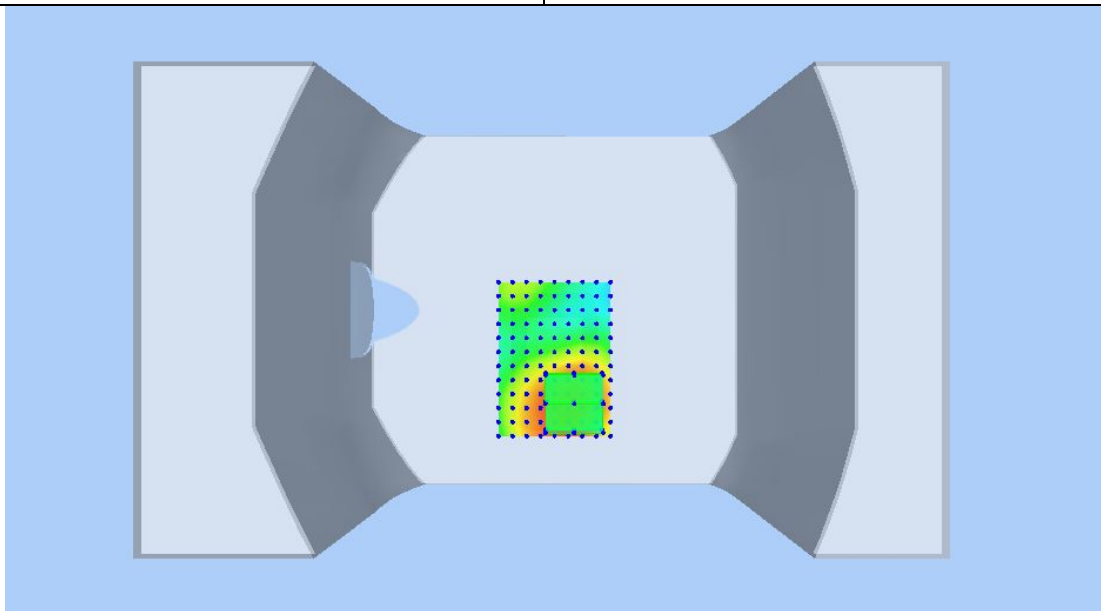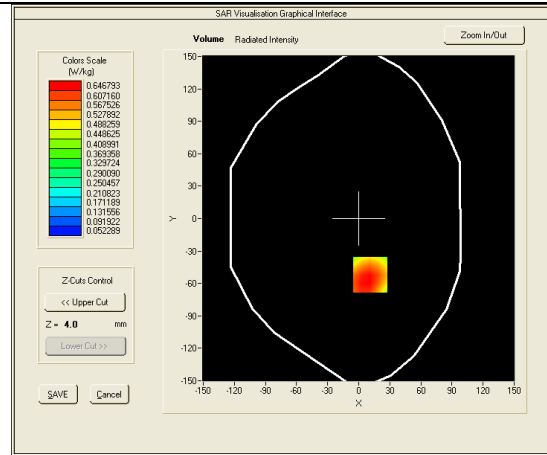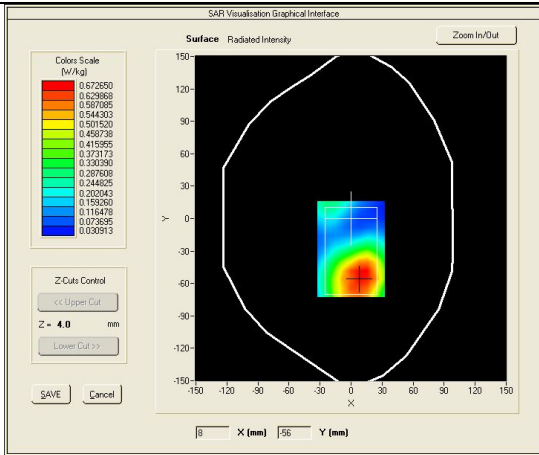




Test mode: WCDMA BAND II , low channel (Right Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.07000
SAR 10g (W/Kg)	0.522756
SAR 1g (W/Kg)	0.912611
SURFACE SAR	VOLUME SAR

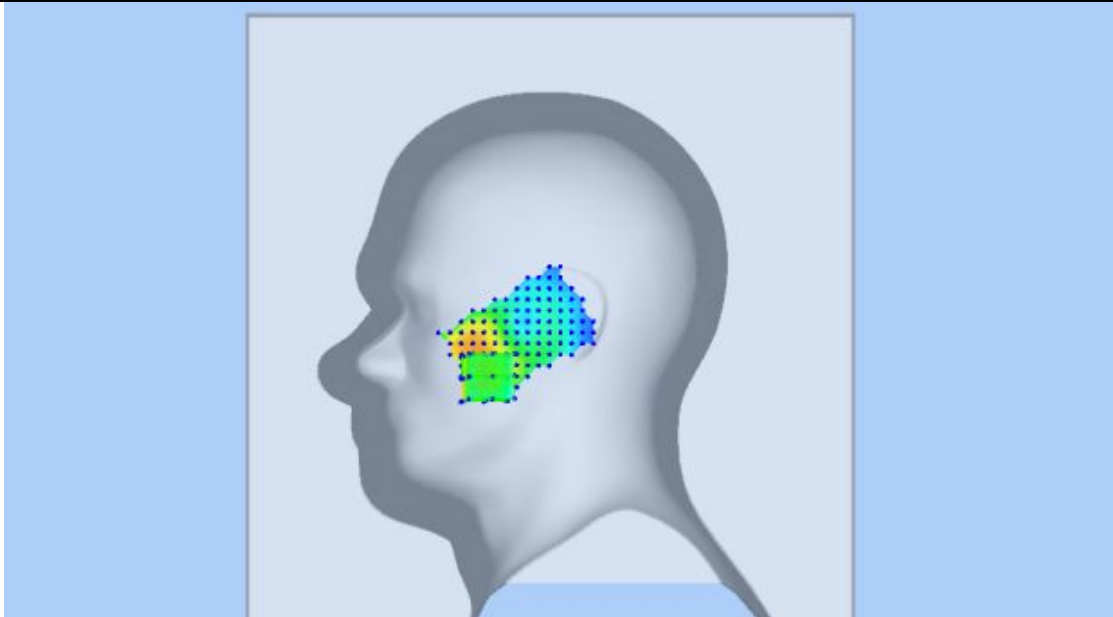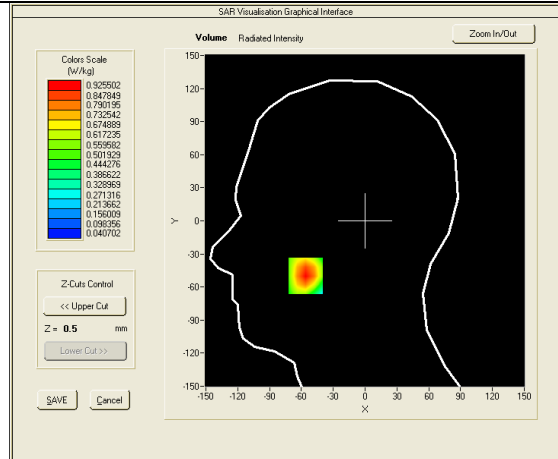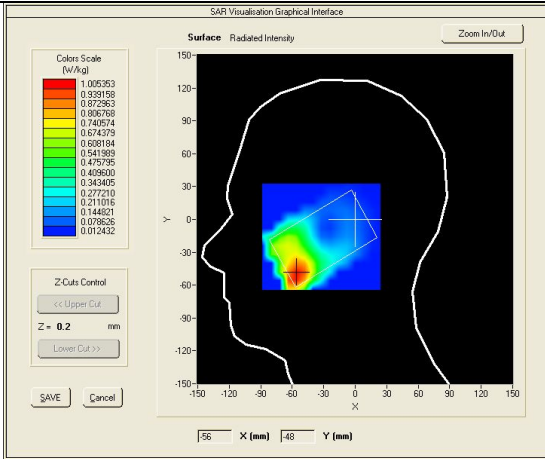

Test mode: WCDMA BAND II , low channel (Right Head Cheek),repeated measured
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.52000
SAR 10g (W/Kg)	0.554490
SAR 1g (W/Kg)	0.920453
SURFACE SAR	VOLUME SAR

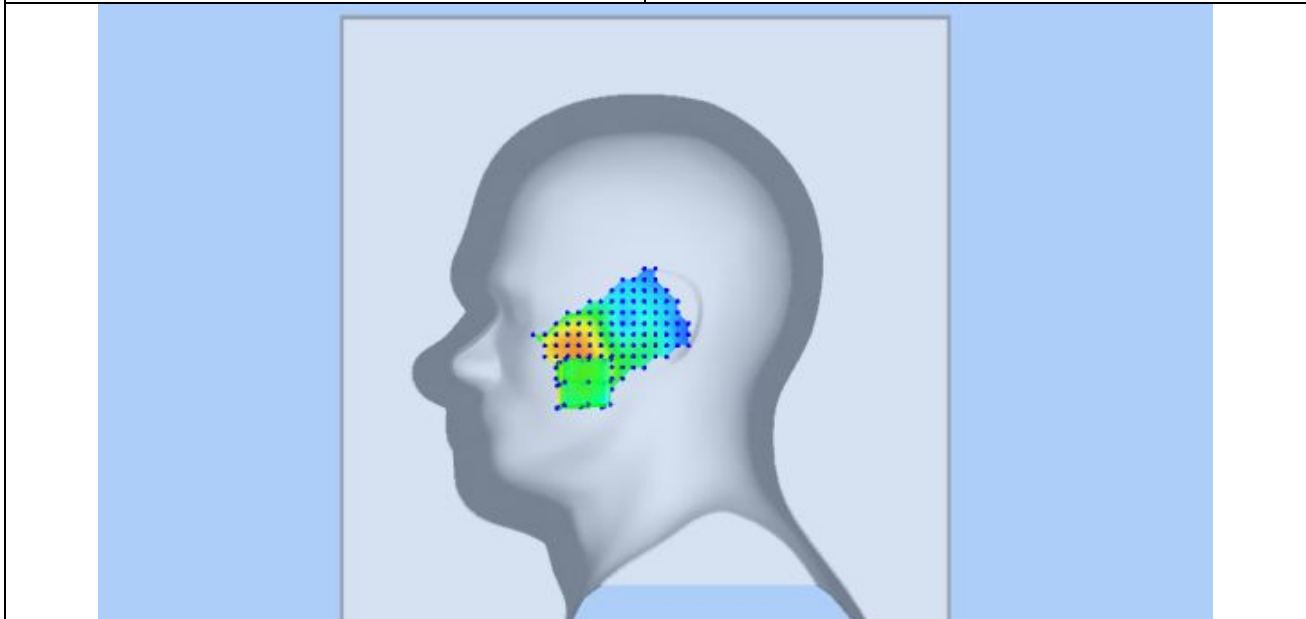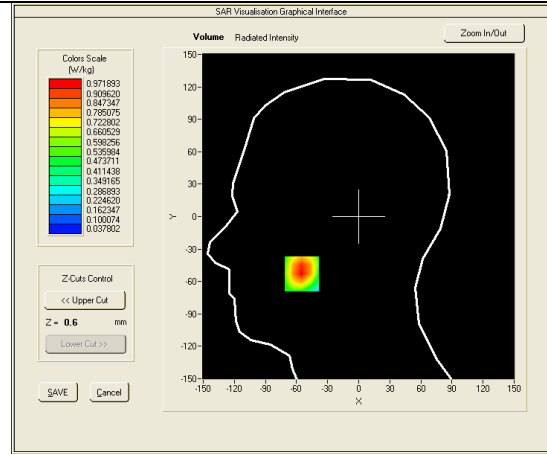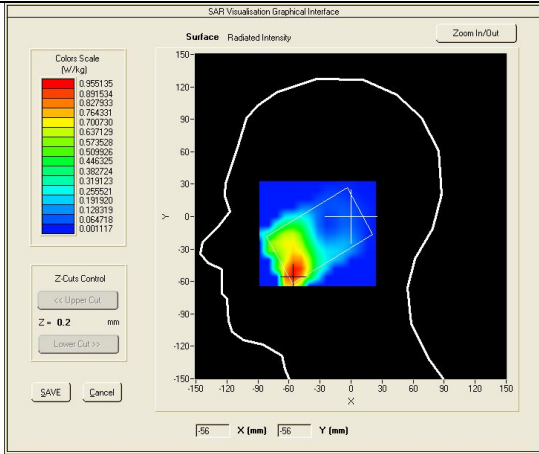




Test mode: WCDMA BAND II , mid channel (Right Head Cheek)

Product Description: GSM Mobile phone

Model: S400

Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1880.0000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	2.07000
SAR 10g (W/Kg)	0.511279
SAR 1g (W/Kg)	0.843525
SURFACE SAR	VOLUME SAR

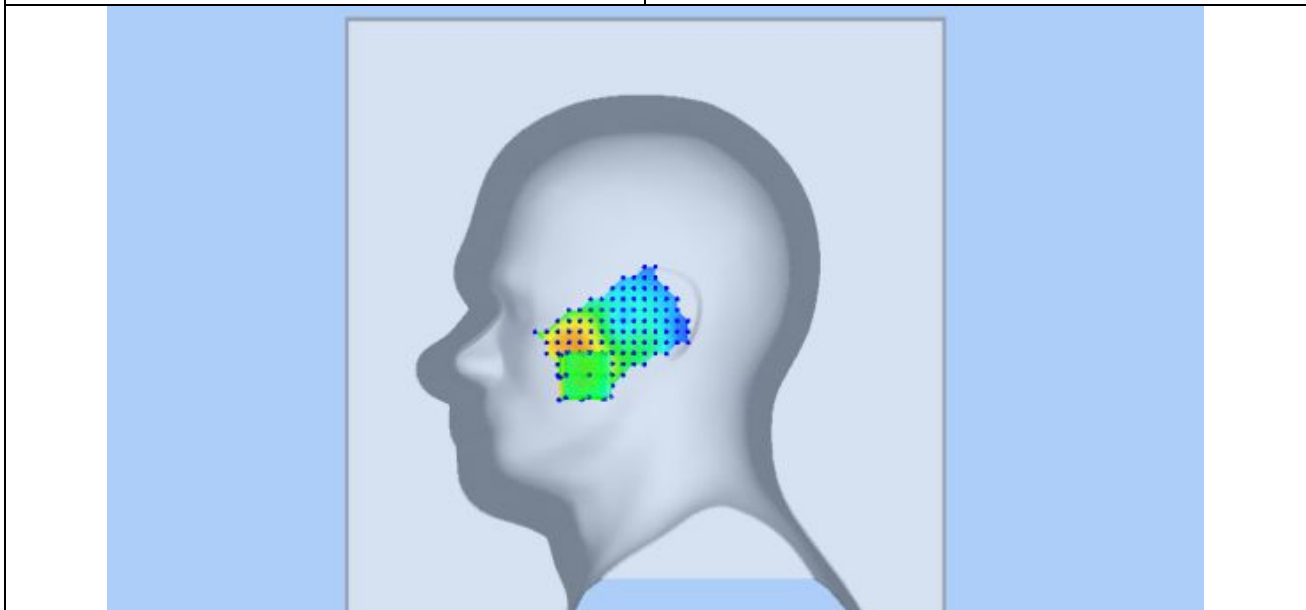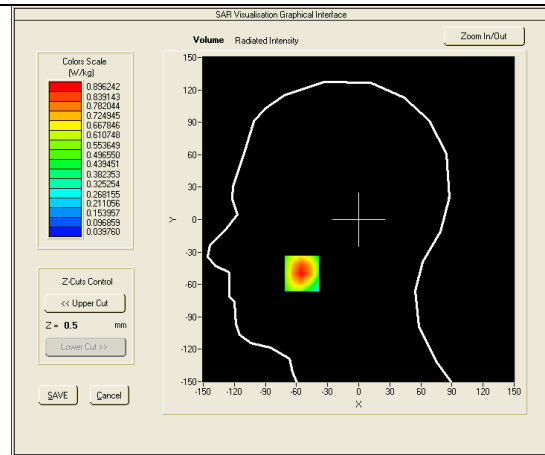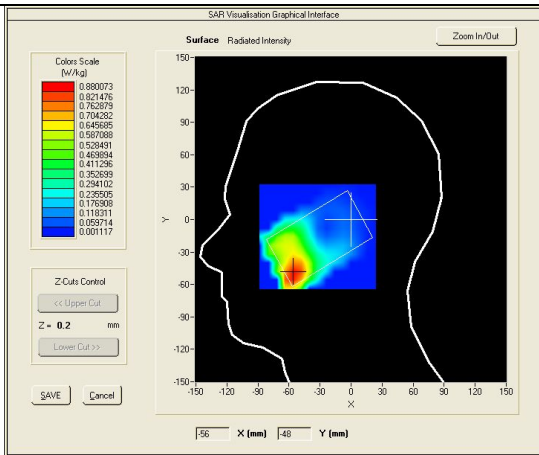




Test mode: WCDMA BAND II , high channel (Right Head Cheek)

Product Description: GSM Mobile phone

Model: S400




Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1907.6000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.75000
SAR 10g (W/Kg)	0.450040
SAR 1g (W/Kg)	0.757695
SURFACE SAR	VOLUME SAR

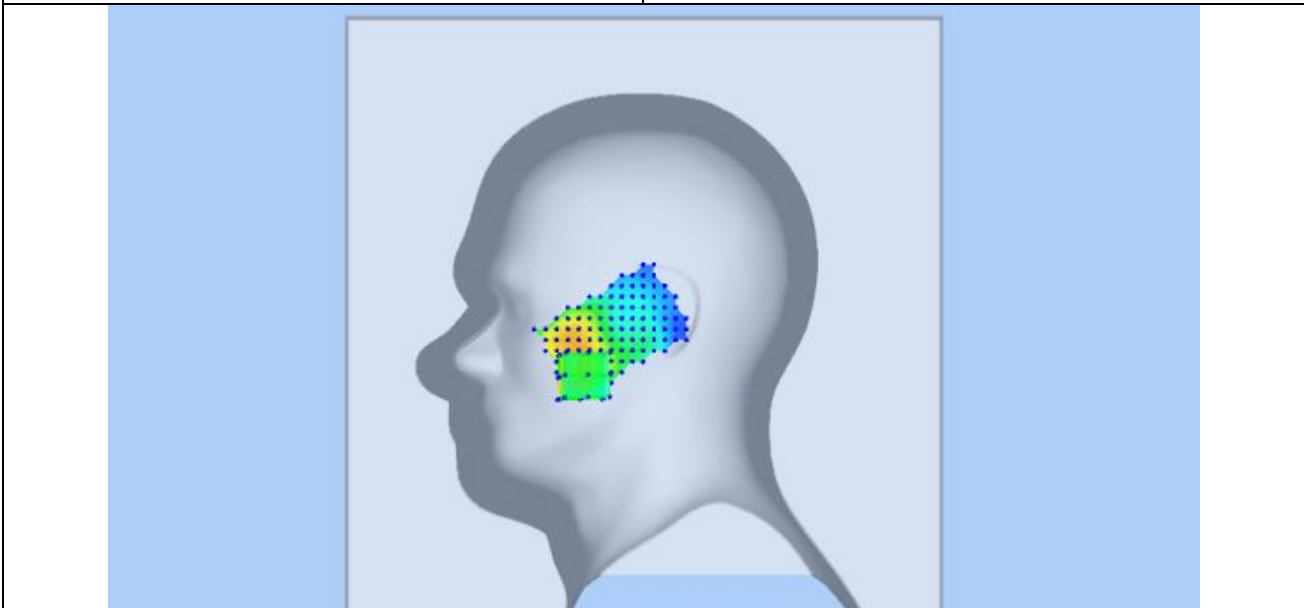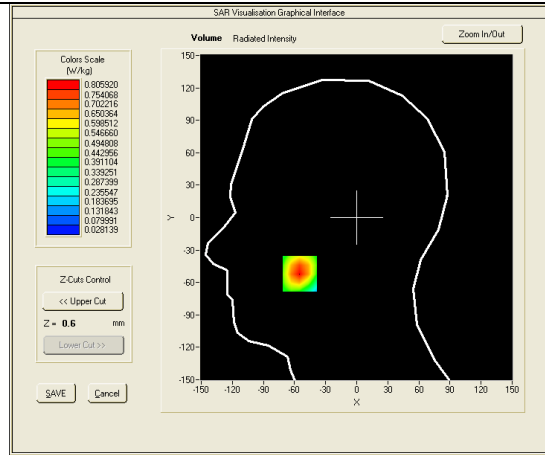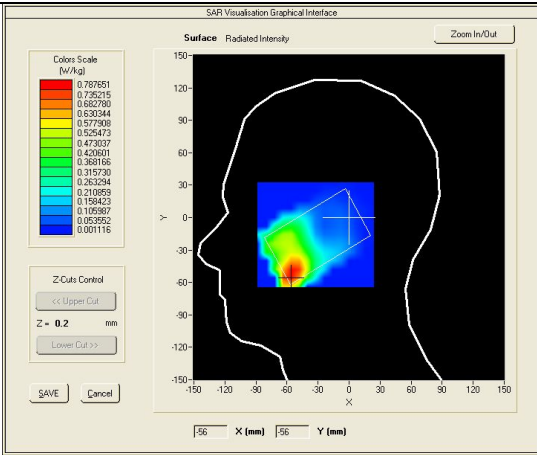




Test mode: WCDMA BAND II , low channel (Right Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	2.08000
SAR 10g (W/Kg)	0.140719
SAR 1g (W/Kg)	0.225976
SURFACE SAR	VOLUME SAR

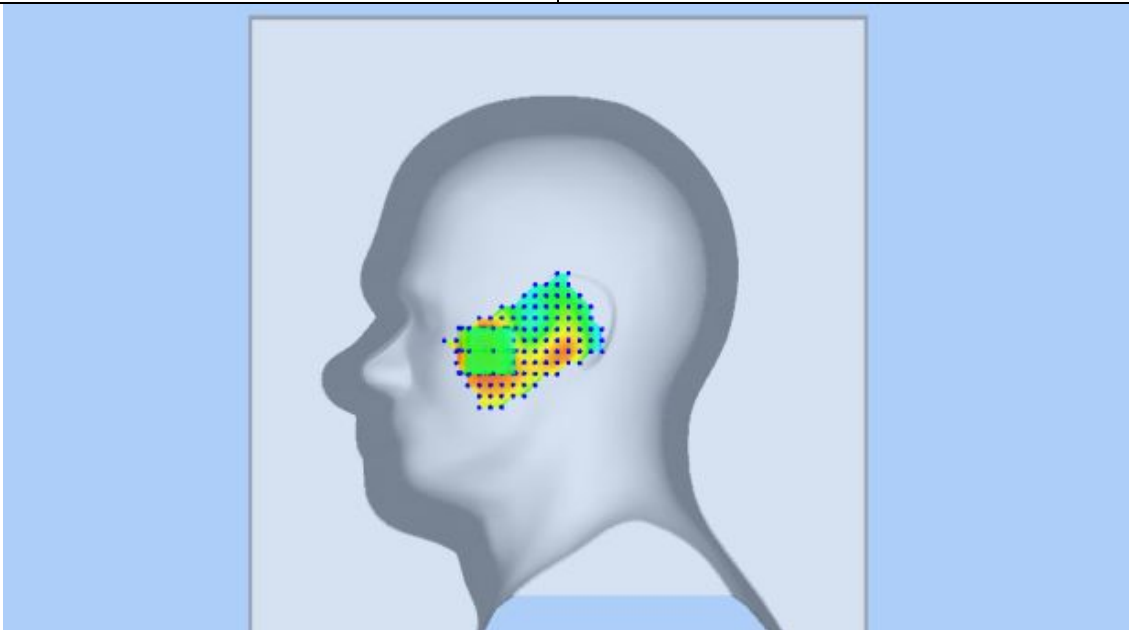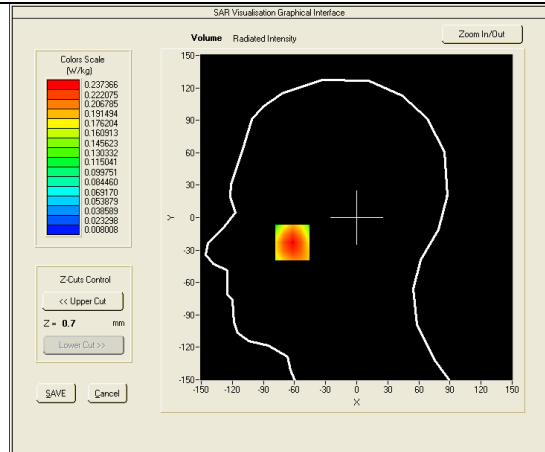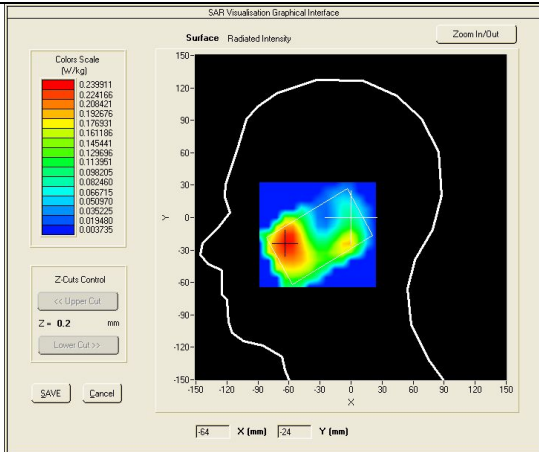




Test mode: WCDMA BAND II , low channel (Left Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.31000
SAR 10g (W/Kg)	0.549089
SAR 1g (W/Kg)	0.931058
SURFACE SAR	VOLUME SAR

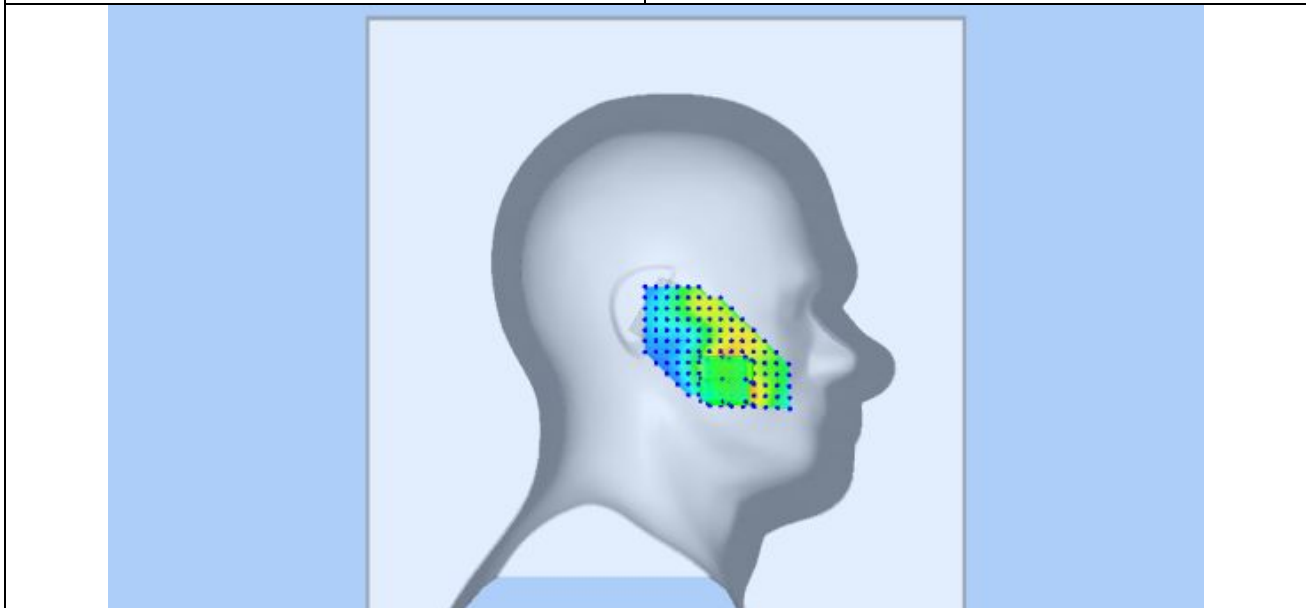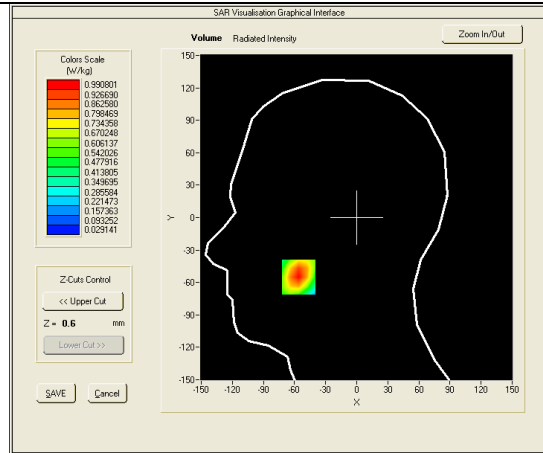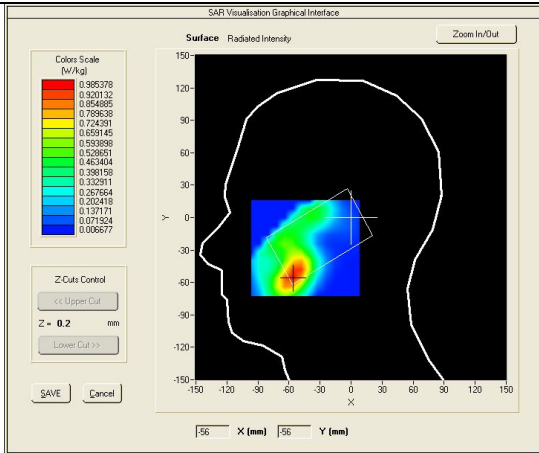




Test mode: WCDMA BAND II , low channel (Left Head Cheek),repeated measured
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-4.71000
SAR 10g (W/Kg)	0.550096
SAR 1g (W/Kg)	0.932563
SURFACE SAR	VOLUME SAR

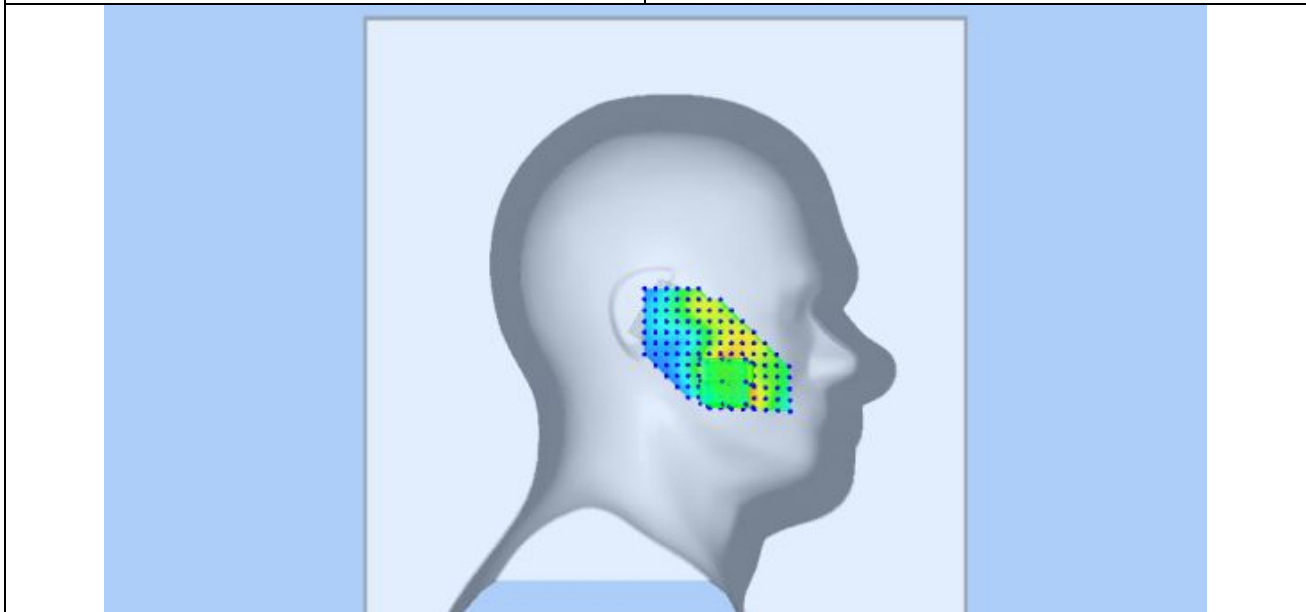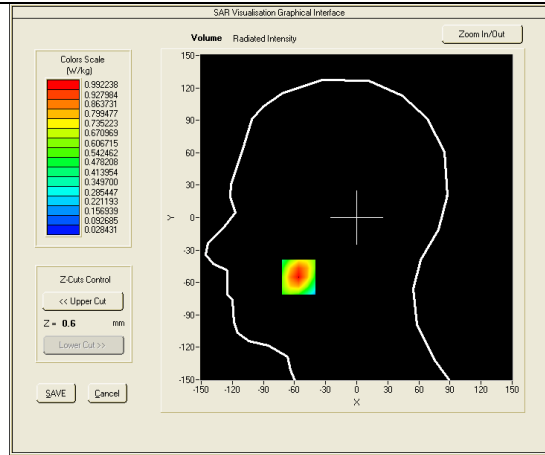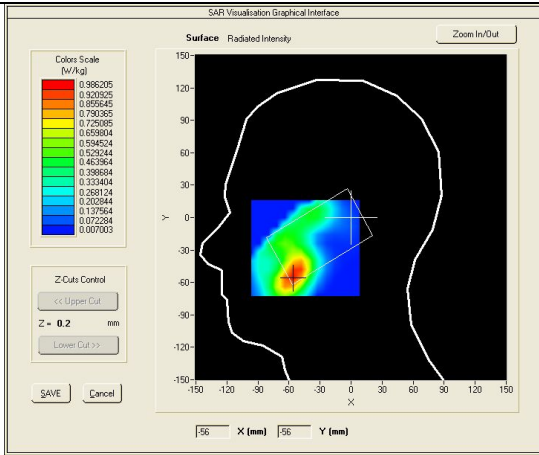




Test mode: WCDMA BAND II , mid channel (left Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1880.000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.98000
SAR 10g (W/Kg)	0.538523
SAR 1g (W/Kg)	0.915576
SURFACE SAR	VOLUME SAR

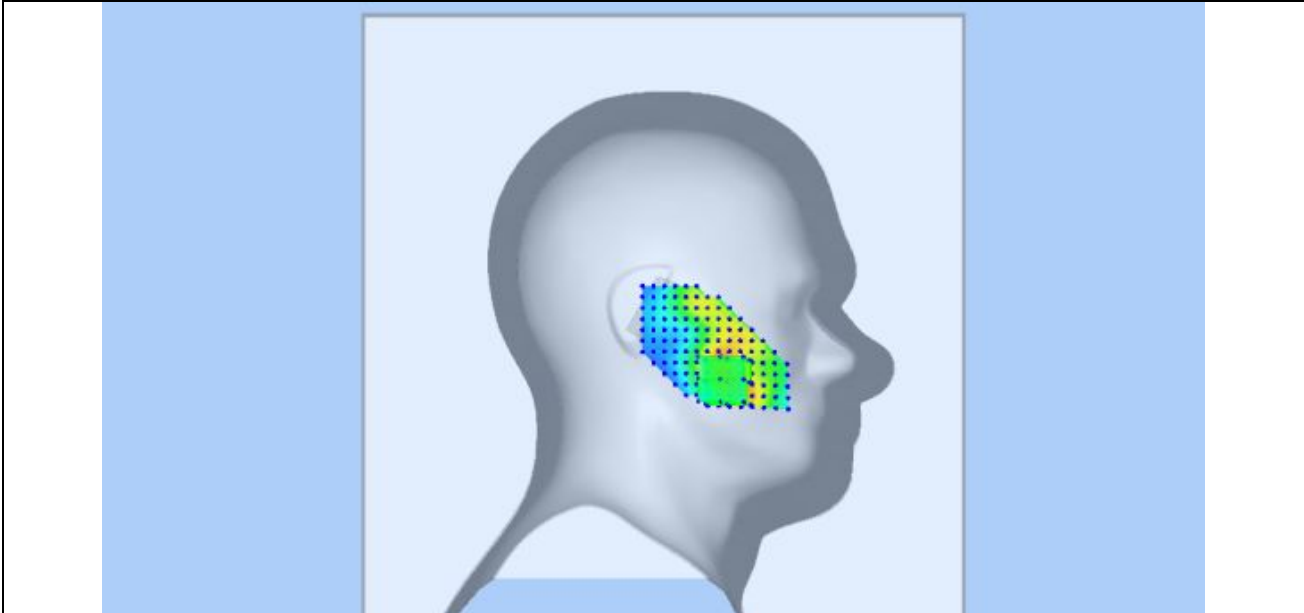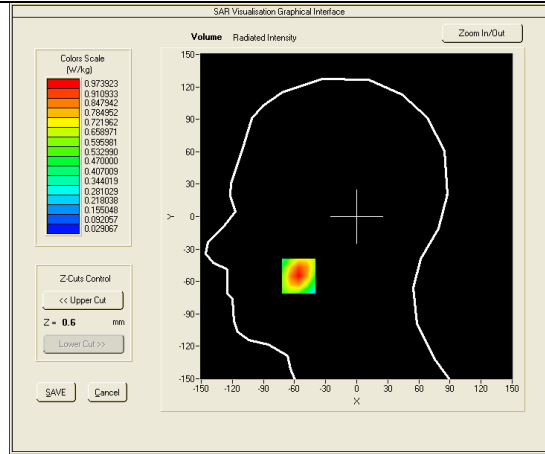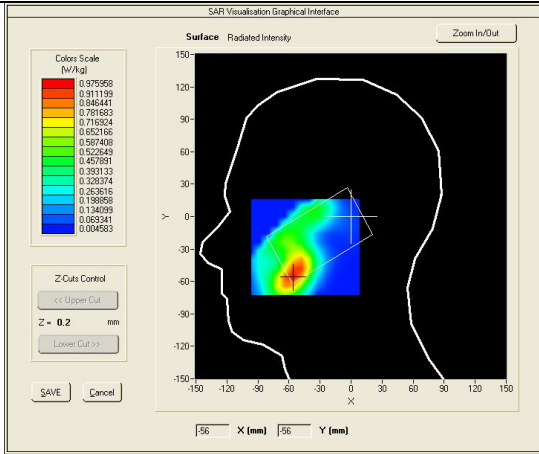




Test mode: WCDMA BAND II , high channel (left Head Cheek)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1907.6000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.45000
SAR 10g (W/Kg)	0.451652
SAR 1g (W/Kg)	0.776372
SURFACE SAR	VOLUME SAR

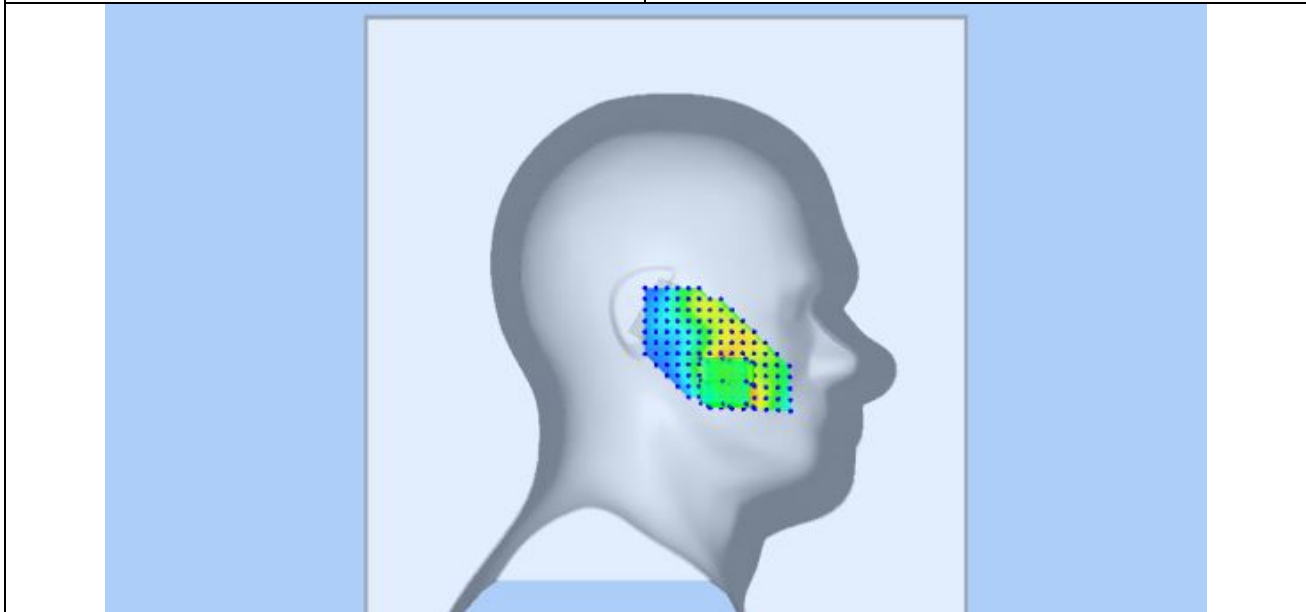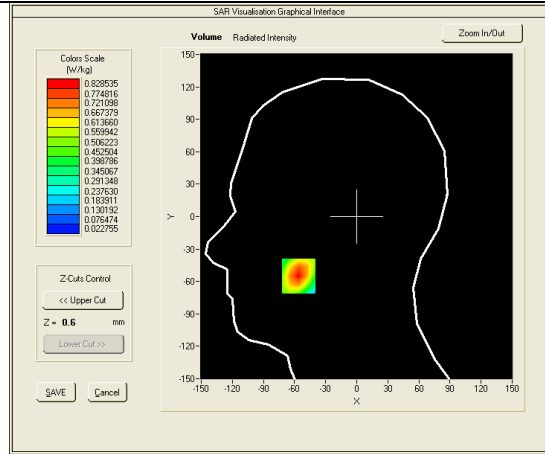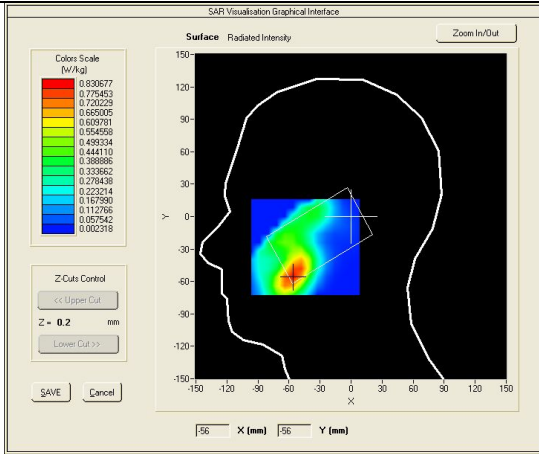




Test mode: WCDMA BAND II , low channel (Left Head Tilt)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	HSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	40.21
Conductivity (S/m)	1.37
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.53
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-3.68000
SAR 10g (W/Kg)	0.211636
SAR 1g (W/Kg)	0.371412
SURFACE SAR	VOLUME SAR

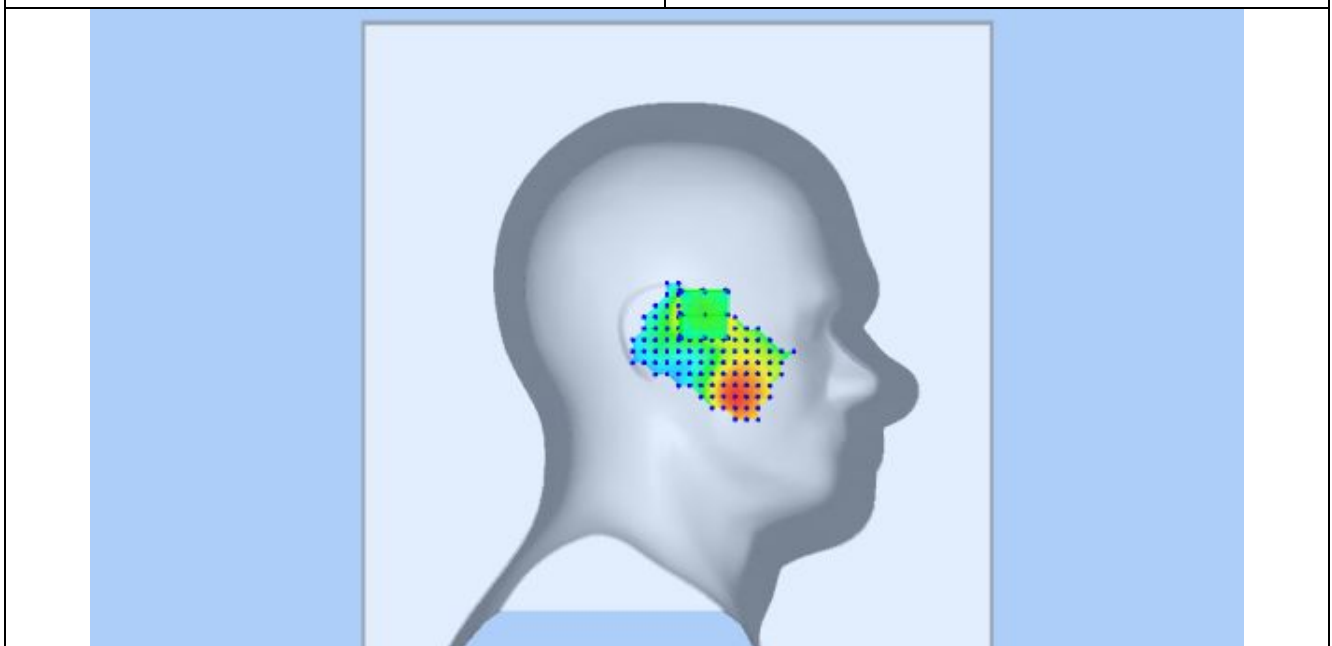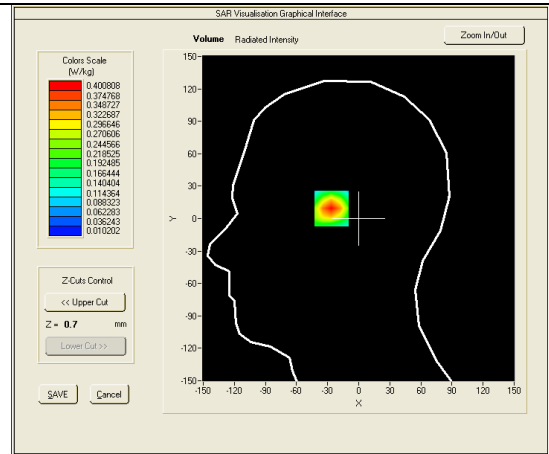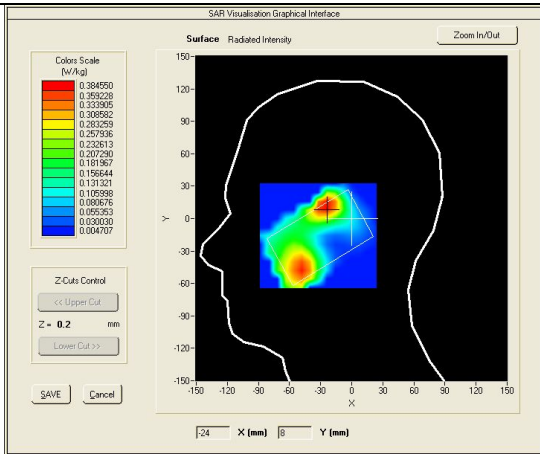

Test mode: WCDMA BAND II, low channel (Body LCD-UP)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	MSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	54.13
Conductivity (S/m)	1.49
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.68
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	-1.02000
SAR 10g (W/Kg)	0.339779
SAR 1g (W/Kg)	0.571812
SURFACE SAR	VOLUME SAR

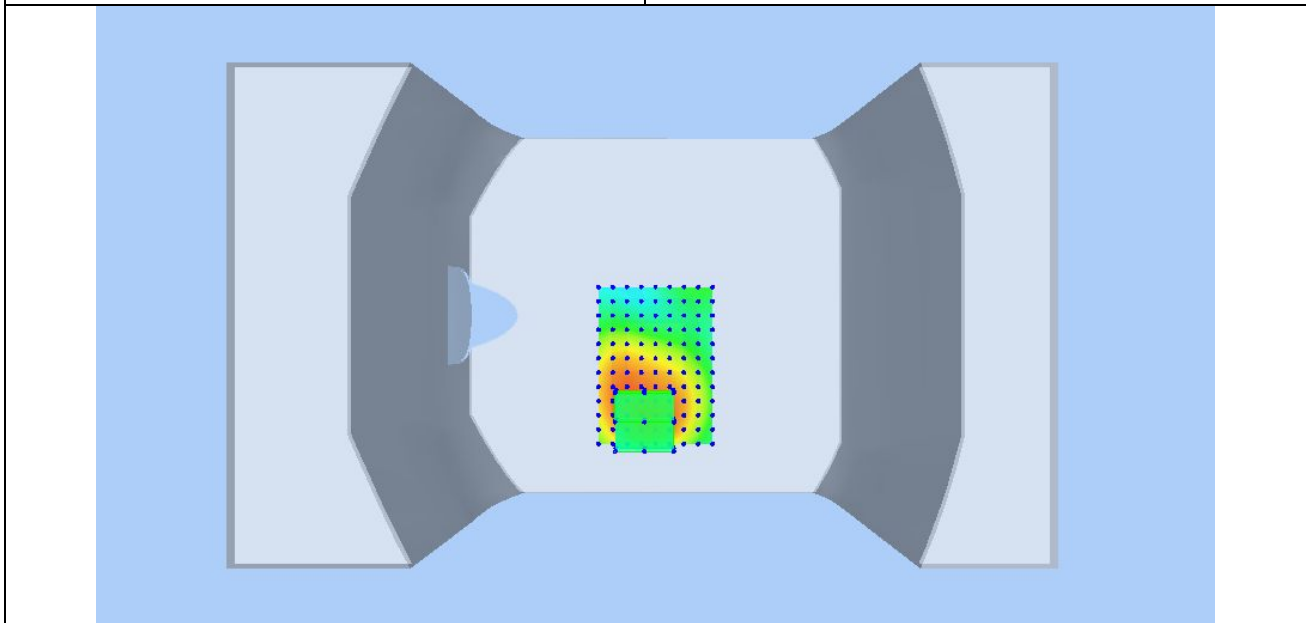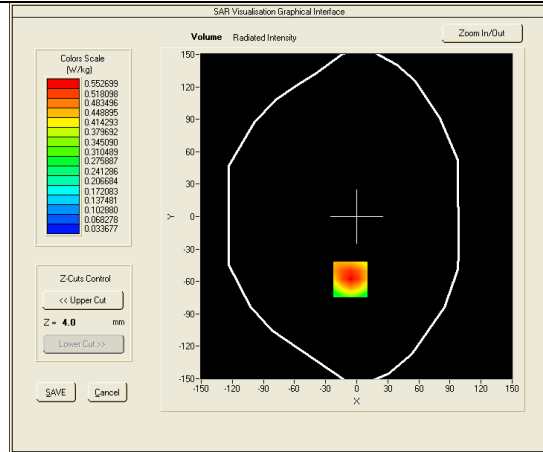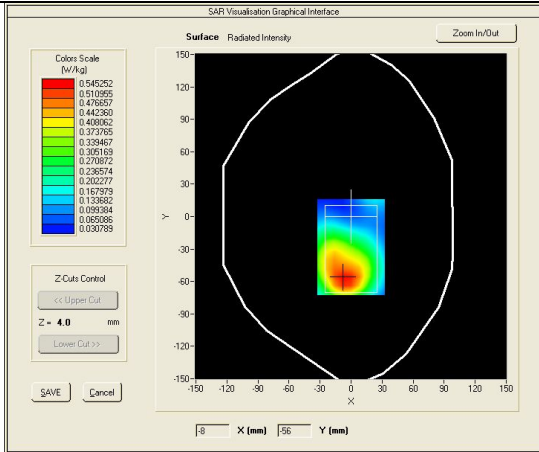

Test mode: WCDMA BAND II , low channel (Body LCD-DOWN)
 Product Description: GSM Mobile phone
 Model: S400
 Test Date: June 29th, 2013

Medium(liquid type)	MSL_1900
Frequency (MHz)	1852.4000
Relative permittivity (real part)	54.13
Conductivity (S/m)	1.49
E-Field Probe	SN 09/13 EPG176
Crest factor	1.0
Conversion Factor	4.68
Sensor-Surface	4mm
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Variation (%)	0.36000
SAR 10g (W/Kg)	0.369615
SAR 1g (W/Kg)	0.610382

SURFACE SAR

VOLUME SAR

