



**ANSI/IEEE Std. C95.1-1999  
In accordance with the requirements of  
FCC Report and Order: ET Docket 93-62, and OET Bulletin 65  
Supplement C**

## FCC SAR TEST REPORT

For

**Product Name: Mobile Phone**

**Brand Name: verykool**

**Model No.: S735**

**Series Model:N/A**

**Test Report Number:**

**KS120725A02-SF**

**Issued for**

**verykool USA INC.**

**4350 Executive Dr. #100 San Diego, CA 92121**

**Issued by**

**Compliance Certification Services Inc.**

**Kun shan Laboratory**

**No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China**

**TEL: 86-512-57355888**

**FAX: 86-512-57370818**



TESTING CERT #2541.01

**Note:** *This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.*



## TABLE OF CONTENTS

<b>1. CERTIFICATE OF COMPLIANCE (SAR EVALUATION)</b>	<b>3</b>
<b>2. EUT DESCRIPTION</b>	<b>3</b>
<b>3. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC</b>	<b>3</b>
<b>4. TEST METHODOLOGY</b>	<b>3</b>
<b>5. TEST CONFIGURATION</b>	<b>3</b>
<b>6. DOSIMETRIC ASSESSMENT SETUP</b>	<b>3</b>
6.1 MEASUREMENT SYSTEM DIAGRAM	3
6.2 SYSTEM COMPONENTS	3
<b>7. EVALUATION PROCEDURES</b>	<b>3</b>
<b>8. MEASUREMENT UNCERTAINTY</b>	<b>3</b>
<b>9. EXPOSURE LIMIT</b>	<b>3</b>
<b>10. EUT ARRANGEMENT</b>	<b>3</b>
10.1 ANTHROPOMORPHIC HEAD PHANTOM	3
10.2 DEFINITION OF THE "CHEEK/TOUCH" POSITION	3
10.3 DEFINITION OF THE "TILTED" POSITION	3
<b>11. MEASUREMENT RESULTS</b>	<b>3</b>
11.1 TEST LIQUIDS CONFIRMATION	3
11.2 LIQUID MEASUREMENT RESULTS	3
11.3 PROBE CALIBRATION PROCEDURE	3
11.4 SYSTEM PERFORMANCE CHECK	3
11.5 EUT TUNE-UP PROCEDURES AND TEST MODE	3
11.6 SAR HANDSETS MULTI XMITER ASSESSMENT	3
11.7 EUT SETUP PHOTOS	3
11.8 SAR MEASUREMENT RESULTS	3
<b>12. EUT PHOTO</b>	<b>3</b>
<b>13. EQUIPMENT LIST &amp; CALIBRATION STATUS</b>	<b>3</b>
<b>14. FACILITIES</b>	<b>3</b>
<b>15. REFERENCES</b>	<b>3</b>
<b>16. ATTACHMENTS</b>	<b>3</b>
<b>Appendix A: Plots of Performance Check</b>	<b>3</b>
<b>Appendix B: DASYS Calibration Certificate</b>	<b>3</b>
<b>Appendix C: Plots of SAR Test Result</b>	<b>3</b>



## 1. CERTIFICATE OF COMPLIANCE (SAR EVALUATION)

<b>Product Name:</b>	Mobile Phone
<b>Trade Name:</b>	verykool
<b>Model Name.:</b>	S735
<b>Series Model:</b>	N/A
<b>Applicant Discrepancy:</b>	Initial
<b>Devices supporting GPRS:</b>	Class B
<b>Description Test Modes(worst case ):</b>	SIM 1 and SIM2 is a chipset unit and tested as single chipset
<b>Device Category:</b>	PORTABLE DEVICES
<b>Exposure Category:</b>	GENERAL POPULATION/UNCONTROLLED EXPOSURE
<b>Date of Test:</b>	August 1, 2012 & August 2, 2012 & August 3, 2012
<b>Applicant:</b>	<b>verykool USA INC.</b> 4350 Executive Dr. #100 San Diego, CA 92121
<b>Manufacturer:</b>	<b>Shenzhen Ginwave Technologies Ltd.</b> 4/F, R2-A, High-Tech Industrial Park, Shenzhen 518057, China
<b>Application Type:</b>	Certification

### APPLICABLE STANDARDS AND TEST PROCEDURES

STANDARDS AND TEST PROCEDURES	TEST RESULT
FCC OET 65 Supplement C	No non-compliance noted

### Deviation from Applicable Standard

None

The device was tested by Compliance Certification Services Inc. in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C(Edition 01-01). The test results in this report apply only to the tested sample of the stated device/equipment. Other similar device/equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

**Approved by:****Tested by:**

Hadiif Hoo  
RF Manager  
Compliance Certification Services Inc.

Jason Qiao  
Test Engineer  
Compliance Certification Services Inc.



## 2. EUT DESCRIPTION

<b>Product Name:</b>	Mobile Phone	
<b>Model Name:</b>	S735	
<b>Series Model:</b>	N/A	
<b>Model Discrepancy:</b>	N/A	
<b>Brand Name:</b>	verykool	
<b>FCC ID:</b>	Y7WPLUM	
<b>GPRS Level:</b>	Multi-Class 12	
<b>Multi-slot Class:</b>	4 Uplink +1 Downlink	
<b>Total timeslots per frame for GPRS/EDGE:</b>	only 5 timeslots are used for GPRS/EDGE	
<b>Power reduction:</b>	NO	
<b>DTM Description:</b>	N/A	
<b>Device Category:</b>	Production unit	
<b>Frequency Range:</b>	GSM 850: 824.2 ~ 848.8 MHz GSM1900: 1850.2 ~ 1909.8MHz GPRS/ EDGE 850: 824.2 ~ 848.8 MHz GPRS/ EDGE 1900: 1850.2 ~ 1909.8 MHz WCDMA Band II /HSDPA/HSUPA:1852.4~1907.6MHz WCDMA Band V /HSDPA/ HSUPA:826.4~846.60MHz	802.11b / g: 2412 ~ 2462 MHz n HT20: 2412 ~ 2462 MHz Bluetooth: 2402 ~ 2480 MHz
<b>Transmit Power(Average):</b>	GSM 850:32.85 dBm GPRS 850:31.98 dBm EDGE 850:32.76 dBm GSM 1900:29.82 dBm GPRS 1900: 28.38 dBm EDGE 1900: 28.55 dBm WCDMA BandII:22.02 dBm WCDMA BandV:22.92 dBm	WI-FI IEEE 802.11b:16.51 dBm WI-FI IEEE 802.11g:14.58 dBm WI-FI IEEE 802.11n20MHz: 14.21 dBm WI-FI IEEE 802.11n40MHz: 13.68 dBm Bluetooth:0.55 dBm BandII HSDPA: 21.78dBm BandII HSUPA:21.77dBm BandV HSDPA: 22.66 dBm BandV HSUPA: 22.61 dBm
<b>Max. SAR:</b>	GSM 850 Head: 0.294 W/kg Body: 0.213 W/kg GSM 1900 Head: 0.198 W/kg Body: 0.231 W/kg	GPRS 850: 0.214 W/kg GPRS 1900: 0.235 W/kg EDGE 850: 0. 159 W/kg EDGE 1900: 0. 227 W/kg WCDMA BandII:0. 582 W/kg WCDMA BandV:0.681 W/kg WI-FI IEEE 802.11b:0.472 W/kg
<b>Modulation Technique:</b>	GSM / GPRS : GMSK WCDMA: QPSK EGPRS : GMSK,8PSK WI-FI 802.11b / 802.11g: WI-FI IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) WI-FI IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM) WI-FI IEEE 802.11n: OFDM(MCS 0-7) Bluetooth: GFSK	



<b>Accessories:</b>	Power supply and ADP (rating) : Brand Name: Verykool Model No.: NBT-050B-B050UA Input: AC100-240V, 0.2 A, 50/60 Hz Output: DC5.5V,0.5 A	Battery (rating) : Brand Name: Verykool Model No.: 534845AR Capacitance: 1300mAh Rated Voltage: 3.7V Charge Limit: 4.2V
<b>Antenna Specification:</b>	GSM: PIFA antenna WCDMA: PIFA antenna	WIFI: PIFA antenna Bluetooth : PIFA antenna
<b>Operating Mode:</b>	Maximum continuous output	

This device supports voice/data wireless communication technology in GSM/GPRS/EDGE /WCDMA Band II /Band V,WLAN and Bluetooth. The data mode of GPRS/EDGE and WLAN didn't support VOIP capacity

The details are listed as below:

Mode	Technology Support	Modulation	Frequency Band
Voice	GSM	GMSK	850MHz/1900 MHz
Voice	WCDMA	QPSK	Band V
Data	GPRS/EDGE	GMSK	850MHz/1900 MHz
Data	HSDPA/HSUPA	QPSK	Band V
Data	WI-FI 802.11b / 802.11g/n-20MHz	OFDM	2.4GHz
Data	Bluetooth	GFSK	2.4GHz

### 3. REQUIREMENTS FOR COMPLIANCE TESTING DEFINED BY THE FCC

The US Federal Communications Commission has released the report and order "Guidelines for Evaluating the Environmental Effects of RF Radiation", ET Docket No. 93-62 in August 1996. The order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g for an uncontrolled environment and 8.0 mW/g for an occupational/controlled environment as recommended by the ANSI/IEEE standard C95.1-1999. According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

### 4. TEST METHODOLOGY

The Specific Absorption Rate (SAR) testing specification, method and procedure for this Mobile Phone is in accordance with the following standards:

- 47 CFR Part 2 ( 2.1093)
- IEEE C95.1-1999
- KDB 248227 D01 SAR measurement procedures for 802.11 b/g transmitters
- KDB 648474 D01 SAR evaluation considerations for handsets with multiple transmitters and antennas
- KDB 447498 D01 Mobile Portable RF Exposure
- KDB 941225 D04 Evaluating SAR for GSM/(E)GPRS Dual Transfer Mode
- OET Bulletin 65 Supplement C (Edition 01-01)
- KDB941225 D01 v02 SAR measurement procedures for 3G Devices –CDMA 200/EV-DO-WCDMA/HSDPA/HSPA-



## 5. TEST CONFIGURATION

The device was controlled by using a base station emulator R&S CMU200. Communication between the device and the emulator was established by air link. The distance between the DUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of DUT. The DUT was set from the emulator to radiate maximum output power during all tests.

Measurements were performed on the lowest, middle, and highest channel for each testing position.

For SAR testing, EUT is in GSM/GPRS link mode. In GSM link mode, its crest factor is 8, In GPRS link mode, its crest factor is 2, because EUT is set in GPRS multi-slot class 12 with 4 uplink slots.

## 6. DOSIMETRIC ASSESSMENT SETUP


These measurements were performed with the automated near-field scanning system DASY 5 from ATTENNESSA. The system is based on a high precision robot (working range greater than 0.9 m), which positions the probes with a positional repeatability of better than  $\pm 0.02$  mm. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit. The SAR measurements were conducted with the E-field PROBE EX3DV4 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure described in [7] with accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated with the procedure described in [8] and found to be better than  $\pm 0.25$  dB. The phantom used was the SAM Twin Phantom as described in FCC supplement C, IEE P1528 and CENELEC EN 62209.

The Tissue simulation liquid used for each test is in according with the FCC OET65 supplement C as listed below.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78



## 6.1 MEASUREMENT SYSTEM DIAGRAM

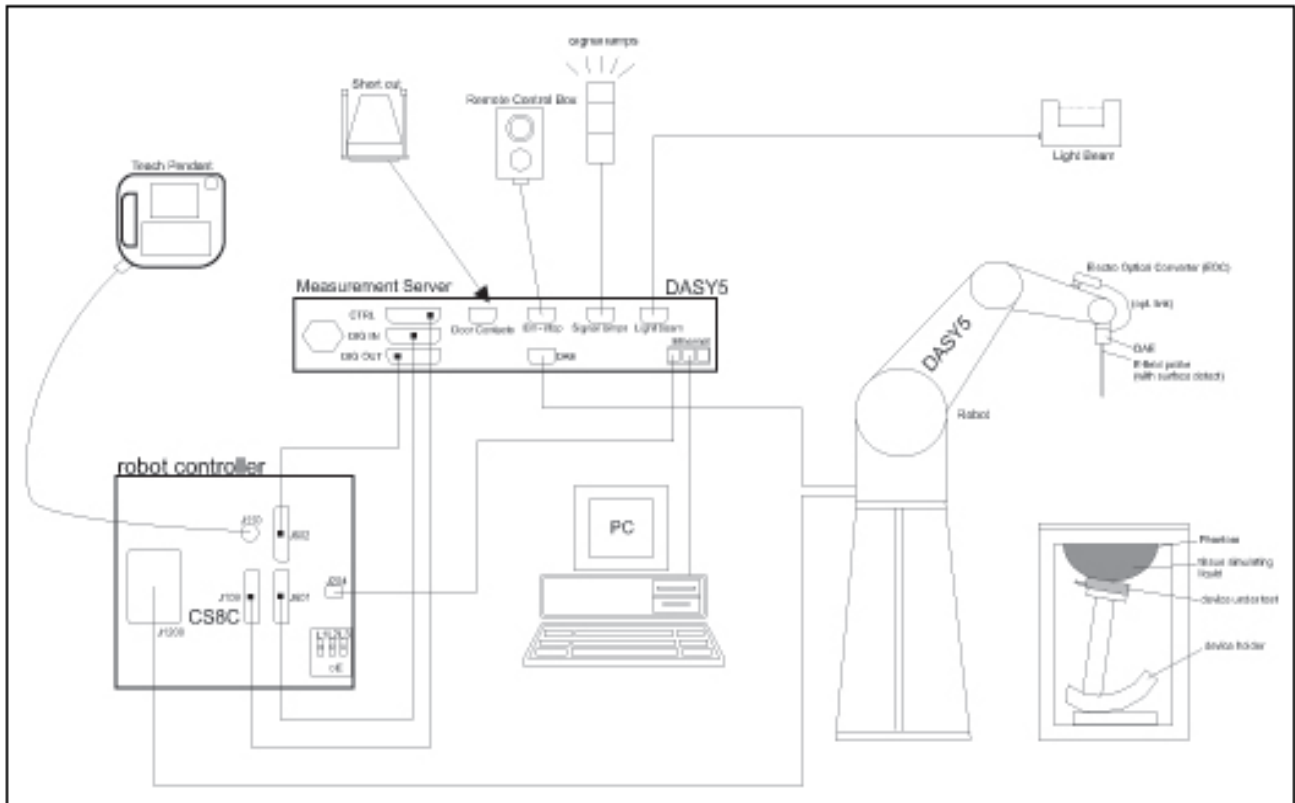

### The DASYS system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASYS software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing validating the proper functioning of the system.





## 6.2 SYSTEM COMPONENTS



The DASYS measurement server is based on a PC/104 CPU board with a 400MHz intel ULV celeron, 128MB chip-disk and 128 MB RAM. The necessary circuits for communication with either the DAE4(or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASYS I/O-board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation.



The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pinout and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server. Calibration: No calibration required.

### Data Acquisition Electronics (DAE)



The data acquisition electronics (DAE4) consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE4 box is 200MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

### EX3DV4 Isotropic E-Field Probe for Dosimetric Measurements



**Construction:** Symmetrical design with triangular core  
 Built-in shielding against static charges  
 PEEK enclosure material (resistant to organic solvents, e.g., DGBE)

**Calibration:** Basic Broad Band Calibration in air: 10-3000 MHz.  
 Conversion Factors (CF) for HSL 900 and HSL 1800  
 CF-Calibration for other liquids and frequencies upon request.

**Frequency:** 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

**Directivity:** ± 0.3 dB in HSL (rotation around probe axis)  
 ± 0.5 dB in HSL (rotation normal to probe axis)

**Dynamic Range:** 10 µW/g to > 100 mW/g; Linearity: ± 0.2 dB  
 (noise: typically < 1 µW/g)





**Dimensions:** Overall length: 337 mm (Tip: 9 mm)  
Tip diameter: 2.5 mm (Body: 10 mm)  
Distance from probe tip to dipole centers:  
1 mm

**Application:** High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.



Interior of probe

## SAM Twin Phantom

### Construction:

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528-200X, CENELEC 50360 and IEC 62209. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points with the robot.



**Shell Thickness:**  $2 \pm 0.2$  mm


**Filling Volume:** Approx. 25 liters

**Dimensions:** Height: 850mm; Length: 1000mm; Width: 750mm

## SAM Phantom (ELI4 v4.0)

### Description Construction:

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with the latest draft of the standard IEC 62209 Part II and all known tissue simulating liquids. ELI4 has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is supported by software version DASY4/DASY5.5 and higher and is compatible with all SPEAG dosimetric probes and dipoles

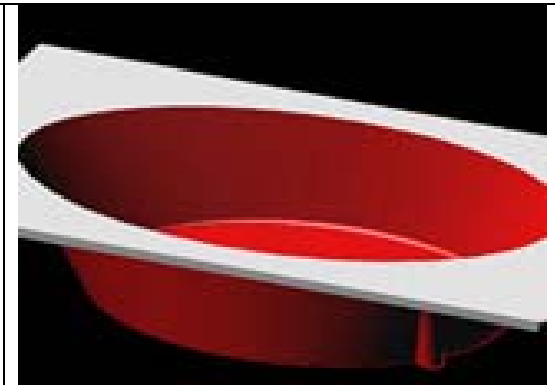

**Shell Thickness:**  $2.0 \pm 0.2$  mm (sagging: <1%)

**Filling Volume:** Approx. 25 liters

**Dimensions:** Major ellipse axis: 600 mm

**Minor axis:** 400 mm 500mm



## Device Holder for SAM Twin Phantom

**Construction:** In combination with the Twin SAM Phantom, the Mounting Device (made from POM) enables the rotation of the mounted transmitter in spherical coordinates, whereby the rotation point is the ear opening. The devices can be easily and accurately positioned according to IEC, IEEE, CENELEC, FCC or other specifications. The device holder can be locked at different phantom locations (left head, right head, and flat phantom).



## System Validation Kits for SAM Twin Phantom

**Construction:** Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 900,1800,2450,5800 MHz

**Return loss:** > 20 dB at specified validation position

**Power capability:** > 100 W (f < 1GHz); > 40 W (f > 1GHz)

**Dimensions:**

D835V2: dipole length: 161 mm; overall height: 340 mm

D1800V2: dipole length: 72.5 mm; overall height: 300 mm

D1900V2: dipole length: 67.7 mm; overall height: 300 mm

D2450V2: dipole length: 51.5 mm; overall height: 290 mm

D5GHzV2: dipole length: 20.6 mm; overall height: 300mm



## System Validation Kits for ELI4 phantom

**Construction:** Symmetrical dipole with 1/4 balun Enables measurement of feedpoint impedance with NWA Matched for use near flat phantoms filled with brain simulating solutions Includes distance holder and tripod adaptor.

**Frequency:** 900, 1800, 2450, 5800 MHz

**Return loss:** > 20 dB at specified validation position

**Power capability:** > 100 W (f < 1GHz); > 40 W (f > 1GHz)

**Dimensions:**

D835V2: dipole length: 161 mm; overall height: 340 mm

D1800V2: dipole length: 72.5 mm; overall height: 300 mm

D1900V2: dipole length: 67.7 mm; overall height: 300 mm

D2450V2: dipole length: 51.5 mm; overall height: 290 mm

D5GHzV2: dipole length: 20.6 mm; overall height: 300 mm





## 7. EVALUATION PROCEDURES

### DATA EVALUATION

The DASY 5 post processing software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	$Norm_i, a_{i0}, a_{i1}, a_{i2}$
	- Conversion factor	$ConvF_i$
	- Diode compression point	$dcp_i$
Device parameters:	- Frequency	$f$
	- Crest factor	$cf$
Media parameters:	- Conductivity	$\sigma$
	- Density	$\rho$

These parameters must be set correctly in the software. They can be found in the component documents or be imported into the software from the configuration files issued for the DASY 5 components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with	$V_i$	= Compensated signal of channel i (i = x, y, z)
	$U_i$	= Input signal of channel i (i = x, y, z)
	$cf$	= Crest factor of exciting field (DASY 5 parameter)
	$dcp_i$	= Diode compression point (DASY 5 parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H-field probes:

$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with	$V_i$	= Compensated signal of channel i (i = x, y, z)
	$Norm_i$	= Sensor sensitivity of channel i (i = x, y, z) $\mu V/(V/m)^2$ for E0field Probes
	$ConvF$	= Sensitivity enhancement in solution
	$a_{ij}$	= Sensor sensitivity factors for H-field probes
	$f$	= Carrier frequency (GHz)
	$E_i$	= Electric field strength of channel i in V/m
	$H_i$	= Magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$



The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  $SAR$  = local specific absorption rate in mW/g

$E_{tot}$  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid.

The power flow density is calculated assuming the excitation field as a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  $P_{pwe}$  = Equivalent power density of a plane wave in mW/cm<sup>2</sup>

$E_{tot}$  = total electric field strength in V/m

$H_{tot}$  = total magnetic field strength in A/m

## **SAR EVALUATION PROCEDURES**

The procedure for assessing the peak spatial-average SAR value consists of the following steps:

- **Power Reference Measurement**

The reference and drift jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

- **Area Scan**

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY 5 software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought-up, grid was at to 15 mm by 15 mm and can be edited by a user.

- **Zoom Scan**

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default zoom scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly (The default number inserted is 1).

- **Power Drift measurement**

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same settings. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. In the properties of the Drift job, the user can specify a limit for the drift and have DASY 5 software stop the measurements if this limit is exceeded.



## SPATIAL PEAK SAR EVALUATION

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE1529 standard. It can be conducted for 1 g and 10 g.

The DASY 5 system allows evaluations that combine measured data and robot positions, such as:

- maximum search
- extrapolation
- boundary correction
- peak search for averaged SAR

During a maximum search, global and local maximum searches are automatically performed in 2-D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2 dB of the global maxima for all SAR distributions.

### Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3-D space. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5x5x7 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1 g and 10 g cubes.

### Boundary effect

For measurements in the immediate vicinity of a phantom surface, the field coupling effects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosimetric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_o + S_b \exp\left(-\frac{z}{a}\right) \cos\left(\pi \frac{z}{\lambda}\right)$$

Since the decay of the boundary effect dominates for small probes ( $a \ll \lambda$ ), the cos-term can be omitted. Factors  $S_b$  (parameter Alpha in the DASY 5 software) and  $a$  (parameter Delta in the DASY 5 software) are assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- the boundary curvature is small
- the probe axis is angled less than 30° to the boundary normal
- the distance between probe and boundary is larger than 25% of the probe diameter
- the probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY 5 system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the measurement data extraction during post processing.





## 8. MEASUREMENT UNCERTAINTY

UNCERTAINTY BUDGE ACCORDING TO IEEE 1528-2003						
Error Description	Uncertainty Value $\pm\%$	Probability distribution	Divisor	C <sub>1</sub> 1g	Standard unc.(1g) $\pm\%$	V <sub>1</sub> or V <sub>eff</sub>
<b>Measurement System</b>						
Probe calibration	$\pm 5.5$	normal	1	1	$\pm 5.5$	$\infty$
Axial isotropy of probe	$\pm 4.7$	rectangular	$\sqrt{3}$	0.7	$\pm 1.9$	$\infty$
Hemispherical Isotropy of probe	$\pm 9.6$	rectangular	$\sqrt{3}$	0.7	$\pm 3.9$	$\infty$
Probe linearity	$\pm 4.7$	rectangular	$\sqrt{3}$	1	$\pm 2.7$	$\infty$
Detection Limit	$\pm 1.0$	rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Boundary effects	$\pm 1.0$	rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
Readout electronics	$\pm 0.3$	normal	1	1	$\pm 0.3$	$\infty$
Response time	$\pm 0.8$	rectangular	$\sqrt{3}$	1	$\pm 0.5$	$\infty$
Integration time	$\pm 2.6$	rectangular	$\sqrt{3}$	1	$\pm 1.5$	$\infty$
Probe positioning	$\pm 2.9$	rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Probe positioner	$\pm 0.4$	rectangular	$\sqrt{3}$	1	$\pm 0.2$	$\infty$
RF ambient Noise	$\pm 3.0$	rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
RF ambient Reflections	$\pm 3.0$	rectangular	$\sqrt{3}$	1	$\pm 1.7$	$\infty$
Max.SAR Eval	$\pm 1.0$	rectangular	$\sqrt{3}$	1	$\pm 0.6$	$\infty$
<b>Test Sample Related</b>						
Device positioning	$\pm 2.9$	normal	1	1	$\pm 2.9$	145
Device holder uncertainty	$\pm 3.6$	normal	1	1	$\pm 3.6$	5
Power drift	$\pm 5.0$	rectangular	$\sqrt{3}$	1	$\pm 2.9$	$\infty$
<b>Phantom and Set up</b>						
Phantom uncertainty	$\pm 4.0$	rectangular	$\sqrt{3}$	1	$\pm 2.3$	$\infty$
Liquid conductivity(target)	$\pm 5.0$	rectangular	$\sqrt{3}$	0.64	$\pm 1.8$	$\infty$
Liquid conductivity(meas.)	$\pm 2.5$	rectangular	1	0.64	$\pm 1.6$	$\infty$
Liquid permittivity(target)	$\pm 5.0$	rectangular	$\sqrt{3}$	0.6	$\pm 1.7$	$\infty$
Liquid permittivity(meas.)	$\pm 2.5$	rectangular	1	0.6	$\pm 1.5$	$\infty$
<b>Combined Standard Uncertainty</b>					$\pm 10.7$	387
<b>Coverage Factor for 95%</b>		kp=2				
<b>Expanded Standard Uncertainty</b>					$\pm 21.4$	

Table: Worst-case uncertainty for DASY5 assessed according to IEEE1528-2003.

The budge is valid for the frequency range 300 MHz to 6G Hz and represents a worst-case analysis.





## 9. EXPOSURE LIMIT

(A). Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

(B). Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

**Note:** **Whole-Body SAR** is averaged over the entire body, **partial-body SAR** is averaged over any 10 gram of tissue defined as a tissue volume in the shape of a cube. **SAR for hands, wrists, feet and ankles** is averaged over any 1 grams of tissue defined as a tissue volume in the shape of a cube.

**Population/Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Occupational/Controlled Environments** are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure, (i.e. as a result of employment or occupation).

**NOTE**  
**GENERAL POPULATION/UNCONTROLLED EXPOSURE**  
**PARTIAL BODY LIMIT**  
**1.6 W/kg**



## 10. EUT ARRANGEMENT

Please refer to IEEE1528-2003 illustration below.

### 10.1 ANTHROPOMORPHIC HEAD PHANTOM

Figure 7-1a shows the front, back and side views of SAM. The point “M” is the reference point for the center of mouth, “LE” is the left ear reference point (ERP), and “RE” is the right ERP. The ERPs are 15 mm posterior to the entrance to ear canal (EEC) along the B-M line (Back-Mouth), as shown in Figure 7-1b. The plane passing through the two ear reference points and M is defined as the Reference Plane. The line N-F (Neck-Front) perpendicular to the reference plane and passing through the RE (or LE) is called the Reference Pivoting Line (see Figure 7-1c). Line B-M is perpendicular to the N-F line. Both N-F and B-M lines should be marked on the external phantom shell to facilitate handset positioning. Posterior to the N-F line, the thickness of the phantom shell with the shape of an ear is a flat surface 6 mm thick at the ERPs. Anterior to the N-F line, the ear is truncated as illustrated in Figure 7-1b. The ear truncation is introduced to avoid the handset from touching the ear lobe, which can cause unstable handset positioning at the cheek.

Figure 7-1a  
Front, back and side view of SAM (model for the phantom shell)



Figure 7-1b

Close up side view of phantom showing the ear region

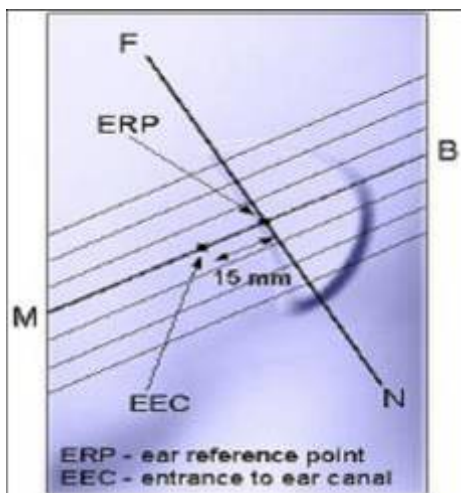


Figure 7-1b

Close up side view of phantom showing the ear region

Figure 7-1c

Side view of the phantom showing relevant markings and the 7 cross sectional plane locations

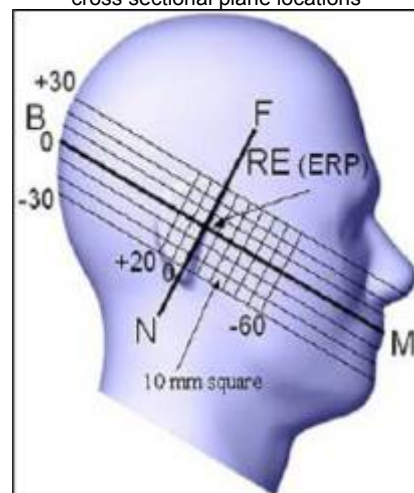


Figure 7-1c

Side view of the phantom showing relevant markings and the 7 cross sectional plane locations



## 10.2 DEFINITION OF THE “CHEEK/TOUCH” POSITION

The “cheek” or “touch” position is defined as follows:

- a. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece, open the cover. (If the handset can also be used with the cover closed both configurations must be tested.)
- b. Define two imaginary lines on the handset: the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset: the midpoint of the width  $w_t$  of the handset at the level of the acoustic output (point A on Figures 7-2a and 7-2b), and the midpoint of the width  $w_b$  of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 7-2a). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output. However, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 7-2b), especially for clamshell handsets, handsets with flip pieces, and other irregularly-shaped handsets.
- c. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 7-2c), such that the plane defined by the vertical center line and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
- d. Translate the handset towards the phantom along the line passing through RE and LE until the handset touches the pinna.
- e. e) While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to MB-NF including the line MB (called the reference plane).
- f. Rotate the handset around the vertical centerline until the handset (horizontal line) is symmetrical with respect to the line NF.
- g. While maintaining the vertical centerline in the reference plane, keeping point A on the line passing through RE and LE and maintaining the handset contact with the pinna, rotate the handset about the line NF until any point on the handset is in contact with a phantom point below the pinna (cheek). See Figure 7-2c. The physical angles of rotation should be noted.

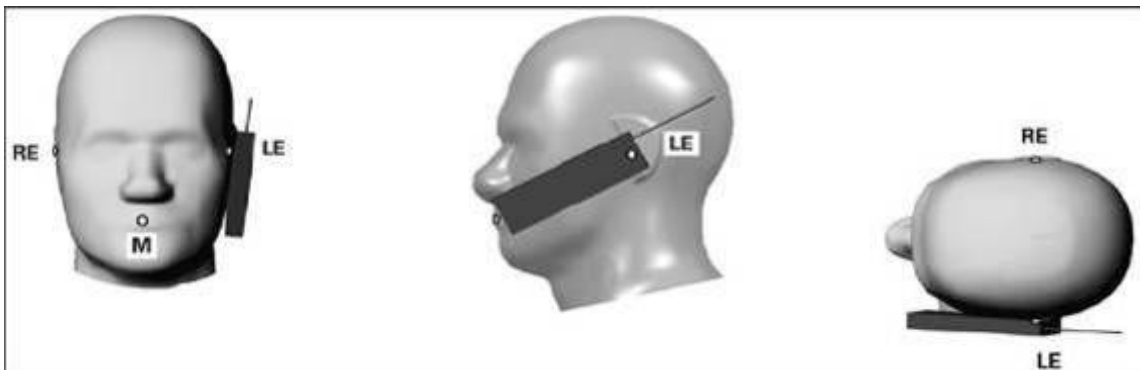


Figure 7.2c

Phone “cheek” or “touch” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for handset positioning, are indicated.

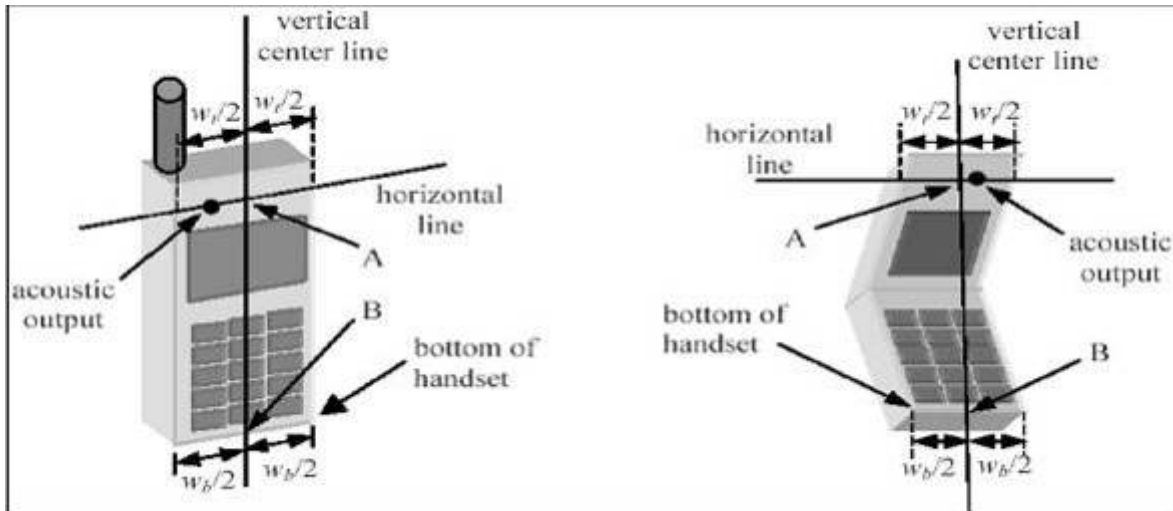


Figure 7.2a

Figure 7.2b

### 10.3 DEFINITION OF THE “TILTED” POSITION

The “tilted” position is defined as follows:

- Repeat steps (a) – (g) of 7.2 to place the device in the “cheek position.”
- While maintaining the orientation of the handset move the handset away from the pinna along the line passing through RE and LE in order to enable a rotation of the handset by 15 degrees.
- Rotate the handset around the horizontal line by 15 degrees.
- While maintaining the orientation of the handset, move the handset towards the phantom on a line passing through RE and LE until any part of the handset touches the ear. The tilted position is obtained when the contact is on the pinna. If the contact is at any location other than the pinna (e.g., the antenna with the back of the phantom head), the angle of the handset should be reduced. In this case, the tilted position is obtained if any part of the handset is in contact with the pinna as well as a second part of the handset is contact with the phantom (e.g., the antenna with the back of the head).

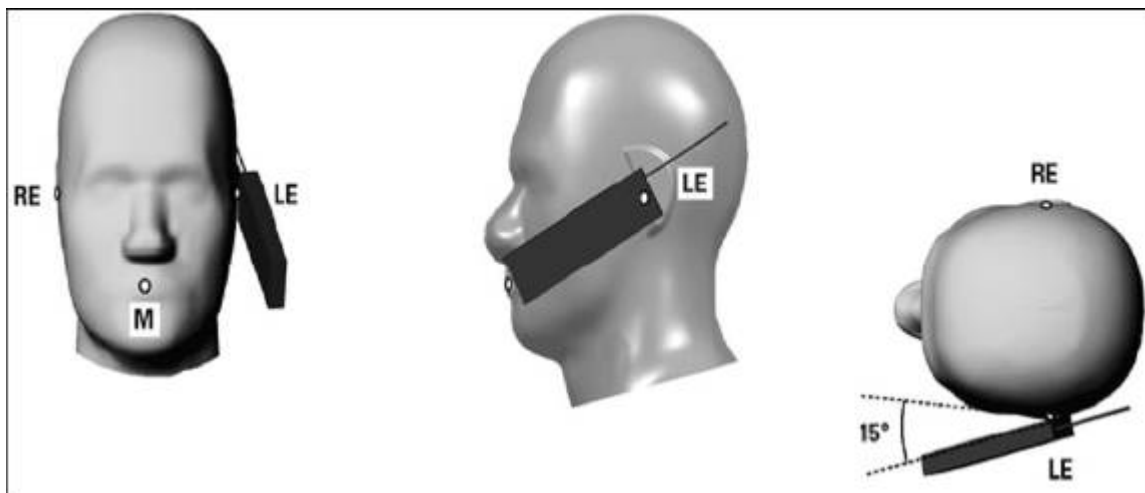


Figure 7-3

Phone “tilted” position. The reference points for the right ear (RE), left ear (LE) and mouth (M), which define the reference plane for handset positioning, are indicated.



## 11. MEASUREMENT RESULTS

### 11.1 TEST LIQUIDS CONFIRMATION

#### SIMULATED TISSUE LIQUID PARAMETER CONFIRMATION

The dielectric parameters were checked prior to assessment using the HP85070C dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

#### IEEE SCC-34/SC-2 P1528 RECOMMENDED TISSUE DIELECTRIC PARAMETERS

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency (MHz)	Head		Body	
	$\epsilon_r$	$\sigma$ (S/m)	$\epsilon_r$	$\sigma$ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	45.3	5.27	48.2	6.00

( $\epsilon_r$  = relative permittivity,  $\sigma$  = conductivity and  $\rho = 1000 \text{ kg/m}^3$ )



## 11.2 LIQUID MEASUREMENT RESULTS

The following table give the recipes for tissue simulating liquid:

For Head:

Frequency (MHz)	Water (%)	Sugar (%)	Salt (%)	Cellulose (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
835	41.07	47.31	1.15	0.23	0.24	0	0.90	41.50
1900	54.88	0	0.21	0	0	44.91	1.40	40.00
2450	55.00	0	0	0	0	45.00	1.80	39.20

For Body:

Frequency (MHz)	Water (%)	Sugar (%)	Salt (%)	Cellulose (%)	Preventol (%)	DGBE (%)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )
835	51.5	45.4	1.12	0.21	0.25	0	0.97	55.20
1900	38.6	55.3	0.8	0	0	0	1.52	53.30
2450	65.33	0	0	0	0	23.54	1.95	52.70

The following table give the targets for tissue simulating liquid:

For Head:

Frequency (MHz)	Conductivity ( $\sigma$ )	+/- 5% Range	Permittivity ( $\epsilon_r$ )	+/- 5% Range
835	0.90	0.86~0.95	41.50	39.40~43.60
1900	1.40	1.33~1.47	40.00	38.00~42.00
2450	1.80	1.71~1.89	39.20	37.24~41.16

For Body:

Frequency (MHz)	Conductivity ( $\sigma$ )	+/- 5% Range	Permittivity ( $\epsilon_r$ )	+/- 5% Range
835	0.97	0.92~1.02	55.20	52.44~57.96
1900	1.52	1.44~1.60	53.30	50.64~55.96
2450	1.95	1.85~2.05	52.70	50.06~55.33





The following table show the measuring results for simulating liquid:

Ambient condition: Temperature: 21 °C Relative humidity: 58%

Liquid Type	Frequency	Temp. [°C]	Parameters	Target	Measured	Deviation[%]	Limited[%]	Measured Date
Head850	850 MHz	21	Permittivity	41.50	41.58	0.19	± 5	2012-8-1
		21	Conductivity	0.90	0.92	2.22	± 5	2012-8-1
Body850	850 MHz	21	Permittivity	55.20	55.85	1.18	± 5	2012-8-1
		21	Conductivity	0.97	0.98	1.03	± 5	2012-8-1
Head1900	1900 MHz	21	Permittivity	40.00	40.31	0.78	± 5	2012-8-2
		21	Conductivity	1.40	1.42	1.43	± 5	2012-8-2
Body1900	1900 MHz	21	Permittivity	53.30	54.33	1.93	± 5	2012-8-2
		21	Conductivity	1.52	1.54	1.32	± 5	2012-8-2
Head2450	2450 MHz	20	Permittivity	39.20	41.12	4.90	± 5	2012-8-3
		20	Conductivity	1.80	1.82	1.11	± 5	2012-8-3
Body2450	2450 MHz	21	Permittivity	52.70	53.52	1.56	± 5	2012-8-3
		21	Conductivity	1.95	1.96	0.51	± 5	2012-8-3

### 11.3 PROBE CALIBRATION PROCEDURE

For the calibration of E-field probes in lossy liquids, an electric field with an accurately known field strength must be produced within the measured liquid. For standardization purposes it would be desirable if all measurements which are necessary to assess the correct field strength would be traceable to standardized measurement procedures. In the following two different calibration techniques are summarized:

#### Transfer Calibration with Temperature Probes

In lossy liquids the specific absorption rate (SAR) is related both to the electric field ( $E$ ) and the temperature gradient ( $dT/dt$ ) in the liquid.

$$SAR = \frac{\sigma}{\rho} |E|^2 = c \frac{dT}{dt}$$

whereby  $\sigma$  is the conductivity,  $\rho$  the density and  $c$  the heat capacity of the liquid.



Hence, the electric field in lossy liquid can be measured indirectly by measuring the temperature gradient in the liquid. Non-disturbing temperature probes (optical probes or thermistor probes with resistive lines) with high spatial resolution ( $<1-2$  mm) and fast reaction time ( $<1$  s) are available and can be easily calibrated with high precision [2]. The setup and the exciting source have no influence on the calibration; only the relative positioning uncertainties of the standard temperature probe and the E-field probe to be calibrated must be considered. However, several problems limit the available accuracy of probe calibrations with temperature probes:

- The temperature gradient is not directly measurable but must be evaluated from temperature measurements at different time steps. Special precaution is necessary to avoid measurement errors caused by temperature gradients due to energy equalizing effects or convection currents in the liquid. Such effects cannot be completely avoided, as the measured field itself destroys the thermal equilibrium in the liquid. With a careful setup these errors can be kept small.
- The measured volume around the temperature probe is not well defined. It is difficult to calculate the energy transfer from a surrounding gradient temperature field into the probe. These effects must be considered, since temperature probes are calibrated in liquid with homogeneous temperatures. There is no traceable standard for temperature rise measurements.
- The calibration depends on the assessment of the specific density, the heat capacity and the conductivity of the medium. While the specific density and heat capacity can be measured accurately with standardized procedures ( $\sim 2\%$  for  $c$ ; much better for  $\rho$ ), there is no standard for the measurement of the conductivity. Depending on the method and liquid, the error can well exceed  $\pm 5\%$ .
- Temperature rise measurements are not very sensitive and therefore are often performed at a higher power level than the E-field measurements. The nonlinearities in the system (e.g., power measurements, different components, etc.) must be considered.

Considering these problems, the possible accuracy of the calibration of E-field probes with temperature gradient measurements in a carefully designed setup is about  $\pm 10\%$  (RSS) [4]. Recently, a setup which is a combination of the waveguide techniques and the thermal measurements was presented in

[7]. The estimated uncertainty of the setup is  $\pm 5\%$  (RSS) when the same liquid is used for the calibration and for actual measurements and  $\pm 7-9\%$  (RSS) when not, which is in good agreement with the estimates given in [4].



## Calibration with Analytical Fields

In this method a technical setup is used in which the field can be calculated analytically from measurements of other physical magnitudes (e.g., input power). This corresponds to the standard field method for probe calibration in air; however, there is no standard defined for fields in lossy liquids.

When using calculated fields in lossy liquids for probe calibration, several points must be considered in the assessment of the uncertainty:

- The setup must enable accurate determination of the incident power.
- The accuracy of the calculated field strength will depend on the assessment of the dielectric parameters of the liquid.
- Due to the small wavelength in liquids with high permittivity, even small setups might be above the resonant cutoff frequencies. The field distribution in the setup must be carefully checked for conformity with the theoretical field distribution.

In the following section a setup which allows the analytical calculation of the SAR will be introduced.

## New Waveguide Setup for Probe Calibration

Rectangular waveguides are self-contained systems. In the frequency band in which only the dominant  $TE_{01}$  mode exists, highly accurate fields can be generated for calibration purposes if reflections can be minimized or compensated for. Considerable standing waves unavoidably occur if a lossy liquid is inserted in the waveguide. However, the cross sectional field distribution which is defined only by the geometry is not modified by these standing waves, a fact which can be utilized for generating well defined fields inside lossy liquid.

Three different standard waveguides (R9, R14 and R22) with overlapping frequency ranges were realized covering the frequency range of interest, i.e., from 800 up to 2500 MHz. In each waveguide, a planar, dielectric slab ( $\epsilon_r = 3.3$ ) was introduced to minimize reflections (return loss  $< -10$  dB). The lossy tissue simulating liquid in which the probe had to be calibrated was

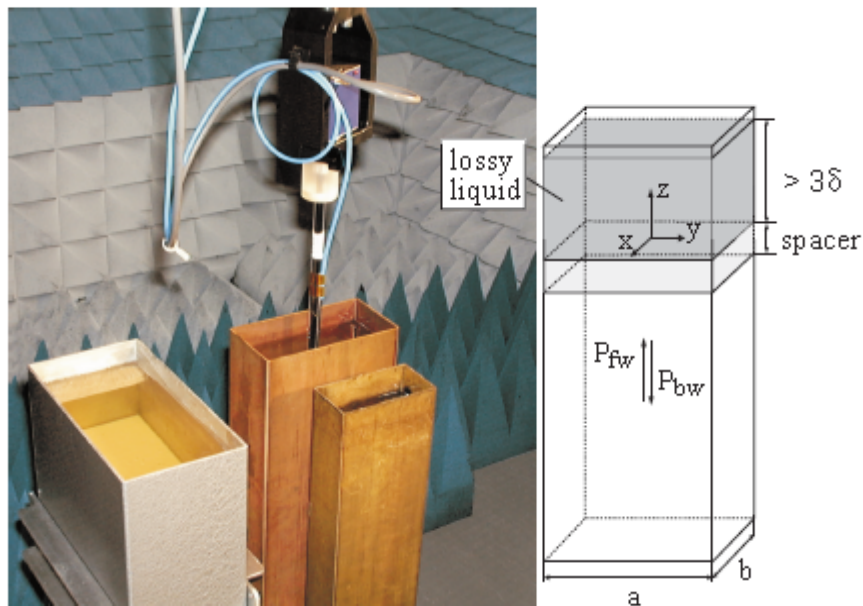


Figure 5.1: Experimental setup for assessment of the conversion factor when using a vertically rectangular waveguide.

The here presented waveguide system is a robust and easy-to-use setup enabling calibration of dosimetric E-field probes with high precision. Even more important is that the calibration of the setup can be reduced to power measurements which can be traced to a standard calibration procedure. The practical limitation given by the waveguide size to the frequency band between 800 and 2500 MHz is not severe in the context of compliance testing, since the most important operational frequencies of mobile communications systems are covered. The presented waveguide system is therefore well suited for implementation as a standard calibration technique for dosimetric probes in this frequency range. For frequencies below 800 MHz, transfer calibration with temperature probes remains the most practical way to achieve calibration with decent precision.





filled into the vertically standing waveguide. The medium depth had to be chosen such that the standing waves within the liquid were negligible, i.e., larger than three times the skin depth ( $< -50$  dB at the interface liquid-slab). The attenuation of the waveguide adapters was determined to be 0.05 dB by the transmission method using two identical adapters. Table 5.1 gives an overview of some of the construction details.

	R9	R14	R22
WG cross section*	248 x 124	165 x 82.5	109 x 54.7
Spacer height*	50	30	25
Liquid height*	150	130	80

\* all dimensions in mm

Table 5.1: Description of the waveguide systems.

With these setups, the total power absorbed by the lossy liquid can be accurately determined by measurement of the forward and reflected powers. Since all power entering the lossy liquid is absorbed by the liquid, the volume SAR can be determined as:

$$SAR^V = \frac{4(P_{fw} - P_{bw})}{ab\delta} \cos^2\left(\pi\frac{y}{a}\right) e^{(-2z/\delta)} \quad (5.2)$$

The here presented waveguide system is a robust and easy-to-use setup enabling calibration of dosimetric E-field probes with high precision. Even more important is that the calibration of the setup can be reduced to power measurements which can be traced to a standard calibration procedure. The practical limitation given by the waveguide size to the frequency band between 800 and 2500 MHz is not severe in the context of compliance testing, since the most important operational frequencies of mobile communications systems are covered. The presented waveguide system is therefore well suited for implementation as a standard calibration technique for dosimetric probes in this frequency range. For frequencies below 800 MHz, transfer calibration with temperature probes remains the most practical way to achieve calibration with decent precision.



## 11.4 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of  $\pm 10\%$ . The system performance check results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.


### SYSTEM PERFORMANCE CHECK MEASUREMENT CONDITIONS

- The measurements were performed in the flat section of the SAM twin phantom filled with head and body simulating liquid of the following parameters.
- The DASY5 system withan E-fileld probe EX3DV4 SN: 3755 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 15 mm (below 1 GHz) and 10 mm (above 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 10mm was aligned with the dipole.
- Special 7x7x7 fine cube was chosen for cube integration (dx= 5 mm, dy= 5 mm, dz= 5 mm).
- Distance between probe sensors and phantom surface was set to 2.5 mm.
- The dipole input power was  $1W \pm 3\%$ .
- The results are normalized to 1 W input power.





## Depth of Liquid

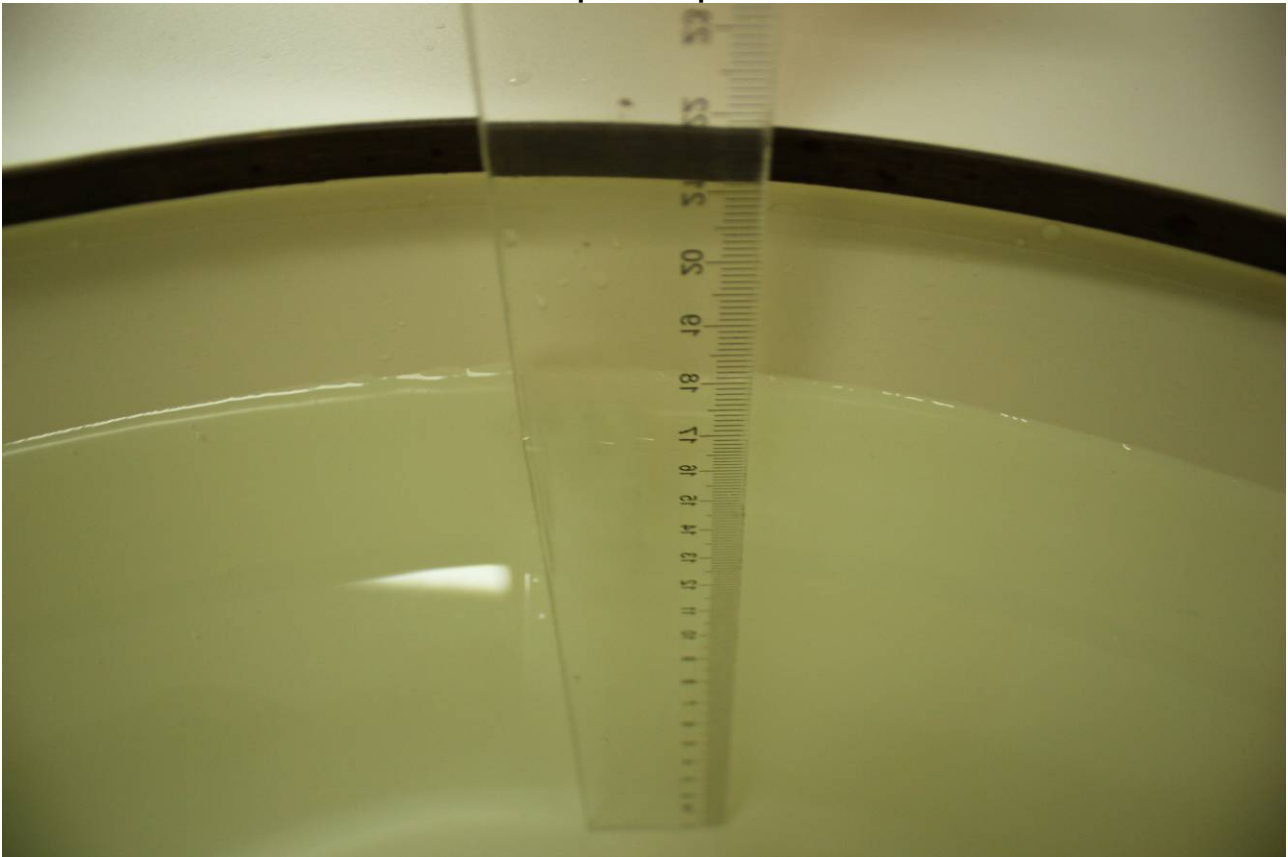

- Note: For SAR testing, the depth is larger than 15cm shown above

### Reference SAR values

The reference SAR values were using measurement results indicated in the dipole calibration document (see table below)

Frequency (MHz)	1g SAR	10g SAR	Local SAR at Surface (Above Feed Point)	Local SAR at Surface (y = 2cm offset from feed point)
850 Head	9.57	6.23	14.1	4.9
850 Body	9.92	6.55		
1900 Head	40.50	21.10	67.6	6.6
1900 Body	39.70	21.10		
2450 Head	54.80	25.30	104.2	7.7
2450 Body	52.90	24.50		



## SYSTEM PERFORMANCE CHECK RESULTS

### Ambient conduction

Temperature: 21 °C Relative humidity: 58%**System Validation Dipole:** D835V2-SN:4d114**Date:** August 1, 2012

Head Simulatinf Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
850 MHz	20.30	1g SAR	9.57	9.64	0.73	±10
		10g SAR	6.23	6.32	1.44	±10

Temperature: 21 °C Relative humidity: 58%**System Validation Dipole:** D835V2-SN:4d114**Date:** August 1, 2012

Body Simulatinf Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
850 MHz	20.30	1g SAR	9.92	10.04	1.21	±10
		10g SAR	6.55	6.48	-1.07	±10

Temperature: 21 °C Relative humidity: 58%**System Validation Dipole:** D1900V2-SN:5d136**Date:** August 2, 2012

Head Simulatinf Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
1900 MHz	20.30	1g SAR	40.50	40.16	-0.84	±10
		10g SAR	21.10	21.28	0.85	±10

Temperature: 21 °C Relative humidity: 58%**System Validation Dipole:** D1900V2-SN:5d136**Date:** August 2, 2012

Head Simulatinf Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
1900 MHz	20.30	1g SAR	39.70	39.88	0.45	±10
		10g SAR	21.10	20.72	-1.80	±10

Temperature: 21 °C Relative humidity: 58%**System Validation Dipole:** D2450V2-SN:817**Date:** August 3, 2012

Head Simulatinf Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
2450 MHz	20.30	1g SAR	54.80	54.56	-0.44	±10
		10g SAR	25.30	25.20	-0.40	±10

Temperature: 21 °C Relative humidity: 58%**System Validation Dipole:** D2450V2-SN:817**Date:** August 3, 2012

Body Simulatinf Liquid		Parameters	Target	Measured	Deviation[%]	Limited[%]
Frequency	Temp. [°C]					
2450 MHz	20.30	1g SAR	52.90	52.36	-1.02	±10
		10g SAR	24.50	24.68	0.73	±10



## 11.5 EUT TUNE-UP PROCEDURES AND TEST MODE

The following procedure had been used to prepare the EUT for the SAR test.

To setup the desire channel frequency and the maximum output power. A Radio Communication Tester "CMU200" was used to program the EUT.

### GSM 850 / GPRS850/EDGE850:

Network Support: GSM only / GPRS/EDGE  
Main Service: Circuit Switched / Packet data  
Power Setting: 33dBm / 33dBm

### GSM 1900 / GPRS 1900/EDGE1900:

Network Support: GSM only / GPRS/EDGE  
Main Service: Circuit Switched / Packet data  
Power Setting: 30dBm / 30dBm

According to the customer declared tune-up power:

Mode	The tune-up maximum Power(customer declared) (dBm)	Range
GSM 850	32.69+/-0.2	32.49~32.89
GPRS 850	31.83+/-0.2	31.63~32.03
EDGE 850	32.60+/-0.2	32.40~32.80
GSM 1900	29.68+/-0.2	29.48~29.88
GPRS 1900	28.19+/-0.2	27.99~28.39
EDGE 1900	28.42+/-0.2	28.22~28.62
WCDMA Band II	21.85+/-0.2	21.65~22.05
WCDMA Band V	22.77+/-0.2	22.57~22.97
IEEE 802.11b	16.35+/-0.2	16.15~16.55
IEEE 802.11g	14.42+/-0.2	14.22~14.62
IEEE 802.1120Mhz	14.13+/-0.2	13.93~14.33
IEEE 802.1140Mhz	13.56+/-0.2	12.36~13.76

We measured conduct maximum power:

Mode	Measurement conducted Power (dBm)
GSM 850	32.85
GPRS 850	31.98
EDGE 850	32.76
GSM 1900	29.82
GPRS 1900	28.38
EDGE 1900	28.55



WCDMA Band II	22.02
WCDMA Band V	22.92
IEEE 802.11b	16.51
IEEE 802.11g	14.58
IEEE 802.1120Mhz	14.21
IEEE 802.1140Mhz	13.68

So, they are in tune-up range and complied.

Maximum conducted power was measured by replacing the antenna with an adapter for conductive measurement.

**Conducted output power (Average) For GSM 850/GSM1900:**

GSM	Frequency		GSM mode	
	Channel	MHz	before a	fter
GSM850	128 82	4.2	32.56	32.49
	190 83	6.6	<b>32.85</b>	32.78
	251 84	8.8	32.50	32.40
GSM	Frequency		GSM mode	
	Channel	MHz	before a	fter
GSM1900	512 18	50.2	29.68	29.61
	661 18	80.0	<b>29.82</b>	29.75
	810 19	09.8	29.43	29.41

**Conducted output power (Average) For GPRS 850/ GPRS 1900:**

GPRS	Frequency		GPRS mode	
	Channel	MHz	before a	fter
GPRS 850	128 82	4.2	31.79	31.73
	190 83	6.6	<b>31.98</b>	31.91
	251 84	8.8	31.61	31.51
GPRS	Frequency		GPRS mode	
	Channel	MHz	before a	fter
GPRS 1900	512 18	50.2	28.18	28.13
	661 18	80.0	<b>28.38</b>	28.32
	810 19	09.8	28.26	28.25

**Conducted output power (Average) For EDGE 850/ EDGE 1900:**

EDGE	Frequency		GPRS mode	
	Channel	MHz	before a	fter



EDGE 850	128 82	4.2	32.44	32.35
	190 83	6.6	<b>32.76</b>	32.74
	251 84	8.8	32.51	32.48
EDGE	Frequency		GPRS mode	
	Channel	MHz	before a	fter
EDGE 1900	512 18	50.2	28.29	28.18
	661 18	80.0	<b>28.55</b>	28.46
	810 19	09.8	28.32	28.29



**It support GPRS Class 12:**

System and Channel	Power values (dbm)	Average factor (db)	Time average (dbm) (before)	Time average (dbm) (after)
GSM850 CH190(1TS)	---	---	---	---
GPRS850 CH190				
1TS	31.21	-9.03	22.18	---
2TS	31.19	-6.02	25.17	---
3TS	31.15	-4.26	26.89	---
<b>4TS</b>	31.12	<b>-3.01</b>	<b>28.11</b>	<b>27.82</b>
GSM1900 Ch 661(1TS)	---	---	---	---
GPRS1900 Ch 661				
1TS	28.81	-9.03	19.78	---
2TS	28.72	-6.02	22.70	---
3TS	28.65	-4.26	24.39	---
<b>4TS</b>	28.48	<b>-3.01</b>	<b>25.47</b>	<b>25.38</b>

NOTE: 1)For GSM ,complete set of tests are performed ,For GPRS ,only the modes with maximum time average power values need to be tested respectively, So GPRS 850 only 4timeslot mode and GPRS 1900 only 4timeslot mode are tested.

2)For GPRS ,the test modes are the worst case of GSM modes

3)GSM has 8 timeslot

Average factor: when 1TS :  $10 \cdot \text{LOG}1/8 = -9.03$

2TS:  $10 \cdot \text{LOG}2/8 = -6.02$

3TS:  $10 \cdot \text{LOG}3/8 = -4.26$

4TS:  $10 \cdot \text{LOG}4/8 = -3.01$

Time average power: when 1TS=Power value+ Average factor=31.21+(-9.03)=22.18dbm

2TS,3TS and 4TS in a similar way

**GSM Multi-slot classes supported by the devices:**

Multislot Class	Max Slot Allocation			Allowable Configuration	Max Data Rate
	Downlink	Uplink	Active		
12	4	4	5	1 up; 4 down	8-12K bps Send 32-48K bps Receive
				2 up; 3 down	16-24K bps Send 24-36K bps Receive
				3 up; 2 down	24-36K bps Send 16-24K bps Receive
				4 up; 1 down	32-48K bps Send 8-12K bps Receive

**It support EDGE Class 12:**

System and Channel	Power values (dbm)	Average factor (db)	Time average (dbm) (before)	Time average (dbm) (after)
GSM850 CH190(1TS)	---	---	---	---
GPRS850 CH190				
1TS	31.97	-9.03	22.94	---
2TS	31.85	-6.02	25.83	---
3TS	31.74	-4.26	27.48	---
<b>4TS</b>	31.89	<b>-3.01</b>	<b>28.88</b>	<b>28.75</b>
GSM1900 Ch 661(1TS)	---	---	---	---





GPRS1900 Ch 661				
1TS	28.68	-9.03	19.65	---
2TS	28.70	-6.02	22.68	---
3TS	28.60	-4.26	24.34	---
<b>4TS</b>	28.28	<b>-3.01</b>	<b>25.27</b>	<b>23.16</b>

NOTE: 1)For GPRS ,complete set of tests are performed ,For DEGE ,only the modes with maximum time average power values need to be tested respectively, So EDGE 850 only 4timeslot mode and EDGE1900 only 4timeslot mode are tested.

2)For EDGE ,the test modes are the worst case of GPRS modes

3)GPRS has 8 timeslot

Average factor: when 1TS :  $10 \cdot \text{LOG}1/8 = -9.03$

2TS:  $10 \cdot \text{LOG}2/8 = -6.02$

3TS:  $10 \cdot \text{LOG}3/8 = -4.26$

4TS:  $10 \cdot \text{LOG}4/8 = -3.01$

Time average power: when 1TS=Power value+ Average factor=30.97+(-9.03)=21.94dbm  
2TS,3TS and 4TS in a similar way

### WCDMA:

As the SAR body tests for WCDMA **Band II/ Band V**, we established the radio link through call processing. The

maximum output power were verified on high, middle and low channels for each test band according to 3GPP TS 34.121 with the following configuration:

a 12.2kbps RMC, 64,144,384 kbps RMC with TPC set to all "all '1's" b

Test loop Mode 1

The following procedures had been used to prepare the EUT for the SAR test.

WCDMA Band II		Conducted Power (dBm)					
		Ch 9262 (1852.4MHz)		Ch 9400 (1880.0MHz)		Ch 9538 (1907.6MHz)	
RMC		before	after	before	after	before	after
				21.92	N/A	<b>22.02</b>	21.93
HSDPA	Sub-test 1	21.65	N/A	<b>21.78</b>	N/A	21.54	N/A
	Sub-test 2	21.64	N/A	21.76	N/A	21.54	N/A
	Sub-test 3	21.43	N/A	21.55	N/A	21.32	N/A
	Sub-test 4	21.44	N/A	21.53	N/A	21.35	N/A
HSUPA	Sub-test 1	21.66	N/A	<b>21.77</b>	N/A	21.55	N/A
	Sub-test 2	19.95	N/A	20.07	N/A	19.84	N/A
	Sub-test 3	20.98	N/A	21.11	N/A	20.82	N/A
	Sub-test	19.98	N/A	20.06	N/A	19.85	N/A
	Sub-test	21.65	N/A	21.76	N/A	21.53	N/A



WCDMA Band V		Conducted Power (dBm)					
		Ch 4132 (826.40MHz)		Ch 4175 (836.60MHz)		Ch 4233 (846.60MHz)	
RMC		before	after	before	after	before	after
				22.42	N/A	22.48	N/A
HSDPA	Sub-test 1	22.16	N/A	22.14	N/A	<b>22.66</b>	N/A
	Sub-test 2	22.12	N/A	22.13	N/A	22.64	N/A
	Sub-test 3	22.03	N/A	22.01	N/A	22.48	N/A
	Sub-test 4	22.01	N/A	22.01	N/A	22.51	N/A
HSUPA	Sub-test 1	22.15	N/A	22.11	N/A	<b>22.61</b>	N/A
	Sub-test 2	20.48	N/A	20.49	N/A	20.95	N/A
	Sub-test 3	21.42	N/A	21.53	N/A	21.92	N/A
	Sub-test 3	20.52	N/A	20.53	N/A	20.97	N/A
	Sub-test 4	22.15	N/A	22.17	N/A	22.55	N/A

**Bluetooth & WIFI (IEEE802.11b/g/n)**

- The client supplied a special driver to program the EUT, allowing it to continually transmit the specified maximum power and change the channel frequency.
- Maximum conducted power was measured by replacing the antenna with an adapter for conductive measurement.
- The conducted power was measured at the high, middle and low channel frequency before and after the SAR measurement.
- During SAR test, the highest output channel per band measured first, and then if necessary, the other channels were measured according to the normal procedures.

**802.11b/g/n Conducted output power (Average)(dBm)**

Before:

Mode / Frequency	802.11b 1M	802.11g 6M	802.11n (20MHz)	802.11n (40MHz)
1(2412 MHz)	16.25	14.47	13.96	13.17
6(2437 MHz)	<b>16.51</b>	<b>14.58</b>	<b>14.21</b>	<b>13.68</b>
11(2462 MHz)	16.20	14.39	13.93	13.32



After:

Mode Frequency	802.11b 1M	802.11g 6M	802.11n (20MHz)	802.11n (40MHz)
1(2412 MHz)	16.11	N/A	N/A	N/A
6(2437 MHz)	16.19	N/A	N/A	N/A
11(2462 MHz)	16.06	N/A	N/A	N/A

Ps :

WIFI 802.11b Mode Max output power 16.31 dBm(=42.756mW)  $\geq$ PRef and antenna is < 2.5 cm from BT antenna, so **802.11b stand-alone SAR is required.**

According to the KDB248227,g mode and n-20MHz, n-40MHz maximum average power 1/4dB < b mode test channels power

So **802.11g and n-20MHz, n-40MHz stand-alone SAR is not required.**

### Bluetooth output power (Average)(dBm)

Mode Frequency	DATA1 1M	DATA3 3M
2402 MHz	0.37	0.26
2441 MHz	<b>0.58</b>	0.47
2480 MHz	0.23	0.11

Ps.

GSM and BT Antenna distance  $\geq$ 5 cm, BT power 0.58 dBm(=1.143mW)  $\leq$ 2\*PRef ,so **BT stand-alone SAR is not required**



## 11.6 SAR HANDSETS MULTI XMITER ASSESSMENT

Simultaneous SAR for Actually tested SAR value :  
SAR For Head and Body-Worn:

	GSM 850 head	GSM 850 body worn	GPRS 850 body worn
GSM 850 SAR(worst)	0.294	0.213	0.214
802.11b SAR(worst)	0.389	0.389	0.389
$\Sigma$ 1g-SAR	0.683	0.602	0.603
remark	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)

	EDGE 850 body worn
GSM 850 SAR(worst)	0.159
802.11b SAR(worst)	0.389
$\Sigma$ 1g-SAR	0.548
remark	Less than 1.6W/kg(limit)

	GSM 1900 head	GSM 1900 body worn	GPRS 1900 body worn
GSM 1900 SAR(worst)	0.198	0.231	0.183
802.11b SAR(worst)	0.389	0.389	0.389
$\Sigma$ 1g-SAR	0.587	0.620	0.572
remark	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)

	EDGE 1900 body worn
GSM 1900 SAR(worst)	0.167
802.11b SAR(worst)	0.389
$\Sigma$ 1g-SAR	0.556
remark	Less than 1.6W/kg(limit)

	head	body worn
Bluetooth SAR(worst)	0	0
802.11b SAR(worst)	0.334	0.389
$\Sigma$ 1g-SAR	0.334	0.389
remark	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)

	head	body worn
Bluetooth SAR(worst)	0	0
GSM SAR(worst)	0.294	0.231
$\Sigma$ 1g-SAR	0.294	0.231
remark	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)



**SAR For Head and Body(Hotspot):**

	<b>GSM 850 body Hotspot</b>	<b>GPRS 850 body Hotspot</b>	<b>EDGE 850 body Hotspot</b>
<b>GSM 850 SAR(worst)</b>	0.194	0.192	0.118
<b>802.11b SAR(worst)</b>	0.472	0.472	0.472
<b>Σ1g-SAR</b>	0.666	0.664	0.590
<b>remark</b>	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)

	<b>BandII body Hotspot</b>	<b>BandV body Hotspot</b>
<b>WCDMA SAR(worst)</b>	0.404	0.384
<b>802.11b SAR(worst)</b>	0.472	0.472
<b>Σ1g-SAR</b>	0.876	0.856
<b>remark</b>	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)

	<b>GSM 1900 body Hotspot</b>	<b>GPRS 1900 body Hotspot</b>	<b>EDGE 1900 body Hotspot</b>
<b>GSM 1900 SAR(worst)</b>	0.215	0.235	0.227
<b>802.11b SAR(worst)</b>	0.472	0.472	0.472
<b>Σ1g-SAR</b>	0.686	0.707	0.699
<b>remark</b>	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)	Less than 1.6W/kg(limit)

	<b>body Hotspot</b>
<b>Bluetooth SAR(worst)</b>	0
<b>802.11b SAR(worst)</b>	0.472
<b>Σ1g-SAR</b>	0.472
<b>remark</b>	Less than 1.6W/kg(limit)
	<b>body Hotspot</b>
<b>Bluetooth SAR(worst)</b>	0
<b>GSM SAR(worst)</b>	0.235
<b>Σ1g-SAR</b>	0.235
<b>remark</b>	Less than 1.6W/kg(limit)


**KDB 648474 simultaneous SAR evaluation:**

**Antenna Location:**

<b>antenna1</b>	<b>antenna2</b>	<b>antenna3</b>	<b>GSM to WIFI antenna distance(cm)</b>	<b>GSM to Bluetooth antenna distance(cm)</b>	<b>Bluetooth to WIFI antenna distance(cm)</b>	<b>remark</b>
<b>GSM</b>	<b>Bluetooth</b>	<b>WIFI</b>	6.9cm	6.9cm	0cm	Please refer to page 37



(x,y)	d <sub>xy</sub> , cm	simultaneous Tx SAR	remarks
WIFI to GSM antenna distance(cm)	6.9 cm	No	GSM/WIFI , Antenna distance is more than 5cm ,the sum of WIFI and GSM SAR is less than 1.6 W/kg. so no Simultaneous SAR needed.
GSM to Bluetooth antenna distance(cm)	6.9 cm	No	GSM/BT , Antenna distance is more than 5cm , and BT Power is less than 2*Pref. so no Simultaneous SAR needed.
Bluetooth to WIFI antenna distance(cm)	0 cm	No	WIFI/BT , Antenna distance is less than 2.5cm , WIFI Max SAR is less than 1.2 W/kg, so no Simultaneous SAR needed.

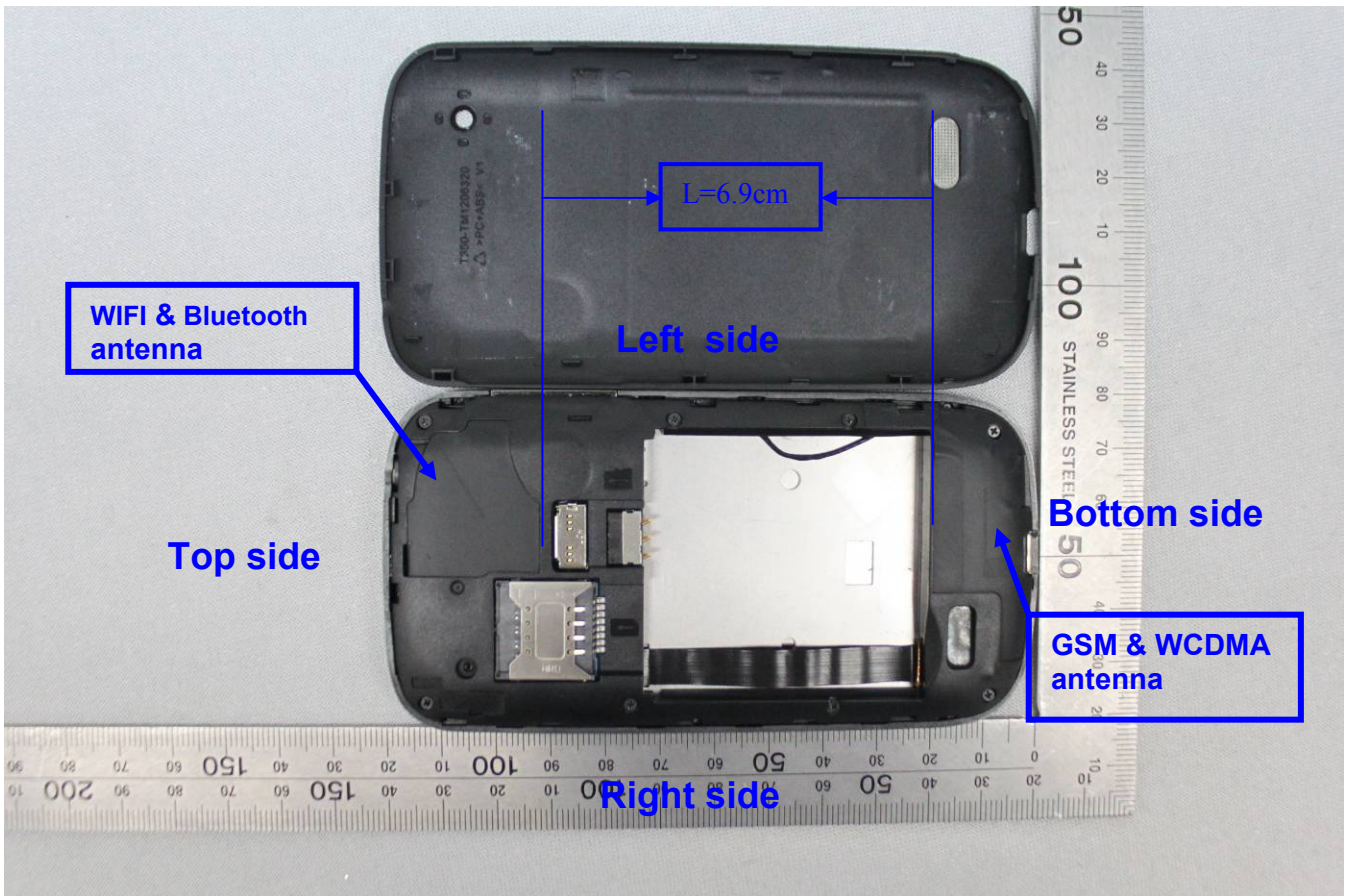

**SAR Data for Body(Hotspot) :**

Mode	Test Position	Distance
For GSM/GPRS	up face, down face , Bottom side , right side ,left side	Flat(1.0cm)
For WCDMA	up face, down face , Bottom side , right side ,left side	Flat(1.0cm)
For WIFI	up face, down face , Top side , left side	Flat(1.0cm)

**SAR Data for Body Worn :**





Mode	Test Position	Distance
For GSM/GPRS	up face, down face	Flat(1.0cm)
For WCDMA	up face, down face	Flat(1.0cm)
For WIFI	up face, down face	Flat(1.0cm)







## 11.7 EUT SETUP PHOTOS

### SAR Tested for Head:

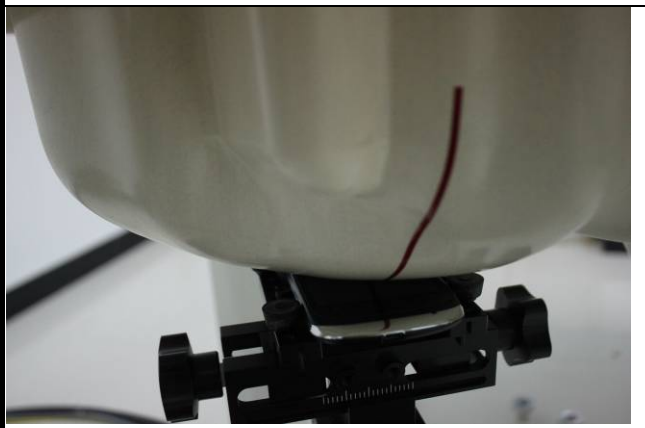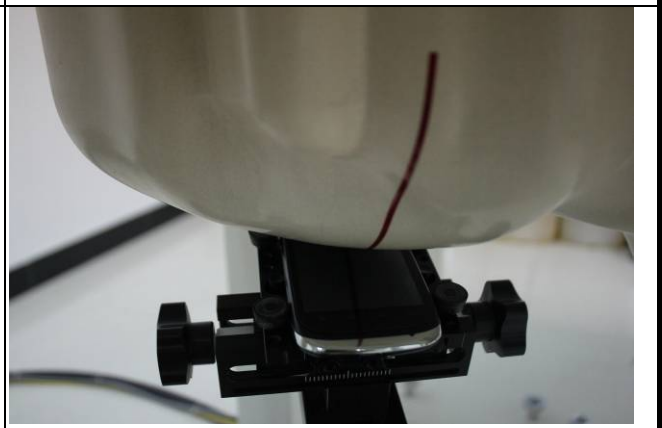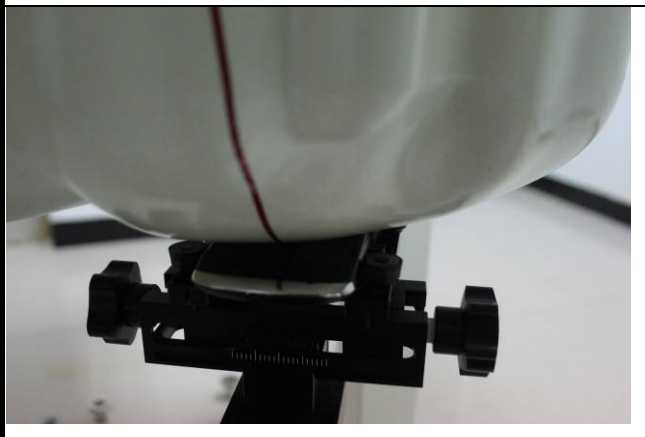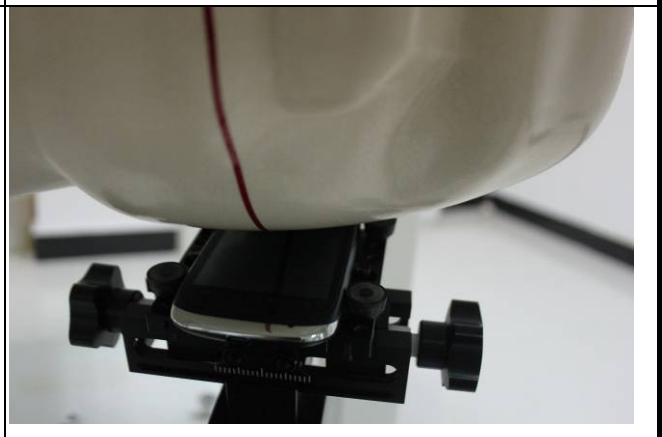Cheek device with right head phantom.	Tilt device with right head phantom
	
<b><u>EUT Setup Configuration 1</u></b>	<b><u>EUT Setup Configuration 2</u></b>
Cheek device with left head phantom.	Tilt device with left head phantom
	

### SAR Tested for Body-Worn:
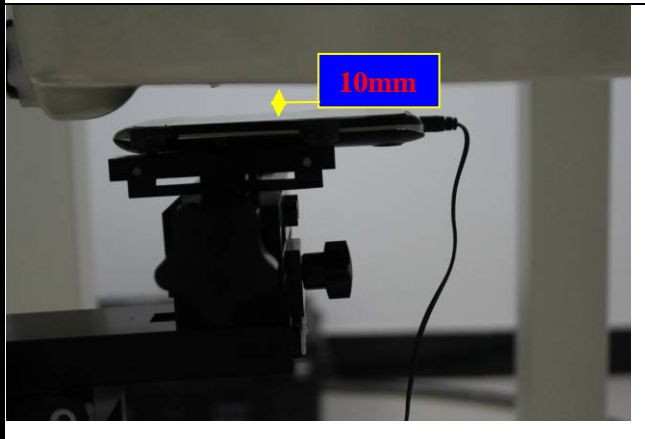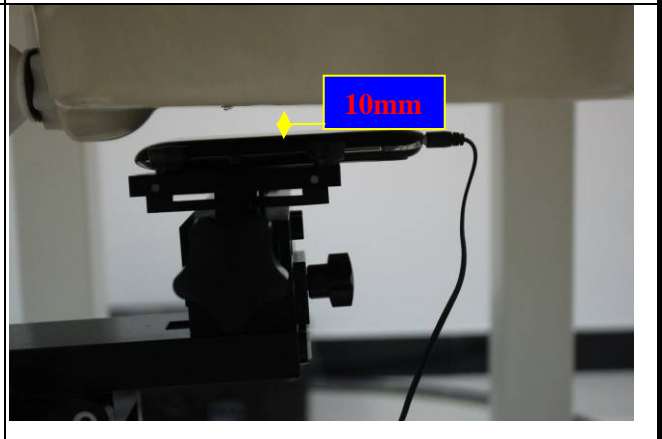
<b><u>UT Setup Configuration 3</u></b>	<b><u>EUT Setup Configuration 4</u></b>
Up in body position	Down in body position
	
<b><u>EUT Setup Configuration 5</u></b>	<b><u>EUT Setup Configuration 6</u></b>



## 11.8 SAR MEASUREMENT RESULTS

### Head Position mode: EUT Configuration 1&2&3&4

Date of Measurement: August 1, 2012 &amp; August 2, 2012

Test mode: <b>GSM 850</b> , Duty Cycle: 12.5%, Crest Factor: 8								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Right Check	Fixed	190	836.6	20.0	<b>0.294</b>	-0.07	+/- 0.21	1.6
Right Title	Fixed	190	836.6	20.0	0.134	-0.08		
Left Check	Fixed	190	836.6	20.0	0.207	0.11		
Left Title	Fixed	190	836.6	20.0	0.166	0.13		
Test mode: <b>DCS1900</b> , Duty Cycle: 12.5%, Crest Factor: 8								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Right Check	Fixed	661	1880.0	20.0	<b>0.198</b>	0.13	+/- 0.21	1.6
Right Title	Fixed	661	1880.0	20.0	0.101	0.15		
Left Check	Fixed	661	1880.0	20.0	0.141	0.11		
Left Title	Fixed	661	1880.0	20.0	0.122	0.10		
Remarks: For SAR testing, EUT is in GSM link mode. In GSM850/1900 link mode, its crest factor is 8. (Duty cycle: 1:8)								

### Body Position mode(Body Worn): EUT Configuration 5&6

#### GSM 850 & GPRS 850& EDGE 850

Date of Measurement: August 1, 2012

Test mode: <b>GSM 850</b> EUT Configuration 5:UP								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	190	836.6	20.0	0.204	-0.02	+/-0.21	1.6
Test mode: <b>GSM 850</b> EUT Configuration 6:Down								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	190	836.6	20.0	<b>0.213</b>	-0.11	+/-0.21	1.6
Test mode: <b>GPRS 850 CLASS 12</b> EUT Configuration 5:UP								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	190	836.6	20.0	0.154	0.02	+/-0.21	1.6



# Compliance Certification Services Inc.

Report No: KS120725A02-SF

FCCID: WA6S735

Date of Issue :August 5, 2012

Test mode: <b>GPRS 850 CLASS 12</b> EUT Configuration 6:Down								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	190	836.6	20.0	<b>0.214</b>	0.05	+/-0.21	1.6

Test mode: <b>EDGE850 CLASS 12</b> EUT Configuration 5:UP								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	190	836.6	20.0	0.142	0.13	+/-0.21	1.6

Test mode: <b>EDGE 850 CLASS 12</b> EUT Configuration 6:Down								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	190	836.6	20.0	<b>0.159</b>	0.11	+/-0.21	1.6

Remarks: For SAR testing, In GSM link mode, its crest factor is 8. (Duty cycle: 1:8);  
In EDGE link mode, its crest factor is 2. (Duty cycle: 1:2)

## GSM 1900 & GPRS 1900& EDGE 1900

Date of Measurement: August 2, 2012

Test mode: <b>GSM1900</b> EUT Configuration 5:UP								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	661	1880	20.0	0.168	-0.09	+/-0.21	1.6

Test mode: <b>GSM 1900</b> EUT Configuration 6:Down								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	661	1880	20.0	<b>0.231</b>	-0.05	+/-0.21	1.6

Test mode: <b>GPRS 1900 CLASS 12</b> EUT Configuration 5:UP								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	661	1880	20.0	0.114	0.04	+/-0.21	1.6

Test mode: <b>GPRS 1900 CLASS 12</b> EUT Configuration 6:Down								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	661	1880	20.0	<b>0.183</b>	0.02	+/-0.21	1.6



Remarks: For SAR testing, In GSM link mode, its crest factor is 8. (Duty cycle: 1:8);  
In GPRS link mode, its crest factor is 2. (Duty cycle: 1:2)

Test mode: **EDGE1900 CLASS 12** EUT Configuration 5:UP

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	661	1880	20.0	0.107	0.12	+/-0.21	1.6

Test mode: **EDGE 1900 CLASS 12** EUT Configuration 6:Down

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	661	1880	20.0	<b>0.167</b>	-0.11	+/-0.21	1.6

Remarks: For SAR testing, In GSM link mode, its crest factor is 8. (Duty cycle: 1:8);  
In EDGE link mode, its crest factor is 2. (Duty cycle: 1:2)

### Head Position mode(WCDMA BandII& BandV): EUT Configuration 1&2&3&4

Date of Measurement: August 1, 2012 & August 2, 2012

Test mode: **BandII**, Duty Cycle: 100%, Crest Factor: 1

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Right Check	Fixed	9400	1880	20.0	<b>0.386</b>	-0.09	+/- 0.21	1.6
Right Title	Fixed	9400	1880	20.0	0.293	0.03		
Left Check	Fixed	9400	1880	20.0	0.358	-0.13		
Left Title	Fixed	9400	1880	20.0	0.273	-0.06		

Test mode: **BandV**, Duty Cycle: 100%, Crest Factor: 1

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Right Check	Fixed	4233	846.6	20.0	<b>0.368</b>	-0.11	+/- 0.21	1.6
Right Title	Fixed	4233	846.6	20.0	0.203	0.08		
Left Check	Fixed	4233	846.6	20.0	0.332	0.15		
Left Title	Fixed	4233	846.6	20.0	0.251	-0.09		

Remarks: For SAR testing, EUT is in GSM link mode. In GSM850/1900 link mode, its crest factor is 1. (Duty cycle: 1:1)

**Body Position mode(Body Worn): EUT Configuration 5&6  
WCDMA BandII& BandV**

Date of Measurement: August 1, 2012 &amp; August 2, 2012

Test mode: <b>WCDMA BandII</b> EUT Configuration 5:UP								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	9400	1880	20.0	0.351	0.09	+/-0.21	1.6
Test mode: <b>WCDMA BandII</b> EUT Configuration 6:Down								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	9400	1880	20.0	<b>0.582</b>	0.03	+/-0.21	1.6
Test mode: <b>WCDMA BandV</b> EUT Configuration 5:UP								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	4233	846.6	20.0	0.398	-0.08	+/-0.21	1.6
Test mode: <b>WCDMA BandV</b> EUT Configuration 6:Down								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	4233	846.6	20.0	<b>0.681</b>	-0.07		
Remarks: For SAR testing, In GSM link mode, its crest factor is 1. (Duty cycle: 1:1); In GPRS link mode, its crest factor is 1. (Duty cycle: 1:)								

**Head Position mode(802.11b): EUT Configuration 1&2&3&4** Date of Measurement: August 3, 2012Test mode: **802.11b**, Duty Cycle: 100%, Crest Factor: 1

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Right Check	Fixed	6	2437	20.0	<b>0.334</b>	0.06	+/- 0.21	1.6
Right Title	Fixed	6	2437	20.0	0.301	0.08		
Left Check	Fixed	6	2437	20.0	0.313	-0.13		
Left Title	Fixed	6	2437	20.0	0.286	-0.05		

Remarks: For SAR testing, EUT is in GSM link mode. In GSM850/1900 link mode, its crest factor is 1. (Duty cycle: 1:1)

**Body Position mode(Body Worn) 802.11 b: EUT Configuration 5&6**Test mode: **802.11b** EUT Configuration 5:UP

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	6	2437	20.0	0.322	-0.08	+/-0.21	1.6







Test mode: **802.11b** EUT Configuration 6:Down

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Flat(1.0cm)</b>	Fixed	6	2437	20.0	<b>0.389</b>	0.09	+/-0.21	1.6





## SAR Tested for Body(Hotspot):
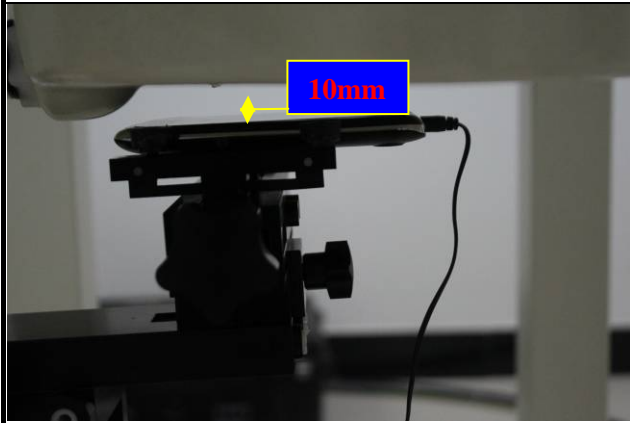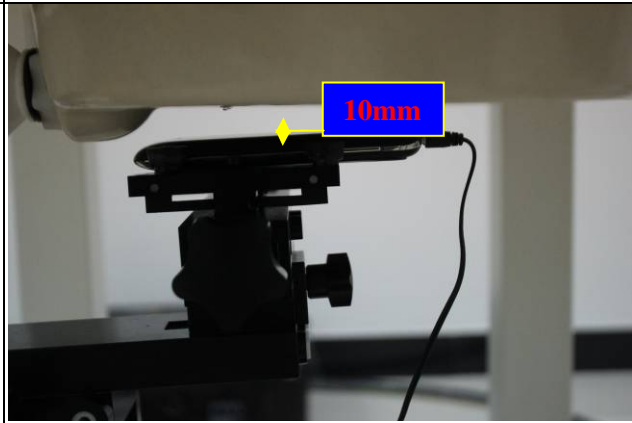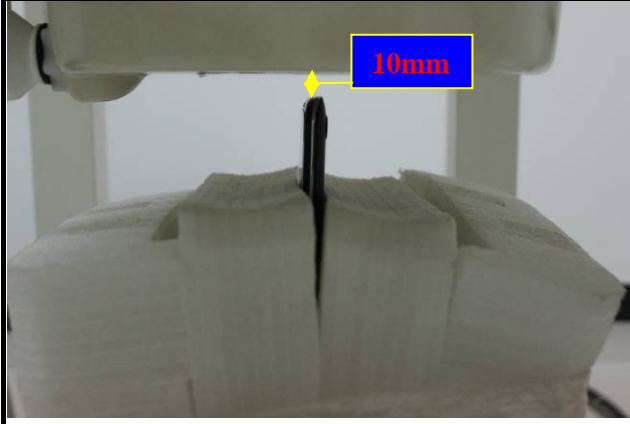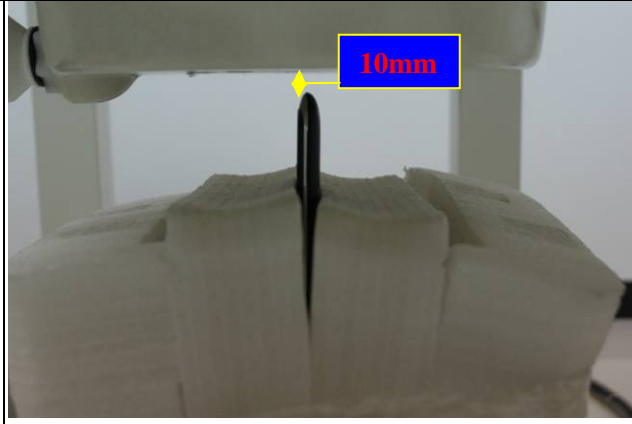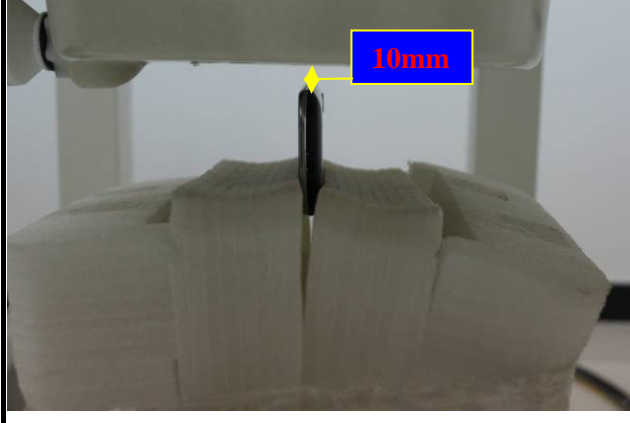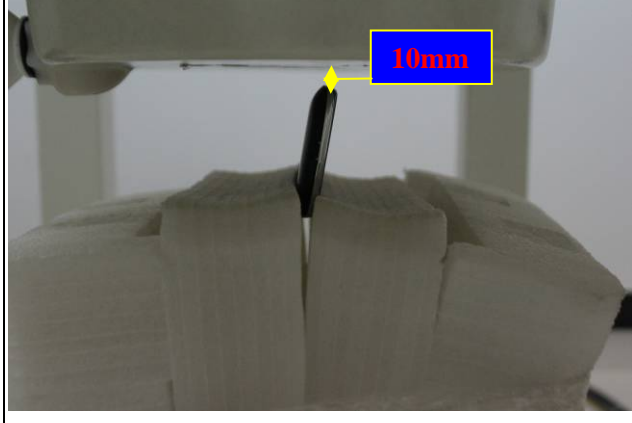
<p>Up face in body position</p> 	<p>Down face in body position</p> 
<p><b><u>EUT Setup Configuration 5</u></b></p>	<p><b><u>EUT Setup Configuration 6</u></b></p>
<p>Top side body position</p> 	<p>Bottom side body position</p> 
<p><b><u>UT Setup Configuration 7</u></b></p>	<p><b><u>EUT Setup Configuration 8</u></b></p>
<p>Right side body position</p> 	<p>Left side body position</p> 
<p><b><u>EUT Setup Configuration 9</u></b></p>	<p><b><u>EUT Setup Configuration 10</u></b></p>

**SAR Data for Body(Hotspot) :****Body Position mode(hotspot): EUT Configuration 5&6&8&9&10****GSM 850 & GPRS 850& EDGE 850**

Date of Measurement: August 1, 2012

Test mode: <b>GSM 850 hotspot</b>								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Up(1.0cm)</b>	Fixed	190	836.6	20.0	0.103	0.15	+/-0.21	1.6
<b>Down(1.0cm)</b>		190	836.6	20.0	0.148	0.11		
<b>Bottom(1.0cm)</b>		190	836.6	20.0	0.186	0.18		
<b>Right(1.0cm)</b>		190	836.6	20.0	0.147	-0.19		
<b>Left(1.0cm)</b>		190	836.6	20.0	<b>0.194</b>	-0.06		

Test mode: <b>GPRS850 CLASS 12 hotspot</b>								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Up(1.0cm)</b>	Fixed	190	836.6	20.0	0.127	0.08	+/-0.21	1.6
<b>Down(1.0cm)</b>		190	836.6	20.0	<b>0.192</b>	0.13		
<b>Bottom(1.0cm)</b>		190	836.6	20.0	0.142	-0.12		
<b>Right(1.0cm)</b>		190	836.6	20.0	0.121	-0.05		
<b>Left(1.0cm)</b>		190	836.6	20.0	0.124	0.06		

Test mode: <b>EDGE 850 CLASS 12 hotspot</b>								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Up(1.0cm)</b>	Fixed	190	836.6	20.0	0.103	-0.17	+/-0.21	1.6
<b>Down(1.0cm)</b>		190	836.6	20.0	<b>0.118</b>	-0.06		
<b>Bottom(1.0cm)</b>		190	836.6	20.0	0.111	0.09		
<b>Right(1.0cm)</b>		190	836.6	20.0	0.103	0.09		
<b>Left(1.0cm)</b>		190	836.6	20.0	0.107	0.13		

**GSM 1900 & GPRS 1900& EDGE 1900 hotspot**

Date of Measurement: August 2, 2012

Test mode: <b>GSM 1900 hotspot</b>								
EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
<b>Up(1.0cm)</b>	Fixed	661	1880	20.0	0.155	-0.03	+/-0.21	1.6
<b>Down(1.0cm)</b>		661	1880	20.0	<b>0.215</b>	0.19		
<b>Bottom(1.0cm)</b>		661	1880	20.0	0.204	-0.07		
<b>Right(1.0cm)</b>		661	1880	20.0	0.163	0.11		
<b>Left(1.0cm)</b>		661	1880	20.0	0.168	0.04		

Test mode: <b>GPRS 1900 CLASS 12 hotspot</b>								
EUT Setup Condition		Frequency		Liquid	SAR(1g)	Power	Drift	Limit



# Compliance Certification Services Inc.

Report No: KS120725A02-SF

FCCID: WA6S735

Date of Issue :August 5, 2012

Position	Antenna	Channel	MHz	Temp [°C]	(W/kg)	Drift	Limit (dB)	(W/kg)
Up(1.0cm)	Fixed	661	1880	20.0	0.118	0.15	+/-0.21	1.6
Down(1.0cm)		661	1880	20.0	<b>0.235</b>	0.13		
Bottom(1.0cm)		661	1880	20.0	0.208	-0.12		
Right(1.0cm)		661	1880	20.0	0.193	0.06		
Left(1.0cm)		661	1880	20.0	0.183	0.12		

**Test mode: EDGE1900 CLASS 12 hotspot**

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Up(1.0cm)	Fixed	661	1880	20.0	0.133	0.12	+/-0.21	1.6
Down(1.0cm)		661	1880	20.0	<b>0.227</b>	0.06		
Bottom(1.0cm)		661	1880	20.0	0.203	-0.18		
Right(1.0cm)		661	1880	20.0	0.187	0.08		
Left(1.0cm)		661	1880	20.0	0.141	0.13		

**WCDMA Band II & WCDMA Band V hotspot**

Date of Measurement: August 1, 2012 & August 2, 2012

**Test mode: WCDMA Band II hotspot**

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Up(1.0cm)	Fixed	9400	1880	20.0	0.233	0.11	+/-0.21	1.6
Down(1.0cm)		9400	1880	20.0	<b>0.404</b>	0.03		
Bottom(1.0cm)		9400	1880	20.0	0.375	0.08		
Right(1.0cm)		9400	1880	20.0	0.316	-0.02		
Left(1.0cm)		9400	1880	20.0	0.304	-0.04		

**Test mode: WCDMA Band V hotspot**

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					
Up(1.0cm)	Fixed	4233	846.6	20.0	0.204	0.11	+/-0.21	1.6
Down(1.0cm)		4233	846.6	20.0	<b>0.384</b>	0.07		
Bottom(1.0cm)		4233	846.6	20.0	0.372	0.06		
Right(1.0cm)		4233	846.6	20.0	0.338	-0.15		
Left(1.0cm)		4233	846.6	20.0	0.324	-0.03		

**Body Position mode(hotspot): EUT Configuration 5&6&7&10**

**802.11 b**

Date of Measurement: August 3, 2012

**Test mode: 802.11 b**

EUT Setup Condition		Frequency		Liquid Temp [°C]	SAR(1g) (W/kg)	Power Drift	Drift Limit (dB)	Limit (W/kg)
Position	Antenna	Channel	MHz					



# Compliance Certification Services Inc.

Report No: KS120725A02-SF

FCCID: WA6S735

Date of Issue :August 5, 2012

<b>Up</b> (1.0cm)	Fixed	6	2437	20.0	0.351	0.05	+/- 0.21	1.6
<b>Down</b> (1.0cm)		6	2437	20.0	<b>0.472</b>	-0.03		
<b>Top</b> (1.0cm)		6	2437	20.0	0.382	-0.02		
<b>Left</b> (1.0cm)		6	2437	20.0	0.311	0.03		



## 12. EUT PHOTO















## 13. EQUIPMENT LIST & CALIBRATION STATUS

Name of Equipment	Manufacturer	Type/Model	Serial Number	Calibration Due
P C	HP	Core(rm)3.16G	CZCO48171H	N/A
Signal Generator	Agilent	E8257C	MY43321570	05/12/2013
S-Parameter Network Analyzer	Agilent	E5071B	MY42301382	03/11/2013
Wireless Communication Test Set	R&S	CMU200	SN:B23-03291	05/12/2013
Power Meter	Agilent	E4416A	QB41292714	03/16/2013
Peak & Average sensor	Agilent	E9327A	CF0001	03/16/2013
E-field PROBE	SPEAG	EX3DV4	3755	01/20/2013
DIPOLE 835MHZ ANTENNA	SPEAG	D835V2	4d114	01/10/2013
DIPOLE 1800MHZ ANTENNA	SPEAG	D1800V2	2d170	01/26/2013
DIPOLE 1900MHZ ANTENNA	SPEAG	D1900V2	5d136	01/05/2013
DIPOLE 2450MHZ ANTENNA	SPEAG	D2450V2	817	01/26/2013
DIPOLE 2000MHZ ANTENNA	SPEAG	D2000V2	1041	01/12/2013
DIPOLE 5000MHZ ANTENNA	SPEAG	D5GHzV2	1095	12/25/2012
DUMMY PROBE	SPEAG	DP_2	SPDP2001AA	N/A
SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA001BB	1102	N/A
Twin SAM Phantom	SPEAG	QD000P40CD	1609	N/A
ROBOT	SPEAG	TX60	F10/5E6AA1/A101	N/A
ROBOT KRC	SPEAG	CS8C	F10/5E6AA1/C101	N/A
LIQUID CALIBRATION KIT	ANTENNESSA	41/05 OCP9	00425167	N/A
DAE	SD000D04BJ	DEA4	1245	01/11/2013



## 14. FACILITIES

All measurement facilities used to collect the measurement data are located at

No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.

## 15. REFERENCES

- [1] Federal Communications Commission, "Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, "Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, Office of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, "Automated E-field scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph Kastle, and Thomas Schmid, "Dosimetric evaluation of mobile communications equipment with known precision", IEEE Transactions on Communications, vol. E80-B, no. 5, pp. 645{652, May 1997.
- [5] CENELEC, "Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz - 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, "Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM '97, Dubrovnik, October 15{17, 1997, pp. 120{124.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, "E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23{25 June, 1996, pp. 172{175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard Kuhn, and Niels Kuster, "The dependence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865{1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, "The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, "The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, "Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10



## 16. ATTACHMENTS

Exhibit	Content
1	System Performance Check Plots
2	SAR Test Plots
3	Probe calibration report EX3DV4 SN3755
4	Dipole calibration report D835V2 SN:4d114
5	Dipole calibration report D1900V2-SN:5d136
6	Dipole calibration report D2450V2 SN: 817
7	DAE calibration report DEA4 SD000D04BJ SN: 1245



## APPENDIX A: PLOTS OF PERFORMANCE CHECK

The plots are showing as followings.





Test Laboratory: Compliance Certification Services Inc.

## System Performance Head Check-D850\_2012.08.01

DUT: Dipole 850 MHz D835V2; Type: D835V2; SN:4d114

Communication System: CW; Frequency: 850 MHz

Medium parameters used:  $f = 850$  MHz;  $\sigma = 0.92$  mho/m;  $\epsilon_r = 41.58$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(8.99, 8.99, 8.99); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.362mW/g

### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.952 V/m; Power Drift = 0.00052 dB

Peak SAR (extrapolated) = 3.625W/kg

**SAR(1 g) = 2.41 mW/g; SAR(10 g) = 1.58 mW/g**

Maximum value of SAR (measured) =3.374 mW/g

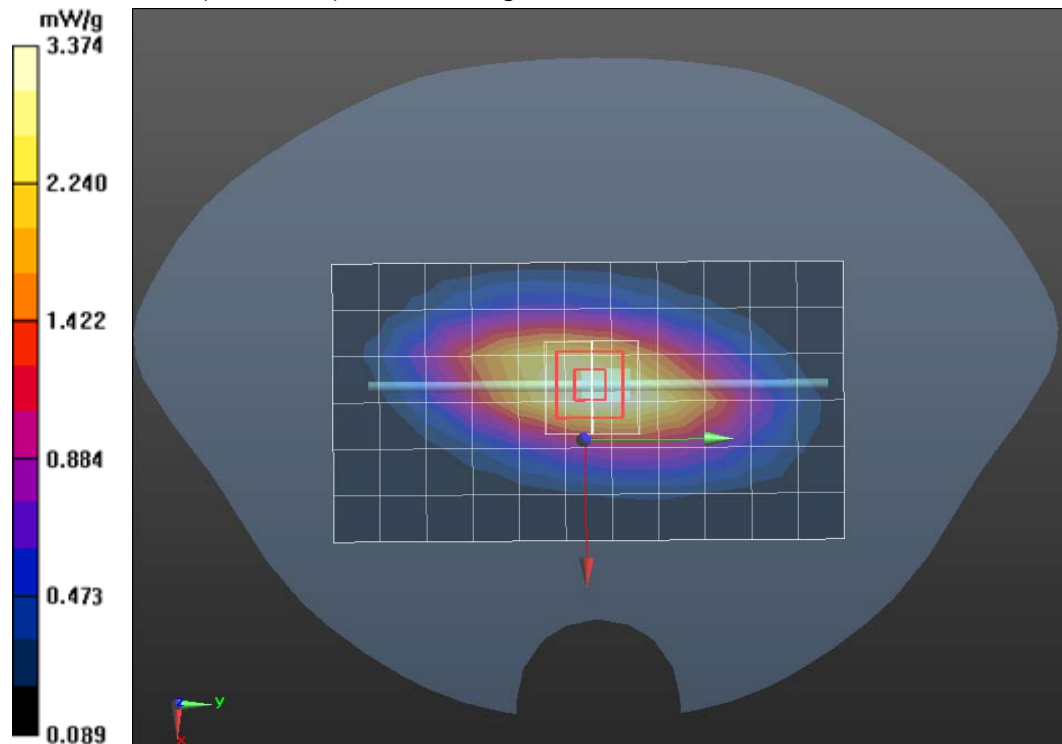



Test Laboratory: Compliance Certification Services Inc.

## System Performance Body Check-D850\_2012.08.01

DUT: Dipole 850 MHz D835V2; Type: D835V2; SN:4d114

Communication System: CW; Frequency: 850 MHz

Medium parameters used:  $f = 850$  MHz;  $\sigma = 0.98$  mho/m;  $\epsilon_r = 55.84$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(9.07, 9.07, 9.07); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609

Measurement SW: DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Area Scan (7x12x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.127mW/g

### System Performance Check at Frequencies below 1 GHz/d=15mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.83 V/m; Power Drift = 0.0021 dB

Peak SAR (extrapolated) = 3.624 W/kg

**SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.62 mW/g**

Maximum value of SAR (measured) = 3.392 mW/g

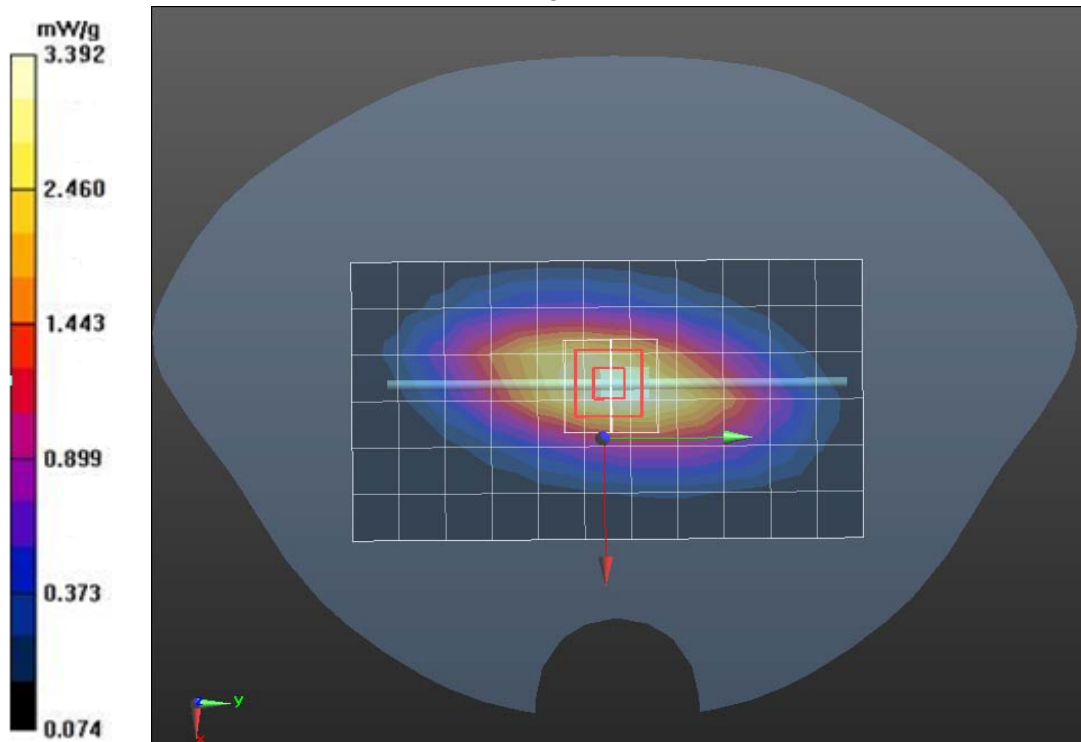



Test Laboratory: Compliance Certification Services Inc.

## System Performance Head Check-D1900\_2012.08.02

**DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d136**

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 40.31$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.84, 7.84, 7.84); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: SAM1; Type: SAM; Serial: 1609
- Measurement SW: DASYS2 52.8.0(692); SEMCAD X 14.6.4(4989)

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe) 2/Area Scan (7x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 11.897 mW/g

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe) 2/Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 97.57 V/m; Power Drift = 0.0032 dB

Peak SAR (extrapolated) = 16.572 W/kg

**SAR(1 g) = 10.04 mW/g; SAR(10 g) = 5.32 mW/g**

Maximum value of SAR (measured) = 12.141 mW/g

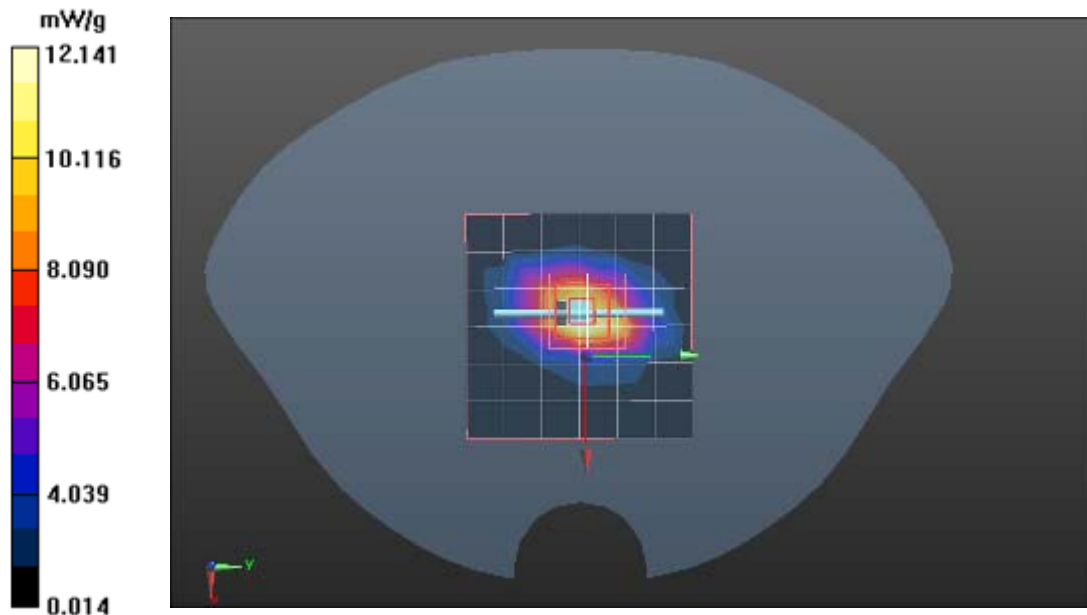



Test Laboratory: Compliance Certification Services Inc.

## System Performance Body Check-D1900\_2012.08.02

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d136

Communication System: CW; Frequency: 1900 MHz

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.54$  mho/m;  $\epsilon_r = 54.33$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.23, 7.23, 7.23); Calibrated: 1/20/2012
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: SAM1; Type: SAM; Serial: 1609
- Measurement SW: DASY52 52.8.0(692); SEMCAD X 14.6.4(4989)

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe) 2/Area Scan (7x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 12.533mW/g

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=xx mW, dist=3.0mm (EX-Probe) 2/Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 102.5V/m; Power Drift = 0.0001 dB

Peak SAR (extrapolated) = 16.529 W/kg

**SAR(1 g) = 9.97 mW/g; SAR(10 g) = 5.18 mW/g**

Maximum value of SAR (measured) = 12.839mW/g

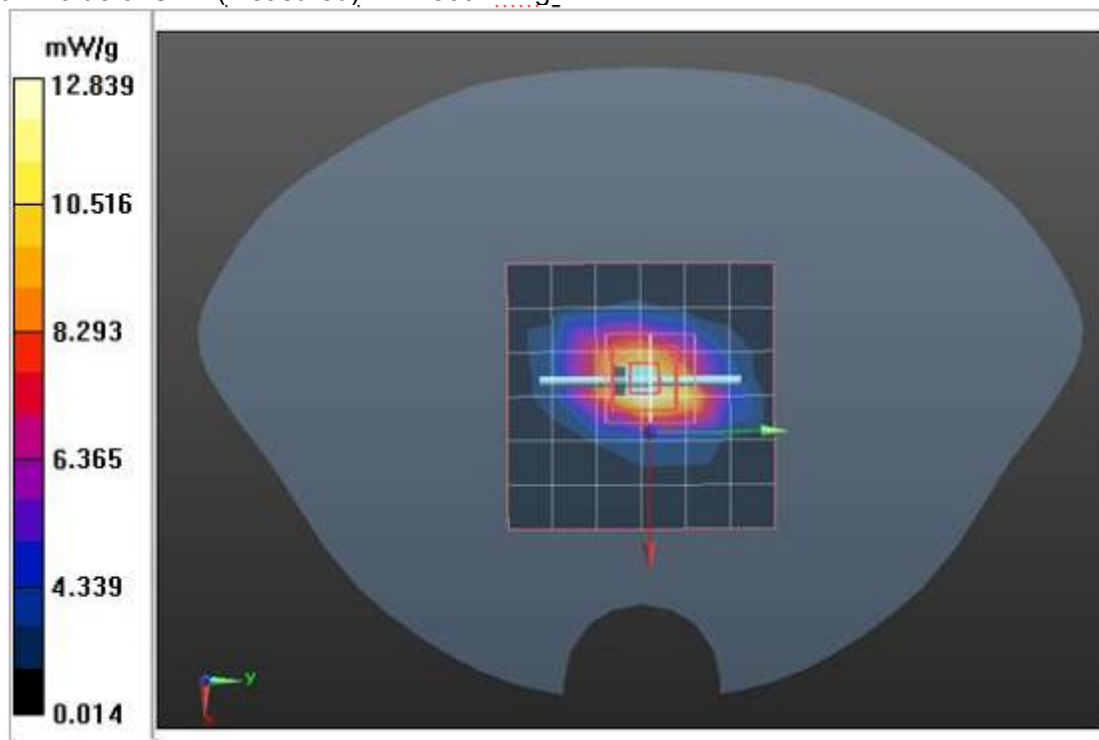



Test Laboratory: Compliance Certification Services Inc.

## System Performance Head Check-D2450-2012.08.03

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; SN:817**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.82$  mho/m;  $\epsilon_r = 41.12$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.07, 7.07, 7.07); Calibrated: 1/20/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: Twin SAM Phantom; Type: QD 000 P40 CD; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Area Scan(7x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 17.715mW/g

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe)/Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.55 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 26.475 W/kg

**SAR(1 g) = 13.64 mW/g; SAR(10 g) = 6.30 mW/g**

Maximum value of SAR (measured) = 16.954 mW/g

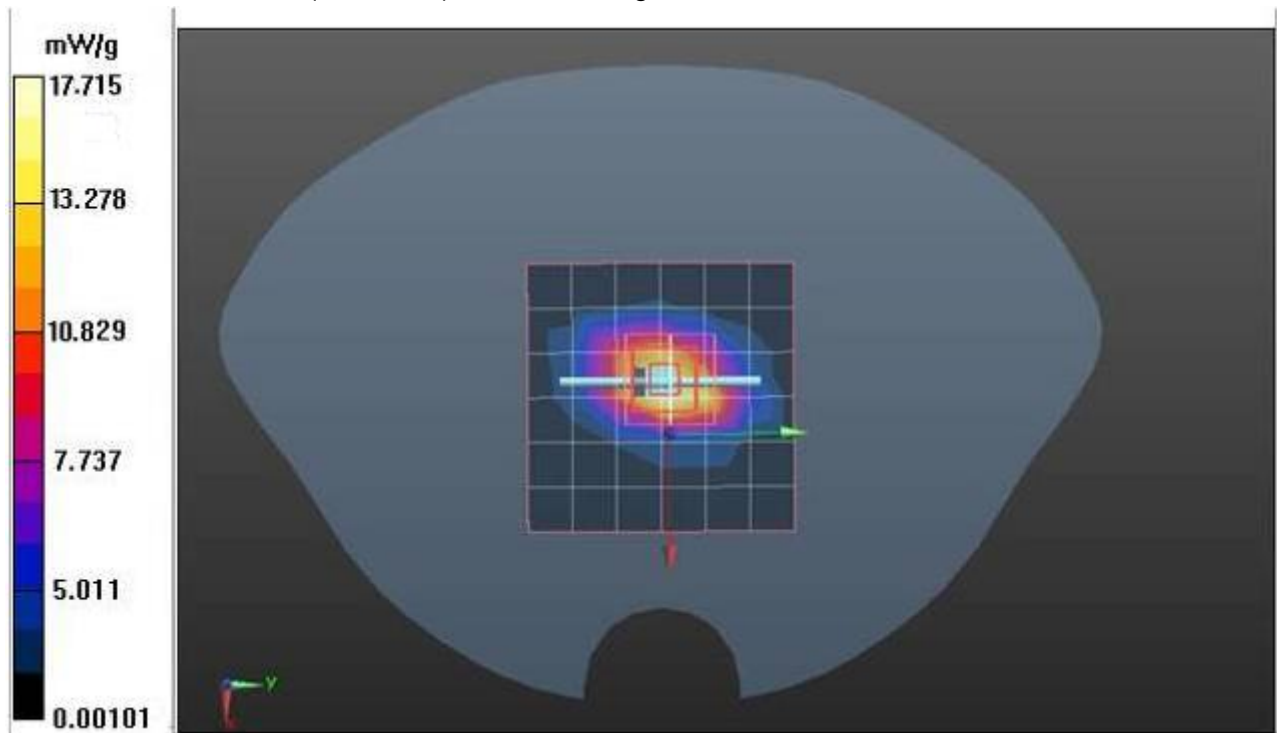



Test Laboratory: Compliance Certification Services Inc.

## System Performance Body Check-D2450-2012.08.03

**DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; SN:817**

Communication System: CW; Frequency: 2450 MHz

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.96$  mho/m;  $\epsilon_r = 53.52$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: EX3DV4 - SN3755; ConvF(7.06, 7.06, 7.06); Calibrated: 1/20/2012
- Sensor-Surface: 3mm (Mechanical Surface Detection),
- Electronics: DAE4 Sn1245; Calibrated: 1/11/2012
- Phantom: SAM1; Type: SAM; Serial: 1609
- Measurement SW: DASYS 52.8.0(692); SEMCAD X 14.6.4(4989)

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe) 2/Area Scan (7x7x1):

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 18.729mW/g

### System Performance Check at Frequencies above 1 GHz/d=10mm, Pin=250 mW, dist=3.0mm (EX-Probe) 2/Zoom Scan (7x7x7) /Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 101.55 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 27.671 W/kg

**SAR(1 g) = 13.09 mW/g; SAR(10 g) = 6.17 mW/g**

Maximum value of SAR (measured) = 17.409 mW/g

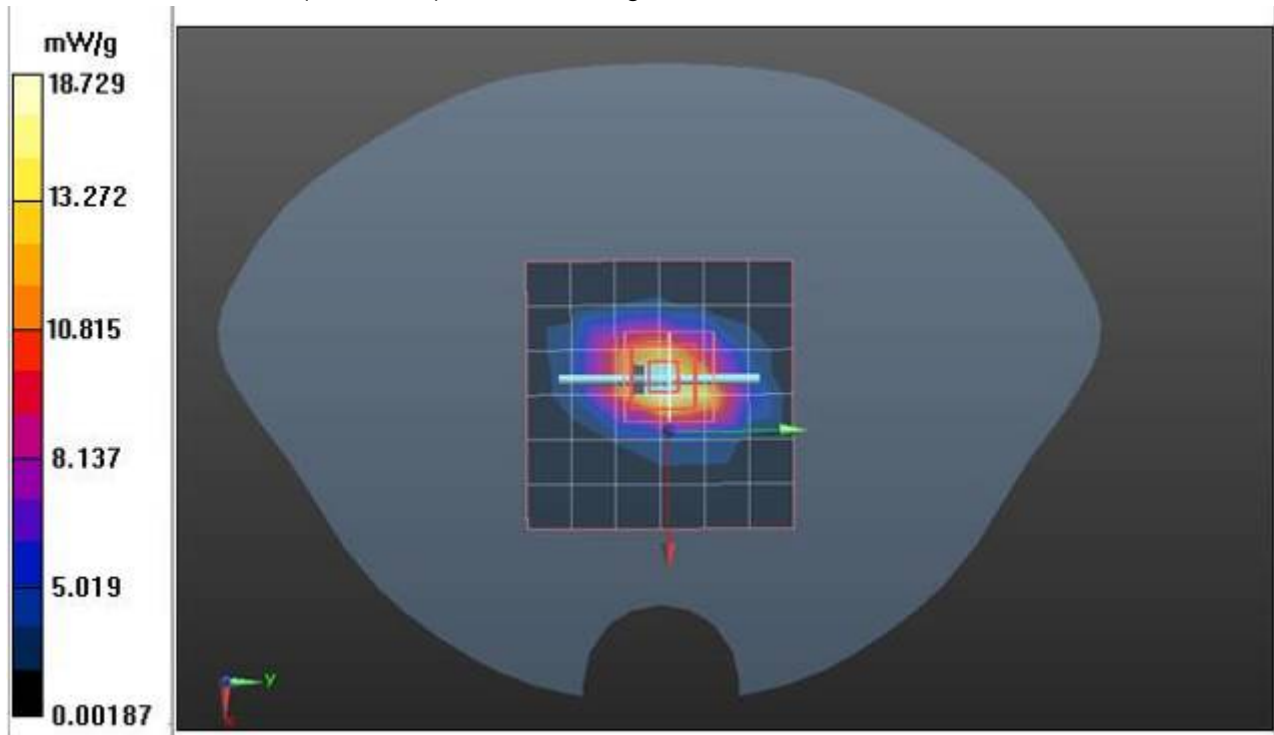





**APPENDIX B: DASY CALIBRATION CERTIFICATE**

The DASY Calibration Certificates are showing as followings .



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **CCS (Auden)**Certificate No: **D835V2-4d114\_Jan11**

## CALIBRATION CERTIFICATE

Object **D835V2 - SN: 4d114**

Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits**

Calibration date: **January 10, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Name: Jeton Kasirati, Function: Laboratory Technician, Signature: [Signature]**

Approved by: **Name: Katja Pokovic, Function: Technical Manager, Signature: [Signature]**

Issued: January 10, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D835V2-4d114\_Jan11

Page 1 of 9



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.





## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V4.9	
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	835 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	41.3 $\pm$ 6 %	0.89 mho/m $\pm$ 6 %
Head TSL temperature during test	(21.0 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	2.38 mW / g
SAR normalized	normalized to 1W	9.52 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>9.57 mW /g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	1.55 mW / g
SAR normalized	normalized to 1W	6.20 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>6.23 mW /g <math>\pm</math> 16.5 % (k=2)</b>



## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	55.2	0.97 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	54.1 ± 6 %	0.99 mho/m ± 6 %
Body TSL temperature during test	(21.6 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	2.53 mW / g
SAR normalized	normalized to 1W	10.1 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>9.92 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	1.66 mW / g
SAR normalized	normalized to 1W	6.64 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>6.55 mW / g ± 16.5 % (k=2)</b>



## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.3 $\Omega$ - 2.6 $j\Omega$
Return Loss	- 29.5 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.6 $\Omega$ - 4.6 $j\Omega$
Return Loss	- 25.5 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1,400 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	June 29, 2010





## DASY5 Validation Report for Head TSL

Date/Time: 03.01.2011 14:35:06

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d114**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL900

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.89 \text{ mho/m}$ ;  $\epsilon_r = 40.9$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(6.03, 6.03, 6.03); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement


grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 57.3 V/m; Power Drift = 0.000428 dB

Peak SAR (extrapolated) = 3.59 W/kg


**SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.55 mW/g**

Maximum value of SAR (measured) = 2.56 mW/g

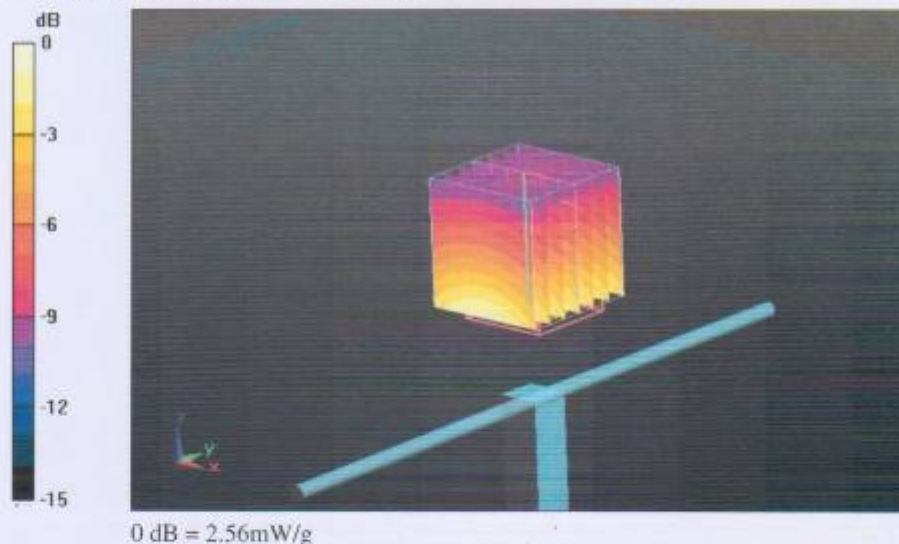



## Impedance Measurement Plot for Head TSL

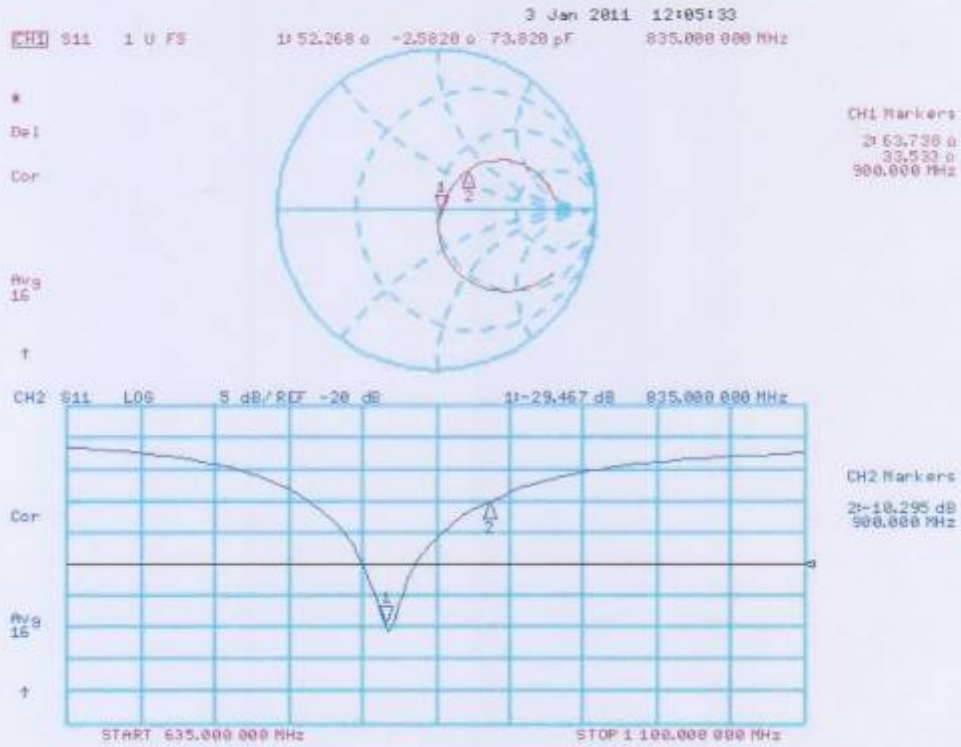



## DASY5 Validation Report for Body

Date/Time: 10.01.2011 10:33:12

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN:4d114**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL900

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.99 \text{ mho/m}$ ;  $\epsilon_r = 54.1$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY5 Configuration:


- Probe: ES3DV3 - SN3205; ConvF(5.86, 5.86, 5.86); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 4.9L; Type: QD000P49AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)

**Pin=250 mW /d=15mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement**  
grid: dx=5mm, dy=5mm, dz=5mm

Peak SAR (extrapolated) = 3.727 W/kg


**SAR(1 g) = 2.53 mW/g; SAR(10 g) = 1.66 mW/g**

Maximum value of SAR (measured) = 2.944 mW/g

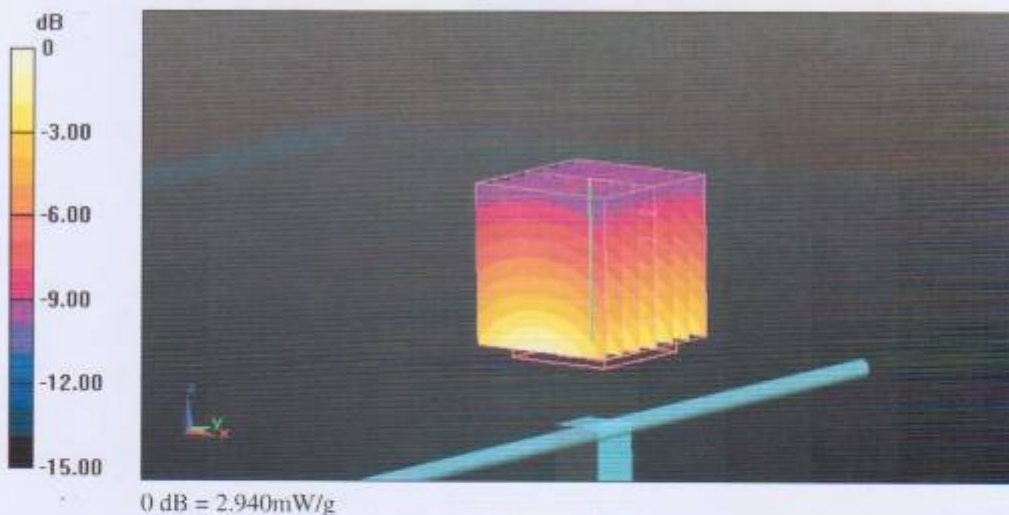



## Impedance Measurement Plot for Body TSL

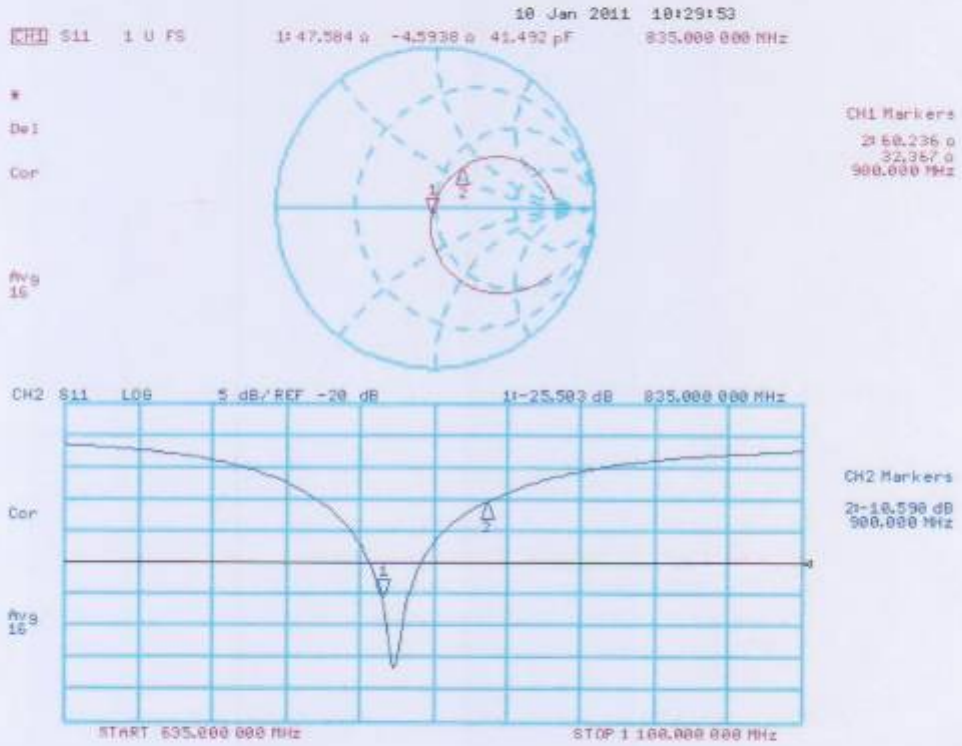






## DASY Calibration Certificate-Extended Dipole-835MHz Calibrations

According to KDB 450824 D02, Dipoles must be recalibrated at least once every three years; however, immediate re-calibration is required for the following conditions. The test laboratory must ensure that the required supporting information and documentation have been included in the SAR report to qualify for the extended 3-year calibration interval


- 1)When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification
- 2)When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5  $\Omega$  from the previous measurement

### Dipole Verification plot : D835V2 S/N:4d114

#### 835MHz for Head:

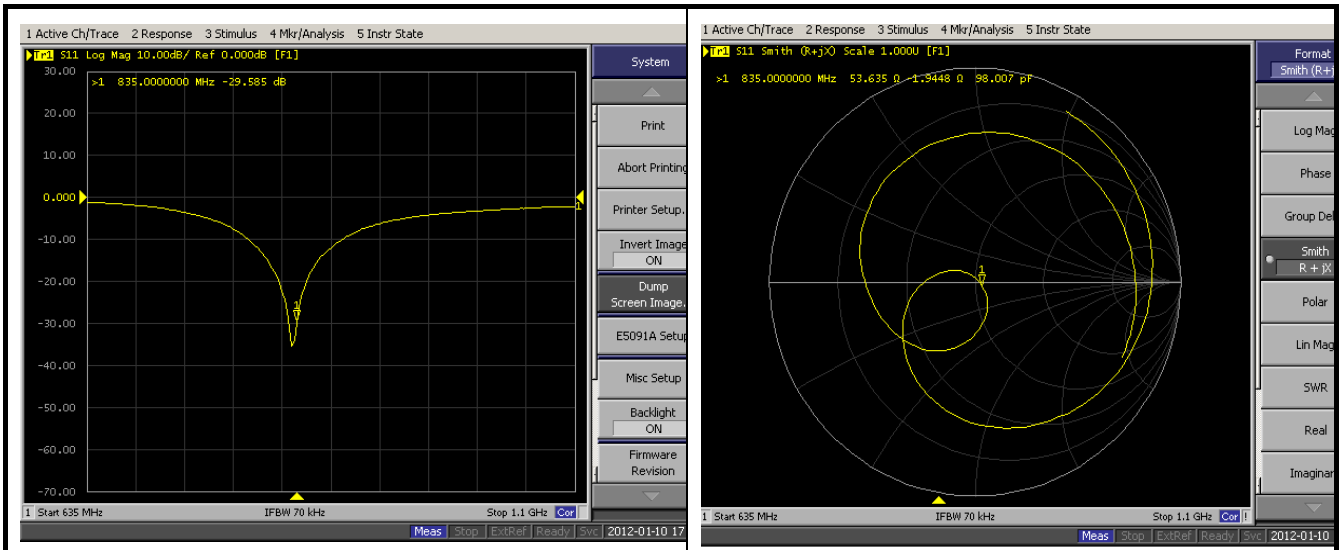

#### 835MHz for Body:

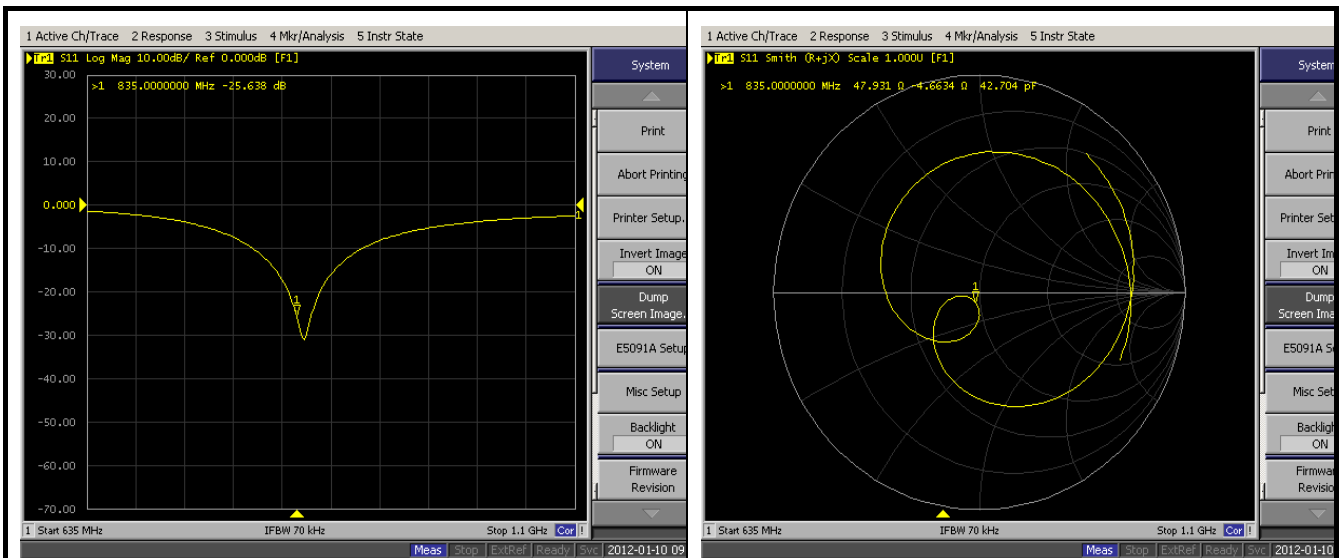



<b>D835V2 S/N:4d114 For HEAD</b>						
Return-Loss (dB)	Deviate (dB)	Real Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Imaginary Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Calibrate Date
-29.466	---	52.262	---	-2.5822	---	2012-01-10
-29.585	0.119	53.635	1.373	-1.9448	0.6374	2012-01-10
<b>D835V2 S/N:4d114 For BODY</b>						
Return-Loss (dB)	Deviate (dB)	Real Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Imaginary Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Calibrate Date
-25.505	---	47.585	---	-4.5941	---	2012-01-10
-25.638	0.133	47.931	0.346	-4.6634	0.0693	2012-01-10

According to up table, the return loss is <-20dB, deviates by less than 20% from the previous measurement ; the Real Impedance and Imaginary Impedance are all within 5  $\Omega$  compared to the previous measurement .

So, the verification result should extended calibration.





**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **CCS (Auden)**Certificate No: **D1900V2-5d136\_Jan11**

## CALIBRATION CERTIFICATE

Object **D1900V2 - SN: 5d136**Calibration procedure(s) **QA CAL-05.v8  
Calibration procedure for dipole validation kits**Calibration date: **January 05, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name <b>Jeton Kastrati</b>	Function Laboratory Technician	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Technical Manager	

Issued: January 5, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### Glossary:

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

#### Additional Documentation:

- DASY4/5 System Handbook

#### Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.





## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	1900 MHz ± 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.5 ± 6 %	1.43 mho/m ± 6 %
Head TSL temperature during test	(20.6 ± 0.2) °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	10.3 mW / g
SAR normalized	normalized to 1W	41.2 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	40.5 mW /g ± 17.0 % (k=2)

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	5.33 mW / g
SAR normalized	normalized to 1W	21.3 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	21.1 mW /g ± 16.5 % (k=2)



## Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	53.3	1.52 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.9 ± 6 %	1.56 mho/m ± 6 %
Body TSL temperature during test	(21.2 ± 0.2) °C	----	----

## SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	10.1 mW / g
SAR normalized	normalized to 1W	40.4 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>39.7 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	5.31 mW / g
SAR normalized	normalized to 1W	21.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>21.1 mW / g ± 16.5 % (k=2)</b>



## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	52.7 $\Omega$ + 8.2 j $\Omega$
Return Loss	- 21.5 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	47.2 $\Omega$ + 7.6 j $\Omega$
Return Loss	- 21.6 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.204 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	April 14, 2010



## DASY5 Validation Report for Head TSL

Date/Time: 04.01.2011 11:58:06

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d136**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.42$  mho/m;  $\epsilon_r = 38.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(5.09, 5.09, 5.09); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6 Build (401)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0: Measurement**  
grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.7 V/m; Power Drift = 0.035 dB

Peak SAR (extrapolated) = 18.9 W/kg

**SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.33 mW/g**

Maximum value of SAR (measured) = 12.9 mW/g

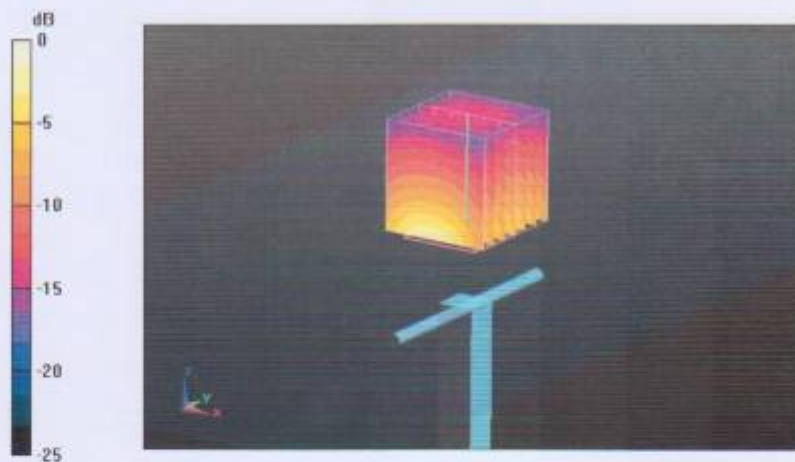


0 dB = 12.9mW/g





## Impedance Measurement Plot for Head TSL

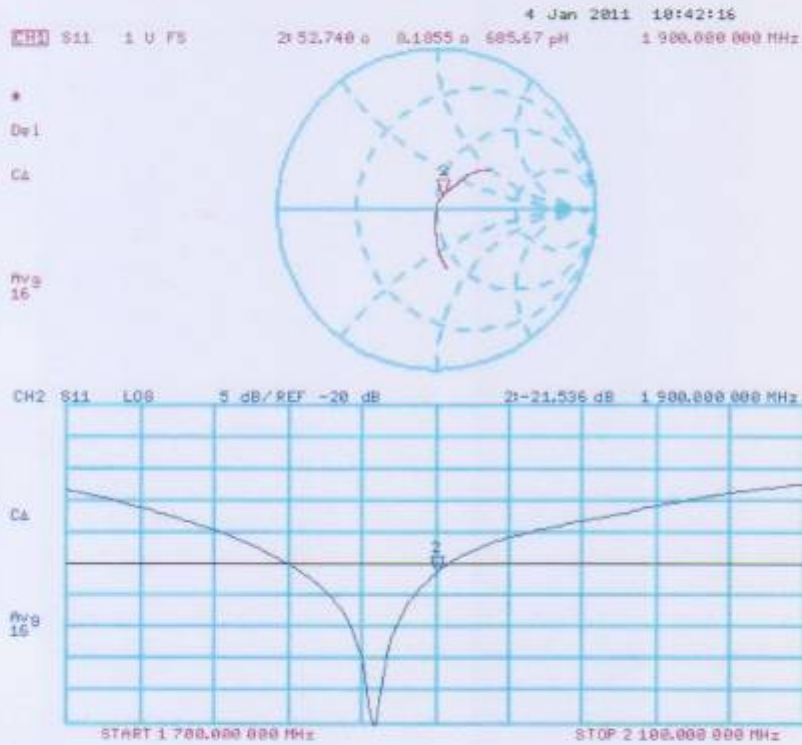



## DASY5 Validation Report for Body

Date/Time: 05.01.2011 10:43:48

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 1900 MHz; Type: D1900V2; Serial: D1900V2 - SN:5d136**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.56$  mho/m;  $\epsilon_r = 53$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.59, 4.59, 4.59); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6 Build (401)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.3 V/m; Power Drift = -0.054 dB

Peak SAR (extrapolated) = 17.3 W/kg

**SAR(1 g) = 10.1 mW/g; SAR(10 g) = 5.31 mW/g**


Maximum value of SAR (measured) = 12.8 mW/g

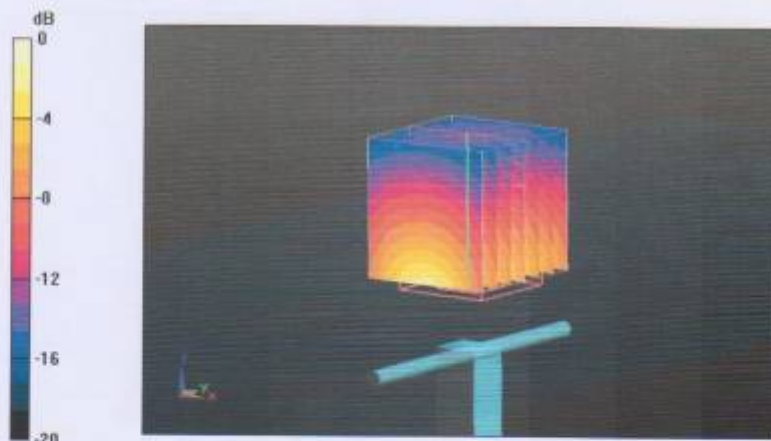

0 dB = 12.8mW/g



## Impedance Measurement Plot for Body TSL

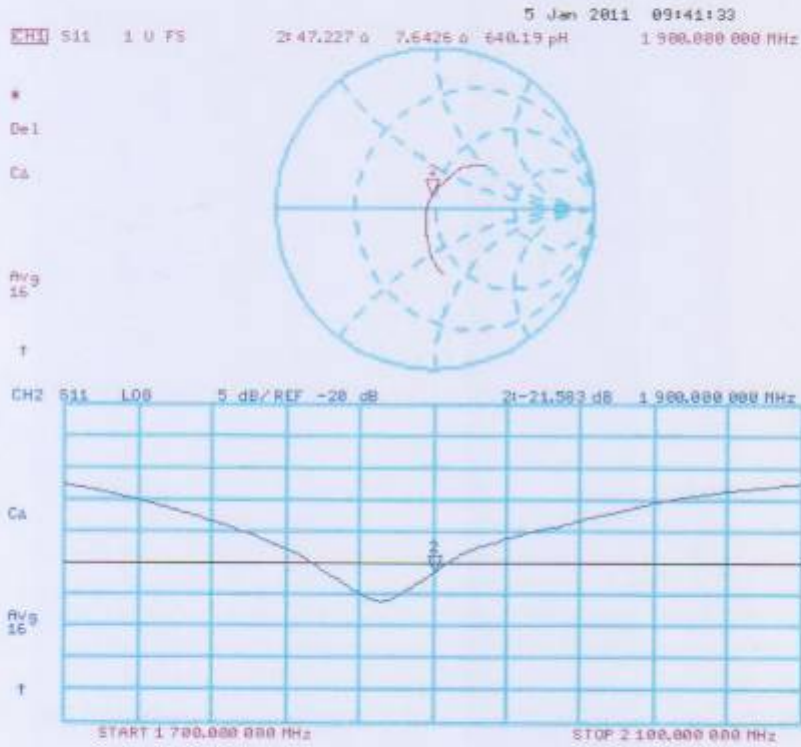




## DASY Calibration Certificate-Extended Dipole-1900MHz Calibrations

According to KDB 450824 D02, Dipoles must be recalibrated at least once every three years; however, immediate re-calibration is required for the following conditions. The test laboratory must ensure that the required supporting information and documentation have been included in the SAR report to qualify for the extended 3-year calibration interval


- 1)When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification
- 2)When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5  $\Omega$  from the previous measurement

### Dipole Verification plot : D1900V2-S/N:5d136

#### 1900MHz for Head:

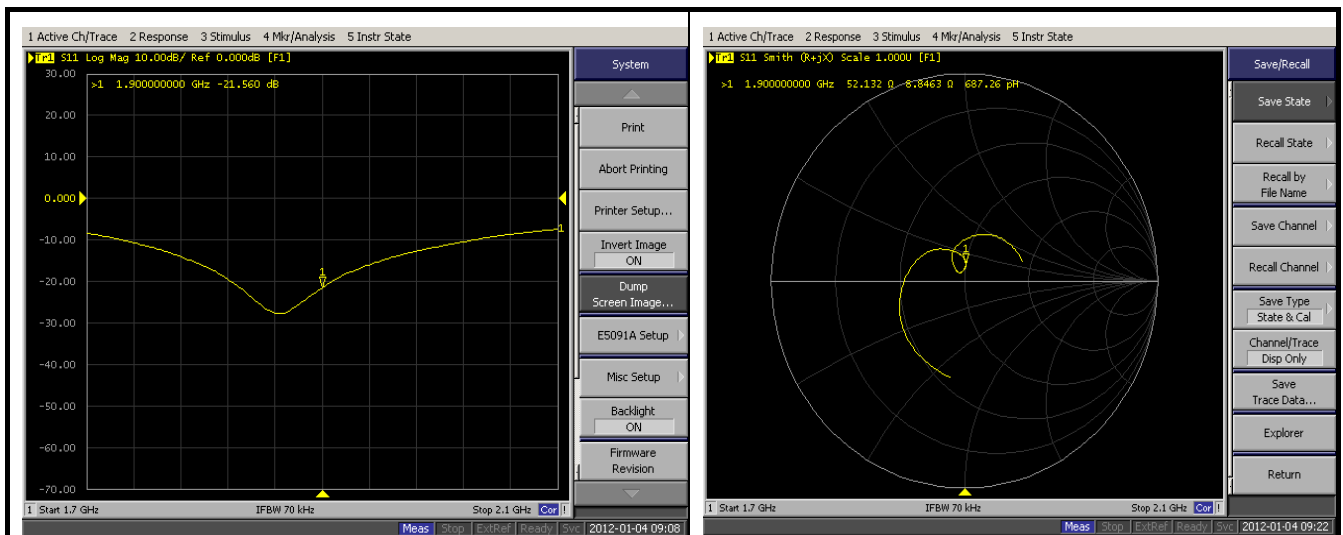

#### 1900MHz for Body:

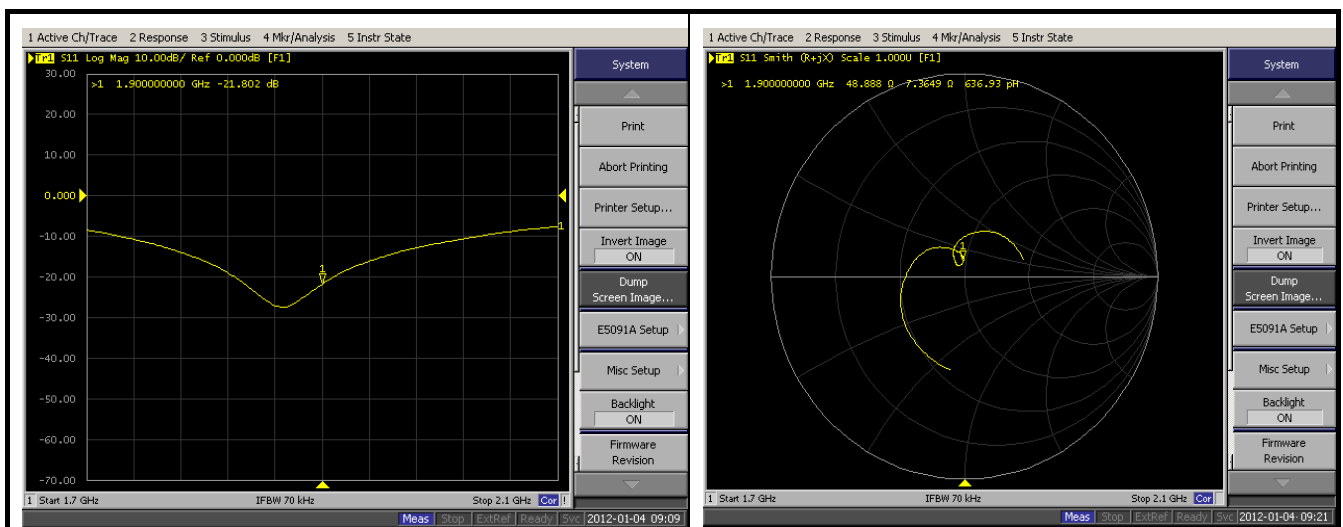



<b>D1900V2-S/N:5d136 For HEAD</b>						
Return-Loss (dB)	Deviate (dB)	Real Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Imaginary Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Calibrate Date
-21.536	---	52.740	---	8.1855	---	2012-01-04
-21.560	0.024	52.132	0.608	8.8463	0.6608	2012-01-04
<b>D1900V2-S/N:5d136 For BODY</b>						
Return-Loss (dB)	Deviate (dB)	Real Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Imaginary Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Calibrate Date
-21.583	---	47.227	---	7.6426	---	2012-01-05
-21.802	0.219	48.888	1.661	7.3649	0.2777	2012-01-04

According to up table, the return loss is <-20dB, deviates by less than 20% from the previous measurement ; the Real Impedance and Imaginary Impedance are all within 5  $\Omega$  compared to the previous measurement .

So, the verification result should extended calibration.





**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: **SCS 108**

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client: **CCS (Auden)**Certificate No: **D2450V2-817\_Jan11**

## CALIBRATION CERTIFICATE

Object: **D2450V2 - SN: 817**

Calibration procedure(s): **QA CAL-05.v8  
Calibration procedure for dipole validation kits**

Calibration date: **January 26, 2011**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature ( $22 \pm 3$ )°C and humidity < 70%.

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter EPM-442A	GB37480704	06-Oct-10 (No. 217-01266)	Oct-11
Power sensor HP 8481A	US37292783	06-Oct-10 (No. 217-01266)	Oct-11
Reference 20 dB Attenuator	SN: 5086 (20g)	30-Mar-10 (No. 217-01158)	Mar-11
Type-N mismatch combination	SN: 5047.2 / 06327	30-Mar-10 (No. 217-01162)	Mar-11
Reference Probe ES3DV3	SN: 3205	30-Apr-10 (No. ES3-3205_Apr10)	Apr-11
DAE4	SN: 601	10-Jun-10 (No. DAE4-601_Jun10)	Jun-11
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092317	18-Oct-02 (in house check Oct-09)	In house check: Oct-11
RF generator R&S SMT-06	100005	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by: **Dimce Iliev** (Name) / **Laboratory Technician** (Function) / *D. Iliev* (Signature)

Approved by: **Katja Pokovic** (Name) / **Technical Manager** (Function) / *K. Pokovic* (Signature)

Issued: January 27, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.





**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL tissue simulating liquid  
ConvF sensitivity in TSL / NORM x,y,z  
N/A not applicable or not measured

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- c) Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

### Additional Documentation:

- d) DASY4/5 System Handbook

### Methods Applied and Interpretation of Parameters:

- *Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- *Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- *Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- *Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- *SAR measured:* SAR measured at the stated antenna input power.
- *SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- *SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.



## Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY5	V52.6
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Zoom Scan Resolution	dx, dy, dz = 5 mm	
Frequency	2450 MHz $\pm$ 1 MHz	

## Head TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	37.9 $\pm$ 6 %	1.74 mho/m $\pm$ 6 %
Head TSL temperature during test	(20.5 $\pm$ 0.2) °C	----	----

## SAR result with Head TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	13.6 mW / g
SAR normalized	normalized to 1W	54.4 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>54.8 mW / g <math>\pm</math> 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	250 mW input power	6.33 mW / g
SAR normalized	normalized to 1W	25.3 mW / g
SAR for nominal Head TSL parameters	normalized to 1W	<b>25.3 mW / g <math>\pm</math> 16.5 % (k=2)</b>



### Body TSL parameters

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.96 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	52.5 ± 6 %	1.96 mho/m ± 6 %
Body TSL temperature during test	(20.8 ± 0.2) °C	----	----

### SAR result with Body TSL

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.3 mW / g
SAR normalized	normalized to 1W	53.2 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>52.9 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	250 mW input power	6.15 mW / g
SAR normalized	normalized to 1W	24.6 mW / g
SAR for nominal Body TSL parameters	normalized to 1W	<b>24.5 mW / g ± 16.5 % (k=2)</b>





## Appendix

### Antenna Parameters with Head TSL

Impedance, transformed to feed point	53.5 $\Omega$ + 3.4 j $\Omega$
Return Loss	- 26.6 dB

### Antenna Parameters with Body TSL

Impedance, transformed to feed point	48.9 $\Omega$ + 5.5 j $\Omega$
Return Loss	- 25.0 dB

### General Antenna Parameters and Design

Electrical Delay (one direction)	1.159 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

### Additional EUT Data

Manufactured by	SPEAG
Manufactured on	October 23, 2007



## DASY5 Validation Report for Head TSL

Date/Time: 24.01.2011 13:51:29

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:817**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U12 BB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.75$  mho/m;  $\epsilon_r = 38.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.53, 4.53, 4.53); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA; Serial: 1001
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 103.6 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 27.760 W/kg


**SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.33 mW/g**

Maximum value of SAR (measured) = 17.417 mW/g

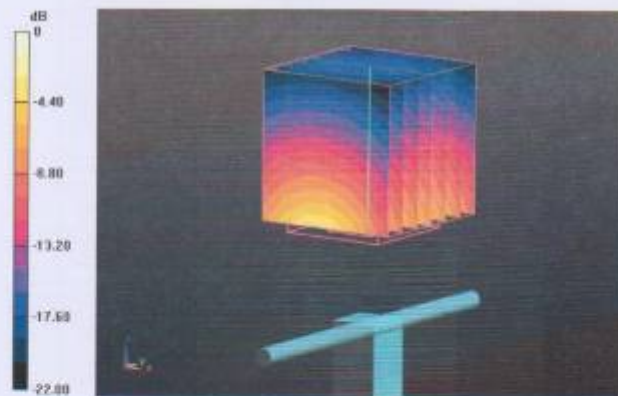



## Impedance Measurement Plot for Head TSL

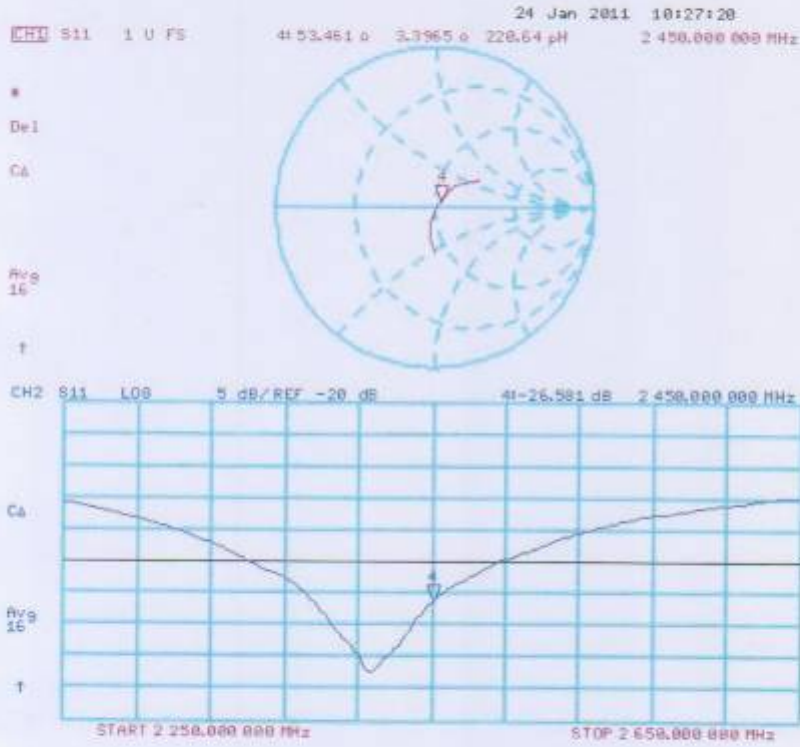





## DASY5 Validation Report for Body TSL

Date/Time: 26.01.2011 14:20:14

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:817**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U12 BB

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.97$  mho/m;  $\epsilon_r = 52.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

### DASY5 Configuration:

- Probe: ES3DV3 - SN3205; ConvF(4.31, 4.31, 4.31); Calibrated: 30.04.2010
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 10.06.2010
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA; Serial: 1002
- Measurement SW: DASY52, V52.6.1 Build (408)
- Postprocessing SW: SEMCAD X, V14.4.2 Build (2595)


**Pin=250 mW /d=10mm, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) /Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 96.826 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 27.854 W/kg  
**SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.15 mW/g**  
Maximum value of SAR (measured) = 17.412 mW/g

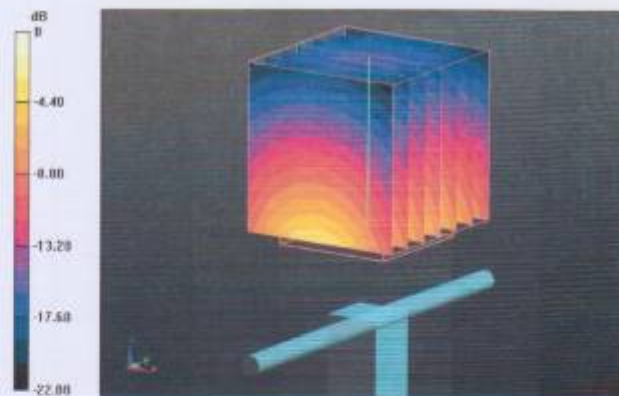

0 dB = 17.410mW/g



## Impedance Measurement Plot for Body TSL

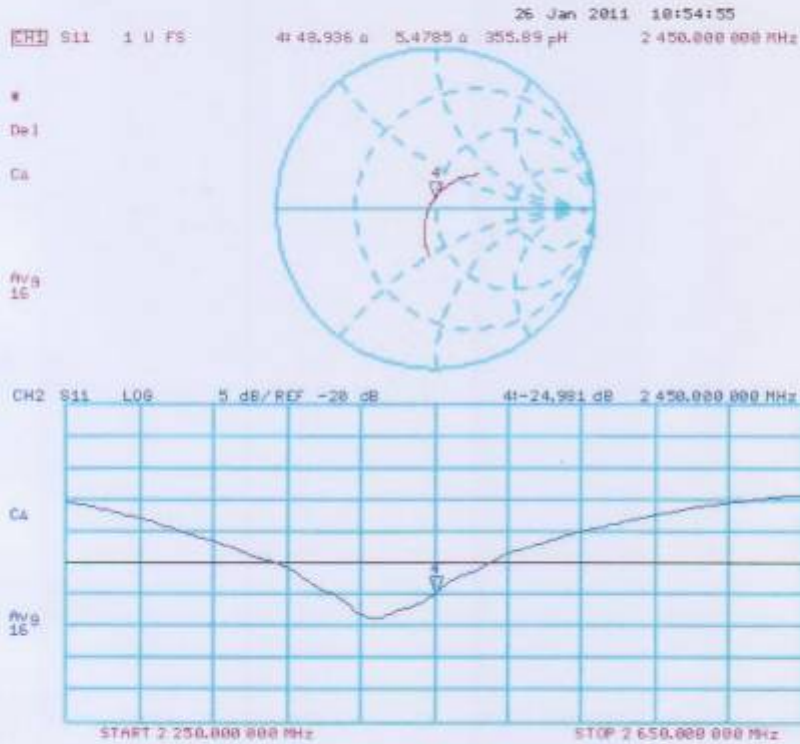




## DASY Calibration Certificate-Extended Dipole-2450MHz Calibrations

According to KDB 450824 D02, Dipoles must be recalibrated at least once every three years; however, immediate re-calibration is required for the following conditions. The test laboratory must ensure that the required supporting information and documentation have been included in the SAR report to qualify for the extended 3-year calibration interval


- 1)When the most recent return-loss, measured at least annually, deviates by more than 20% from the previous measurement (i.e. 0.2 of the dB value) or not meeting the required -20 dB return-loss specification
- 2)When the most recent measurement of the real or imaginary parts of the impedance, measured at least annually, deviates by more than 5  $\Omega$  from the previous measurement

### Dipole Verification plot : D2450V2 S/N: 817

#### 2450MHz for Head:

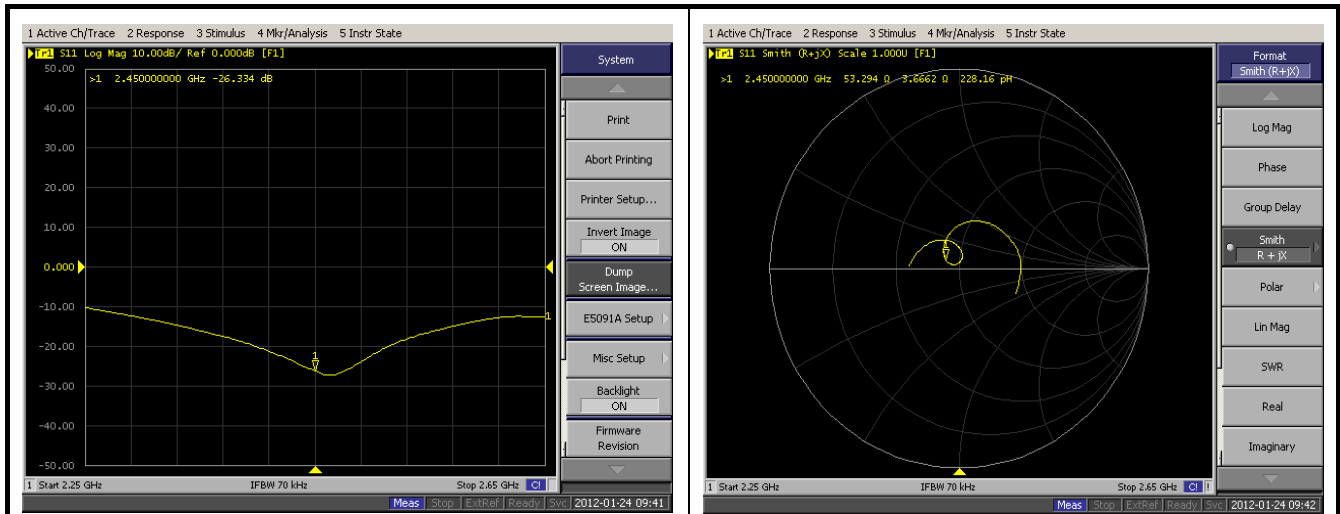

#### 2450MHz for Body:

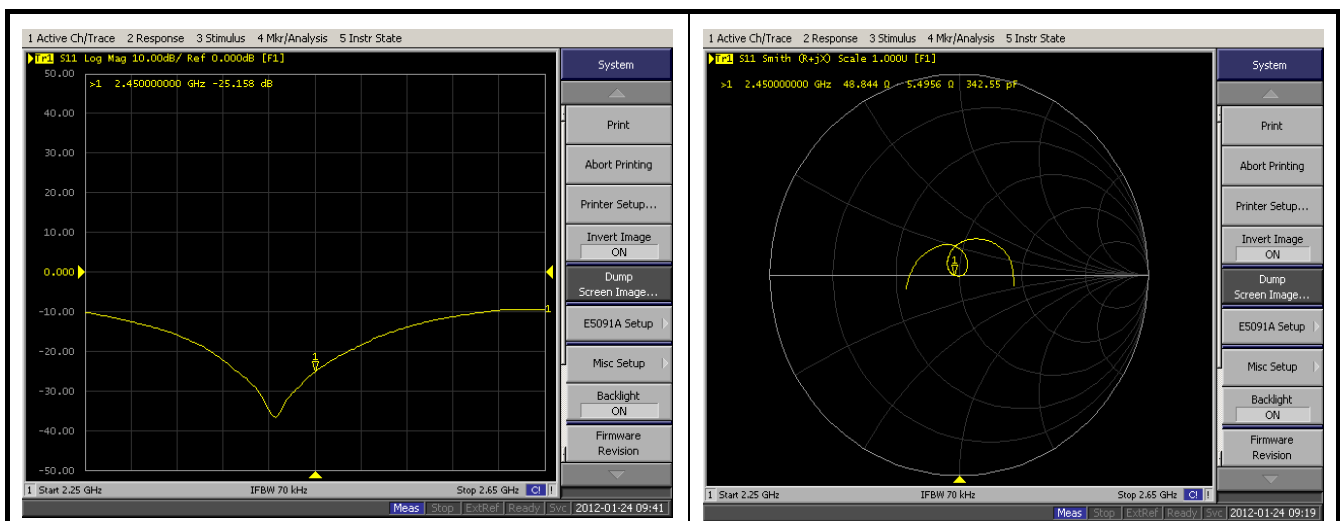



<b>D2450V2 S/N: 817 For HEAD</b>						
Return-Loss (dB)	Deviate (dB)	Real Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Imaginary Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Calibrate Date
-26.581	---	53.461	---	3.3965	---	2012-01-24
-26.334	0.247	53.294	0.167	3.6662	0.2697	2012-01-24
<b>D2450V2 S/N: 817 For BODY</b>						
Return-Loss (dB)	Deviate (dB)	Real Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Imaginary Impedance ( $\Omega$ )	Deviate ( $\Omega$ )	Calibrate Date
-24.981	---	48.936	---	5.4785	---	2012-01-26
-25.158	0.177	48.844	0.092	5.4956	0.0171	2012-01-24

According to up table, the return loss is  $<-20\text{dB}$ , deviates by less than 20% from the previous measurement ; the Real Impedance and Imaginary Impedance are all within  $5\ \Omega$  compared to the previous measurement .

So, the verification result should extended calibration.



Calibration Laboratory of  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **CCS (Auden)**Certificate No: **EX3-3755\_Jan12**

## CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3755**Calibration procedure(s): **QA CAL-01.v7, QA CAL-14.v3, QA CAL-23.v4 and QA CAL-25.v3  
Calibration procedure for dosimetric E-field probes**Calibration date: **January 20, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293674	1-Apr-11 (No. 217-01136)	Apr-12
Power sensor E4412A	MY41495277	1-Apr-11 (No. 217-01136)	Apr-12
Power sensor E4412A	MY41498087	1-Apr-11 (No. 217-01136)	Apr-12
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-11 (No. 217-01159)	Mar-12
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-11 (No. 217-01161)	Mar-12
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-11 (No. 217-01160)	Mar-12
Reference Probe ES3DV2	SN: 3013	29-Dec-11 (No. ES3-3013_Dec11)	Dec-12
DAE4	SN: 660	20-Apr-11 (No. DAE4-660_Apr11)	Apr-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-10)	In house check: Oct-12
Network Analyzer HP 8753E	US37390585	16-Oct-01 (in house check Oct-11)	In house check: Oct-12

Calibrated by:	Name: <b>Katja Pokovic</b>	Function: <b>Technical Manager</b>	Signature:
Approved by:	Name: <b>Niels Kuster</b>	Function: <b>Quality Manager</b>	Signature:

issued: January 20, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX3-3755\_Jan12

Page 1 of 11





**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

### Glossary:

TSL	tissue simulating liquid
NORM <sub>x,y,z</sub>	sensitivity in free space
ConvF	sensitivity in TSL / NORM <sub>x,y,z</sub>
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis

### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

### Methods Applied and Interpretation of Parameters:

- **NORM<sub>x,y,z</sub>**: Assessed for E-field polarization  $\theta = 0$  ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide). NORM<sub>x,y,z</sub> are only intermediate values, i.e., the uncertainties of NORM<sub>x,y,z</sub> does not effect the E<sup>2</sup>-field uncertainty inside TSL (see below ConvF).
- **NORM(f)<sub>x,y,z</sub> = NORM<sub>x,y,z</sub> \* frequency\_response** (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- **DCP<sub>x,y,z</sub>**: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- **A<sub>x,y,z</sub>; B<sub>x,y,z</sub>; C<sub>x,y,z</sub>; VR<sub>x,y,z</sub>; A, B, C** are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- **ConvF and Boundary Effect Parameters**: Assessed in flat phantom using E-field (or Temperature Transfer Standard for  $f \leq 800$  MHz) and inside waveguide using analytical field distributions based on power measurements for  $f > 800$  MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM<sub>x,y,z</sub> \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from  $\pm 50$  MHz to  $\pm 100$  MHz.
- **Spherical isotropy (3D deviation from isotropy)**: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.



EX3DV4 SN:3755

January 20, 2012

# Probe EX3DV4

## SN:3755

Manufactured: March 16, 2010  
Calibrated: January 20, 2012

Calibrated for DASY/EASY Systems

(Note: non-compatible with DASY2 system!)



EX3DV4 SN:3755

January 20, 2012

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3755

### Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu\text{V}/(\text{V}/\text{m})^2$ ) <sup>A</sup>	0.49	0.47	0.50	± 10.1%
DCP (mV) <sup>B</sup>	99.9	99.3	101.0	

### Modulation Calibration Parameters

UID	Communication System Name	PAR		A dB	B dBuV	C	VR mV	Unc <sup>F</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	157.0	± 2.4 %
			Y	0.00	0.00	1.00	147.8	
			Z	0.00	0.00	1.00	157.0	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>A</sup> The uncertainties of NormX, Y, Z do not affect the E<sup>2</sup>-field uncertainty inside TSL (see Pages 5 and 6).

<sup>B</sup> Numerical linearization parameter: uncertainty not required.

<sup>F</sup> Uncertainty is determined using the maximum deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 SN:3755

January 20, 2012

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3755

### Calibration Parameter Determined in Head Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>C</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	41.5 ± 5%	0.90 ± 5%	8.99	8.99	8.99	0.64	0.68 ± 11.0%
1750	± 50 / ± 100	40.1 ± 5%	1.36 ± 5%	8.18	8.18	8.18	0.74	0.63 ± 11.0%
1900	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	7.84	7.84	7.84	0.63	0.66 ± 11.0%
2000	± 50 / ± 100	40.0 ± 5%	1.40 ± 5%	7.78	7.78	7.78	0.45	0.80 ± 11.0%
2450	± 50 / ± 100	39.2 ± 5%	1.80 ± 5%	7.07	7.07	7.07	0.30	1.02 ± 11.0%
5200	± 50 / ± 100	36.0 ± 5%	4.67 ± 5%	4.64	4.64	4.64	0.40	1.80 ± 13.1%
5300	± 50 / ± 100	35.9 ± 5%	4.78 ± 5%	4.48	4.48	4.48	0.40	1.80 ± 13.1%
5500	± 50 / ± 100	35.6 ± 5%	4.96 ± 5%	4.45	4.45	4.45	0.45	1.80 ± 13.1%
5600	± 50 / ± 100	35.5 ± 5%	5.07 ± 5%	4.15	4.15	4.15	0.50	1.80 ± 13.1%
5800	± 50 / ± 100	35.3 ± 5%	5.28 ± 5%	4.31	4.31	4.31	0.45	1.80 ± 13.1%

<sup>C</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.





EX3DV4 SN:3755

January 20, 2012

## DASY/EASY - Parameters of Probe: EX3DV4 SN:3755

### Calibration Parameter Determined in Body Tissue Simulating Media

f [MHz]	Validity [MHz] <sup>c</sup>	Permittivity	Conductivity	ConvF X	ConvF Y	ConvF Z	Alpha	Depth Unc (k=2)
835	± 50 / ± 100	55.2 ± 5%	0.98 ± 5%	9.07	9.07	9.07	0.66	0.68 ± 11.0%
1750	± 50 / ± 100	53.4 ± 5%	1.49 ± 5%	7.48	7.48	7.48	0.91	0.60 ± 11.0%
1900	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.23	7.23	7.23	0.60	0.72 ± 11.0%
2000	± 50 / ± 100	53.3 ± 5%	1.52 ± 5%	7.31	7.31	7.31	0.58	0.74 ± 11.0%
2450	± 50 / ± 100	52.6 ± 5%	1.95 ± 5%	7.06	7.06	7.06	0.58	0.72 ± 11.0%
5200	± 50 / ± 100	49.0 ± 5%	5.29 ± 5%	4.02	4.02	4.02	0.50	1.90 ± 13.1%
5300	± 50 / ± 100	48.9 ± 5%	5.42 ± 5%	3.86	3.86	3.86	0.50	1.90 ± 13.1%
5500	± 50 / ± 100	48.6 ± 5%	5.66 ± 5%	3.62	3.62	3.62	0.55	1.90 ± 13.1%
5600	± 50 / ± 100	48.5 ± 5%	5.78 ± 5%	3.26	3.26	3.26	0.65	1.90 ± 13.1%
5800	± 50 / ± 100	48.2 ± 5%	6.00 ± 5%	3.78	3.78	3.78	0.60	1.90 ± 13.1%

<sup>c</sup> The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.






EX3DV4 SN:3755

January 20, 2012

## Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

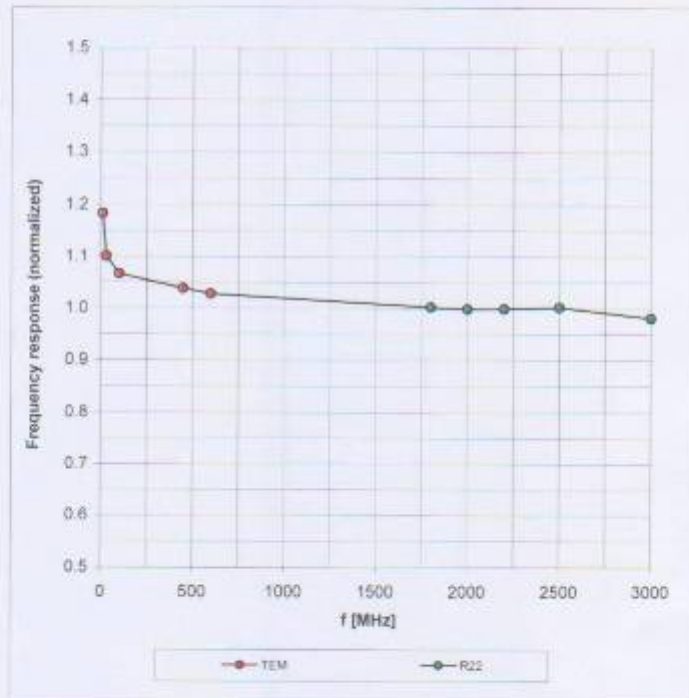



Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  ( $k=2$ )



EX3DV4 SN:3755

January 20, 2012

## Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

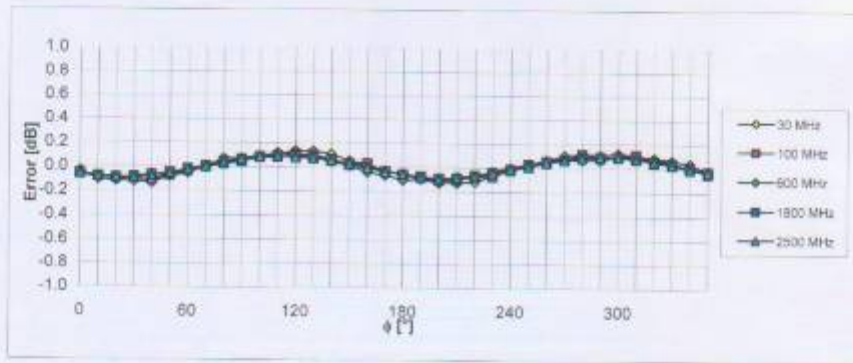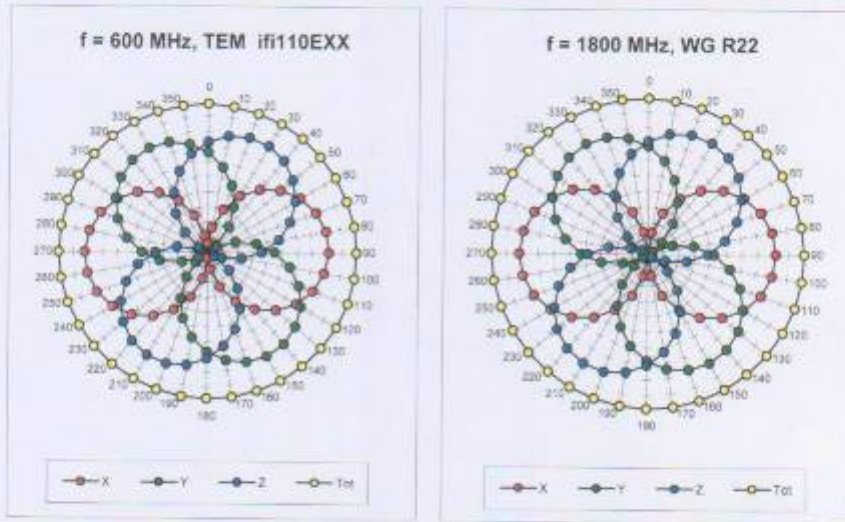



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)



EX3DV4 SN:3755

January 20, 2012

## Dynamic Range f(SAR<sub>head</sub>) (TEM cell, f = 900 MHz)

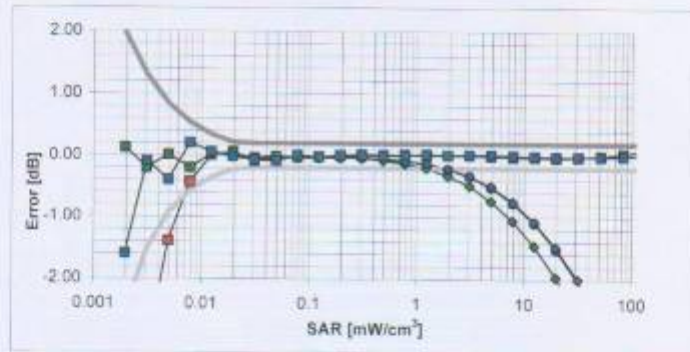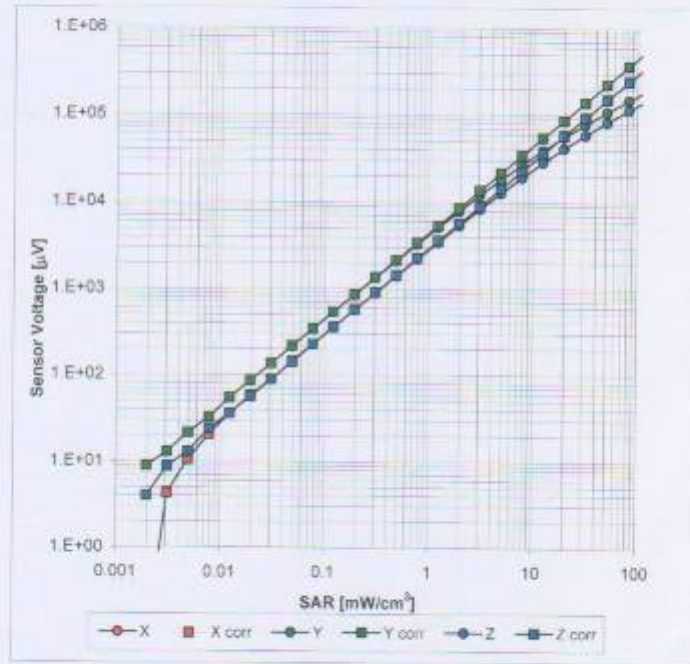



Uncertainty of Linearity Assessment:  $\pm 0.6\%$  (k=2)



EX3DV4 SN:3755


January 20, 2012

## Conversion Factor Assessment

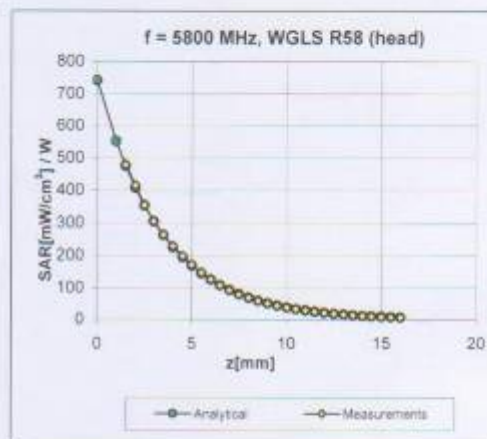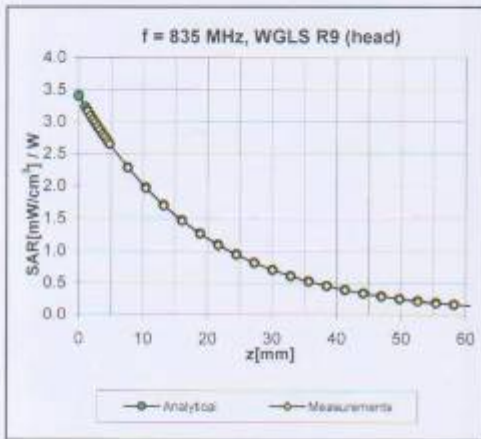

## Deviation from Isotropy in HSL

Error ( $\phi, \theta$ ), f = 900 MHz

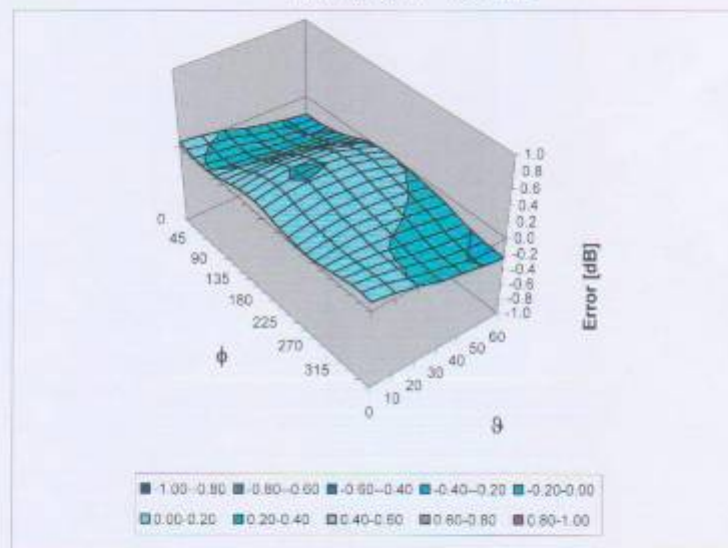

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  (k=2)





EX3DV4 SN:3755

January 20, 2012

## Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle (°)	Not applicable
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	2 mm





**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst  
C Service suisse d'étalonnage  
S Servizio svizzero di taratura  
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

Accreditation No.: SCS 108

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Client **CCS (Auden)**Certificate No: **DAE4-1245\_Jan12**

## CALIBRATION CERTIFICATE

Object **DAE4 - SD 000 D04 BJ - SN: 1245**

Calibration procedure(s) **QA CAL-06.v22  
Calibration procedure for the data acquisition electronics (DAE)**

Calibration date: **January 11, 2012**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Keithley Multimeter Type 2001	SN: 0810278	28-Sep-11 (No:10376)	Sep-12
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Calibrator Box V1.1	SE UMS 006 AB 1004	07-Jun-11 (In house check)	In house check: Jun-12

	Name	Function	Signature
Calibrated by:	Eric Hainfeld	Technician	
Approved by:	Fir Bomholt	R&D Director	

Issued: January 11, 2012

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

## Glossary

**DAE** data acquisition electronics  
**Connector angle** information used in DASY system to align probe sensor X to the robot coordinate system.

## Methods Applied and Interpretation of Parameters

- **DC Voltage Measurement:** Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- **Connector angle:** The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.
  - **DC Voltage Measurement Linearity:** Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.
  - **Common mode sensitivity:** Influence of a positive or negative common mode voltage on the differential measurement.
  - **Channel separation:** Influence of a voltage on the neighbor channels not subject to an input voltage.
  - **AD Converter Values with inputs shorted:** Values on the internal AD converter corresponding to zero input voltage
  - **Input Offset Measurement:** Output voltage and statistical results over a large number of zero voltage measurements.
  - **Input Offset Current:** Typical value for information; Maximum channel input offset current, not considering the input resistance.
  - **Input resistance:** Typical value for information: DAE input resistance at the connector, during internal auto-zeroing and during measurement.
  - **Low Battery Alarm Voltage:** Typical value for information. Below this voltage, a battery alarm signal is generated.
  - **Power consumption:** Typical value for information. Supply currents in various operating modes.



### DC Voltage Measurement

A/D - Converter Resolution nominal

High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV

Low Range: 1LSB = 61nV, full range = -1.....+3mV

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.949 $\pm$ 0.1% (k=2)	404.668 $\pm$ 0.1% (k=2)	405.811 $\pm$ 0.1% (k=2)
Low Range	3.99652 $\pm$ 0.7% (k=2)	3.99470 $\pm$ 0.7% (k=2)	3.98099 $\pm$ 0.7% (k=2)

### Connector Angle

Connector Angle to be used in DASY system	32.0 $^{\circ}$ $\pm$ 1 $^{\circ}$
---	------------------------------------





## Appendix

### 1. DC Voltage Linearity

High Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	199999.6	-1.22	-0.00
Channel X + Input	20001.67	2.27	0.01
Channel X - Input	-19997.79	1.81	-0.01
Channel Y + Input	200009.5	-0.71	-0.00
Channel Y + Input	20000.17	0.67	0.00
Channel Y - Input	-19998.63	0.87	-0.00
Channel Z + Input	200008.1	-1.41	-0.00
Channel Z + Input	19999.37	-0.03	-0.00
Channel Z - Input	-19999.79	-0.39	0.00

Low Range	Reading ( $\mu\text{V}$ )	Difference ( $\mu\text{V}$ )	Error (%)
Channel X + Input	1999.1	-0.69	-0.03
Channel X + Input	199.90	-0.10	-0.05
Channel X - Input	-200.48	-0.38	0.19
Channel Y + Input	2000.3	0.29	0.01
Channel Y + Input	199.10	-1.00	-0.50
Channel Y - Input	-201.03	-1.23	0.62
Channel Z + Input	2000.0	0.05	0.00
Channel Z + Input	198.48	-1.52	-0.76
Channel Z - Input	-201.27	-1.27	0.64

### 2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading ( $\mu\text{V}$ )	Low Range Average Reading ( $\mu\text{V}$ )
Channel X	200	-7.88	-9.62
	-200	10.45	8.89
Channel Y	200	-7.79	-7.99
	-200	6.00	6.40
Channel Z	200	-6.22	-6.24
	-200	5.35	5.19

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X ( $\mu\text{V}$ )	Channel Y ( $\mu\text{V}$ )	Channel Z ( $\mu\text{V}$ )
Channel X	200	-	2.91	-0.13
Channel Y	200	2.57	-	4.74
Channel Z	200	1.27	-0.99	-



#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15884	14899
Channel Y	16498	15256
Channel Z	15933	16202

#### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input 10M $\Omega$ 

	Average ( $\mu$ V)	min. Offset ( $\mu$ V)	max. Offset ( $\mu$ V)	Std. Deviation ( $\mu$ V)
Channel X	-0.03	-1.14	1.28	0.46
Channel Y	-0.76	-2.25	0.38	0.45
Channel Z	-1.13	-3.14	0.64	0.59

#### 6. Input Offset Current

Nominal Input circuitry offset current on all channels: &lt;25fA

#### 7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

#### 8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

#### 9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	+6	+14
Supply (- Vcc)	-0.01	-8	-9





## **APPENDIX C: PLOTS OF SAR TEST RESULT**

The plots are showing in the file named Appendix C Plots of SAR Test Result

**END REPORT**