



FCC PART 15.247




MEASUREMENT AND TEST REPORT

For

Zhongshan K-mate General Electronics Co., Ltd.

Fuwan Industrial Zone, Fuwan South Road, Sunwen East Road, East District,
Zhongshan, Guangdong, China

FCC ID: WAD-BTH015

Report Type: Original Report	Product Type: Bluetooth Stereo Headset
Test Engineer: <u>Sula Huang</u> 	
Report Number: <u>RDG11033002</u>	
Report Date: <u>2011-05-10</u>	
Merry Zhao 	
Reviewed By: <u>EMC Engineer</u>	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk “★” (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE.....	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC §15.203 – ANTENNA REQUIREMENT	9
APPLICABLE STANDARD	9
ANTENNA CONNECTOR CONSTRUCTION	9
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	10
APPLICABLE STANDARD	10
MEASUREMENT UNCERTAINTY	10
EUT SETUP	10
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	11
TEST RESULTS SUMMARY	11
TEST DATA	11
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	14
APPLICABLE STANDARD	14
MEASUREMENT UNCERTAINTY	14
EUT SETUP.....	14
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	15
TEST PROCEDURE	15
CORRECTED AMPLITUDE & MARGIN CALCULATION	15
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	22
APPLICABLE STANDARD	22
TEST EQUIPMENT LIST AND DETAILS.....	22
TEST PROCEDURE	22
TEST DATA	22
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....	27
APPLICABLE STANDARD	27
TEST EQUIPMENT LIST AND DETAILS.....	27
TEST PROCEDURE	27

TEST DATA	27
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST	32
APPLICABLE STANDARD	32
TEST EQUIPMENT LIST AND DETAILS.....	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....	35
APPLICABLE STANDARD	35
TEST EQUIPMENT LIST AND DETAILS.....	35
TEST PROCEDURE	35
TEST DATA	35
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	48
APPLICABLE STANDARD	48
TEST EQUIPMENT LIST AND DETAILS.....	48
TEST PROCEDURE	48
TEST DATA	48
FCC §15.247(d) - BAND EDGES TESTING	53
APPLICABLE STANDARD	53
TEST EQUIPMENT LIST AND DETAILS.....	53
TEST PROCEDURE	53
TEST DATA	54
PRODUCT SIMILARITY DECLARATION LETTER	57

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Zhongshan K-mate General Electronics Co., Ltd*'s product, model number: *BTH015 (FCC ID: WAD-BTH015)* or the "EUT" as referred to in this report is a *Bluetooth Stereo Headset*, which measures approximately: 15.8 cm (L) x 15.6 cm (W) x 5.5 cm (H), rated input voltage: DC 3.7 V built-in rechargeable battery

Note: the serial model BTH015, IO14H01MC, we select BTH015 to test. They are electrically identical; only their names are different, which was explained in the attached declaration letter.

All measurement and test data in this report was gathered from production sample serial number: 1103022 (Assigned by BACL, Shenzhen). The EUT was received on 2011-03-30.

Objective

This Type approval report is prepared on behalf of *Zhongshan K-mate General Electronics Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

N/A

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 guide accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in typical fashion (as normally used by a typical user).

Equipment Modifications

No modification was made to the unit tested.

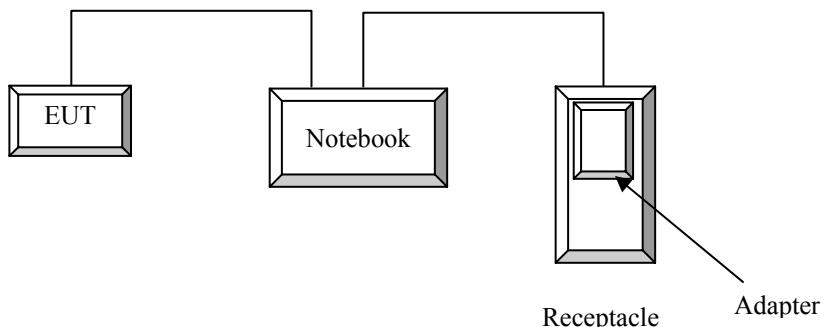
Local Support Equipment List and Details

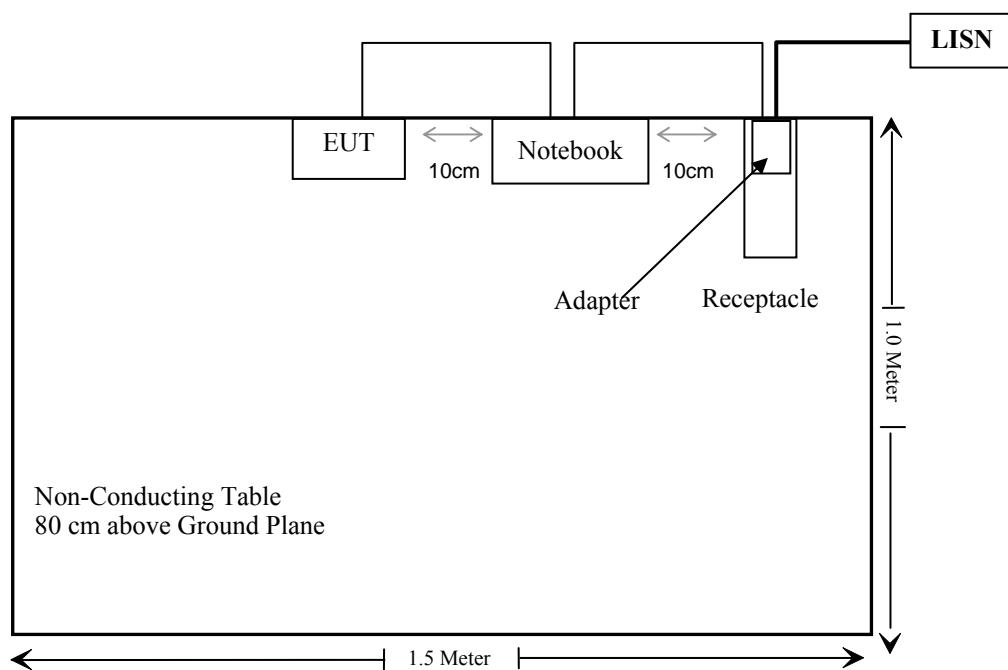
Manufacturer	Description	Model	Serial Number
DELL	Notebook	PP05L	N/A

External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable USB charging Cable	1.20	Charging Jack	Notebook

Configuration of Test Setup



Block Diagram of Test Setup

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB layout antenna, the gain is 0 dBi, which in accordance to section 15.203, please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

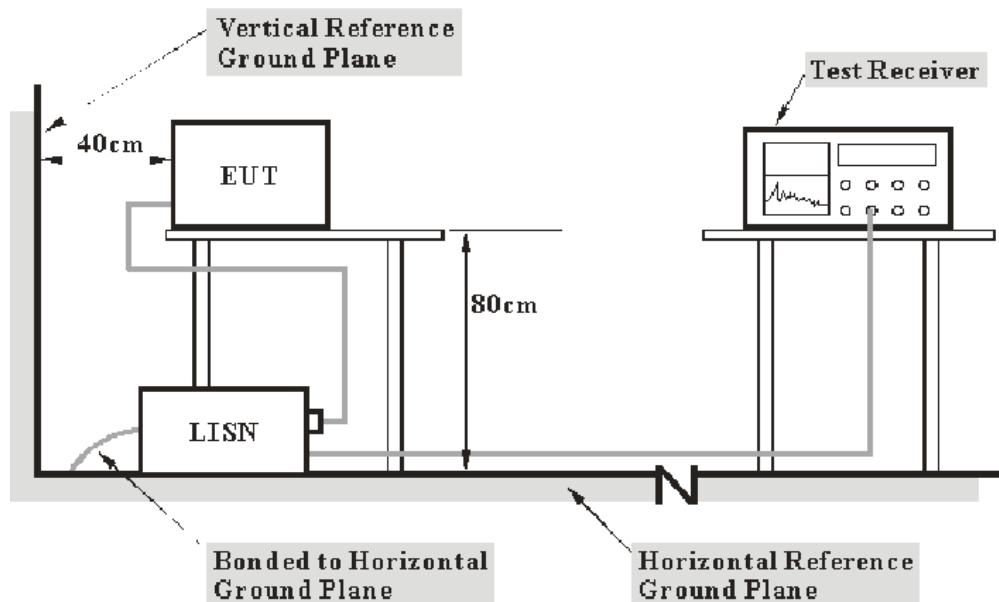
FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB ($k=2$, 95% level of confidence).

EUT Setup



- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter of notebook was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter of notebook was connected to the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the [FCC Part 15.207](#), with the worst margin reading of:

8.20 dB at 0.590MHz in the **Line** conducted mode

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	48 %
ATM Pressure:	100.0 kPa

The testing was performed by Sula Huang on 2011-05-04.

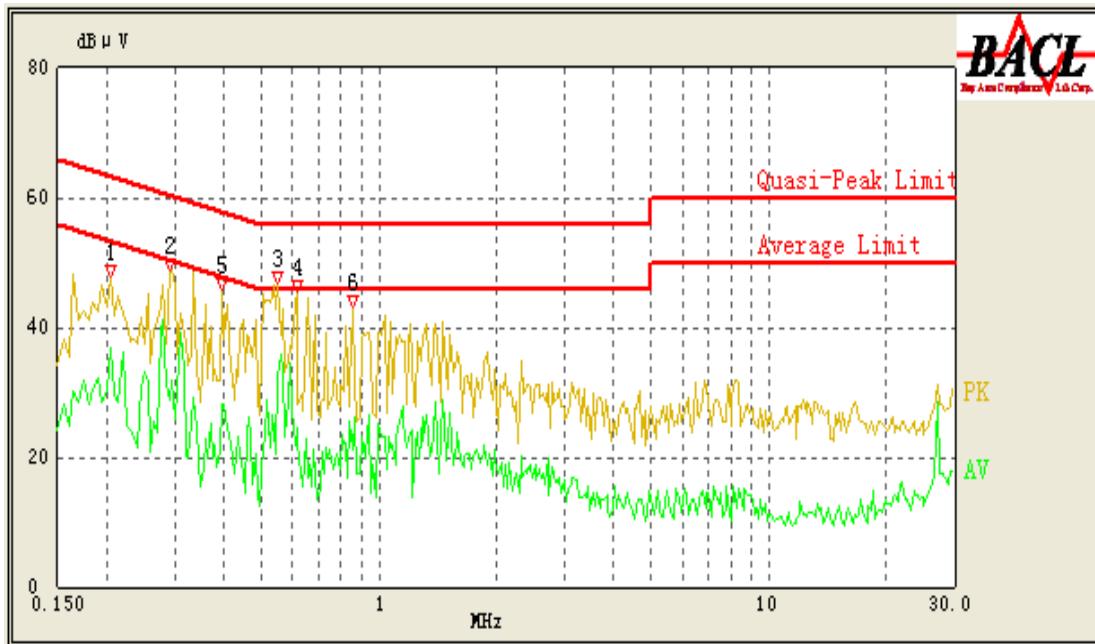
Test Mode: Charging

AC 120 V, 60 Hz, Line:



Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dBμV)	Limit (dBμV)	Margin (dB)	Remark (PK/QP/Ave.)
0.590	10.18	37.80	46.00	8.20	Ave.
0.315	10.02	40.14	51.29	11.15	Ave.
0.205	10.06	37.85	54.43	16.58	Ave.
0.590	10.18	39.61	56.00	17.39	QP
0.315	10.02	42.37	61.29	18.92	QP
0.160	10.09	45.01	65.71	20.70	QP
0.470	10.17	25.86	46.86	21.00	Ave.
0.225	10.05	32.58	53.86	21.28	Ave.
0.225	10.05	42.45	63.86	21.41	QP
0.205	10.06	40.17	64.43	24.26	QP
0.160	10.09	30.52	55.71	25.19	Ave.
0.470	10.17	31.30	56.86	25.56	QP

AC 120V, 60 Hz, Neutral:



Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Correction Factor (dB)	Cord. Result (dB μ V)	Limit (dB μ V)	Margin (dB)	Remark (PK/QP/Ave.)
0.550	10.19	32.57	46.00	13.43	Ave.
0.615	10.18	38.54	56.00	17.46	QP
0.205	10.06	36.92	54.43	17.51	Ave.
0.550	10.19	37.00	56.00	19.00	QP
0.860	10.13	35.88	56.00	20.12	QP
0.395	10.10	28.32	49.00	20.68	Ave.
0.615	10.18	24.35	46.00	21.65	Ave.
0.290	10.01	28.81	52.00	23.19	Ave.
0.860	10.13	21.13	46.00	24.87	Ave.
0.205	10.06	39.34	64.43	25.09	QP
0.395	10.10	33.20	59.00	25.80	QP
0.290	10.01	35.03	62.00	26.97	QP

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard

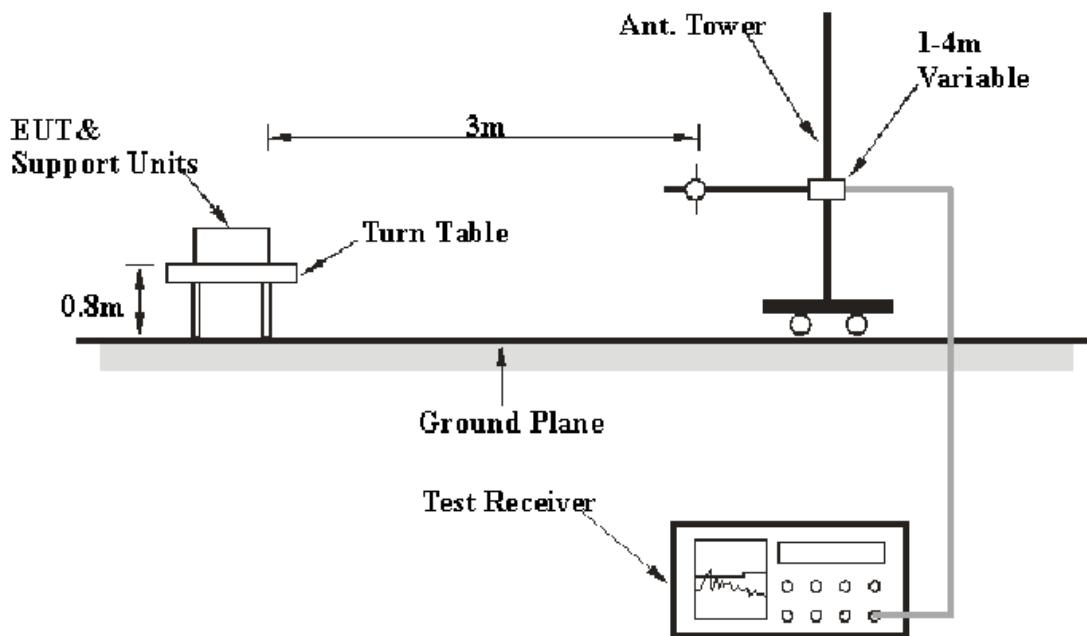
FCC §15.205; §15.209; §15.247(d)

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB. ($k=2$, 95% level of confidence).

EUT Setup



The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	Detector
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-07-05	2011-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-08
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-08

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

Below 1 GHz:

Charging mode: 7.0 dB at 749.350750 MHz in the Vertical polarization

Transmitting mode (BDR): 7.5 dB at 300.509250 MHz in the Horizontal polarization

Transmitting mode (EDR): 7.1 dB at 300.558750 MHz in the Horizontal polarization

Above 1 GHz:

Transmitting mode (BDR): 2.94 dB at 4882 MHz in the Horizontal polarization (Middle Channel)

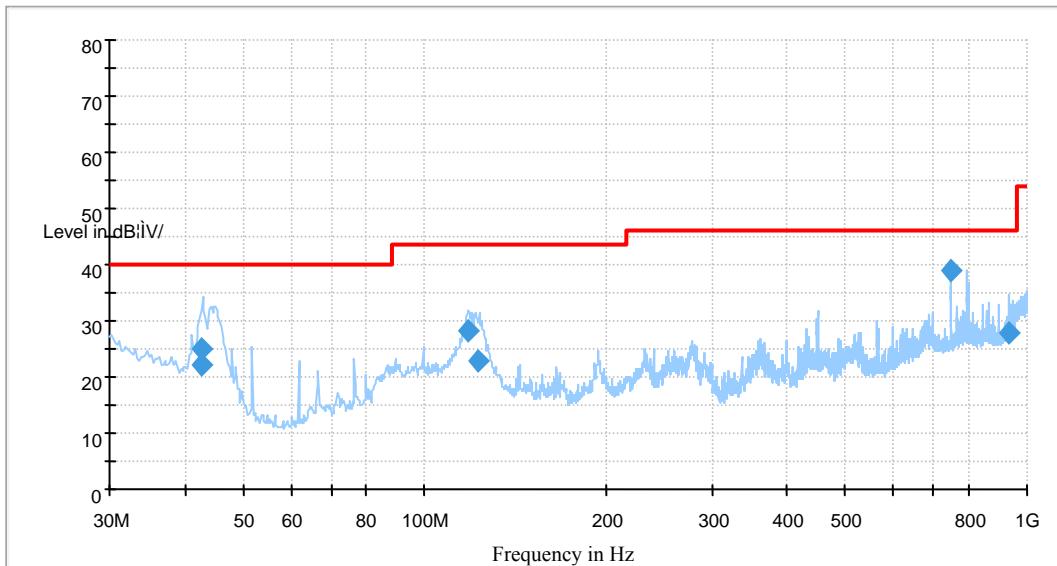
Transmitting mode (EDR): 4.35 dB at 4882 MHz in the Horizontal polarization (Middle Channel)

Test Data

Environmental Conditions

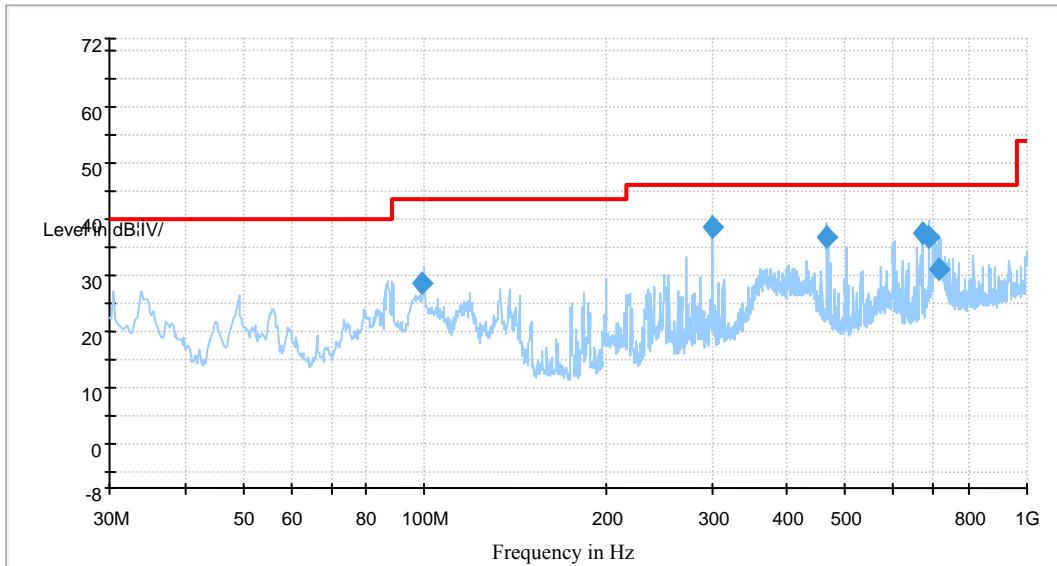
Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Sula Huang on 2011-04-30.

1) 30-1000 MHz:*Test mode: Charging*

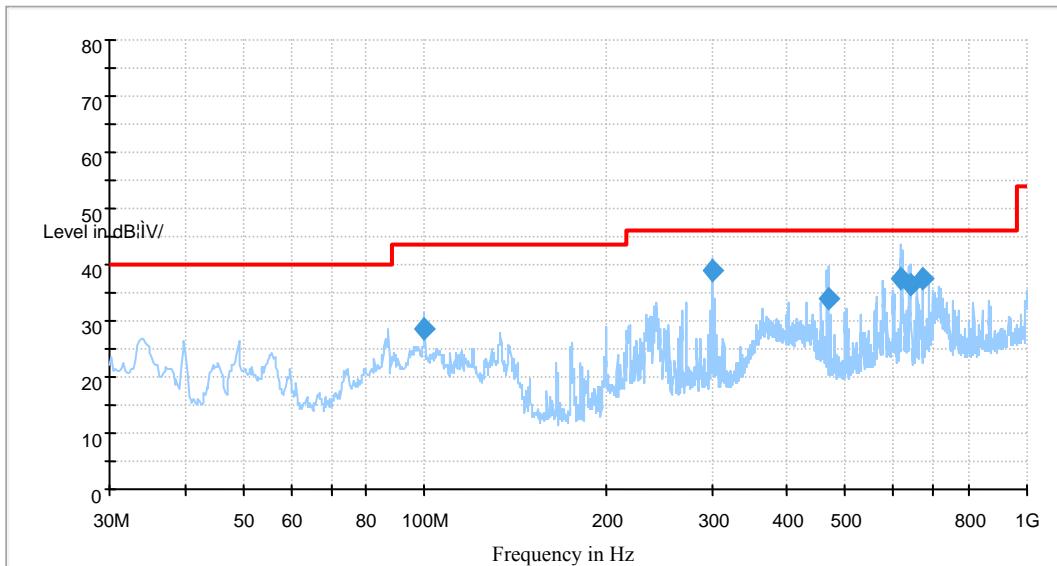
Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
749.350750	39.0	125.0	V	99.0	-2.4	46.0	7.0
42.518500	25.1	124.0	V	42.0	-13.7	40.0	14.9
118.172000	28.2	102.0	V	119.0	-12.5	43.5	15.3
42.678500	22.3	124.0	V	111.0	-13.8	40.0	17.7
935.877000	27.9	192.0	H	232.0	0.3	46.0	18.1
122.940750	23.0	109.0	V	137.0	-12.3	43.5	20.5

Test mode: Transmitting (BDR)



Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
300.509250	38.5	110.0	H	95.0	-12.4	46.0	7.5
672.121000	37.4	108.0	H	95.0	-4.0	46.0	8.6
465.321750	36.7	102.0	V	164.0	-8.9	46.0	9.3
687.289250	36.7	102.0	H	112.0	-3.5	46.0	9.3
99.100000	28.4	124.0	V	112.0	-17.7	40.0	11.6
712.288750	31.1	109.0	H	42.0	-2.9	46.0	14.9

Test mode: Transmitting (EDR)



Frequency (MHz)	Corrected Amplitude (dB μ V/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dB μ V/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
300.558750	38.9	102.0	H	78.0	-12.4	46.0	7.1
672.122750	37.6	102.0	H	94.0	-4.0	46.0	8.4
618.118000	37.4	125.0	H	61.0	-6.0	46.0	8.6
642.606500	36.4	108.0	H	112.0	-5.1	46.0	9.6
99.840000	28.4	103.0	V	111.0	-17.7	40.0	11.6
468.465750	34.0	125.0	V	172.0	-8.8	46.0	12.0

2) Above 1 GHz:*Test mode: Transmitting (BDR)*

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	FCC Part 15.247/205/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	Note
Low Channel (2402 MHz)												
4804	36.69	Ave.	130	1.8	H	36.6	4.30	26.75	50.84	54	3.16*	harmonic
4804	36.3	Ave.	155	1.8	V	35.4	4.30	26.75	49.25	54	4.75	harmonic
4804	53.25	PK	130	1.8	H	36.6	4.30	26.75	67.40	74	6.60	harmonic
4804	51.45	PK	155	1.8	V	35.4	4.30	26.75	64.40	74	9.60	harmonic
2314.6	34.19	Ave.	125	2.0	H	30.6	2.98	26.83	40.94	54	13.06	spurious
2327.5	34.11	Ave.	260	1.5	V	30.6	2.98	26.83	40.86	54	13.14	spurious
2314.6	49.10	PK	125	2.0	H	30.6	2.98	26.83	55.85	74	18.15	spurious
2327.5	48.48	PK	260	1.5	V	30.6	2.98	26.83	55.23	74	18.77	spurious
Middle Channel (2441 MHz)												
4882	36.85	Ave.	122	1.7	H	36.6	4.36	26.75	51.06	54	2.94*	harmonic
4882	37.22	Ave.	155	1.8	V	35.4	4.36	26.75	50.23	54	3.77*	harmonic
4882	54.59	PK	122	1.7	H	36.6	4.36	26.75	68.80	74	5.20	harmonic
4882	52.93	PK	155	1.8	V	35.4	4.36	26.75	65.94	74	8.06	harmonic
High Channel (2480 MHz)												
4960	36.03	Ave.	116	1.9	H	36.6	4.40	26.75	50.28	54	3.72*	harmonic
4960	36.61	Ave.	165	1.8	V	35.4	4.40	26.75	49.66	54	4.34	spurious
4960	51.79	PK	116	1.9	H	36.6	4.40	26.75	66.04	74	7.96	harmonic
4960	50.95	PK	165	1.8	V	35.4	4.40	26.75	64.00	74	10.00	harmonic
2483.5	35.22	Ave.	180	1.7	H	30.6	3.03	26.88	41.97	54	12.03	spurious
2483.5	34.76	Ave.	151	1.3	V	29.8	3.03	26.88	40.71	54	13.29	spurious
2483.5	49.88	PK	180	1.7	H	30.6	3.03	26.88	56.63	74	17.37	harmonic
2483.5	49.93	PK	151	1.3	V	29.8	3.03	26.88	55.88	74	18.12	spurious

*Within Measurement uncertainty.

Test mode: Transmitting (EDR)

Frequency (MHz)	Receiver Reading (dB μ V)	Detector (PK/QP/Ave)	Direction (Degree)	Test Antenna			Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	FCC Part 15.247/205/209		
				Height (m)	Polar (H/V)	Factor (dB/m)				Limit (dB μ V/m)	Margin (dB)	Note
Low Channel (2402 MHz)												
4804	36.55	Ave.	155	1.8	V	35.4	4.30	26.75	49.50	54	4.50	harmonic
4804	35.10	Ave.	130	1.8	H	36.6	4.30	26.75	49.25	54	4.75	harmonic
4804	50.68	PK	130	1.8	H	36.6	4.30	26.75	64.83	74	9.17	harmonic
4804	50.83	PK	155	1.8	V	35.4	4.30	26.75	63.78	74	10.22	harmonic
2327.6	35.05	Ave.	260	1.5	V	30.6	2.98	26.83	41.80	54	12.20	spurious
2314.8	35.03	Ave.	125	2.0	H	30.6	2.98	26.83	41.78	54	12.22	spurious
2314.8	49.85	PK	125	2.0	H	30.6	2.98	26.83	56.60	74	17.40	spurious
2327.6	49.25	PK	260	1.5	V	30.6	2.98	26.83	56.00	74	18.00	spurious
Middle Channel (2441 MHz)												
4882	35.44	Ave.	130	2.0	H	36.6	4.36	26.75	49.65	54	4.35	harmonic
4882	35.15	Ave.	155	1.6	V	35.4	4.36	26.75	48.16	54	5.84	spurious
4882	51.19	PK	130	2.0	H	36.6	4.36	26.75	65.40	74	8.60	harmonic
4882	51.19	PK	130	2.0	H	36.6	4.36	26.75	65.40	74	8.60	harmonic
High Channel (2480 MHz)												
4960	33.25	Ave.	116	1.9	H	36.6	4.40	26.75	47.50	54	6.50	harmonic
4960	33.19	Ave.	165	1.8	V	35.4	4.40	26.75	46.24	54	7.76	harmonic
4960	49.12	PK	116	1.9	H	36.6	4.40	26.75	63.37	74	10.63	harmonic
4960	48.33	PK	165	1.8	V	35.4	4.40	26.75	61.38	74	12.62	harmonic
2483.5	31.61	Ave.	180	1.7	H	30.6	3.03	26.88	38.36	54	15.64	spurious
2483.5	30.34	Ave.	151	1.3	V	29.8	3.03	26.88	36.29	54	17.71	spurious
2483.5	47.63	PK	180	1.7	H	30.6	3.03	26.88	54.38	74	19.62	spurious
2483.5	47.23	PK	151	1.3	V	29.8	3.03	26.88	53.18	74	20.82	spurious

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Sula Huang on 2011-04-27 to 2011-04-28.

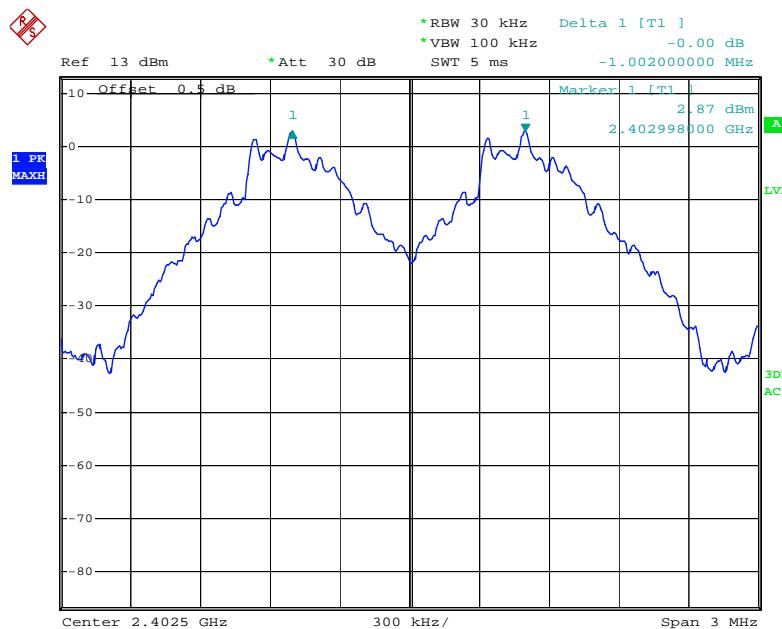
Test Result: Compliance, please refer to following tables and plots

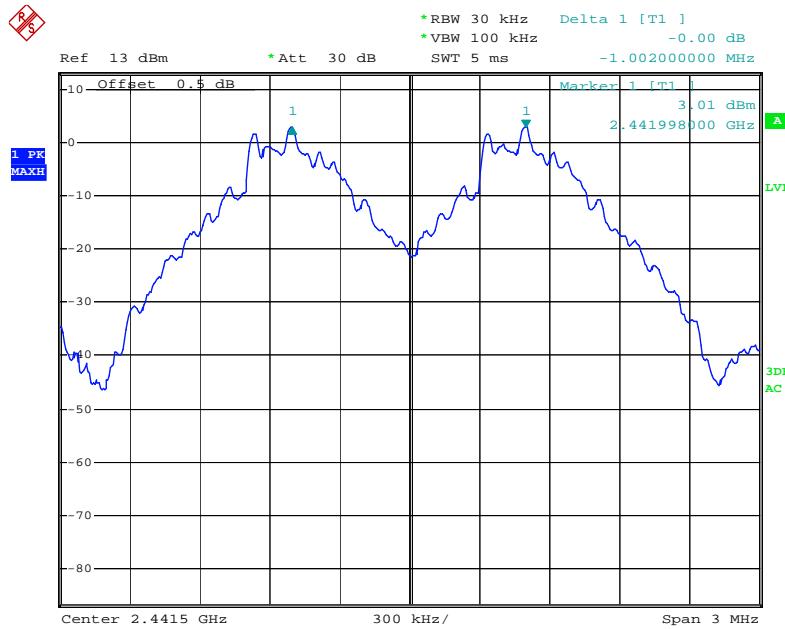
Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR	Low	2402	1.002	0.560	Pass
	Adjacent	2403		0.560	Pass
	Middle	2441		0.560	Pass
	Adjacent	2442	1.002	0.552	Pass
	High	2480		0.552	Pass
	Adjacent	2479		0.552	Pass
EDR	Low	2402	1.002	0.840	Pass
	Adjacent	2403		0.840	Pass
	Middle	2441		0.840	Pass
	Adjacent	2442	1.002	0.840	Pass
	High	2480		0.840	Pass
	Adjacent	2479		0.840	Pass

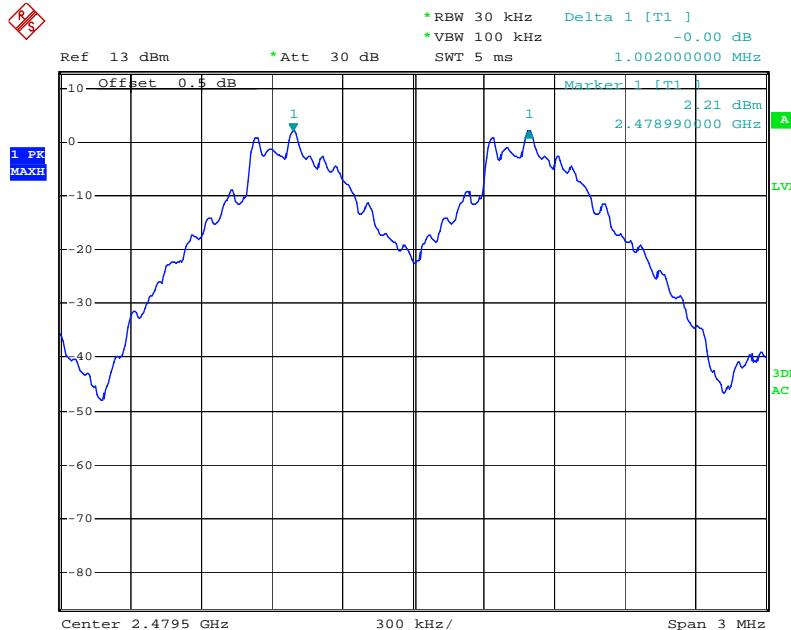
BDR:

Low Channel

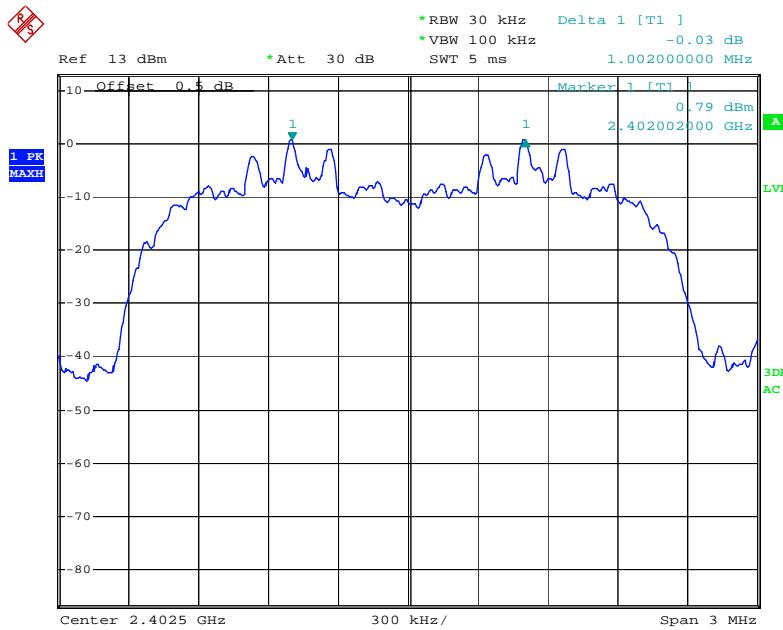


Middle Channel

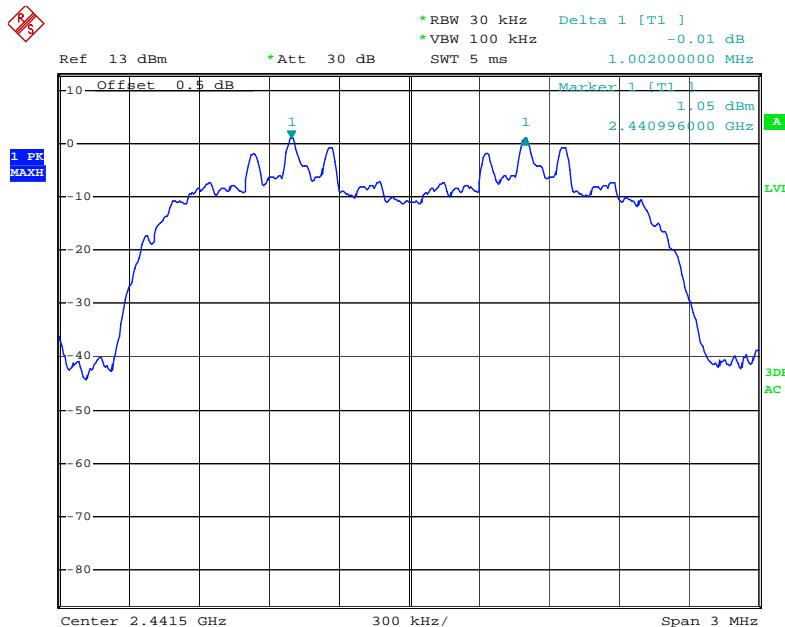
Date: 27.APR.2011 05:12:53

High Channel

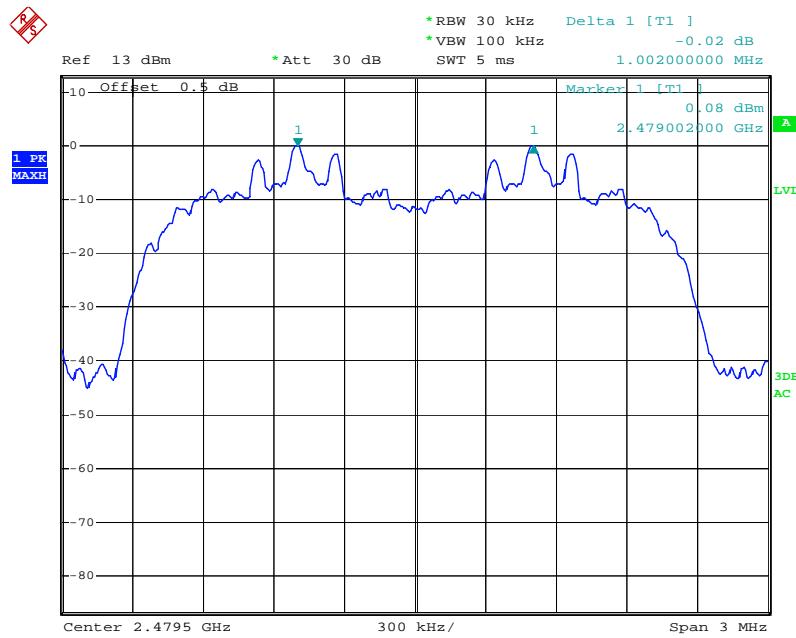
Date: 27.APR.2011 05:15:15

EDR:**Low Channel**

Date: 28.APR.2011 03:30:36

Middle Channel

Date: 28.APR.2011 03:33:38

High Channel

Date: 28.APR.2011 03:36:14

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Sula Huang on 2011-04-27 to 2011-04-28.

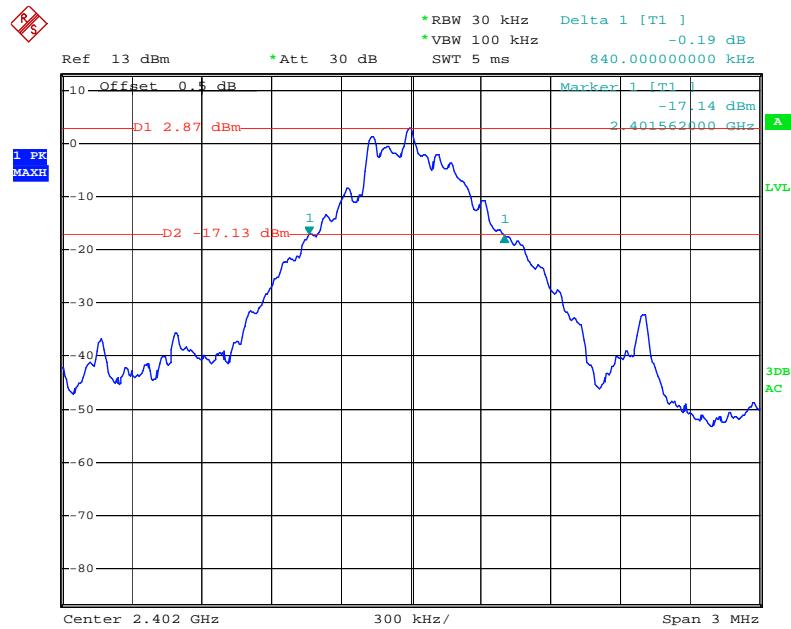
Test Result: Compliance, please refer to following tables and plots

Test Mode: Transmitting

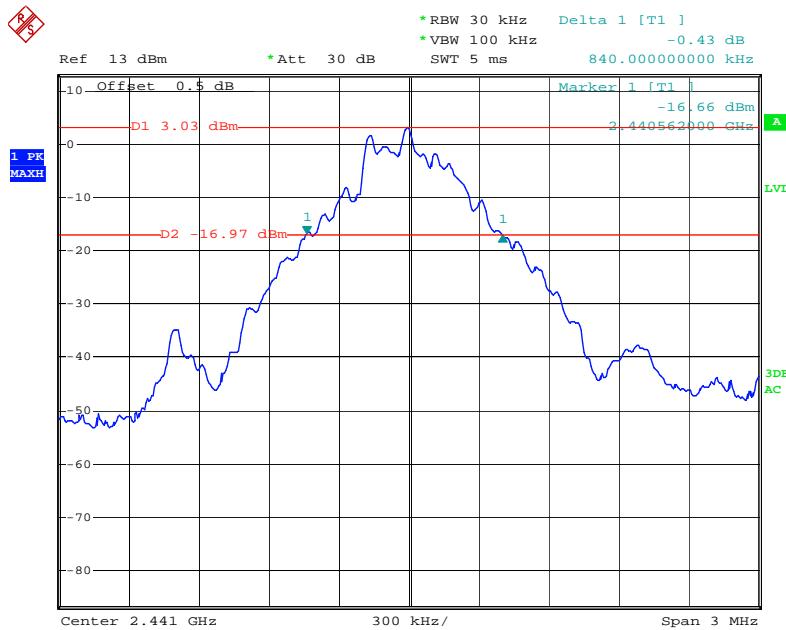
Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR	Low	2402	0.840
	Middle	2441	0.840
	High	2480	0.828
EDR	Low	2402	1.260
	Middle	2441	1.260
	High	2480	1.260

BDR:

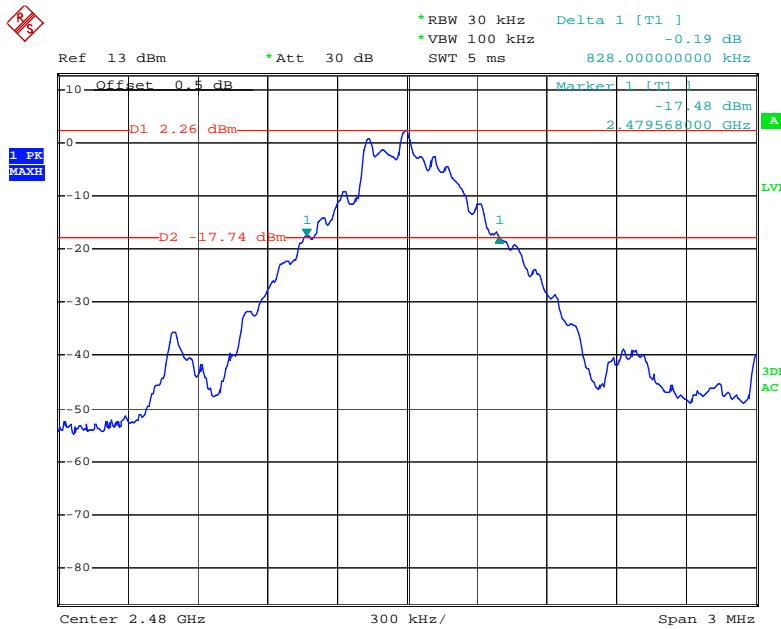
Low Channel



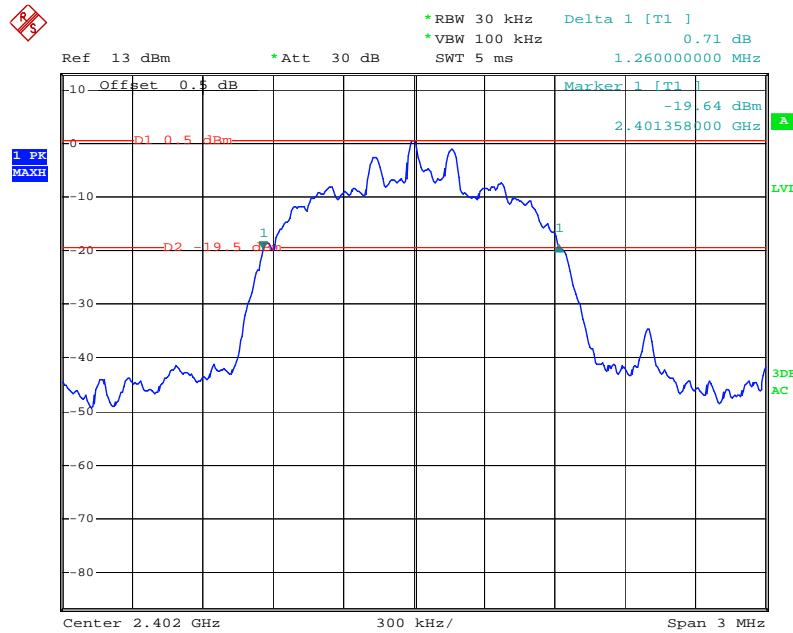
Date: 27.APR.2011 05:00:44

Middle Channel

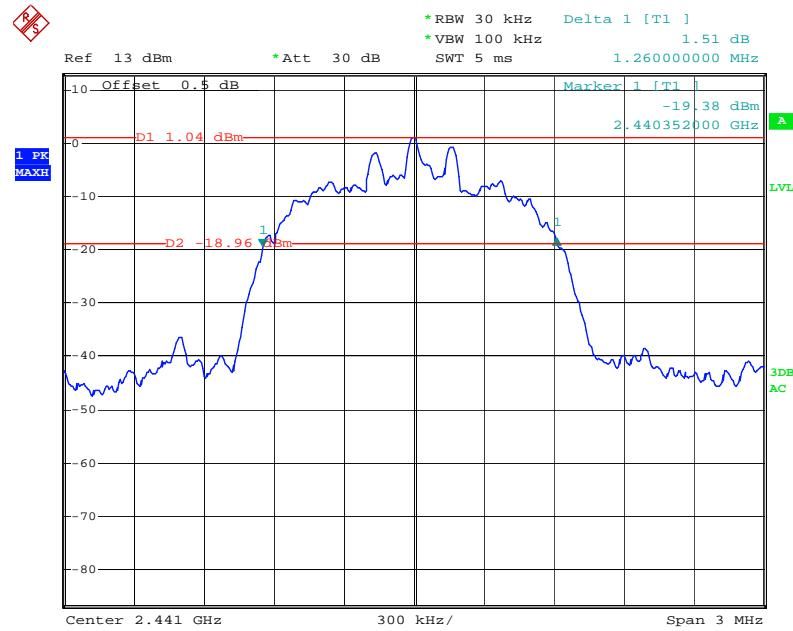
Date: 27.APR.2011 05:04:56

High Channel

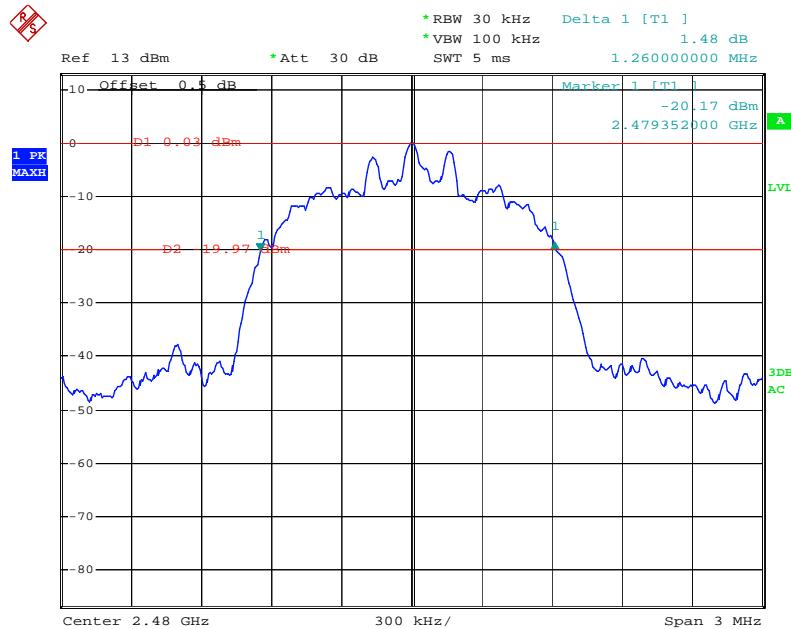
Date: 27.APR.2011 05:07:30

EDR:**Low Channel**

Date: 28.APR.2011 03:24:51

Middle Channel

Date: 28.APR.2011 03:26:52

High Channel

Date: 28.APR.2011 03:28:41

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

The testing was performed by Sula Huang on 2011-04-27.

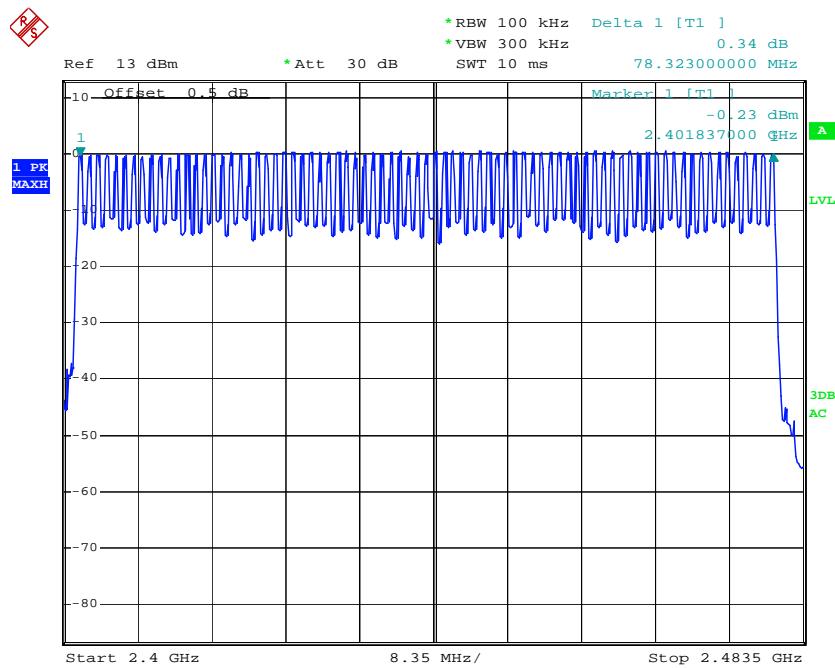
Test Result: Compliance, please refer to following table and plots

Test Mode: Transmitting

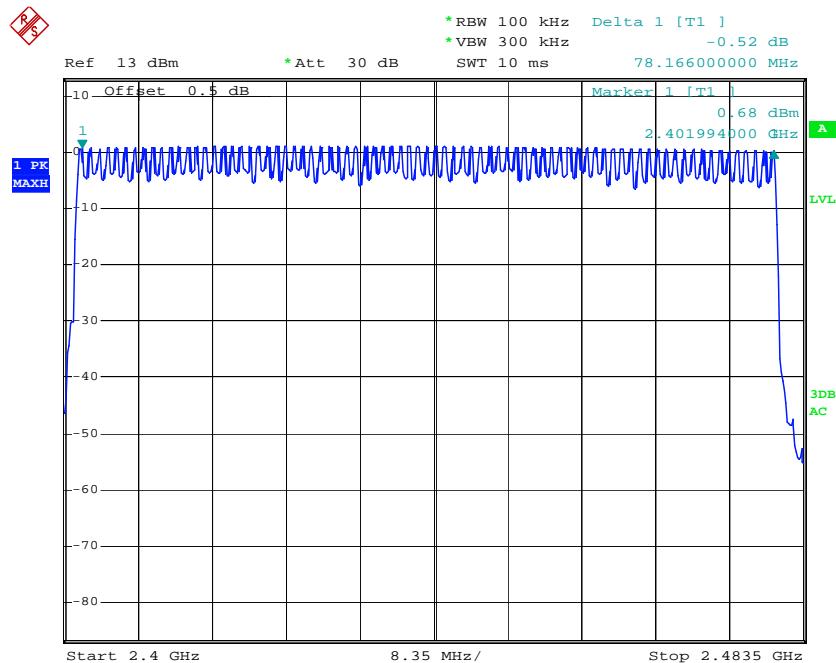
Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR	2400~2483.5	79	≥ 15
EDR	2400~2483.5	79	≥ 15

BDR:

Number of Hopping Channels



Date: 27.APR.2011 04:56:17

EDR:**Number of Hopping Channels**

Date: 27.APR.2011 06:37:58

FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S
Hop rate=1600/S

Test Data**Environmental Conditions**

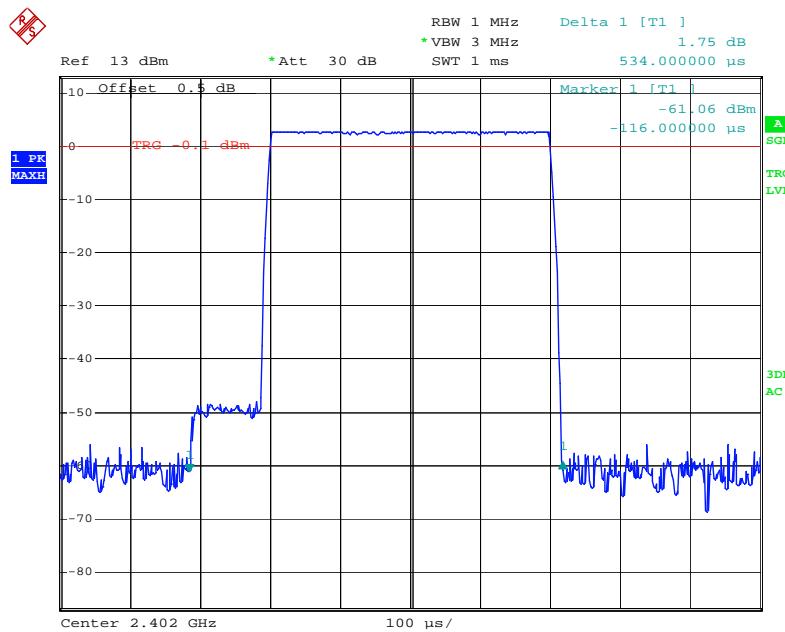
Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Sula Huang on 2011-04-27 to 2011-04-28.

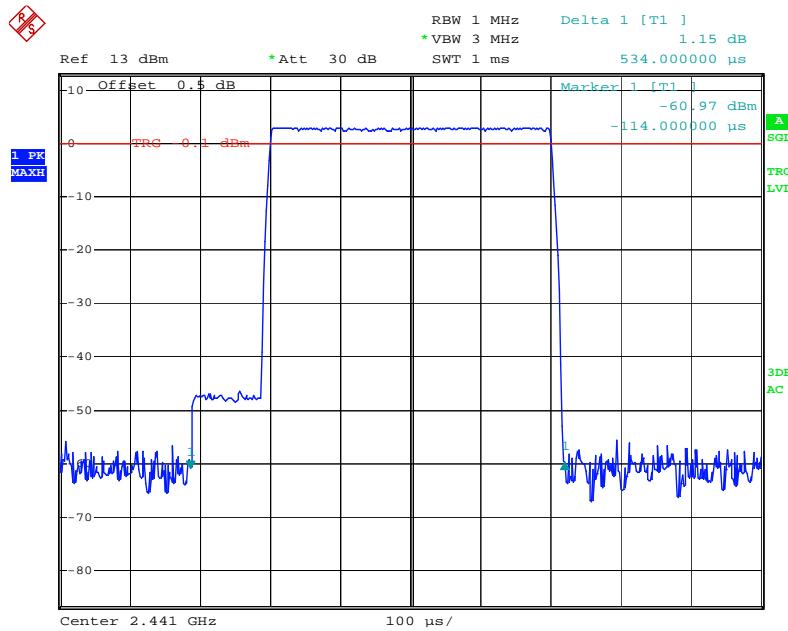
Test Result: Compliance, please refer to following table and plots

DH1:*Test Mode: Transmitting*

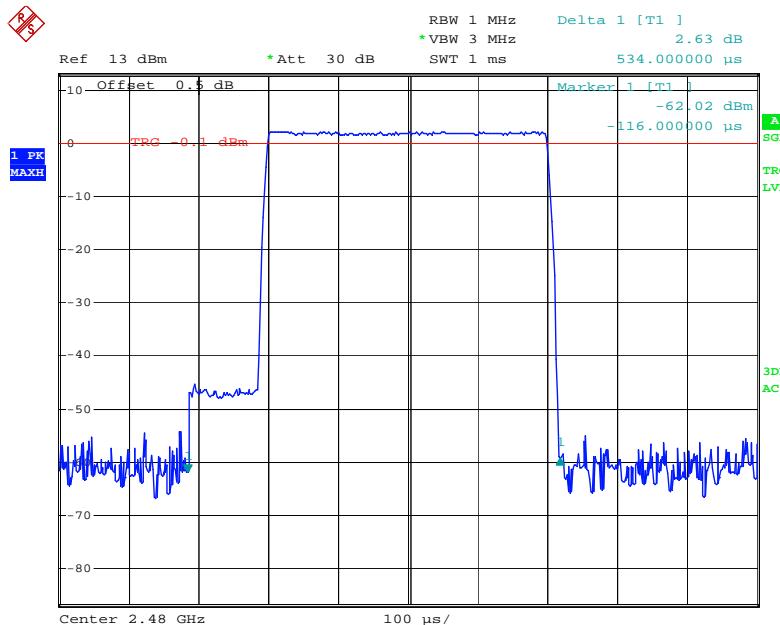
Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR	Low	0.534	0.171	0.4	Pass
	Middle	0.534	0.171	0.4	Pass
	High	0.534	0.171	0.4	Pass
<i>Note: Dwell time = Pulse time*(1600/2/79)*31.6S</i>					
EDR	Low	0.560	0.179	0.4	Pass
	Middle	0.560	0.179	0.4	Pass
	High	0.560	0.179	0.4	Pass
<i>Note: Dwell time = Pulse time*(1600/2/79)*31.6S</i>					

BDR:**Low Channel**

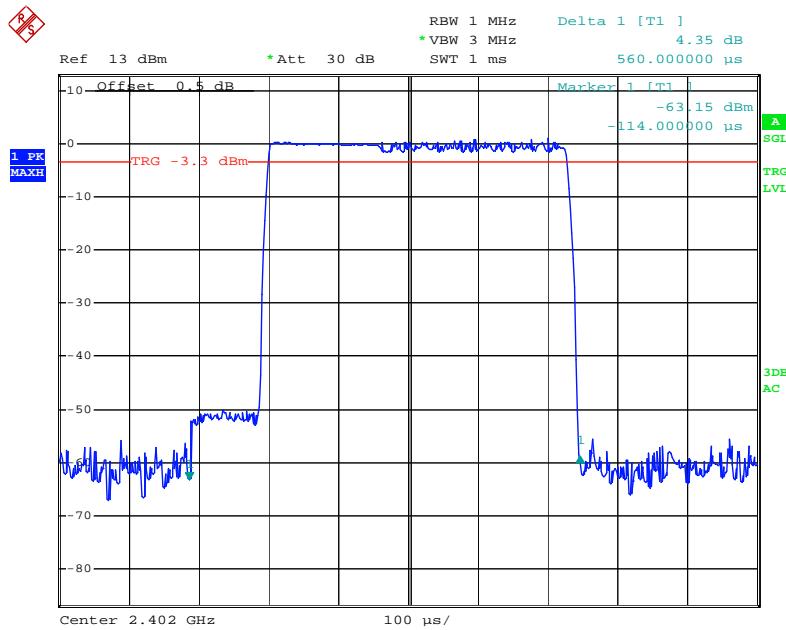
Date: 27.APR.2011 06:11:38

Middle Channel

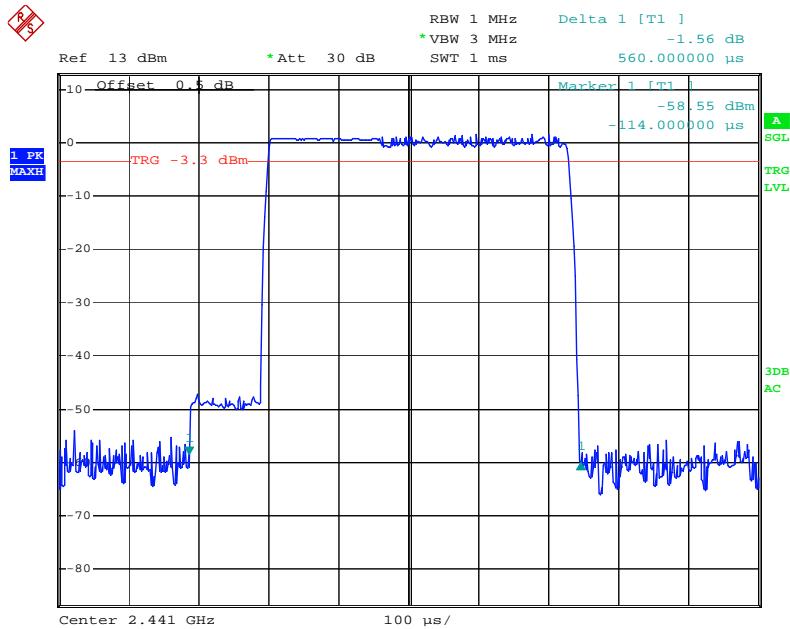
Date: 27.APR.2011 06:10:02

High Channel

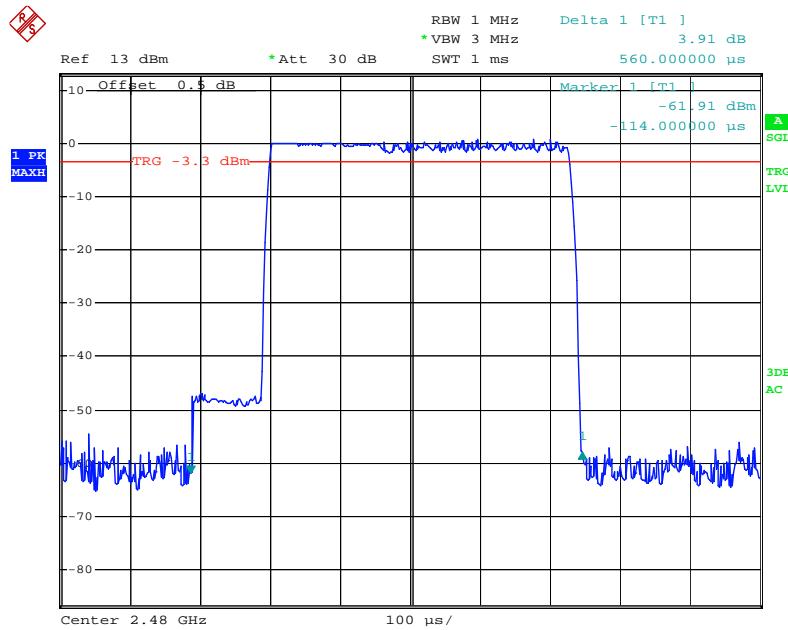
Date: 27.APR.2011 06:12:27

EDR:**Low Channel**

Date: 28.APR.2011 05:07:04

Middle Channel

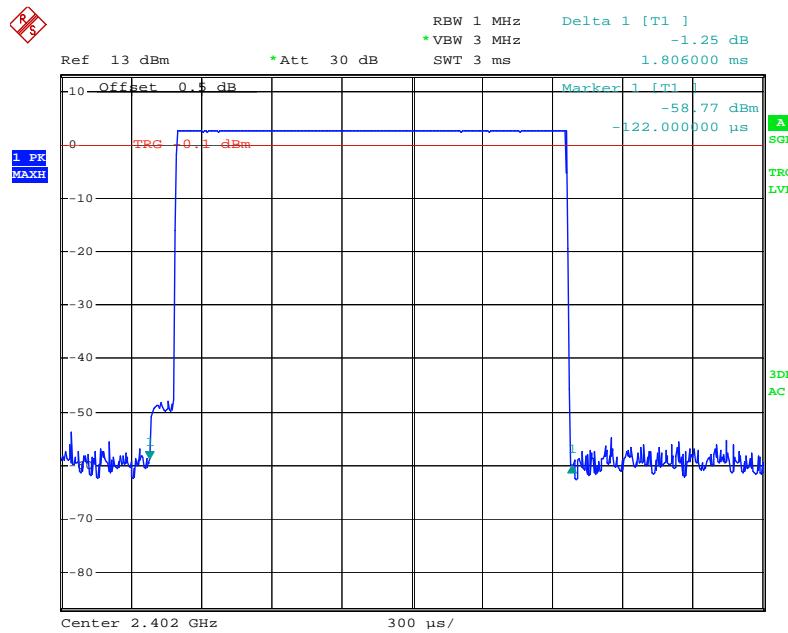
Date: 28.APR.2011 04:33:07

High Channel

Date: 28.APR.2011 04:33:46

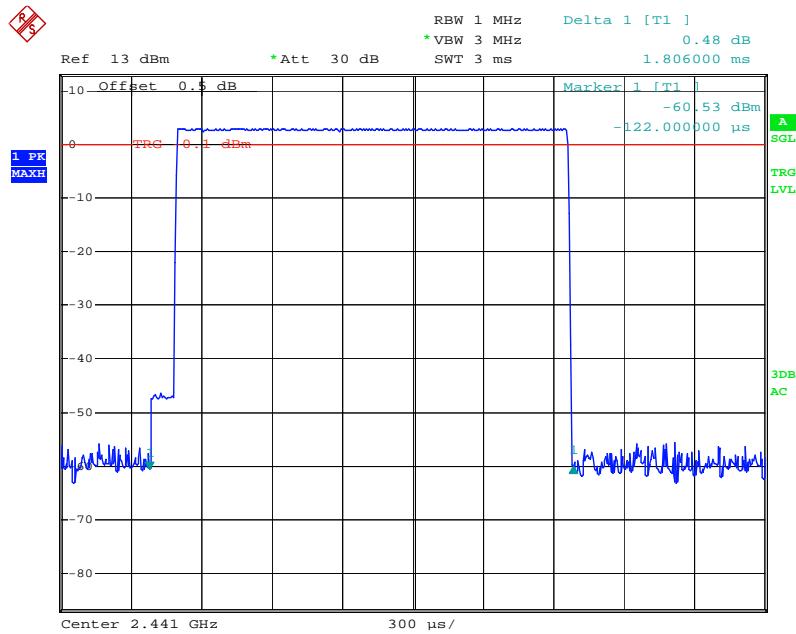
DH3:*Test Mode: Transmitting*

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR	Low	1.806	0.289	0.4	Pass
	Middle	1.806	0.289	0.4	Pass
	High	1.806	0.289	0.4	Pass
<i>Note: Dwell time = Pulse time*(1600/4/79)*31.6S</i>					
EDR	Low	1.812	0.290	0.4	Pass
	Middle	1.812	0.290	0.4	Pass
	High	1.812	0.290	0.4	Pass
<i>Note: Dwell time = Pulse time*(1600/4/79)*31.6S</i>					

BDR:**Low Channel**

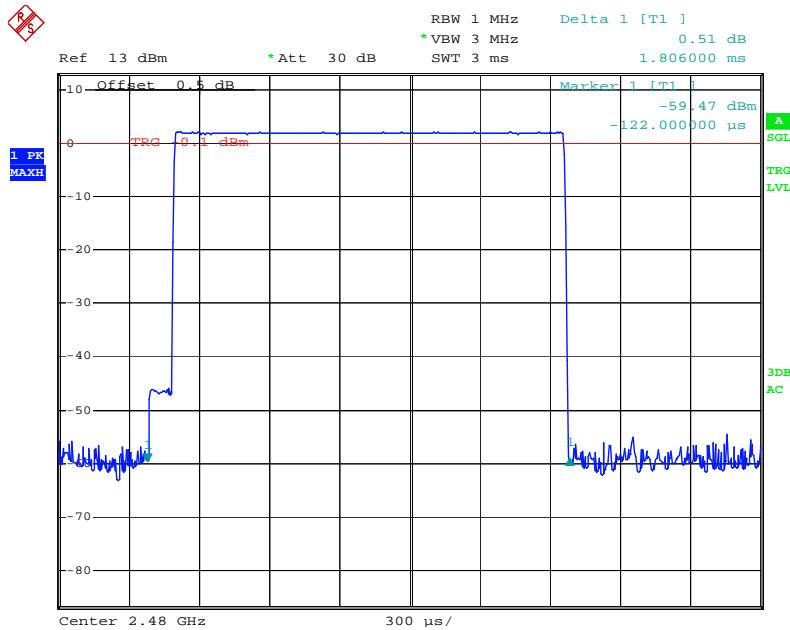
Date: 27.APR.2011 06:15:14

Middle Channel

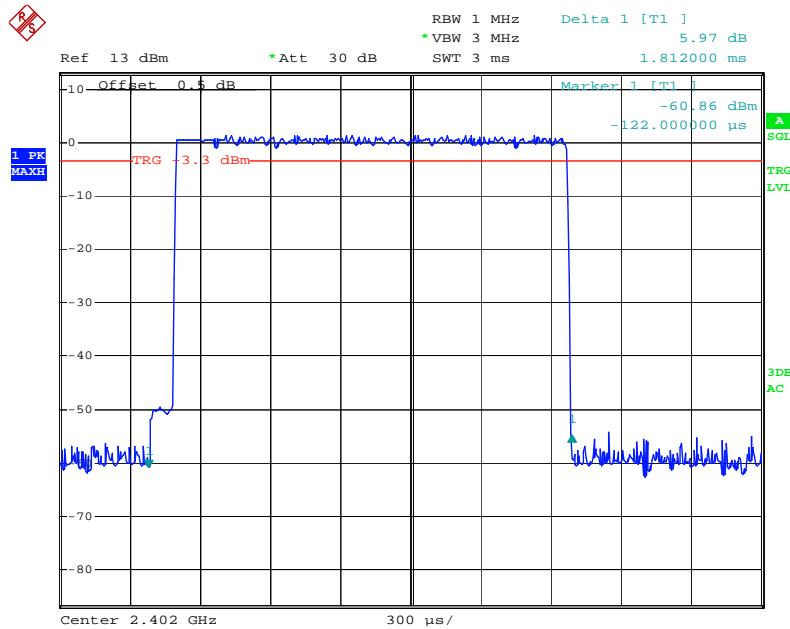


Date: 27.APR.2011 06:16:14

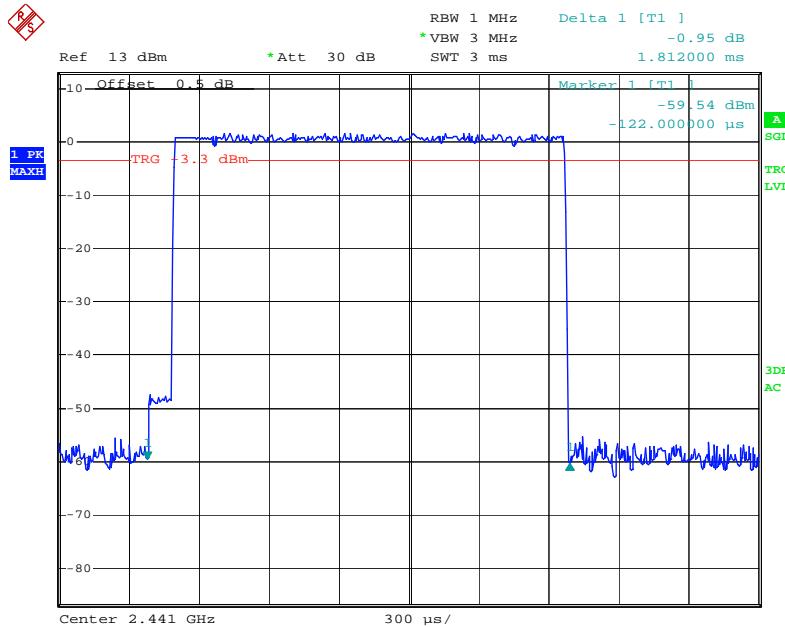
High Channel



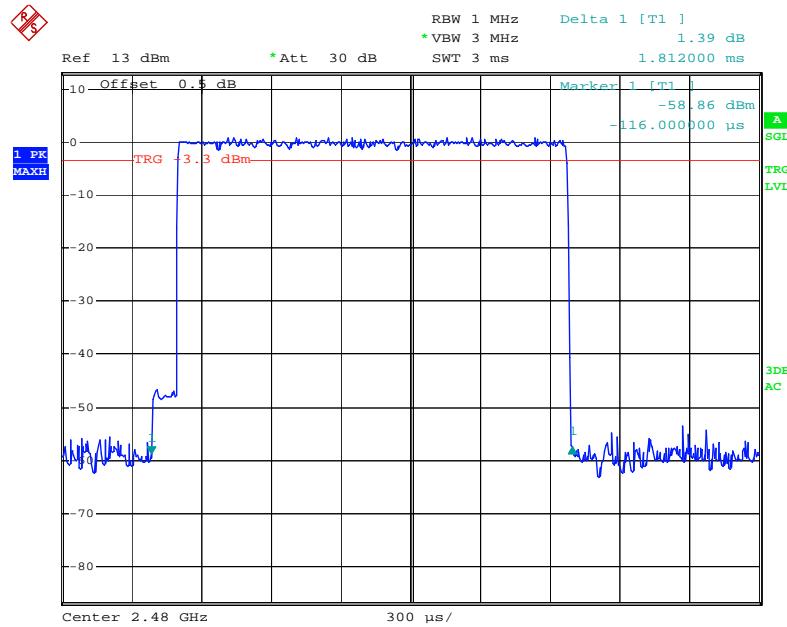
Date: 27.APR.2011 06:17:11

EDR:**Low Channel**

Date: 28.APR.2011 04:35:33

Middle Channel

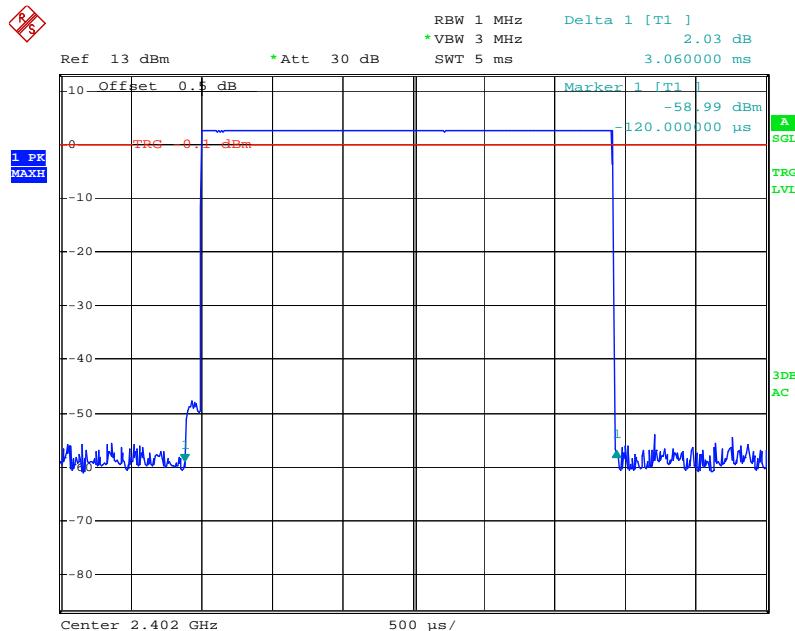
Date: 28.APR.2011 04:37:02

High Channel

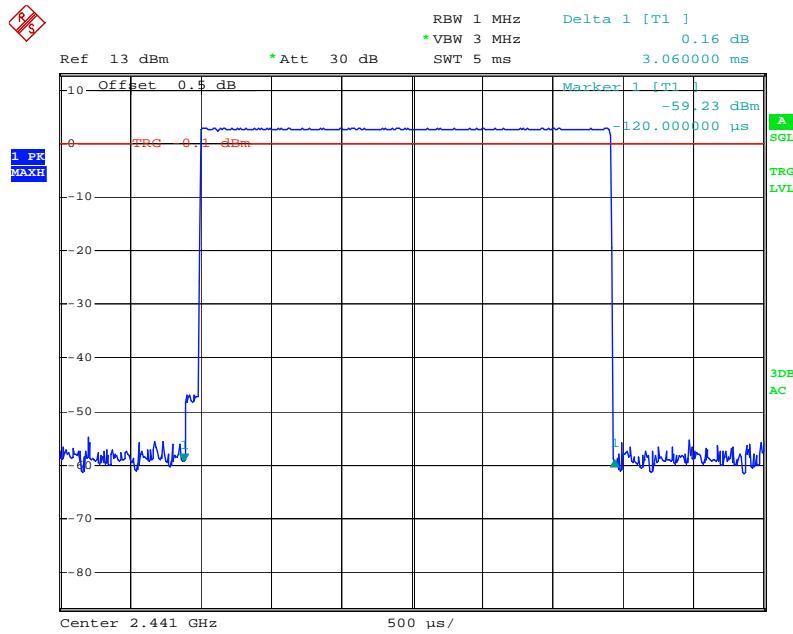
Date: 28.APR.2011 04:37:51

DH5:*Test Mode: Transmitting*

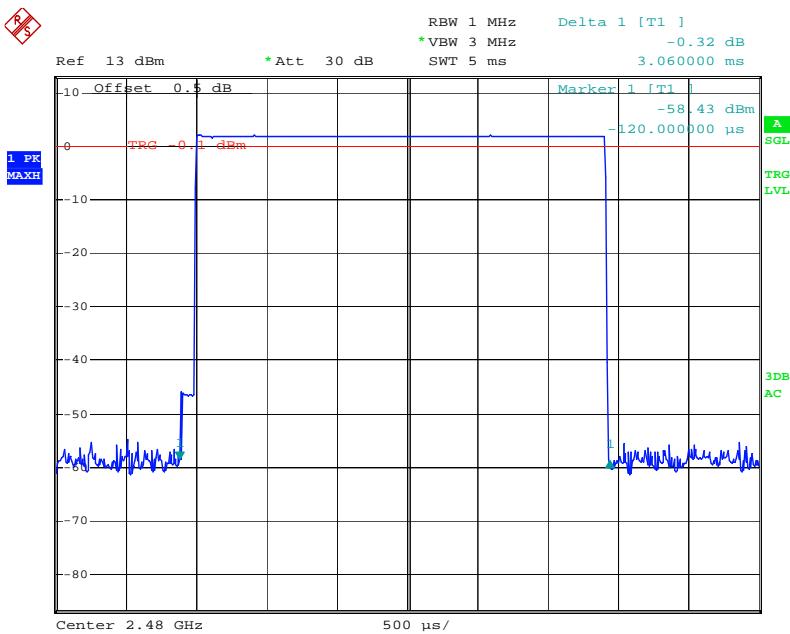
Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR	Low	3.06	0.327	0.4	Pass
	Middle	3.06	0.327	0.4	Pass
	High	3.06	0.327	0.4	Pass
<i>Note: Dwell time = Pulse time*(1600/6/79)*31.6S</i>					
EDR	Low	3.07	0.328	0.4	Pass
	Middle	3.08	0.329	0.4	Pass
	High	3.07	0.328	0.4	Pass
<i>Note: Dwell time = Pulse time*(1600/6/79)*31.6S</i>					

BDR:**Low Channel**

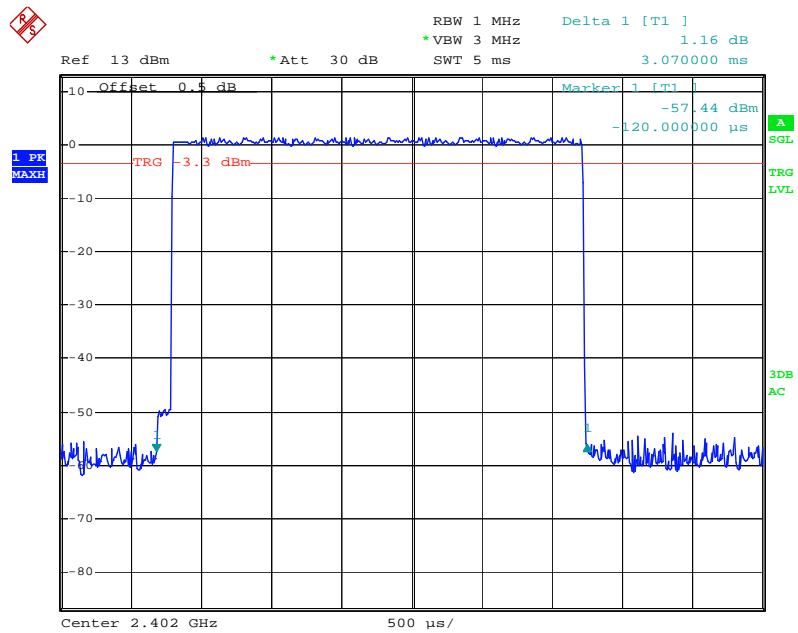
Date: 27.APR.2011 06:23:15

Middle Channel

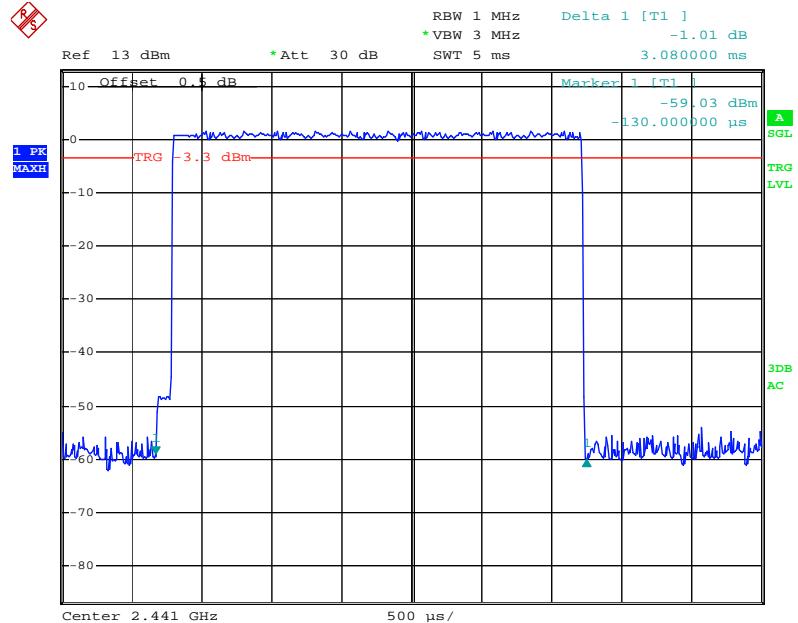
Date: 27.APR.2011 06:24:11

High Channel

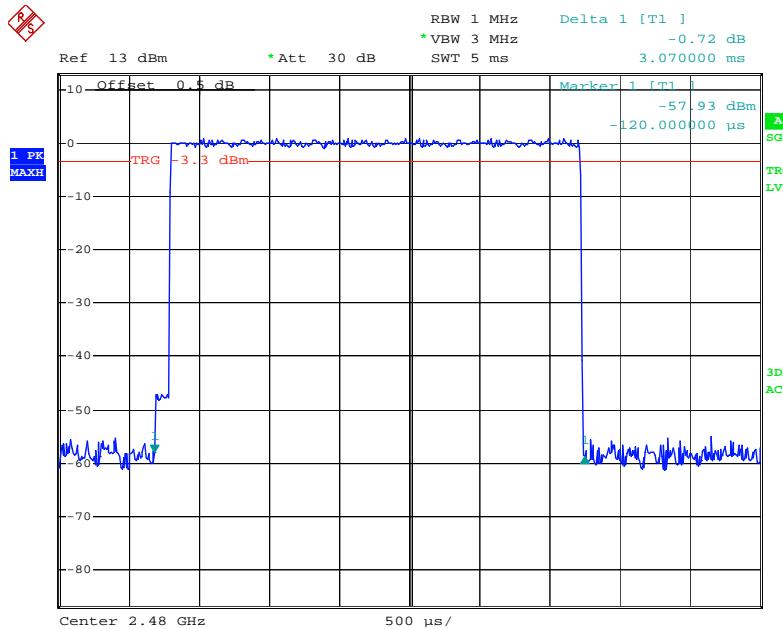
Date: 27.APR.2011 06:25:02

EDR:**Low Channel**

Date: 28.APR.2011 04:40:18

Middle Channel

Date: 28.APR.2011 04:41:00

High Channel

Date: 28.APR.2011 04:41:42

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

**Test Data****Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

* The testing was performed by Sula Huang on 2011-04-27 to 2011-04-28.

Test Result: Compliance.

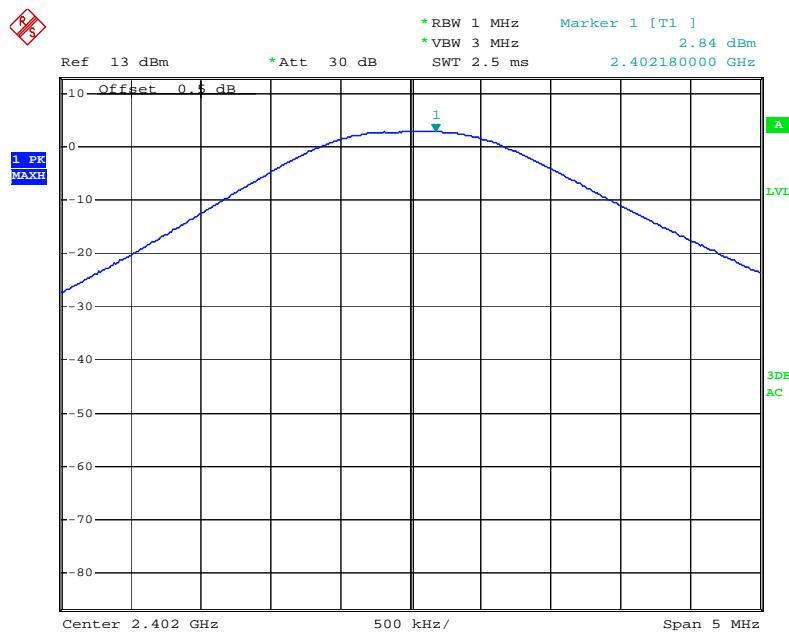
Please refer to following table and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR	Low	2402	2.84	1.923	1000
	Middle	2441	3.00	1.995	1000
	High	2480	2.17	1.648	1000
EDR	Low	2402	1.98	1.578	1000
	Middle	2441	2.23	1.671	1000
	High	2480	1.37	1.371	1000

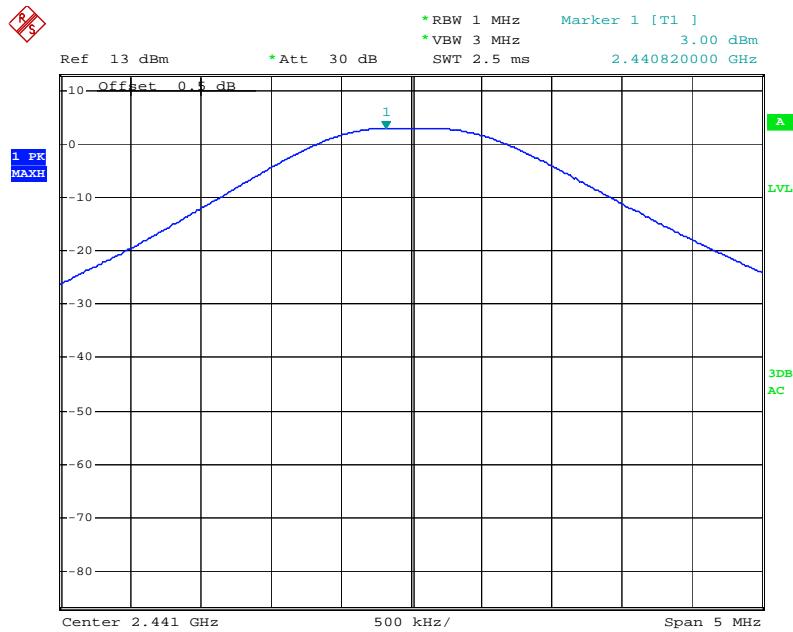
BDR:

Low Channel



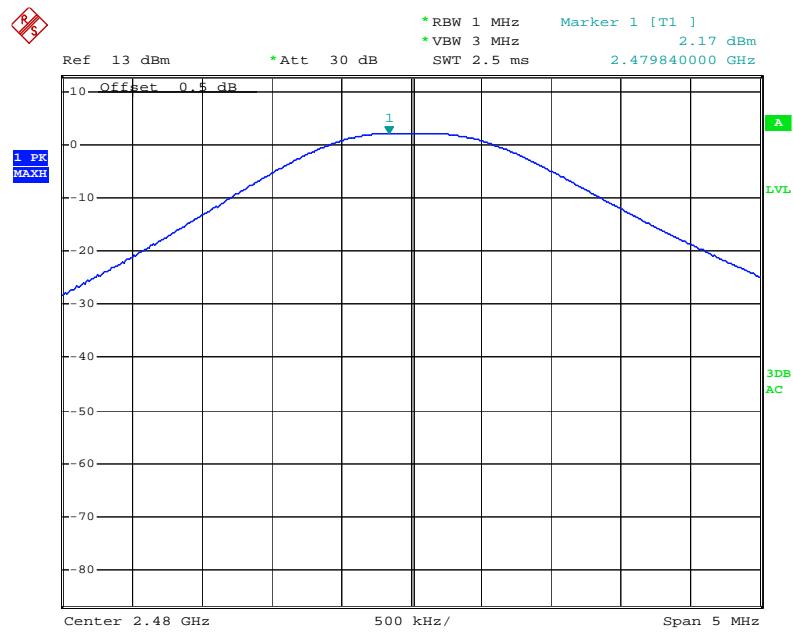
Date: 27.APR.2011 05:16:54

Middle Channel

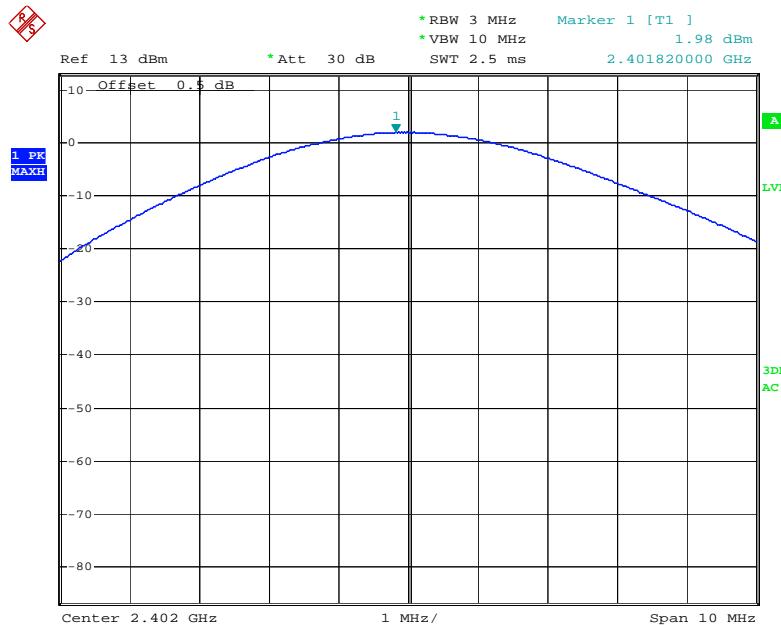


Date: 27.APR.2011 05:18:14

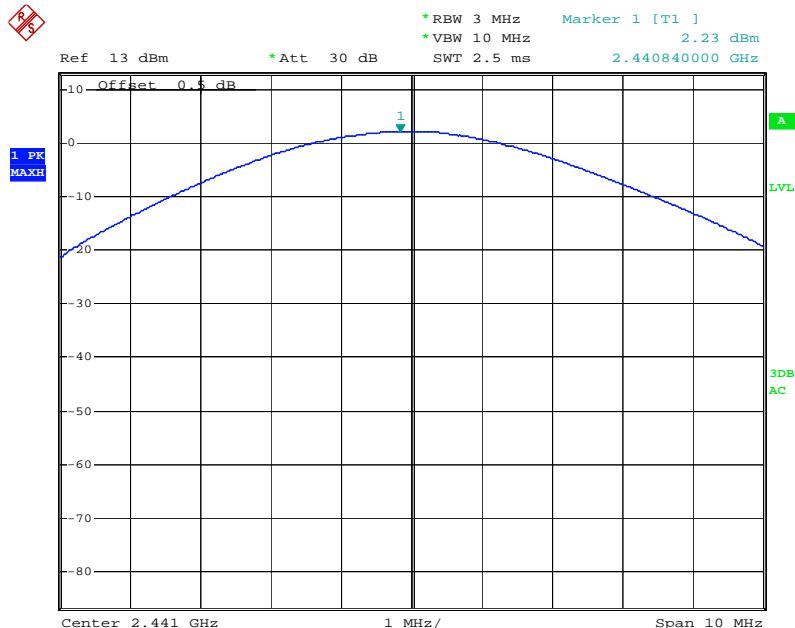
High Chanel



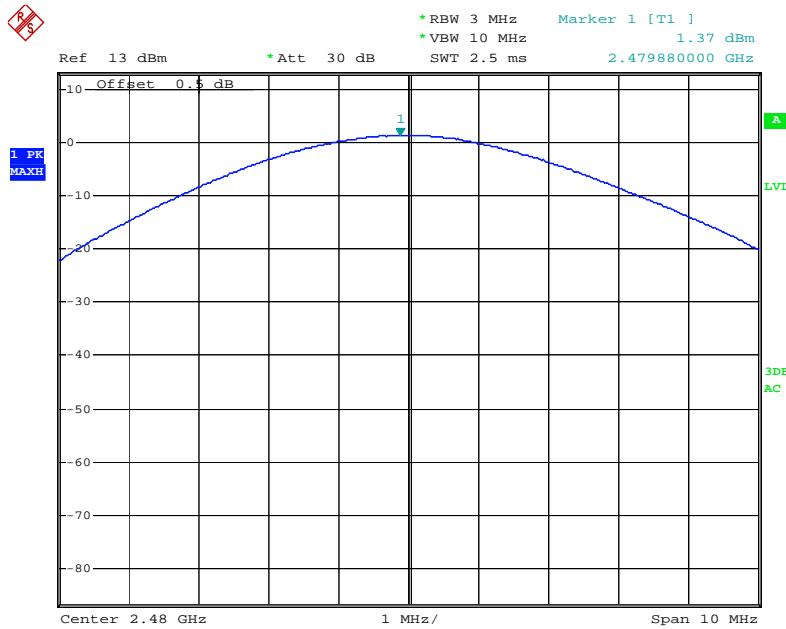
Date: 27.APR.2011 05:19:17

EDR:**Low Channel**

Date: 28.APR.2011 03:39:14

Middle Channel

Date: 28.APR.2011 03:39:58

High Chanel

Date: 28.APR.2011 03:40:35

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1 MHz, VBW=3 MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	101 kPa

*The testing was performed by Sula Huang on 2011-04-27 to 2011-04-28.

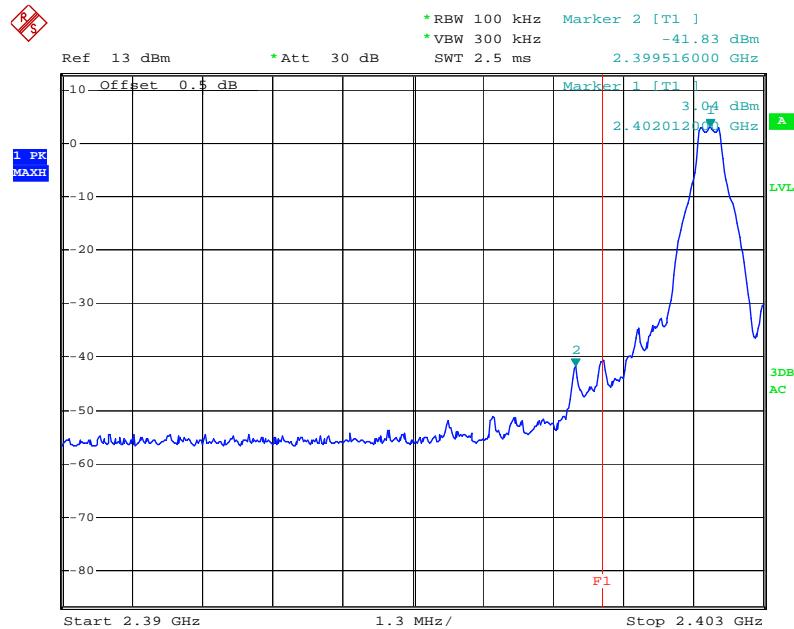
Test Result: Compliance, please refer to the following table and plots.

Test Mode: Transmitting

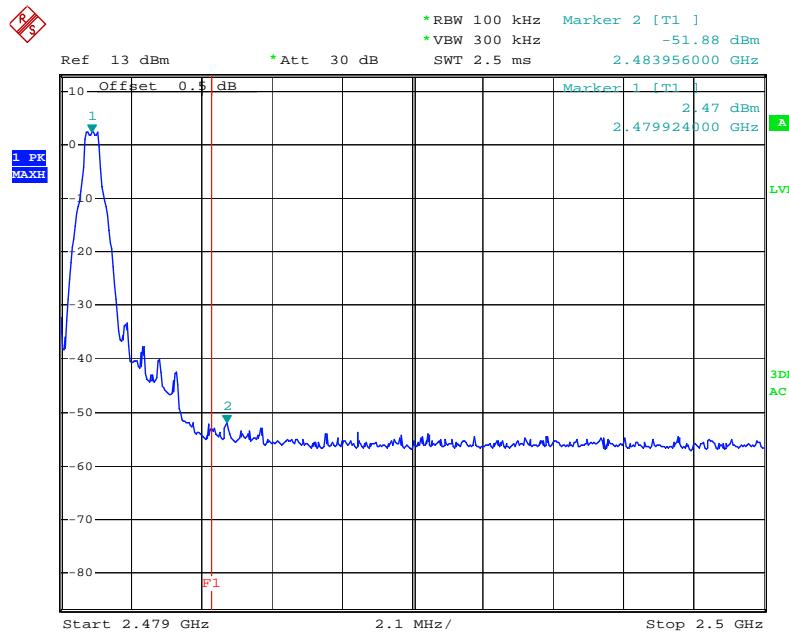
Mode	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
BDR	2399.516	44.87	20
	2483.956	54.35	20
EDR	2399.620	47.50	20
	2483.872	53.09	20

BDR:

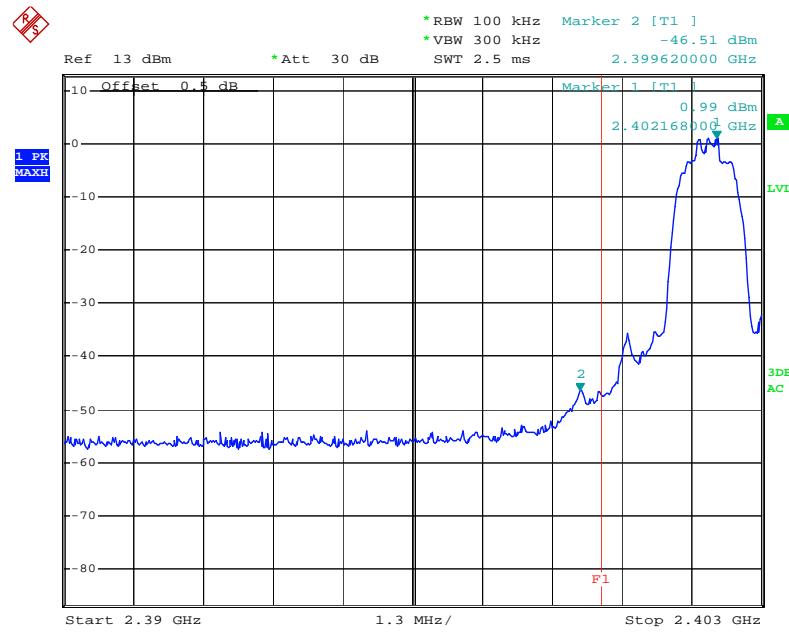
Band Edge: Left Side



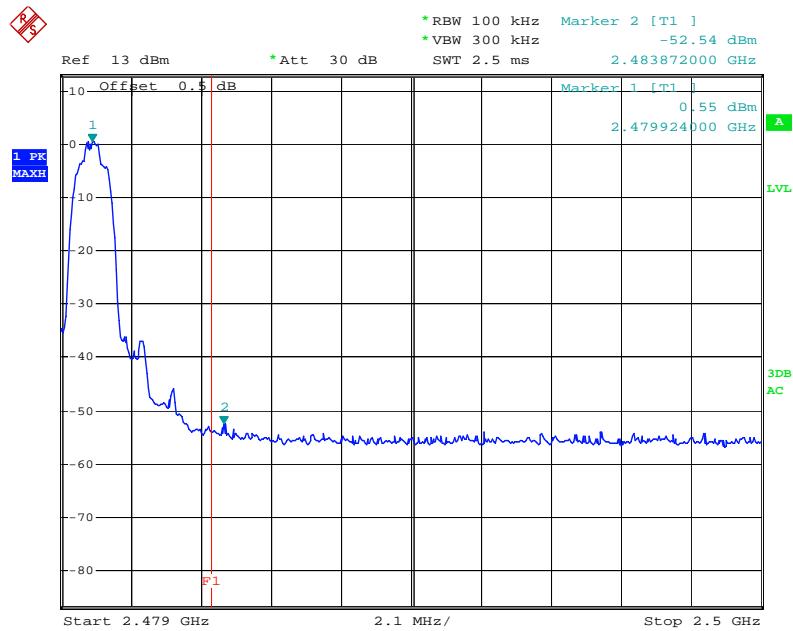
Date: 27.APR.2011 05:49:19

Band Edge: Right Side

Date: 27.APR.2011 05:51:40

EDR:**Band Edge: Left Side**

Date: 28.APR.2011 04:11:47

Band Edge: Right Side

Date: 28.APR.2011 04:15:13

PRODUCT SIMILARITY DECLARATION LETTER



Zhongshan K-mate General Electronics Co., Ltd

Company Address: B1 Building, Fuwan Industrial Zone, Fuwan Nan Road, East District, Zhongshan, China
Tel: +86 760 88668065
Fax: +86 760 88668103

Product Similarity Declaration

To Whom It May Concern,

We, Zhongshan K-mate General Electronics Co., Ltd, hereby declare that our Product Name: Bluetooth Stereo Headset, Model Number: IO14H01MC is electrically identical with the Model Number: BTH015 that was certified by BACL. They both belong to the same product, only the name of Model Number is different.

Please contact me if you have any question.

Signature:

A handwritten signature in black ink that appears to read "Decai Liu".

Decai Liu /R&D General Manager

Date: 2011-05-10

***** END OF REPORT *****