

FCC PART 15.247



MEASUREMENT AND TEST REPORT

For

Zhongshan K-mate General Electronics Co., Ltd.

Fuwan Industrial Zone, Fuwan South Road, Sunwen East Road, East District,
Zhongshan, Guangdong, China

FCC ID: WAD-BTH022

Report Type: Original Report	Product Type: Bluetooth Stereo Headset
Test Engineer: Sula Huang	
Report Number: RDG11033001-15.247	
Report Date: 2011-05-02	
Reviewed By: EMC Engineer	Merry Zhao 
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....4
 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4
 OBJECTIVE4
 RELATED SUBMITTAL(S)/GRANT(S).....4
 TEST METHODOLOGY4
 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....6
 DESCRIPTION OF TEST CONFIGURATION6
 EUT EXERCISE SOFTWARE6
 EQUIPMENT MODIFICATIONS6
 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS6
 EXTERNAL I/O CABLE.....6
 CONFIGURATION OF TEST SETUP6
 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS8

FCC §15.203 - ANTENNA REQUIREMENT.....9
 APPLICABLE STANDARD9
 ANTENNA CONNECTOR CONSTRUCTION9

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS10
 APPLICABLE STANDARD10
 MEASUREMENT UNCERTAINTY10
 EUT SETUP.....10
 EMI TEST RECEIVER SETUP.....11
 TEST PROCEDURE11
 TEST EQUIPMENT LIST AND DETAILS.....11
 TEST RESULTS SUMMARY11
 TEST DATA11

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....14
 APPLICABLE STANDARD14
 MEASUREMENT UNCERTAINTY14
 EUT SETUP.....14
 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP15
 TEST PROCEDURE15
 CORRECTED AMPLITUDE & MARGIN CALCULATION15
 TEST EQUIPMENT LIST AND DETAILS.....15
 TEST RESULTS SUMMARY16
 TEST DATA16

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST22
 APPLICABLE STANDARD22
 TEST EQUIPMENT LIST AND DETAILS.....22
 TEST PROCEDURE22
 TEST DATA22

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING.....27

APPLICABLE STANDARD27
TEST EQUIPMENT LIST AND DETAILS.....27
TEST PROCEDURE27
TEST DATA27

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST32
APPLICABLE STANDARD32
TEST EQUIPMENT LIST AND DETAILS.....32
TEST PROCEDURE32
TEST DATA32

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....35
APPLICABLE STANDARD35
TEST EQUIPMENT LIST AND DETAILS.....35
TEST PROCEDURE35
TEST DATA35

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT46
APPLICABLE STANDARD46
TEST EQUIPMENT LIST AND DETAILS.....46
TEST PROCEDURE46
TEST DATA46

FCC §15.247(d) - BAND EDGES TESTING51
APPLICABLE STANDARD51
TEST EQUIPMENT LIST AND DETAILS.....51
TEST PROCEDURE51
TEST DATA52

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The Zhongshan K-mate General Electronics Co.,Ltd's product, model number: BTH022 (FCC ID: WAD-BTH022) or the "EUT" as referred to in this report is a *Bluetooth Stereo Headset*, which measures approximately: 5.5 cm (L) x 2.0 cm (W) x 1.0 cm (H), rated input voltage: DC 3.7 V built-in rechargeable battery.

** All measurement and test data in this report was gathered from production sample serial number: 1103021 (Assigned by BACL, Shenzhen). The EUT was received on 2011-03-30.*

Objective

This Type approval report is prepared on behalf of *Zhongshan K-mate General Electronics Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 guide accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which is provided by manufacture.

EUT Exercise Software

N/A

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Dell	Notebook	PP05L	N/A


External I/O Cable

Cable Description	Length (m)	From Port	To
Unshielded Detachable USB Charging Cable	1.2	Charging Jack	Notebook
Unshielded Detachable Earphone Cable	0.9	Audio output port	N/A

Configuration of Test Setup

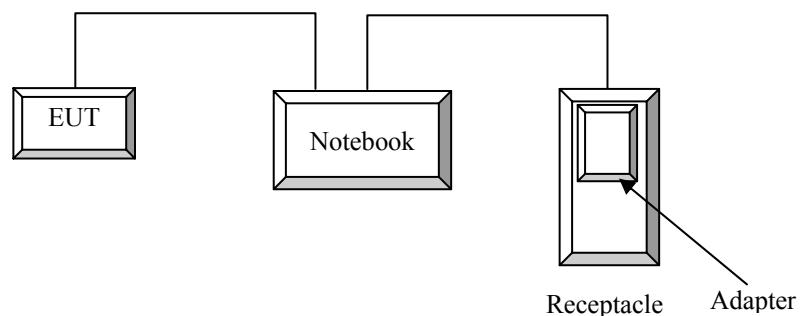

Block Diagram of Test Setup

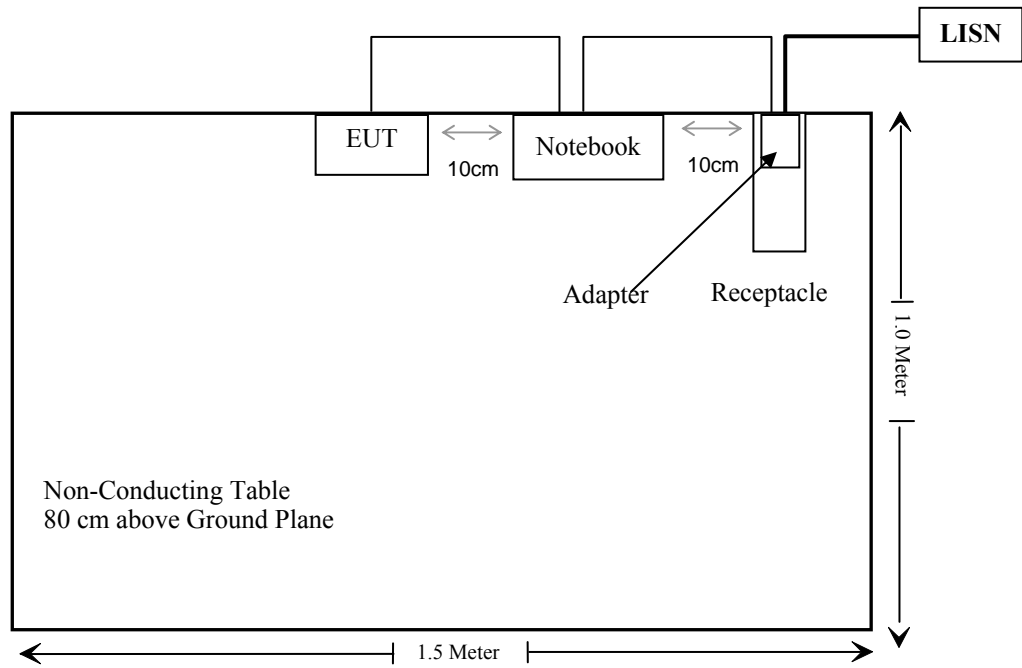

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a PCB layout antenna, which in accordance to §15.203, the maximum gain is 0 dBi; please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB ($k=2$, 95% level of confidence)..

EUT Setup

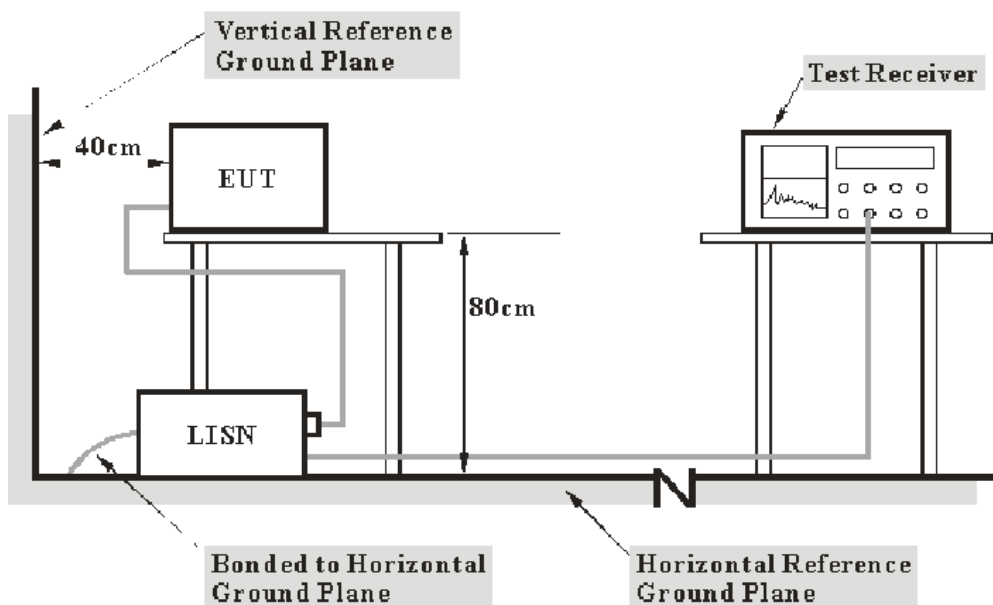

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of notebook was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i><u>Frequency Range</u></i>	<i><u>IF B/W</u></i>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

4.17 dB at 0.270 MHz in the **Neutral** conducted mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0kPa

* The testing was performed by Sula Huang on 2011-04-28.


Test Mode: Charging

AC 120V, 60 Hz, Line

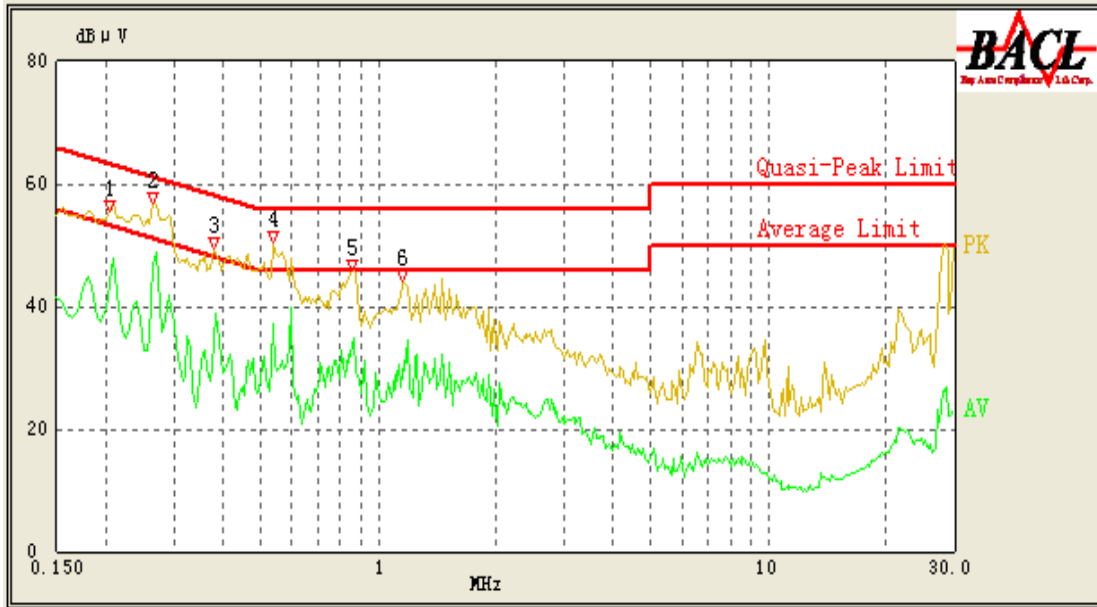

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/ QP/Ave.)
0.265	46.79	10.02	52.71	5.92	Ave.
0.535	37.17	10.19	46.00	8.83	Ave.
0.540	46.93	10.19	56.00	9.07	QP
0.205	43.91	10.06	54.43	10.52	Ave.
0.265	51.55	10.02	62.71	11.16	QP
0.860	33.37	10.13	46.00	12.63	Ave.
1.165	31.27	10.12	46.00	14.73	Ave.
0.380	34.42	10.08	49.43	15.01	Ave.
0.205	49.35	10.06	64.43	15.08	QP
0.860	40.48	10.13	56.00	15.52	QP
0.380	42.62	10.08	59.43	16.81	QP
1.155	38.23	10.12	56.00	17.77	QP

AC 120V, 60 Hz, Neutral

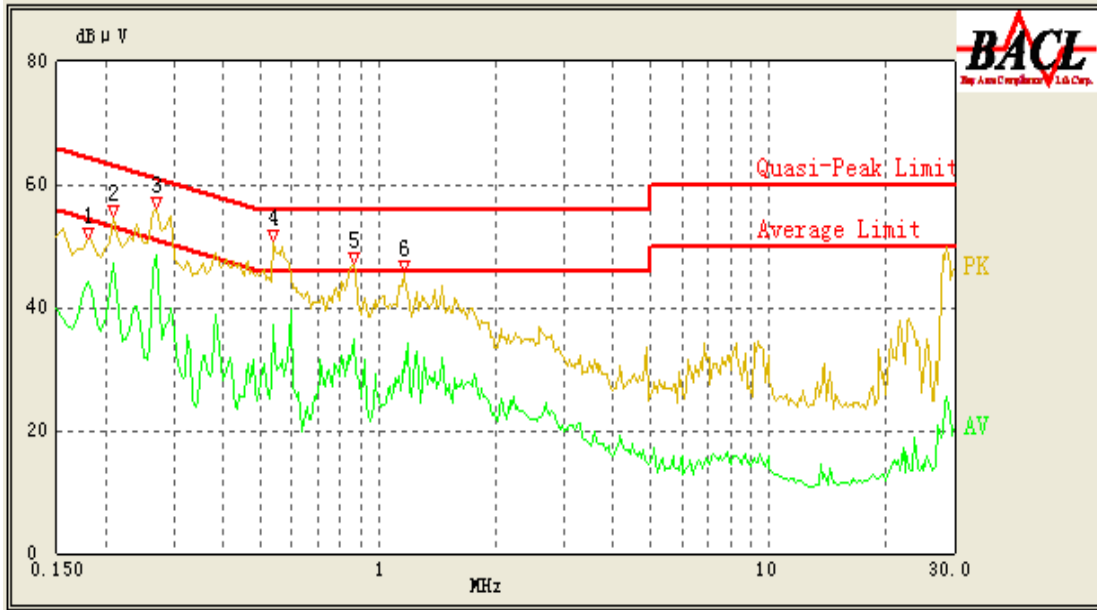

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Remark (PK/ QP/Ave.)
0.270	48.40	10.02	52.57	4.17	Ave.
0.210	47.05	10.06	54.29	7.24	Ave.
0.540	47.13	10.19	56.00	8.87	QP
0.540	37.12	10.19	46.00	8.88	Ave.
0.270	52.46	10.02	62.57	10.11	QP
0.865	34.92	10.13	46.00	11.08	Ave.
0.180	44.04	10.08	55.14	11.10	Ave.
0.210	50.66	10.06	64.29	13.63	QP
0.865	41.62	10.13	56.00	14.38	QP
1.165	31.08	10.12	46.00	14.92	Ave.
1.165	40.74	10.12	56.00	15.26	QP
0.180	48.57	10.08	65.14	16.57	QP

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB. ($k=2$, 95% level of confidence).

EUT Setup

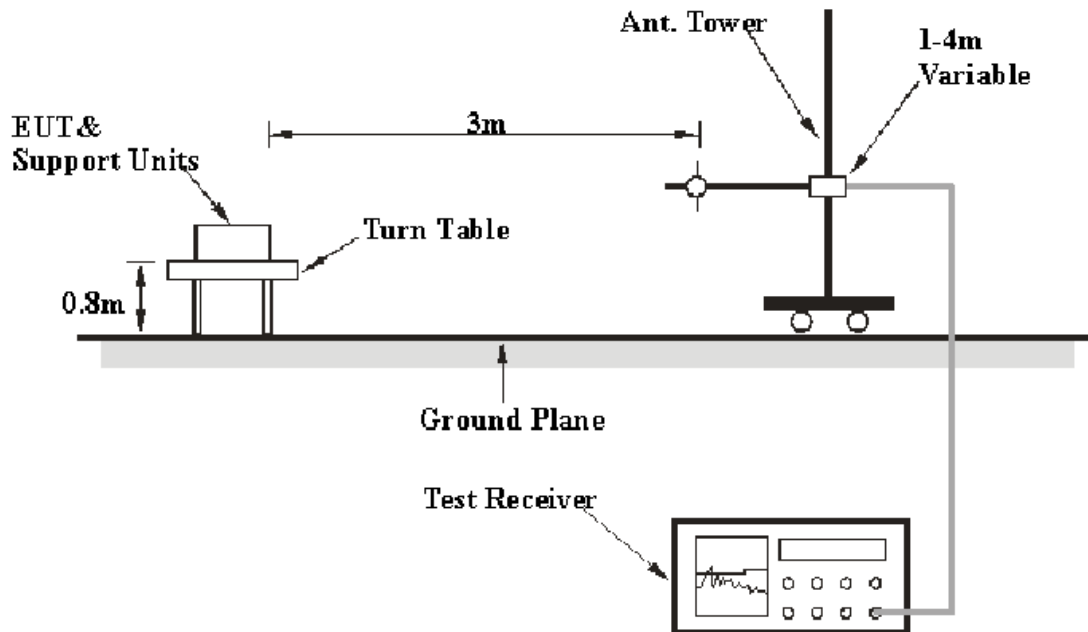

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

Test Procedure

For the radiated emissions test, the adapter was connected to the outlet of the LISN

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2010-07-05	2011-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2010-05-05	2011-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

Below 1 GHz

Charging mode: 9.6 dB at 461.122000 MHz in the Horizontal polarization
Transmitting mode (BDR): 5.4 dB at 300.493750 MHz in the Horizontal polarization
Transmitting mode (EDR): 7.8 dB at 300.563250 MHz in the Horizontal polarization

Above 1 GHz

Transmitting mode (BDR): 6.79 dB at 4804 MHz in the Vertical polarization (Low Channel)
Transmitting mode (EDR): 6.12 dB at 4960 MHz in the Vertical polarization (High Channel)

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Sula Huang on 2011-04-22.


1) 30-1000 MHz:

Test Mode: Charging

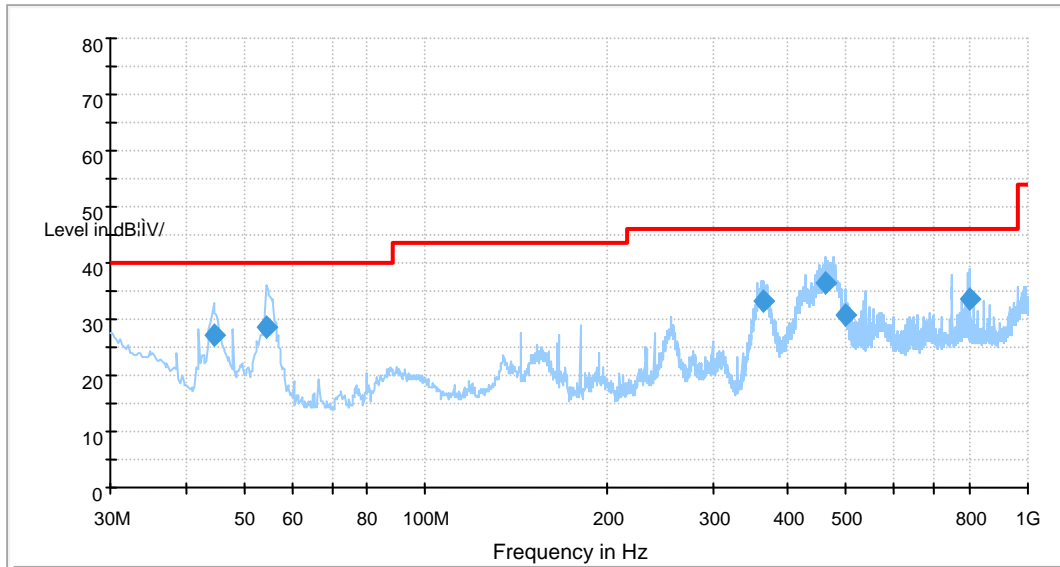


Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
461.122000	36.4	102.0	H	242.0	-9.0	46.0	9.6
54.675750	28.6	108.0	V	220.0	-18.0	40.0	11.4
799.592500	33.5	191.0	V	113.0	-1.8	46.0	12.5
44.751500	27.1	108.0	V	57.0	-15.0	40.0	12.9
364.183250	33.1	107.0	H	106.0	-10.8	46.0	12.9
498.676000	30.9	176.0	V	117.0	-8.4	46.0	15.1

Test Mode: Transmitting (BDR)

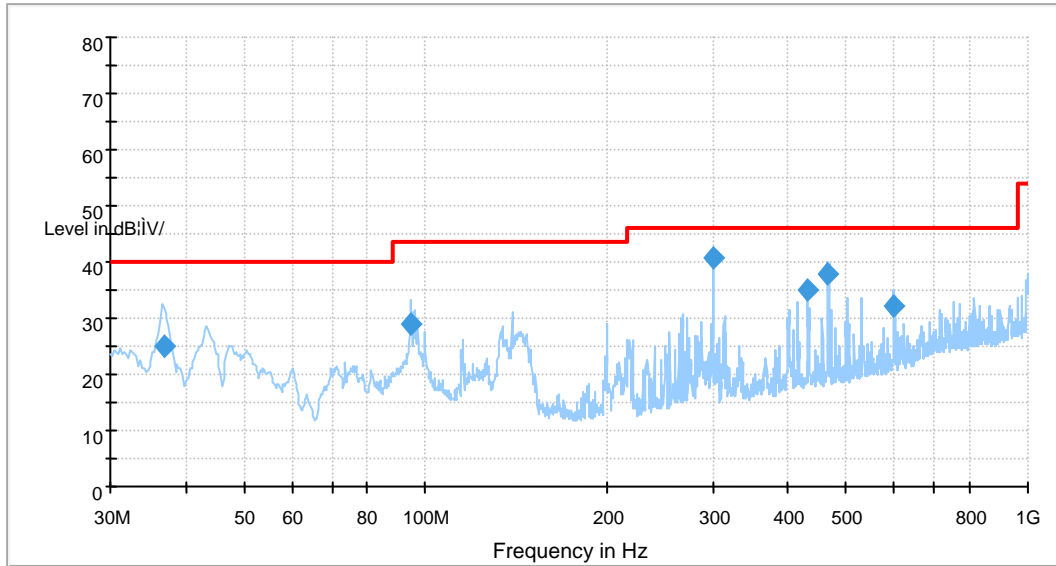

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
300.493750	40.6	104.0	H	327.0	-12.4	46.0	5.4
465.354500	37.7	123.0	V	185.0	-8.9	46.0	8.3
432.081500	35.1	138.0	V	150.0	-9.4	46.0	10.9
598.420000	32.0	332.0	H	42.0	-5.8	46.0	14
94.250000	28.8	400.0	H	237.0	-18.7	43.5	14.7
36.859500	25.1	105.0	V	76.0	-8.7	40.0	14.9

Test Mode: Transmitting (EDR)

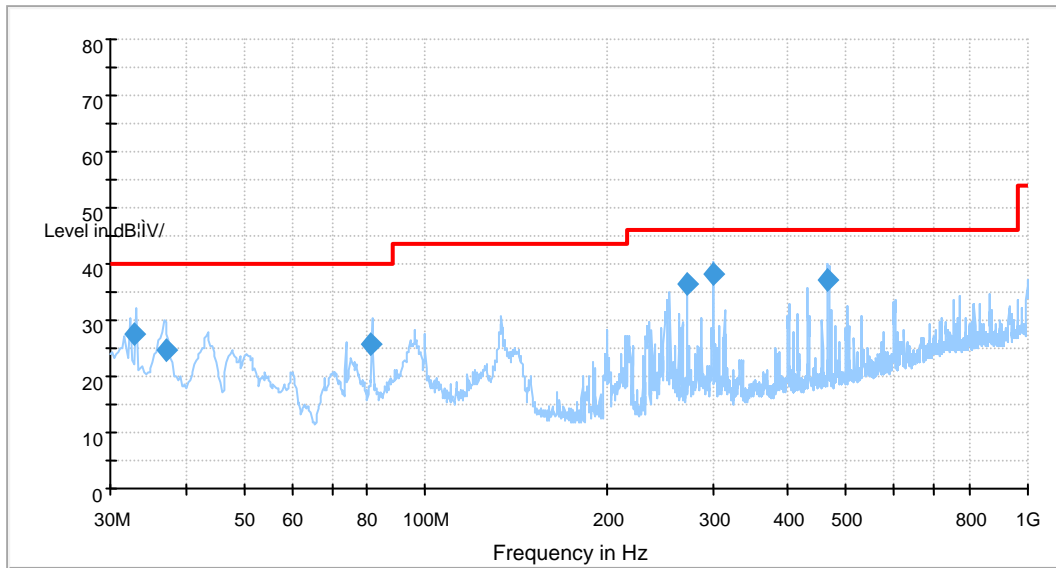

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
300.563250	38.2	108.0	H	76.0	-12.4	46.0	7.8
465.499750	37.3	110.0	V	187.0	-8.9	46.0	8.7
271.745750	36.4	109.0	H	113.0	-12.0	46.0	9.6
32.829000	27.4	139.0	V	286.0	-7.4	40.0	12.6
81.333250	25.8	109.0	V	324.0	-18.0	40.0	14.2
37.096500	24.5	109.0	V	302.0	-10.2	40.0	15.5

2) Above 1 GHz*Test Mode: Transmitting (BDR)*

Indicated		Detector (PK/Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBμV)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Comment
Low Channel (2402 MHz)												
4804	34.26	Ave.	77	2.0	V	35.4	4.30	26.75	47.21	54	6.79	harmonic
4804	32.43	Ave.	75	2.0	H	36.6	4.30	26.75	46.58	54	7.42	harmonic
4804	52.32	PK	77	2.0	V	35.4	4.30	26.75	65.27	74	8.73	harmonic
4804	49.58	PK	75	2.0	H	36.6	4.30	26.75	63.73	74	10.27	harmonic
2315.3	33.57	Ave.	150	1.5	H	30.6	2.98	26.83	40.32	54	13.68	spurious
2312.1	32.89	Ave.	120	1.5	V	30.6	2.98	26.83	39.64	54	14.36	spurious
2312.1	48.47	PK	120	1.5	V	30.6	2.98	26.83	55.22	74	18.78	spurious
2315.3	47.81	PK	150	1.5	H	30.6	2.98	26.83	54.56	74	19.44	spurious
Middle Channel (2441 MHz)												
4882	32.65	Ave.	235	2.2	H	36.6	4.36	26.75	46.86	54	7.14	harmonic
4882	33.61	Ave.	60	2.5	V	35.4	4.36	26.75	46.62	54	7.38	harmonic
4882	52.18	PK	60	2.5	V	35.4	4.36	26.75	65.19	74	8.81	harmonic
4882	49.55	PK	235	2.2	H	36.6	4.36	26.75	63.76	74	10.24	harmonic
1187.9	34.33	Ave.	210	1.9	H	25.1	2.03	26.49	34.97	54	19.03	spurious
1147.3	34.12	Ave.	250	1.6	V	23.8	2.03	26.49	33.46	54	20.54	spurious
1187.9	48.40	PK	210	1.9	H	25.1	2.03	26.49	49.04	74	24.96	spurious
1147.3	47.90	PK	250	1.6	V	23.8	2.03	26.49	47.24	74	26.76	spurious
High Channel (2480 MHz)												
4960	32.49	Ave.	154	2.1	H	36.6	4.40	26.75	46.74	54	7.26	harmonic
4960	32.02	Ave.	67	2.1	V	35.4	4.40	26.75	45.07	54	8.93	harmonic
4960	51.54	PK	67	2.1	V	35.4	4.40	26.75	64.59	74	9.41	harmonic
4960	47.78	PK	154	2.1	H	36.6	4.40	26.75	62.03	74	11.97	harmonic
2483.4	34.81	Ave.	264	1.7	H	30.6	3.03	26.88	41.56	54	12.44	spurious
2483.4	34.71	Ave.	80	1.8	V	29.8	3.03	26.88	40.66	54	13.34	spurious
2483.4	51.36	PK	264	1.7	H	30.6	3.03	26.88	58.11	74	15.89	spurious
2483.4	51.22	PK	80	1.8	V	29.8	3.03	26.88	57.17	74	16.83	spurious

Test Mode: Transmitting (EDR)

Indicated		Detector (PK/Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dB μ V)			Height (m)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre- Amp. (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel (2402 MHz)												
4804	32.08	Ave.	80	2.3	H	36.6	4.30	26.75	46.23	54	7.77	harmonic
4804	32.58	Ave.	80	2.4	V	35.4	4.30	26.75	45.53	54	8.47	harmonic
4804	48.89	PK	80	2.3	H	36.6	4.30	26.75	63.04	74	10.96	harmonic
4804	49.55	PK	80	2.4	V	35.4	4.30	26.75	62.5	74	11.5	harmonic
2324.3	32.25	Ave.	260	1.5	V	30.6	2.98	26.83	39	54	15	spurious
2314.8	32.23	Ave.	130	1.7	H	30.6	2.98	26.83	38.98	54	15.02	spurious
2324.3	46.84	PK	260	1.5	V	30.6	2.98	26.83	53.59	74	20.41	spurious
2314.8	46.49	PK	130	1.7	H	30.6	2.98	26.83	53.24	74	20.76	spurious
Middle Channel (2441 MHz)												
4882	32.61	Ave.	220	2.2	H	36.6	4.36	26.75	46.82	54	7.18	harmonic
4882	33.30	Ave.	70	2.3	V	35.4	4.36	26.75	46.31	54	7.69	harmonic
4882	49.73	PK	70	2.3	V	35.4	4.36	26.75	62.74	74	11.26	harmonic
4882	48.12	PK	220	2.2	H	36.6	4.36	26.75	62.33	74	11.67	harmonic
1156.7	34.10	Ave.	210	1.6	H	25.1	2.03	26.49	34.74	54	19.26	spurious
1153.5	33.82	Ave.	120	1.5	V	23.8	2.03	26.49	33.16	54	20.84	spurious
1156.7	48.06	PK	210	1.6	H	25.1	2.03	26.49	48.7	74	25.3	spurious
1153.5	47.61	PK	120	1.5	V	23.8	2.03	26.49	46.95	74	27.05	spurious
High Channel (2480 MHz)												
4960	34.83	Ave.	65	2.2	V	35.4	4.40	26.75	47.88	54	6.12	harmonic
4960	32.86	Ave.	175	2.2	H	36.6	4.40	26.75	47.11	54	6.89	harmonic
4960	47.55	PK	175	2.2	H	36.6	4.40	26.75	61.8	74	12.2	harmonic
4960	48.33	PK	65	2.2	V	35.4	4.40	26.75	61.38	74	12.62	harmonic
2483.6	31.09	Ave.	72	1.7	H	30.6	3.03	26.88	37.84	54	16.16	spurious
2483.6	31.75	Ave.	60	1.8	V	29.8	3.03	26.88	37.7	54	16.3	spurious
2483.6	51.35	PK	60	1.8	V	29.8	3.03	26.88	57.3	74	16.7	spurious
2483.6	48.06	PK	72	1.7	H	30.6	3.03	26.88	54.81	74	19.19	spurious

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Sula Huang on 2011-04-20 to 2011-04-27.

Test Result: Compliance, please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR	Low	2402	1.004	0.585	Pass
	Adjacent	2403			
	Middle	2441	1.004	0.565	Pass
	Adjacent	2442			
	High	2480	1.004	0.585	Pass
	Adjacent	2479			
EDR	Low	2402	1.002	0.840	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.840	Pass
	Adjacent	2442			
	High	2480	1.002	0.840	Pass
	Adjacent	2479			


Please refer to the following plots.

BDR:


Low Channel

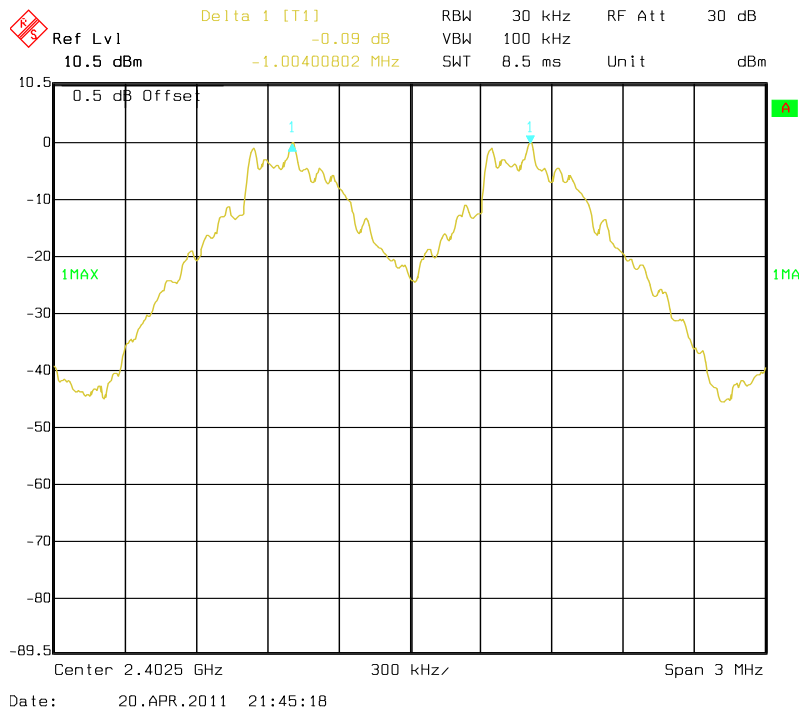

Middle Channel

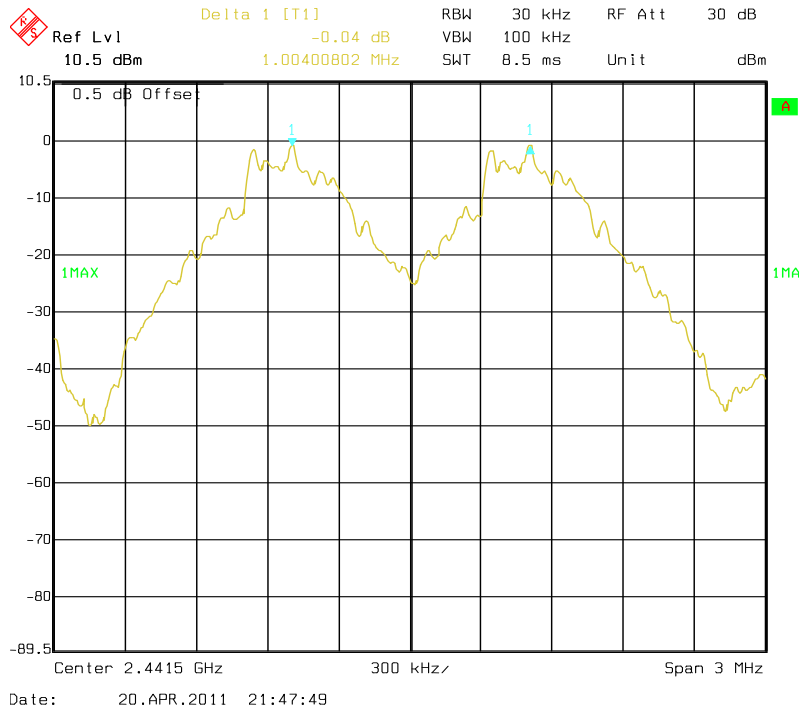


High Channel

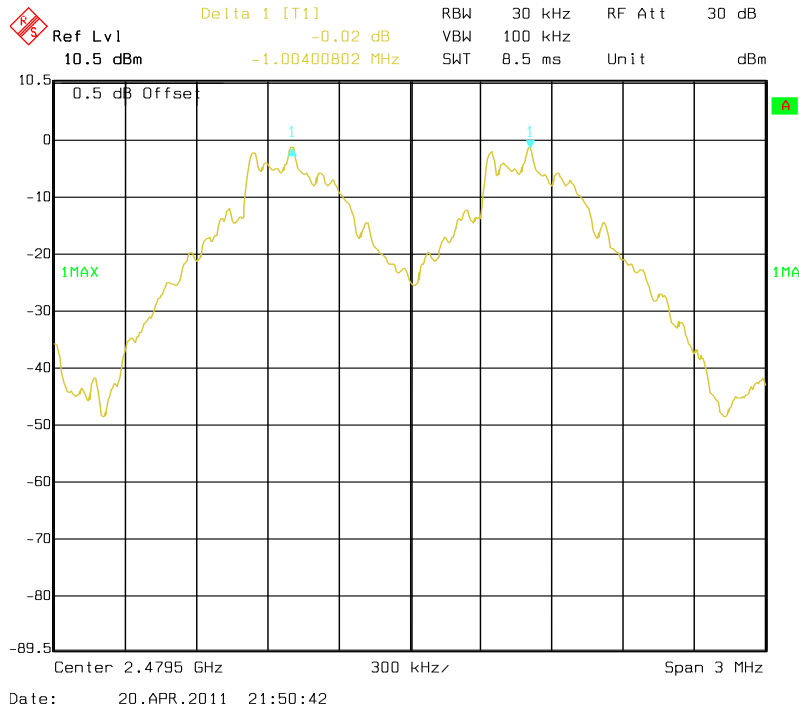


EDR:

Low Channel

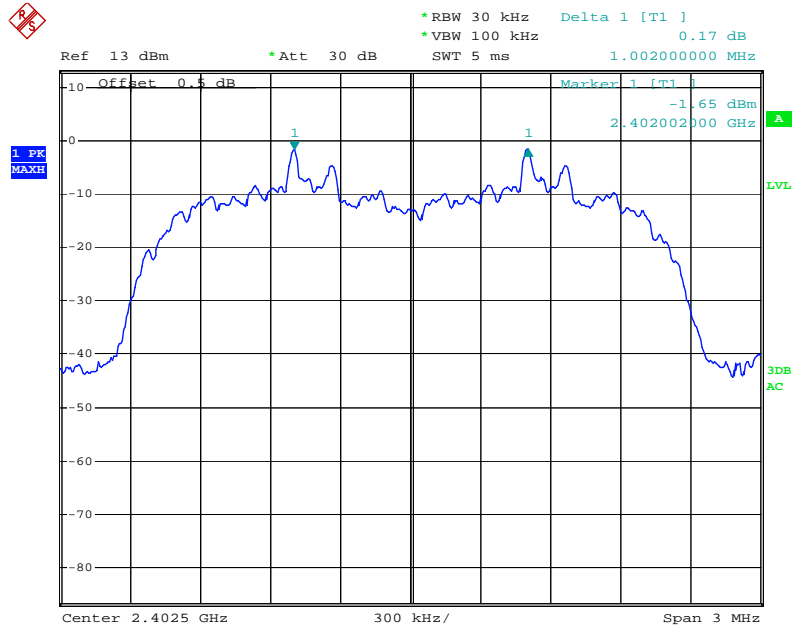


Date: 28.APR.2011 05:49:33

Middle Channel

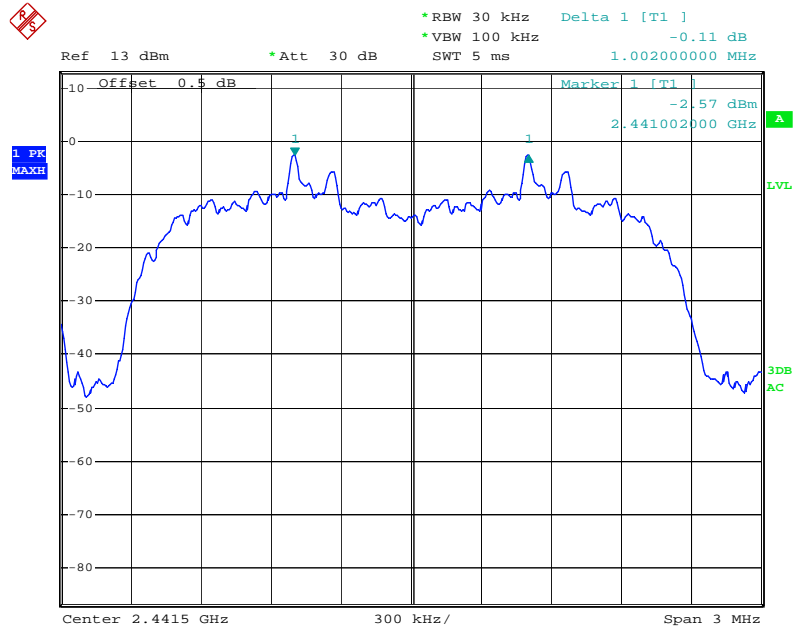

Date: 28.APR.2011 05:51:08

High Channel

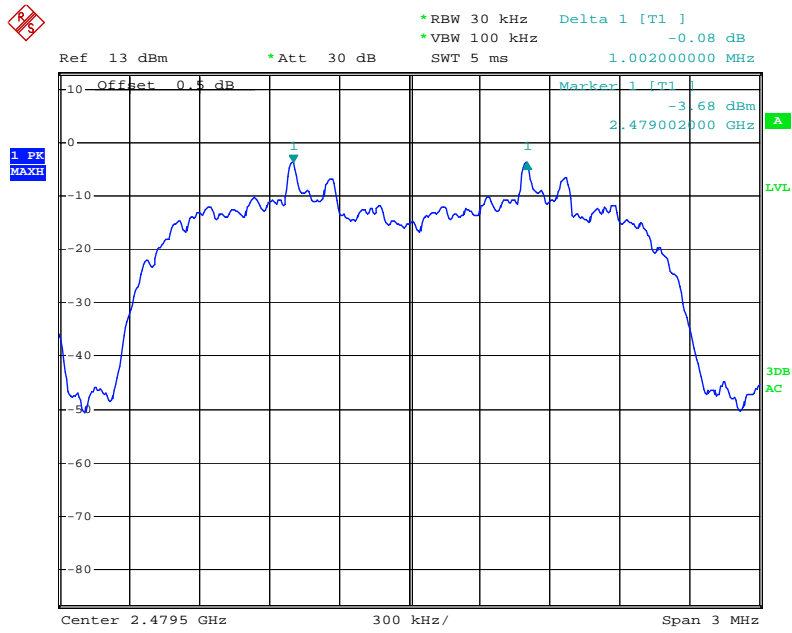

Date: 28.APR.2011 05:52:48

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Sula Huang on 2011-04-20 to 2011-04-27.

Test Result: Compliance, please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR	Low	2402	0.878
	Middle	2441	0.848
	High	2480	0.878
EDR	Low	2402	1.26
	Middle	2441	1.26
	High	2480	1.26


Please refer to the following plots.

BDR:


Low Channel

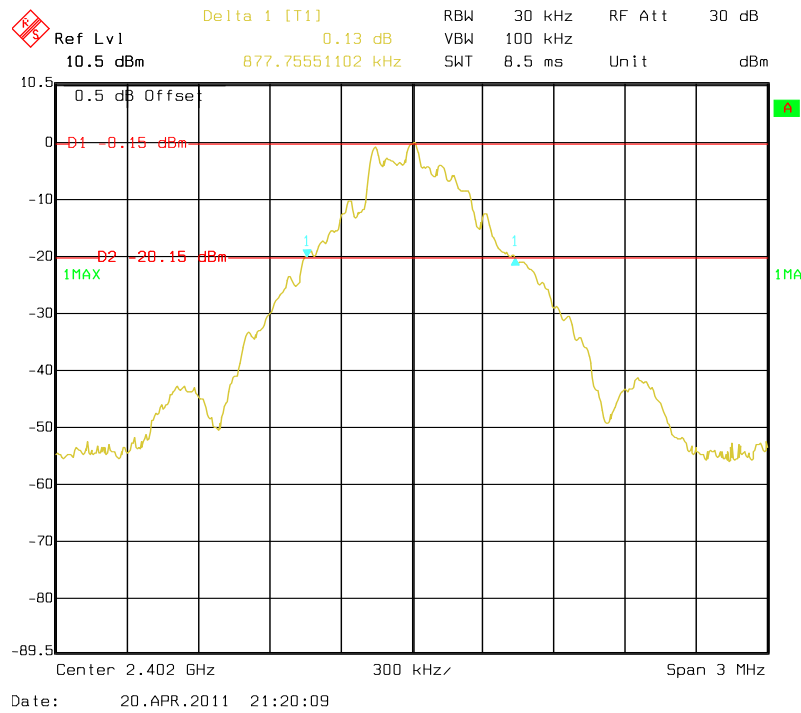

Middle Channel

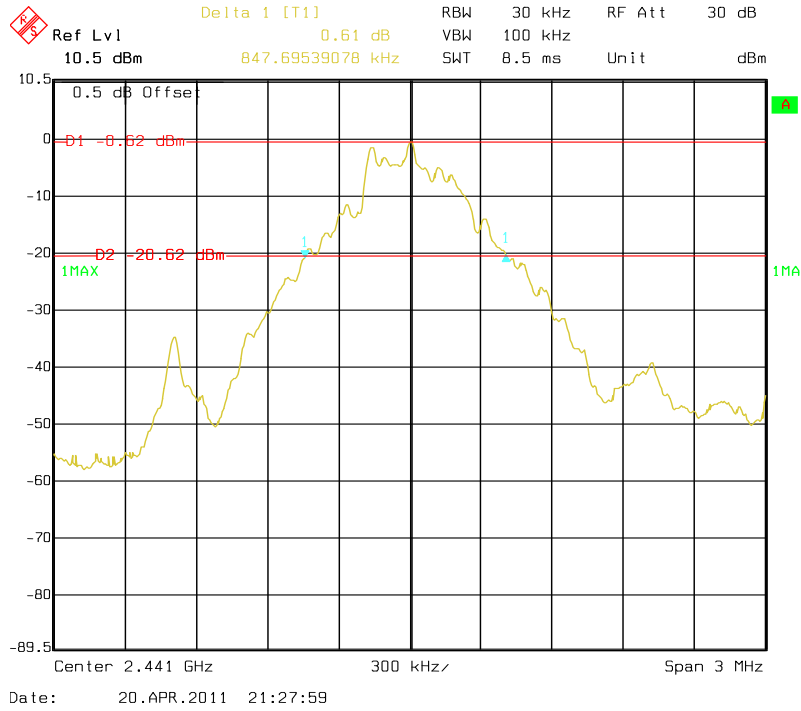


High Channel

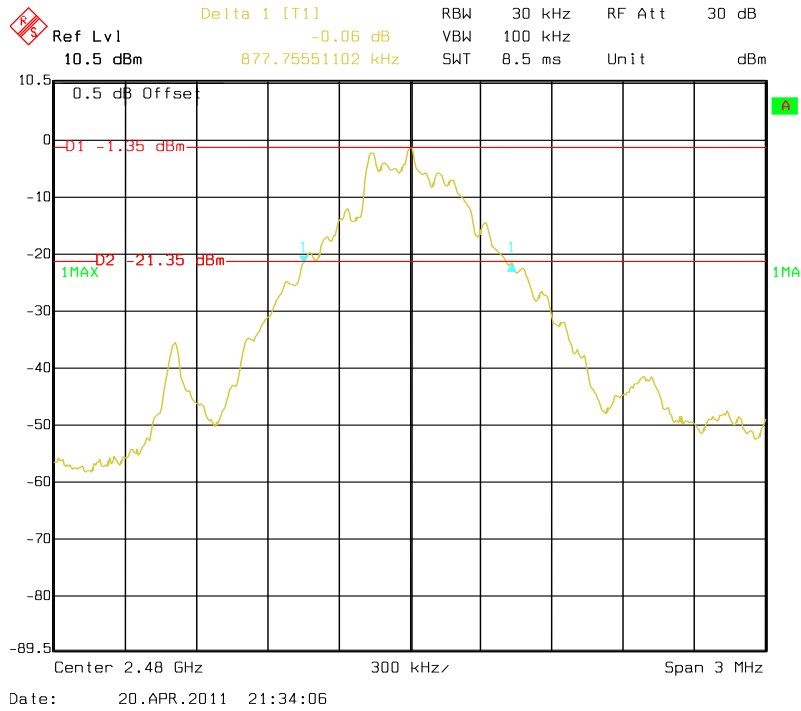


EDR:

Low Channel

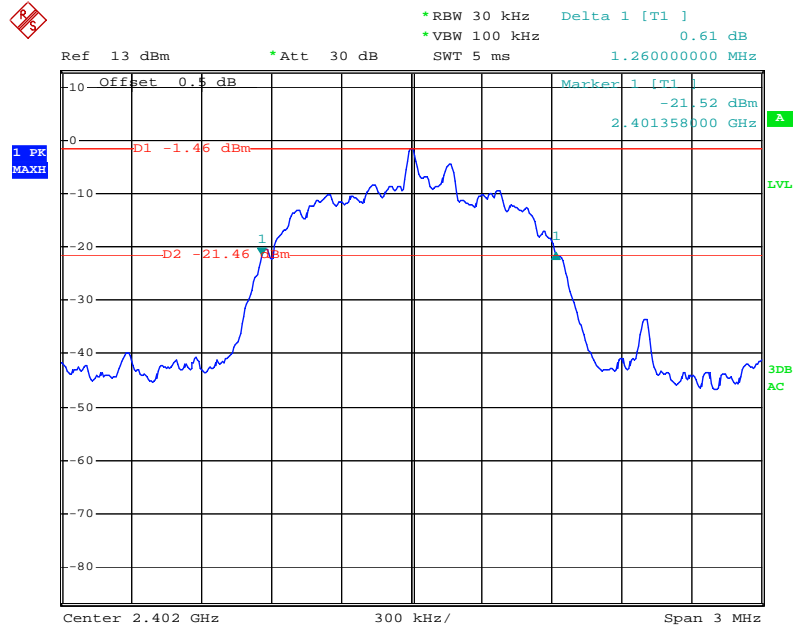


Date: 28.APR.2011 05:44:31

Middle Channel

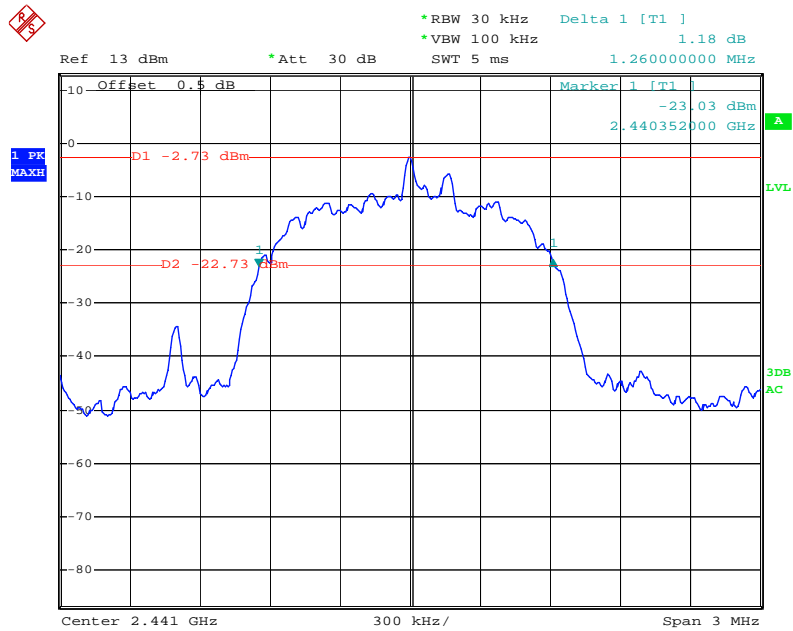

Date: 28.APR.2011 05:46:15

High Channel

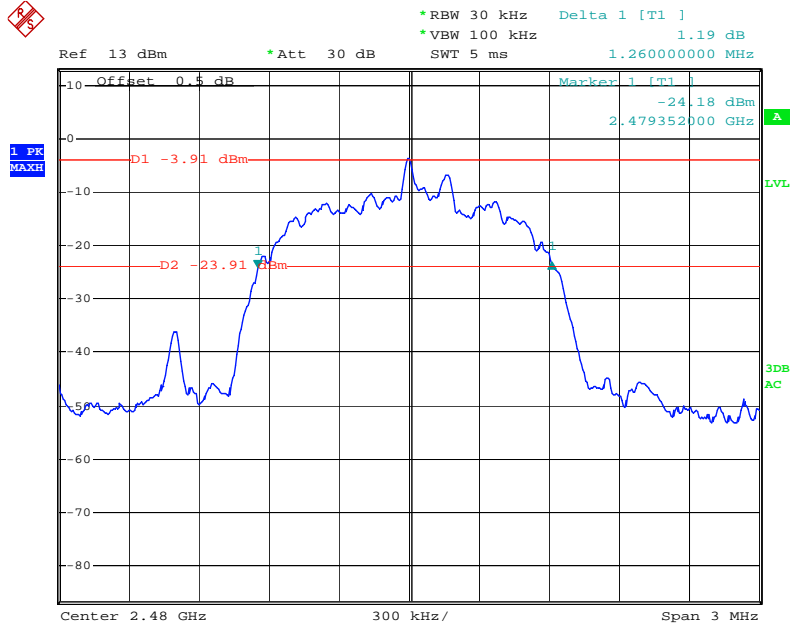

Date: 28.APR.2011 05:48:11

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

The testing was performed by Sula Huang on 2011-04-20 to 2011-04-27.


Test Result: Compliance, please refer to following tables and plots

Test Mode: Transmitting

Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
BDR	2400-2483.5	79	≥ 15
EDR	2400-2483.5	79	≥ 15


BDR:

Number of Hopping Channels

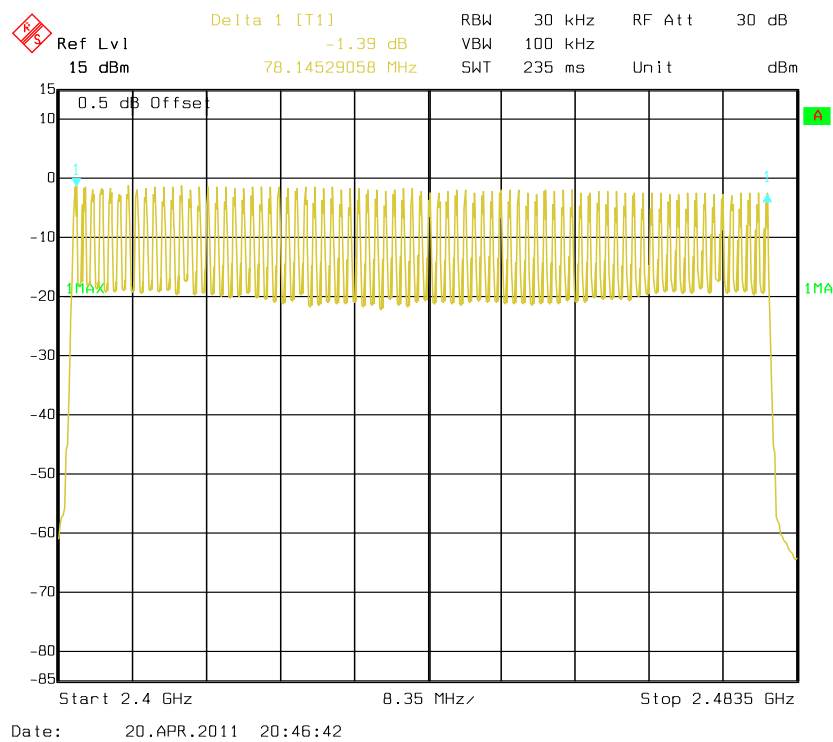

EDR:

Number of Hopping Channels

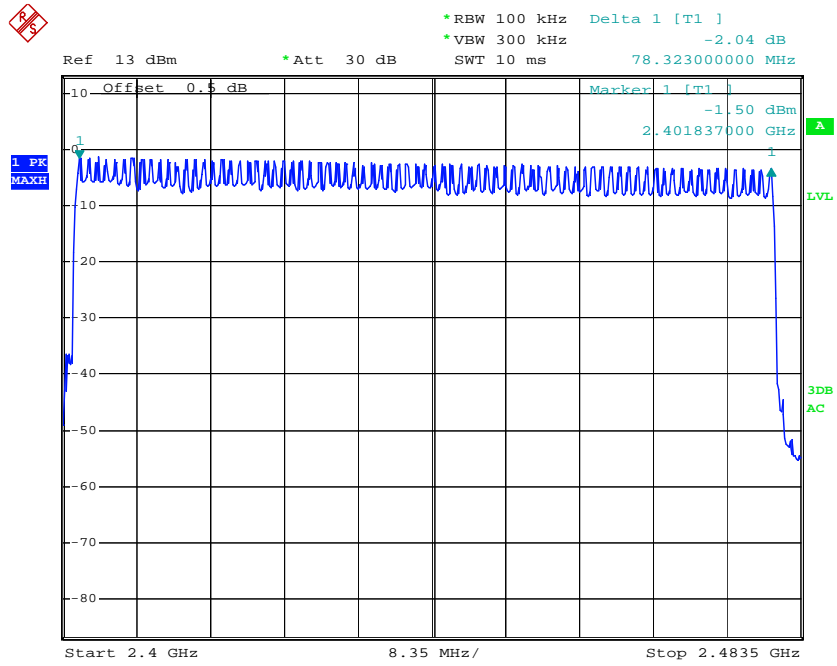

Date: 28.APR.2011 05:39:42

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S

Hop rate=1600/S

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* The testing was performed by Sula Huang on 2011-04-20 to 2011-05-09.


Test Result: Compliance, please refer to following tables and plots

Test Mode: Transmitting (BDR)

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.534	0.171	0.4	Pass
	Middle	0.534	0.171	0.4	Pass
	High	0.534	0.171	0.4	Pass
Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s					
DH 3	Low	1.806	0.289	0.4	Pass
	Middle	1.806	0.289	0.4	Pass
	High	1.806	0.289	0.4	Pass
Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s					
DH 5	Low	3.060	0.327	0.4	Pass
	Middle	3.060	0.327	0.4	Pass
	High	3.060	0.327	0.4	Pass
Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s					


Please refer to the following plots.

Low Channel for DH1

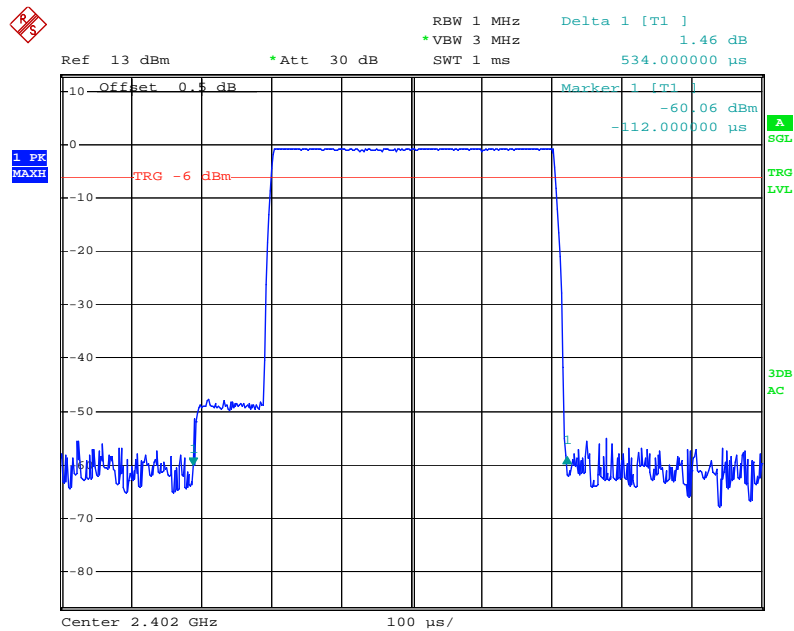


Date: 28.APR.2011 04:58:42

Middle Channel for DH1

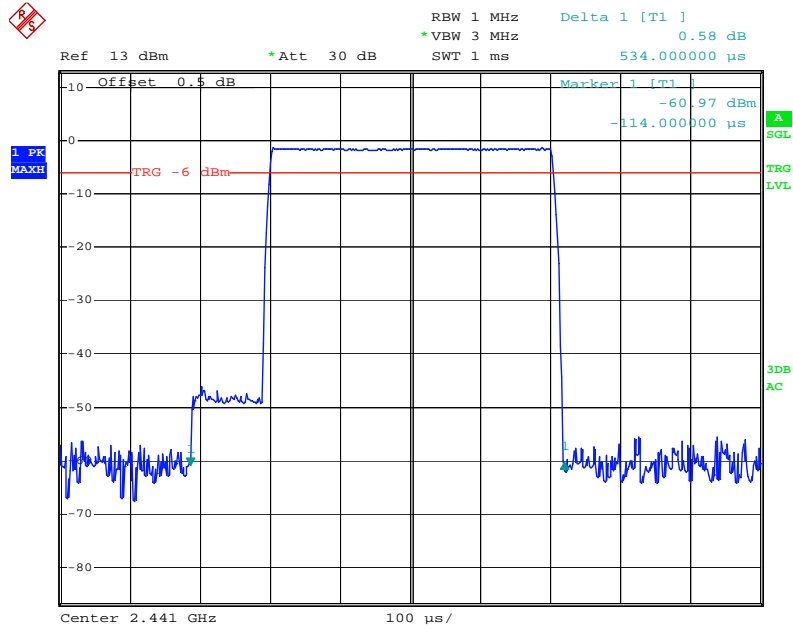


Date: 28.APR.2011 05:01:34

High Channel for DH1

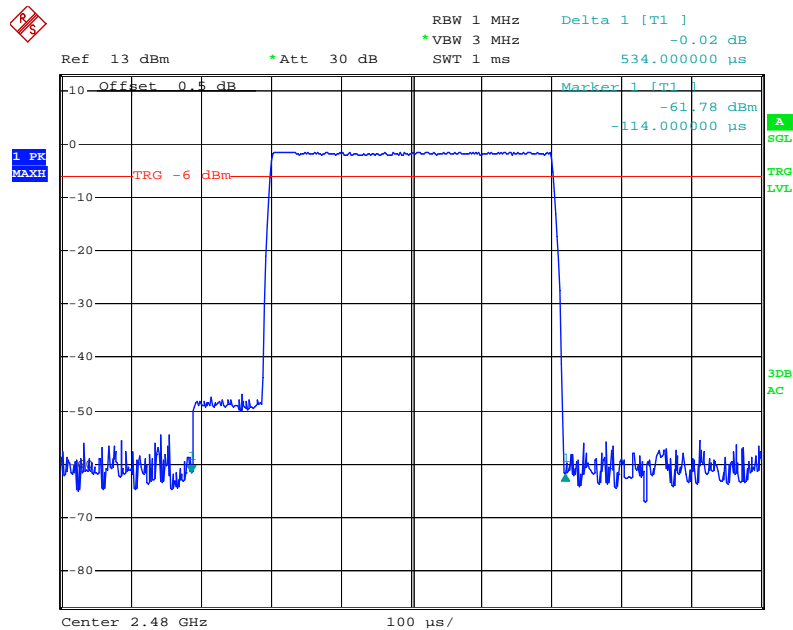


Date: 28.APR.2011 05:02:10

Low Channel for DH3

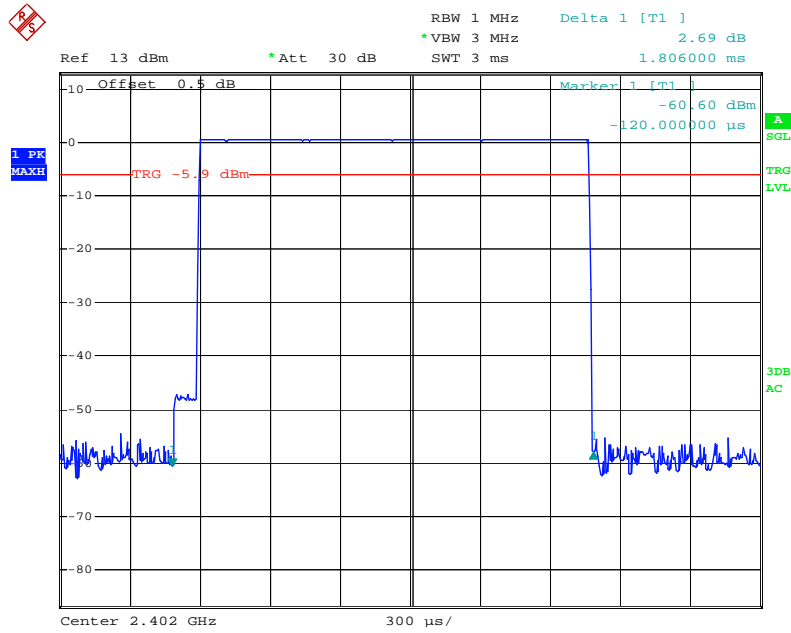


Date: 9.MAY.2011 18:15:57

Middle Channel for DH3

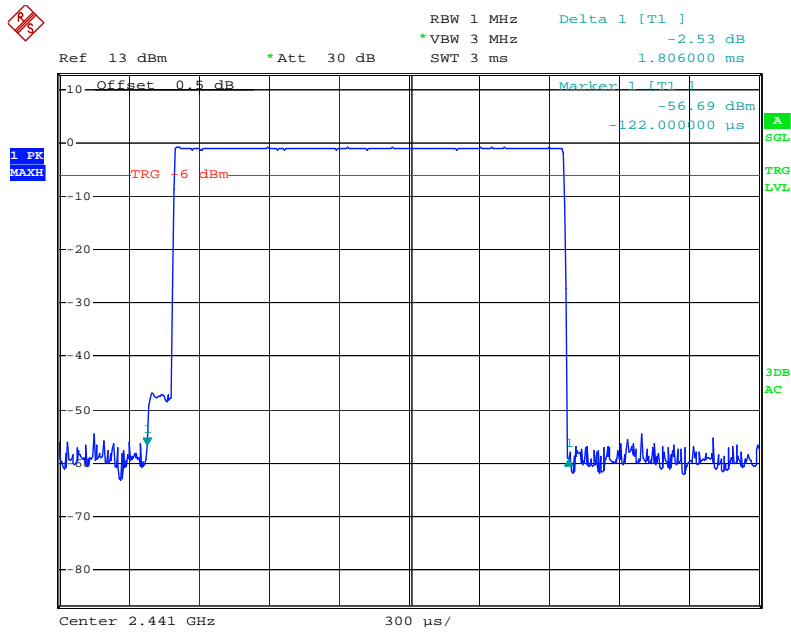


Date: 28.APR.2011 05:04:21

High Channel for DH3

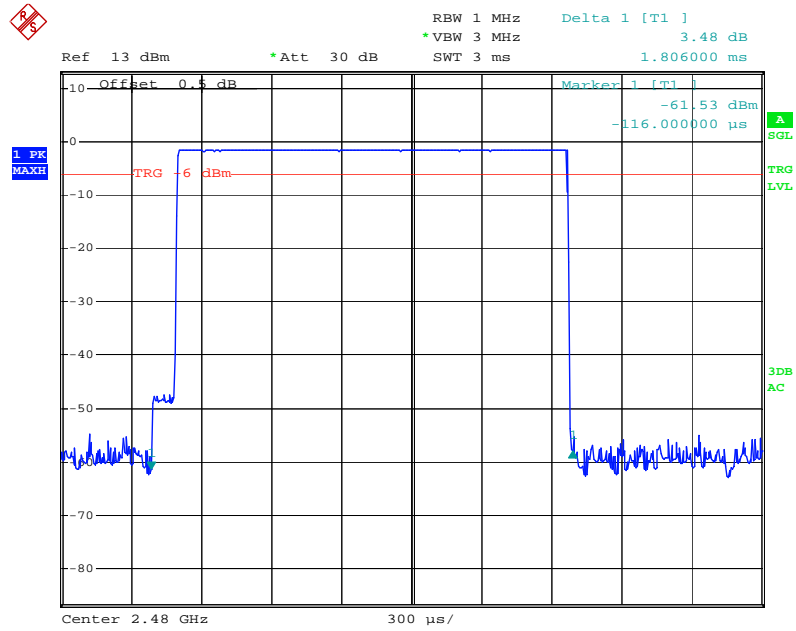


Date: 28.APR.2011 05:05:29

Low Channel for DH5

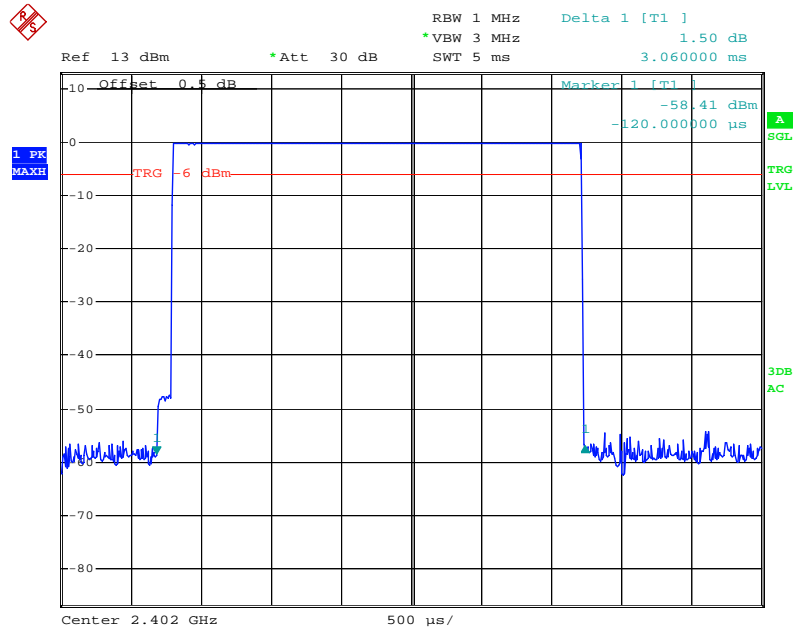


Date: 28.APR.2011 05:07:08

Middle Channel for DH5

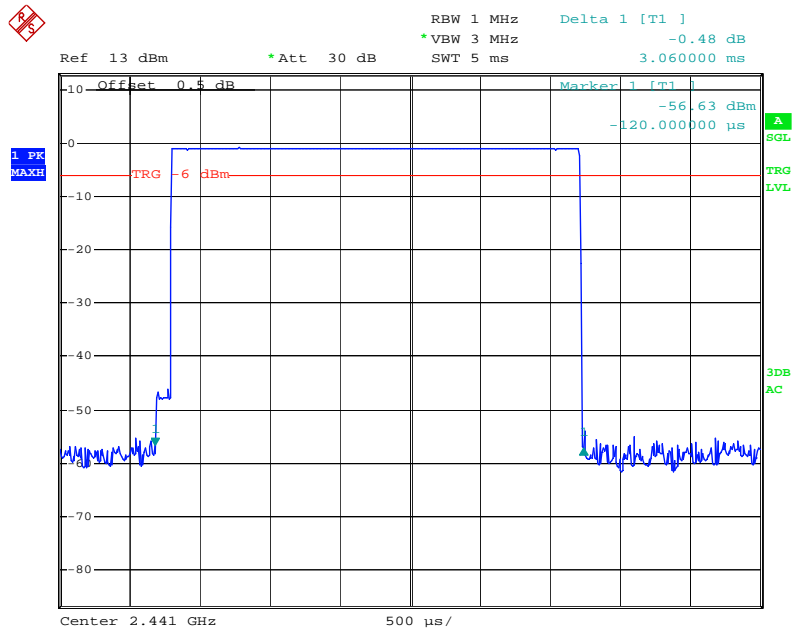

Date: 28.APR.2011 05:07:39

High Channel for DH5

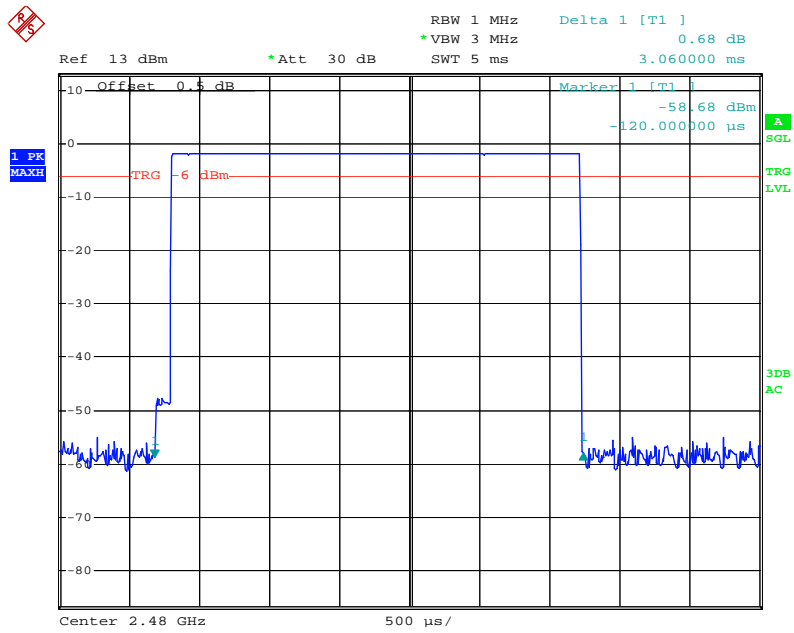


Date: 28.APR.2011 05:08:01

Test Mode: Transmitting (EDR)

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.560	0.179	0.4	Pass
	Middle	0.560	0.179	0.4	Pass
	High	0.562	0.180	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s				
DH 3	Low	1.812	0.290	0.4	Pass
	Middle	1.812	0.290	0.4	Pass
	High	1.812	0.290	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s				
DH 5	Low	3.070	0.328	0.4	Pass
	Middle	3.070	0.328	0.4	Pass
	High	3.070	0.328	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s				


Please refer to the following plots.

Low Channel for DH1

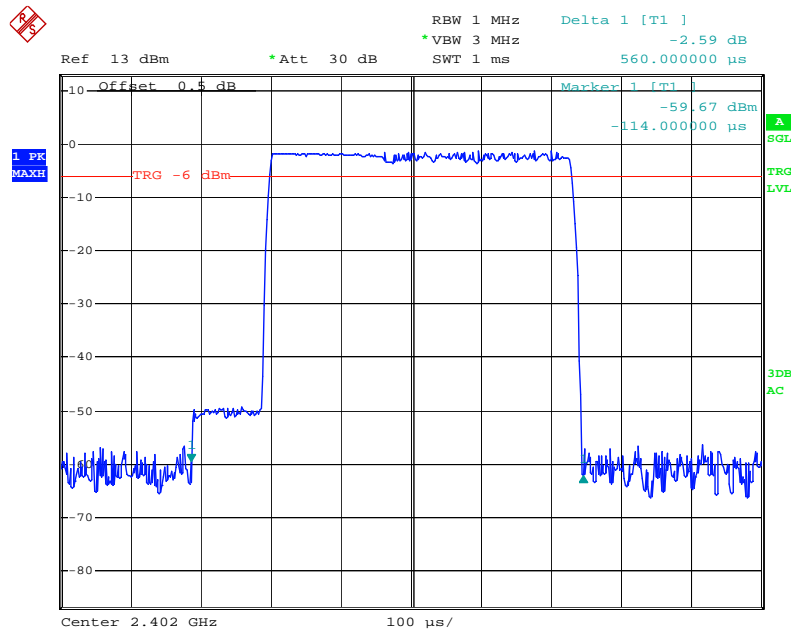


Date: 28.APR.2011 05:09:50

Middle Channel for DH1

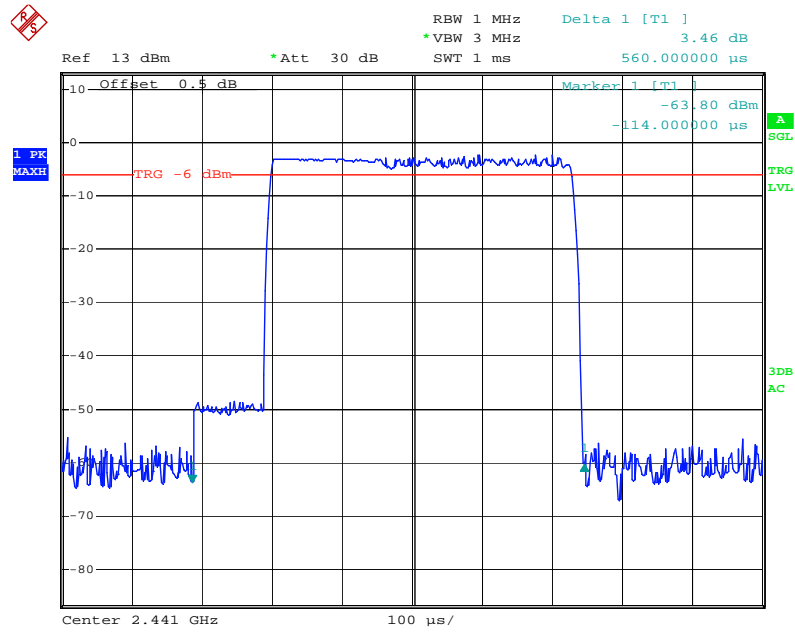


Date: 28.APR.2011 05:11:10

High Channel for DH1

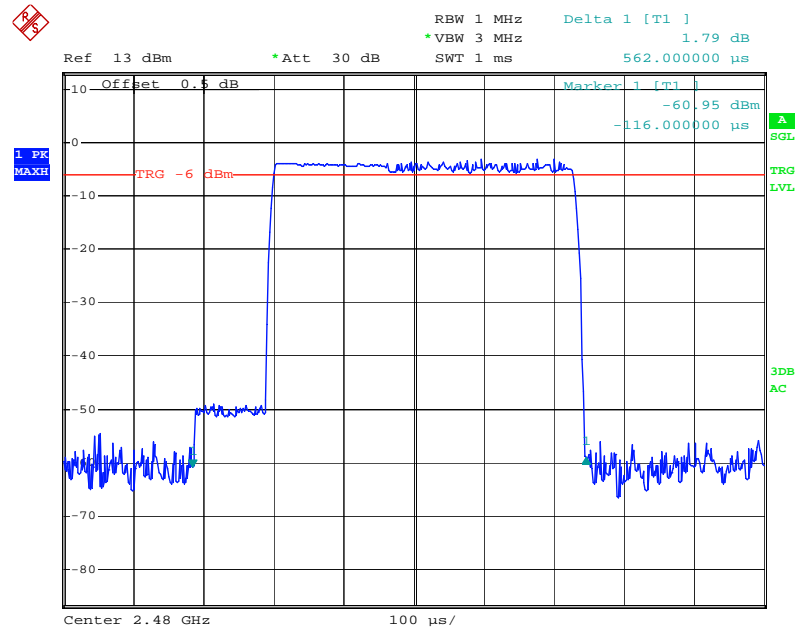


Date: 28.APR.2011 05:14:49

Low Channel for DH3

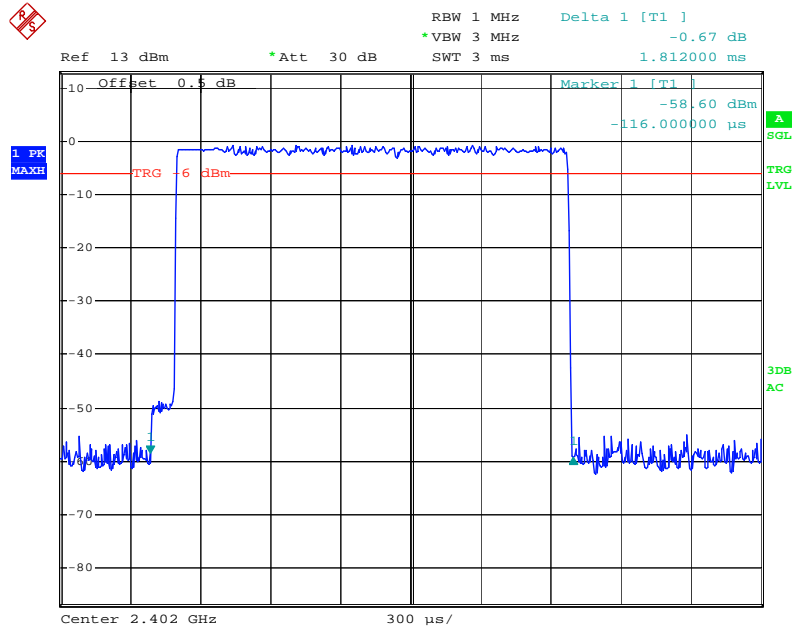


Date: 28.APR.2011 05:19:00

Middle Channel for DH3

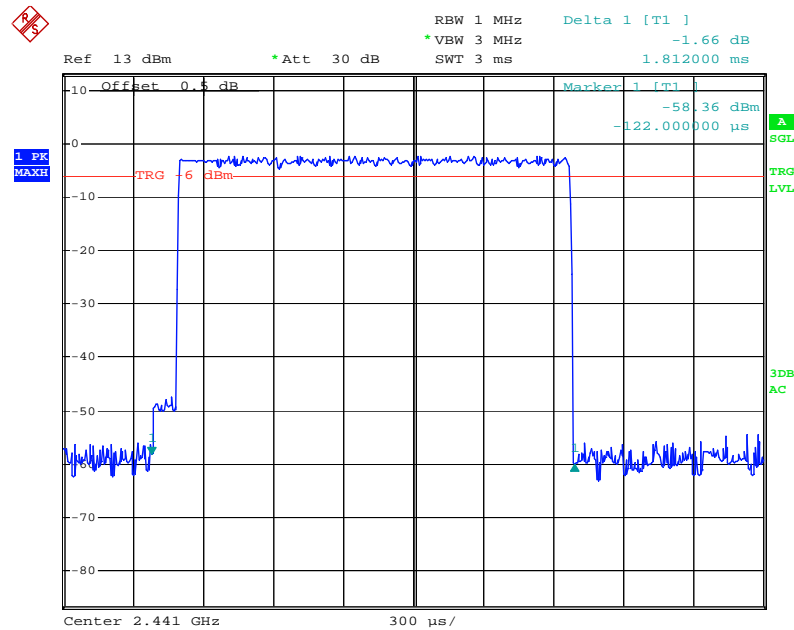


Date: 28.APR.2011 05:19:40

High Channel for DH3

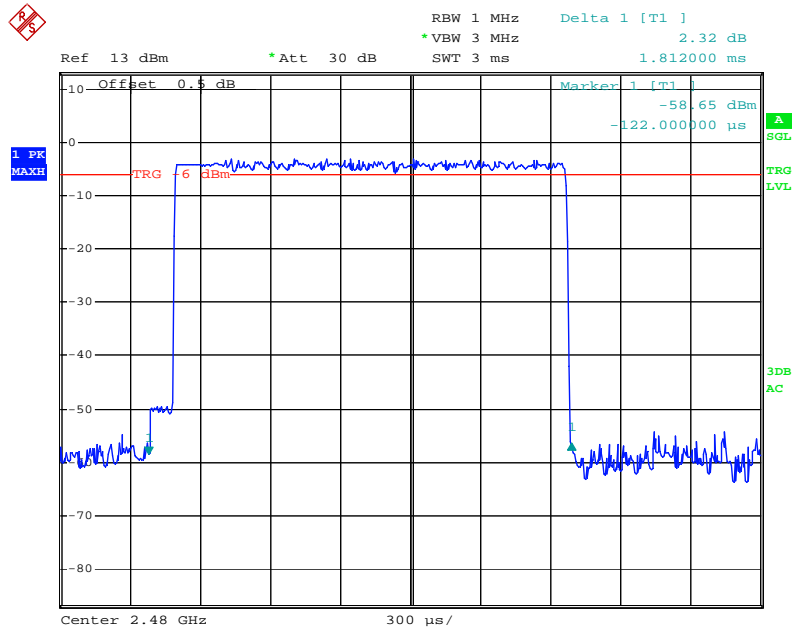


Date: 28.APR.2011 05:20:23

Low Channel for DH5

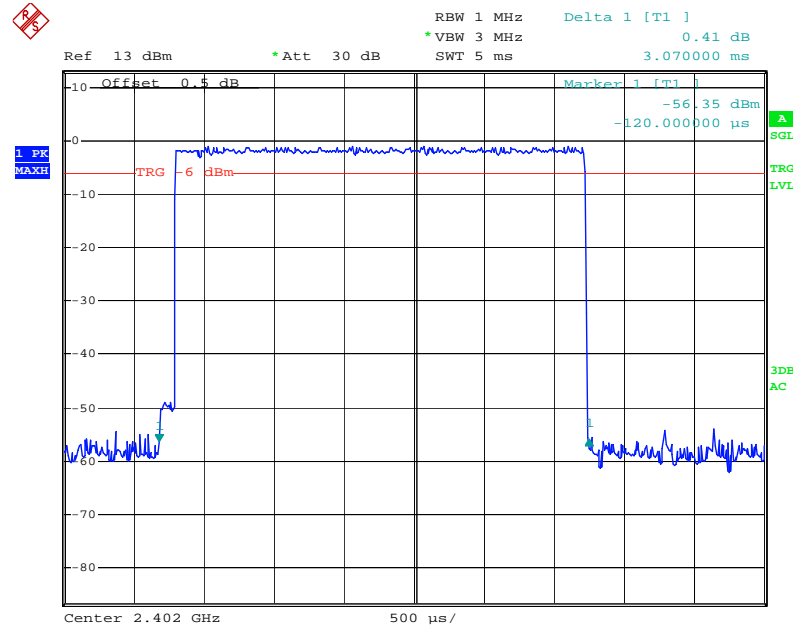


Date: 28.APR.2011 05:22:23

Middle Channel for DH5

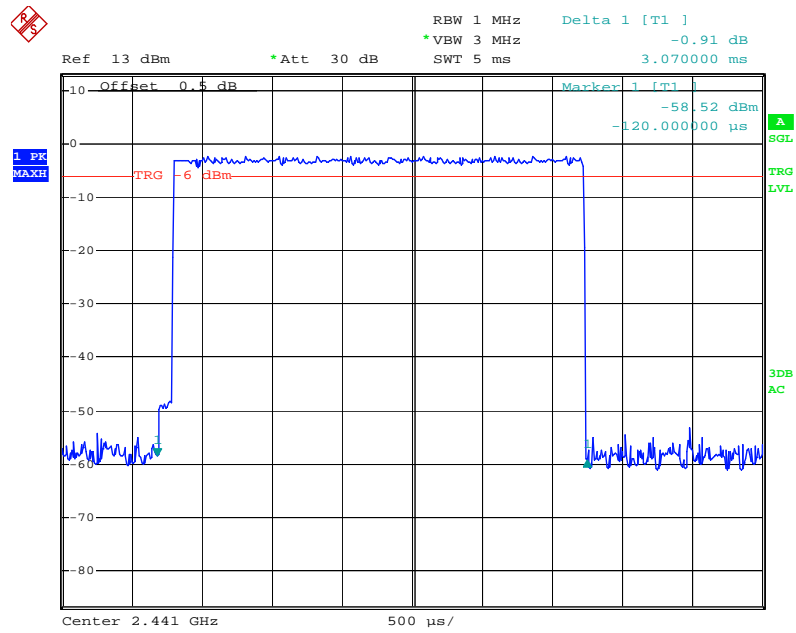

Date: 28.APR.2011 05:23:03

High Channel for DH5

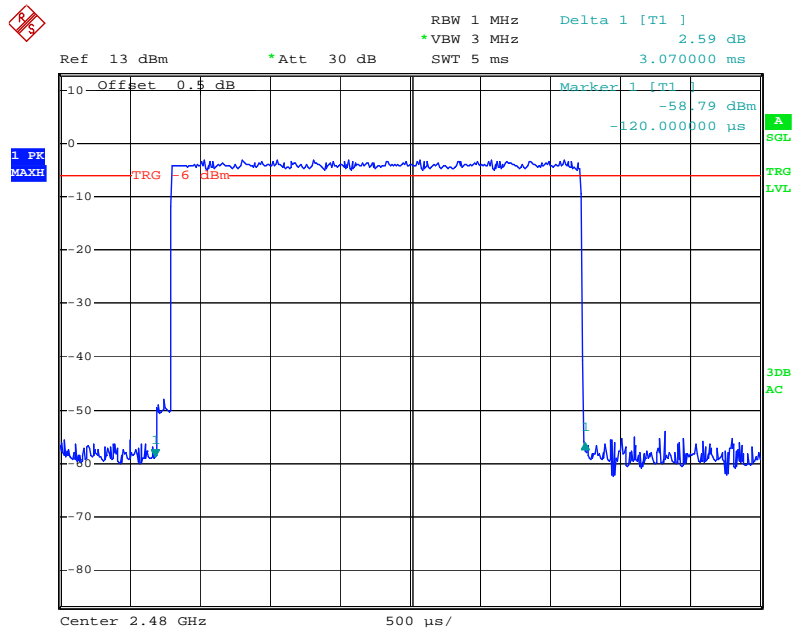

Date: 28.APR.2011 05:23:45

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.

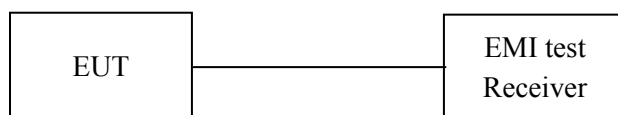

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9kPa

* The testing was performed by Sula Huang on 2011-04-20 to 2011-04-27

Test Result: Compliance.


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mw)
			(dBm)	(mw)	
BDR	Low	2402	0.02	1.005	1000
	Middle	2441	-0.50	0.891	1000
	High	2480	-1.05	0.785	1000
EDR	Low	2402	-0.40	0.912	1000
	Middle	2441	-1.44	0.718	1000
	High	2480	-2.11	0.615	1000


Note: The data above was tested in conducted mode.

BDR:


Low Channel

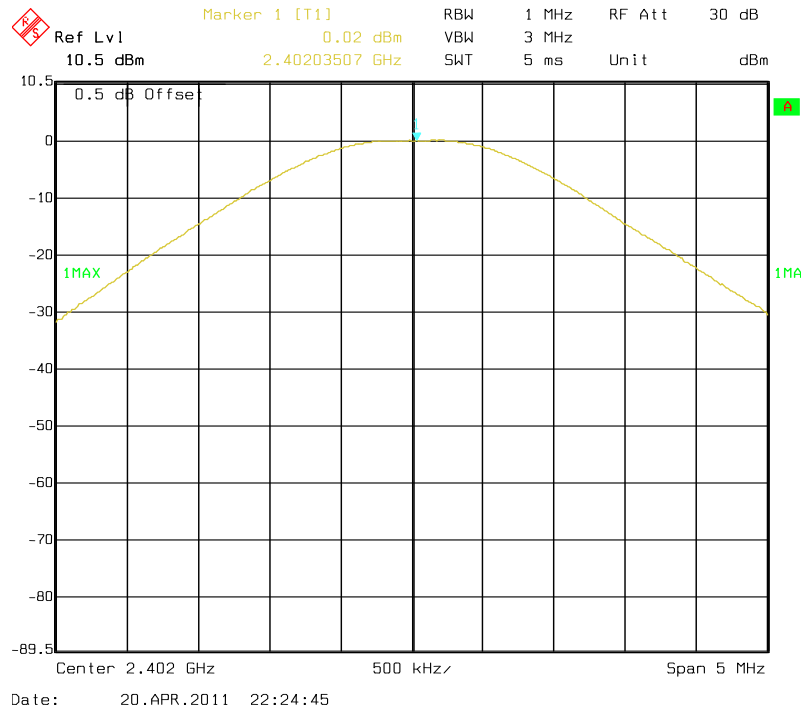

Middle Channel

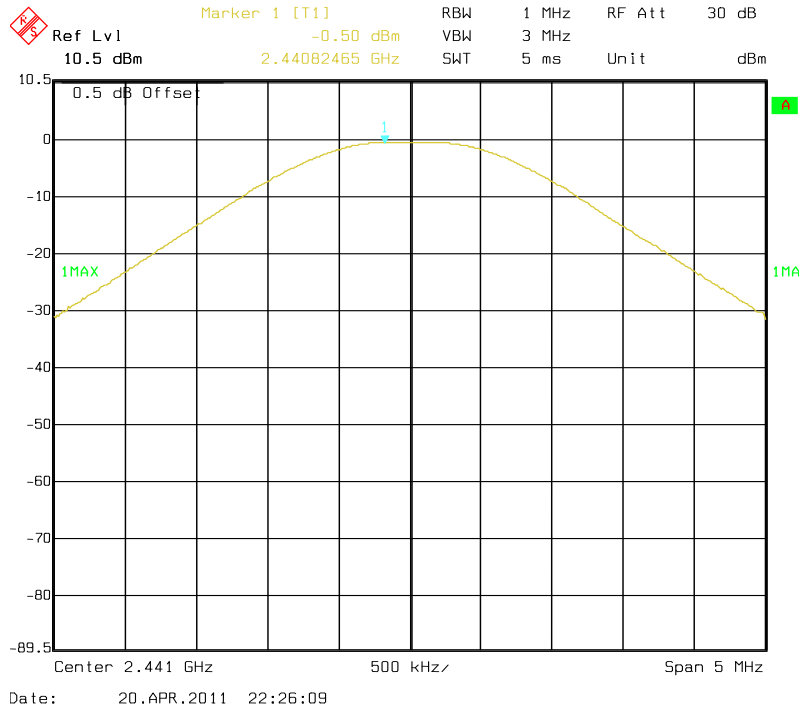


High Chanel

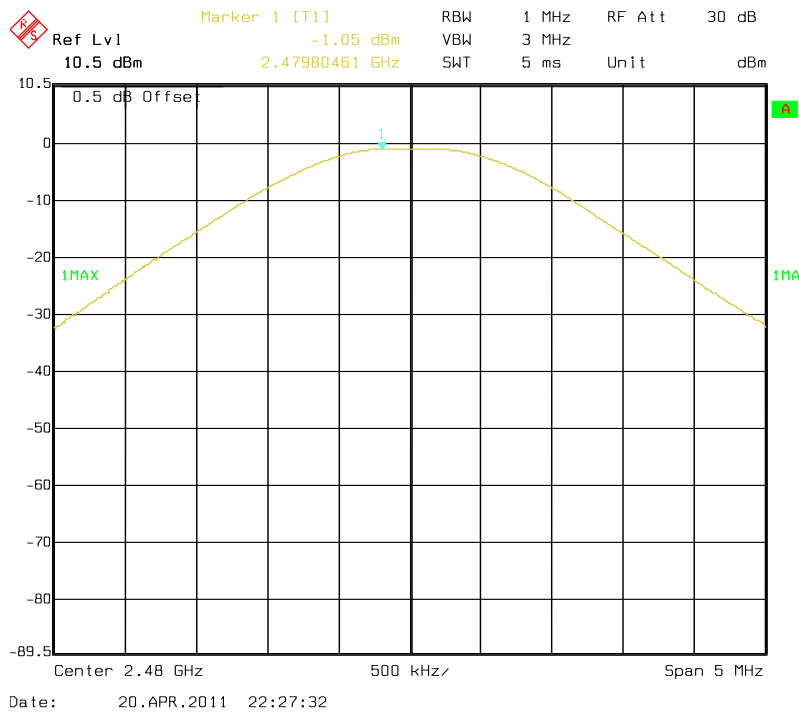


EDR:

Low Channel

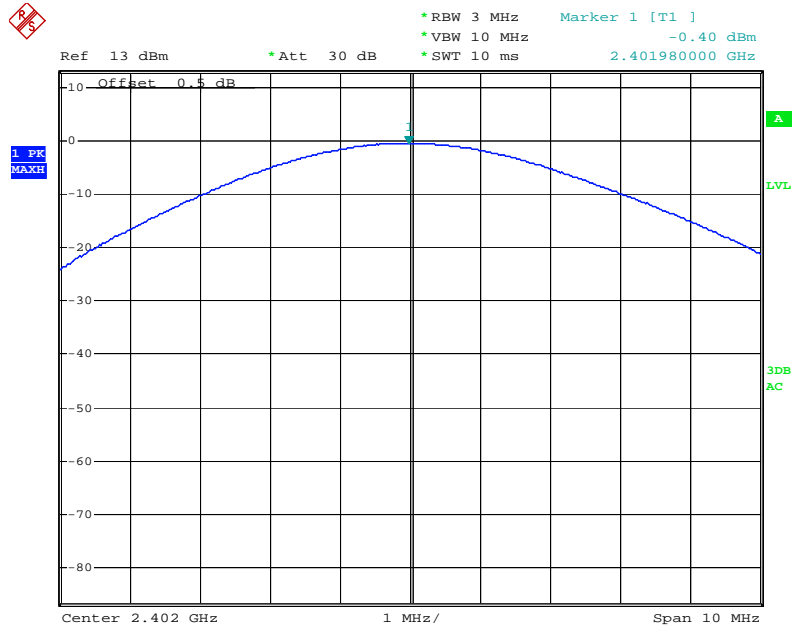


Date: 28.APR.2011 06:02:20

Middle Channel

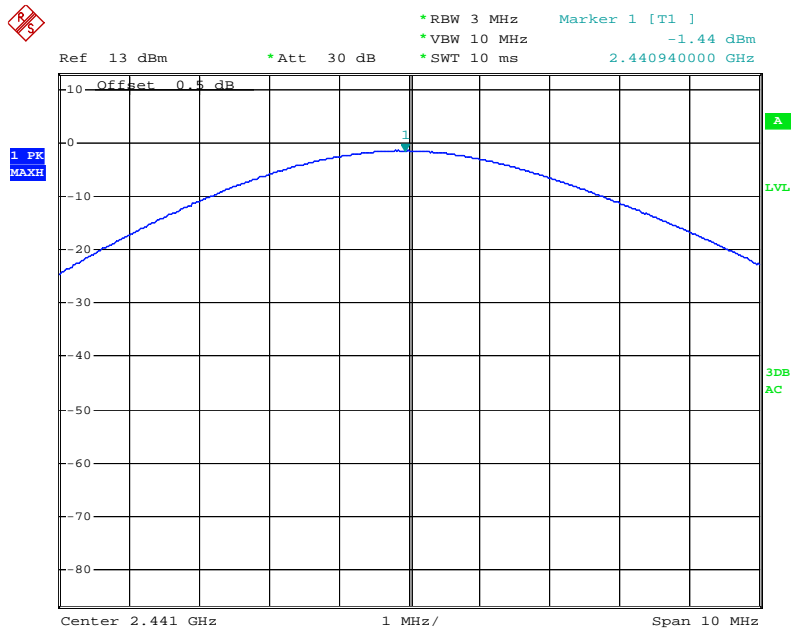

Date: 28.APR.2011 06:01:47

High Chanel

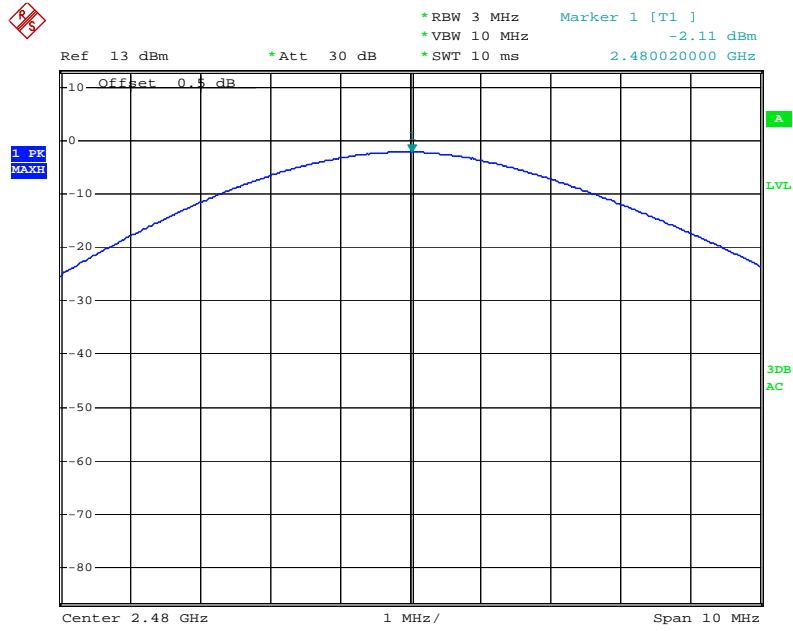

Date: 28.APR.2011 06:01:12

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
SUNOL SCIENCES	Horn antenna	DRH-118	A052604	2010-05-05	2011-05-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

*The testing was performed by Sula Huang on 2011-04-20 to 2011-04-27.


Test Result: Compliance, please refer to the following table and plots.

Test Mode: Transmitting


Mode	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
BDR	2399.561	51.33	20
	2483.587	55.53	20
EDR	2399.620	45.91	20
	2483.662	50.22	20

BDR:

Band Edge: Left Side

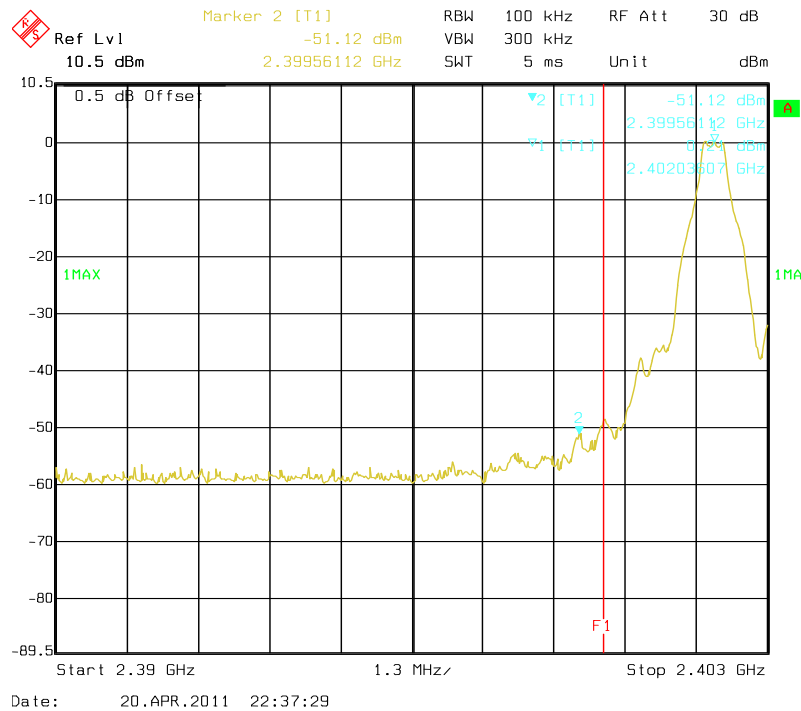


Band Edge: Right Side

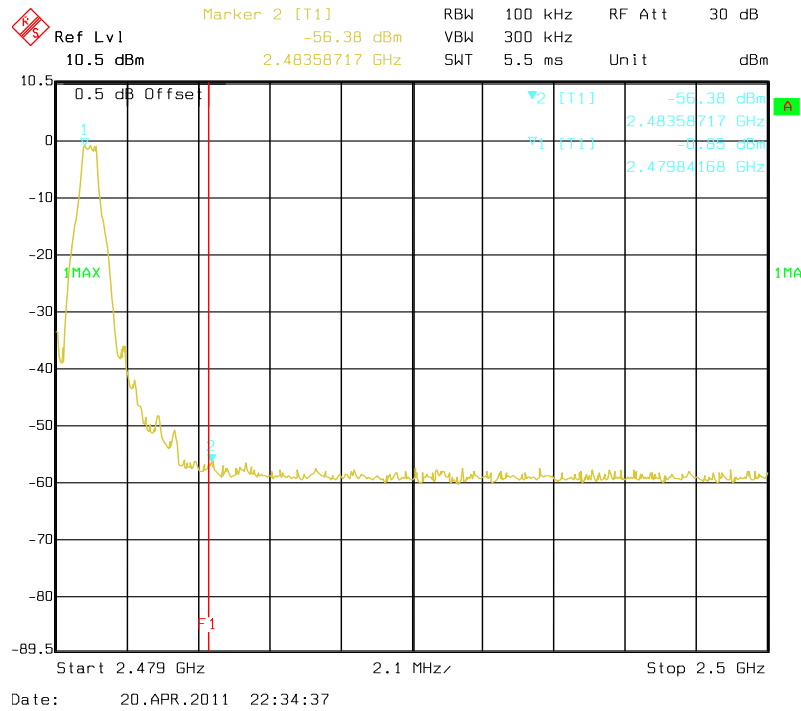


EDR:

Band Edge: Left Side

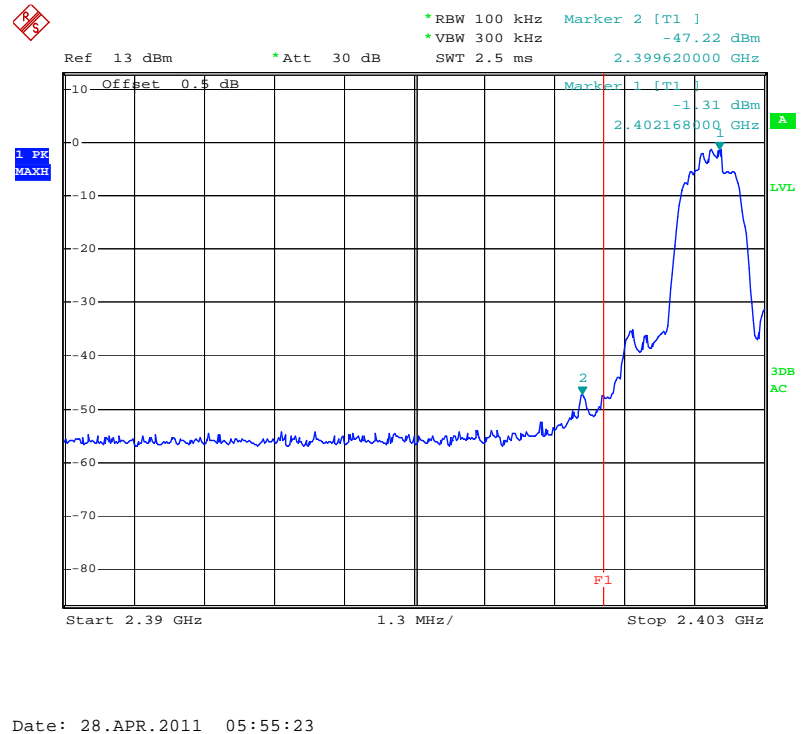

Band Edge: Right Side

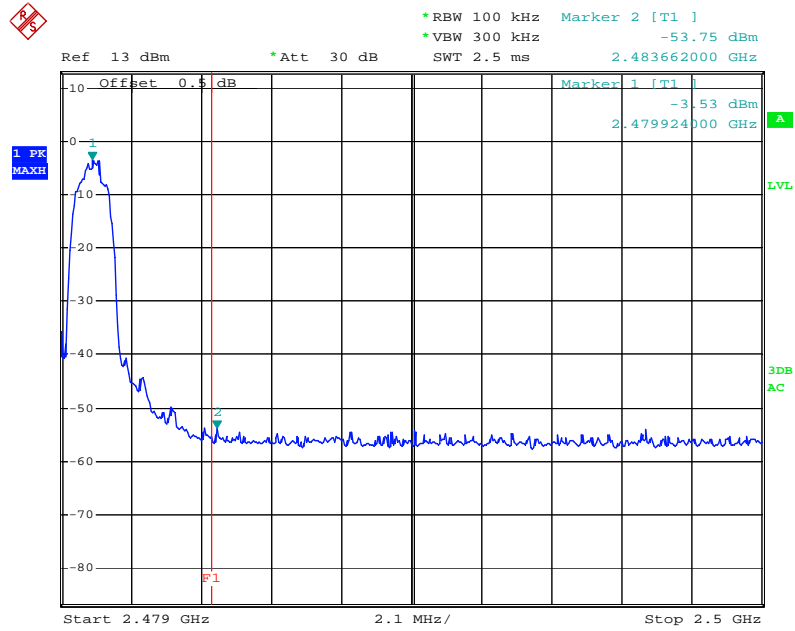

Date: 28.APR.2011 05:58:00

***** END OF REPORT *****