

TEST REPORT



For

Zhongshan K-mate General Electronics Co., Ltd.

Fuwan Industrial Zone, Fuwan South Road, Sunwen East Road, East District,
Zhongshan, Guangdong, China

FCC PART 15.247

FCC ID: WAD-BTR006

Report Type: Original Report	Product Type: Bluetooth Receiver
Test Engineer: Suny Sun	
Report Number: RDG110624001-00-15.247	
Report Date: 2011-08-02	
Reviewed By: EMC Engineer	Merry Zhao 
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, or any agency of the Federal Government.

* This report contains data that are not covered by the NVLAP accreditation and are marked with an asterisk "★" (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....4

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4

 OBJECTIVE4

 RELATED SUBMITTAL(S)/GRANT(S).....4

 TEST METHODOLOGY4

 TEST FACILITY4

SYSTEM TEST CONFIGURATION.....6

 DESCRIPTION OF TEST CONFIGURATION6

 EUT EXERCISE SOFTWARE6

 EQUIPMENT MODIFICATIONS6

 LOCAL SUPPORT EQUIPMENT LIST AND DETAILS6

 EXTERNAL I/O CABLE.....6

 CONFIGURATION OF TEST SETUP6

 BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS8

FCC §15.203 - ANTENNA REQUIREMENT.....9

 APPLICABLE STANDARD9

 ANTENNA CONNECTOR CONSTRUCTION9

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS10

 APPLICABLE STANDARD10

 MEASUREMENT UNCERTAINTY10

 EUT SETUP.....10

 EMI TEST RECEIVER SETUP.....11

 TEST PROCEDURE11

 TEST EQUIPMENT LIST AND DETAILS.....11

 TEST RESULTS SUMMARY11

 TEST DATA11

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....14

 APPLICABLE STANDARD14

 MEASUREMENT UNCERTAINTY14

 EUT SETUP.....14

 EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP15

 TEST PROCEDURE15

 CORRECTED AMPLITUDE & MARGIN CALCULATION15

 TEST EQUIPMENT LIST AND DETAILS.....15

 TEST RESULTS SUMMARY16

 TEST DATA16

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST22

 APPLICABLE STANDARD22

 TEST EQUIPMENT LIST AND DETAILS.....22

 TEST PROCEDURE22

 TEST DATA22

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING27

APPLICABLE STANDARD27
 TEST EQUIPMENT LIST AND DETAILS.....27
 TEST PROCEDURE27
 TEST DATA27
FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST32
 APPLICABLE STANDARD32
 TEST EQUIPMENT LIST AND DETAILS.....32
 TEST PROCEDURE32
 TEST DATA32
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....34
 APPLICABLE STANDARD34
 TEST EQUIPMENT LIST AND DETAILS.....34
 TEST PROCEDURE34
 TEST DATA34
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT45
 APPLICABLE STANDARD45
 TEST EQUIPMENT LIST AND DETAILS.....45
 TEST PROCEDURE45
 TEST DATA45
FCC §15.247(d) - BAND EDGES TESTING50
 APPLICABLE STANDARD50
 TEST EQUIPMENT LIST AND DETAILS.....50
 TEST PROCEDURE50
 TEST DATA51

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Zhongshan K-mate General Electronics Co., Ltd*'s product, model number: *BTR006* (FCC ID: *WAD-BTR006*) (the "EUT") in this report is a *Bluetooth Receiver*, which was measured approximately: 4.5 cm (L) x 3.3 cm (W) x 0.8 cm (H), rated input voltage: DC 3.7 V built-in rechargeable battery.

** All measurement and test data in this report was gathered from production sample serial number: 1106039 (Assigned by BACL, Shenzhen). The EUT was received on 2011-06-24.*

Objective

This Type approval report is prepared on behalf of *Zhongshan K-mate General Electronics Co., Ltd* in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine the compliance of the EUT with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s)

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode, which is provided by manufacture.

EUT Exercise Software

N/A

Equipment Modifications

No modification was made to the unit tested.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Notebook	PP05L	N/A


External I/O Cable

Cable Description	Length (m)	From Port	To
USB Charging Cable	0.5	EUT	Notebook

Configuration of Test Setup

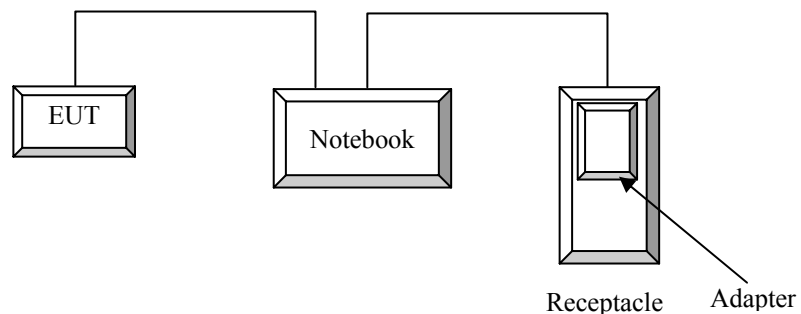

Block Diagram of Test Setup

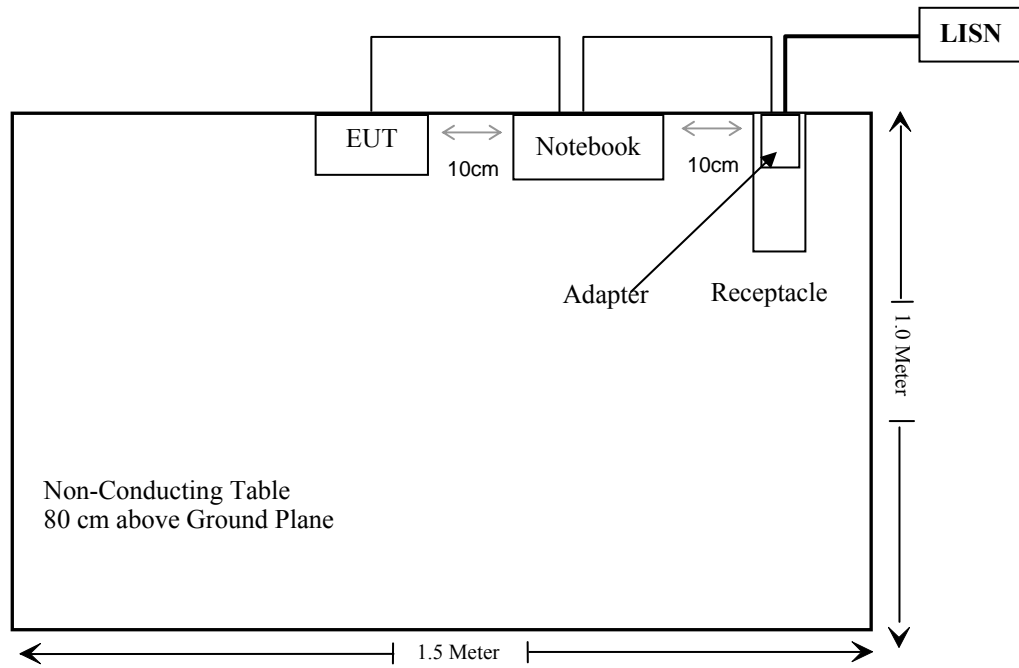

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions	Compliance
§15.247 (a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band Edges	Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a Printed antenna on PCB, which in accordance to section 15.203; please refer to the internal photos.

Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard


FCC §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB (k=2, 95% level of confidence)..

EUT Setup

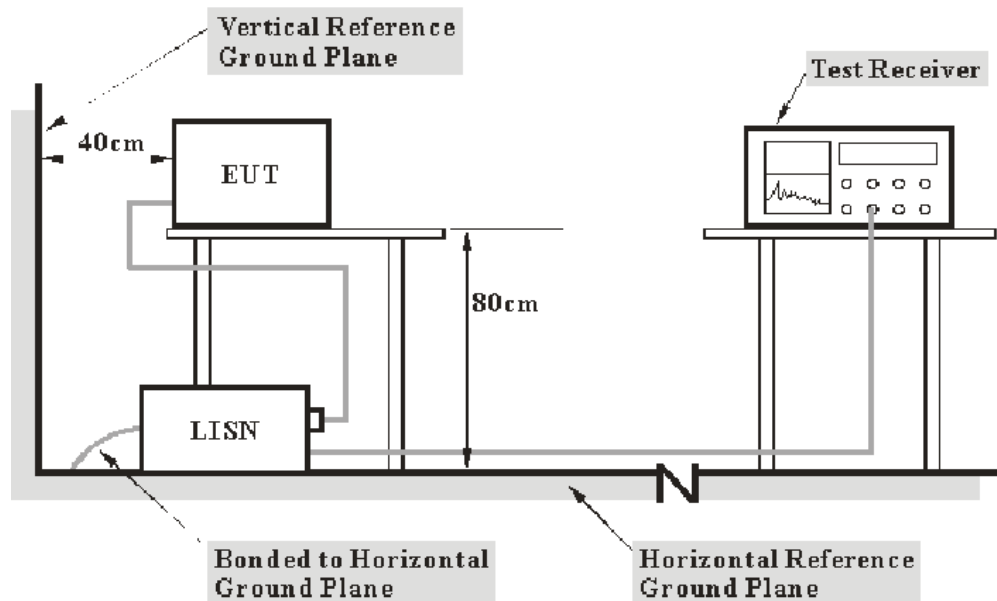

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter of notebook was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2011-03-03	2012-03-02
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-03-09	2012-03-08

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

10.31 dB at 1.605 MHz in the Neutral conducted mode

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	48 %
ATM Pressure:	100.0kPa

* *The testing was performed by Suny Sun on 2011-07-06.*


Test Mode: Charging & Transmitting

AC 120V/60 Hz, Line

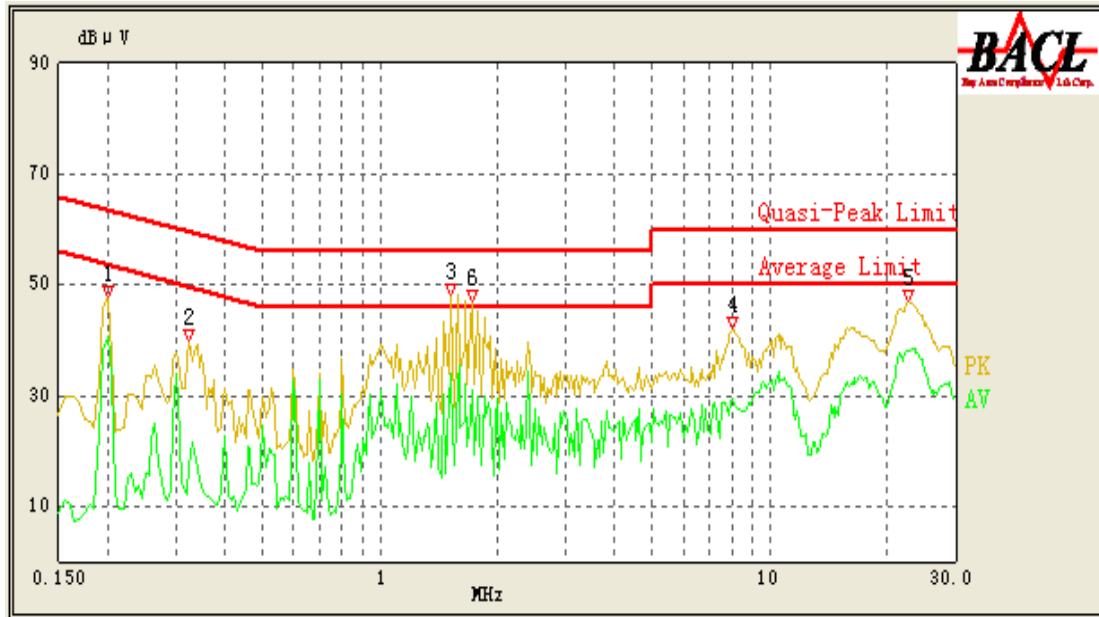

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Remark (PK/ QP/Ave.)
1.520	44.93	10.10	56.00	11.07	QP
1.520	34.07	10.10	46.00	11.93	Ave.
22.600	38.07	10.10	50.00	11.93	Ave.
0.200	40.70	10.10	54.57	13.87	Ave.
1.720	31.03	10.10	46.00	14.97	Ave.
1.725	40.96	10.10	56.00	15.04	QP
22.605	40.55	10.10	60.00	19.45	QP
0.200	44.87	10.10	64.57	19.70	QP
8.040	29.09	10.10	50.00	20.91	Ave.
8.025	35.17	10.10	60.00	24.83	QP
0.325	28.11	10.10	61.00	32.89	QP
0.325	17.55	10.10	51.00	33.45	Ave.

AC 120V/60 Hz, Neutral

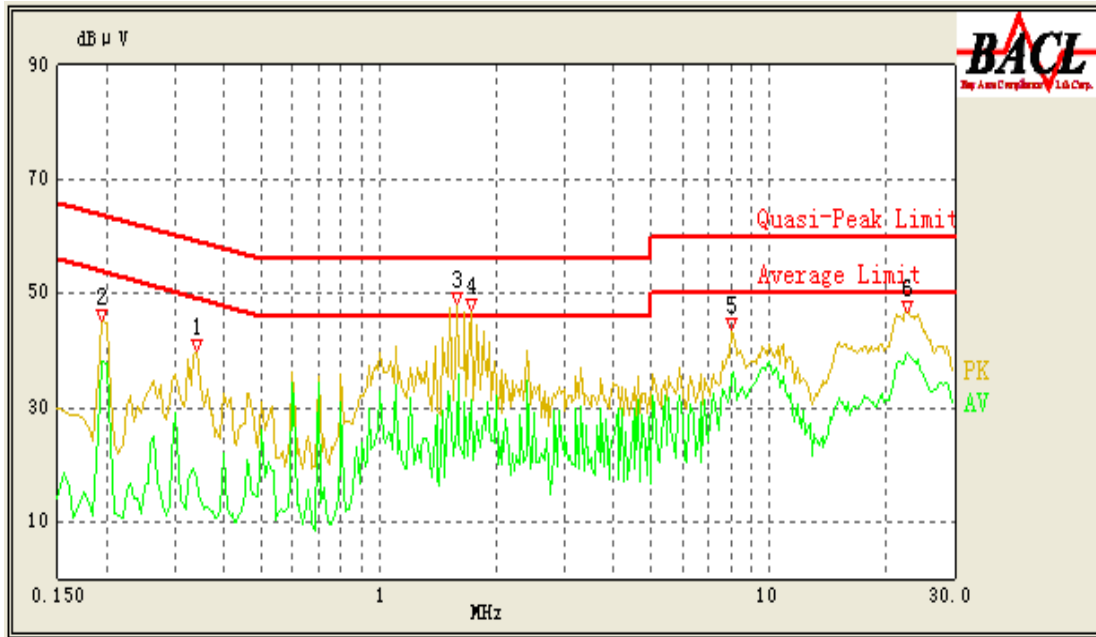

Conducted Emissions			FCC Part 15.207		
Frequency (MHz)	Corrected Result (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Remark (PK/ QP/Ave.)
1.605	35.69	10.10	46.00	10.31	Ave.
22.545	39.60	10.10	50.00	10.40	Ave.
1.590	45.54	10.10	56.00	10.46	QP
1.725	42.86	10.10	56.00	13.14	QP
8.015	35.61	10.10	50.00	14.39	Ave.
1.725	31.46	10.10	46.00	14.54	Ave.
0.195	38.14	10.10	54.71	16.57	Ave.
22.545	39.63	10.10	60.00	20.37	QP
8.015	38.25	10.10	60.00	21.75	QP
0.195	42.74	10.10	64.71	21.97	QP
0.340	28.47	10.10	60.57	32.10	QP
0.340	17.75	10.10	50.57	32.82	Ave.

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB. ($k=2$, 95% level of confidence).

EUT Setup

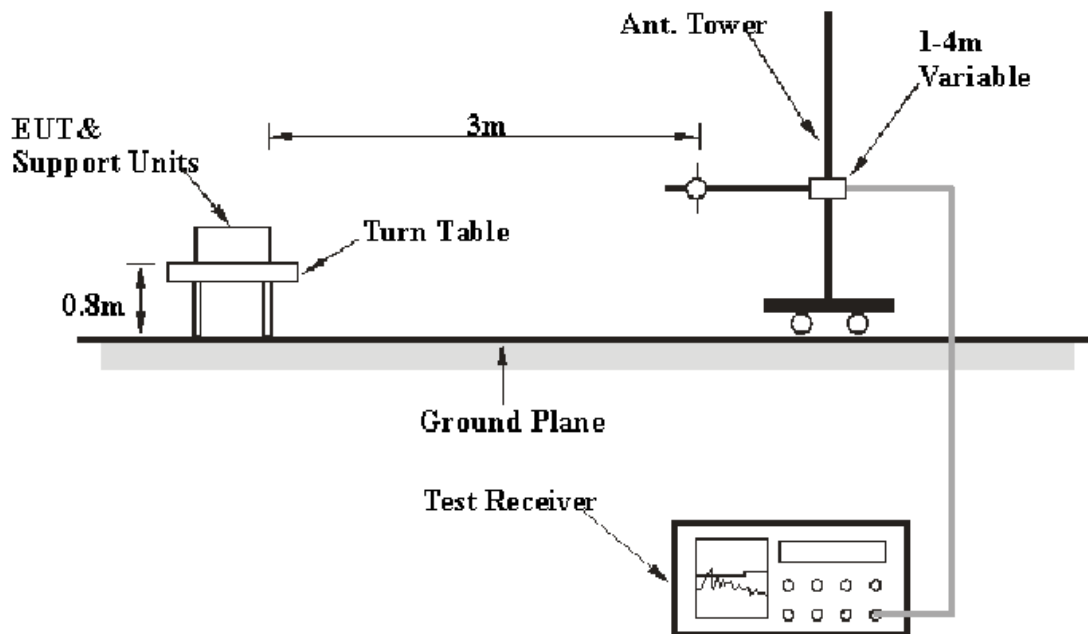

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	100 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave

Test Procedure

For the radiated emissions test, the adapter of notebook was connected to the outlet of the LISN

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2010-08-02	2011-08-01
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2011-07-05	2012-07-04
Mini-Circuits	Amplifier	ZVA-213+	T-E27H	2011-03-08	2012-03-07
Sunol Sciences	Horn Antenna	DRH-118	A052604	2011-05-05	2012-05-04
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2010-07-08	2011-07-07

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, and section 15.205, 15.209 and 15.247, with the worst margin reading of:

Below 1 GHz

Transmitting mode (BDR): 7.1 dB at 890.006750 MHz in the Horizontal polarization

Transmitting mode (EDR): 7.9 dB at 400.996250 MHz in the Vertical polarization

Above 1 GHz

Transmitting mode (BDR): 1.27 dB at 4960.00 MHz in the Horizontal polarization (High Channel)

Transmitting mode (EDR): 1.34 dB at 4960.00 MHz in the Horizontal polarization (High Channel)

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

The testing was performed by Suny Sun on 2011-07-09.


1) 30-1000 MHz

Test Mode: Charging

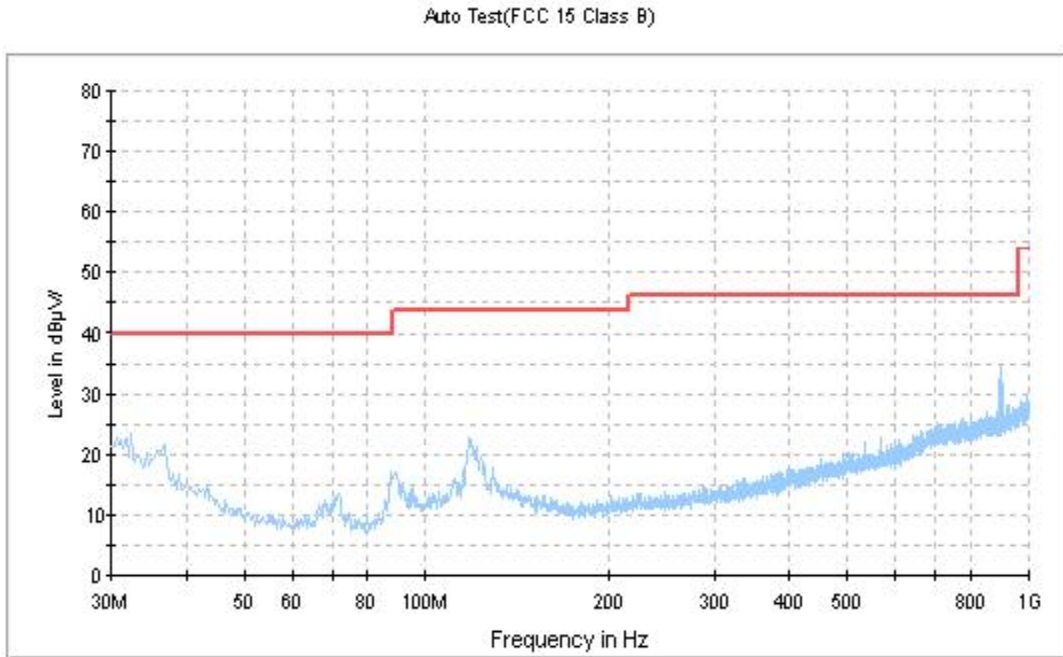


Note: The data which below the limit 20 dB was not recorded.

Test Mode: Transmitting (BDR)

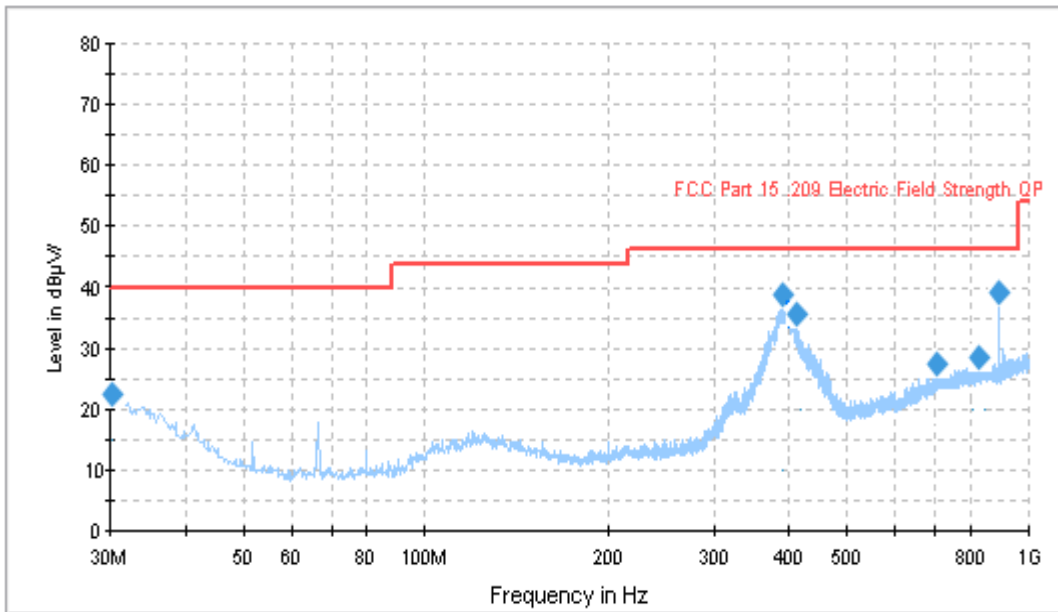

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
890.006750	38.9	99.0	H	94.0	-1.2	46.0	7.1
390.045250	37.8	320.0	V	203.0	-10.2	46.0	8.2
418.353500	35.1	180.0	V	4.0	-9.6	46.0	10.9
30.189894	23.8	400.0	H	235.0	-5.5	40.0	16.2
823.253750	26.7	203.0	V	174.0	-1.5	46.0	19.3
701.179500	25.4	400.0	V	87.0	-3.0	46.0	20.6

Test Mode: Transmitting (EDR)

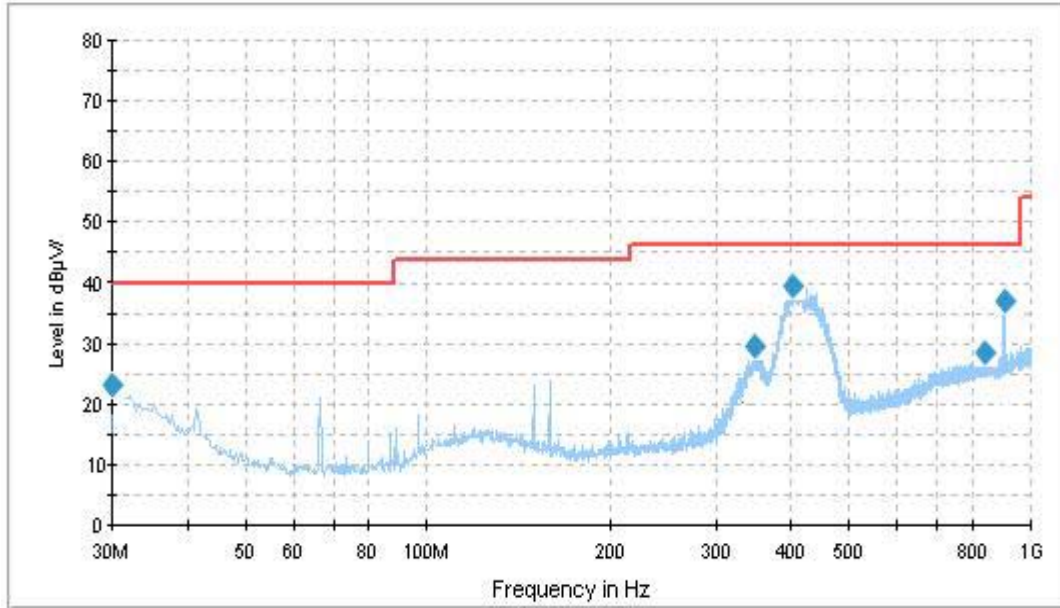

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Test Antenna		Turntable Position (degree)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
		Height (cm)	Polarity (H/V)				
400.996250	38.1	225.0	V	52.0	-9.9	46.0	7.9
907.148500	36.5	400.0	H	354.0	-0.6	46.0	9.5
30.311250	26.7	235.0	H	139.0	-5.6	40.0	13.3
345.639250	28.5	319.0	H	303.0	-11.2	46.0	17.5
837.278750	27.3	99.0	V	139.0	-1.3	46.0	18.7

2) Above 1 GHz:*Test Mode: Transmitting (BDR)*

Indicated		Detector (PK/Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dB μ V)			Height (cm)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Comment
Low Channel (2402 MHz)												
1602.04	41.94	Ave.	119	103	H	27.1	2.37	26.66	44.75	54	9.25	spurious
4804.00	29.14	Ave.	49	107	H	34.0	4.3	26.75	40.69	54	13.31	harmonic
1602.02	36.68	Ave.	27	186	V	27.4	2.37	26.66	39.79	54	14.21	spurious
4804.00	27.68	Ave.	58	105	V	33.8	4.3	26.75	39.03	54	14.97	harmonic
4804.00	44.2	PK	49	107	H	34.0	4.3	26.75	55.75	74	18.25	harmonic
4804.00	42.1	PK	58	105	V	33.8	4.3	26.75	53.45	74	20.55	harmonic
1602.04	44.82	PK	119	103	H	27.1	2.37	26.66	47.63	74	26.37	spurious
1602.02	41.2	PK	27	186	V	27.4	2.37	26.66	44.31	74	29.69	spurious
Middle Channel (2441 MHz)												
4882.00	34.32	Ave.	59	135	H	34.0	4.36	26.75	45.93	54	8.07	harmonic
1626.43	39.23	Ave.	34	113	H	27.1	2.37	26.66	42.04	54	11.96	spurious
4882.00	29.79	Ave.	73	107	V	33.8	4.36	26.75	41.20	54	12.80	harmonic
1626.59	37.54	Ave.	21	101	V	27.4	2.37	26.66	40.65	54	13.35	spurious
4882.00	47.46	PK	59	135	H	34.0	4.36	26.75	59.07	74	14.93	harmonic
4882.00	42.58	PK	73	107	V	33.8	4.36	26.75	53.99	74	20.01	harmonic
1626.43	43.12	PK	34	112	H	27.1	2.37	26.66	45.93	74	28.07	spurious
1626.59	41.8	PK	21	101	V	27.4	2.37	26.66	44.91	74	29.09	spurious
High Channel (2480 MHz)												
4960.00	41.08	Ave.	58	112	H	34.0	4.4	26.75	52.73	54	1.27*	harmonic
4960.00	36.25	Ave.	318	106	V	33.8	4.4	26.75	47.70	54	6.30	harmonic
1652.67	43.47	Ave.	127	101	H	27.1	2.37	26.66	46.28	54	7.72	spurious
1652.73	39.6	Ave.	247	103	V	27.4	2.37	26.66	42.71	54	11.29	spurious
4960.00	43.13	PK	58	112	H	34.0	4.4	26.75	54.78	74	19.22	harmonic
4960.00	40.32	PK	318	106	V	33.8	4.4	26.75	51.77	74	22.23	harmonic
1652.67	46.45	PK	127	101	H	27.1	2.37	26.66	49.26	74	24.74	spurious
1652.73	42.81	PK	247	103	V	27.4	2.37	26.66	45.92	74	28.08	spurious

**within measurement uncertainty!*

Test Mode: Transmitting (EDR)

Indicated		Detector (PK/Ave.)	Table Angle Degree	Test Antenna		Correction Factor			FCC Part 15.247/15.209/15.205			
Frequency (MHz)	S.A. Reading (dBµV)			Height (cm)	Polar (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Comment
Low Channel (2402 MHz)												
1602.06	42.21	Ave.	119	103	H	27.1	2.37	26.66	45.02	54	8.98	spurious
4804.00	29.93	Ave.	49	107	H	34.0	4.30	26.75	41.48	54	12.52	harmonic
1602.11	36.32	Ave.	27	186	V	27.4	2.37	26.66	39.43	54	14.57	spurious
4804.00	27.43	Ave.	58	105	V	33.8	4.30	26.75	38.78	54	15.22	harmonic
4804.00	43.81	PK	49	107	H	34.0	4.30	26.75	55.36	74	18.64	harmonic
4804.00	41.87	PK	58	105	V	33.8	4.30	26.75	53.22	74	20.78	harmonic
1602.06	43.97	PK	119	103	H	27.1	2.37	26.66	46.78	74	27.22	spurious
1602.11	41.10	PK	27	186	V	27.4	2.37	26.66	44.21	74	29.79	spurious
Middle Channel (2441 MHz)												
4882.00	34.14	Ave.	59	135	H	34.0	4.36	26.75	45.75	54	8.25	harmonic
1626.39	39.16	Ave.	34	113	H	27.1	2.37	26.66	41.97	54	12.03	spurious
1626.53	38.13	Ave.	21	101	V	27.4	2.37	26.66	41.24	54	12.76	spurious
4882.00	29.68	Ave.	73	107	V	33.8	4.36	26.75	41.09	54	12.91	harmonic
4882.00	46.78	PK	59	135	H	34.0	4.36	26.75	58.39	74	15.61	harmonic
4882.00	42.29	PK	73	107	V	33.8	4.36	26.75	53.70	74	20.3	harmonic
1626.39	43.16	PK	34	112	H	27.1	2.37	26.66	45.97	74	28.03	spurious
1626.53	41.92	PK	21	101	V	27.4	2.37	26.66	45.03	74	28.97	spurious
High Channel (2480 MHz)												
4960.00	41.01	Ave.	58	112	H	34.0	4.40	26.75	52.66	54	1.34*	harmonic
4960.00	36.21	Ave.	318	106	V	33.8	4.40	26.75	47.66	54	6.34	harmonic
1652.64	43.44	Ave.	127	101	H	27.1	2.37	26.66	46.25	54	7.75	spurious
1652.71	39.72	Ave.	247	103	V	27.4	2.37	26.66	42.83	54	11.17	spurious
4960.00	42.97	PK	58	112	H	34.0	4.40	26.75	54.62	74	19.38	harmonic
4960.00	40.27	PK	318	106	V	33.8	4.40	26.75	51.72	74	22.28	harmonic
1652.64	46.43	PK	127	101	H	27.1	2.37	26.66	49.24	74	24.76	spurious
1652.71	42.84	PK	247	103	V	27.4	2.37	26.66	45.95	74	28.05	spurious

*within measurement uncertainty!

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* *The testing was performed by Suny Sun on 2011-007-06.*

Test Result: Compliance, please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR	Low	2402	1.000	0.540	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.564	Pass
	Adjacent	2442			
	High	2480	1.000	0.568	Pass
	Adjacent	2479			
EDR	Low	2402	1.004	0.812	Pass
	Adjacent	2403			
	Middle	2441	1.008	0.816	Pass
	Adjacent	2442			
	High	2480	1.008	0.816	Pass
	Adjacent	2479			

Please refer to the following plots.


BDR:

Low Channel

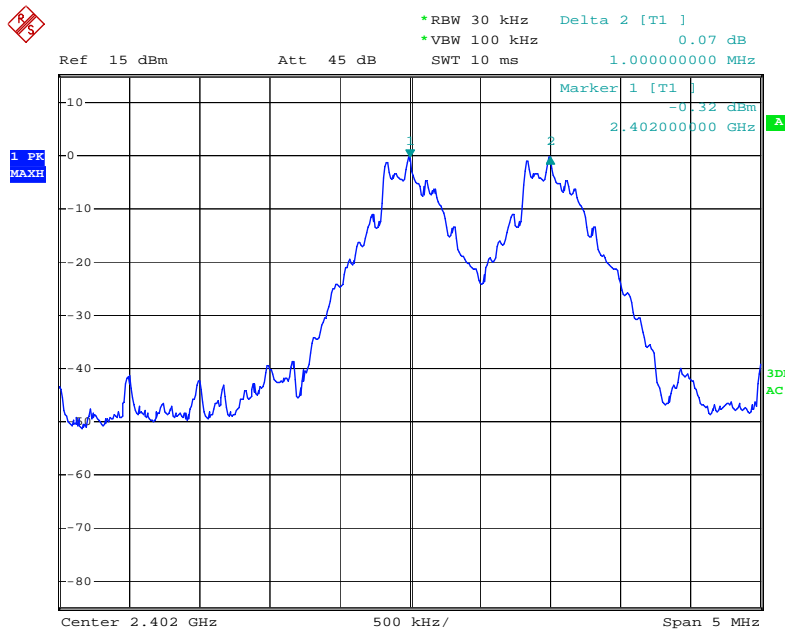


Date: 6.JUL.2011 07:51:51

Middle Channel

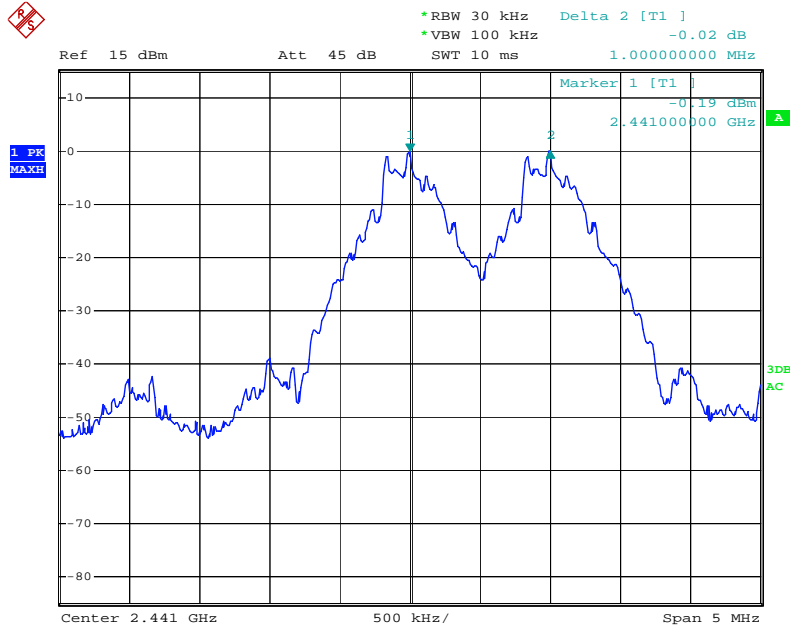

Date: 6.JUL.2011 07:54:55


High Channel

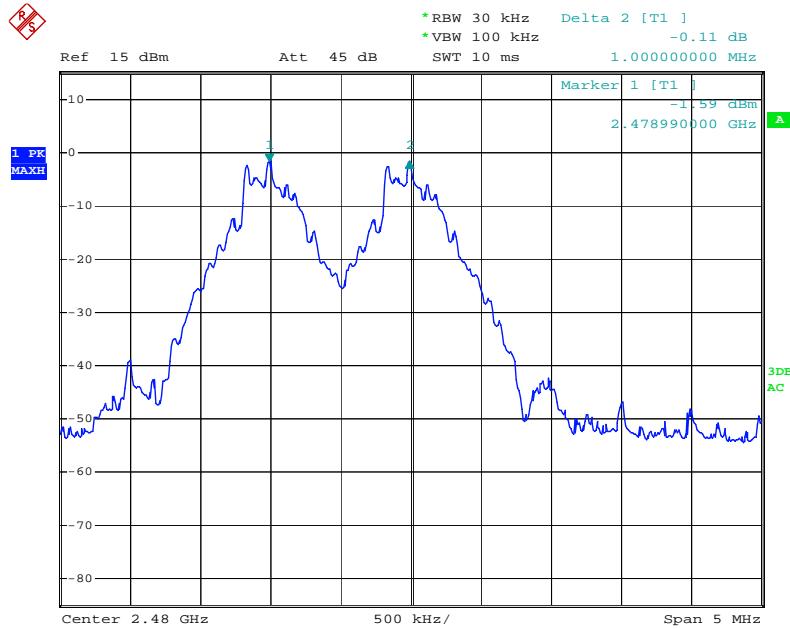

Date: 6.JUL.2011 07:56:11


EDR:

Low Channel

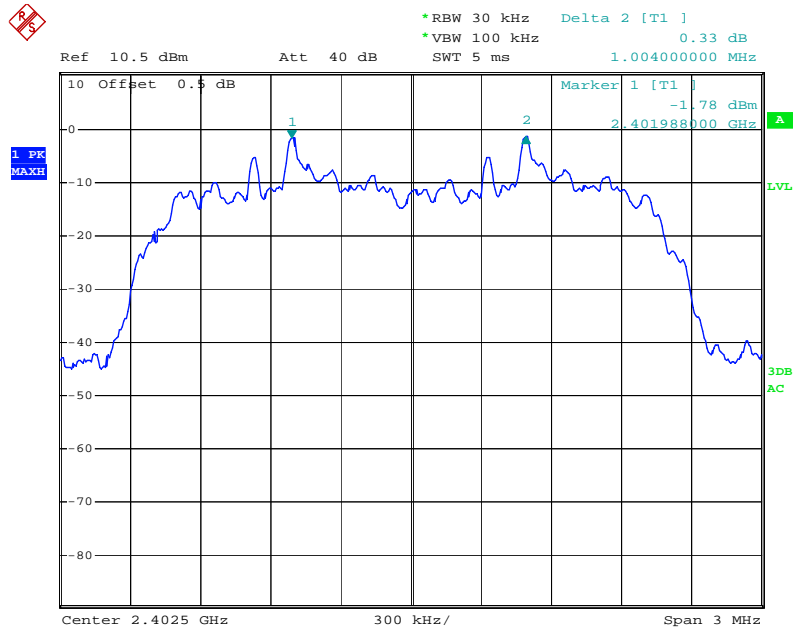


Date: 8.JUN.2011 16:39:02

Middle Channel

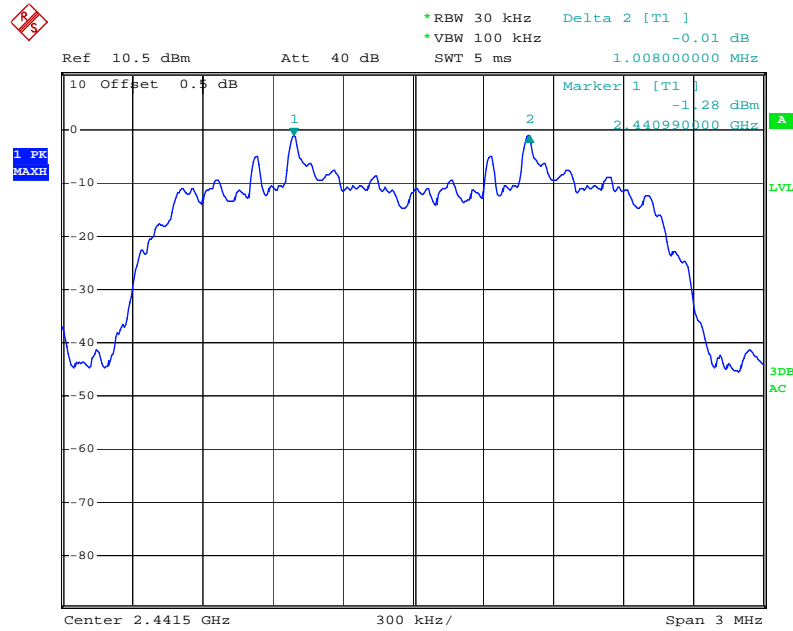

Date: 8.JUN.2011 16:41:17

High Channel

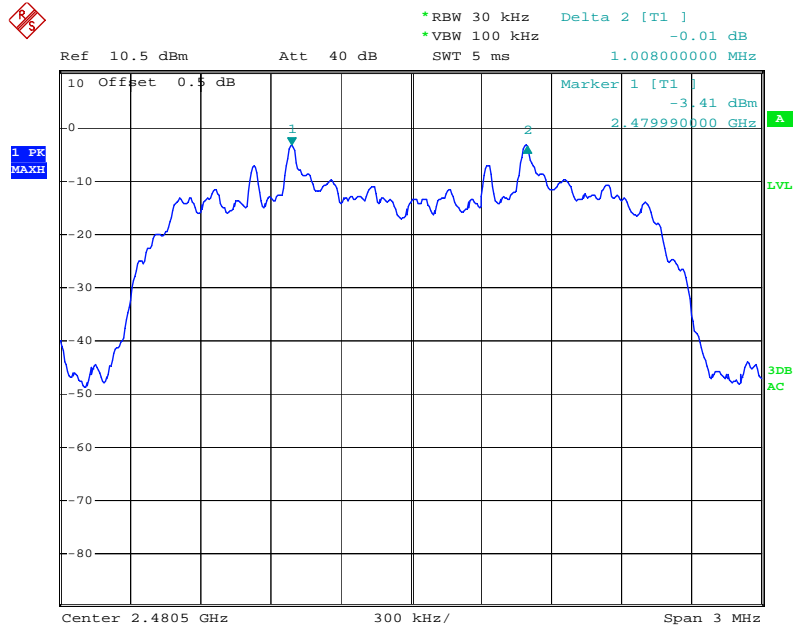

Date: 8.JUN.2011 16:43:10

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* The testing was performed by Suny Sun on 2011-07-06.

Test Result: Compliance, please refer to following tables and plots


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR	Low	2402	0.810
	Middle	2441	0.846
	High	2480	0.852
EDR	Low	2402	1.218
	Middle	2441	1.224
	High	2480	1.224

Please refer to the following plots.


BDR:

Low Channel

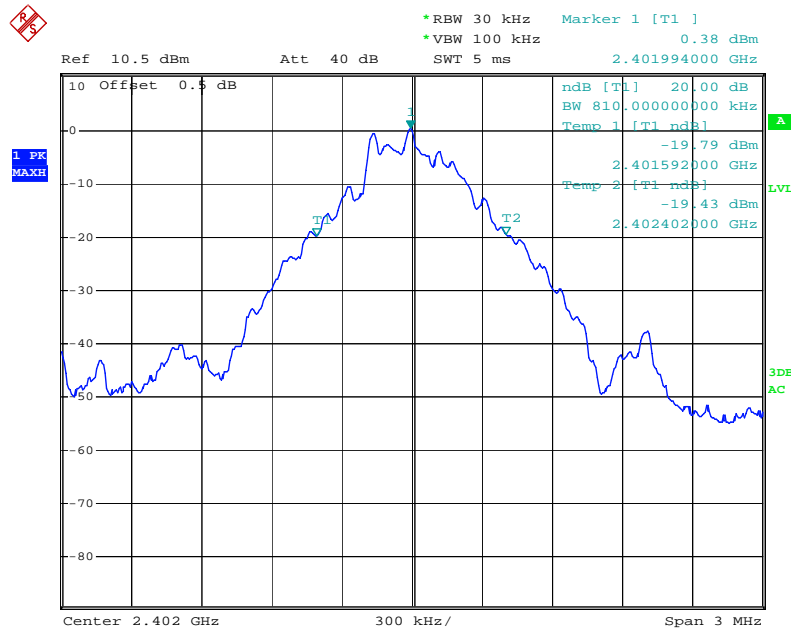


Date: 8.JUN.2011 16:26:14

Middle Channel

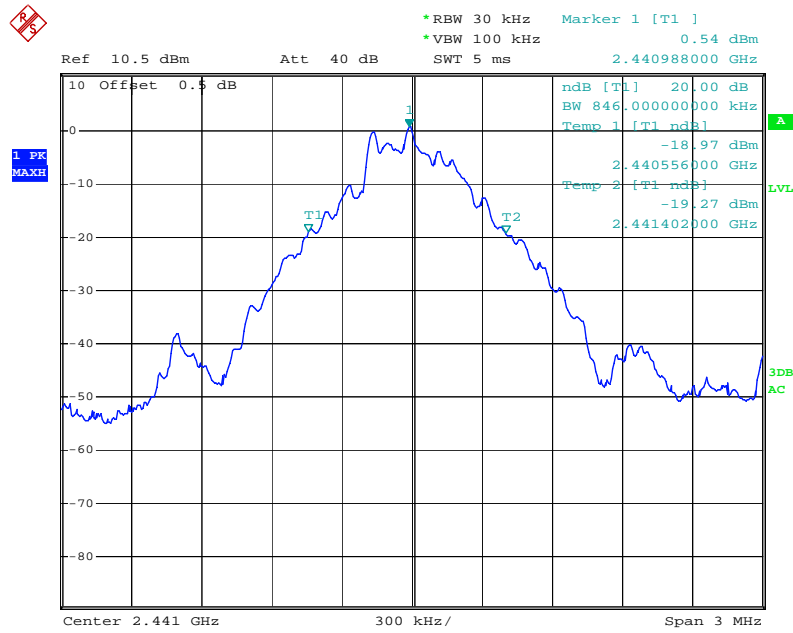

Date: 8.JUN.2011 16:19:56


High Channel

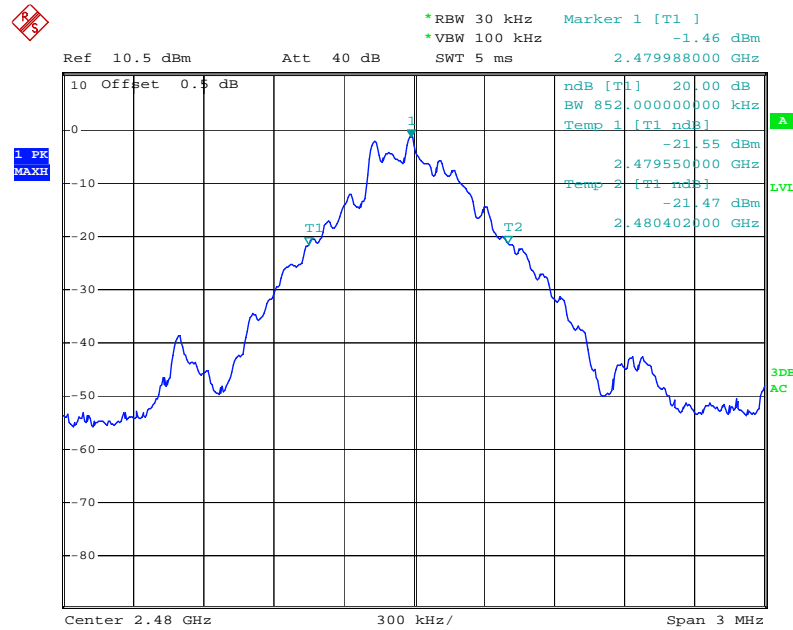

Date: 8.JUN.2011 16:29:48


EDR:

Low Channel

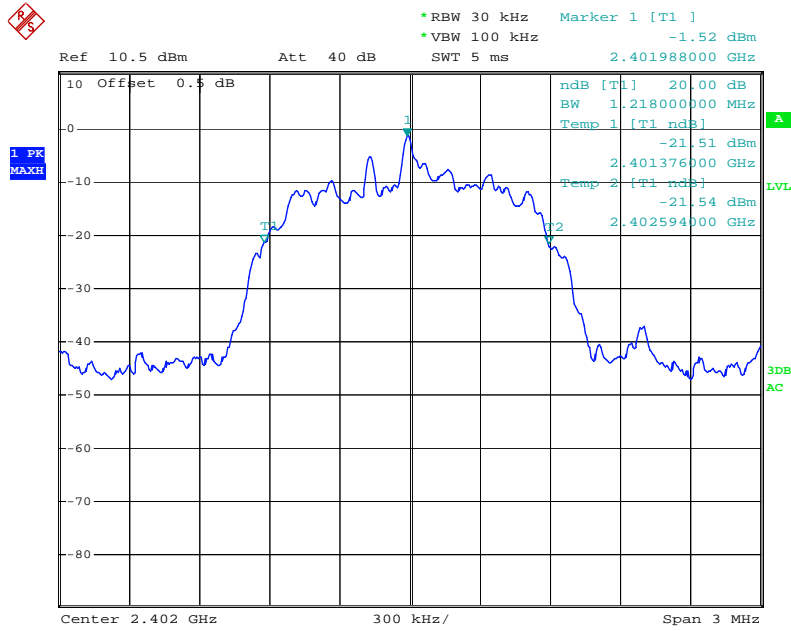


Date: 8.JUN.2011 16:34:56

Middle Channel

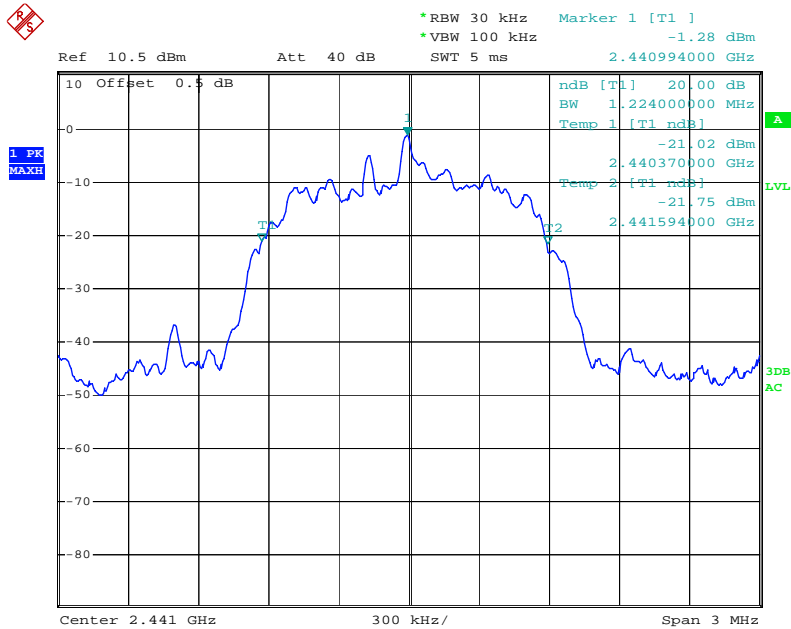

Date: 8.JUN.2011 16:33:56

High Channel

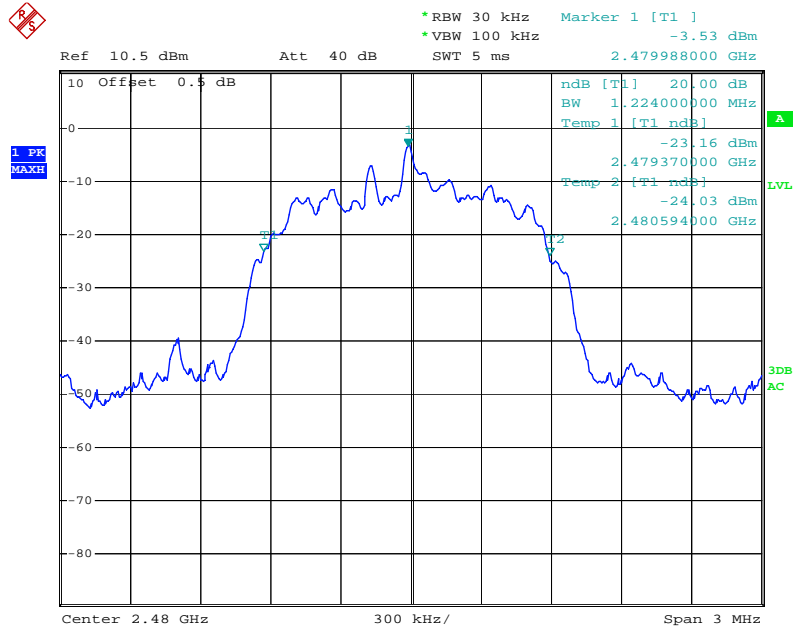

Date: 8.JUN.2011 16:32:54

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa


The testing was performed by Suny Sun on 2011-07-06.

Test Result: Compliance, please refer to following tables and plots

Test Mode: Transmitting

Mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
BDR	2400-2483.5	79	≥ 15
EDR	2400-2483.5	79	≥ 15

Number of Hopping Channels

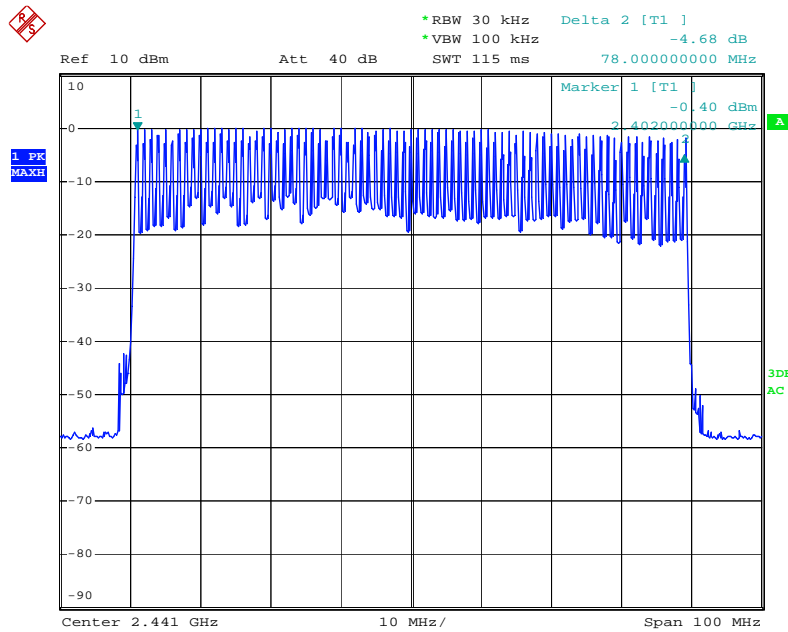

Date: 8.JUN.2011 15:19:22

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 * channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time*hop rate/number of hopping channels*31.6S

Hop rate=1600/S

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* The testing was performed by Suny Sun on 2011-07-06.


Test Result: Compliance, please refer to following tables and plots

Test Mode: Transmitting (BDR)

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.424	0.136	0.4	Pass
	Middle	0.424	0.136	0.4	Pass
	High	0.424	0.136	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s				
DH 3	Low	1.69	0.271	0.4	Pass
	Middle	1.69	0.271	0.4	Pass
	High	1.69	0.271	0.4	Pass
	Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s				
DH 5	Low	2.95	0.315	0.4	Pass
	Middle	2.95	0.315	0.4	Pass
	High	2.95	0.315	0.4	Pass
	Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s				


Please refer to the following plots.

Low Channel for DH1

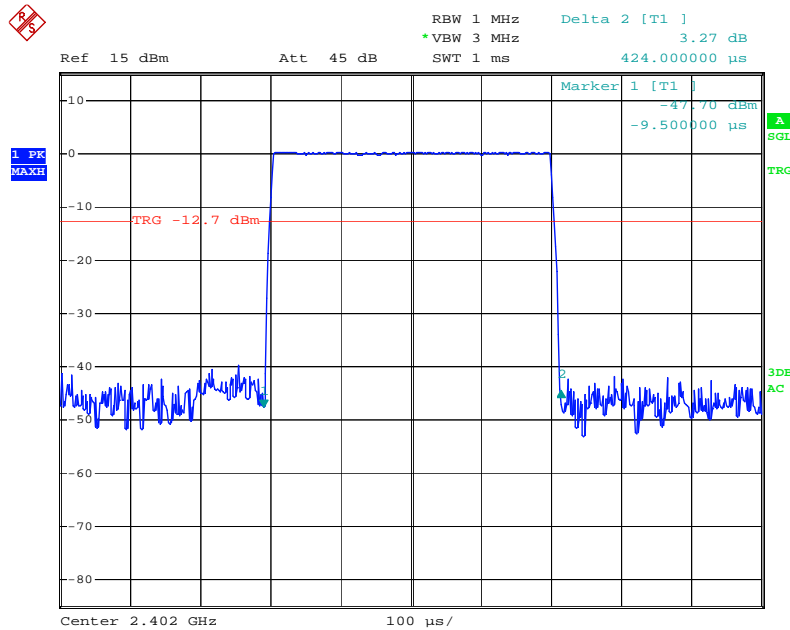


Date: 6.JUL.2011 08:05:10

Middle Channel for DH1

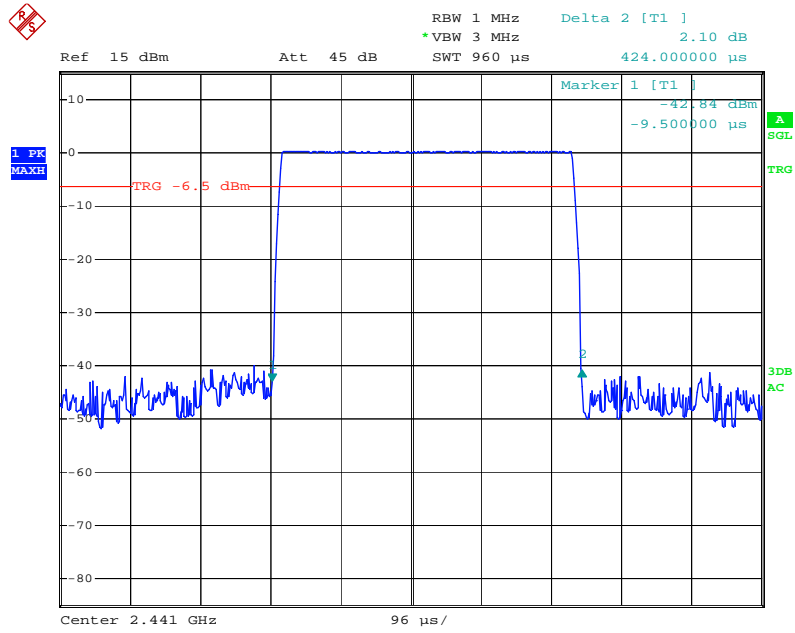


Date: 6.JUL.2011 08:07:14

High Channel for DH1

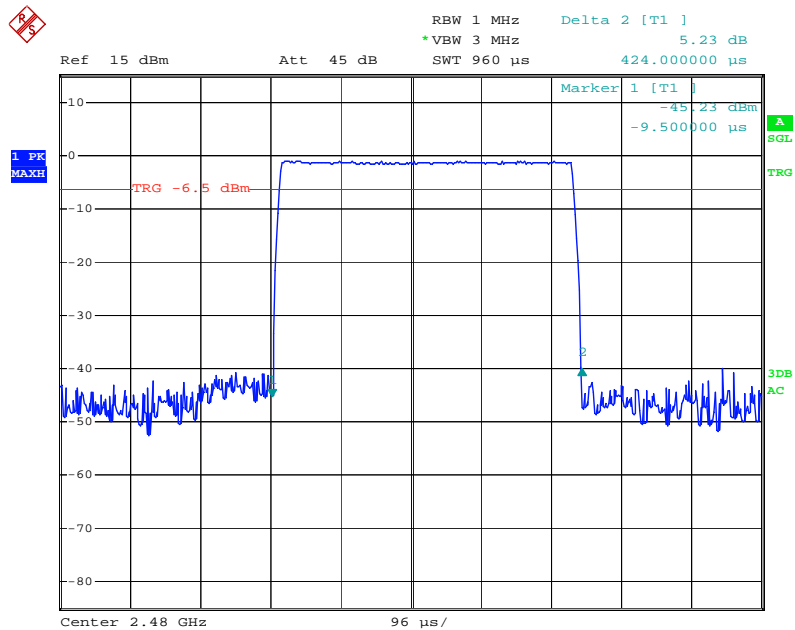


Date: 6.JUL.2011 08:08:35

Low Channel for DH3

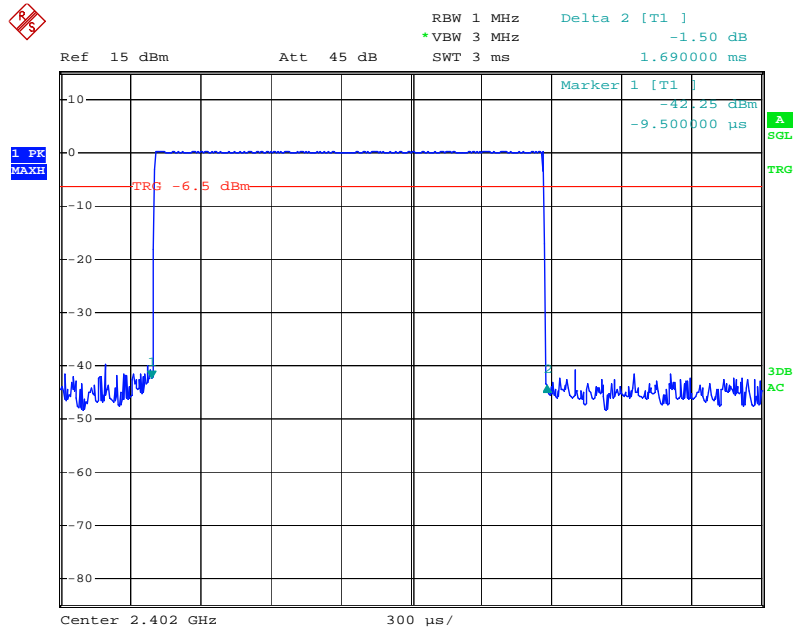


Date: 6.JUL.2011 08:14:16

Middle Channel for DH3

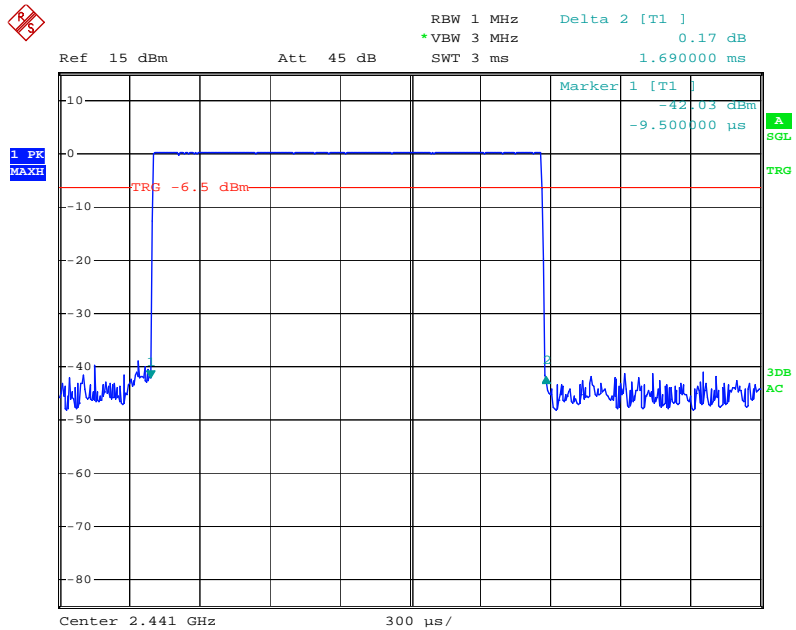


Date: 6.JUL.2011 08:13:40

High Channel for DH3

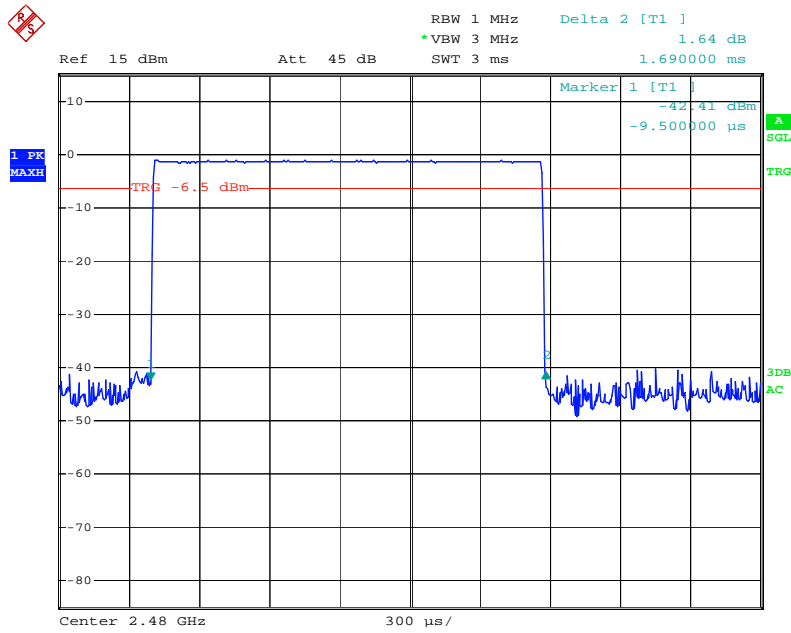


Date: 6.JUL.2011 08:11:23

Low Channel for DH5

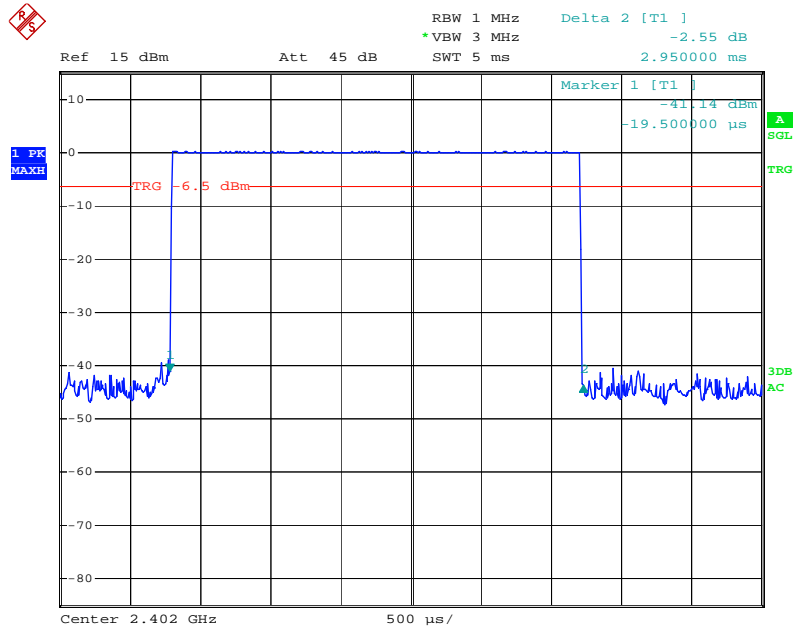


Date: 6.JUL.2011 08:17:12

Middle Channel for DH5

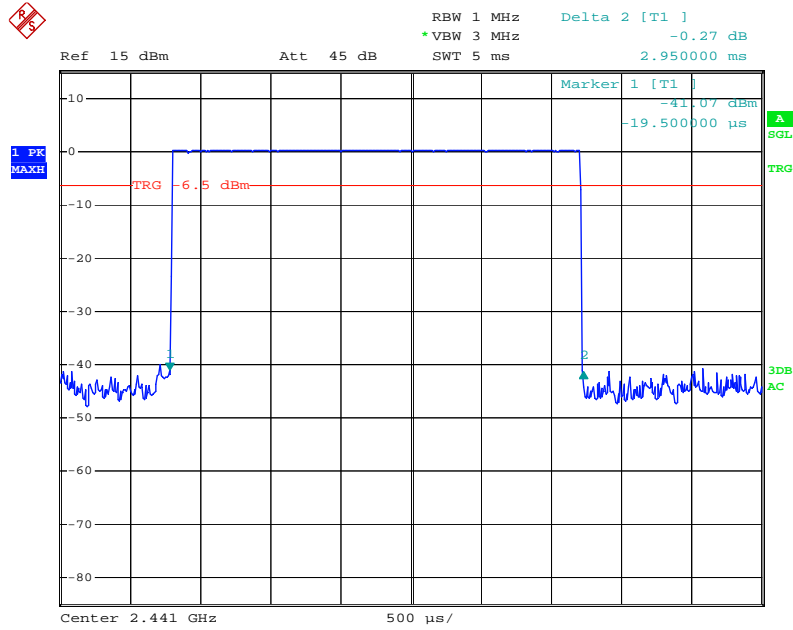

Date: 6.JUL.2011 08:17:51

High Channel for DH5

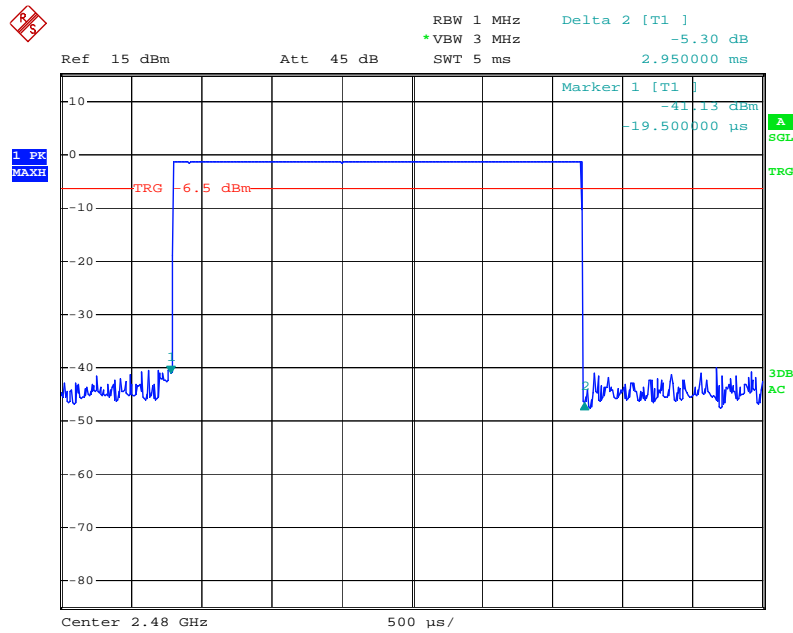


Date: 6.JUL.2011 08:18:19

Test Mode: Transmitting (EDR)

Mode	Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
DH 1	Low	0.4355	0.139	0.4	Pass
	Middle	0.4355	0.139	0.4	Pass
	High	0.4355	0.139	0.4	Pass
Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6s					
DH 3	Low	1.70	0.272	0.4	Pass
	Middle	1.70	0.272	0.4	Pass
	High	1.70	0.272	0.4	Pass
Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6s					
DH 5	Low	2.96	0.316	0.4	Pass
	Middle	2.96	0.316	0.4	Pass
	High	2.96	0.316	0.4	Pass
Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6s					


Please refer to the following plots.

Low Channel for DH1

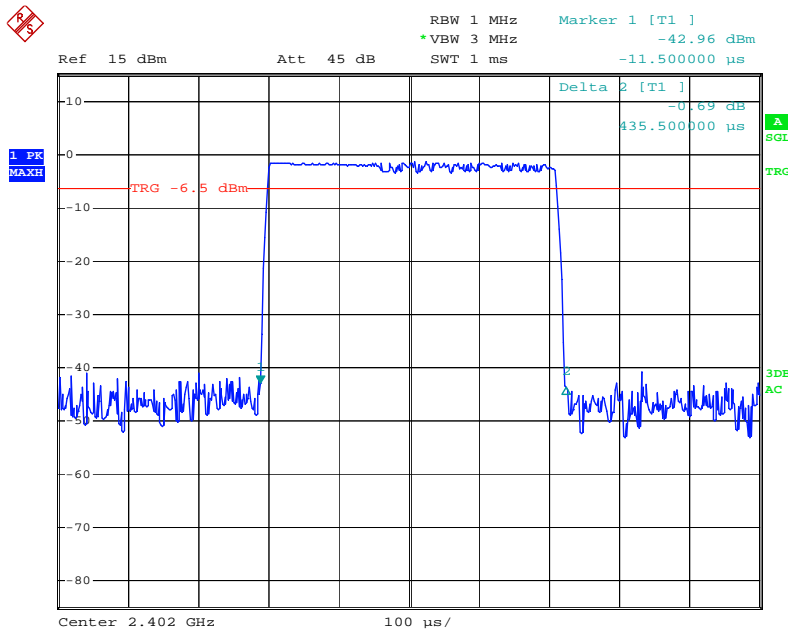


Date: 6.JUL.2011 08:22:42

Middle Channel for DH1

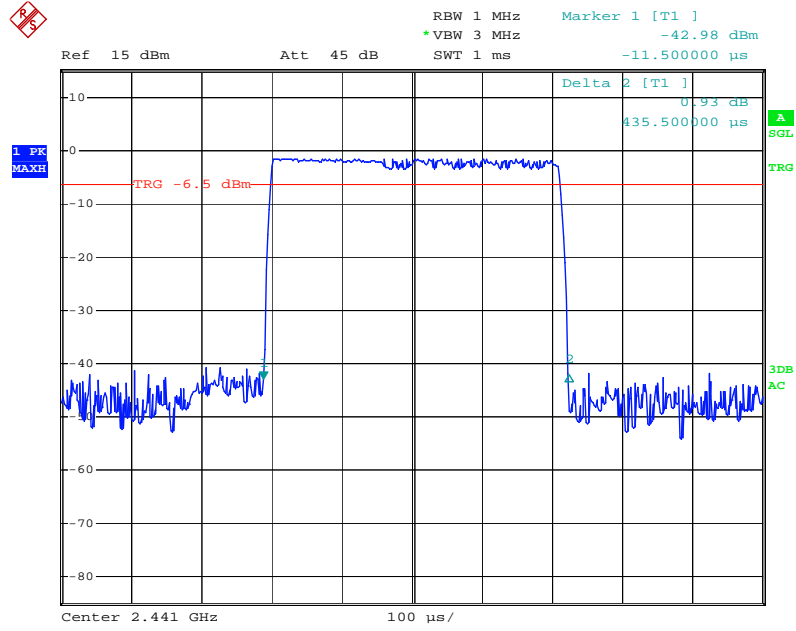


Date: 6.JUL.2011 08:21:39

High Channel for DH1

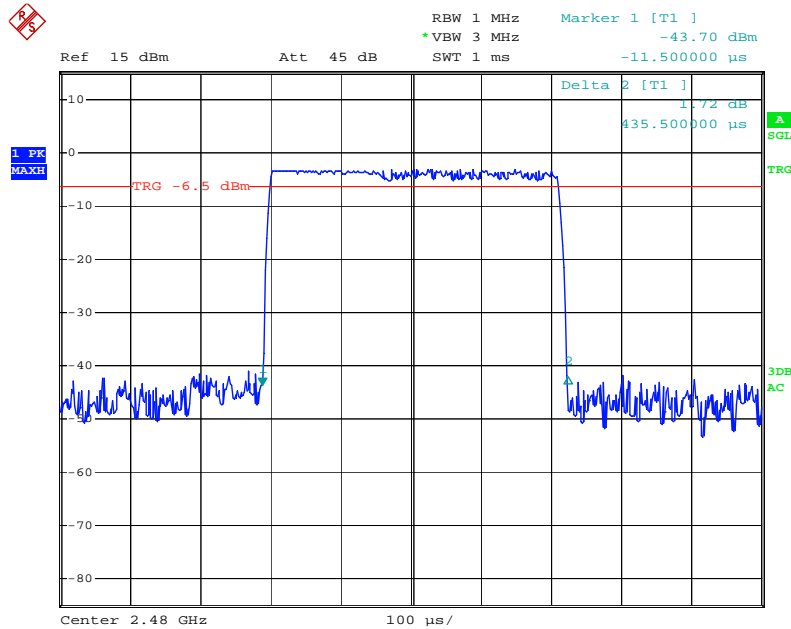


Date: 6.JUL.2011 08:20:57

Low Channel for DH3

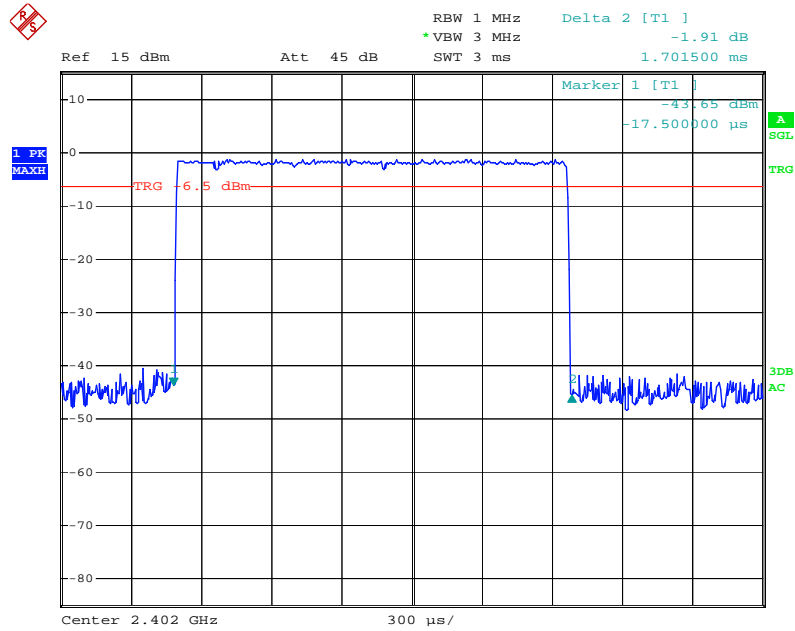


Date: 6.JUL.2011 08:24:09

Middle Channel for DH3

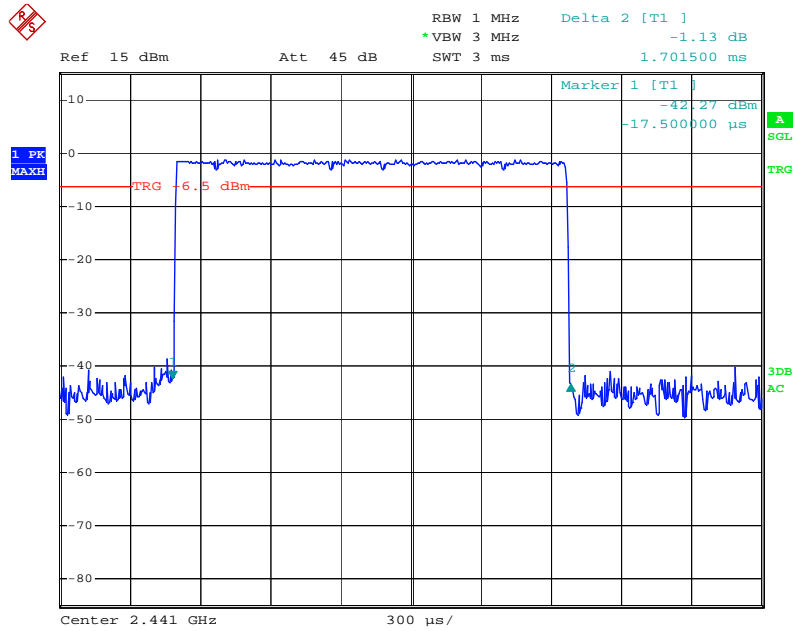


Date: 6.JUL.2011 08:24:37

High Channel for DH3

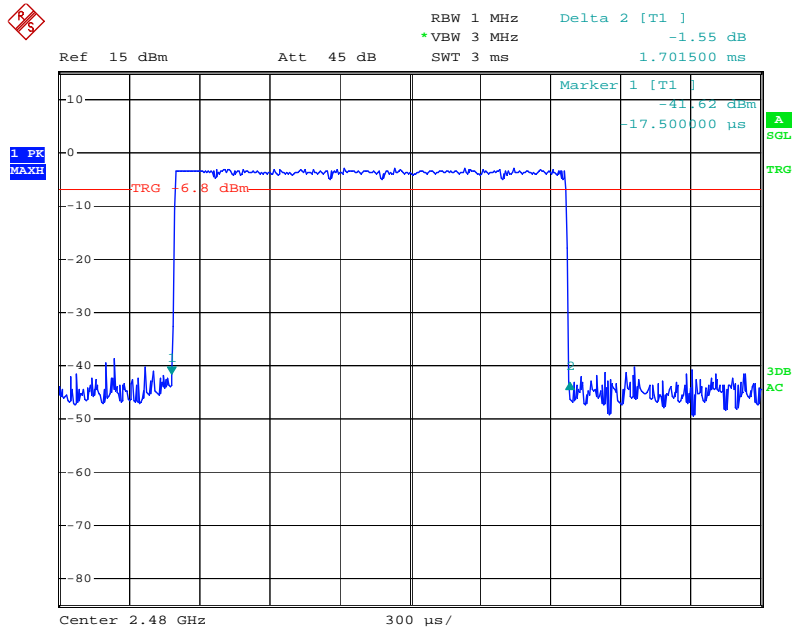


Date: 6.JUL.2011 08:26:03

Low Channel for DH5

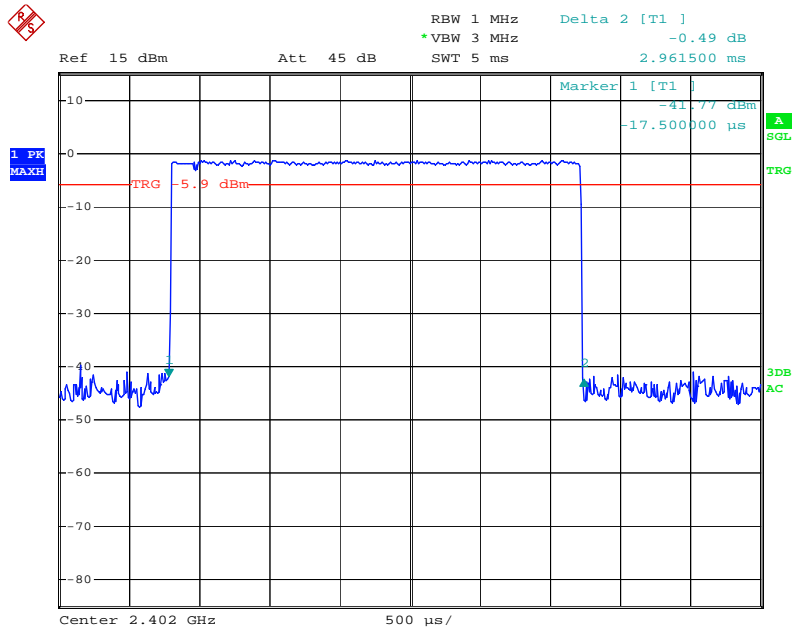


Date: 6.JUL.2011 08:30:35

Middle Channel for DH5

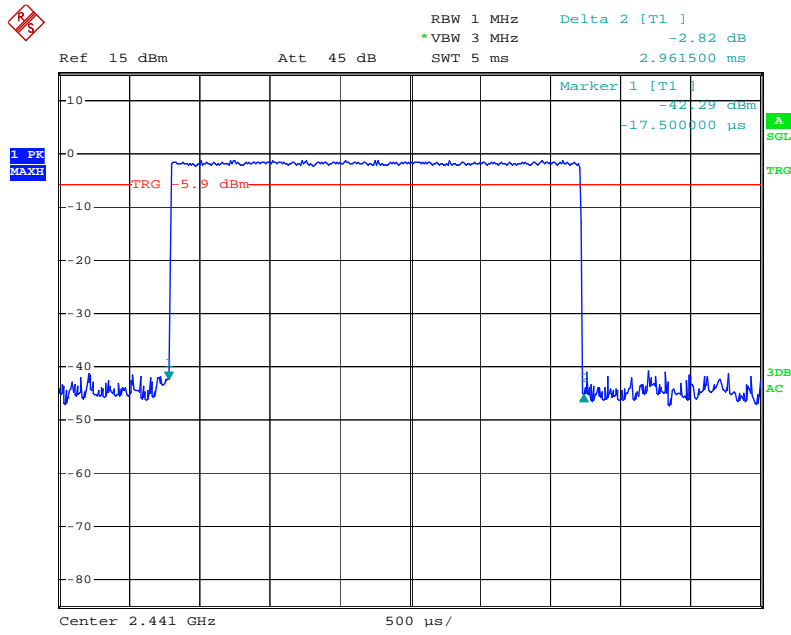

Date: 6.JUL.2011 08:30:07

High Channel for DH5

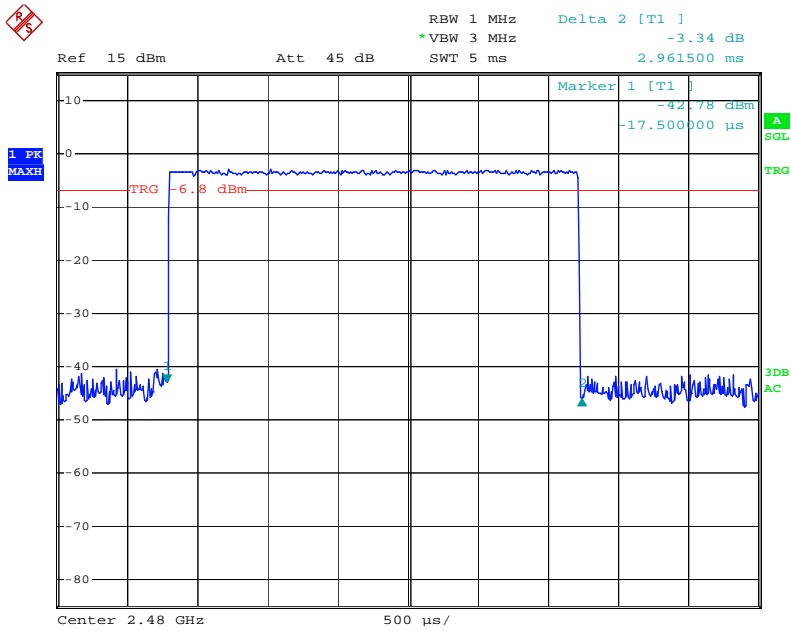

Date: 6.JUL.2011 08:28:30

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.


Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.0kPa

* *The testing was performed by Suny Sun on 2011-07-06.*

Test Result: Compliance.


Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)
BDR	Low	2402	1.21	30
	Middle	2441	1.23	30
	High	2480	-0.20	30
EDR	Low	2402	0.22	30
	Middle	2441	0.19	30
	High	2480	-1.46	30

Please refer to the following plots.


BDR:

Low Channel

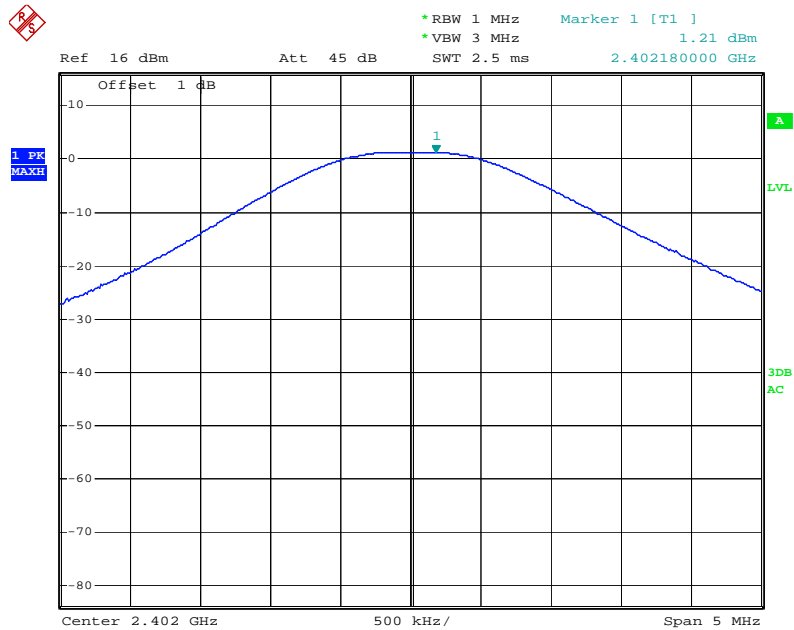


Date: 6.JUL.2011 08:38:46

Middle Channel

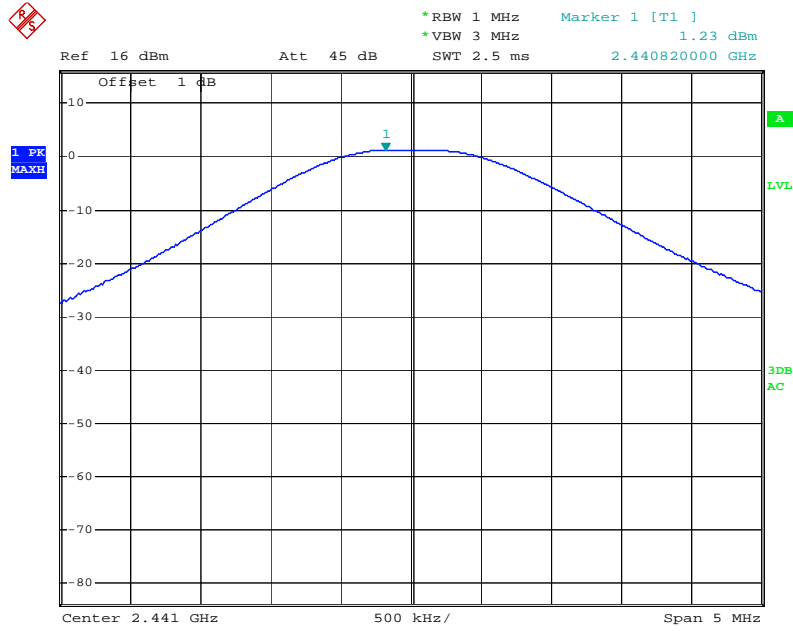

Date: 6.JUL.2011 08:37:33


High Chanel

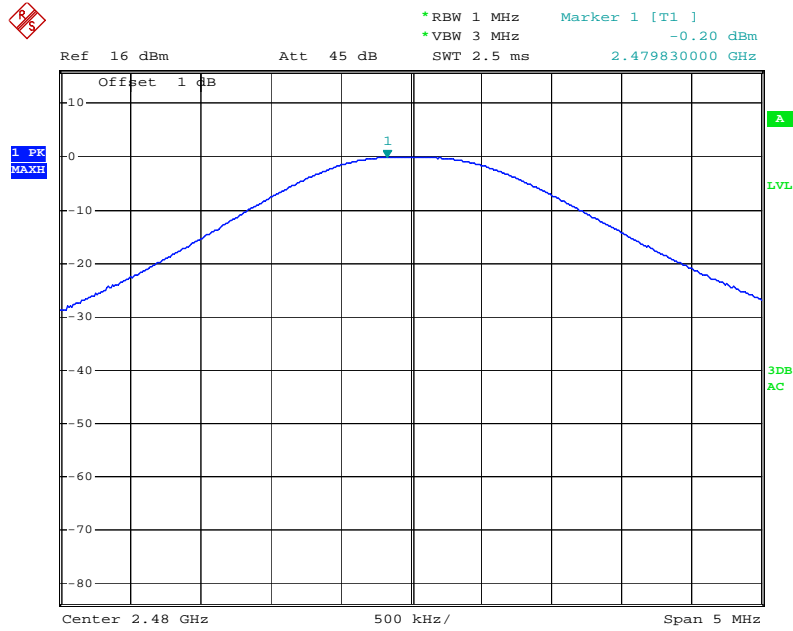

Date: 6.JUL.2011 08:40:08


EDR:

Low Channel

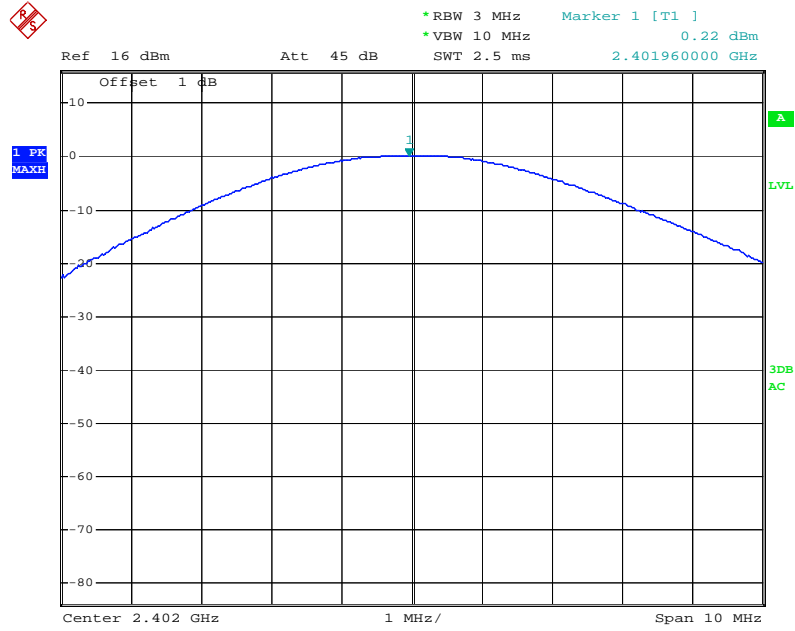


Date: 6.JUL.2011 08:44:52

Middle Channel

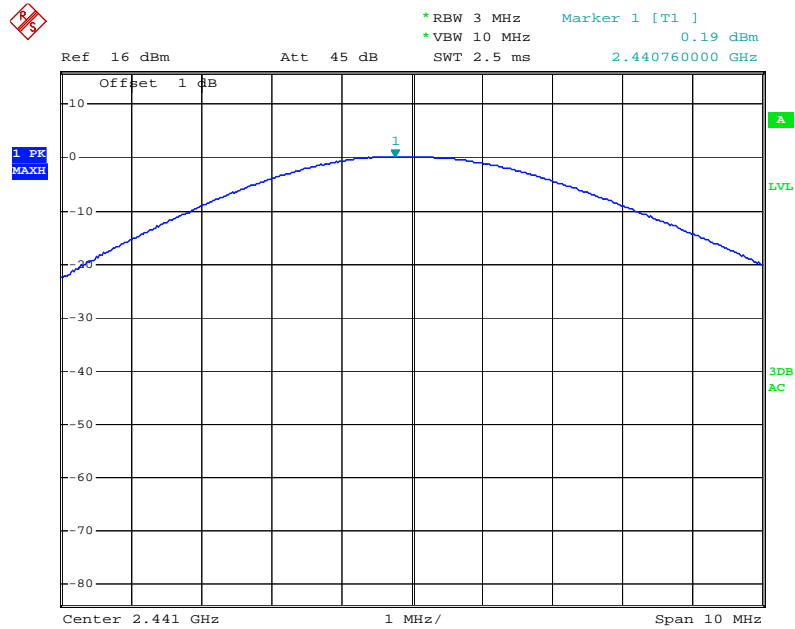

Date: 6.JUL.2011 08:43:47

High Chanel

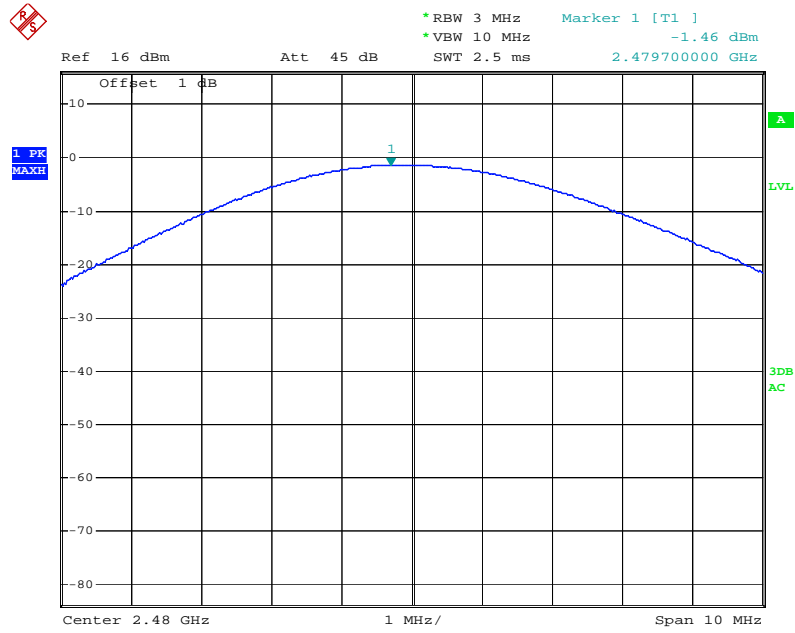

Date: 6.JUL.2011 08:42:40

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2010-11-11	2011-11-10
SUNOL SCIENCES	Horn antenna	DRH-118	A052604	2011-05-05	2012-05-05

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	26 °C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

*The testing was performed by Suny Sun on 2011-07-06.


Test Result: Compliant, please refer to the following table and plots.

Test Mode: Transmitting

Mode	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)
BDR	2399.99	37.93	20
	2488.786	50.58	20
EDR	2399.99	43.41	20
	2488.156	48.18	20


BDR:

Band Edge: Left Side

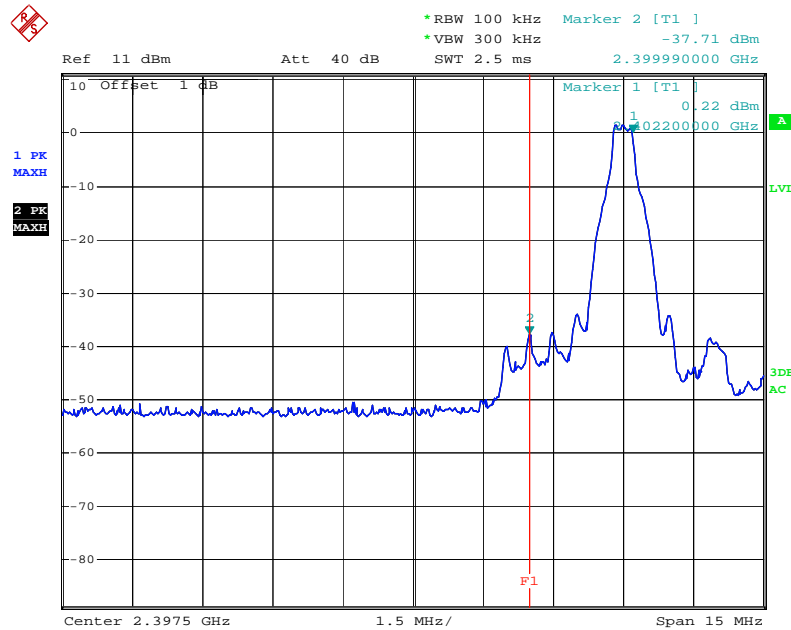

Date: 8.JUN.2011 17:39:35


Band Edge: Right Side

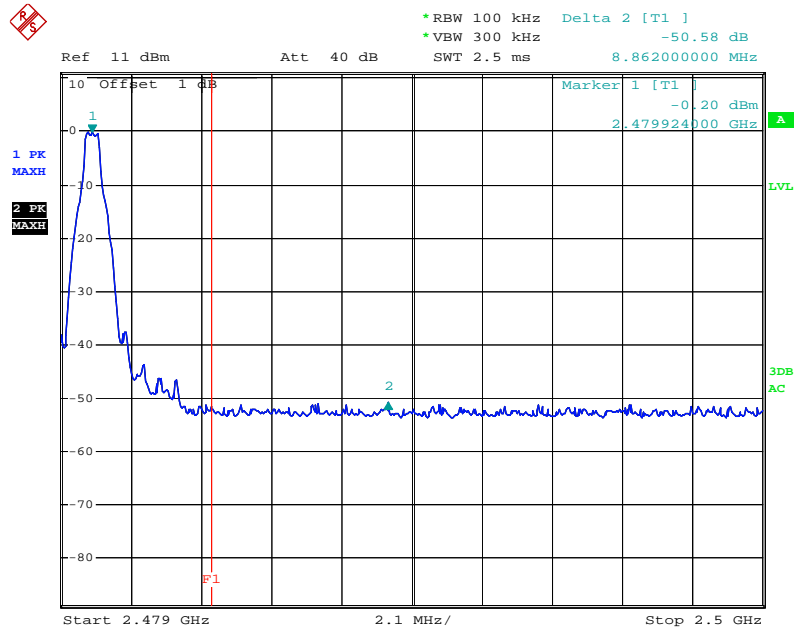

Date: 8.JUN.2011 17:32:09


EDR:

Band Edge: Left Side

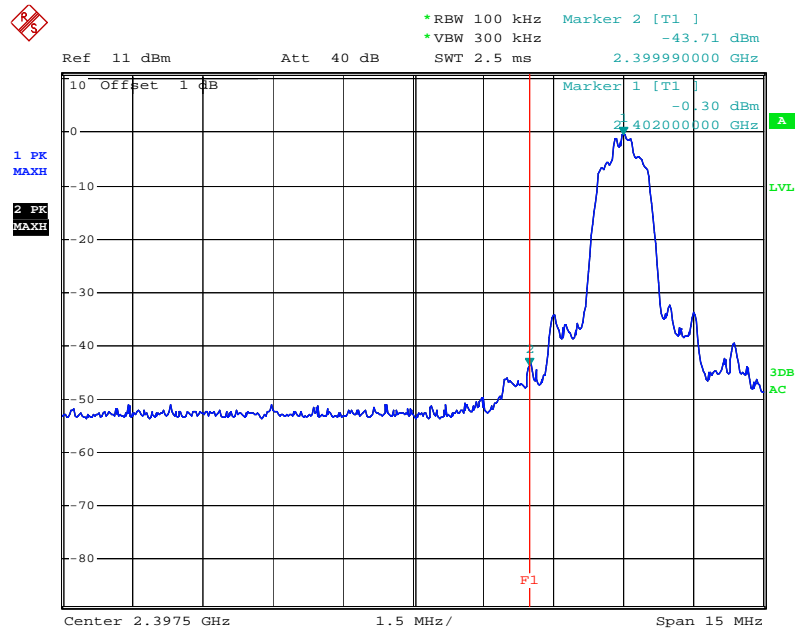

Date: 8.JUN.2011 17:41:44

Band Edge: Right Side

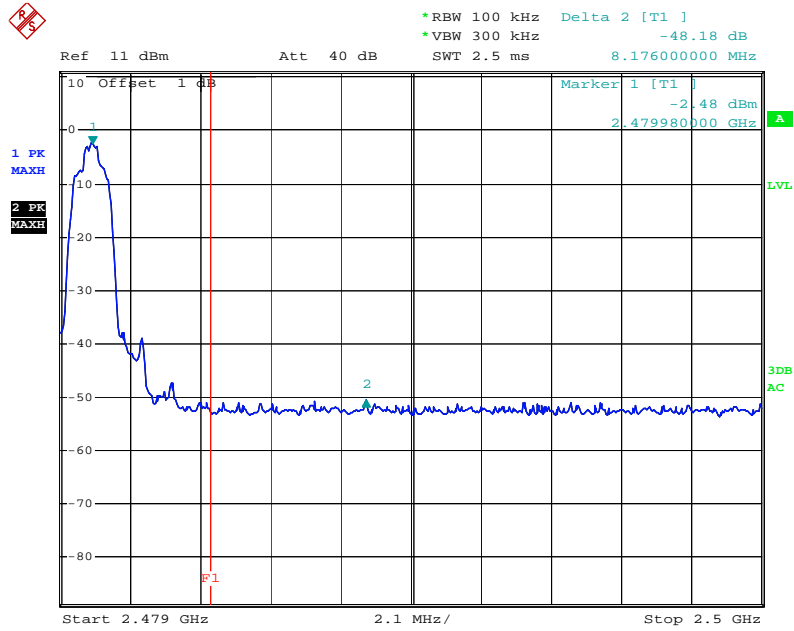

Date: 8.JUN.2011 17:29:57

***** END OF REPORT *****