

Prüfbericht - Nr.: <i>Test Report No.:</i>		16019619 001		Seite 1 von 33 <i>Page 1 of 33</i>			
Auftraggeber: <i>Client:</i>		Zhongshan K-mate General Elec. Co., Ltd. Fuwan Industrial Zone, Fuwan South Road, Sunwen East Road, East District, Zhongshan, Guangdong, P.R. China					
Gegenstand der Prüfung: <i>Test item:</i>		Bluetooth Stereo Speaker					
Bezeichnung: <i>Identification:</i>		BTS001	FCC ID: <i>FCC ID:</i>	WAD-BTS001			
Wareneingangs-Nr.: <i>Receipt No.:</i>		173047574	Eingangsdatum: 11.Sep.2009 <i>Date of receipt:</i>				
Prüfort: <i>Testing location:</i>		TÜV Rheinland (Guangdong) Ltd. EMC Laboratory Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China		Listed test laboratory according to FCC rules section 2.948 for measuring devices under Parts 15			
Prüfgrundlage: <i>Test specification:</i>		ANSI C63.4: 2003 FCC Part 15: July 10, 2008 Subpart C section 15.209 and 15.247					
Prüfergebnis: <i>Test Result:</i>		Der Prüfgegenstand entspricht oben genannter Prüfgrundlage(n). <i>The test item passed the test specification(s).</i>					
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland (Guangdong) Ltd.					
geprüft/ tested by:		kontrolliert/ reviewed by:					
Cherry He 28.Oct.2009 <i>Datum</i> <i>Date</i>		Project Manager <i>Name/Stellung</i> <i>Name/Position</i>		Liangdong Xie 28.Oct.2009 <i>Datum</i> <i>Date</i>			
<i>Unterschrift</i> <i>Signature</i>		<i>Unterschrift</i> <i>Signature</i>					
Sonstiges/ Other Aspects:							
<table style="width:100%; border: none;"> <tr> <td style="width: 50%; border: none;">Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet</td> <td style="width: 50%; border: none;">Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested</td> </tr> </table>						Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested
Abkürzungen: P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet	Abbreviations: P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested						
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>							

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 2 von 33
Page 2 of 33

Test Summary

FCC Rules		Test items	Result
Paragraph	Released Date		
Part 15 Per Section 15.207 (a)	July 10, 2008	Conducted Emission	Pass
Part 15 Per Section 15.209(a)	July 10, 2008	Radiated Spurious Emission	Pass
Part 15 Per Section 15.203	July 10, 2008	Antenna requirement	Pass
Part 15 Per Section 15.247(b)(1)	July 10, 2008	Maximum Peak Output power	Pass
Part 15 Per Section 15.247(a)(1)	July 10, 2008	20dB Bandwidth	Pass
Part 15 Per Section 15.247(a)(1)	July 10, 2008	Hopping Channel Carrier Frequency Separation	Pass
Part 15 Per Section 15.247(a)(1)(iii)	July 10, 2008	Number of Hopping Frequency Used	Pass
Part 15 Per Section 15.247(a)(1)(iii)	July 10, 2008	Time of Occupancy (Dwell Time)	Pass
Part 15 Per Section 15.247(d)	July 10, 2008	Out-Of-Band Emission measurement	Pass

Contents

1	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS	5
2	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING	7
3	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	SUBMITTED DOCUMENTS	9
4	TEST SET-UP AND OPERATION MODE	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SET-UP	11
5	TEST RESULTS EMISSION	14
5.1	CONDUCTED EMISSION	14
5.2	RADIATED SPURIOUS EMISSION	17
5.3	ANTENNA REQUIREMENT	20
5.4	MAXIMUM PEAK OUTPUT POWER	21
5.5	20DB BANDWIDTH	22
5.6	HOPPING CHANNEL CARRIER FREQUENCY SEPARATION	23
5.7	NUMBER OF HOPPING FREQUENCY USED	25
5.8	TIME OF OCCUPANCY (DWELL TIME)	26
5.9	OUT-OF-BAND EMISSION	28

Prüfbericht - Nr.:
*Test Report No.:***16019619 001****Seite 4 von 33**
Page 4 of 33

6	PHOTOGRAPHS OF THE TEST SET-UP.....	30
7	LIST OF TABLES	33
8	LIST OF PHOTOGRAPHS.....	33

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 5 von 33
Page 5 of 33

1 General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendix:

Appendix 1: Test result

2 Test Sites

2.1 Test Facilities

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory

Guangzhou Auto Market, Yuan Gang Section of Guangshan Road
Guangzhou 510650

P. R. China

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Kind of Equipment	Type	Manufacturer	S/N	Calibrated until	Calibrated Interval
EMI Test Receiver	ESCI	Rohde & Schwarz	100216	26.Nov.2009	1 year
Spectrum Analyzer	FSP30	Rohde & Schwarz	100286	27.Aug.2010	1 year
Trilog-Broadband Antenna	VULB9168	SCHWARZBECK MESS- ELEKTRONIK	209	07.Nov.2009	2 year
Double-Ridged Waveguide Horn Antenna	HF906	Rohde & Schwarz	100385	18.Jul.2009	2 year
Pre-amplifier	AFS42-00101800- 25-S-42	MITEQ	1101599	31.Jul.2009	2 year
Band Reject Filter	BRM50702	Micro-Tronics	023	14.Mar.2010	2 year
Standard Gain Horn Antenna	3160-09	EMCO	21642	N/A	N/A
Standard Gain Horn Antenna	3160-09	EMCO	21645	N/A	N/A
Pre-amplifier	AFS33-18002650- 30-8P-44	MITEQ	1108282	31.Jul.2009	2 year
3m Anechoic Chamber	N/A	Albatross Project GmbH	N/A	10.Feb.2010	1 year
Artificial Mains Network	ESH2-Z5	Rohde&Schwarz	100114	27.03.2010	1 year
EMI Test Receiver	ESCS30	Rohde & Schwarz	100316	16.04.2010	1 year

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 7 von 33
Page 7 of 33

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications.

2.5 Measurement Uncertainty

Uncertainty for conducted emissions measurements is $\pm 2.68\text{dB}$.

Uncertainty for radiated emissions measurements is $\pm 4.94\text{dB}$ (30M-1GHz) and $\pm 4.88\text{dB}$ ($> 1\text{GHz}$)

The reported expanded uncertainty is based on a standard uncertainty multiply by a coverage factor $k=2$, providing a level of confidence of approximately 95%.

2.6 Location of original data

The original copies of test data taken during actual testing were attached at Appendix 1 of this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Guangdong) file for certification follow-up purposes.

2.7 Status of facility used for testing

TÜV Rheinland (Guangdong) Ltd. EMC Laboratory; Guangzhou Auto Market, Yuan Gang Section of Guangshan Road, Guangzhou 510650, P. R. China is listed on the US Federal Communications Commission list of facilities approved to perform measurements, the register no. 833845.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 8 von 33
Page 8 of 33

3 General Product Information

The submitted sample is a Bluetooth Stereo Speaker powered by battery or external DC power. It can be paired with a bluetooth cell phone or PDA supporting HFP or pairing with a bluetooth music device or bluetooth transmitter supporting A2DP.

For details, refer to technical document and the user manual.

3.1 Product Function and Intended Use

Refer to the Technical Documentation and user manual.

3.2 Ratings and System Details

Frequency range	:	2400.0MHz – 2483.5MHz (unlicensed ISM band)
Number of employed channels	:	79 channels
Total Number of channels	:	79 channels
Modulation Type	:	Frequency Hopping Spread Spectrum
Type of antenna	:	Integral antenna
Power supply of Bluetooth headset	:	Battery AA 1.5V * 6 Or DC 9V, 1.5A
Ports	:	9V DC input port
Protection Class	:	III

Refer to the Technical Documentation for further information.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 9 von 33
Page 9 of 33

3.3 Independent Operation Modes

Bluetooth: RF Transmitting and receiving

For further information refer to User Manual

3.4 Submitted Documents

Block Diagram
Schematics
Operation Description
Components List
FCC label and location
User Manual
Internal Photos
External Photos
Application form

4 Test Set-up and Operation Mode

4.1 Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Refer to test set-up in chapter 5.

4.3 Special Accessories and Auxiliary Equipment

The products have been tested together with the following device:

Device	Manufacture	Model	Serial no./ Version
Mobile phone	NOKIA	E50	0535573(Code); 351895/01/098468/8(IMEI)
Linear AC adaptor	Ktec	KSAD0900150W1US	---
Bluetooth test Software	CSR	BlueTest	1.24

4.4 Countermeasures to achieve EMC Compliance

The test sample, which has been tested, contained the noise suppression parts as described in the technical document. No additional measures were employed to achieve compliance.

4.5 Test set-up

Diagram 1 of Measurement Equipment Configuration for Testing Conducted Emission

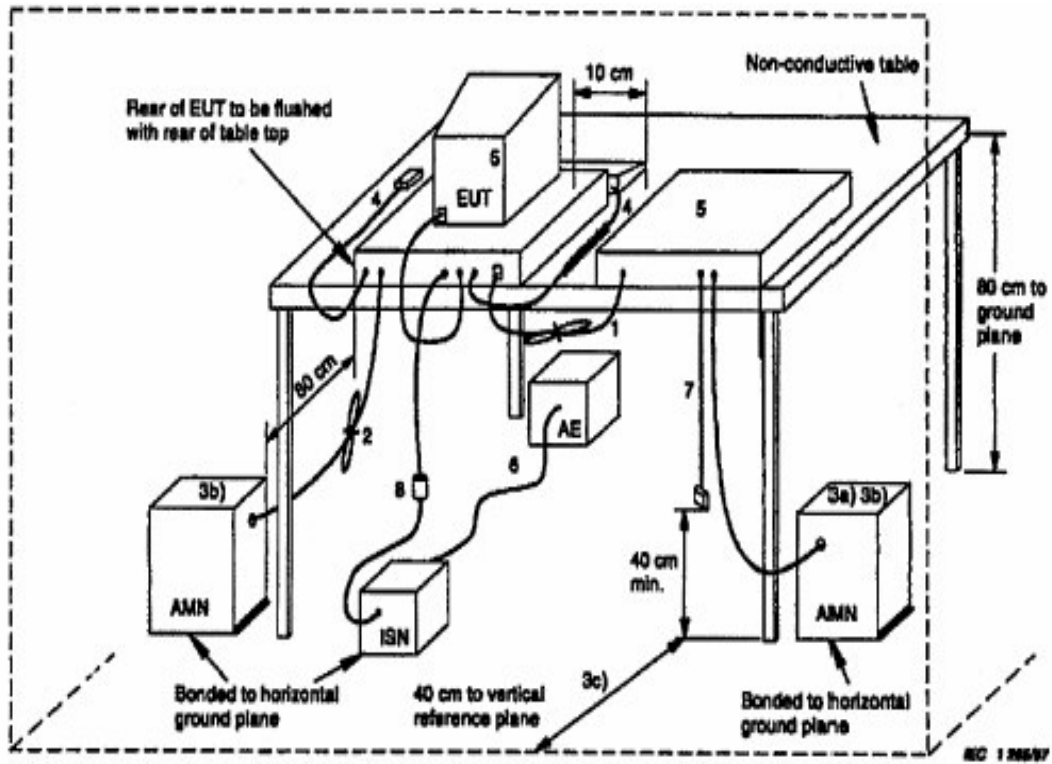


Diagram 2 of Configuration for Testing Radiated Emission below 1 GHz


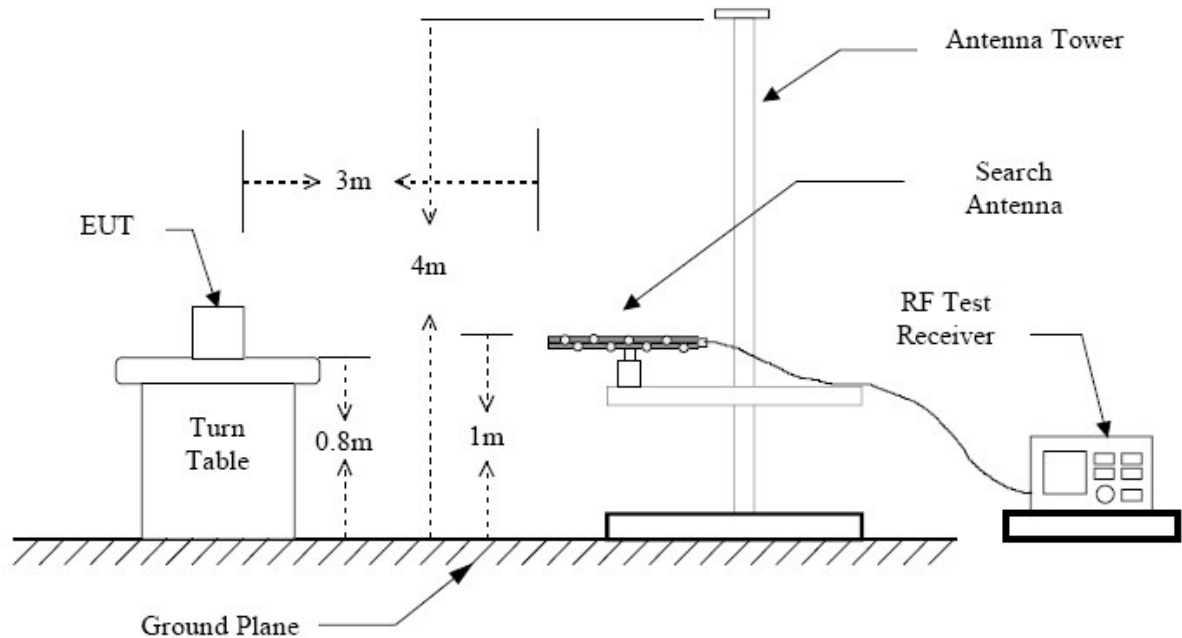


Diagram 3 of Configuration for Testing Radiated Emission above 1 GHz

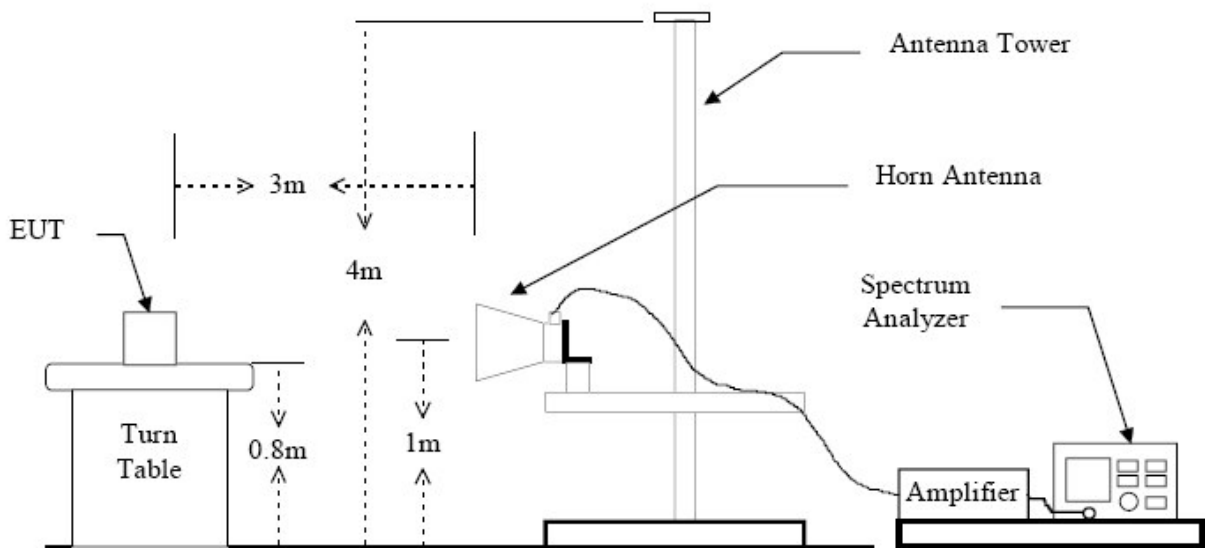


Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 13 von 33
Page 13 of 33

Diagram 3 of Configuration for Testing other test items

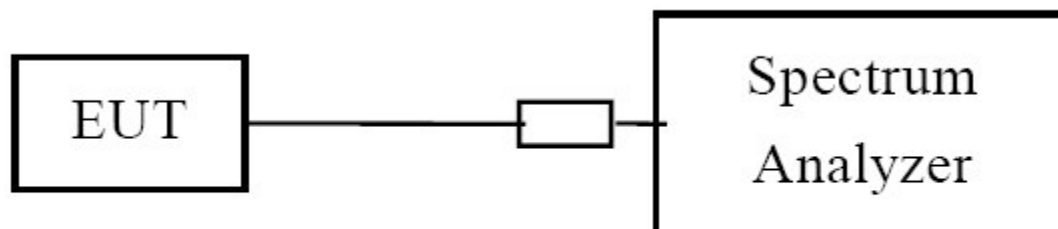

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 14 von 33
Page 14 of 33

5 Test Results EMISSION

5.1 Conducted Emission

RESULT:

Pass

Date of testing	:	27.Oct.2009
Test Basis	:	FCC Part 15 Per Section 15.207(a)
Deviations from Standard Test procedures	:	None
Test procedure	:	Procedure specified in ANSI C63.4 were followed
Kind of test site	:	Shielded room
Operation mode	:	Bluetooth RF transmitting at fix channel with max power
Temperature	:	21°C
Humidity	:	50%

Test procedure:

1. Place the EUT as specified in ANSI C63.4 Clause 7.2.1
2. Plug the LISN to a correct power source (pay attention to: AC/DC, voltage, frequency).
4. Connect the EUT to LISN.
5. Connect ESCS30 and LISN via a 50-ohm coaxial cable and a pulse limiter then begin exploratory measurement as specified in ANSI C63.4 Clause 7.2.3
6. Make final measurement as specified in ANSI C63.4 Clause 7.2.4

If the result of the measurement with the Quasi Peak detector is below the Average limit, the measurement with Average Detector may be omitted.

Please refer to the following graphs. Disturbances are far below the limit.

TÜV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188


EMC Test Record (EMISSION)

Test Information

Manufacturer:	K-Mate		
Test Item:	Bluetooth Stereo Speaker		
Identification:	BTS001		
Test Standard:	FCC Part 15		
Test Detail:	Conducted Emission		
Operation Mode:	Communicating		
Climate Condition:	21°C;	50%RH;	101kPa.
Test Voltage/ Freq.:	AC120V/	60Hz	
Port / Line:	AC120V/60Hz		
Receipt No.:	173047574		
Report No.:	16019619 001		
Result:	Pass		
Comment:	/		

Hardware Setup:	1phase LISN ESH3-Z5 to ESCS30
Level Unit:	dB μ V

Subrange	Detectors	IF Bandwidth	Step Size	Meas. Time	Receiver
150kHz - 30MHz	Peak; Average	9kHz	4.5kHz	10ms	ESCS 30

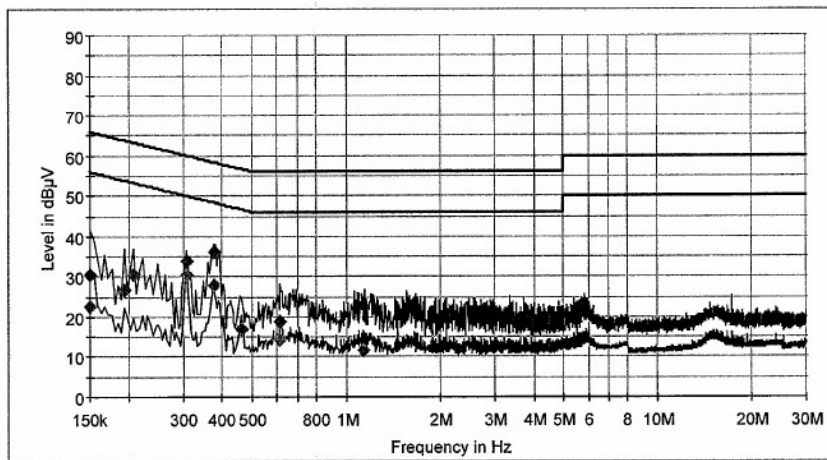

10/27/2009, 1:56:13 PM

Tested by:



Reviewed by:



TUV Rheinland (Guangdong) Ltd.

EMC Test Service Hotline: +86-20-28391188

Final Measurement Detector 1

Frequency (MHz)	QuasiPeak (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	30.6	1000.000	9.000	N
0.195000	26.9	1000.000	9.000	N
0.208500	30.5	1000.000	9.000	L1
0.307500	33.8	1000.000	9.000	L1
0.375000	36.2	1000.000	9.000	L1
0.613500	19.0	1000.000	9.000	L1

(continuation of the "Final Measurement Detector 1" table from column 6 ...)

Frequency (MHz)	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	10.1	35.4	66.0	
0.195000	10.1	36.9	63.8	
0.208500	10.1	32.8	63.3	
0.307500	10.0	26.2	60.0	
0.375000	10.0	22.2	58.4	
0.613500	10.1	37.0	56.0	

Final Measurement Detector 2

Frequency (MHz)	Average (dB μ V)	Meas. Time (ms)	Bandwidth (kHz)	Line
0.150000	22.6	1000.000	9.000	N
0.307500	30.6	1000.000	9.000	L1
0.375000	27.7	1000.000	9.000	L1
0.460500	16.8	1000.000	9.000	L1
0.613500	14.2	1000.000	9.000	L1
1.135500	11.6	1000.000	9.000	L1

(continuation of the "Final Measurement Detector 2" table from column 6 ...)


Frequency (MHz)	Corr. (dB)	Margin (dB)	Limit (dB μ V)	Comment
0.150000	10.1	33.4	56.0	
0.307500	10.0	19.5	50.0	
0.375000	10.0	20.7	48.4	
0.460500	10.1	29.9	46.7	
0.613500	10.1	31.8	46.0	
1.135500	10.1	34.4	46.0	

10/27/2009, 1:56:13 PM

Tested by:



Reviewed by:



Prüfbericht - Nr.:**16019619 001**

Seite 17 von 33

Page 17 of 33

Test Report No.:

5.2 Radiated Spurious Emission

RESULT:**Pass**

Date of testing	:	Sep.21, 2009 - Sep.25, 2009
Test specification	:	FCC Part 15 Per Section 15.209(a)
Limits	:	FCC Part 15 Per Section 15.209(a)
Test procedure	:	Procedure specified in ANSI C63.4
Deviations from Standard Test procedures	:	None
Kind of test site	:	3m Semi-anechoic chamber
Operation mode	:	Bluetooth RF transmitting at fix channel with max power (High, Low, Mid)
Power supply	:	DC 9V
Temperature	:	22°C
Humidity	:	52%

Test procedure:

1. The EUT was placed on the top of a rotatable table 0.8 meters above the ground with 3-orthogonal direction and be kept close enough to the receiving antenna. The table was rotated 360 degrees to determine the suspected emission frequency and the position of the worst radiation case with both horizontal and vertical antenna polarization.
2. The EUT was then set 3 meters away from the receiving antenna, which was mounted on a variable-height antenna tower.
3. For each suspected emission frequency recorded in step 1, the EUT was arranged to its worst case that the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to read the maximum emission.

Note:

While testing, the EUT is connected with a serial port bridge board for test mode setup. The length of the communication cable between the EUT and the bridge board, which including Tx, Rx, GND serial pins, is minimized to reduce the unwanted influence to test result. The bridge board can be connected to a host computer with standard DB9 com port cable for running of the test setup software. After setup successfully, the EUT can keep the test mode with the host computer and the cable removed.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 18 von 33
Page 18 of 33

Table 2: Radiated Emission (Bluetooth: Transmitting at channel low)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
215.0	30.8	N/A	N/A	H	43.5	N/A	N/A
274.0	40.3	N/A	N/A	H	46.0	N/A	N/A
328.1	35.7	N/A	N/A	H	46.0	N/A	N/A
4804.0	N/A	39.3	56.4	H	N/A	54.0	74.0
22048.0	N/A	41.9	55.1	H	N/A	54.0	74.0
22758.0	N/A	45.1	59.2	H	N/A	54.0	74.0
126.0	30.9	N/A	N/A	V	43.5	N/A	N/A
217.7	26.7	N/A	N/A	V	46.0	N/A	N/A
1602.0	N/A	42.2	44.9	V	N/A	54.0	74.0
4804.0	N/A	44.0	59.7	V	N/A	54.0	74.0
21352.0	N/A	42.0	54.2	V	N/A	54.0	74.0
22762.0	N/A	44.9	58.1	V	N/A	54.0	74.0
*)---							

Table 3: Radiated Emission (Bluetooth: Transmitting at channel mid)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
328.1	38.6	N/A	N/A	H	46.0	N/A	N/A
335.9	35.2	N/A	N/A	H	46.0	N/A	N/A
352.0	40.6	N/A	N/A	H	46.0	N/A	N/A
4882.0	N/A	43.1	54.2	H	N/A	54.0	74.0
22826.5	N/A	44.8	56.7	H	N/A	54.0	74.0
24272.0	N/A	43.3	56.7	H	N/A	54.0	74.0
341.2	32.1	N/A	N/A	V	46.0	N/A	N/A
352.0	31.6	N/A	N/A	V	46.0	N/A	N/A
4882.0	N/A	44.3	55.4	V	N/A	54.0	74.0
21314.5	N/A	42.0	54.6	V	N/A	54.0	74.0
22728.5	N/A	44.8	57.0	V	N/A	54.0	74.0
24259.5	N/A	43.3	56.0	V	N/A	54.0	74.0
*)---							

Table 4: Radiated Emission (Bluetooth: Transmitting at channel high)

Frequency	QP	AV	PK	Polarity	Limit		
					QP	AV	PK
[MHz]	[dB μ V/m]			(H/V)	[dB μ V/m]		
275.45	39.8	N/A	N/A	H	46.0	N/A	N/A
330.8	36.8	N/A	N/A	H	46.0	N/A	N/A
384.0	34.5	N/A	N/A	H	46.0	N/A	N/A
4960.0	N/A	44.2	54.5	H	N/A	54.0	74.0
22794.0	N/A	44.8	58.3	H	N/A	54.0	74.0
24242.0	N/A	43.2	55.6	H	N/A	54.0	74.0
151.0	28.3	N/A	N/A	V	43.5	N/A	N/A
217.9	35.7	N/A	N/A	V	46.0	N/A	N/A
4960.0	N/A	46.6	56.6	V	N/A	54.0	74.0
21372.0	N/A	40.4	52.9	V	N/A	54.0	74.0
22750.0	N/A	46.1	58.2	V	N/A	54.0	74.0
23607.0	N/A	42.3	54.7	V	N/A	54.0	74.0
*)---							

*) Note:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz at frequency below 1GHz.

The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz at frequency above 1GHz.

Measurement is made from 9kHz to 25 GHz. Disturbances other than those mentioned above are small or not detectable.

Prüfbericht - Nr.:
*Test Report No.:***16019619 001****Seite 20 von 33**
Page 20 of 33

5.3 Antenna requirement

RESULT:**Pass**

Date of testing

:

Test specification

:

FCC Part 15 Per Section 15.203

FCC Part 15 Per Section 15.247(b)

For intentional device, according to 15.203, and intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to 15.247(b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by amount in dB than the directional gain of the antenna exceeds of 6dBi.

As the BT antenna is permanently printed on RF Board, there is no consideration of replacement.

And the max gain of the antenna is 0dBi.

5.4 Maximum Peak Output Power

RESULT:
Pass

Date of testing : Sep. 22, 2009
 Test specification : FCC Part 15 Per Section 15.247(b)(1)
 Limits : FCC Part 15 Per Section 15.247(b)(1)

For frequency hopping systems operating in the band 2400-2483.5 MHz employing at least 75 hopping channels, the maximum peak conducted output power shall not exceed 1 W; for all other frequency hopping systems in the band, the maximum peak conducted output power shall not exceed 0.125 W.

Deviations from Standard Test procedures :

None
 Test procedure : Procedure specified in ANSI C63.4
 Kind of test site : Shielded room
 Operation mode : Bluetooth continuously transmitting on the measured channel.
 Power supply : DC 9V
 Temperature : 22°C
 Humidity : 52%

Table 5: Peak Conducted Power

Channel	Frequency (MHz)	Power Reading(dBm)	Cable Loss (dB)	Output Power		Limit (mW) *
				(dBm)	(mW)	
Low	2402.2	5.54	0.40	5.94	3.93	1000
Mid	2440.8	5.09	0.40	5.49	3.54	1000
High	2480.0	4.57	0.40	4.97	3.14	1000

*Note: Refer to the test result of "Number of Hopping Channel Used" for the non-overlap channel number.

5.5 20dB Bandwidth

RESULT:
Pass

Date of testing : Sep. 22, 2009
 Test specification : FCC Part 15 Per Section 15.247(a)(1)
 Limits : FCC Part 15 Per Section 15.247(b)(1)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test

procedures : None
 Test procedure : Procedure specified in ANSI C63.4
 Operation mode : Bluetooth continuously transmitting on the measured channel.
 Kind of test site : Shielded room
 Power supply : DC 9V
 Temperature : 22°C
 Humidity : 52%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency= measured channel, RBW=10kHz, VBW=30kHz.
4. Mark the peak power frequency point and the -20dB upper and lower frequency points.
5. Read the frequency delta value between the -20dB upper and lower frequency points.
6. Repeat step 2 to 5 until all the channels required are finished.

Table 6: 20dB Bandwidth

Channel	Frequency (GHz)	Test Result (kHz)
Low	2402.0	942
Mid	2441.0	930
High	2480.0	918

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 23 von 33
Page 23 of 33

5.6 Hopping Channel Carrier Frequency Separation

RESULT:

Pass

Date of testing : Sep. 22, 2009
Test specification : FCC Part 15 Per Section 15.247(a)(1)
Limits : FCC Part 15 Per Section 15.247(a)(1)

Frequency hopping systems operating in the band 2400-2483.5 MHz may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

Deviations from Standard Test procedures

: None
Test procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Bluetooth transmitting with hopping at the full channel set
Power supply : DC 9V
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 30 kHz, VBW = 100 kHz, Frequency Span = wide enough to cover the adjacent channel.
4. Mark the peak power frequency point of the measured channel and its adjacent channel(s)
5. Read the frequency delta value between the measured channel and its adjacent channel(s)
6. Repeat step 3 to 5 until all the channels measured are finished.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 24 von 33
Page 24 of 33

Table 7: Hopping Channel Carrier Frequency Separation

Channel	Adjacent Hopping channel separation (kHz)	Limit
Low	996	At least 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater. Note: refer to table 6 for the value of 20dB bandwidth
Mid	1008	
High	996	

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 25 von 33
Page 25 of 33

5.7 Number of Hopping Frequency Used

RESULT:

Pass

Date of testing : Sep. 22, 2009
 Test specification : FCC Part 15 Per Section 15.247(a)(1)(iii)
 Limits : FCC Part 15 Per Section 15.247(a)(1)(iii)

Frequency hopping system in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels

Deviations from Standard Test procedures

: None
 Test procedure : Procedure specified in ANSI C63.4
 Kind of test site : Shielded room
 Operation mode : Bluetooth transmitting with hopping at the full channel set
 Power supply : DC 9V
 Temperature : 22°C
 Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low lost cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100 kHz, VBW≥RBW, Frequency Span = wide enough to cover the channels to be plotted.
4. Set the spectrum analyzer to Max-hold mode and plot the result(s) with record of all hopping channel.

Table 8: Number of hopping frequency

Number of hopping frequency:	79
Limit:	At least 15 non-overlapping channels

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:

16019619 001

Seite 26 von 33

Test Report No.:

Page 26 of 33

5.8 Time of Occupancy (Dwell Time)

RESULT:

Pass

Date of testing : Sep. 22, 2009
Test specification : FCC Part 15 Per Section 15.247(a)(1)(iii)
Limits : FCC Part 15 Per Section 15.247(a)(1)(iii)

For frequency hopping system operating in the 2400-2483.5MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

Deviations from Standard Test procedures

Deviations from Standard Test procedures : None
Test Procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Bluetooth transmitting with hopping at the full channel set (DH5 mode)
Power supply : DC 9V
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: Centered Frequency = measured channel, RBW = 1MHz, VBW \geq RBW, Frequency Span = 0 Hz.
4. Set sweep time properly to capture the entire dwell time per hopping channel.
5. Set detector type to Peak and trace mode to Max Hold and make the measurement.
6. Repeat step 3-5 until all channels measured were complete.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 27 von 33
Page 27 of 33

Table 9: Dwell Time (DH5 mode)

channel	Frequency (GHz)	Dwell time of one signal Burst (ms)	Total Dwell Time (ms)	Limit (ms)
Low	2.402	2.960	$(2.960 \times \mathbf{106.81}) = 316.16$	400
Mid	2.441	2.940	$(2.940 \times \mathbf{106.81}) = 314.02$	400
High	2.480	2.960	$(2.960 \times \mathbf{106.81}) = 316.16$	400

Note :

Period = 0.4 (seconds) x 79 (channels) = 31.6 seconds

For Bluetooth system, there are 1600 timeslots in one second. The DH5 mode operates on a 5-slot transmission and 1-slot receiving basis. Thus there are $1600 / (5+1) = 266.7$ transmission per second. In one period for each particular channel there are $(266.7/79) \times 31.6 = 106.81$ times of transmission.

Dwell Time in one period(ms) = Dwell time of one-slot transmission(ms) multiplexes **106.81**

Please refer to Appendix 1 for measurement data.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 28 von 33
Page 28 of 33

5.9 Out-of-Band Emission

RESULT:

Pass

Date of testing : Sep. 25, 2009
Test specification : FCC Part 15 Per Section 15.247(d)
Limits : FCC Part 15 Per Section 15.247(d)

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

In addition:

FCC Part 15 - radiated emission which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in section 15.209(a).

Deviations from Standard Test procedures : None
Test Procedure : Procedure specified in ANSI C63.4
Kind of test site : Shielded room
Operation mode : Bluetooth transmitting at the highest and lowest channel (band edge)
Power supply : DC 9V
Temperature : 22°C
Humidity : 55%

Test procedure:

1. Connect the antenna port of the EUT to the spectrum analyzer by a low loss cable.
2. Set the EUT to proper test mode with relative test software and hardware.
3. Spectrum analyzer setting: RBW = 100 kHz, VBW ≥ RBW.
4. Set proper frequency span respectively for out-of-band emission measurement of the band edge and the whole range (up to 10 times of the carrier frequency.)
5. Set the trace mode to Max Hold and mark the peak reading of any spurious emission recorded.

Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 29 von 33
Page 29 of 33

Table 10: Out-Of-Band Emission measurement (conducted)

Emission (Carrier operating at Channel low, mid and high)	Attenuation	Limit (dB)
30MHz to 25GHz	All emission in this 100kHz bandwidth are attenuated more than 20dB from the carrier	$\Delta \geq 20$

Note: Refer to Appendix 1 for measurement data.

Table 11: Band Edges Emission in the Restricted Bands by Marker Delta Method

Frequency [MHz]	dBc [dB]	PK [dBμV/m]	AV [dBμV/m]	Polarity (H/V)	PK limit [dBμV/m]	AV limit [dBμV/m]
2376MHz	59.12	39.65	---	H	74	54
2484MHz	57.14	37.48	---	H	74	54

NOTE:

- The Peak carrier field strength of the lowest channel is 98.77dBuV/m.
The Peak carrier field strength of the highest channel is 94.62dBuV/m
The above field strength levels were measured in horizontal polarity which is the worst case.
- The dBc value between the carrier maximum power and band edge emission power of the frequency listed in the table is calculated from the test record showed in Appendix 1.
- Peak value of the low band edge emission listed in the table is calculated by the below formula:
PK value of band edge emission = Peak carrier field strength – dBc value in item2

*Note: Please refer to Appendix 1 for measurement data. Disturbances other than those mentioned above are small or not detectable. Please refer to the Appendix 1 for the noise floor of the band edge emission.


Prüfbericht - Nr.:
Test Report No.:

16019619 001

Seite 30 von 33
Page 30 of 33

6 Photographs of the Test Set-Up

Photograph 1: Set-up for Conducted Emission

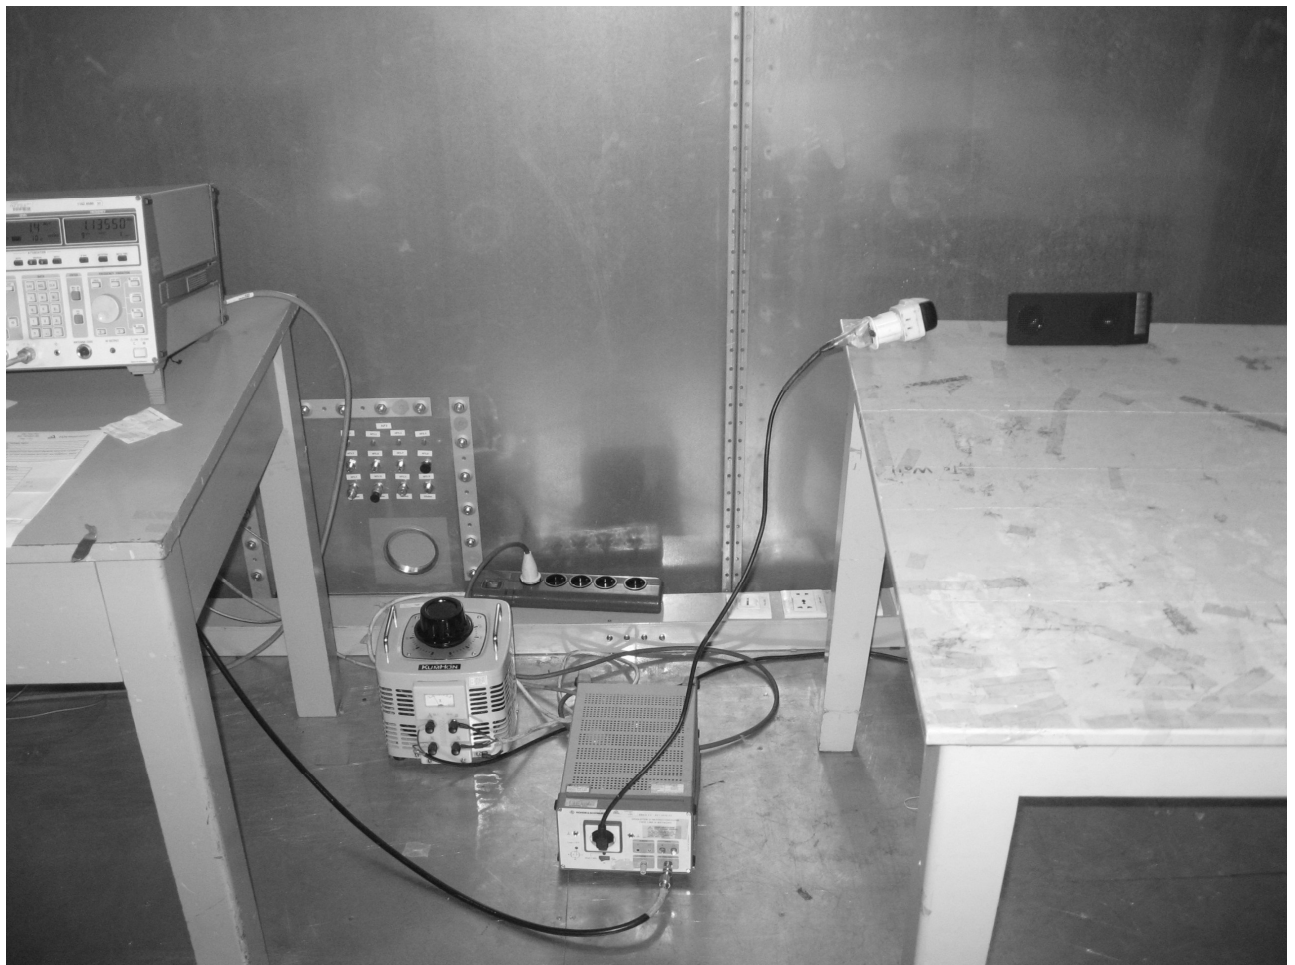


Prüfbericht - Nr.:
Test Report No.:



16019619 001

Seite 31 von 33
Page 31 of 33

Photograph 2: Set-up for Radiation Measurement below 1GHz

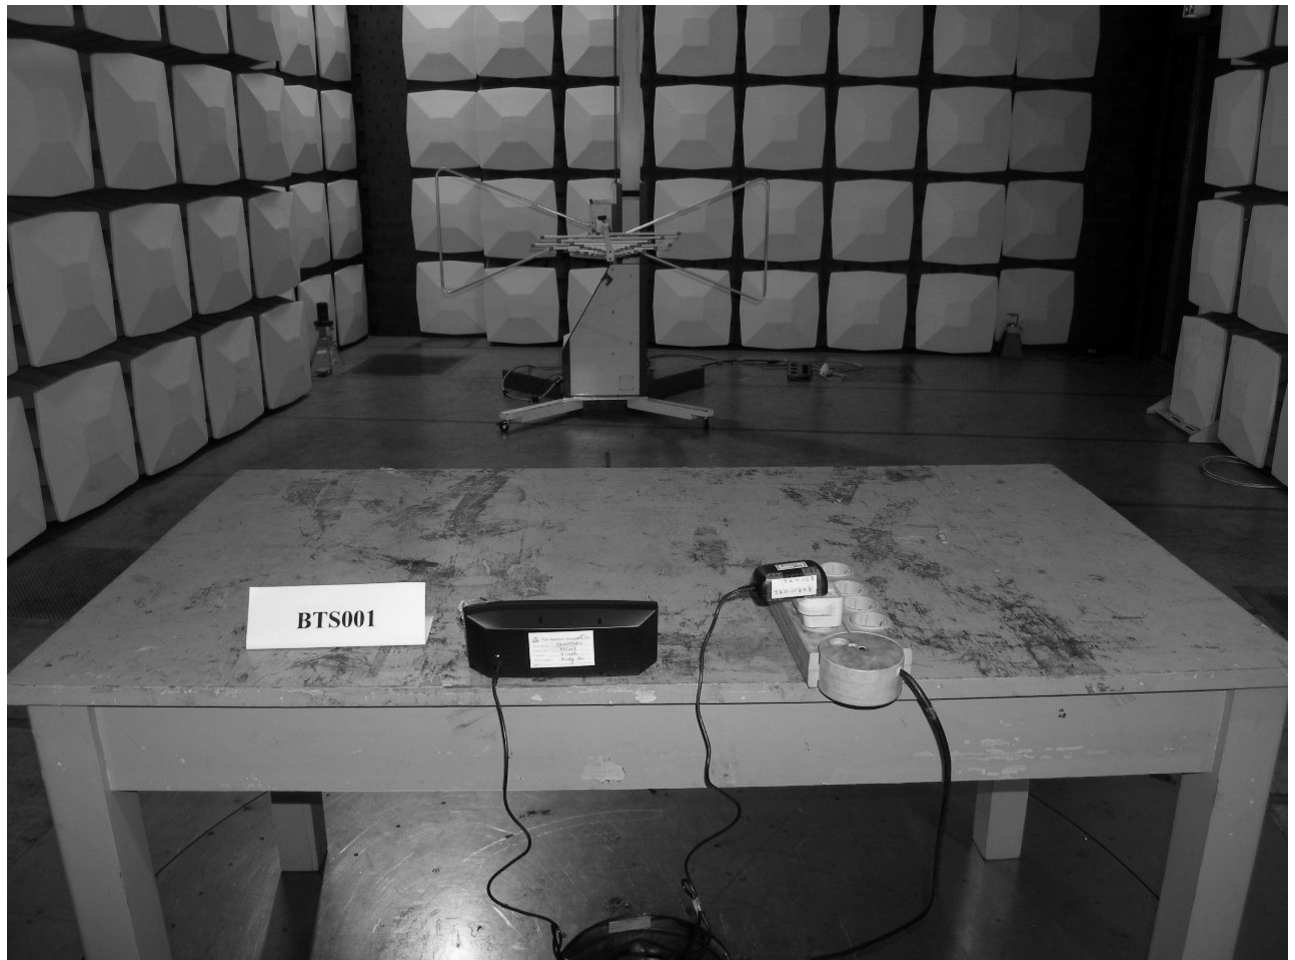

Photograph 3: Set-up for Radiation Measurement above 1GHz

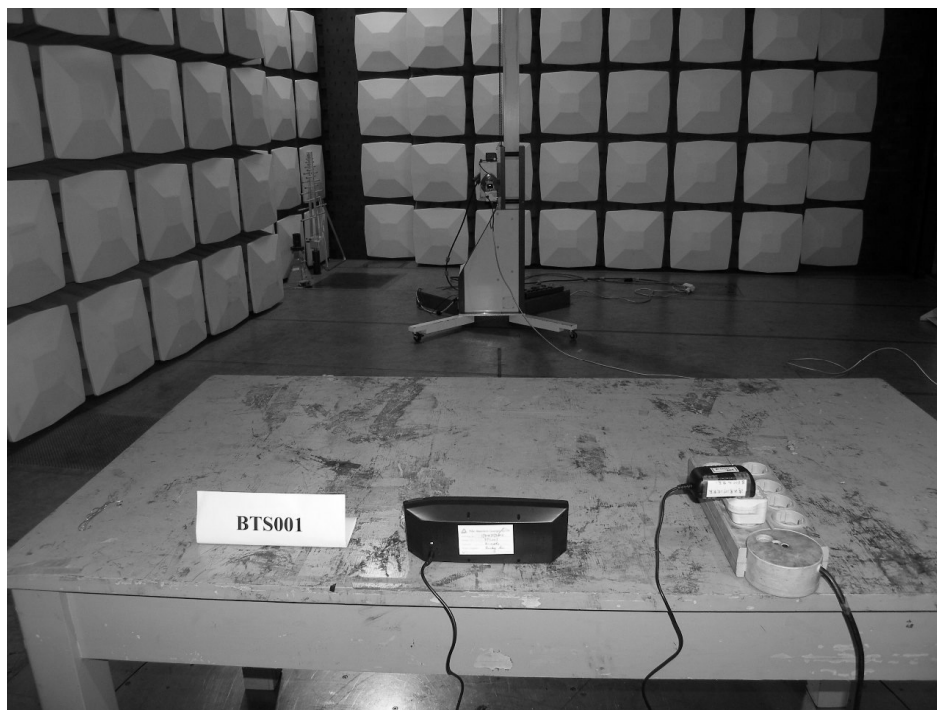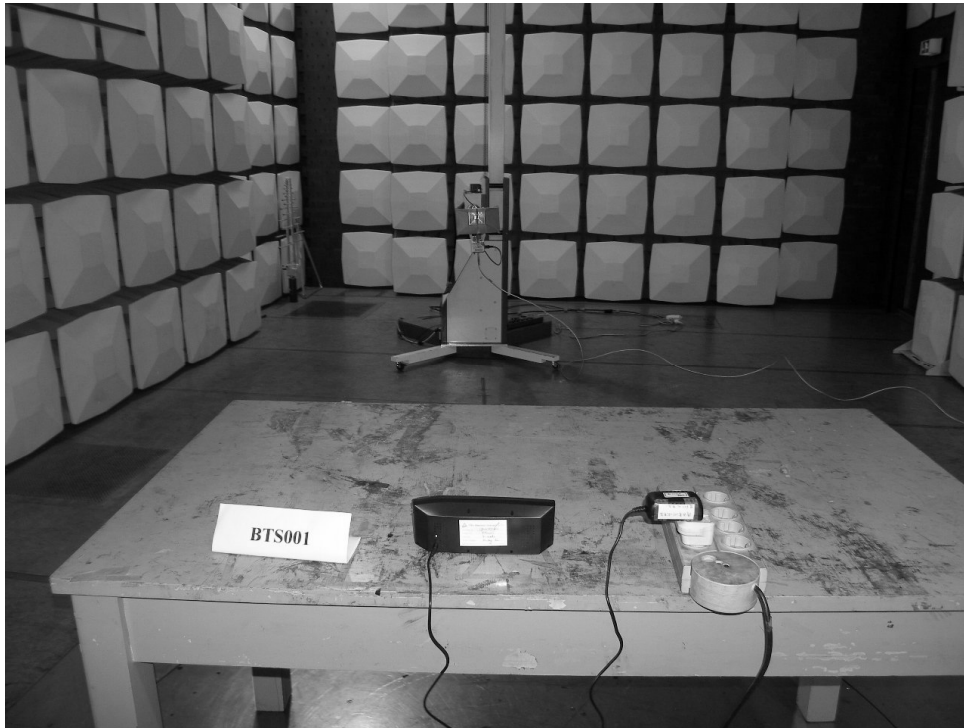

7 List of Tables

Table 1: List of Test and Measurement Equipment	6
Table 2: Radiated Emission (Bluetooth: Transmitting at channel low)	18
Table 3: Radiated Emission (Bluetooth: Transmitting at channel mid)	18
Table 4: Radiated Emission (Bluetooth: Transmitting at channel high)	19
Table 5: Peak Conducted Power	21
Table 6: 20dB Bandwidth.....	22
Table 7: Hopping Channel Carrier Frequency Separation	24
Table 8: Number of hopping frequency.....	25
Table 9: Dwell Time (DH5 mode).....	27
Table 10: Out-Of-Band Emission measurement (conducted)	29
Table 11: Band Edges Emission in the Restricted Bands by Marker Delta Method.....	29

8 List of Photographs

Photograph 1: Set-up for Conducted Emission.....	30
Photograph 2: Set-up for Radiation Measurement below 1GHz.....	31
Photograph 3: Set-up for Radiation Measurement above 1GHz.....	32

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 1 von 18
Page 1 of 18

20dB Bandwidth




*RBW 10 kHz Delta 3 [T1]
VBW 30 kHz -20.28 dB
*SWT 20 ms -480.000000000 kHz

Ref 10 dBm

*Att 25 dB

UNCAL

1 PK
VIEW

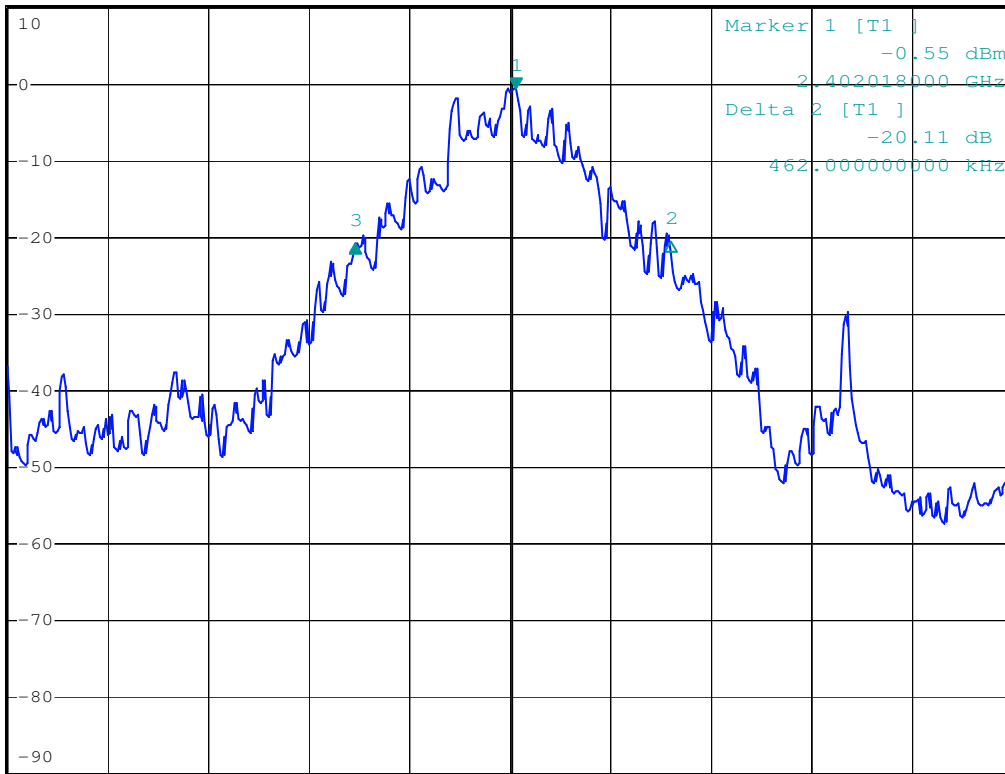

Center 2.402 GHz

300 kHz/

Span 3 MHz


Date: 22.SEP.2009 08:36:20

Low

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 2 von 18
Page 2 of 18

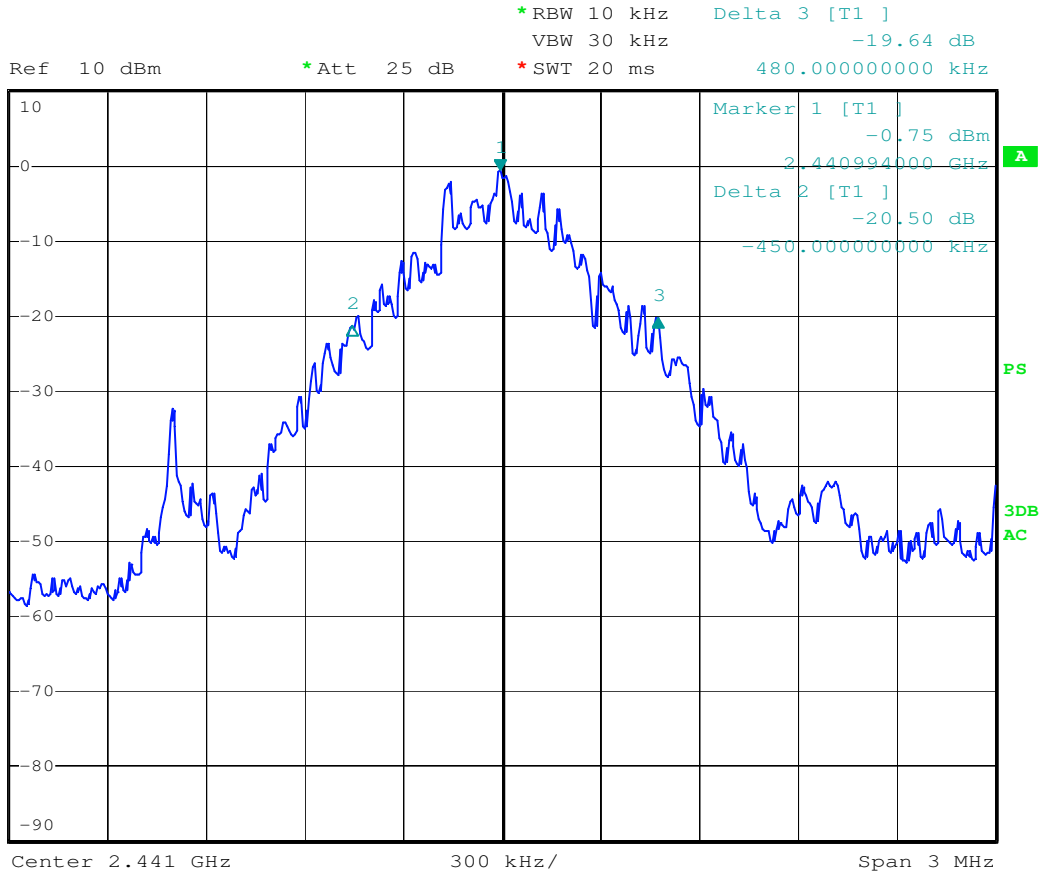

Date: 22.SEP.2009 08:38:13

Mid

Prüfbericht - Nr.:
Test Report no.


16019619 001

Seite 3 von 18
Page 3 of 18



Ref 10 dBm *Att 25 dB *RBW 10 kHz Delta 3 [T1] 480.00000000 kHz
VBW 30 kHz -19.39 dB
*SWT 20 ms

UNCAL
1 PK
VIEW

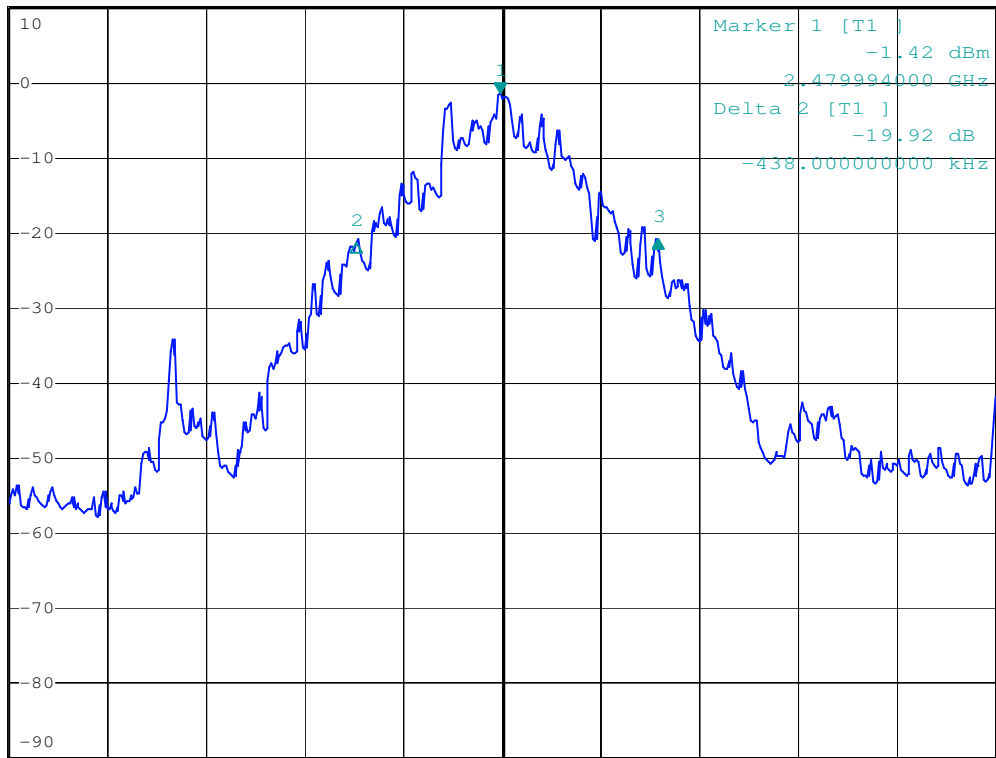

Center 2.48 GHz 300 kHz/ Span 3 MHz

Date: 22.SEP.2009 08:39:37

High

Prüfbericht - Nr.:
Test Report no.

16019619 001


Seite 4 von 18
Page 4 of 18

Hopping Channel Carrier Frequency Separation



Ref 25 dBm *Att 40 dB *RBW 100 kHz Delta 2 [T1]
*VBW 300 kHz 1.37 dB
*SWT 2.5 ms 996.000000000 kHz

1 PK
VIEW

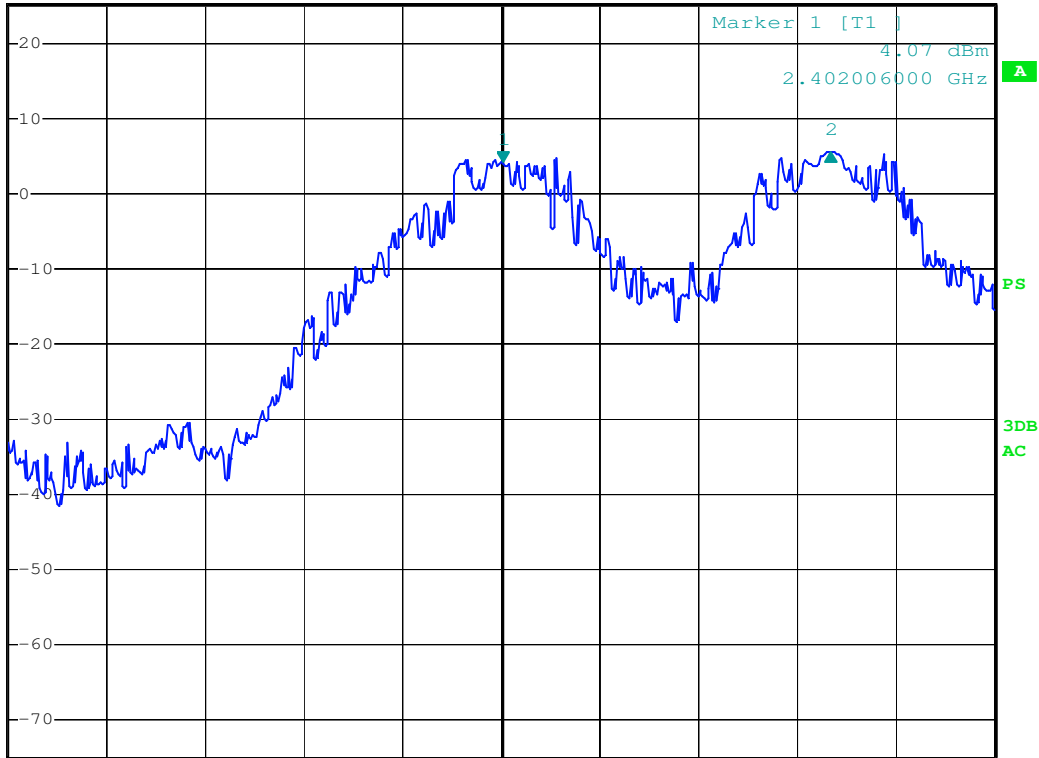

Center 2.402 GHz 300 kHz/ Span 3 MHz

Date: 22.SEP.2009 09:05:51

Low

Prüfbericht - Nr.:

16019619 001

Seite 5 von 18


Test Report no.

Page 5 of 18



1 PK
VIEW

Ref 25 dBm *Att 40 dB *RBW 100 kHz Delta 3 [T1] 1.02 dB
*VBW 300 kHz 1.008000000 MHz
*SWT 2.5 ms

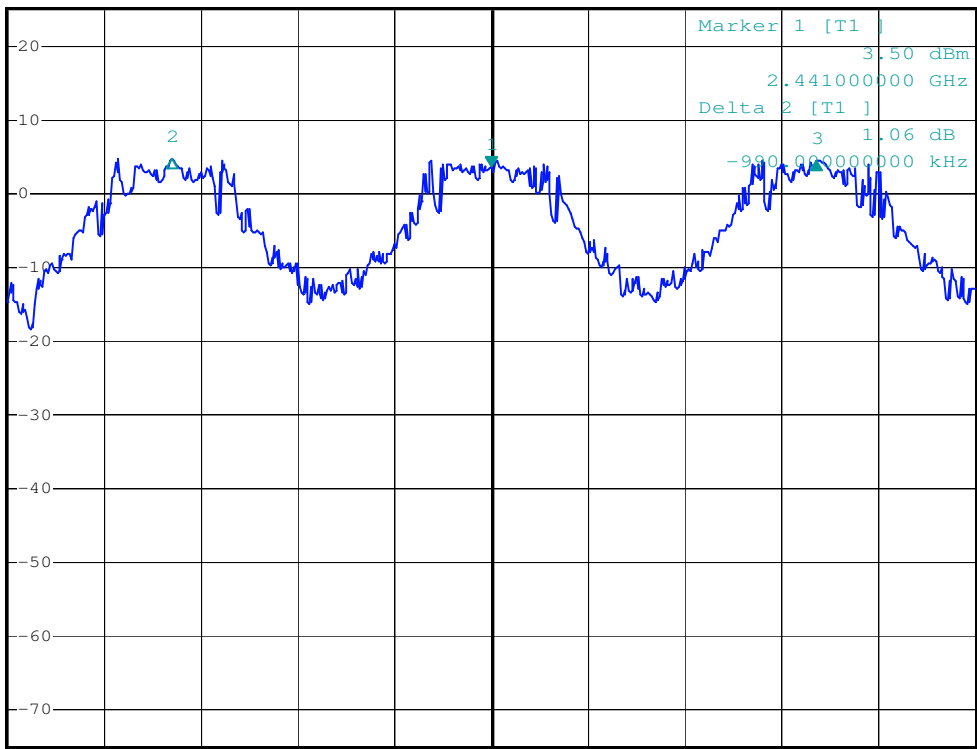

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 22.SEP.2009 09:07:19

Mid

Prüfbericht - Nr.:

16019619 001

Seite 6 von 18

Test Report no.

Page 6 of 18




*RBW 100 kHz Delta 2 [T1]
*VBW 300 kHz -0.95 dB
*SWT 2.5 ms 996.000000000 kHz

Ref 25 dBm

*Att 40 dB

1 PK
VIEW

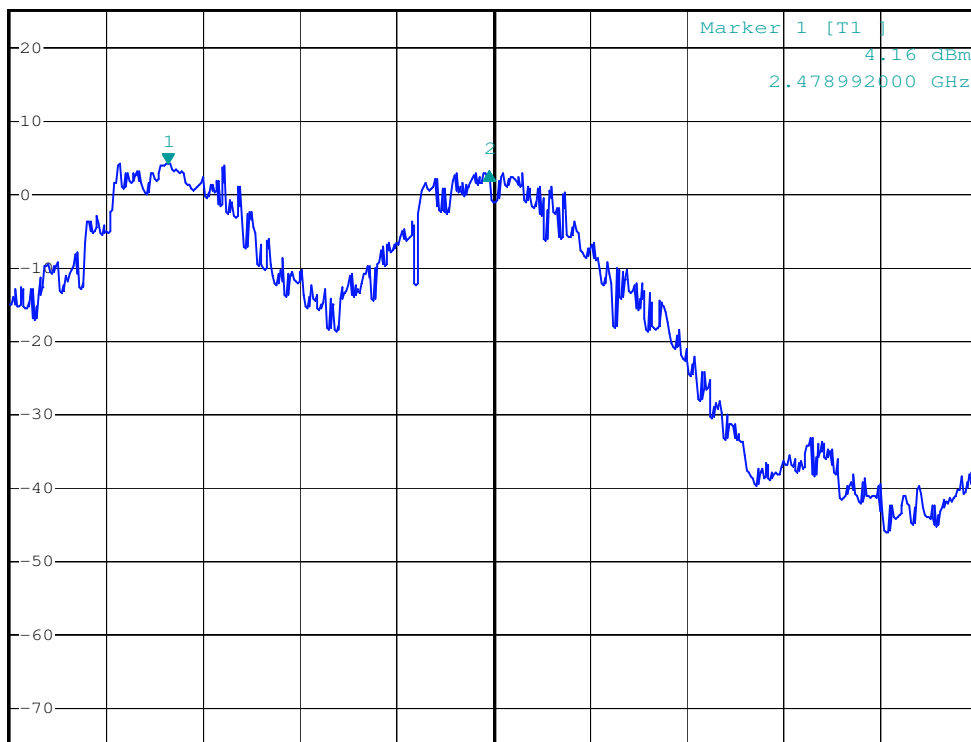

Center 2.48 GHz

300 kHz/

Span 3 MHz

Date: 22.SEP.2009 09:09:12


High

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 7 von 18
Page 7 of 18

Number of Hopping Frequency Used

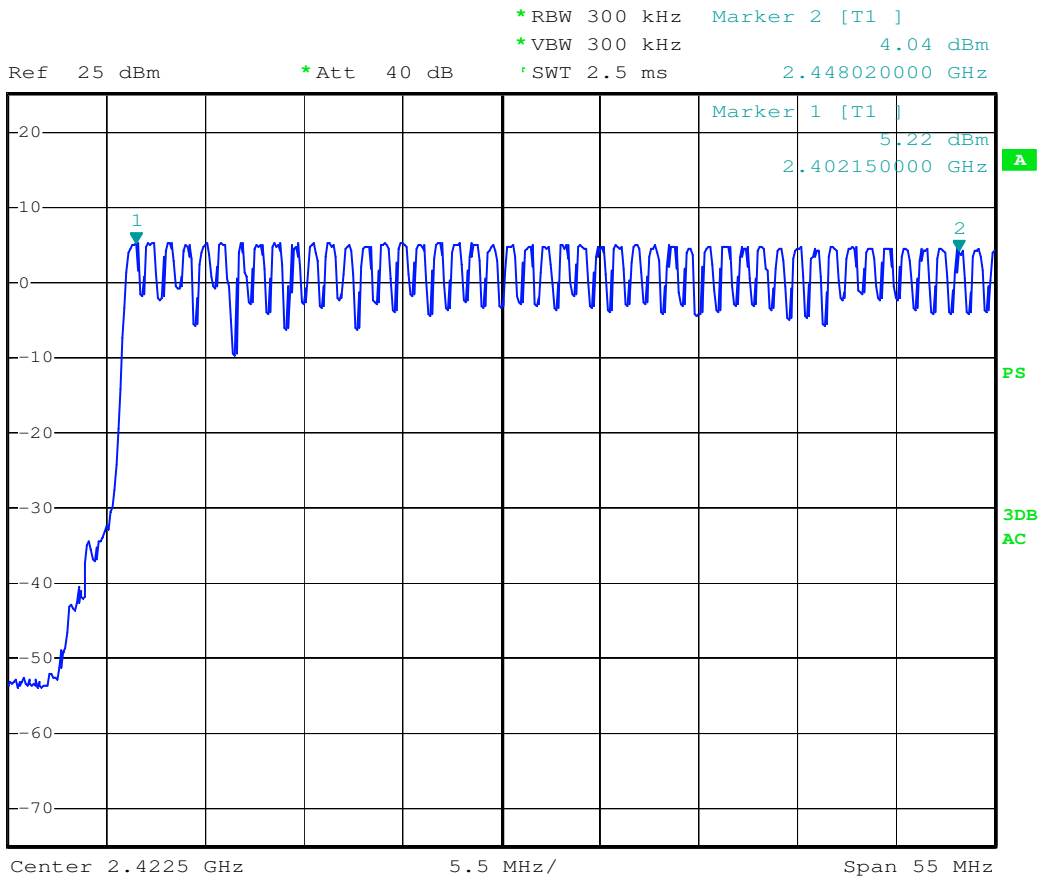

Date: 22.SEP.2009 08:58:10


Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 8 von 18
Page 8 of 18



1 PK
VIEW

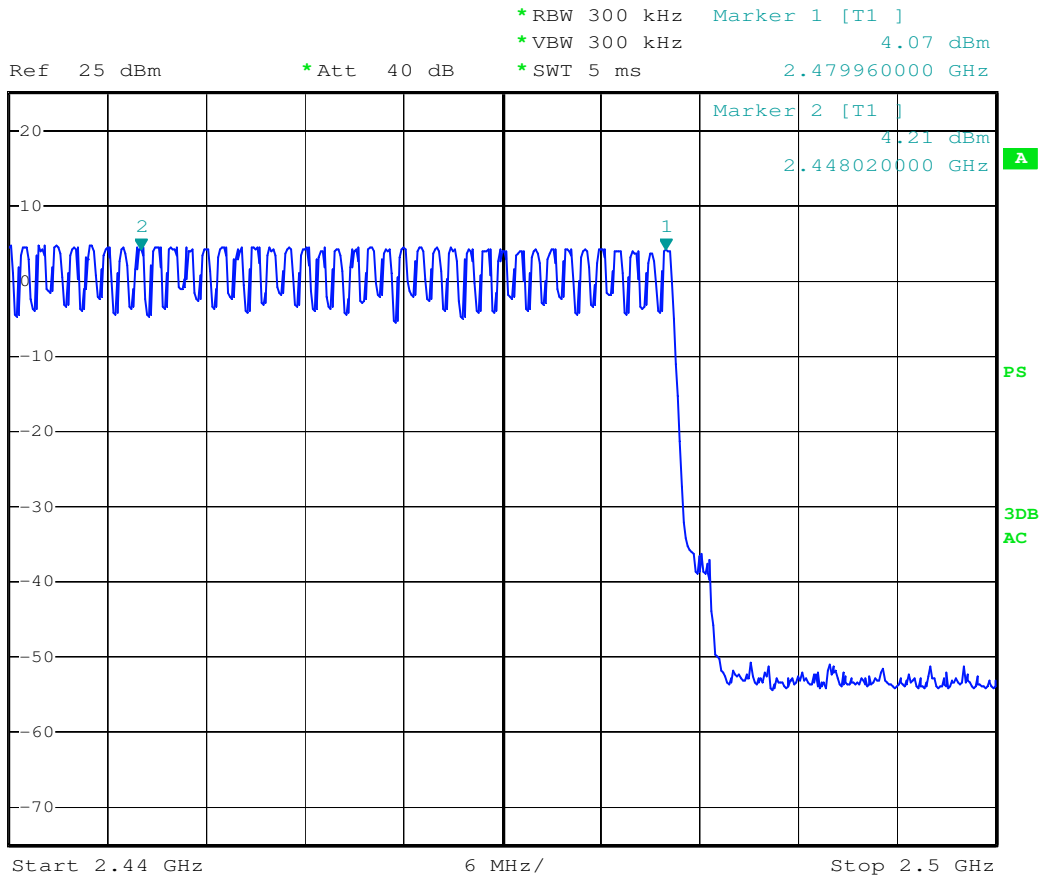


Date: 22.SEP.2009 09:00:22

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 9 von 18
Page 9 of 18

Dwell Time

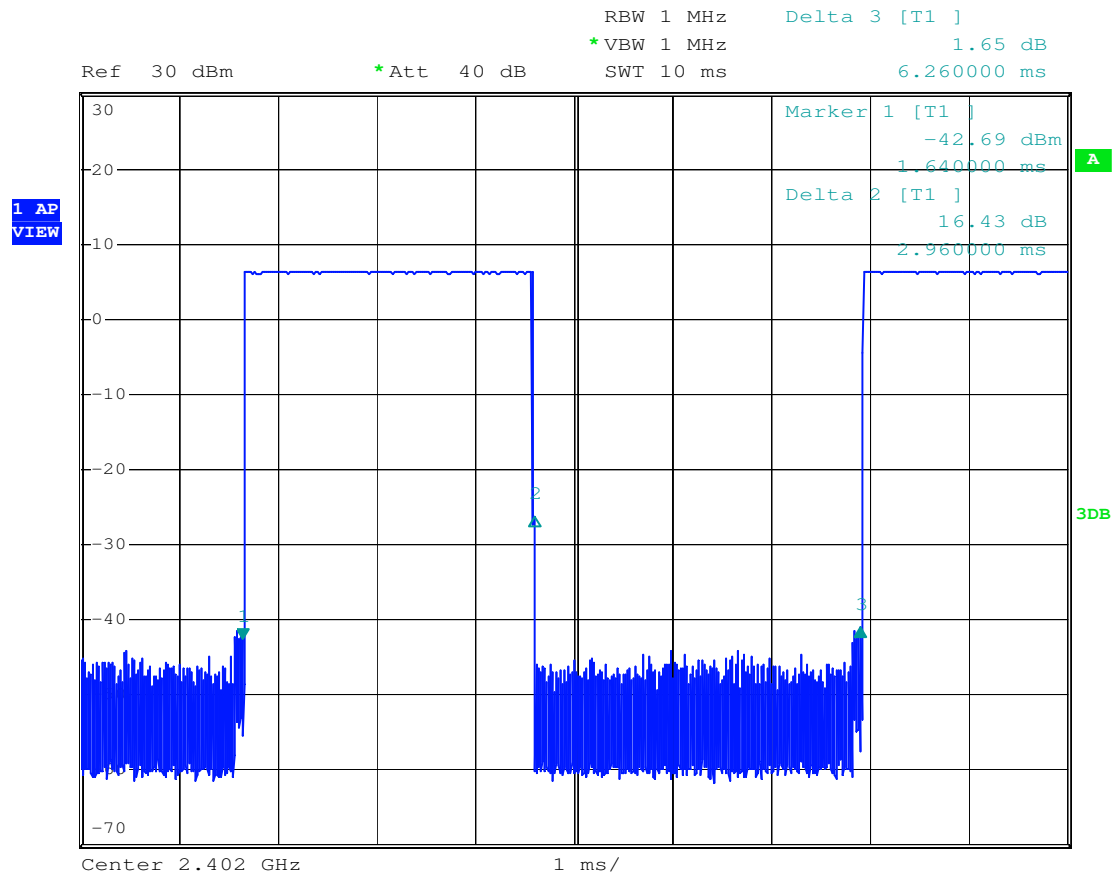


Date: 25.SEP.2009 01:35:31

Low

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 10 von 18
Page 10 of 18

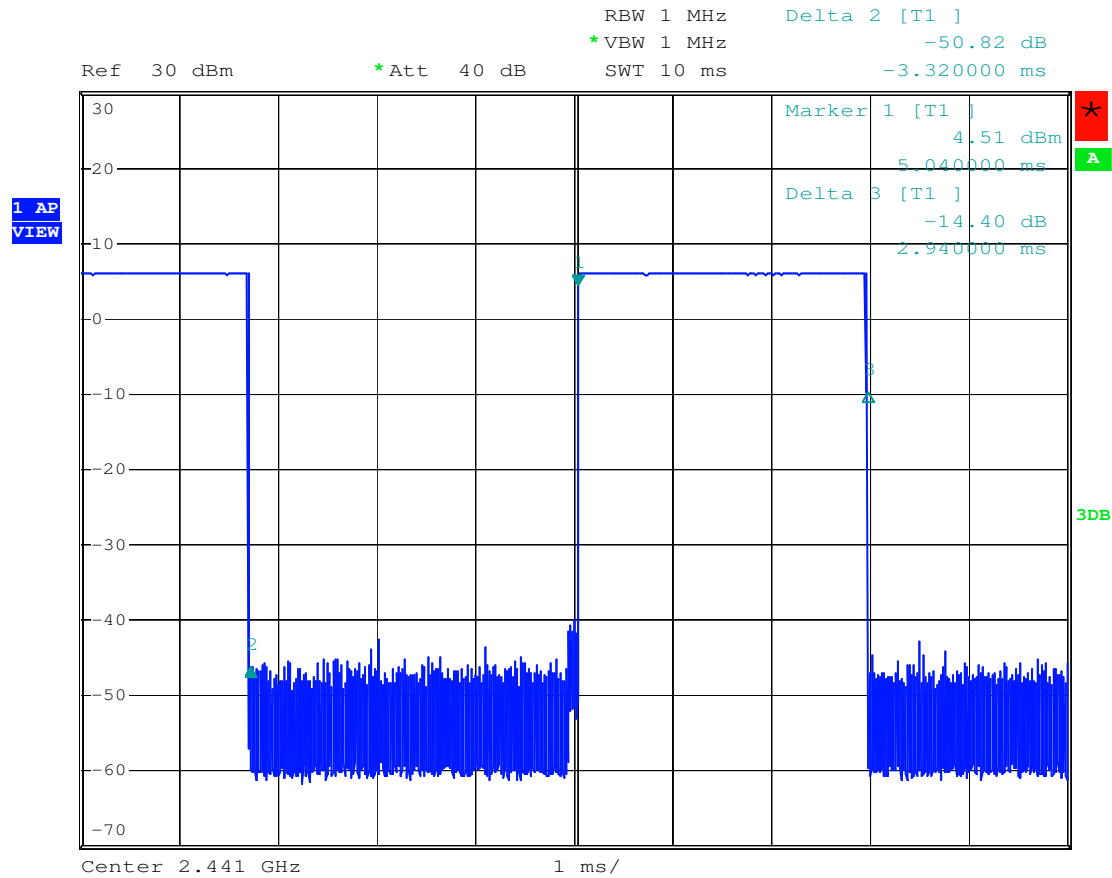


Date: 25.SEP.2009 01:37:24

Mid

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 11 von 18
Page 11 of 18

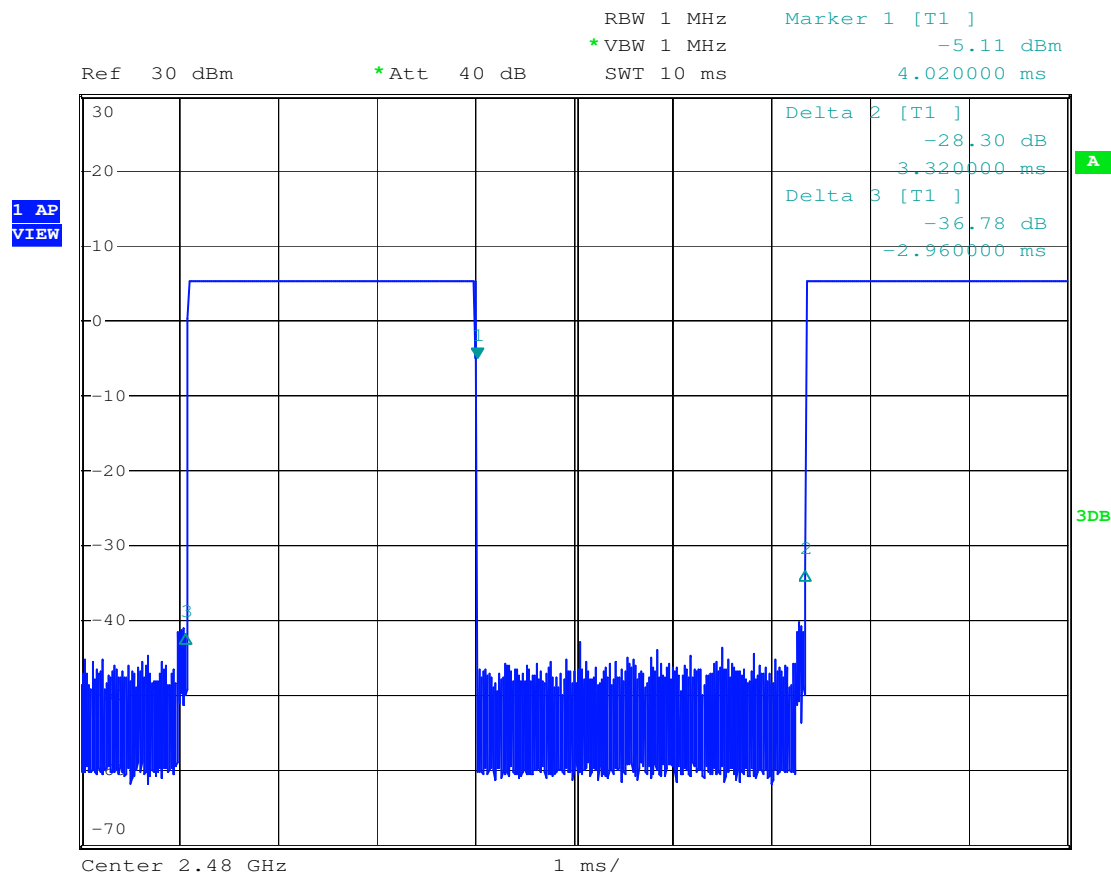

Date: 25.SEP.2009 01:38:47


High

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 12 von 18
Page 12 of 18

Out-Of-Band Emission measurement

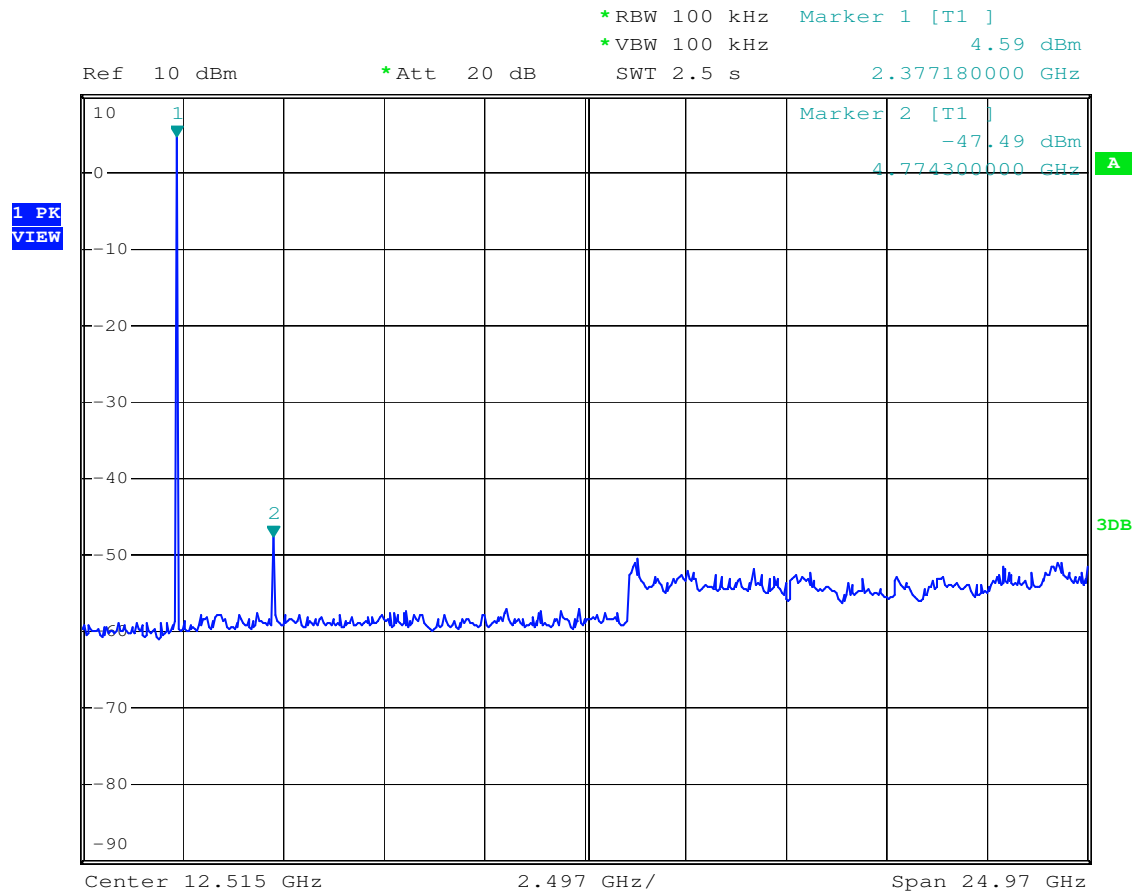


Date: 23.SEP.2009 03:58:22

Low

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 13 von 18
Page 13 of 18

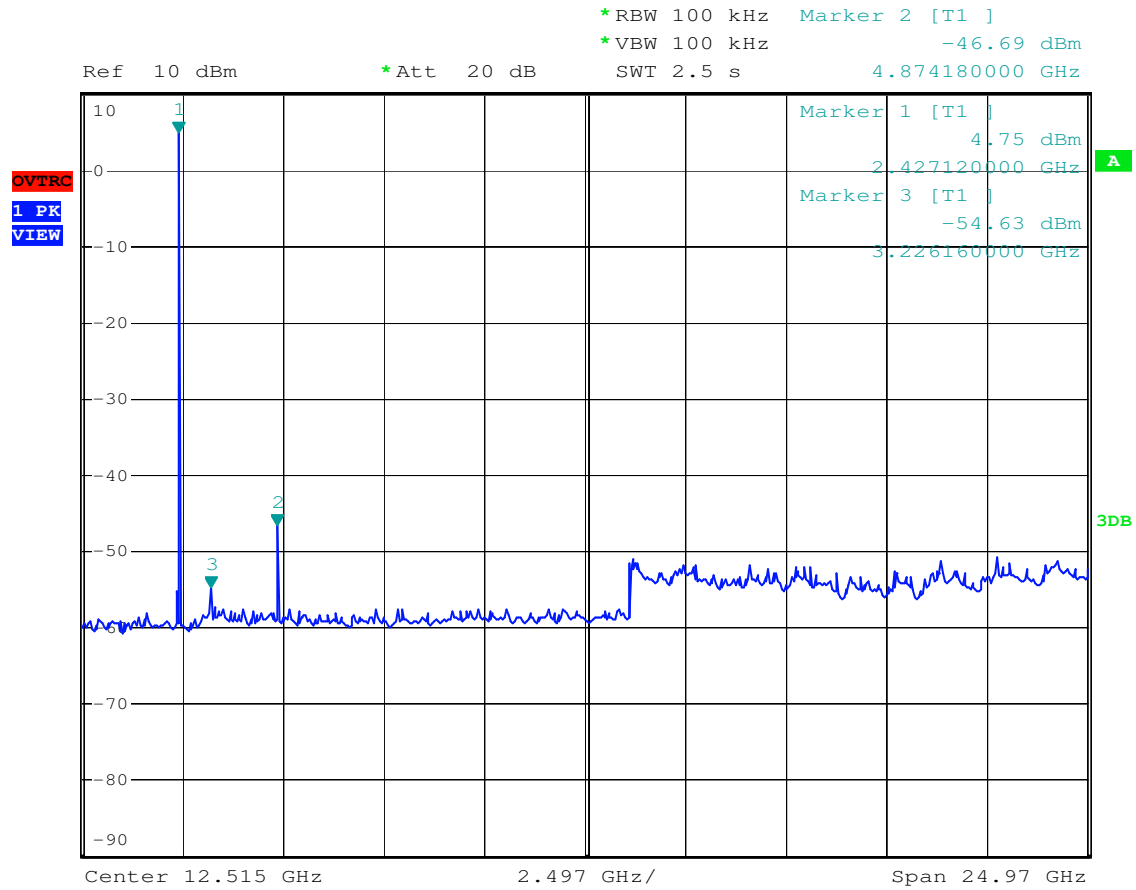


Date: 23.SEP.2009 03:57:11

Mid

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 14 von 18
Page 14 of 18

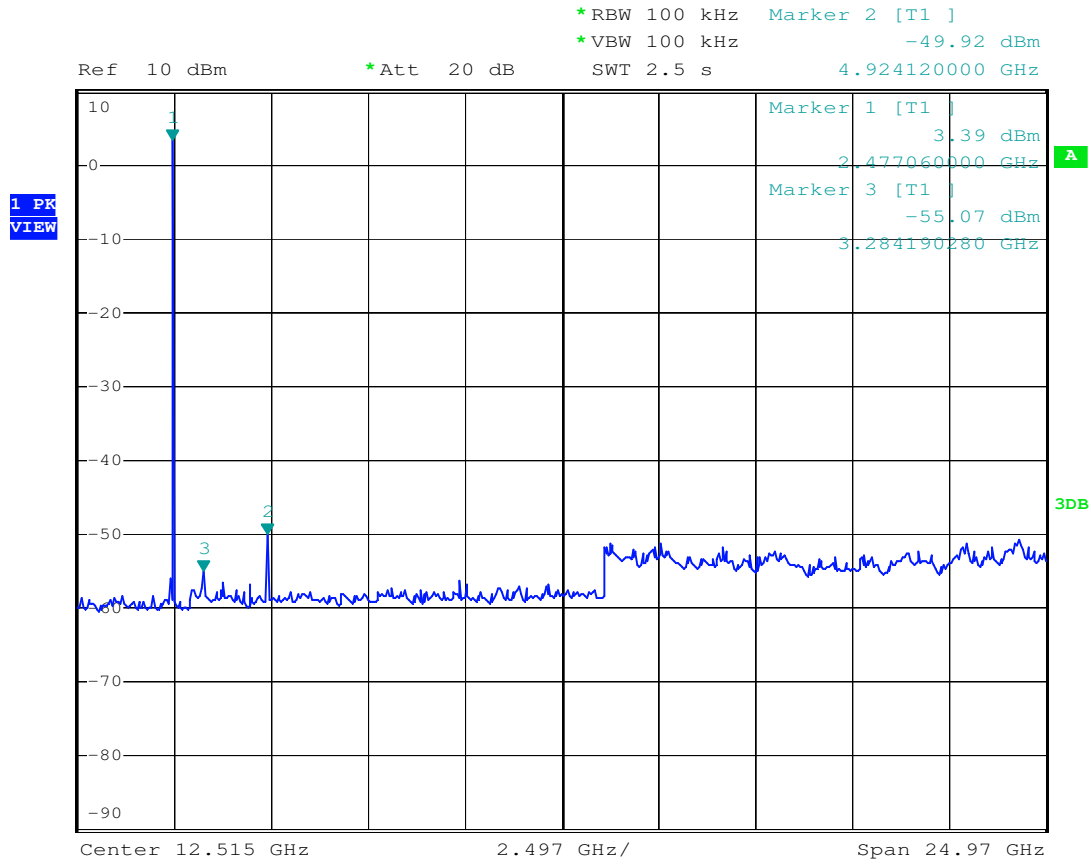

Date: 23.SEP.2009 04:00:06

High

Prüfbericht - Nr.:


16019619 001

Seite 15 von 18

Test Report no.

Page 15 of 18

Band Edges Emission in the Restricted Bands

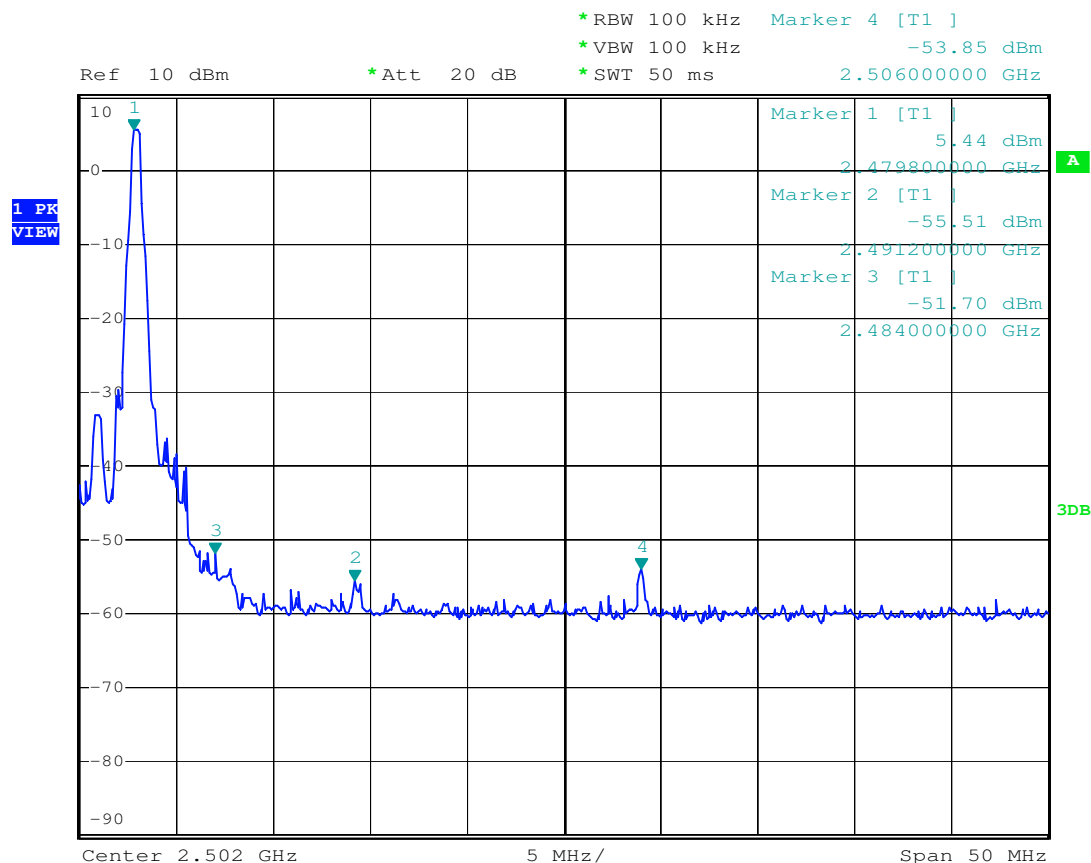


Date: 25.SEP.2009 01:49:05

High

Prüfbericht - Nr.:
Test Report no.

16019619 001

Seite 16 von 18
Page 16 of 18

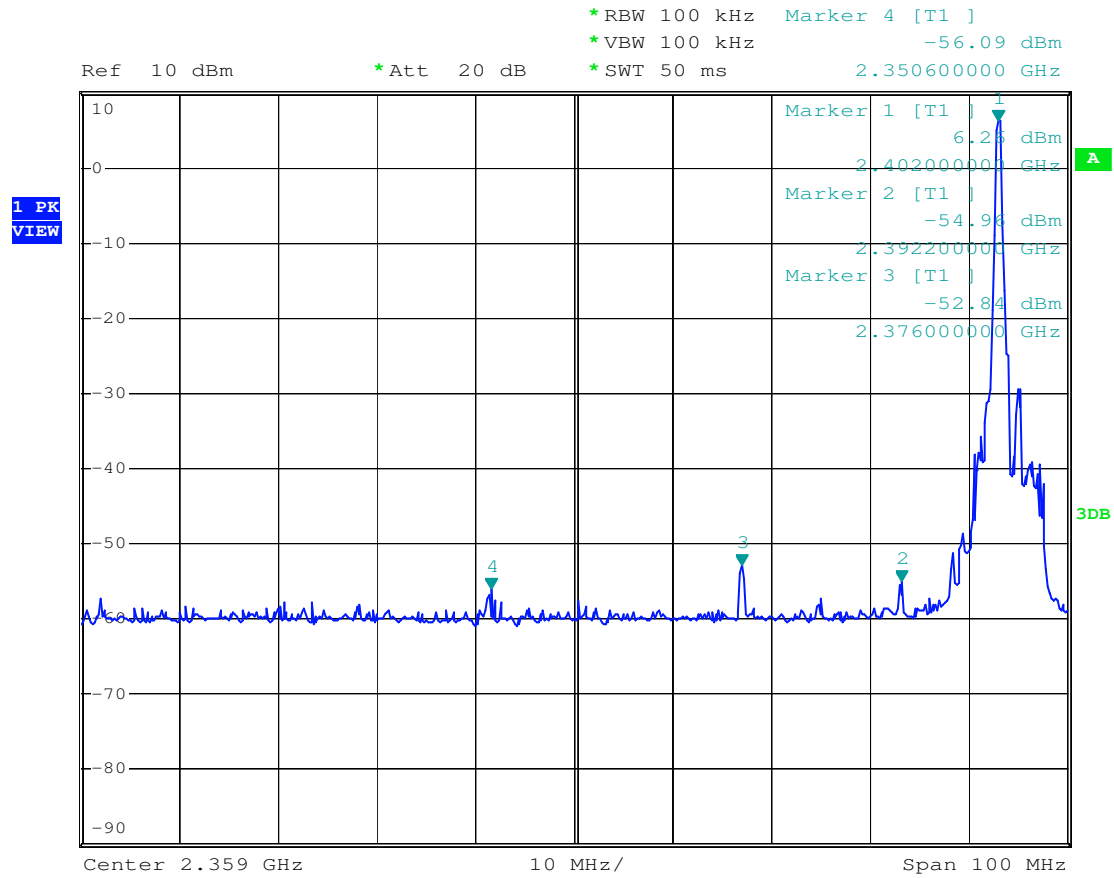

Date: 25.SEP.2009 01:51:18

Low

Prüfbericht - Nr.: 16019619 001
Test Report no.


Seite 17 von 18
Page 17 of 18

EMC Test Record (EMISSION)

Test Information


Manufacturer:	K-Mate
Test Item:	Bluetooth Stereo Speaker
Identification:	BTS001
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	A(Low)
Climate Condition:	22°C; 52%RH; 101kPa.
Test Voltage / Freq. :	AC120V/60Hz(Output DC9V by adaptor)
Receipt No.:	173047574
Report No.	16019619 001
Result:	Pass
Comment:	Horizontal

Subrange 1	
Frequency Range:	2GHz - 3GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

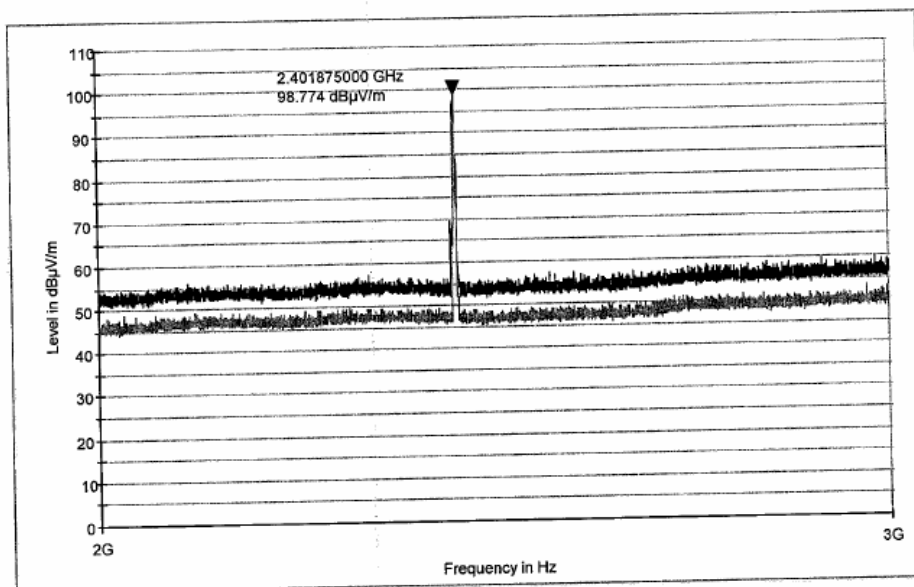

Date: 9/21/2009 - Time: 8:55:16 PM

Tested by:  2009.9.23
Checked

Reviewed by: 

Prüfbericht - Nr.:

16019619 001

Seite 18 von 18

Test Report no.

Page 18 of 18


EMC Test Record (EMISSION)

Test Information

Manufacturer:	K-Mate
Test Item:	Bluetooth Stereo Speaker
Identification:	BTS001
Test Standard:	FCC Part 15
Test Detail:	Radiated Emission
Operation Mode:	A(High)
Climate Condition:	22°C; 52%RH; 101kPa.
Test Voltage / Freq. :	AC120V/60Hz(Output DC9V by adaptor)
Receipt No.:	173047574
Report No.:	16019619 001
Result:	Pass
Comment:	Horizontal

Subrange 1

Frequency Range:	2GHz - 3GHz
Receiver:	TUV FSP 30
Transducer:	TUV SAC HF906 / TUV FSP 30-TUV SAC HF906

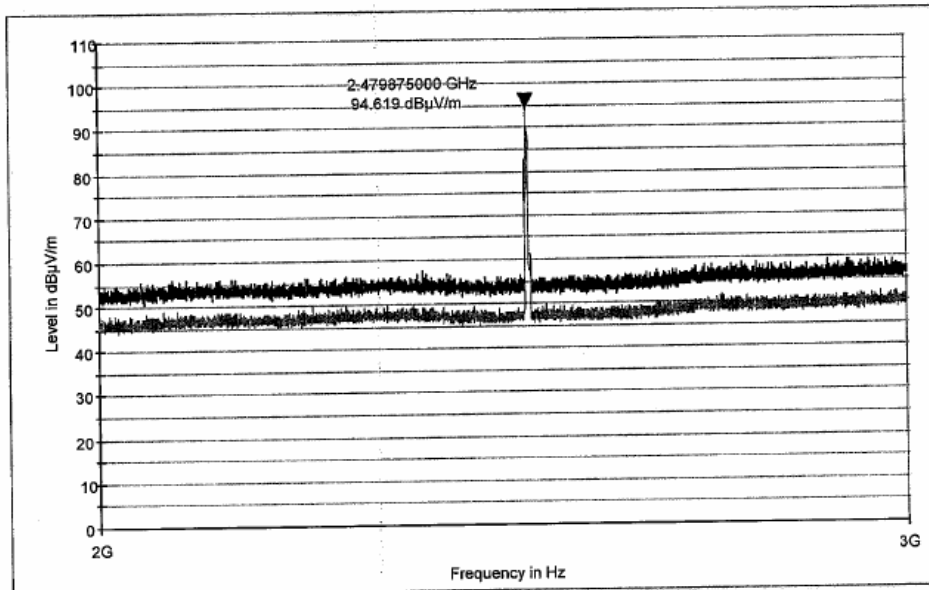

Date: 9/21/2009 - Time: 9:13:04 PM

Tested by:



Reviewed by:

