



REPORT No.: SZ23040058S01

## Annex D Plots of Maximum SAR Test Results

Test Laboratory: Shenzhen Morlab Communications Technology Co., Ltd.

Date: 2023.04.20

## Bluetooth\_BLE\_Top Side\_0mm\_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1  
Medium: HSL\_2450 Medium parameters used (interpolated):  $f = 2402$  MHz;  $\sigma = 1.749$  S/m;  $\epsilon_r = 38.922$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7608; ConvF(7.6, 7.6, 7.6) @ 2402 MHz; Calibrated: 2023.03.15
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1643; Calibrated: 2023.02.22
- Phantom: Twin-SAM; Type: QD 000 P41 Ax; Serial: 2020
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

**Ch0/Area Scan (61x121x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 2.62 W/kg

**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 20.57 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 2.94 W/kg  
**SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.569 W/kg**  
Smallest distance from peaks to all points 3 dB below = 7.6 mm  
Maximum value of SAR (measured) = 2.19 W/kg

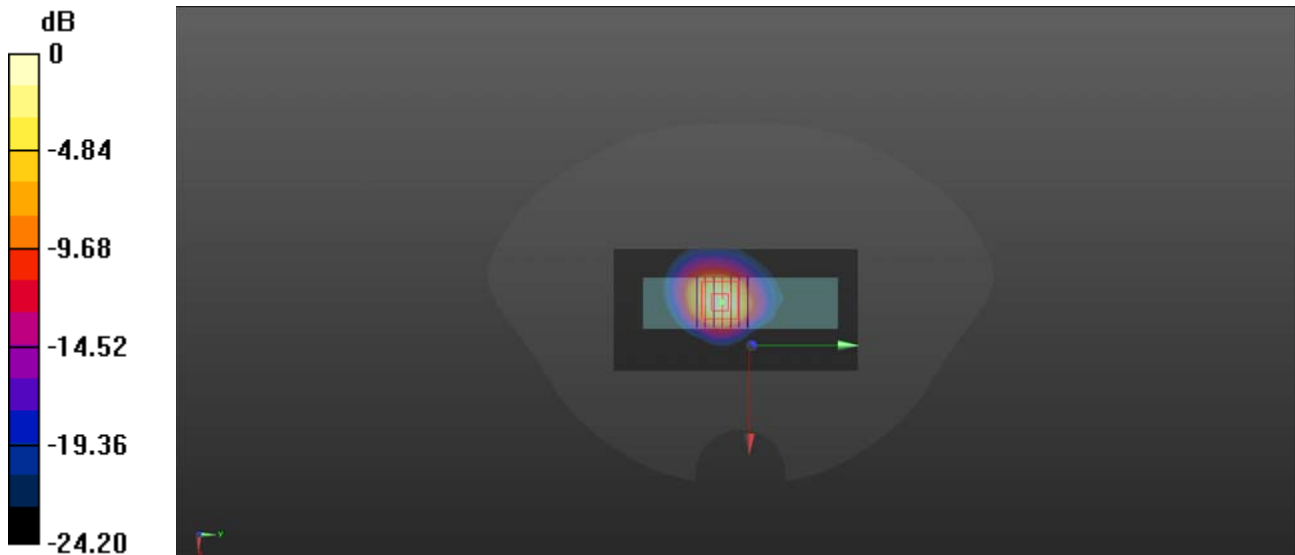

0 dB = 2.19 W/kg