


### 7.6. Test Result

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2018.05.17	Test Engineer	: Tommie

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


#### 2402 - 2480MHz

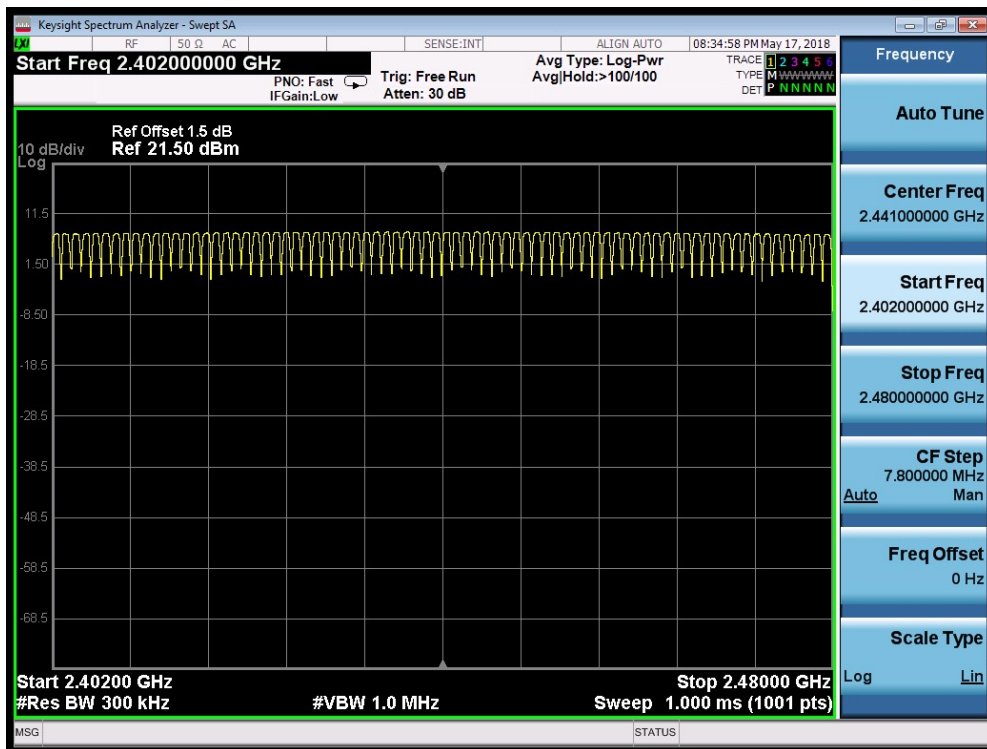

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 2	Test Site	: TR-8
Test Date	: 2018.05.17	Test Engineer	: Tommie

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass


**2402 - 2480 MHz**

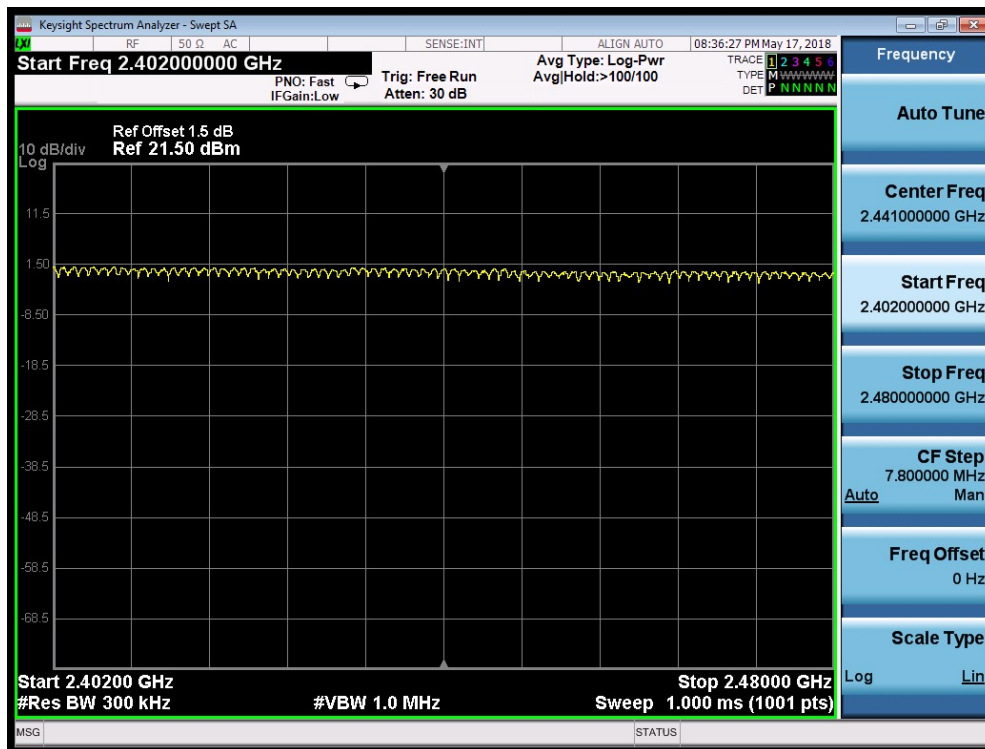

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 3	Test Site	: TR-8
Test Date	: 2018.05.17	Test Engineer	: Tommie

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass

**2402 - 2480 MHz**

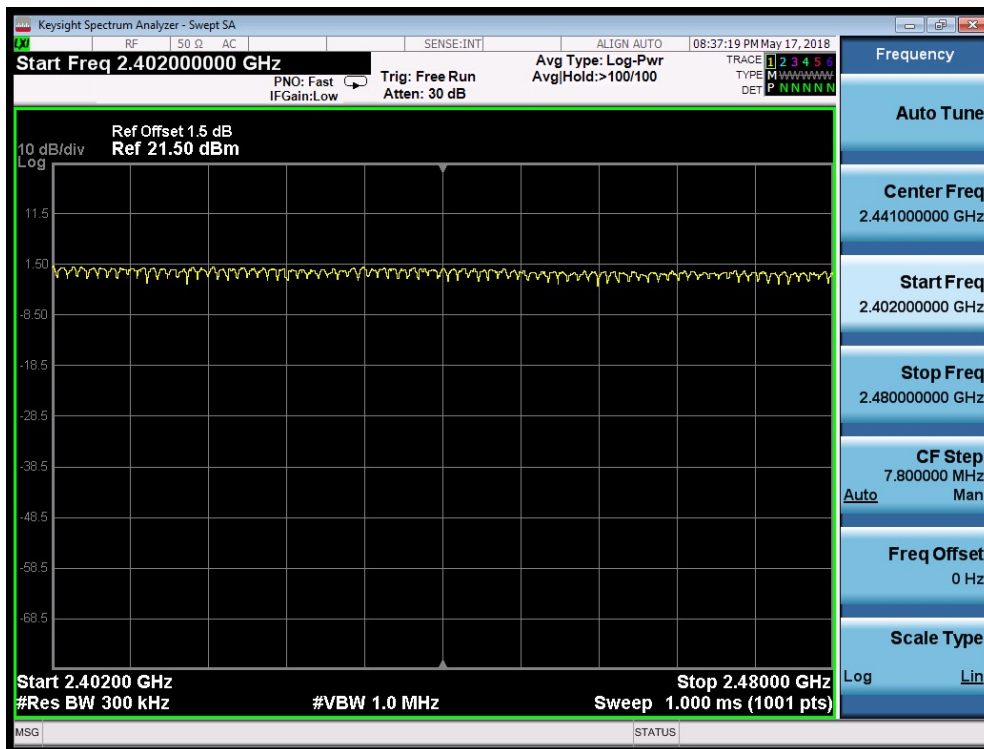


## 8. Time of Occupancy (Dwell Time)

### 8.1. Test Equipment

Time of Occupancy (Dwell Time) / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 8.2. Test Setup

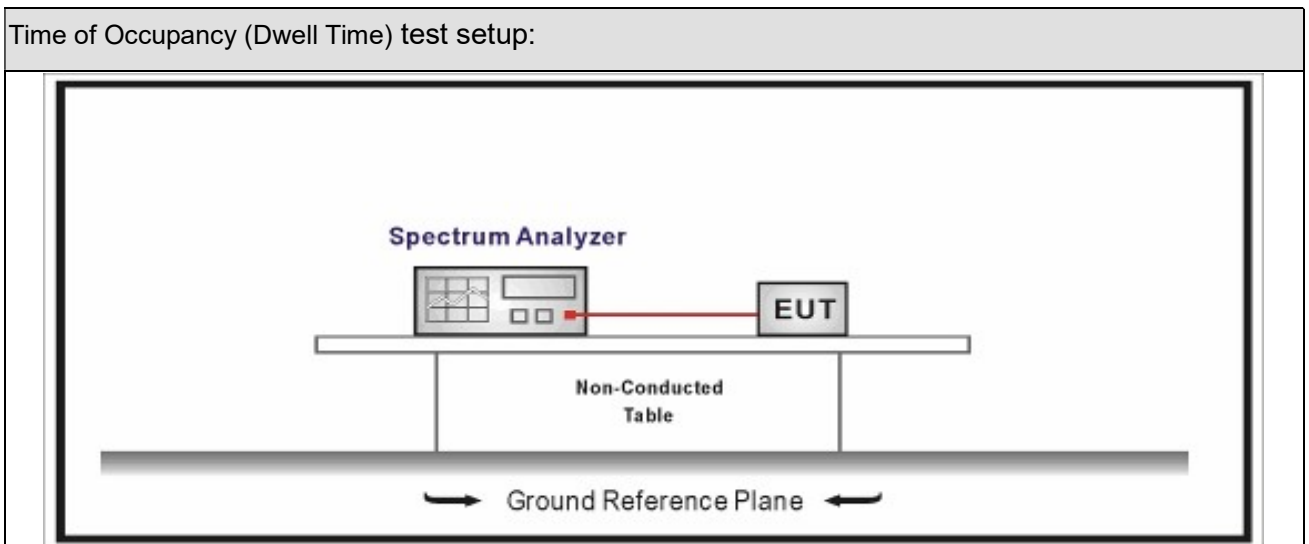

### 8.3. Limit

Time of Occupancy (Dwell Time)	
<input checked="" type="checkbox"/>	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
<input type="checkbox"/>	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period
<input type="checkbox"/>	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping

	frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.
<input type="checkbox"/>	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

**8.4. Test Procedure**

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.4	Time of Occupancy (Dwell Time)

**8.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 0.1 \text{ us}$

### 8.6. Test Result

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 1(GFSK_DH1)	Test Site	: TR-8
Test Date	: 2018.04.19	Test Engineer	: Tommie


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	121.52	< 400	Pass


Note1: Test Time Period:  $0.4 \times 79 = 31.6 \text{sec}$

Note2: Time of Occupancy =  $0.392 \times 31 \times 31.6 / 3.16 = 121.52 \text{ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

#### Channel 39 (2441MHz)-(DH1)

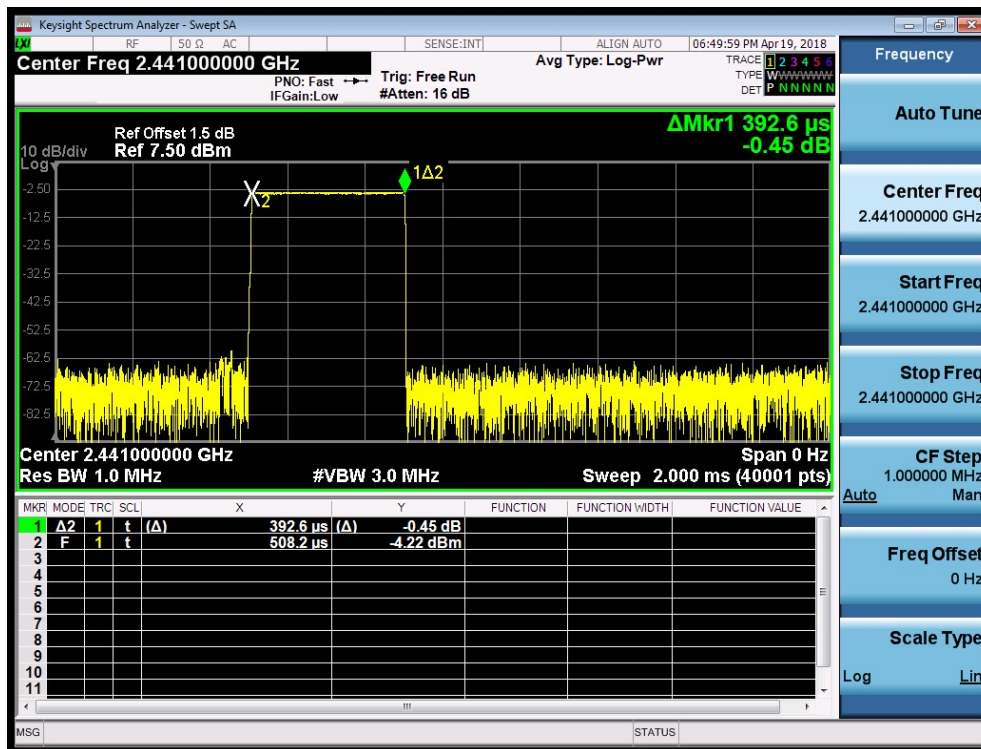

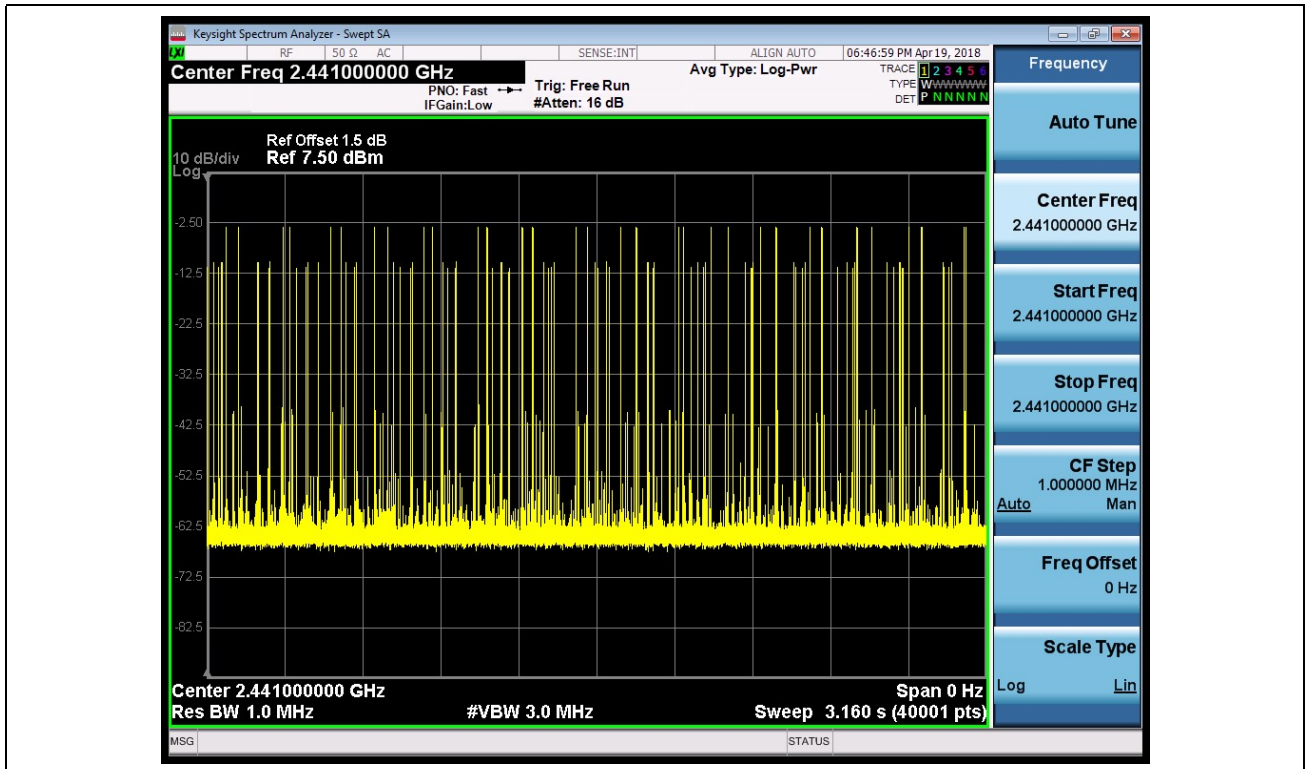

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 1(GFSK_DH3)	Test Site	: TR-8
Test Date	: 2018.04.19	Test Engineer	: Tommie


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	214.37	< 400	Pass

Note1: Test Time Period:  $0.4 \times 79 = 31.6 \text{ sec}$


Note2: Time of Occupancy =  $1.649 \times 13 \times 31.6 / 3.16 = 214.37 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

### Channel 39 (2441MHz) - (DH3)

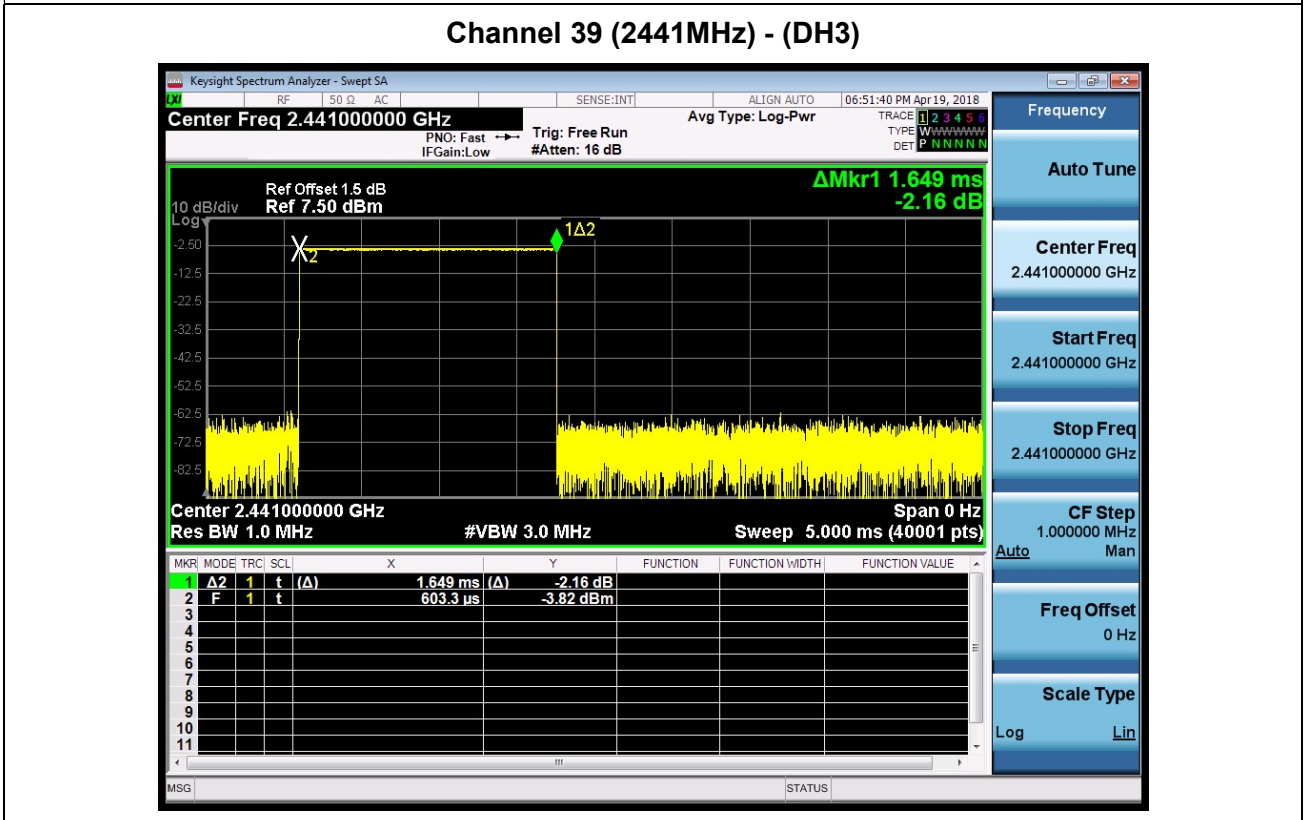



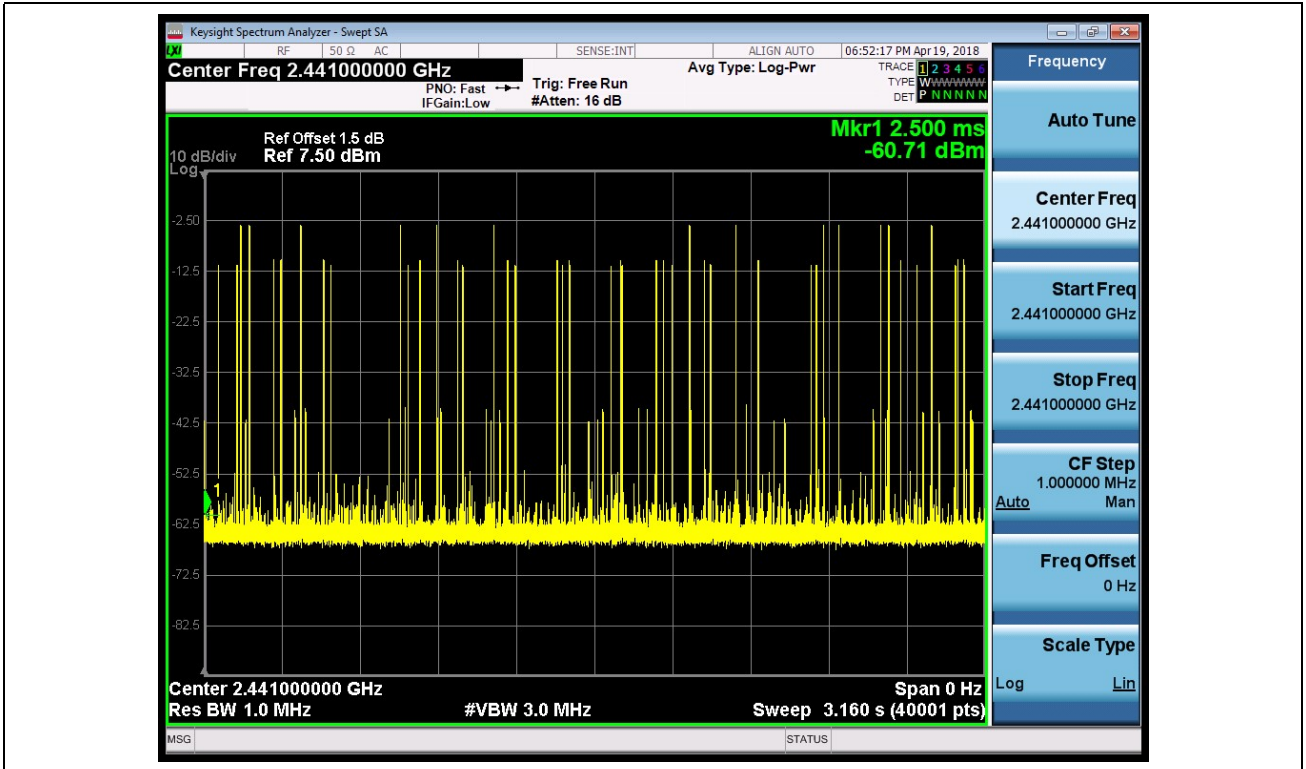

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 1(GFSK_DH5)	Test Site	: TR-8
Test Date	: 2018.04.19	Test Engineer	: Tommie


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	289.4	< 400	Pass


Note1: Test Time Period:  $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy =  $2.894 \times 10 \times 31.6 / 3.16 = 289.4 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

### Channel 39 (2441MHz) - (DH5)

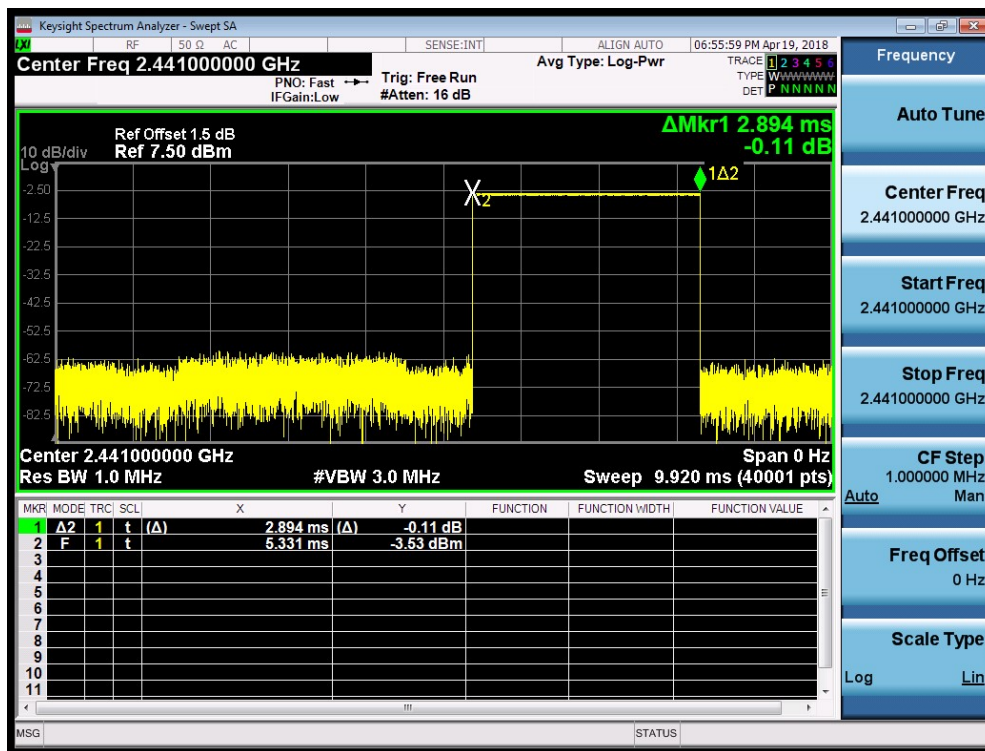

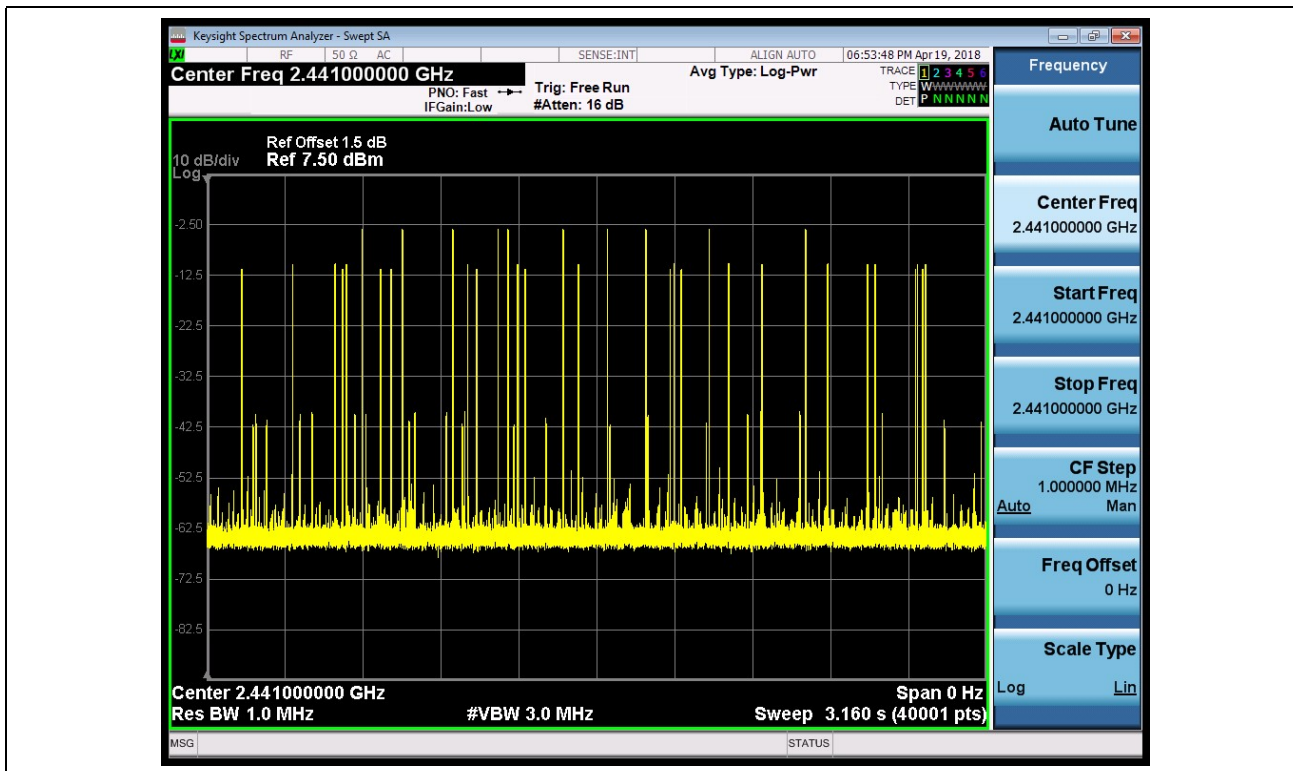


## 9. Peak Output Power

### 9.1. Test Equipment

Peak Output Power / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 9.2. Test Setup

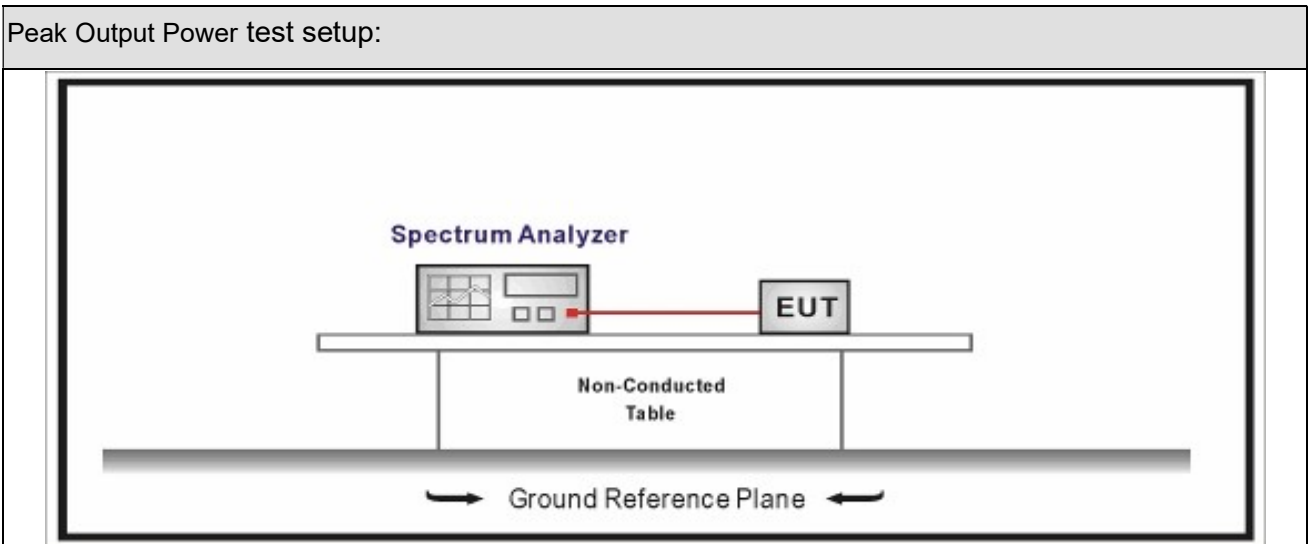

### 9.3. Limit

Peak Output Power	
<input type="checkbox"/>	Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
<input checked="" type="checkbox"/>	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
<input type="checkbox"/>	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels

### 9.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

### 9.5. Uncertainty

The measurement uncertainty is defined as  $\pm 1.0$  dB

**9.6. Test Result**

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2018.05.17	Test Engineer	: Tommie

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
00	2402	4.29	21.00	Pass
39	2441	3.84	21.00	Pass
78	2480	3.27	21.00	Pass

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 2	Test Site	: TR-8
Test Date	: 2018.04.24	Test Engineer	: Tommie

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
00	2402	2.70	21.00	Pass
39	2441	2.70	21.00	Pass
78	2480	1.88	21.00	Pass

Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 3	Test Site	: TR-8
Test Date	: 2018.04.24	Test Engineer	: Tommie

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
00	2402	3.14	21.00	Pass
39	2441	3.02	21.00	Pass
78	2480	2.29	21.00	Pass




## 10. Emissions in non-restricted frequency bands

### 10.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2018.02.04	2019.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2018.04.09	2019.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2018.04.09	2019.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2018.04.10	2019.04.09

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 10.2. Test Setup

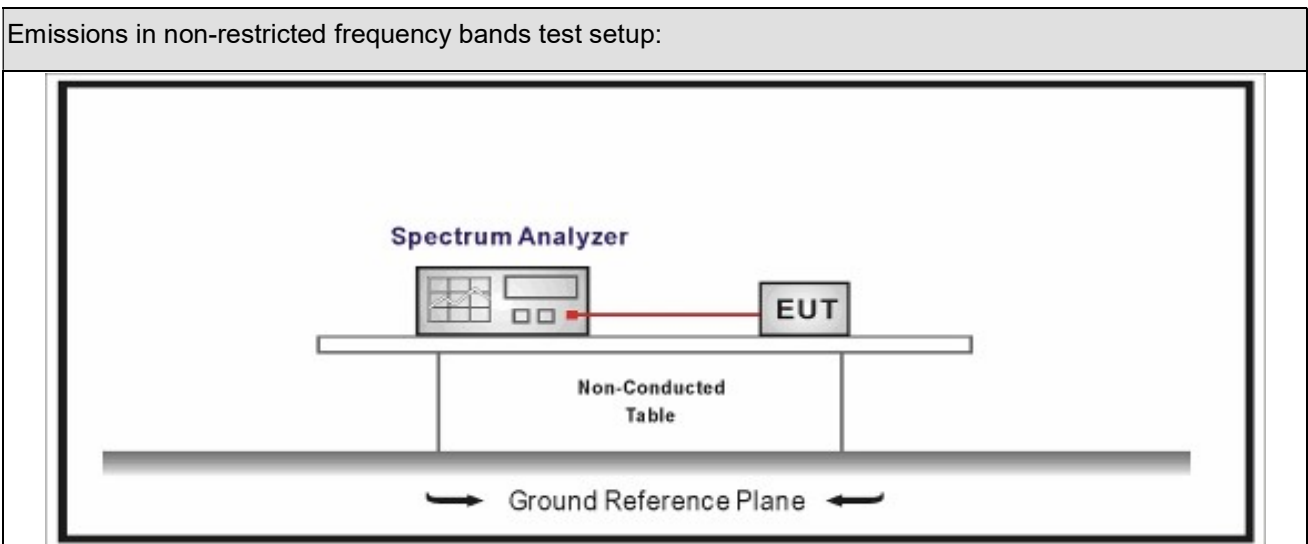

**10.3. Limit**

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
<p>Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p>Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).</p>	

**10.4. Test Procedure**

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.6	Band-edge Compliance of RF Conducted Emissions

**10.5. Uncertainty**

The measurement uncertainty is defined as  $\pm 1.0$  dB

### 10.6. Test Result


Product Name	: EZ-BT WICED Module with Mesh	Power	: AC 120V/60Hz
Test Mode	: Mode 1~4	Test Site	: TR-8
Test Date	: 2018.05.17	Test Engineer	: Tommie

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	4.310	2400.00	-55.064	59.374	>20	Pass
1	78	2480	2.852	2500.00	-67.897	70.749	>20	Pass
2	00	2402	-0.671	2400.00	-43.196	42.525	>20	Pass
2	78	2480	-1.781	2500.00	-69.174	67.393	>20	Pass
3	00	2402	-0.539	2400.00	-42.812	42.273	>20	Pass
3	78	2480	-1.711	2500.00	-69.641	67.930	>20	Pass
4	00~78	00~78	0.273	2400.00	-46.933	47.206	>20	Pass

Note1: The worst case of Emissions in non-restricted frequency bands as below:

2: Mode 1-3, The In-Band PSD is the highest PSD of All channels.

Mode3 CH00(2402MHz)

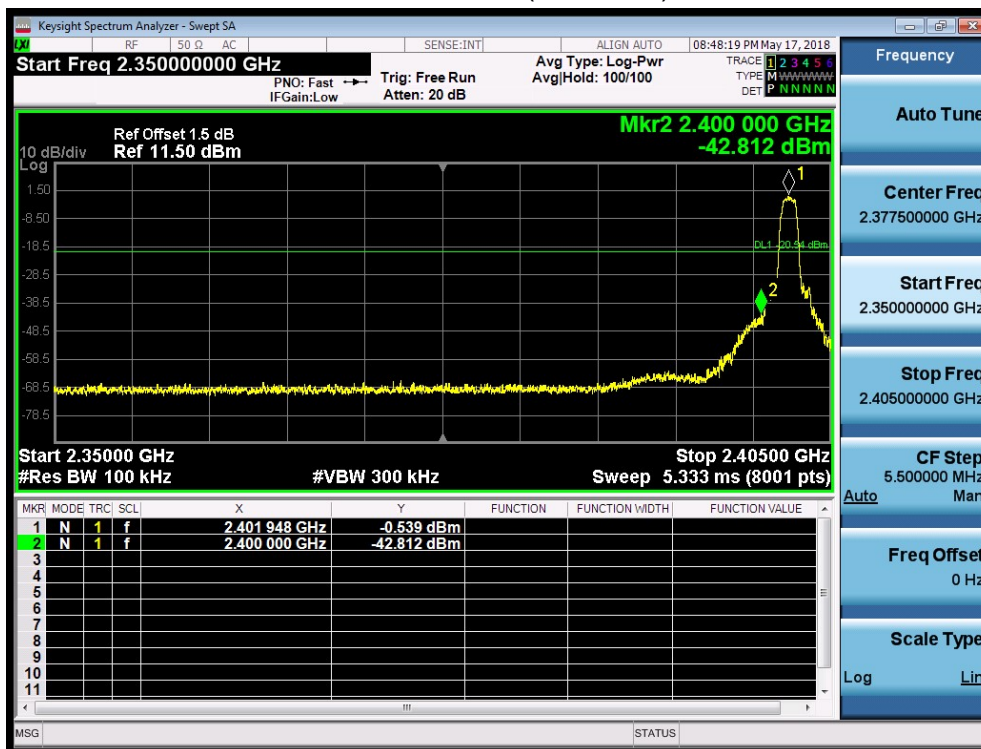


## 11. Radiated Emission Band Edge

### 11.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2017.07.16	2018.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2017.05.03	2019.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2017.07.12	2018.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2017.09.18	2018.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2018.02.28	2019.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2018.02.28	2019.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2018.01.05	2019.01.04

### 11.2. Test Setup

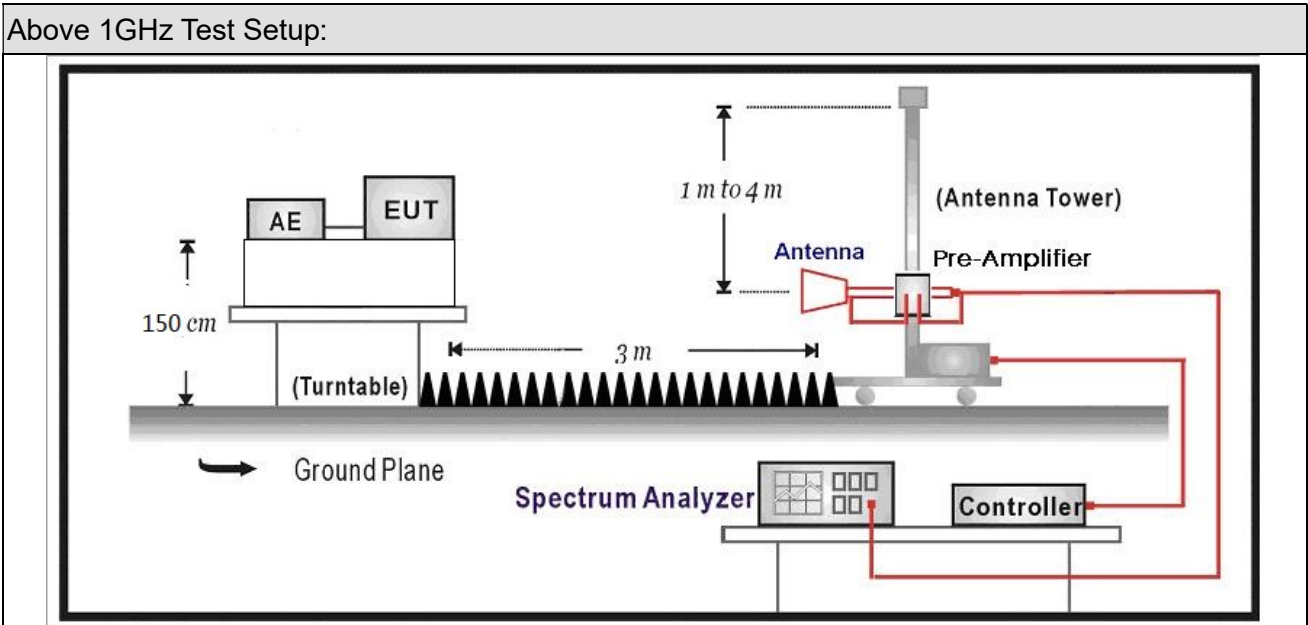

**11.3. Limit**

Band edge Limit				
Frequency bands (MHz)	Detector	Limit (dB $\mu$ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

**11.4. Test Procedure**


Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	DA 00-705	N/A	duty cycle correction factor
<input checked="" type="checkbox"/>	ANSI C63.10	6.10	Band-edge testing
	<input checked="" type="checkbox"/> ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	<input type="checkbox"/> ANSI C63.10	6.10.6	Marker-delta method
<input type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

**11.5. Uncertainty**

The measurement uncertainty above 1G is defined as  $\pm 3.9$  dB  
 below 1G is defined as  $\pm 3.8$  dB


### 11.6. Duty Factor

Test Mode	Pluse Time (ms)	Pluse Number	Accumulated Transmit Time (ms)	Duty Factor (dB)
Mode 4	2.895	1	2.895	-30.767

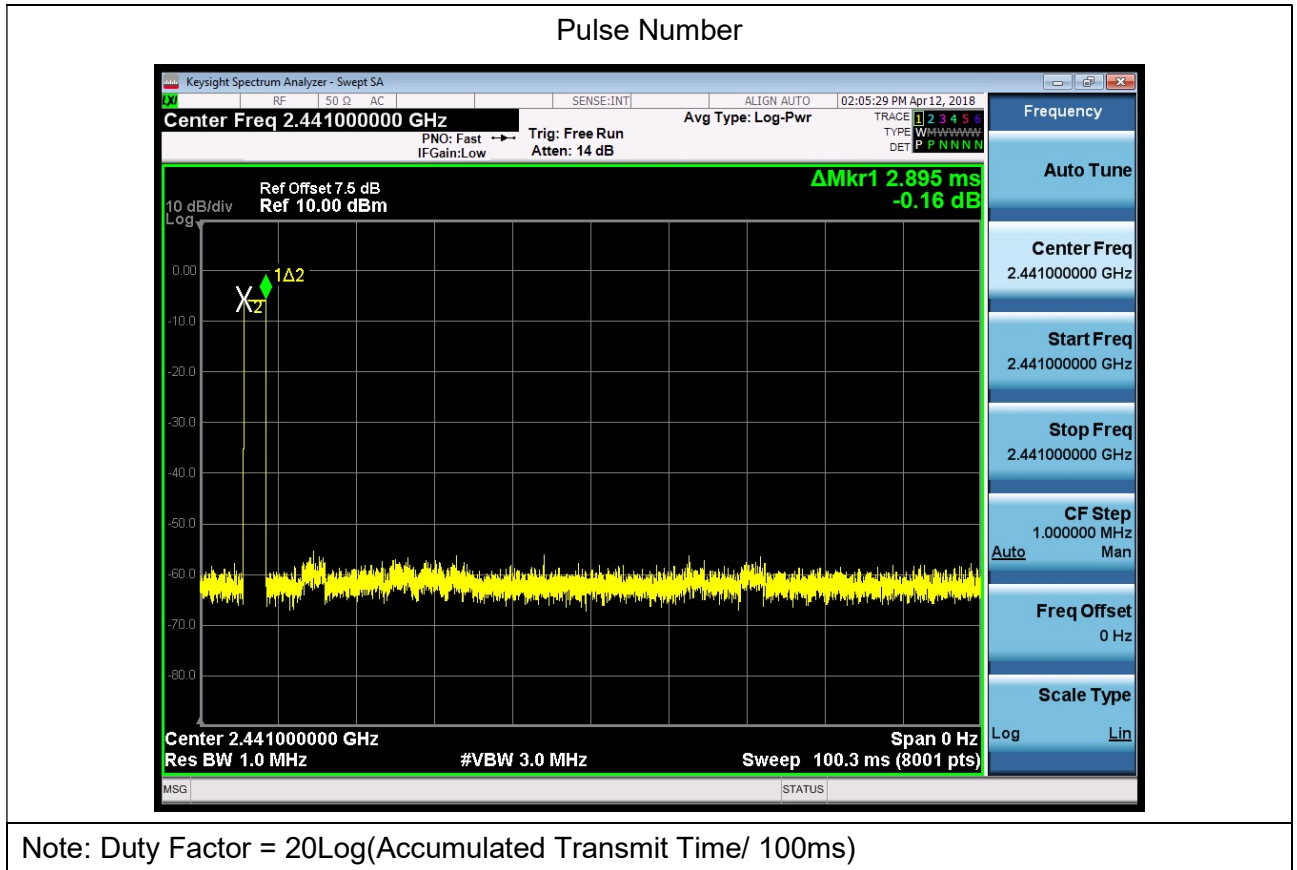

### 11.7. Test Result


Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 13:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

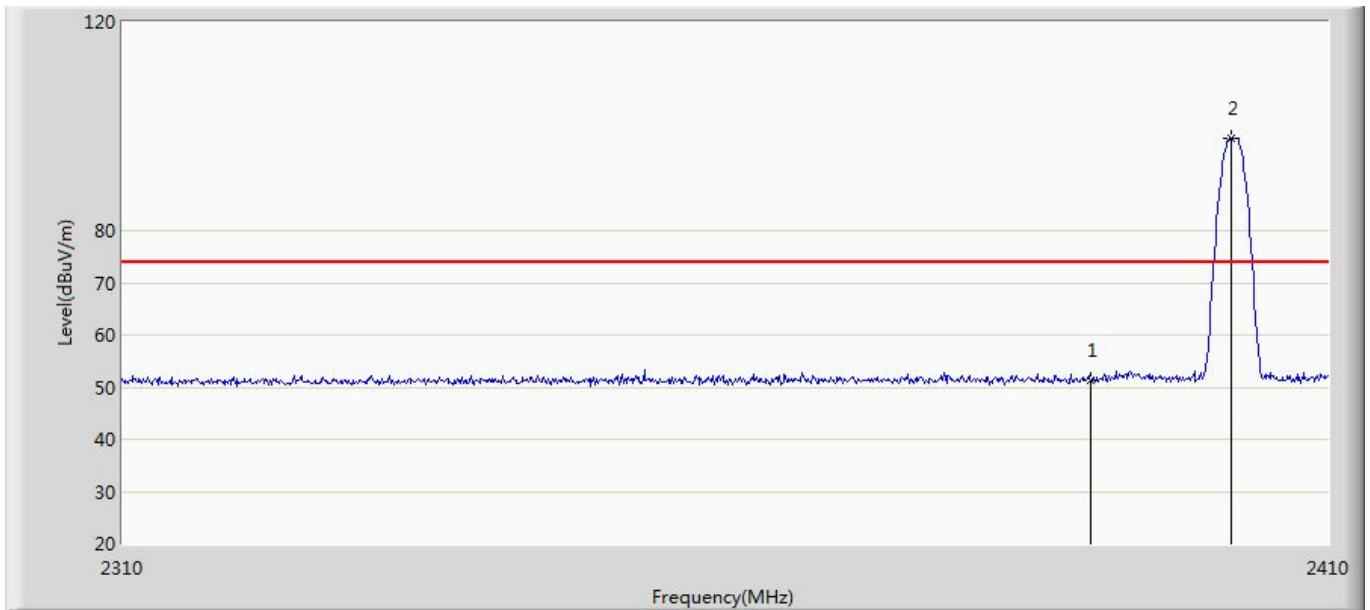

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.438	15.108	-22.562	74.000	36.329	PK
2	*	2401.800	97.663	61.334	23.663	74.000	36.328	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.438	20.671	-33.329	54.000	-30.767	AV
2	*	2401.800	97.663	66.896	12.896	54.000	-30.767	AV

Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 13:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

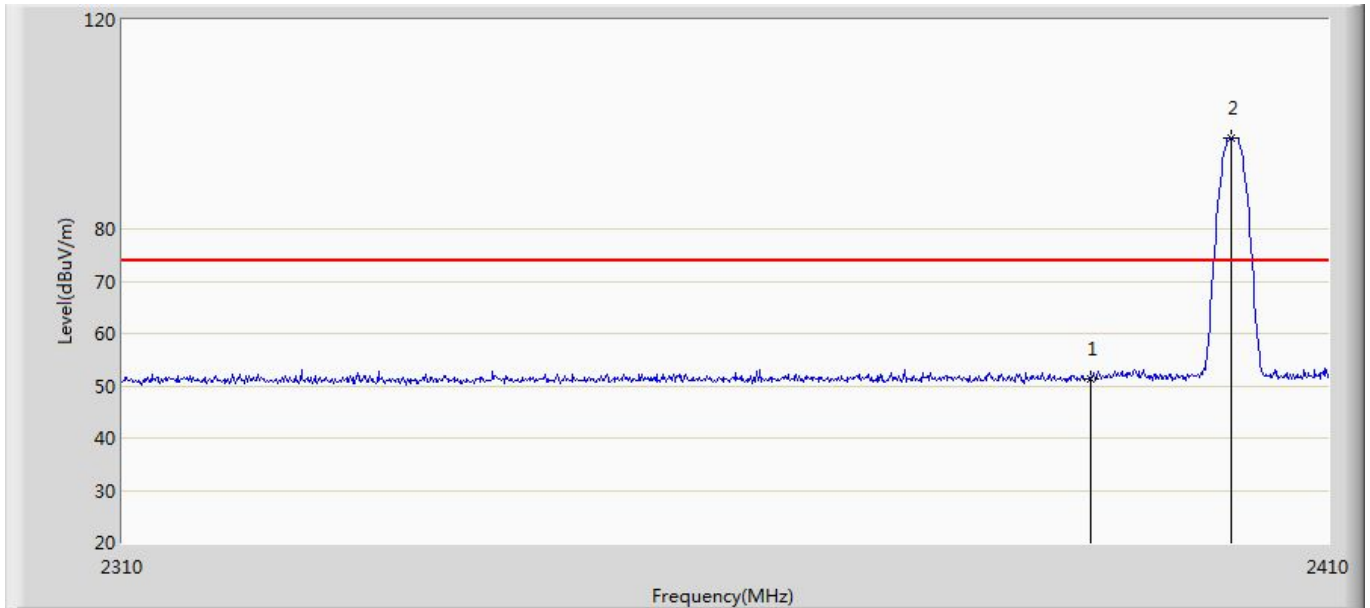


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.435	15.105	-22.565	74.000	36.329	PK
2	*	2401.800	97.495	61.166	23.495	74.000	36.328	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.435	20.668	-33.332	54.000	-30.767	AV
2	*	2401.800	97.495	66.728	12.728	54.000	-30.767	AV




Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 13:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

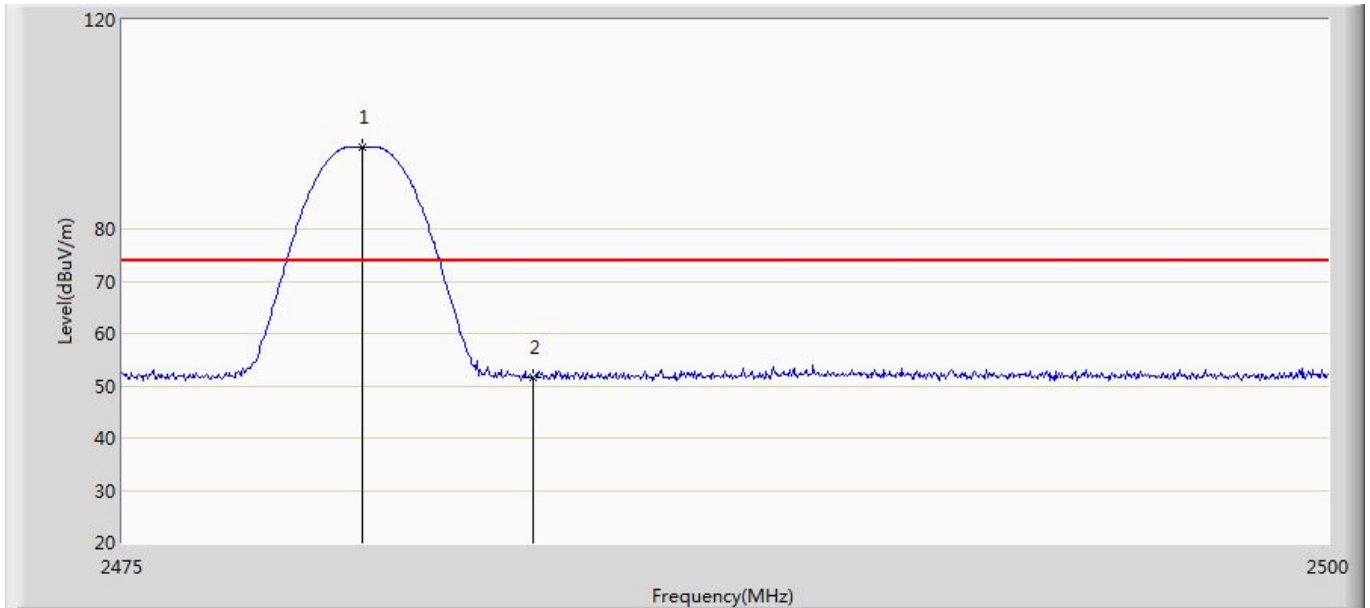

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.975	95.727	59.312	21.727	74.000	36.414	PK
2		2483.500	51.610	15.143	-22.390	74.000	36.467	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.975	95.727	64.960	10.960	54.000	-30.767	AV
2	*	2483.500	51.610	20.843	-33.157	54.000	-30.767	AV


Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

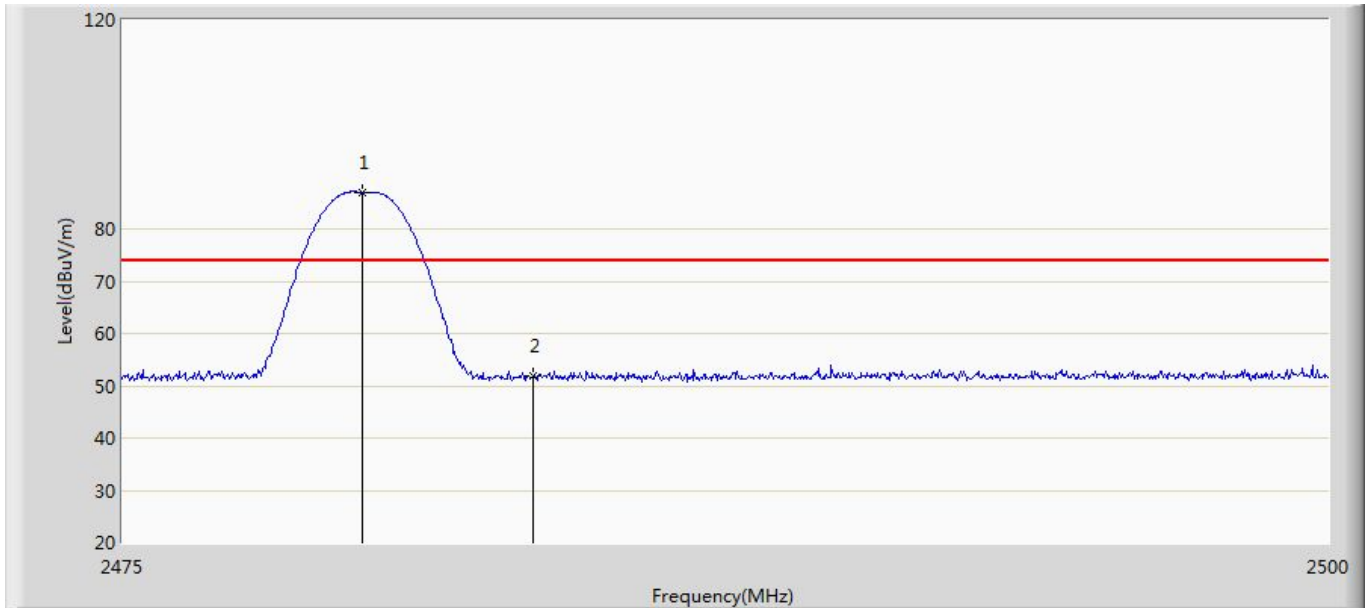

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.950	87.024	50.610	13.024	74.000	36.414	PK
2		2483.500	51.830	15.363	-22.170	74.000	36.467	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.950	87.024	56.257	2.257	54.000	-30.767	AV
2	*	2483.500	51.830	21.063	-32.937	54.000	-30.767	AV


Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

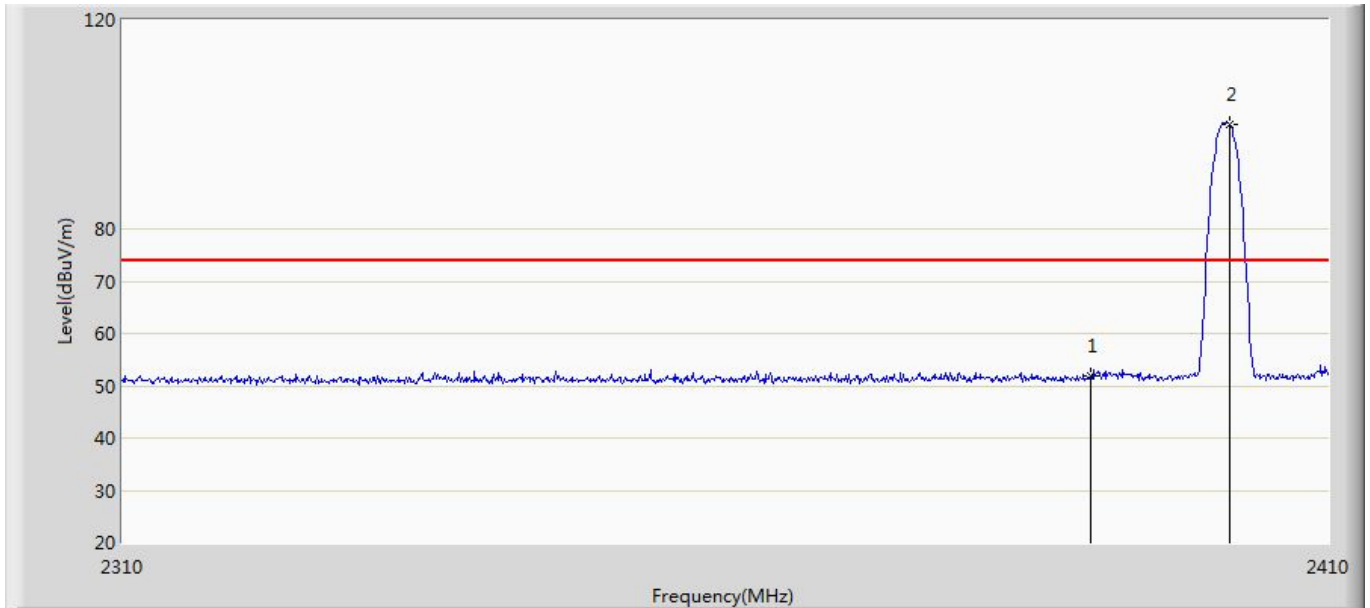

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.808	15.478	-22.192	74.000	36.329	PK
2	*	2401.700	100.135	63.806	26.135	74.000	36.329	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.808	21.041	-32.959	54.000	-30.767	AV
2	*	2401.700	100.135	69.368	15.368	54.000	-30.767	AV


Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2402MHz by 2DH5	

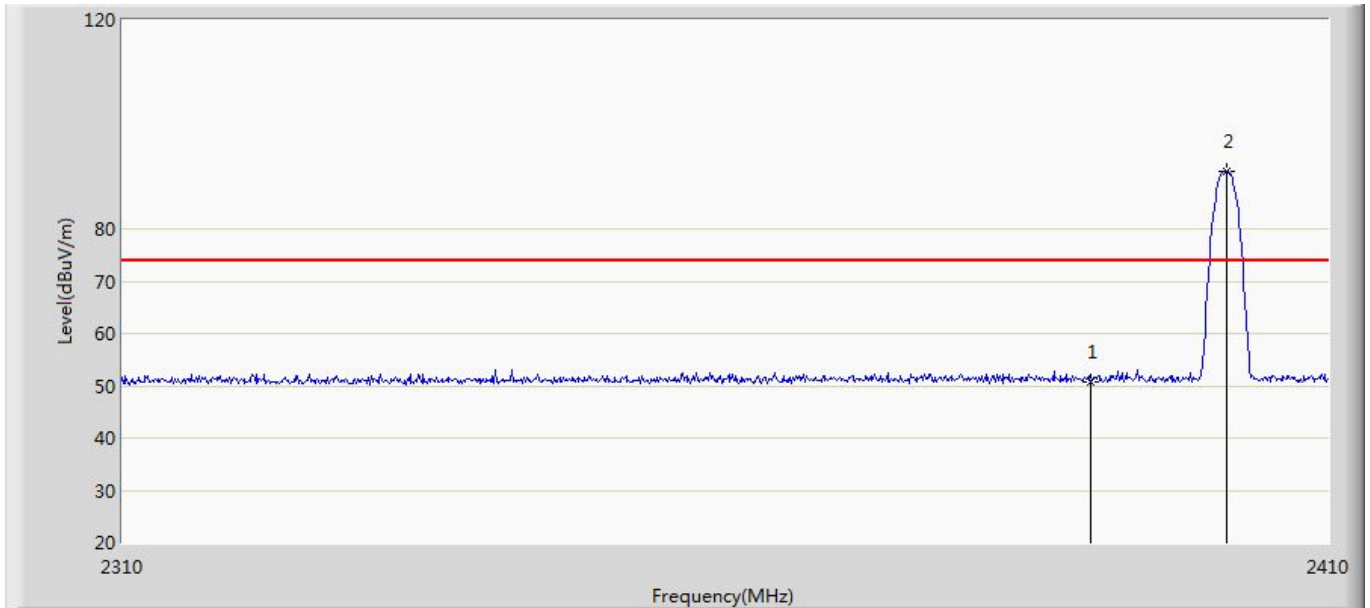

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.759	14.429	-23.241	74.000	36.329	PK
2	*	2401.500	90.972	54.643	16.972	74.000	36.329	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	50.759	19.992	-34.008	54.000	-30.767	AV
2	*	2401.500	90.972	60.205	6.205	54.000	-30.767	AV


Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:08
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

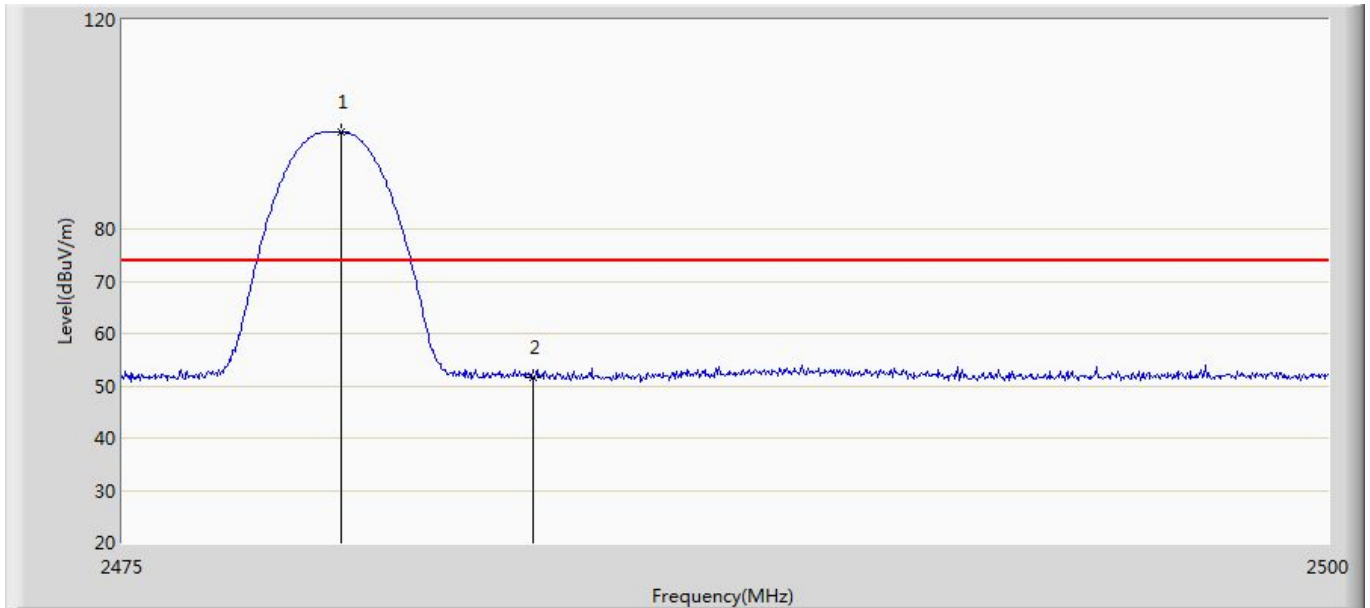

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.525	98.428	62.020	24.428	74.000	36.408	PK
2		2483.500	51.505	15.038	-22.495	74.000	36.467	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.525	98.428	67.661	13.661	54.000	-30.767	AV
2	*	2483.500	51.505	20.738	-33.262	54.000	-30.767	AV


Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 2:Transmit at 2480MHz by 2DH5	

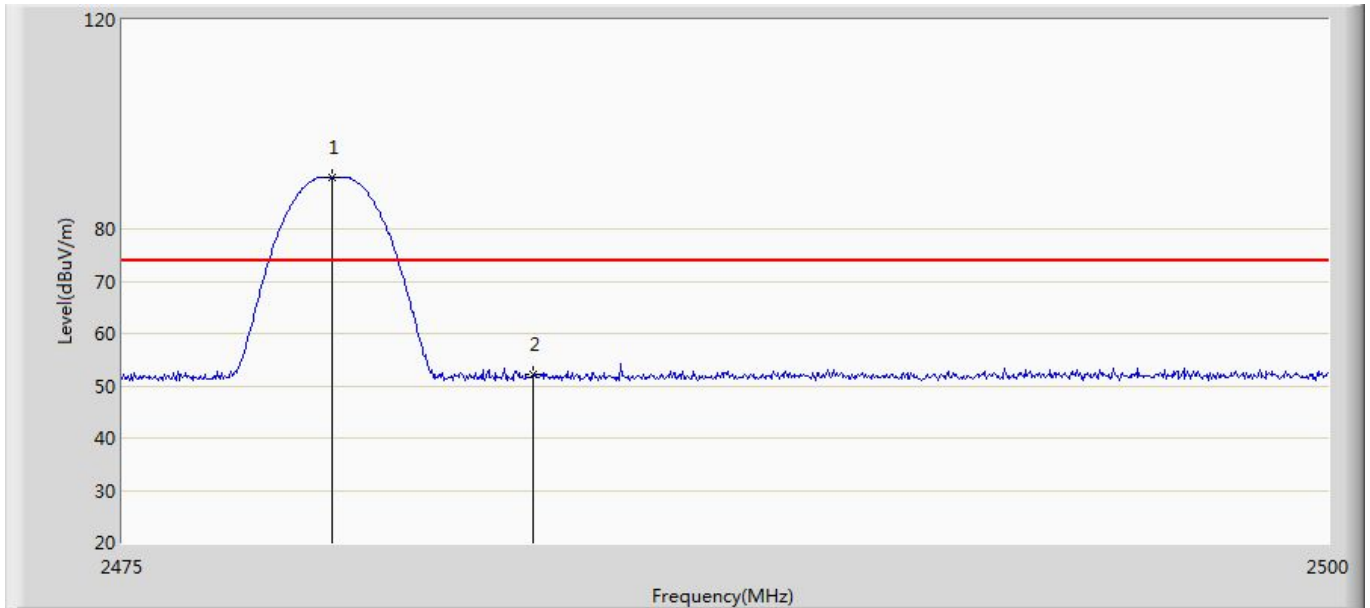

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.350	89.956	53.551	15.956	74.000	36.405	PK
2		2483.500	52.219	15.752	-21.781	74.000	36.467	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.350	89.956	59.189	5.189	54.000	-30.767	AV
2	*	2483.500	52.219	21.452	-32.548	54.000	-30.767	AV


Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:14
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

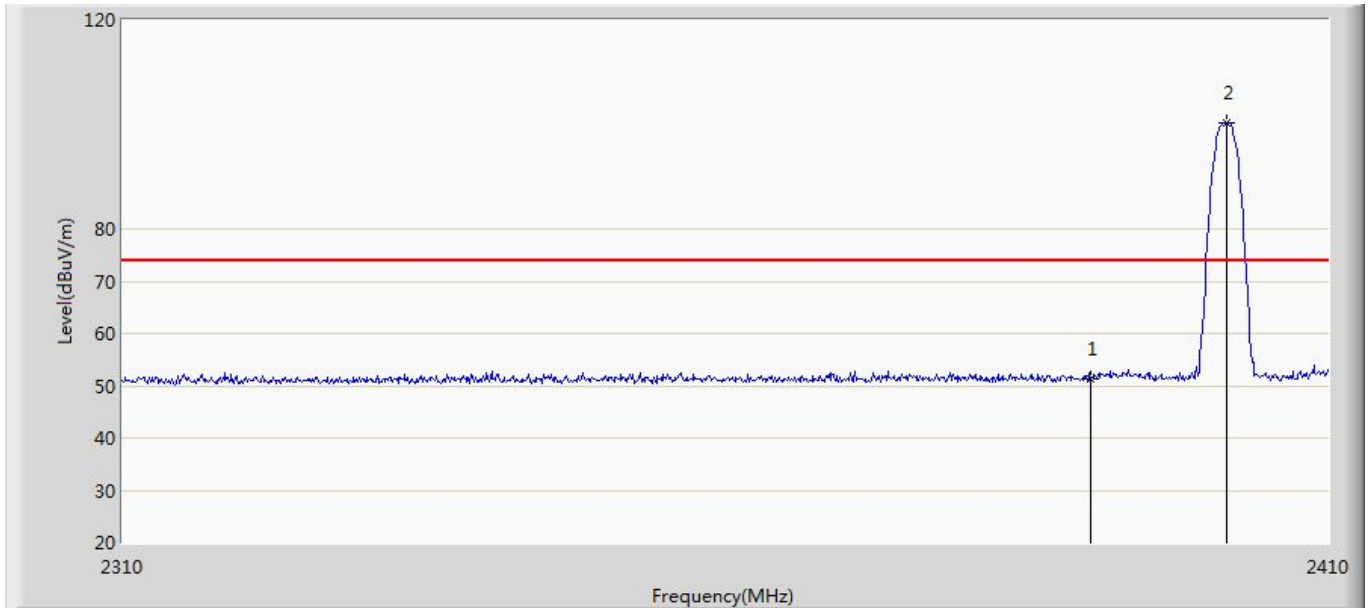

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.268	14.938	-22.732	74.000	36.329	PK
2	*	2401.500	100.364	64.035	26.364	74.000	36.329	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.268	20.501	-33.499	54.000	-30.767	AV
2	*	2401.500	100.364	69.597	15.597	54.000	-30.767	AV

Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2402MHz by 3DH5	

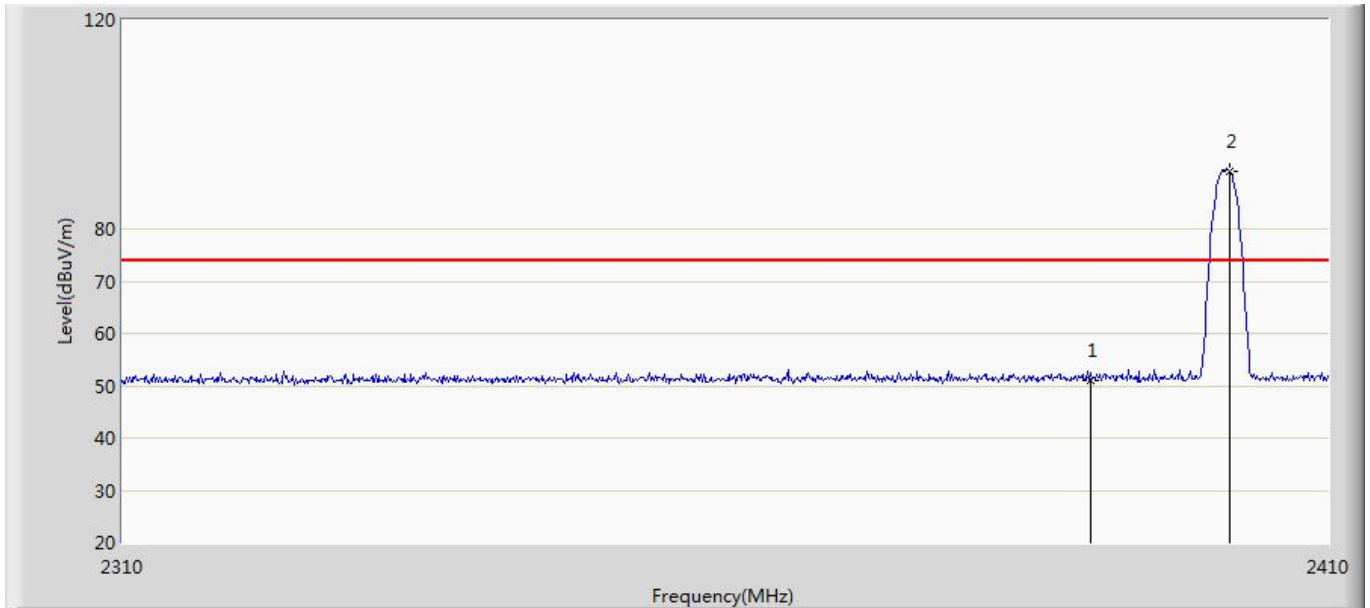


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.153	14.823	-22.847	74.000	36.329	PK
2	*	2401.700	91.151	54.822	17.151	74.000	36.329	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.153	20.386	-33.614	54.000	-30.767	AV
2	*	2401.700	91.151	60.384	6.384	54.000	-30.767	AV




Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:19
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

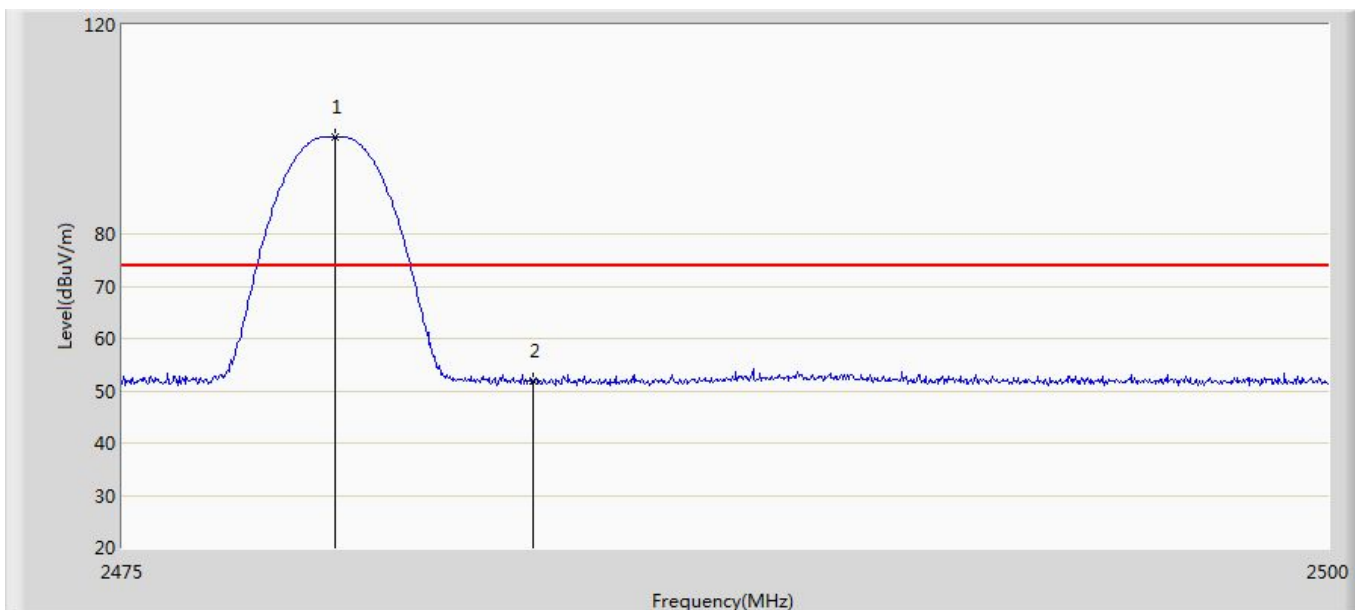

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.400	98.512	62.106	24.512	74.000	36.405	PK
2		2483.500	51.792	15.325	-22.208	74.000	36.467	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.400	98.512	67.745	13.745	54.000	-30.767	AV
2	*	2483.500	51.792	21.025	-32.975	54.000	-30.767	AV

Engineer: Tommie	
Site: AC5	Time: 2018/04/15 - 14:21
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module with Mesh	Power: AC 120V/60Hz
Note: Mode 3:Transmit at 2480MHz by 3DH5	

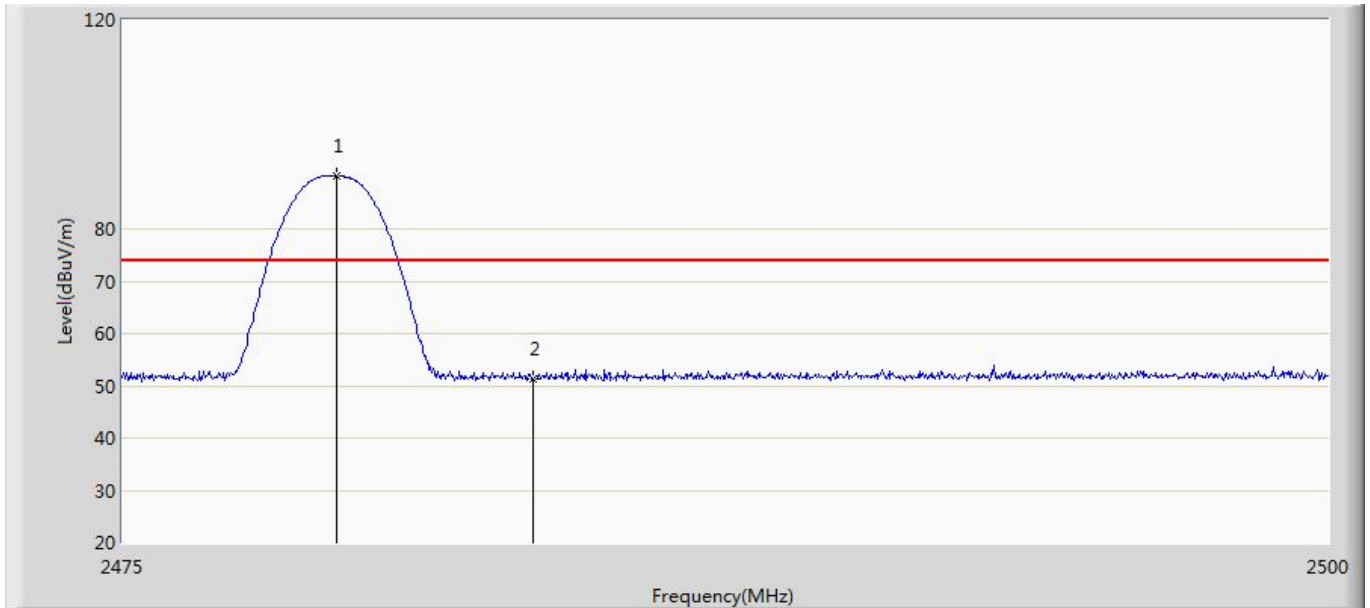

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.425	90.006	53.600	16.006	74.000	36.407	PK
2		2483.500	51.178	14.711	-22.822	74.000	36.467	PK

No	Mark	Frequency (MHz)	PK Level (dBuV/m)	AV Level (dBuV/m)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2479.425	90.006	59.239	5.239	54.000	-30.767	AV
2	*	2483.500	51.178	20.411	-33.589	54.000	-30.767	AV

## 12. Antenna Requirement

### 12.1. Limit

Antenna Requirement Limit
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>

### 12.2. Antenna Connector Construction

Antenna Connector Construction	
<input checked="" type="checkbox"/>	The use of a permanently attached antenna
<input type="checkbox"/>	The antenna use of a unique coupling to the intentional radiator
<input type="checkbox"/>	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

\_\_\_\_\_ The End \_\_\_\_\_