



Test Report

FCC Part15 Subpart C& RSS-247 Issue 2

Product Name : EZ-BT WICED Module
Model No. : CYBT-343052-02
FCC ID : WAP3052
IC : 7922A-3052

Applicant : Cypress Semiconductor
Address : 198 Champion Ct, San Jose, California
95134 United States

Date of Receipt : Jul. 23, 2019
Test Date : Jul. 23, 2019 ~ Aug. 12, 2019
Issued Date : Sep. 11, 2019
Report No. : 1972144R-RF-US-P06V03
Report Version : V1.2

The test results presented in this report relate only to the object tested.

The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result, unless the specification, standard or customer have special requirements

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory

This report is not used for social proof in China (or Mainland China) market.

Test Report Certification

Issued Date : Sep. 11, 2019
Report No. : 1972144R-RF-US-P06V03



Product Name : EZ-BT WICED Module
 Applicant : Cypress Semiconductor
 Address : 198 Champion Ct, San Jose, California 95134 United States
 Manufacturer : Cypress Semiconductor
 Address : 198 Champion Ct, San Jose, California 95134 United States
 Factory : Wujiang Sigmatron Electronics Co., Ltd
 Address : 386 Huahong Rd, Wujiang, Suzhou, Jiangsu, China
 Model No. : CYBT-343052-02
 FCC ID : WAP3052
 IC : 7922A-3052
 EUT Voltage : DC 2.5-3.6V
 Test Voltage : AV 120V/60Hz
 Applicable Standard : FCC CFR Title 47 Part 15 Subpart C
 KDB 558074 D01v05r02
 ANSI C63.10: 2013
 RSS-Gen Issue 5/RSS-247 Issue 2

Test Result : Complied
 Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
 No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
 Jiangsu, China
 TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
 FCC Designation Number: CN1199;
 ISED CAB identifier: CN0040

Documented By : Kathy Feng
 (Adm. Specialist: Kathy Feng)

Reviewed By : Frank He
 (Senior Engineer: Frank He)

Approved By : Jack Zhang
 (Engineering Supervisor: Jack Zhang)

TABLE OF CONTENTS

Description	Page
1. General Information.....	7
1.1. EUT Description	7
1.2. Antenna information	9
1.3. Mode of Operation.....	9
1.4. Tested System Details	11
1.5. Configuration of Tested System	12
1.6. EUT Exercise Software.....	13
2. Technical Test.....	14
2.1. Summary of Test Result	14
2.2. Test Environment.....	16
3. Conducted Emission.....	17
3.1. Test Equipment.....	17
3.2. Test Setup	17
3.3. Limit	18
3.4. Test Procedure	18
3.5. Uncertainty	18
3.6. Test Result	19
4. Emissions in restricted frequency bands.....	21
4.1. Test Equipment.....	21
4.2. Test Setup	22
4.3. Limit	23
4.4. Test Procedure	26
4.5. Uncertainty	26
4.6. Test Result	27
5. 20dB Bandwidth	27
5.1. Test Equipment.....	35
5.2. Test Setup	35
5.3. Limit	35
5.4. Test Procedure	36
5.5. Uncertainty	36
5.6. Test Result	37
6. Carrier Frequency Separation	39
6.1. Test Equipment.....	39
6.2. Test Setup	39
6.3. Limit	40
6.4. Test Procedure	40
6.5. Uncertainty	40

6.6.	Test Result	41
7.	Number of Hopping Frequencies	43
7.1.	Test Equipment.....	43
7.2.	Test Setup	43
7.3.	Limit	43
7.4.	Test Procedure	44
7.5.	Uncertainty	44
7.6.	Test Result	45
8.	Time of Occupancy (Dwell Time)	46
8.1.	Test Equipment.....	46
8.2.	Test Setup	46
8.3.	Limit	46
8.4.	Test Procedure.....	47
8.5.	Uncertainty	47
8.6.	Test Result	48
9.	Peak Output Power	54
9.1.	Test Equipment.....	54
9.2.	Test Setup	54
9.3.	Limit	55
9.4.	Test Procedure	55
9.5.	Uncertainty	55
9.6.	Test Result	56
10.	Emissions in non-restricted frequency bands	57
10.1.	Test Equipment.....	57
10.2.	Test Setup	57
10.3.	Limit	58
10.4.	Test Procedure	58
10.5.	Uncertainty	58
10.6.	Test Result	59
11.	Radiated Emission Band Edge	60
11.1.	Test Equipment.....	60
11.2.	Test Setup	60
11.3.	Limit	61
11.4.	Test Procedure	61
11.5.	Uncertainty	61
11.6.	Duty Factor.....	62
11.7.	Test Result	63
12.	Antenna Requirement.....	71

12.1. Limit	71
12.2. Antenna Connector Construction.....	71

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1972144R-RF-US-P06V03	V1.0	Initial Issued Report	Aug. 13, 2019
1972144R-RF-US-P06V03	V1.1	P54, added the test equipment of Peak Output Power	Sep. 02, 2019
1972144R-RF-US-P06V03	V1.2	P54, updated the test setup of Peak Output Power	Sep. 11, 2019

1. General Information

1.1. EUT Description

Product Name	EZ-BT WICED Module
Model No.	CYBT-343052-02
EUT Voltage	DC 2.5-3.6V
Test Voltage	AC 120V/60Hz
Bluetooth Specification	V5.0
Frequency Range	2402- 2480 MHz
Channel Number	BR: 79
Channel Separation	BR: 1MHz
Type of Modulation	BR: GFSK
Data Rate	BR: 1Mbps(GFSK)
Antenna Type	Reference to Antenna List
Peak Antenna Gain	Reference to Antenna List

Note: The EUT only supports BR.

Bluetooth Working Frequency of Each Channel: (For BR)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2403 MHz	02	2404 MHz	03	2405 MHz
04	2406 MHz	05	2407 MHz	06	2408 MHz	07	2409 MHz
08	2410 MHz	09	2411 MHz	10	2412 MHz	11	2413 MHz
12	2414 MHz	13	2415 MHz	14	2416 MHz	15	2417 MHz
16	2418 MHz	17	2419 MHz	18	2420 MHz	19	2421 MHz
20	2422 MHz	21	2423 MHz	22	2424 MHz	23	2425 MHz
24	2426 MHz	25	2427 MHz	26	2428 MHz	27	2429 MHz
28	2430 MHz	29	2431 MHz	30	2432 MHz	31	2433 MHz
32	2434 MHz	33	2435 MHz	34	2436 MHz	35	2437 MHz
36	2438 MHz	37	2439 MHz	38	2440 MHz	39	2441 MHz
40	2442 MHz	41	2443 MHz	42	2444 MHz	43	2445 MHz
44	2446 MHz	45	2447 MHz	46	2448 MHz	47	2449 MHz
48	2450 MHz	49	2451 MHz	50	2452 MHz	51	2453 MHz
52	2454 MHz	53	2455 MHz	54	2456 MHz	55	2457 MHz
56	2458 MHz	57	2459 MHz	58	2460 MHz	59	2461 MHz
60	2462 MHz	61	2463 MHz	62	2464 MHz	63	2465 MHz
64	2466 MHz	65	2467 MHz	66	2468 MHz	67	2469 MHz
68	2470 MHz	69	2471 MHz	70	2472 MHz	71	2473 MHz
72	2474 MHz	73	2475 MHz	74	2476 MHz	75	2477 MHz
76	2478 MHz	77	2479 MHz	78	2480 MHz	N/A	N/A

1.2 Antenna information

Antenna manufacturer	N/A					
Antenna Delivery	<input checked="" type="checkbox"/>	1*TX+1*RX	<input type="checkbox"/>	2*TX+2*RX	<input type="checkbox"/>	3*TX+3*RX
Antenna technology	<input checked="" type="checkbox"/>	SISO				
	<input type="checkbox"/>	MIMO	<input type="checkbox"/>	Basic		
			<input type="checkbox"/>	CDD		
			<input type="checkbox"/>	Beam-forming		
Antenna Type	<input type="checkbox"/>	External	<input type="checkbox"/>	Dipole		
	<input checked="" type="checkbox"/>	Internal	<input type="checkbox"/>	PIFA		
			<input checked="" type="checkbox"/>	PCB		
			<input type="checkbox"/>	Ceramic Chip Antenna		
			<input type="checkbox"/>	Stamping Antenna		
			<input type="checkbox"/>	Metal plate type F antenna		
			<input type="checkbox"/>	Monopole antenna		
	Antenna Gain	0dBi				

1.3 Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Transmitter-1Mbps(GFSK_DH5)
Mode 2: Transmitter-2Mbps(Pi/4 DQPSK_DH5)
Mode 3: Transmitter-3Mbps(8DPSK_DH5)
Mode 4: Transmitter-Hopping

Note:

1. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
2. Regards to the frequency band operation for systems using FHSS modulation: normal operation (hopping) was selected to test for conducted spurious test.
3. The extreme test condition for voltage and temperature were declared by the manufacturer.
4. The reading values of all the test items contain cable loss.


1.4 Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook	Think Pad	2526	LV-A3285	Power by adapter
A USB Cable	N/A	N/A	N/A	Shield, 0.5m
B USB Cable	N/A	N/A	N/A	Shield, 10m

1.5 Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

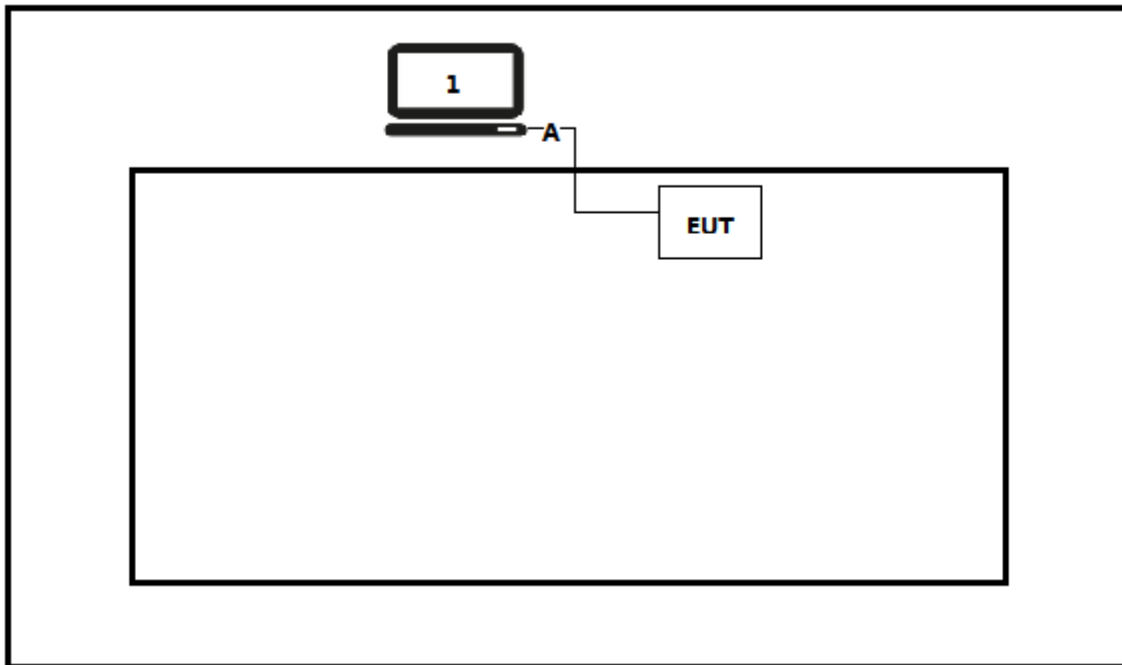

Test setup Diagram- Radiated Emission

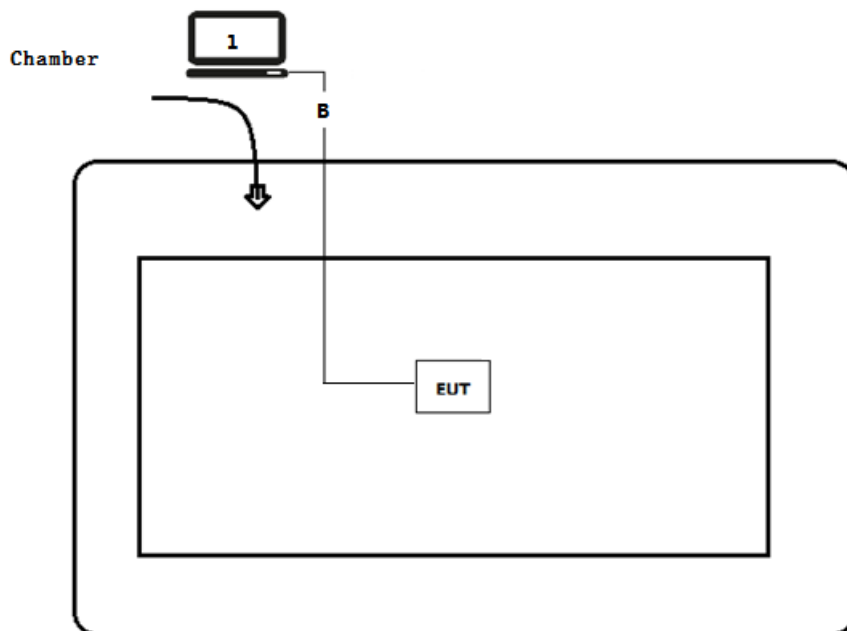

1.6 EUT Exercise Software

1	Setup the EUT and simulators as shown on above.
2	Turn on the power of all equipment.
3	Run RF software [Bluetool], and set the test mode and channel, then press OK to start to continue transmit.

2. Technical Test

2.1. Summary of Test Result

- No deviations from the test standards
 Deviations from the test standards as below description:

For FCC

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	Yes	No
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	Yes	No
20dB Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Carrier Frequency Separation	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)	Yes	No
Number of Hopping Frequencies	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Time of Occupancy (Dwell Time)	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(1)(iii)	Yes	No
Peak Output Power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(1)	Yes	No
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.215(c), 15.247(d)	Yes	No
Radiated Emission Band Edge	FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)	Yes	No
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	Yes	No

For ISED

Performed Test Item	Normative References	Test Performed	Deviation
Conducted Emission	RSS-Gen Issue 5 Section 8.8	Yes	No
Radiated Emission	RSS-Gen Issue 5 Section 8.9	Yes	No
20dB Bandwidth	RSS-247 Issue 2 Section 5.1	Yes	No
Carrier Frequency Separation	RSS-247 Issue 2 Section 5.1	Yes	No
Number of Hopping Frequencies	RSS-247 Issue 2 Section 5.1	Yes	No
Time of Occupancy (Dwell Time)	RSS-247 Issue 2 Section 5.1	Yes	No
Peak Output Power	RSS-247 Issue 2 Section 5.4	Yes	No
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	Yes	No
Radiated Emission Band Edge	RSS-Gen Issue 5 Section 8.10	Yes	No
Antenna Requirement	RSS-Gen Issue 5 Section 8.3	Yes	No

2.2. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000


3. Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2019.03.05	2020.03.04
Two-Line V-Network	R&S	ENV 216	101189	2018.11.14	2019.11.13
Two-Line V-Network	R&S	ENV 216	101044	2018.09.15	2019.09.15
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2018.09.15	2019.09.15
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2019.01.05	2020.01.04
Quietek EMI V3(test software)	Quietek	N/A	N/A	N/A	N/A

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

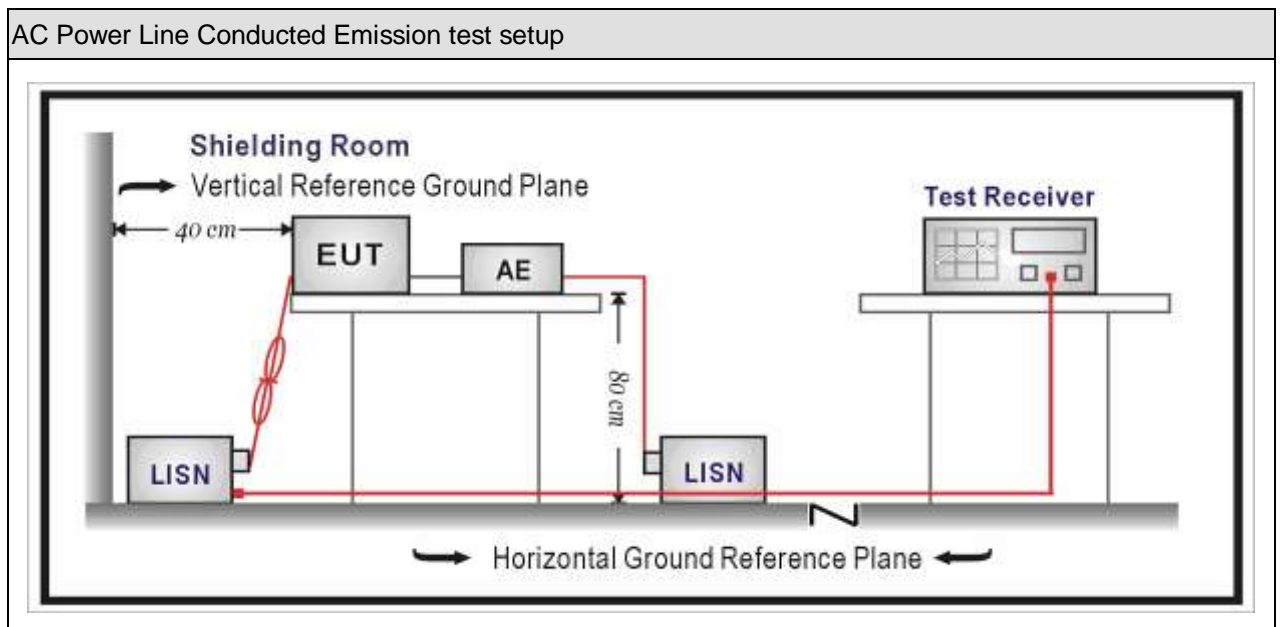

3.3. Limit

Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dBµV)	Average(dBµV)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

Note 1: The lower limit shall apply at the transition frequencies.
 Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

3.4. Test Procedure


Test Method			
	References Rule	Chapter	Item
<input checked="" type="checkbox"/>	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

3.5. Uncertainty

The measurement uncertainty is defined as ± 2.02 dB

3.6. Test Result

Engineer: Lynee	
Site: TR1	Time: 2019/07/26
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

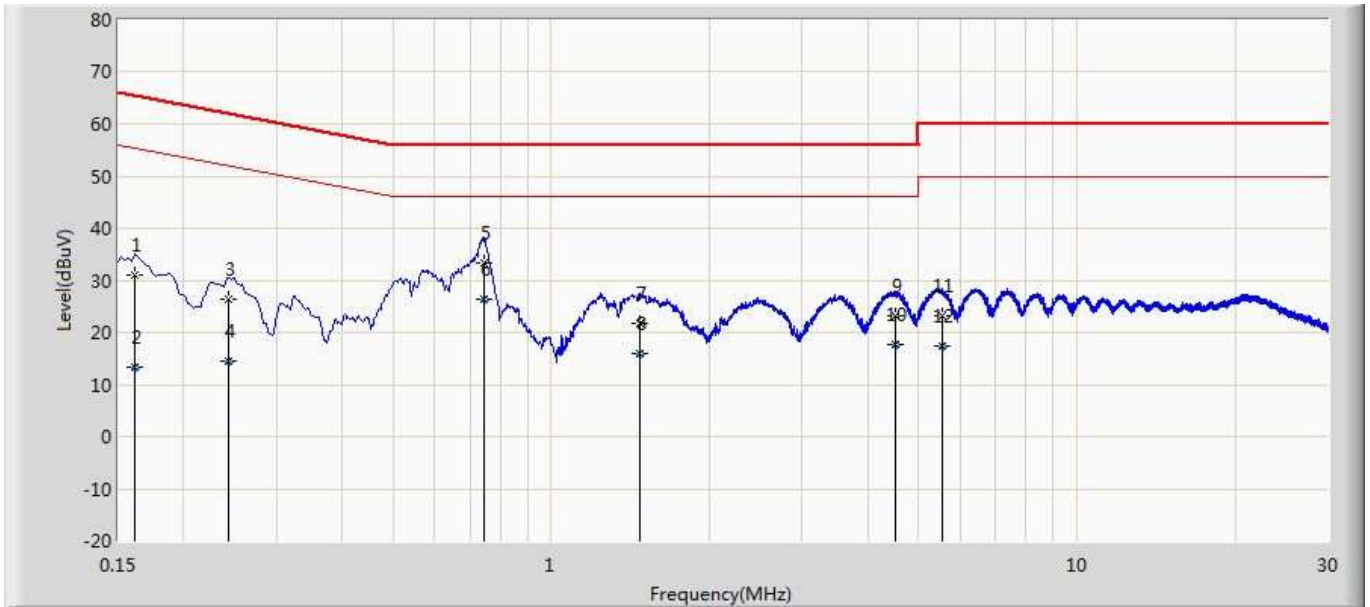


No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.161	30.928	21.292	-34.471	65.399	9.608	0.029	0.000	QP
2		0.161	13.392	3.756	-42.007	55.399	9.608	0.029	0.000	AV
3		0.244	26.431	16.801	-35.511	61.942	9.600	0.030	0.000	QP
4		0.244	14.517	4.887	-37.425	51.942	9.600	0.030	0.000	AV
5		0.744	33.220	23.568	-22.780	56.000	9.602	0.051	0.000	QP
6	*	0.744	26.311	16.659	-19.689	46.000	9.602	0.051	0.000	AV
7		1.478	21.835	12.151	-34.165	56.000	9.610	0.073	0.000	QP
8		1.478	16.041	6.358	-29.959	46.000	9.610	0.073	0.000	AV
9		4.524	23.174	13.386	-32.826	56.000	9.652	0.136	0.000	QP
10		4.524	17.760	7.972	-28.240	46.000	9.652	0.136	0.000	AV
11		5.545	23.257	13.436	-36.743	60.000	9.671	0.150	0.000	QP
12		5.545	17.532	7.712	-32.468	50.000	9.671	0.150	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Lynee	
Site: TR1	Time: 2019/07/26
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

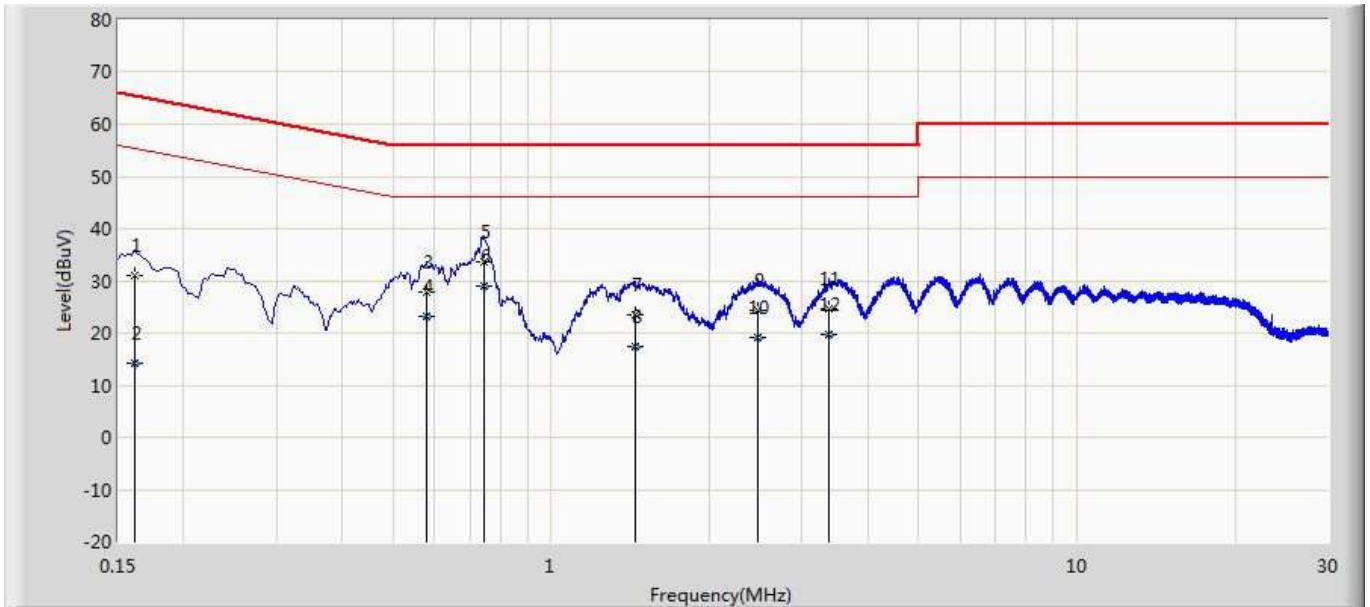

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Probe (dB)	Cable (dB)	Amp (dB)	Type
1		0.161	31.006	21.385	-34.393	65.399	9.592	0.029	0.000	QP
2		0.161	14.130	4.509	-41.269	55.399	9.592	0.029	0.000	AV
3		0.578	27.944	18.308	-28.056	56.000	9.590	0.045	0.000	QP
4		0.578	23.122	13.486	-22.878	46.000	9.590	0.045	0.000	AV
5		0.744	33.667	24.026	-22.333	56.000	9.590	0.051	0.000	QP
6	*	0.744	28.916	19.275	-17.084	46.000	9.590	0.051	0.000	AV
7		1.442	23.378	13.706	-32.622	56.000	9.599	0.073	0.000	QP
8		1.442	17.465	7.794	-28.535	46.000	9.599	0.073	0.000	AV
9		2.470	24.291	14.577	-31.709	56.000	9.616	0.098	0.000	QP
10		2.470	19.031	9.318	-26.969	46.000	9.616	0.098	0.000	AV
11		3.381	24.767	15.024	-31.233	56.000	9.628	0.115	0.000	QP
12		3.381	19.754	10.010	-26.246	46.000	9.628	0.115	0.000	AV

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

4. Emissions in restricted frequency bands

4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2019.03.29	2020.03.28
Loop Antenna	R&S	HFH2-Z2	833799/003	2018.11.16	2019.11.15
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2018.10.16	2019.10.15
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2019.03.02	2020.03.01
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2019.01.04	2020.01.03
Quietek EMI V3(test software)	Quietek	N/A	N/A	N/A	N/A


Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2019.01.04	2020.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2019.05.06	2020.05.05
Preamplifier	QuieTek	AP-040G	CHM-0906001	2019.05.06	2020.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2019.01.22	2020.01.21
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2018.11.25	2019.11.24
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2019.03.02	2020.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2019.03.02	2020.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2019.03.02	2020.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2019.06.10	2020.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.01.04	2020.01.03
Quietek EMI V3(test software)	Quietek	N/A	N/A	N/A	N/A


Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

4.2. Test Setup


Below 30MHz Test Setup:

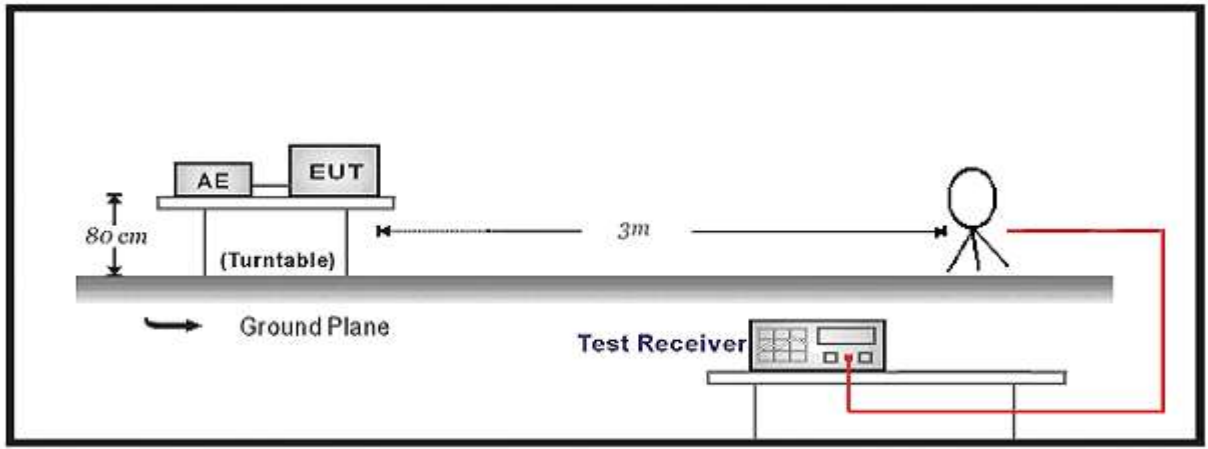

30MHz-1GHz Test Setup:

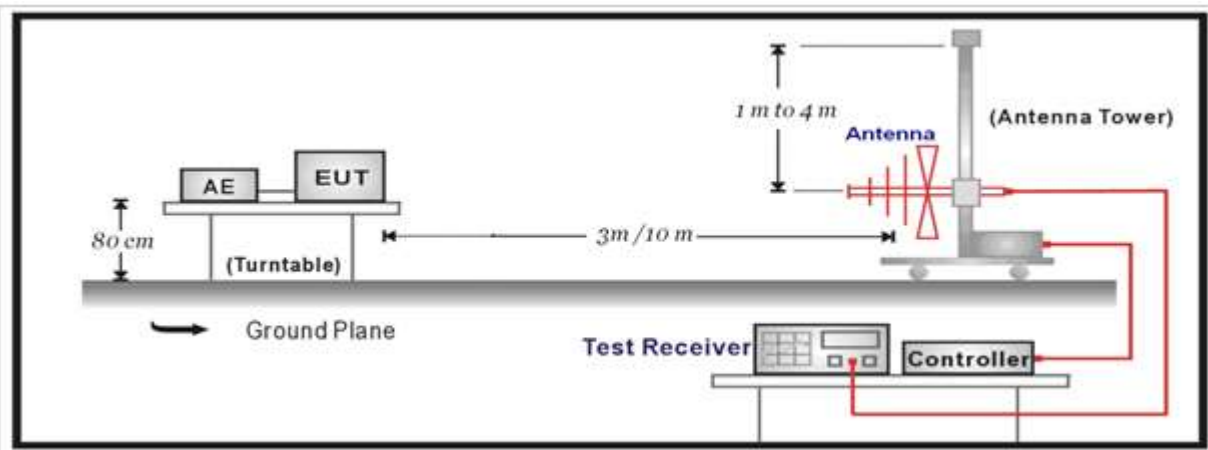

Above 1GHz Test Setup:

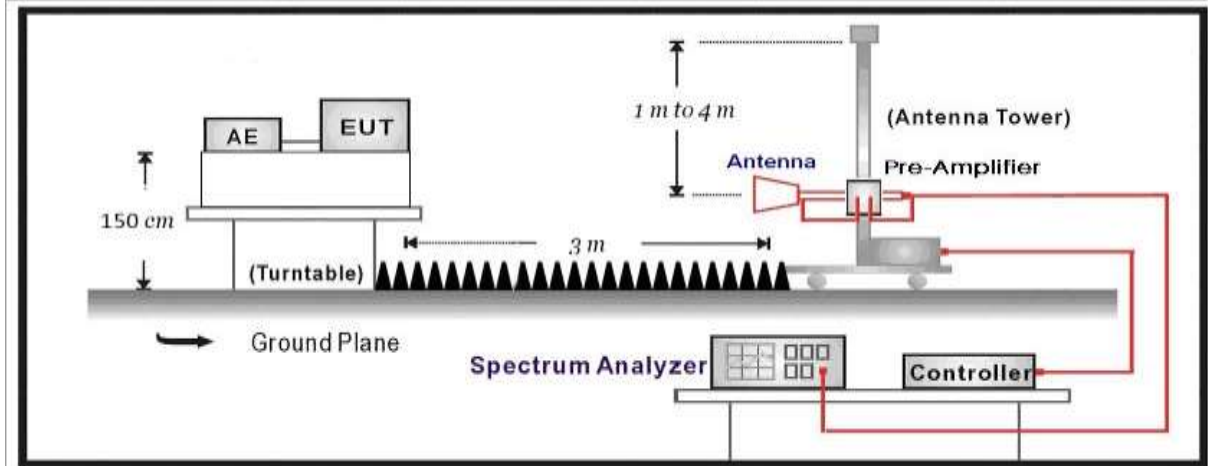

4.3. Limit

For FCC:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

For ISED:

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090-0.110	13.36-13.41	1645.5-1646.5	13.25-13.4
2.1735-2.1905	16.42-16.423	1660-1710	14.47-14.5
3.020-3.026	16.69475-16.69525	1718.8-1722.2	15.35-16.2
4.125-4.128	16.80425-16.80475	2200-2300	17.7-21.4
4.17725-4.17775	25.5-25.67	2310-2390	22.01-23.12
4.20725-4.20775	37.5-38.25	2655-2900	23.6-24.0
5.677-5.683	73-74.6	3260-3267	31.2-31.8
6.215-6.218	74.8-75.2	3332-3339	36.43-36.5
6.26775-6.26825	108-138	3345.8-3358	Above 38.6
6.31175-6.31225	156.52475-156.52525	3500-4400	
8.291-8.294	156.7-156.9	4500-5150	
8.362-8.366	240-285	5350-5460	
8.37625-8.38675	322-335.4	7250-7750	
8.41425-8.41475	399.9-410	8025-8500	
12.29-12.293	608-614	9.0-9.2	
12.51975-12.52025	960-1427	9.3-9.5	
12.57675-12.57725	1435-1626.5	10.6-12.7	

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

4.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
below 1G is defined as ± 3.8 dB


4.6. Test Result

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

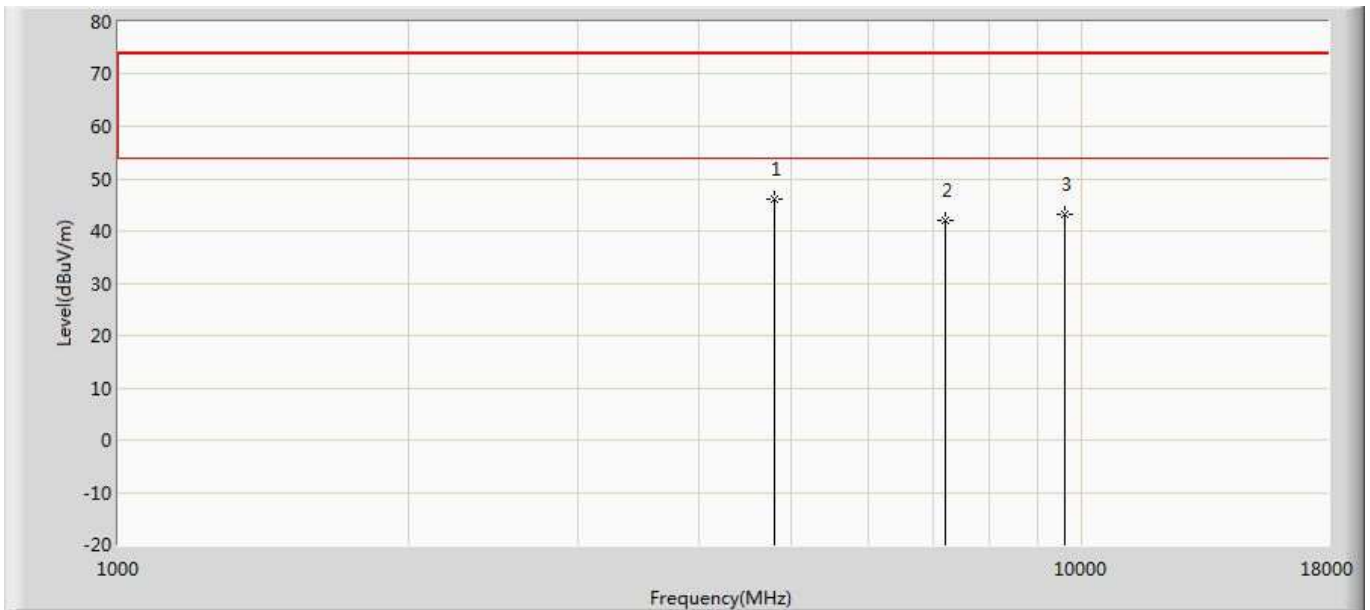


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4804.000	46.149	41.632	-27.851	74.000	4.517	PK
2		7206.000	42.032	34.485	-31.968	74.000	7.547	PK
3		9608.000	43.115	33.933	-30.885	74.000	9.182	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

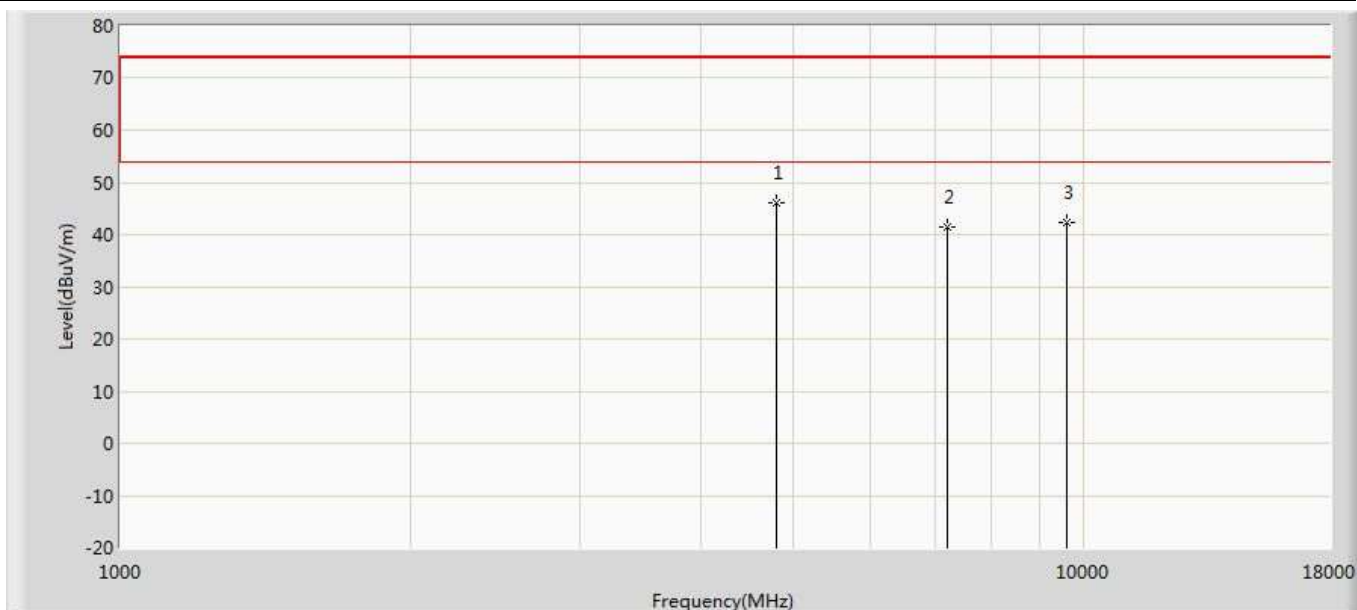


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4804.000	46.063	41.546	-27.937	74.000	4.517	PK
2		7206.000	41.454	33.907	-32.546	74.000	7.547	PK
3		9608.000	42.226	33.044	-31.774	74.000	9.182	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2441MHz by DH5	

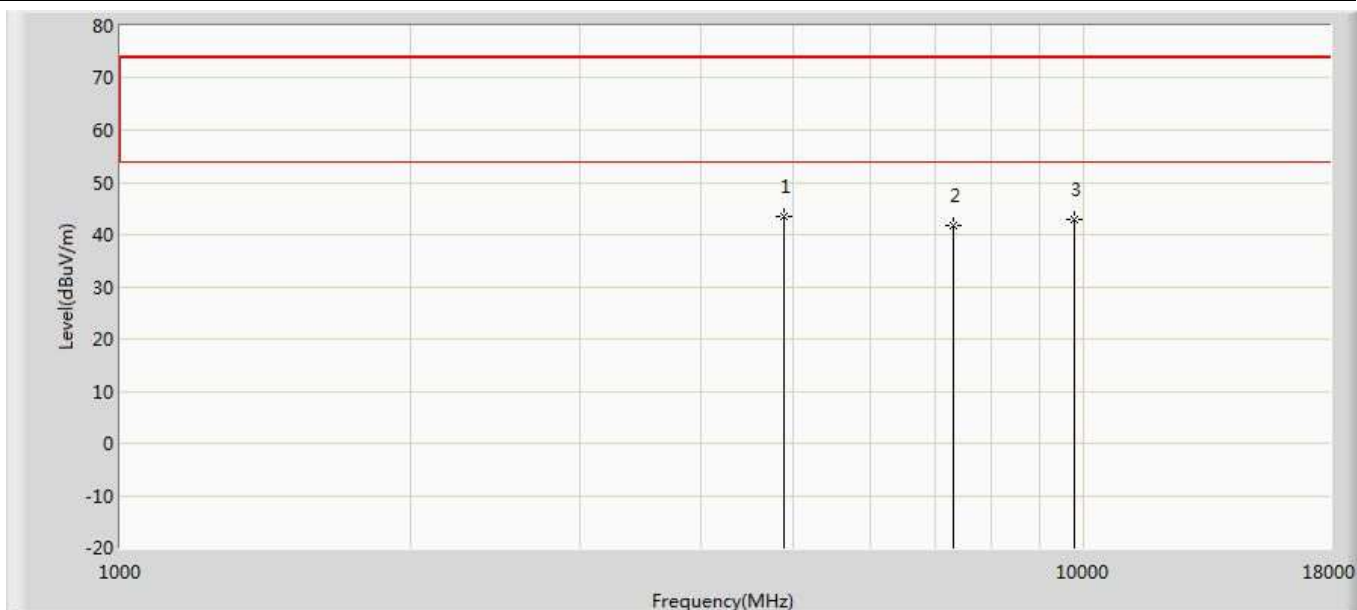


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4882.000	43.409	38.663	-30.591	74.000	4.746	PK
2		7323.000	41.637	33.947	-32.363	74.000	7.690	PK
3		9764.000	42.993	32.901	-31.007	74.000	10.092	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2441MHz by DH5	

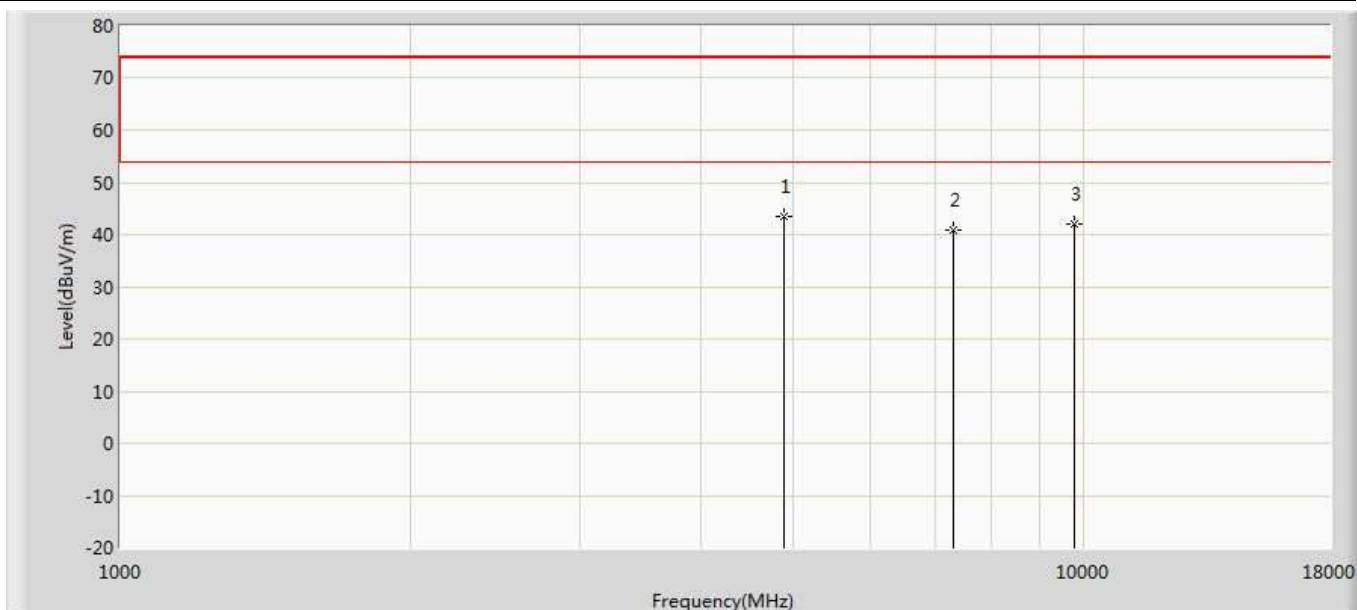


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	4882.000	43.512	38.766	-30.488	74.000	4.746	PK
2		7323.000	40.963	33.273	-33.037	74.000	7.690	PK
3		9764.000	42.043	31.951	-31.957	74.000	10.092	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

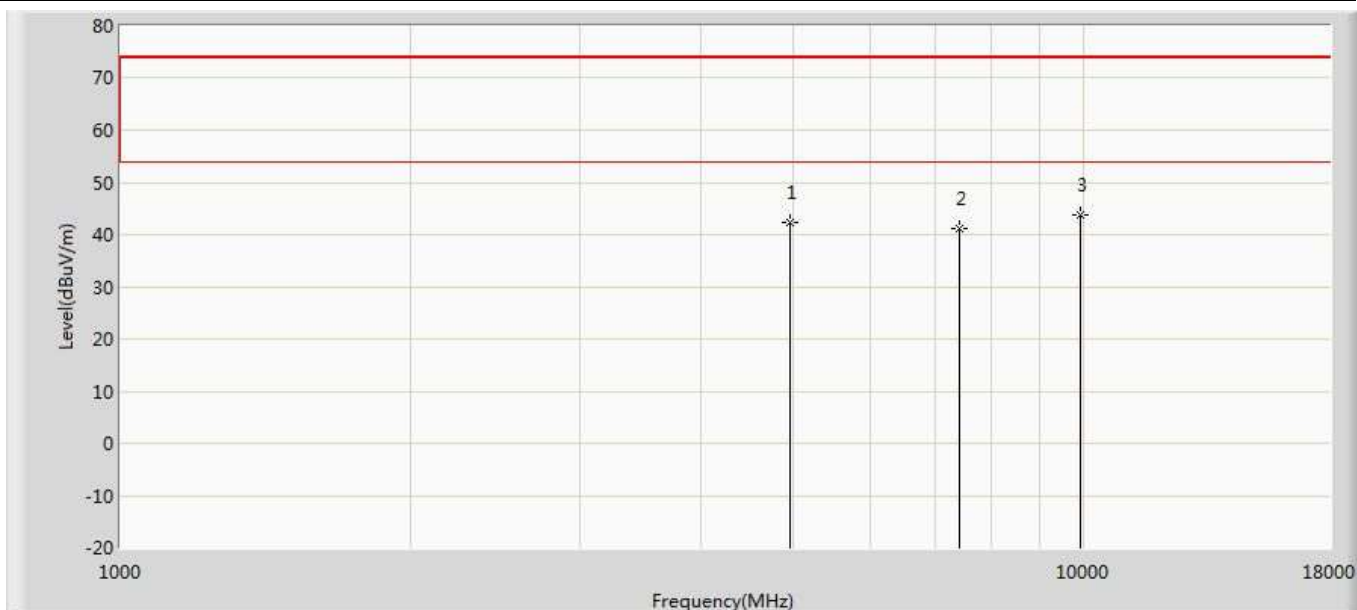

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	42.260	37.340	-31.740	74.000	4.920	PK
2		7440.000	41.261	33.546	-32.739	74.000	7.715	PK
3	*	9920.000	43.803	33.856	-30.197	74.000	9.946	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:57
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

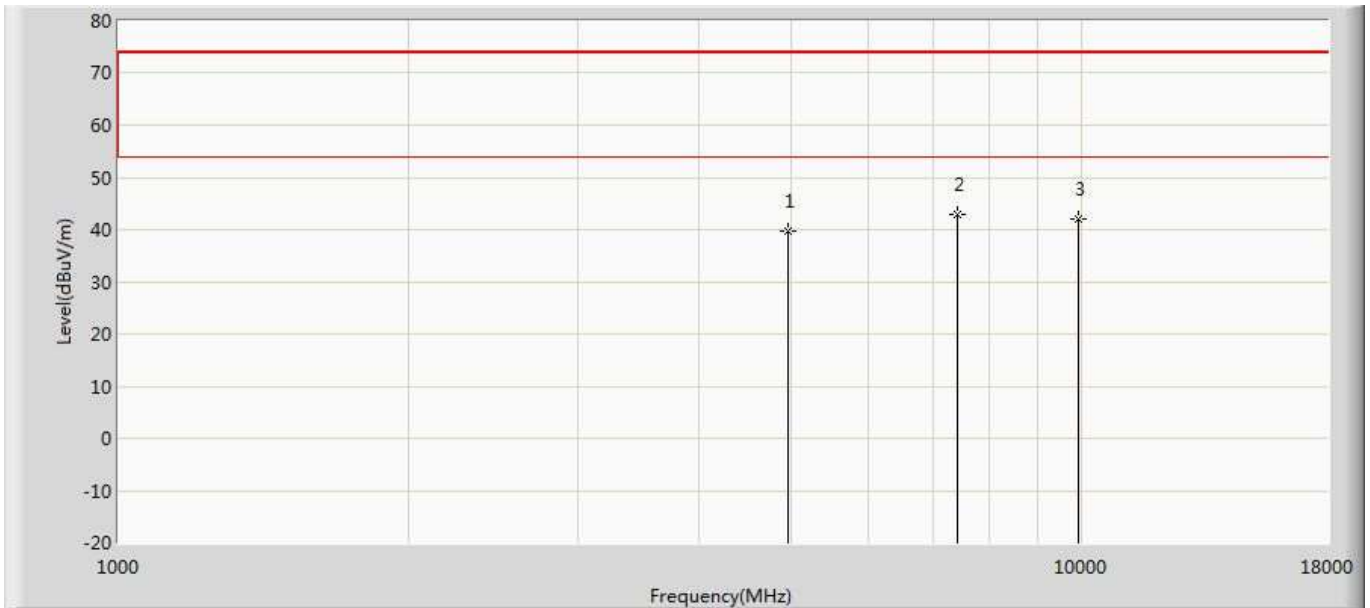


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	39.737	34.817	-34.263	74.000	4.920	PK
2	*	7440.000	42.796	35.081	-31.204	74.000	7.715	PK
3		9920.000	42.070	32.123	-31.930	74.000	9.946	PK

Note:

1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, 18GHz~26GHz, both of the worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for using average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. As the radiated emission was performed, so conducted emission was not tested.

The worst case of Radiated Emission below 1GHz:

Engineer: Lucas	
Site: AC3	Time: 2019/07/29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

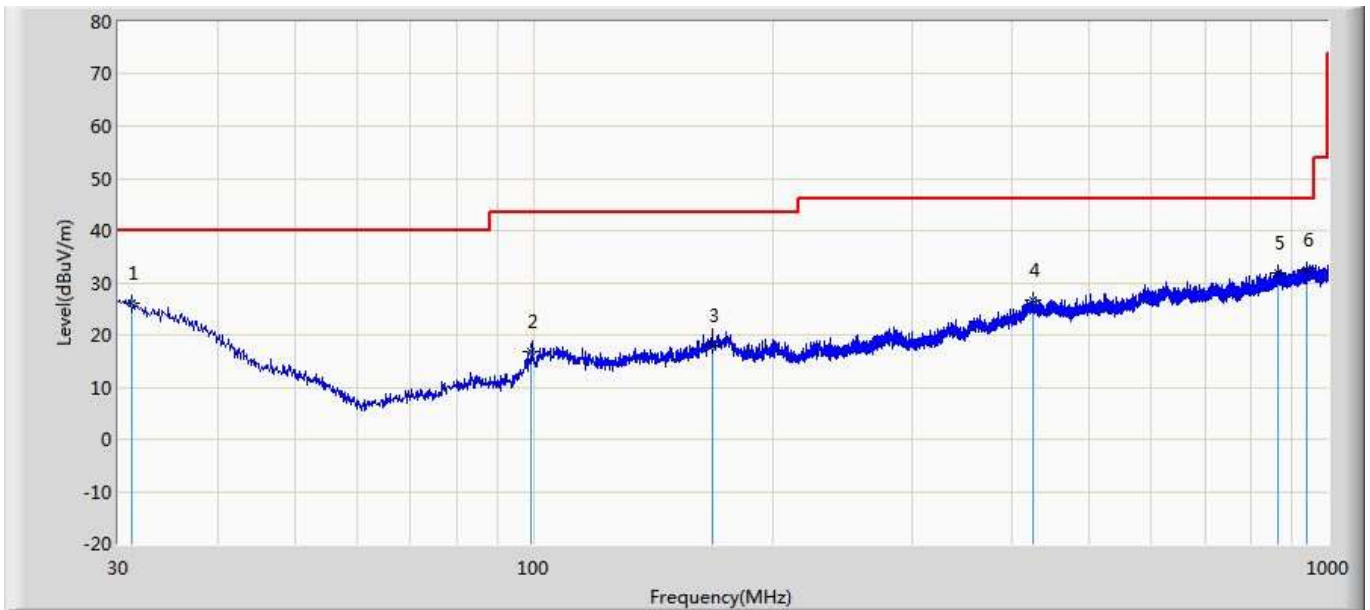


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		31.156	26.188	-1.100	-13.812	40.000	20.827	6.461	0.000	100	206	QP
2		99.415	16.927	0.200	-26.573	43.500	9.881	6.846	0.000	100	34	QP
3		168.154	17.968	0.600	-25.532	43.500	10.211	7.158	0.000	100	310	QP
4		424.915	26.609	-0.813	-19.391	46.000	19.452	7.970	0.000	100	91	QP
5		865.965	31.902	0.040	-14.098	46.000	22.838	9.025	0.000	100	197	QP
6	*	942.142	32.532	0.200	-13.468	46.000	23.148	9.184	0.000	100	31	QP

Note:

- " * ", means this data is the worst emission level.
- Measurement Level = Reading Level + Factor(Probe+Cable-Amp).

Engineer: Lucas	
Site: AC3	Time: 2019/07/29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1	

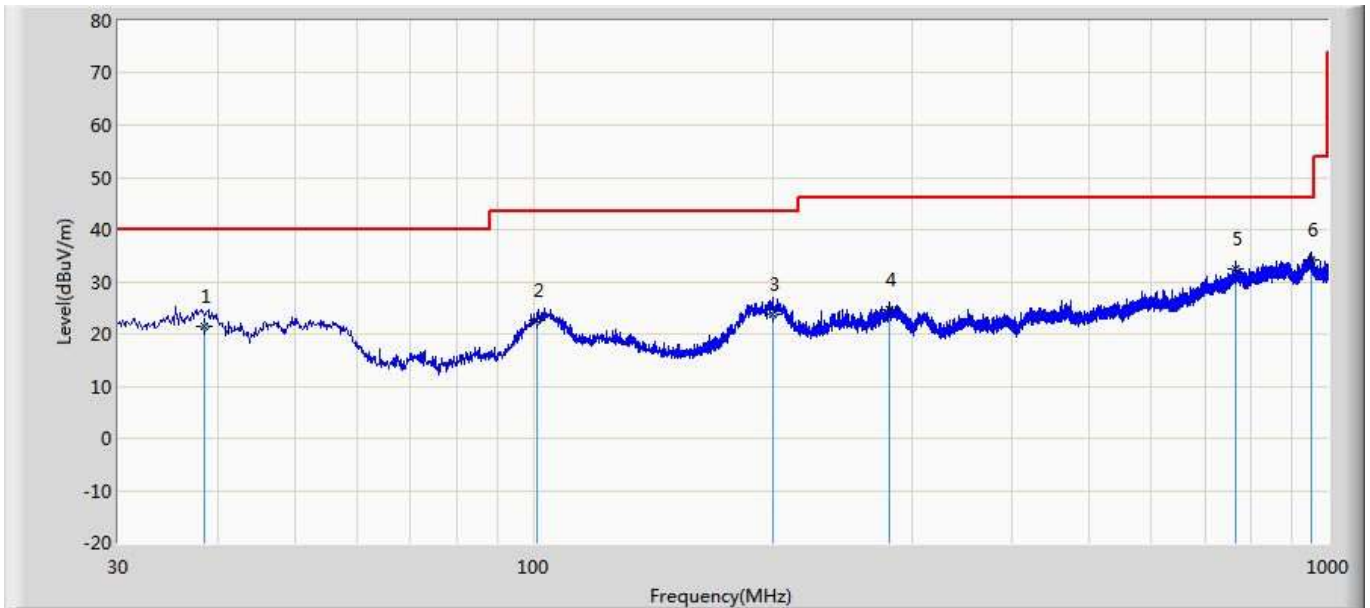

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Probe (dB/m)	Cable (dB)	Amp (dB)	Ant Pos (cm)	Table Pos (deg)	Type
1		38.468	21.492	0.700	-18.508	40.000	14.276	6.516	0.000	100	149	QP
2		101.154	22.613	0.500	-20.887	43.500	15.254	6.859	0.000	100	319	QP
3		200.514	23.625	1.100	-19.875	43.500	15.241	7.284	0.000	100	216	QP
4		280.615	24.696	0.030	-21.304	46.000	17.112	7.554	0.000	100	65	QP
5		764.156	32.323	0.200	-13.677	46.000	23.319	8.804	0.000	100	32	QP
6	*	951.156	34.266	0.100	-11.734	46.000	24.963	9.203	0.000	100	20	QP

Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp).


5. 20dB Bandwidth

5.1 Test Equipment

20dB Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

5.2 Test Setup

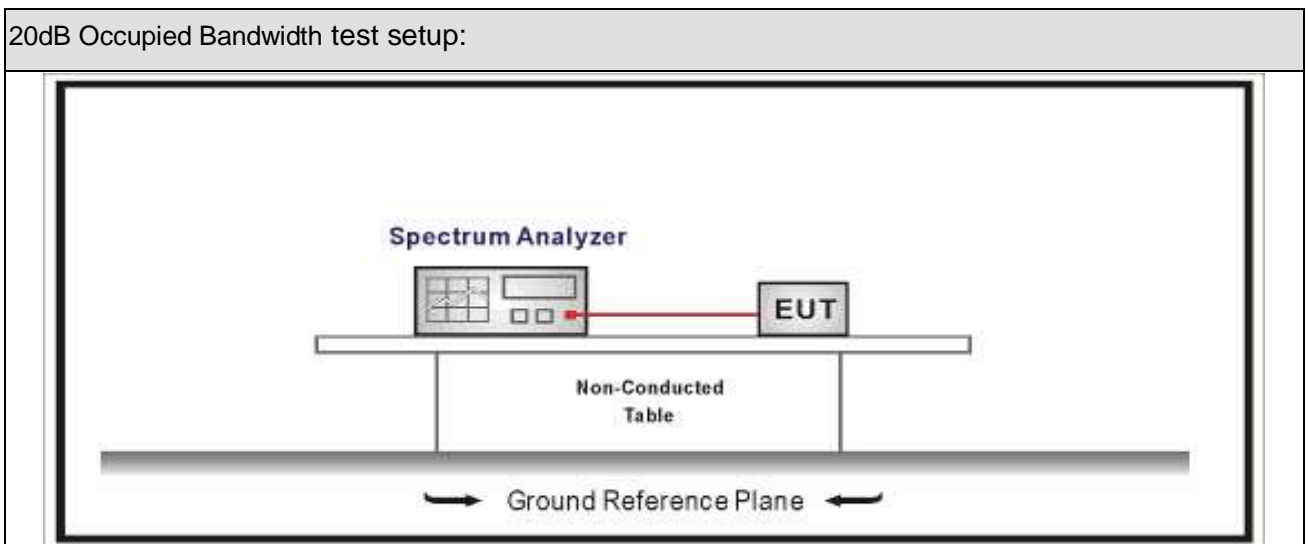

5.3 Limit

Carrier Frequency Separation	
<input checked="" type="checkbox"/>	For frequency hopping systems operating in 2400-2483.5 MHz band, within frequency range.
<input type="checkbox"/>	For frequency hopping systems operating in 902-928 MHz band, the maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
<input type="checkbox"/>	For frequency hopping systems operating in 5725-5850 MHz band, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

5.4 Test Procedure

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	6.9.2	Occupied bandwidth tests

5.5 Uncertainty

The measurement uncertainty is defined as ± 1 kHz

5.6 Test Result

Product Name	: EZ-BT WICED Module	Test Voltage	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2019.08.04	Test Engineer	: Tim

Channel No.	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)
00	2402	932.50	932.31
39	2441	920.70	918.42
78	2480	899.20	914.31

Channel 00 (2402MHz)



Channel 39 (2441MHz)



Channel 78 (2480MHz)




6. Carrier Frequency Separation

6.1. Test Equipment

Carrier Frequency Separation / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

6.2. Test Setup

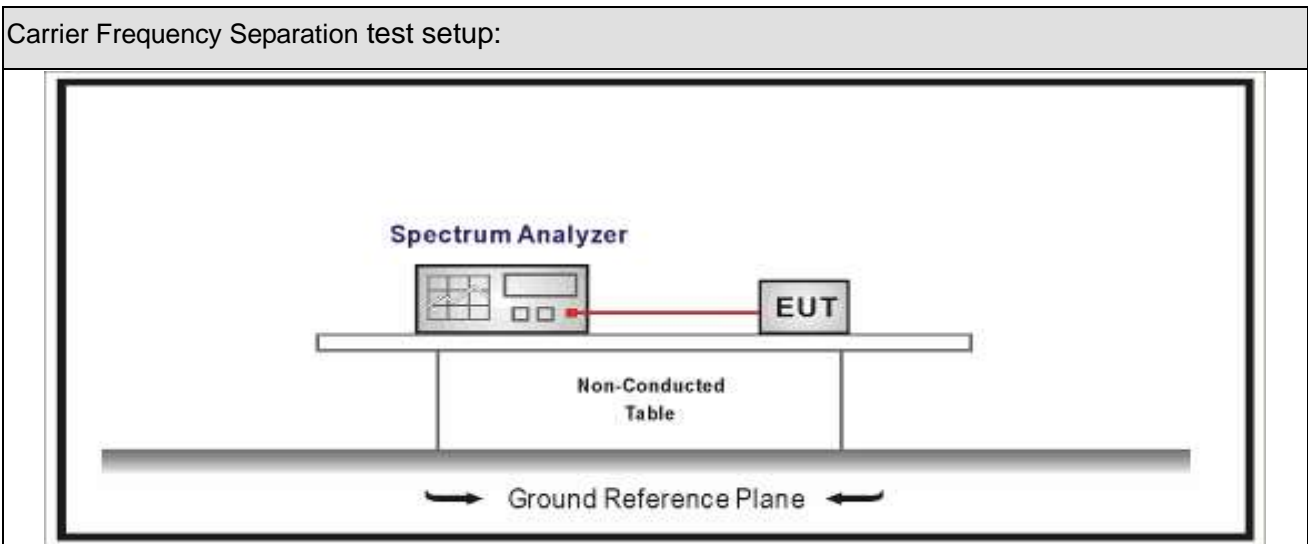

6.3. Limit

Carrier Frequency Separation	
<input type="checkbox"/>	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
<input checked="" type="checkbox"/>	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel.
<input type="checkbox"/>	The 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period;
<input type="checkbox"/>	The 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.
<input type="checkbox"/>	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz.

6.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.2	Carrier frequency separation

6.5. Uncertainty


The measurement uncertainty is defined as ± 1 kHz

6.6. Test Result


Product Name	: EZ-BT WICED Module	Test Voltage	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2019.08.05	Test Engineer	: Simon

Channel No.	Frequency (MHz)	Carrier Frequency Separation (kHz)	Limit (kHz)	Result
00	2402	1000	623.9	Pass
39	2441	1000	625.7	Pass
78	2480	1000	631.7	Pass


Channel 00 (2402MHz)

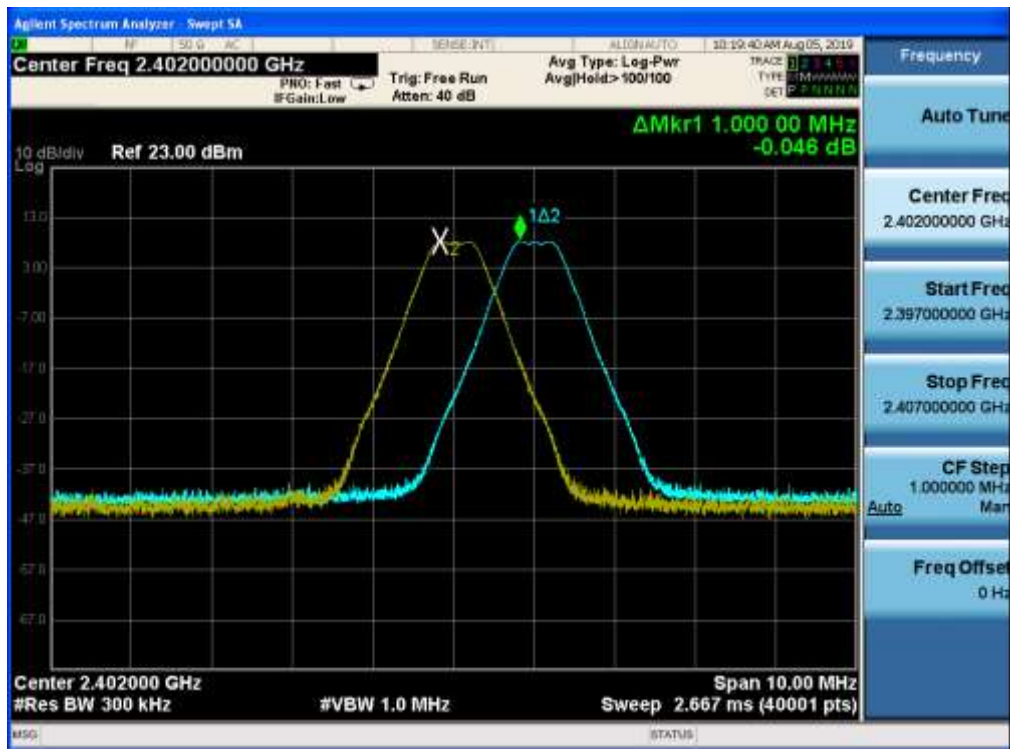

Channel 39 (2441MHz)

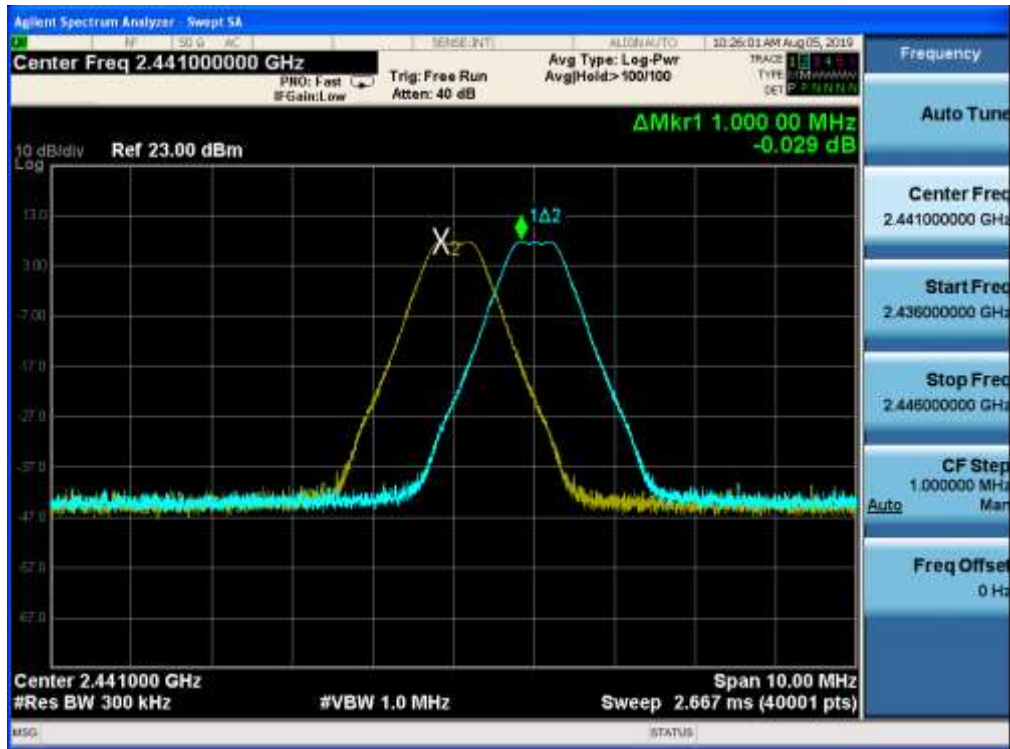

Channel 78 (2480MHz)

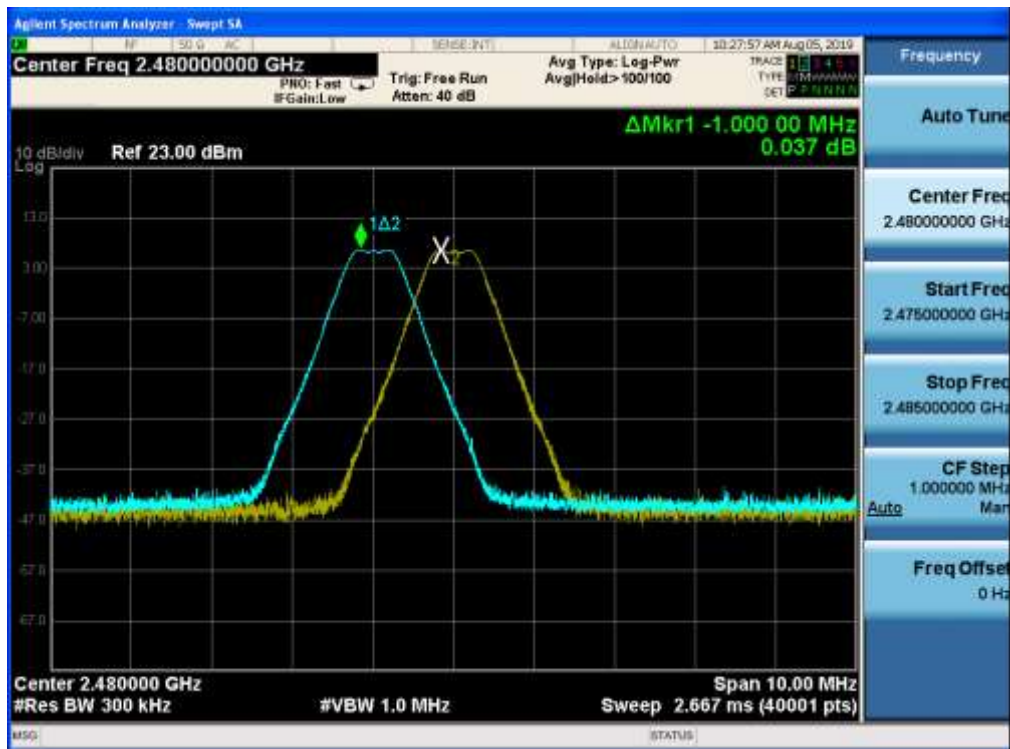


7. Number of Hopping Frequencies

7.1. Test Equipment

Number of Hopping Frequencies / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

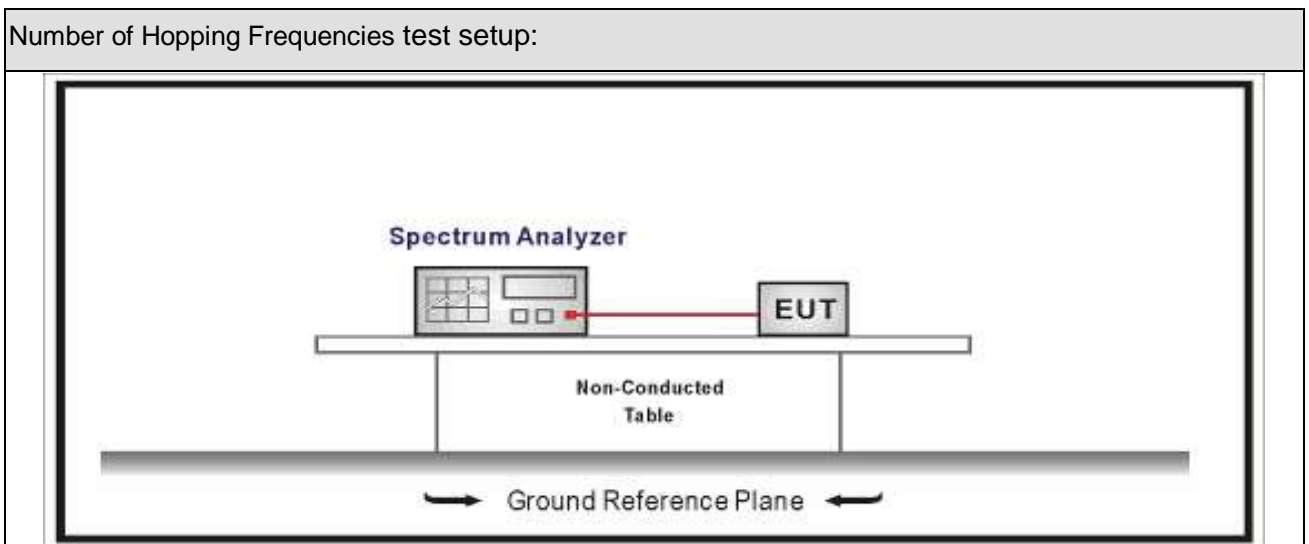

7.3. Limit

Carrier Frequency Separation	
<input checked="" type="checkbox"/>	For frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies.
<input type="checkbox"/>	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is less than 250 kHz, shall use at least 50 hopping frequencies.
<input type="checkbox"/>	For frequency hopping systems operating in 902-928 MHz band, if the 20 dB bandwidth of the hopping channel is higher than 250 kHz, shall use at least 25 hopping frequencies.
<input type="checkbox"/>	For frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies.

7.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.3	Number of Hopping Frequencies

7.5. Uncertainty

The measurement uncertainty is defined as ± 1 kHz

7.6. Test Result

Product Name	: EZ-BT WICED Module	Test Voltage	: AC 120V/60Hz
Test Mode	: Mode 1	Test Site	: TR-8
Test Date	: 2019.08.04	Test Engineer	: Tim

Frequency Band (MHz)	Number of Hopping Frequencies	Limit	Result
2400 - 2483.5	79	>15	Pass

2402 - 2480MHz




8. Time of Occupancy (Dwell Time)

8.1. Test Equipment

Time of Occupancy (Dwell Time) / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

8.2. Test Setup

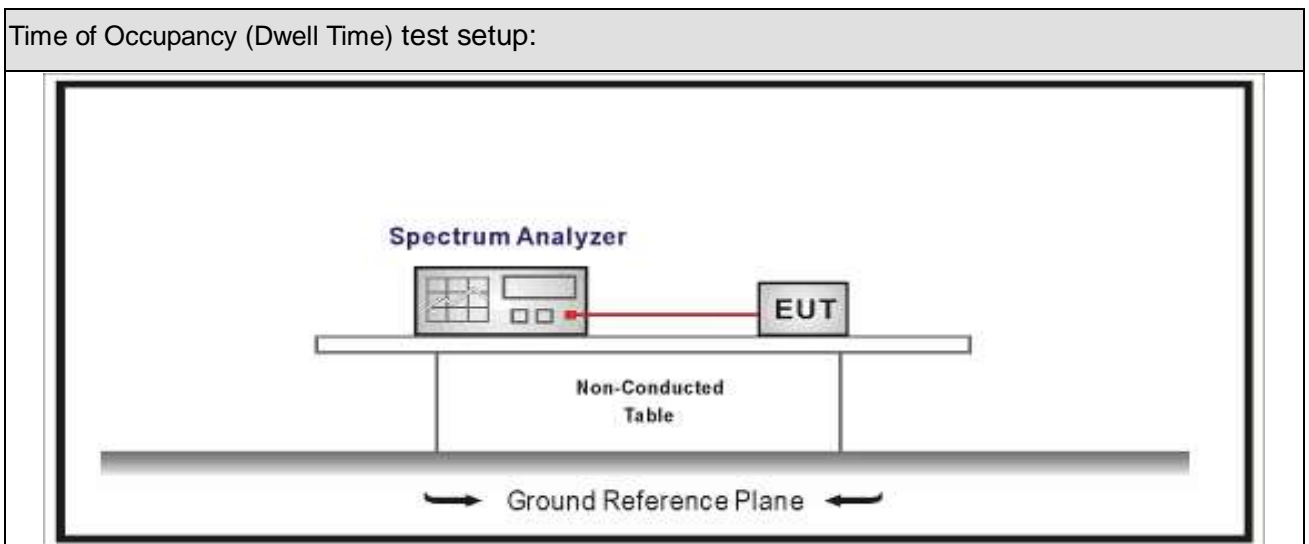

8.3. Limit

Time of Occupancy (Dwell Time)	
<input checked="" type="checkbox"/>	Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
<input type="checkbox"/>	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period
<input type="checkbox"/>	For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping

	frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.
<input type="checkbox"/>	Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

8.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.4	Time of Occupancy (Dwell Time)

8.5. Uncertainty

The measurement uncertainty is defined as $\pm 0.1 \text{ us}$

8.6. Test Result

Product Name	: EZ-BT WICED Module	Test Voltage	: AC 120V/60Hz
Test Mode	: Mode 1(GFSK_DH1)	Test Site	: TR-8
Test Date	: 2019.08.06	Test Engineer	: Tim


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	128.48	< 400	Pass


Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{sec}$

Note2: Time of Occupancy = $0.4015 \times 32 \times 31.6 / 3.16 = 128.48 \text{ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441MHz) - (DH1)

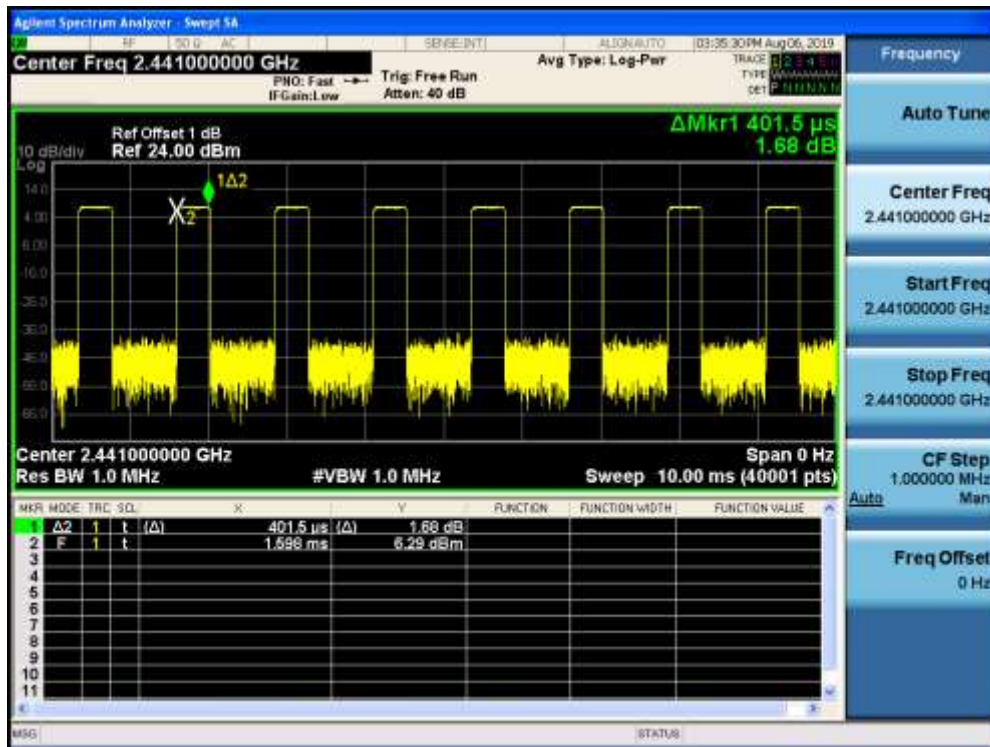

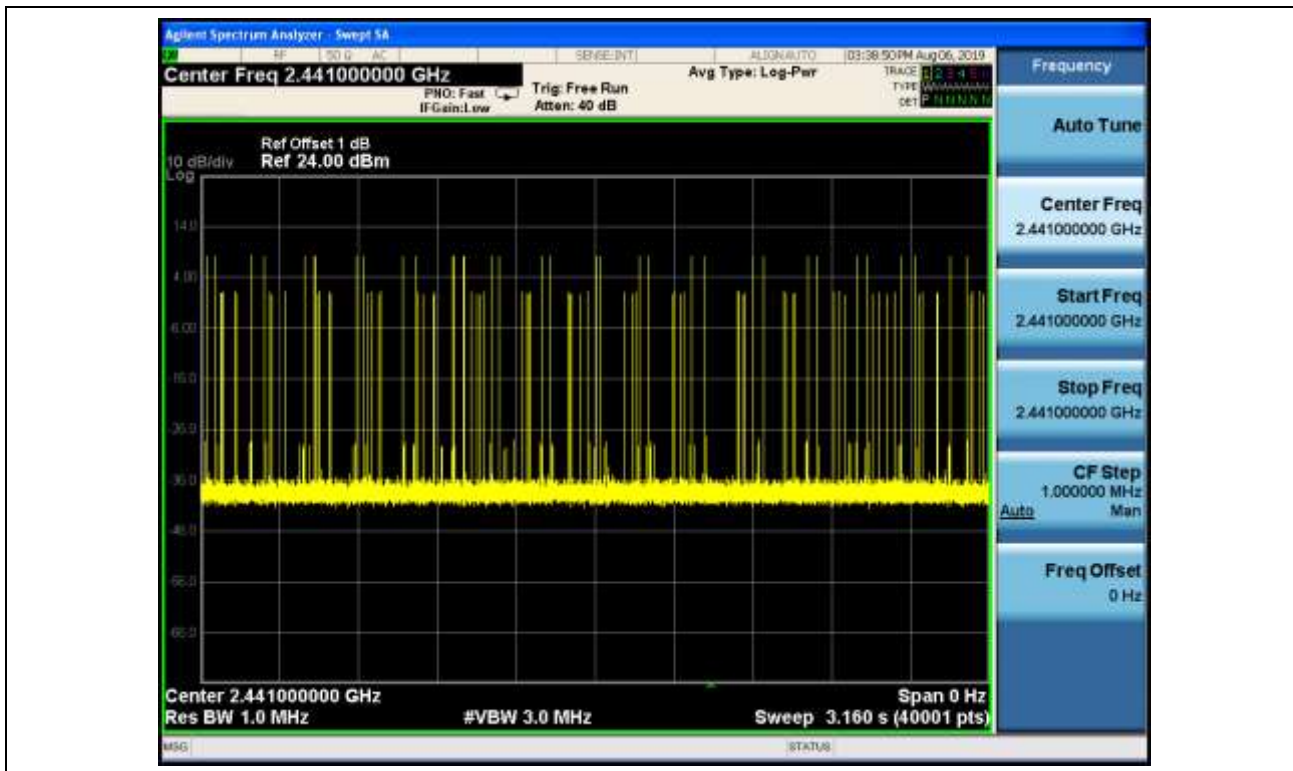

Product Name	: EZ-BT WICED Module	Test Voltage	: AC 120V/60Hz
Test Mode	: Mode 1(GFSK_DH3)	Test Site	: TR-8
Test Date	: 2019.08.06	Test Engineer	: Tim


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	282.2	< 400	Pass


Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $1.660 \times 17 \times 31.6 / 3.16 = 282.2 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441 MHz) - (DH3)

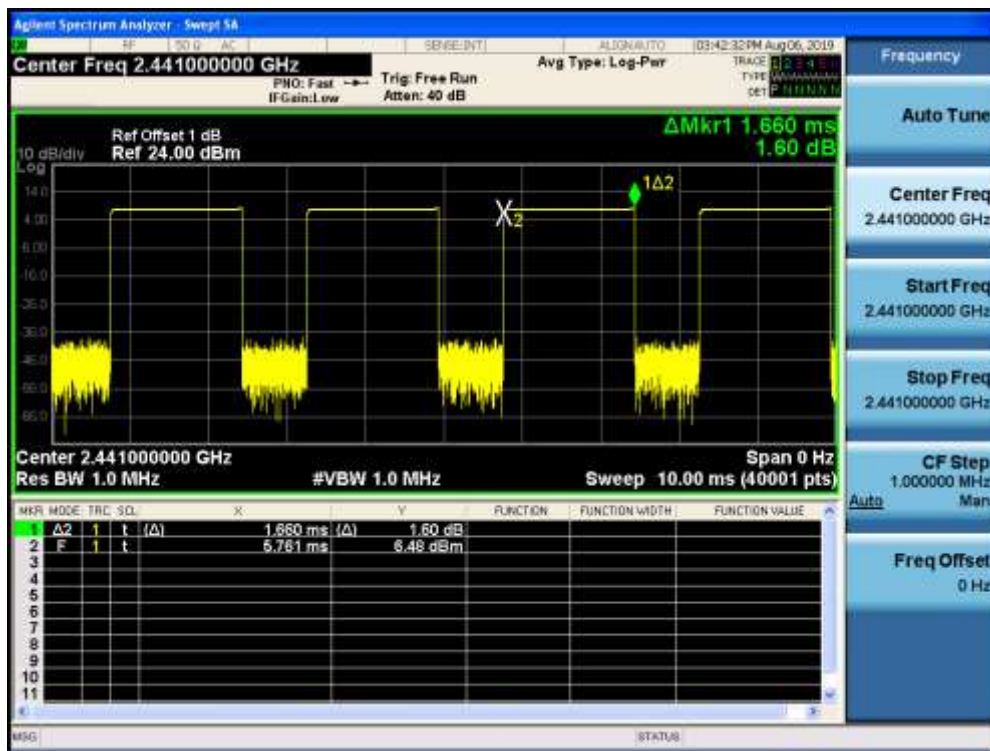

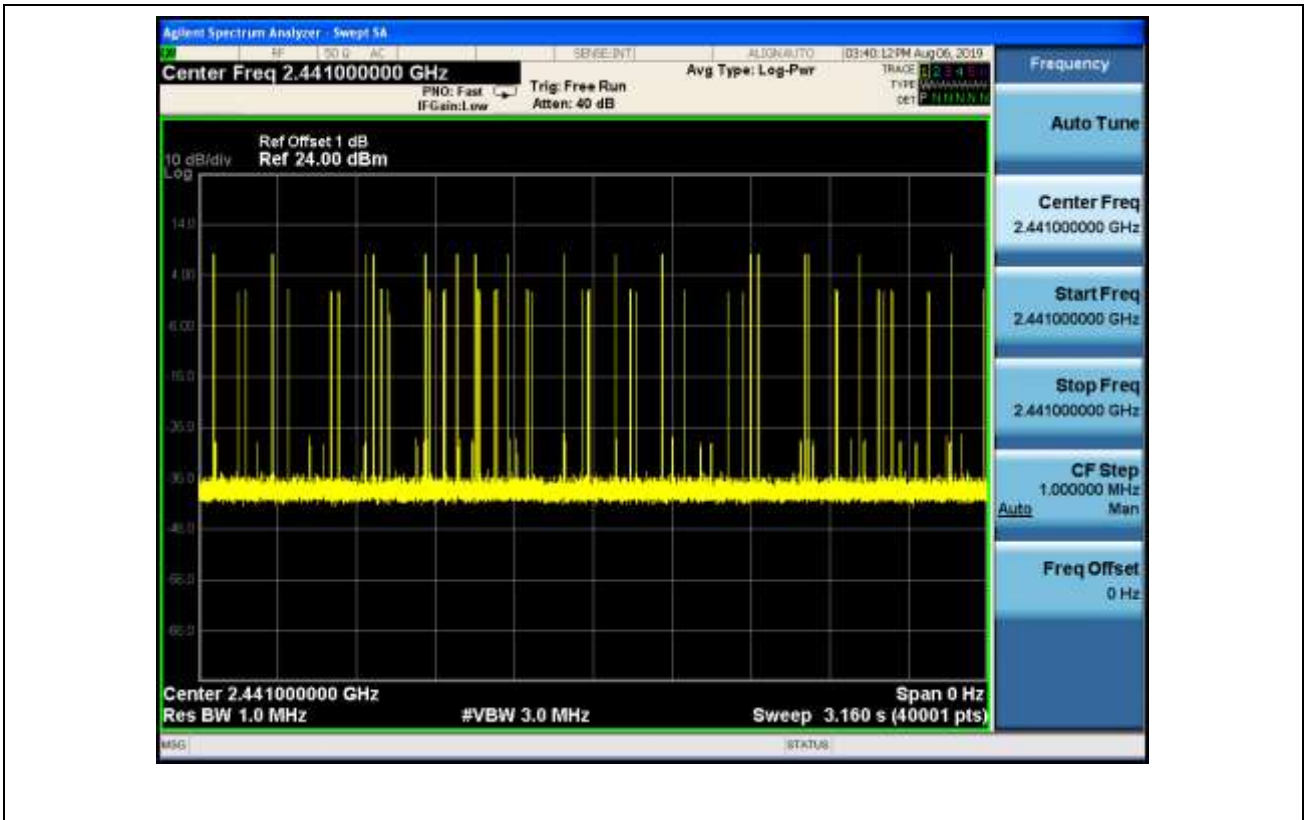

Product Name	: EZ-BT WICED Module	Test Voltage	: AC 120V/60Hz
Test Mode	: Mode 1(GFSK_DH5)	Test Site	: TR-8
Test Date	: 2019.08.04	Test Engineer	: Tim


Channel No.	Frequency (MHz)	Time of Occupancy (ms)	Limit (ms)	Result
39	2441	262.98	< 400	Pass


Note1: Test Time Period: $0.4 \times 79 = 31.6 \text{ sec}$

Note2: Time of Occupancy = $2.922 \times 9 \times 31.6 / 3.16 = 262.98 \text{ ms}$

Note3: We have evaluated different packet type, shown in the report is the worst data.

Channel 39 (2441 MHz) - (DH5)

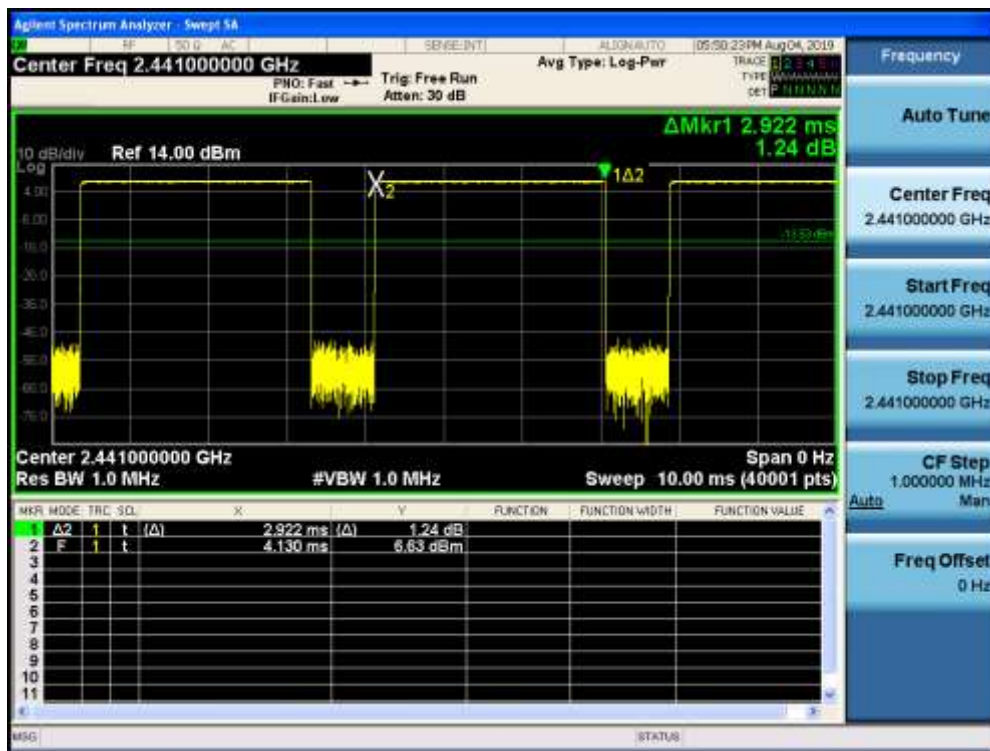

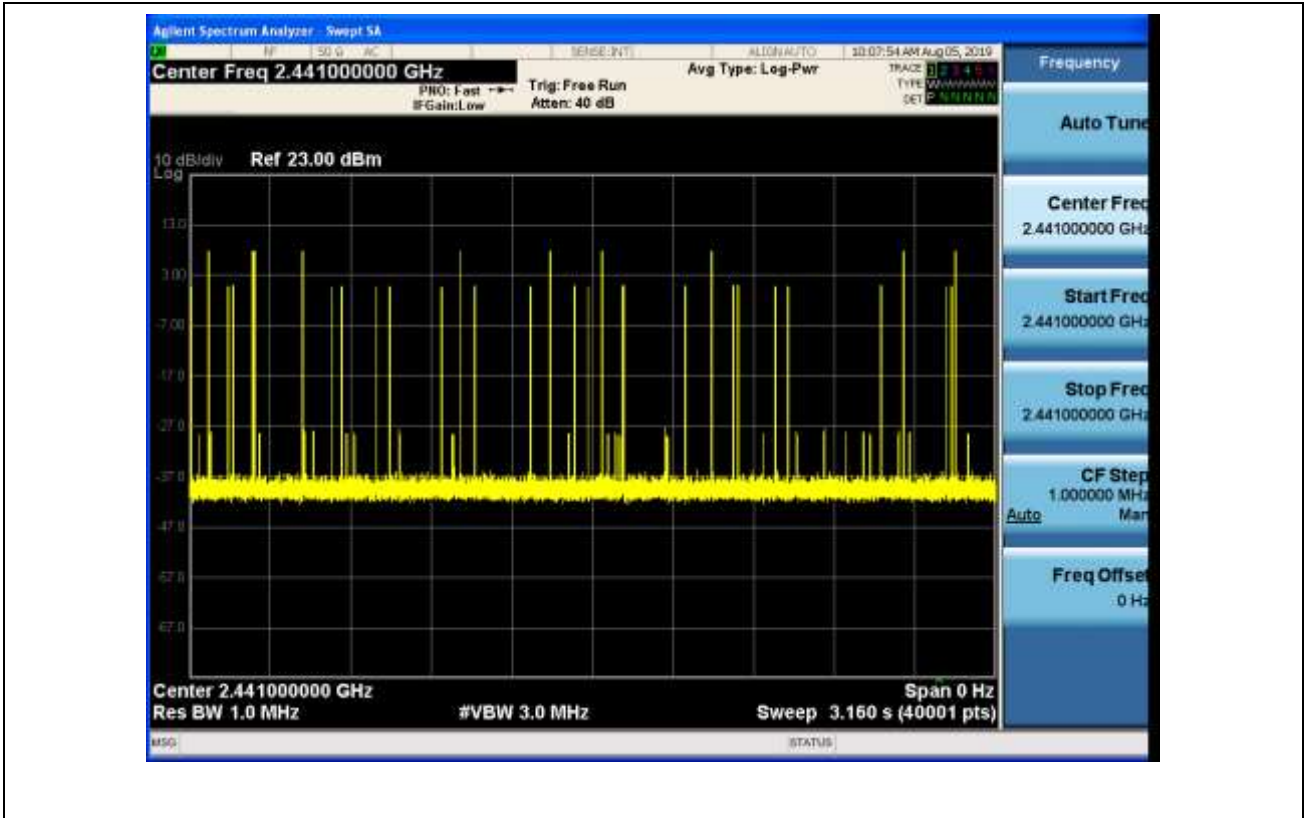

Note: The packet time of AFH mode is same as normal mode, due to the packet time of AFH mode multiply with lesser factor is dwell time of $0.4 \times 20 = 8S$, the dwell time of AFH mode comply with the limit.


9. Peak Output Power

9.1. Test Equipment

Peak Output Power / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2018.10.14	2019.10.13
Power Sensor	Anritsu	MA2411B	0846014	2018.10.14	2019.10.13
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

9.2. Test Setup

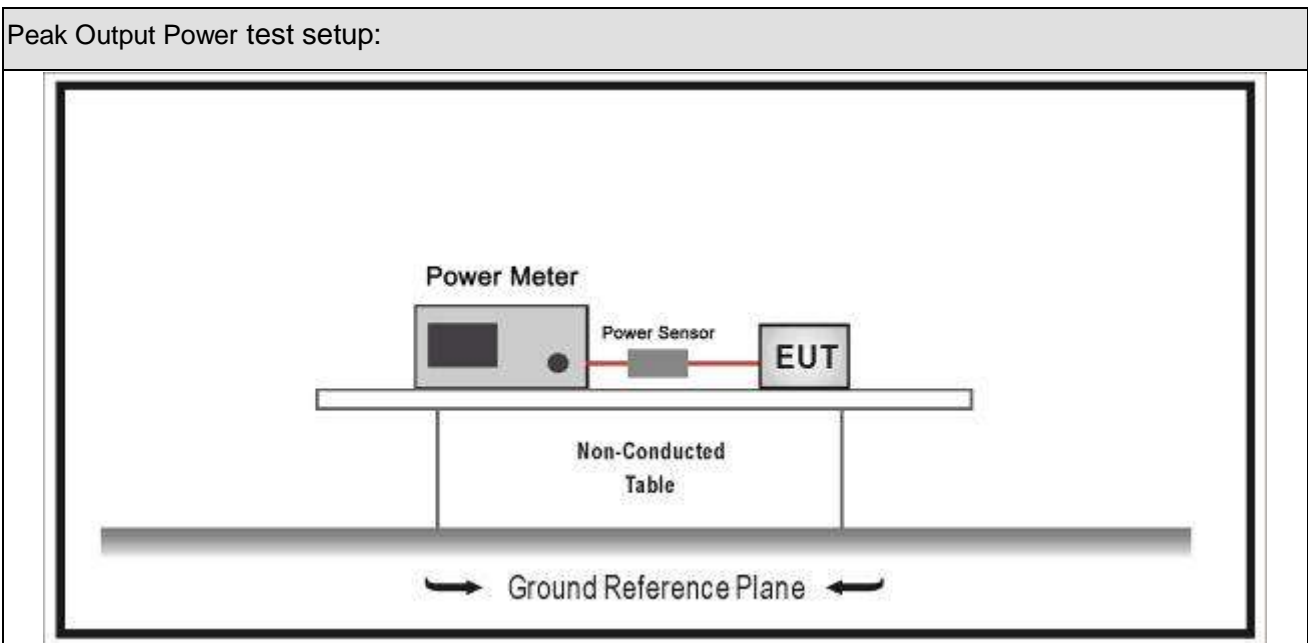

9.3. Limit

Peak Output Power	
<input checked="" type="checkbox"/>	Frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.
<input type="checkbox"/>	Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
<input type="checkbox"/>	For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels

9.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.5	Output power test procedure for frequency-hopping spread-spectrum (FHSS) devices

9.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

9.6. Test Result

Product Name	:	EZ-BT WICED Module	Test Voltage	:	AC 120V/60Hz
Test Mode	:	Mode 1	Test Site	:	TR-8
Test Date	:	2019.08.05	Test Engineer	:	Tim

Channel No.	Frequency (MHz)	Measurement Power Output (dBm)	Limit (dBm)	Result
00	2402	8.77	30.00	Pass
39	2441	8.20	30.00	Pass
78	2480	7.67	30.00	Pass


10. Emissions in non-restricted frequency bands

10.1. Test Equipment

Emissions in non-restricted frequency bands / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2019.02.04	2020.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2019.04.09	2020.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2019.04.09	2020.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2019.04.10	2020.04.09

Note: All equipment is calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

10.2. Test Setup

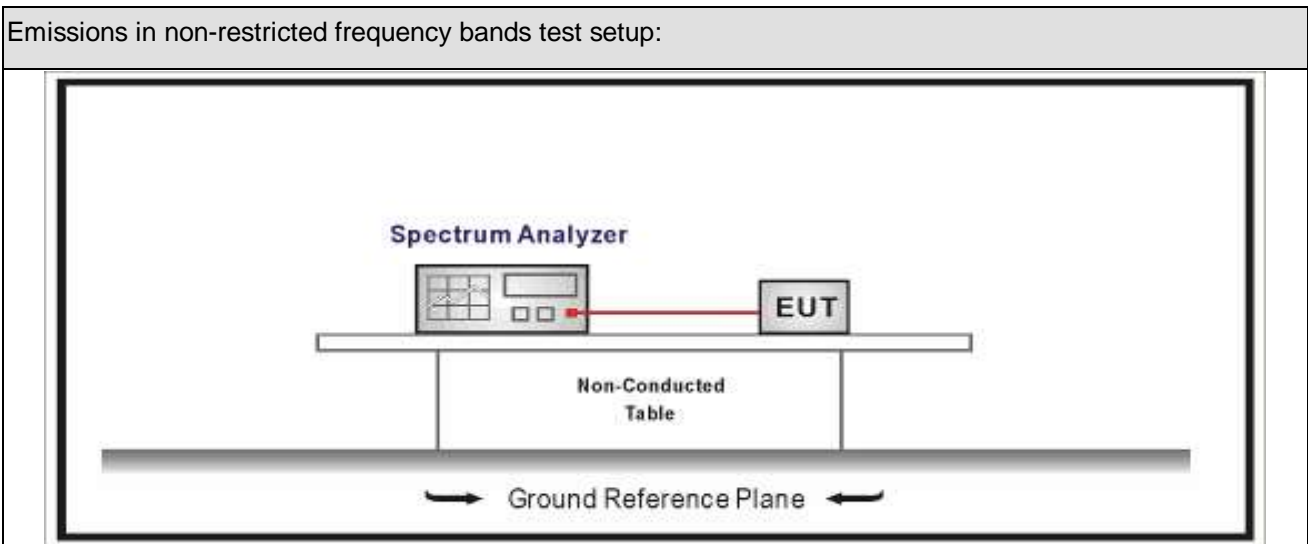

10.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
<p>Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p>Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).</p>	

10.4. Test Procedure

Test Method			
	References Rule	Chapter	Description
<input checked="" type="checkbox"/>	ANSI C63.10	7.8.6	Band-edge Compliance of RF Conducted Emissions

10.5. Uncertainty

The measurement uncertainty is defined as ± 1.0 dB

10.6. Test Result


Product Name	: EZ-BT WICED Module	Test Voltage	: AC 120V/60Hz
Test Mode	: Mode 1~2	Test Site	: TR-8
Test Date	: 2019.08.09	Test Engineer	: Tim

Mode	Channel	Test Frequency (MHz)	In-Band PSD[a] (dBm/100kHz)	Frequency (MHz)	Out-Band PSD[b] (dBm/100kHz)	[a]-[b] (dB)	Limit (dB)	Result
1	00	2402	8.794	2400.00	-41.916	50.686	>20	Pass
1	78	2480	7.666	2500.00	-44.537	52.737	>20	Pass
4	00~78	00~78	7.320	2400.00	-56.266	63.936	>20	Pass

Note1: The worst case of Emissions in non-restricted frequency bands as below:

2: Mode 1-3, The In-Band PSD is the highest PSD of All channels.

Mode1 CH00(2402MHz)

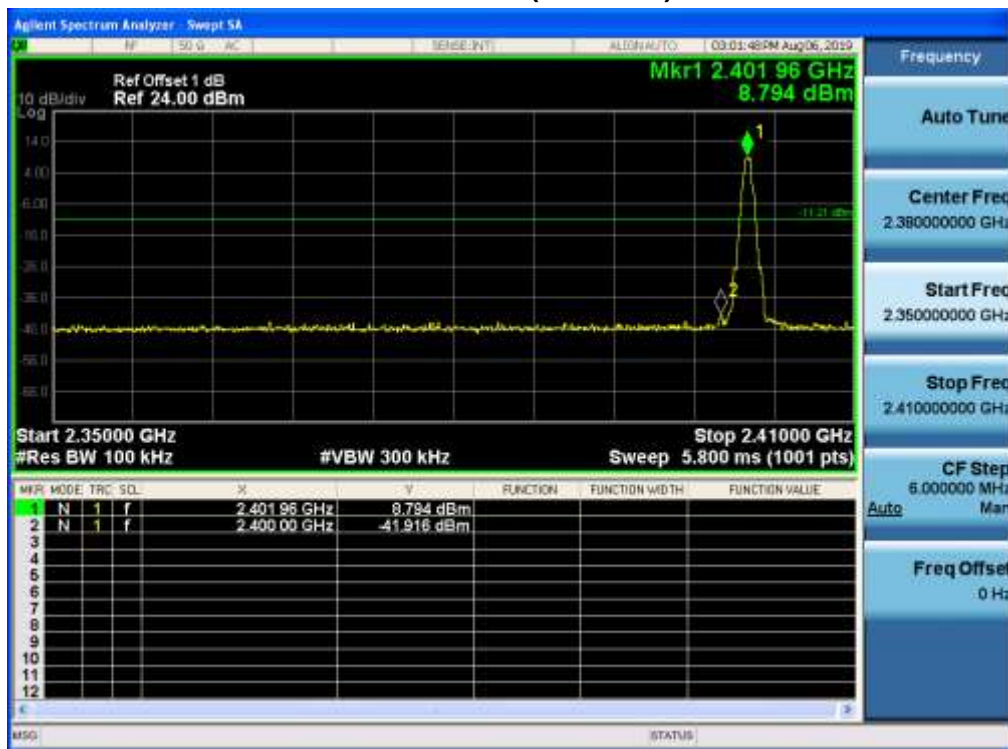


11. Radiated Emission Band Edge

11.1. Test Equipment

Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Receiver	Agilent	N9038A	MY51210196	2019.07.16	2020.07.15
Pre-Amplifier	Miteq	NSP1800-25	1364185	2019.05.03	2020.05.02
DRG Horn Antenna	ETS-Lindgren	3117	00167055	2019.07.12	2020.07.11
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2018.09.18	2019.09.17
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2019.02.28	2020.02.27
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2019.02.28	2020.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2019.01.05	2020.01.04

11.2. Test Setup

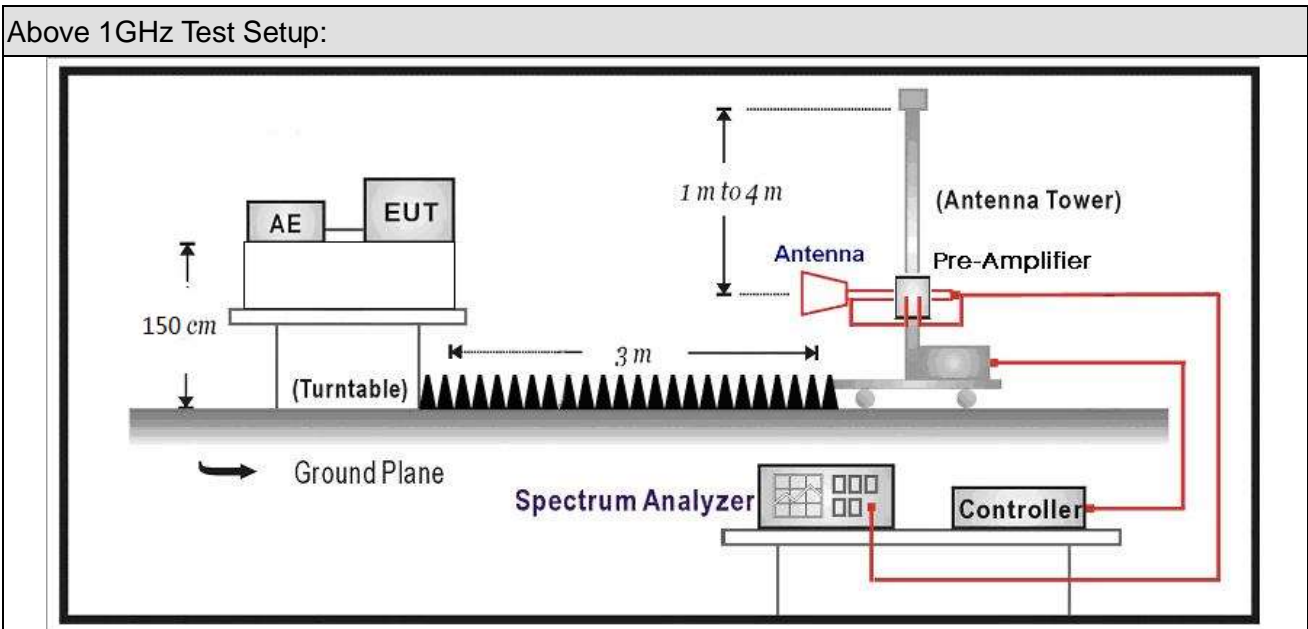

11.3. Limit

Band edge Limit				
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

11.4. Test Procedure


Test Method			
	References Rule	Chapter	Description
<input type="checkbox"/>	DA 00-705	N/A	duty cycle correction factor
<input checked="" type="checkbox"/>	ANSI C63.10	6.10	Band-edge testing
	<input checked="" type="checkbox"/> ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	<input type="checkbox"/> ANSI C63.10	6.10.6	Marker-delta method
<input type="checkbox"/>	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
<input type="checkbox"/>	ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
<input checked="" type="checkbox"/>	ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz

11.5. Uncertainty

The measurement uncertainty above 1G is defined as ± 3.9 dB
 below 1G is defined as ± 3.8 dB


11.6. Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	Reduced VBW (Hz)	Tx On + Tx Off (ms)	Duty Cycle
DH5	2.931	0.831	360	3.762	77.91%

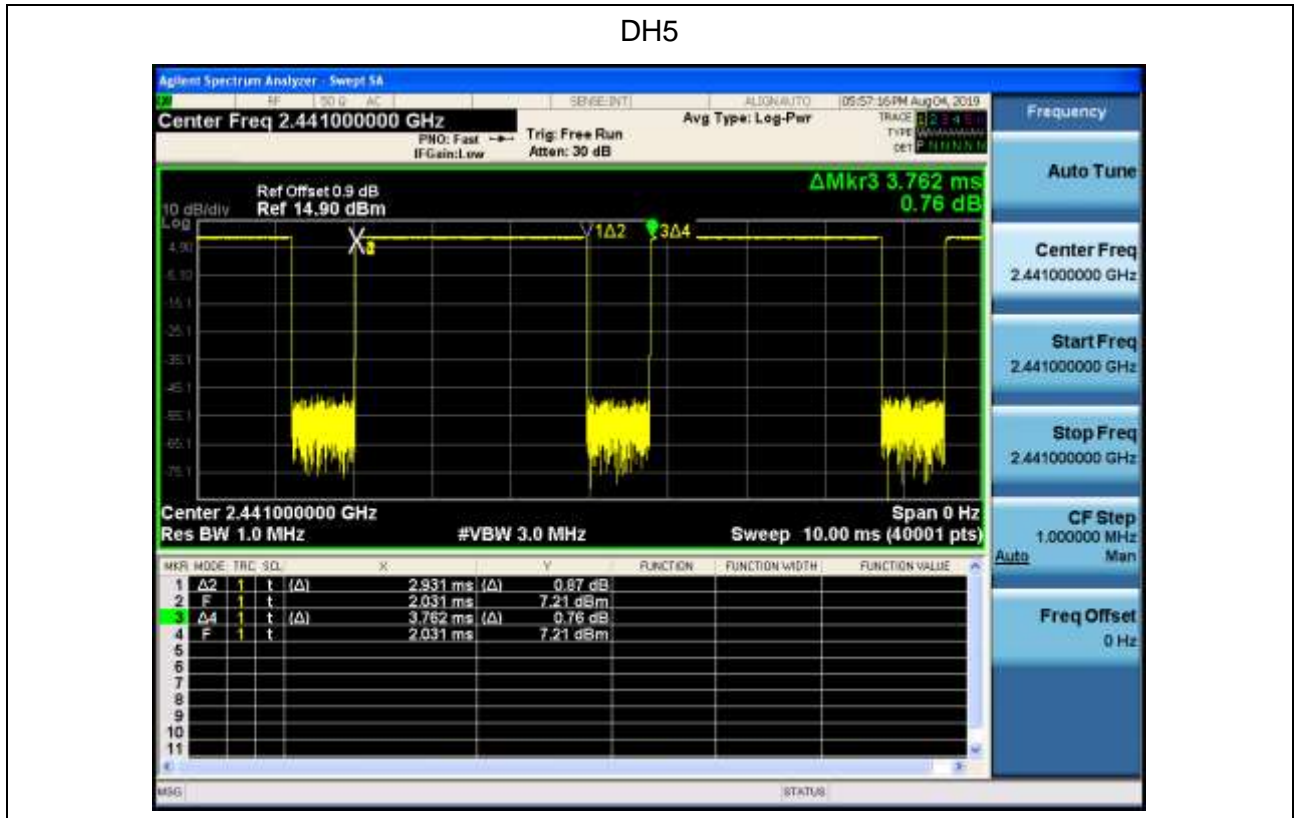


11.7. Test Result

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:20
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

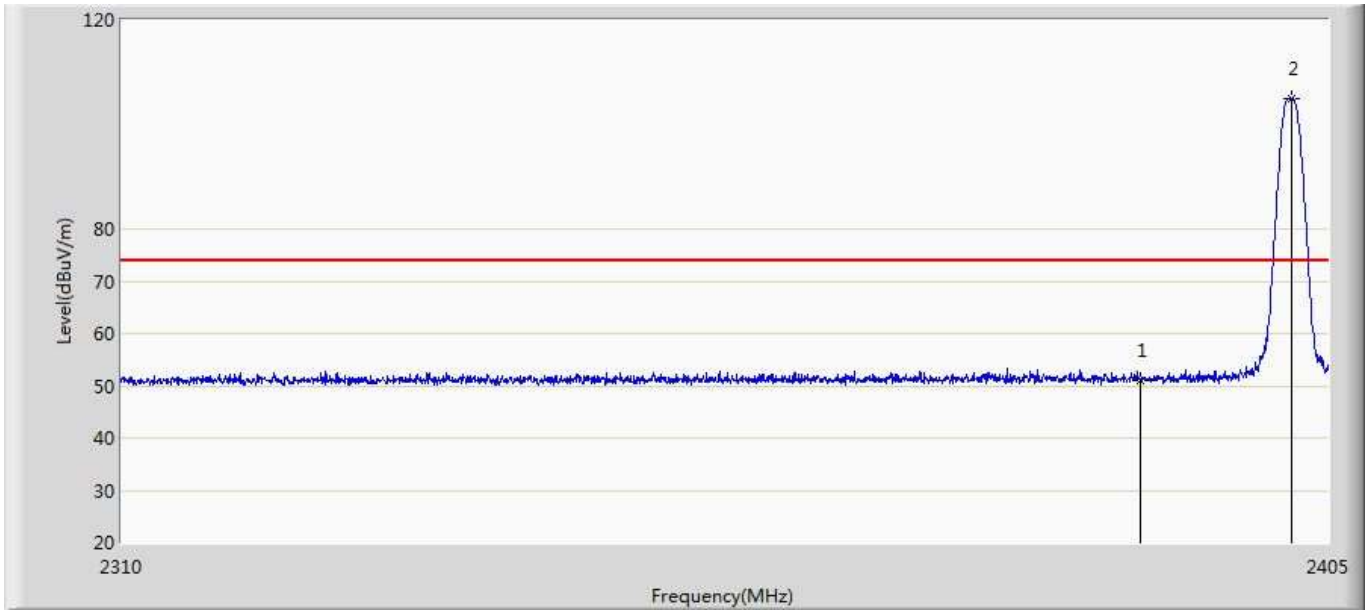


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.158	15.476	-22.842	74.000	35.682	PK
2	*	2402.055	104.855	69.142	30.855	74.000	35.712	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:23
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

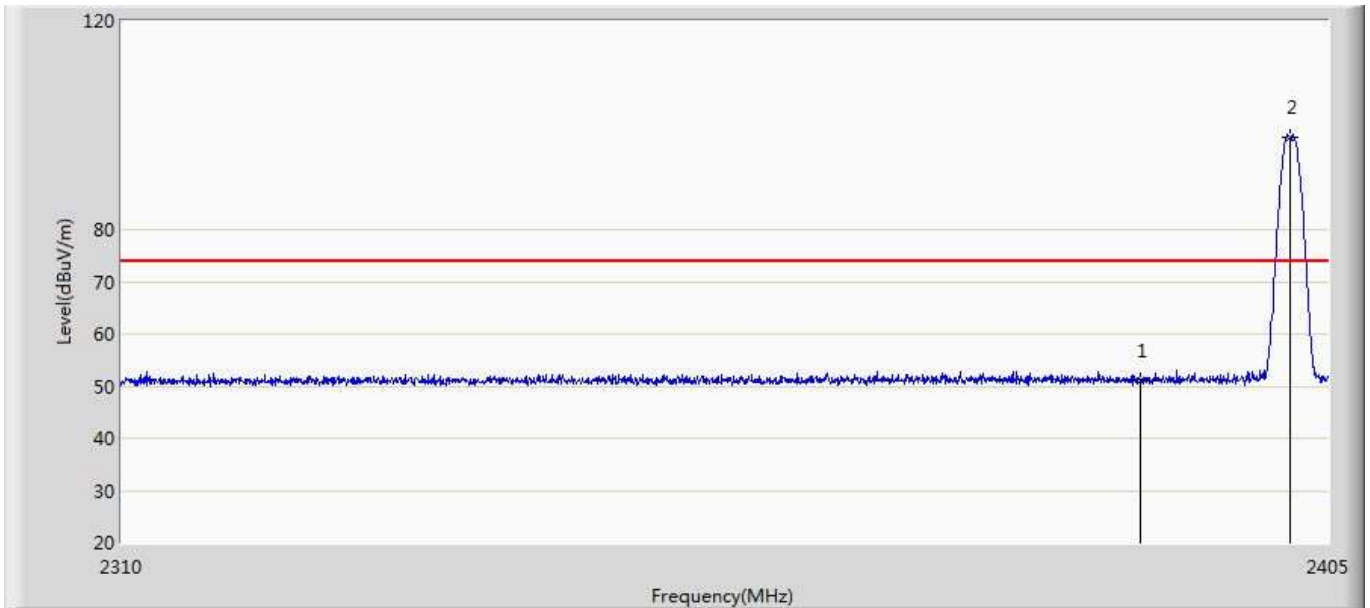


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	51.149	15.467	-22.851	74.000	35.682	PK
2	*	2401.913	97.811	62.099	23.811	74.000	35.712	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

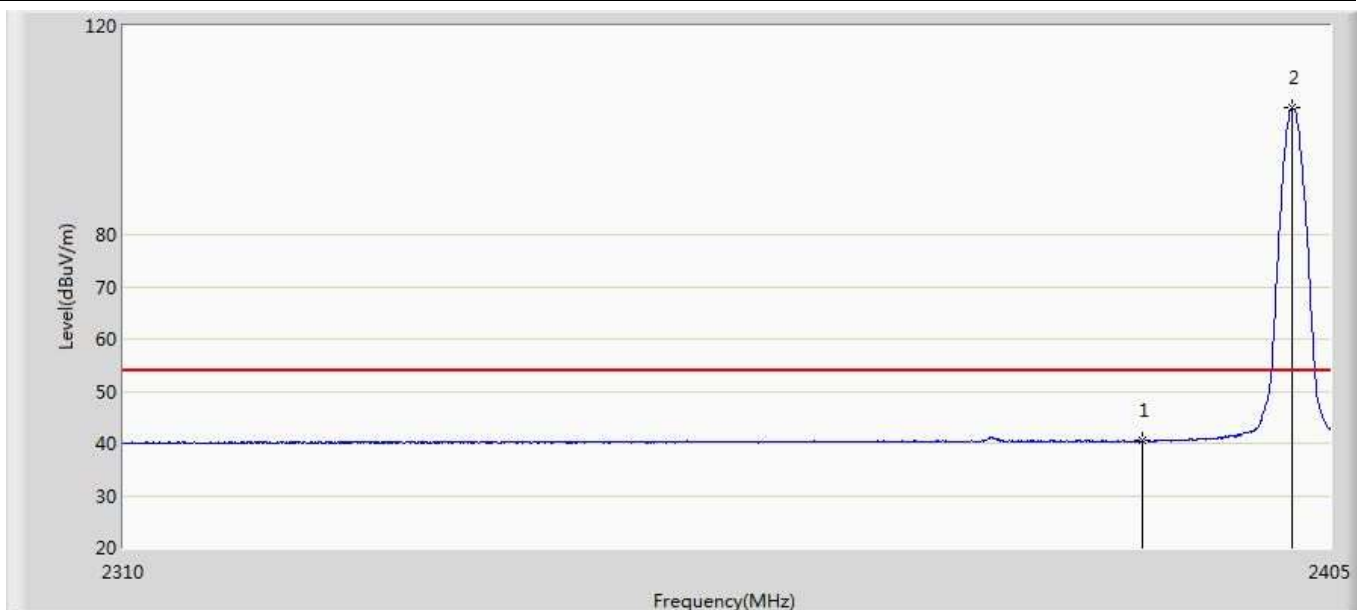


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	40.440	4.758	-13.560	54.000	35.682	AV
2	*	2401.960	104.406	68.693	50.406	54.000	35.712	AV

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:28
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2402MHz by DH5	

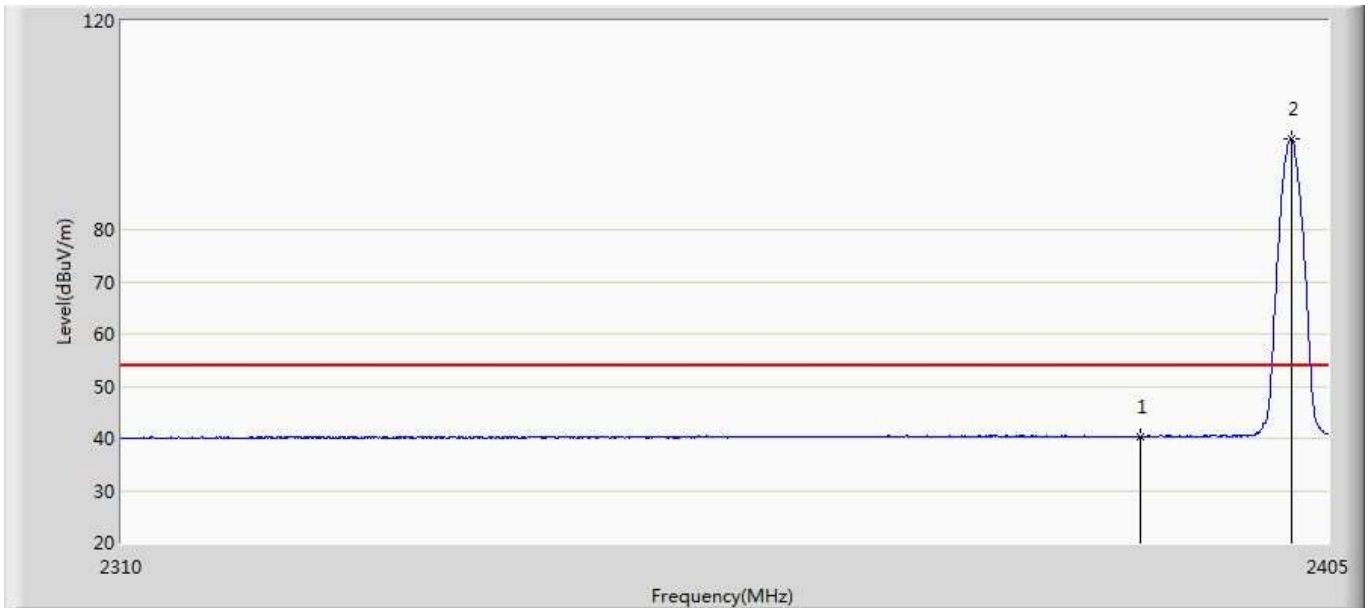


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2390.000	40.367	4.685	-13.633	54.000	35.682	AV
2	*	2402.055	97.377	61.664	43.377	54.000	35.712	AV

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:30
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

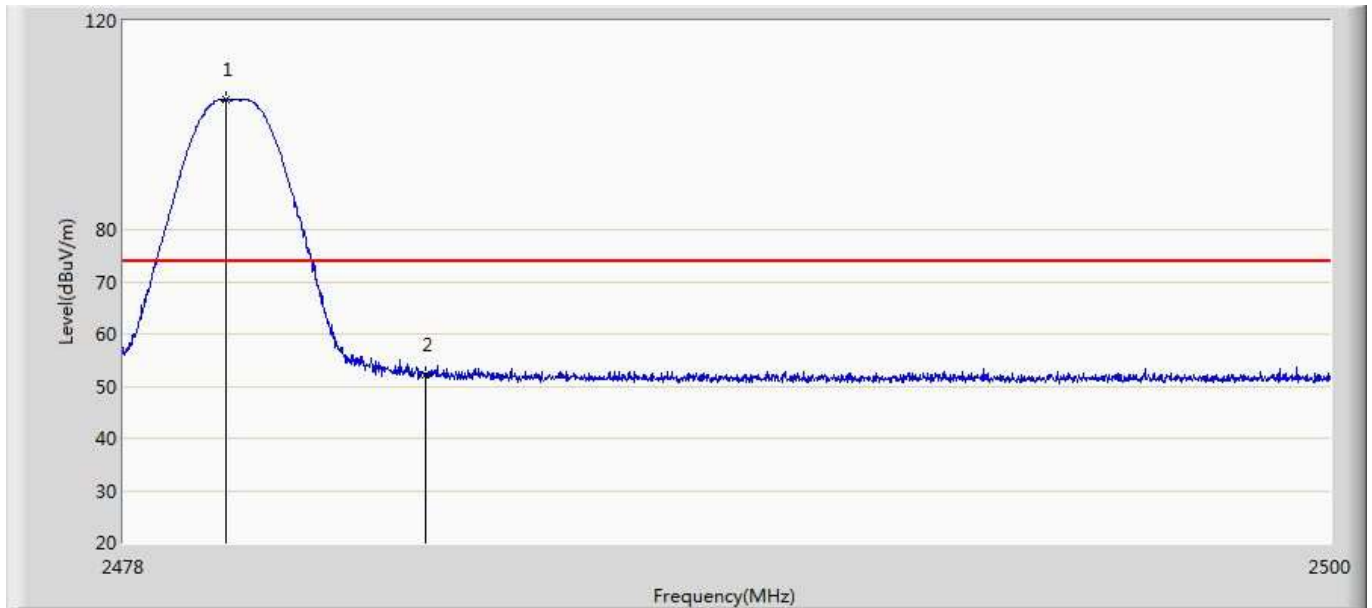


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2479.870	104.968	69.103	30.968	74.000	35.865	PK
2		2483.500	52.131	16.239	-21.869	74.000	35.891	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:33
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

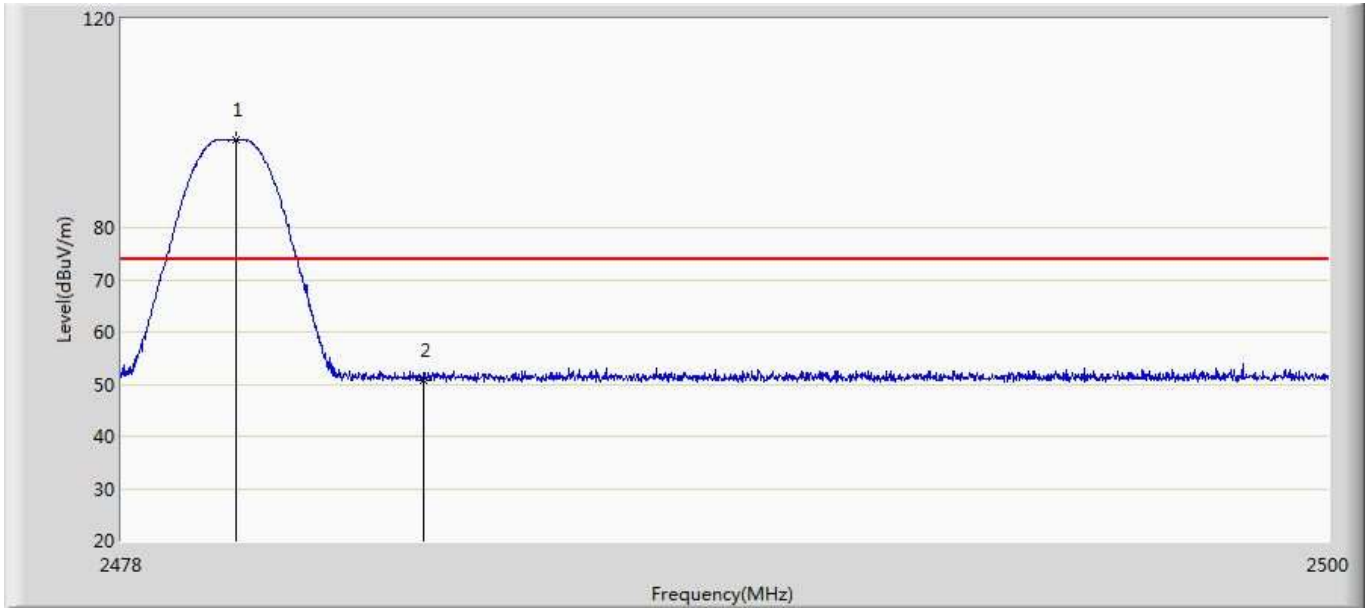


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.079	96.885	61.018	22.885	74.000	35.867	PK
2		2483.500	50.612	14.720	-23.388	74.000	35.891	PK

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:34
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

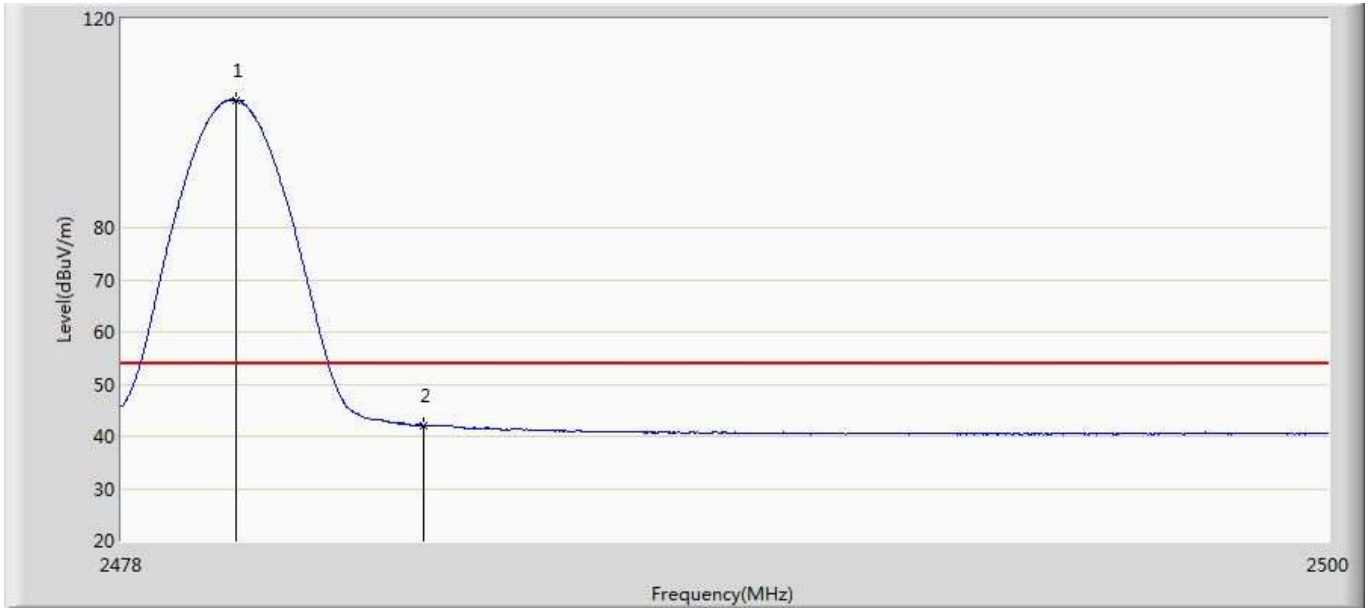

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.079	104.430	68.563	50.430	54.000	35.867	AV
2		2483.500	42.037	6.145	-11.963	54.000	35.891	AV

Engineer: Tongben	
Site: AC5	Time: 2019/08/07 - 19:37
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: EZ-BT WICED Module	Power: AC 120V/60Hz
Note: Mode 1:Transmit at 2480MHz by DH5	

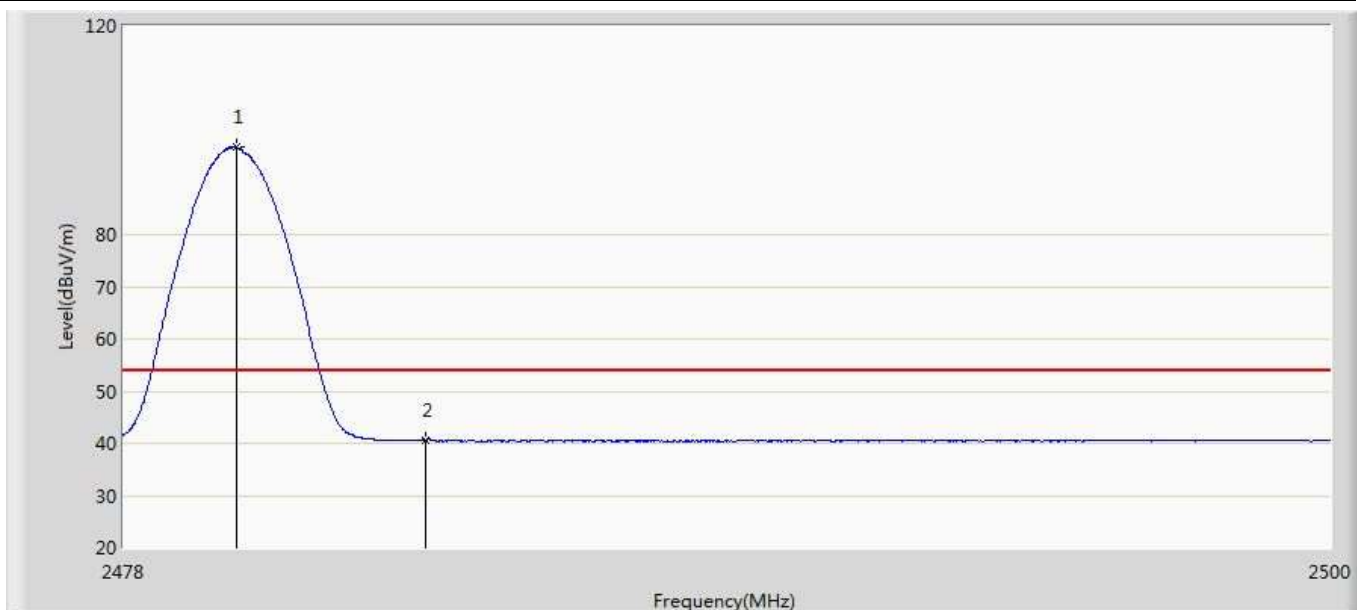

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2480.046	96.720	60.853	42.720	54.000	35.866	AV
2		2483.500	40.697	4.805	-13.303	54.000	35.891	AV

12. Antenna Requirement

12.1. Limit

Antenna Requirement Limit
<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p>

12.2. Antenna Connector Construction

Antenna Connector Construction	
<input checked="" type="checkbox"/>	The use of a permanently attached antenna
<input type="checkbox"/>	The antenna use of a unique coupling to the intentional radiator
<input type="checkbox"/>	The use of a nonstandard antenna jack or electrical connector
Please refer to the attached document "Internal Photograph" to show the antenna connector.	

_____ The End _____