

## Difference Description

Modules CYBLE-224110-00 AND CYBLE-224116-01 have the same PCB, periphery parts and the encapsulation of the main chip. The difference of the main chip is Bluetooth version it supports.

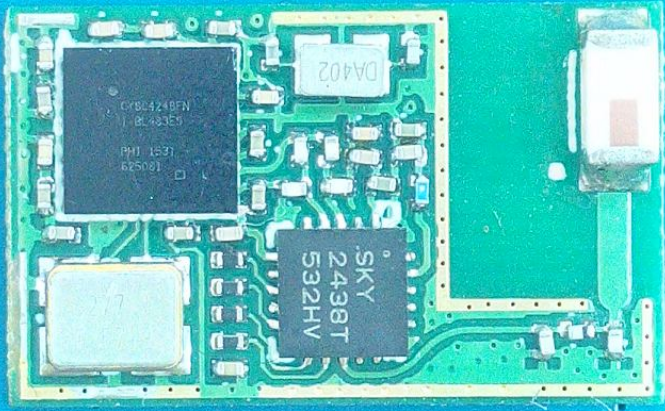
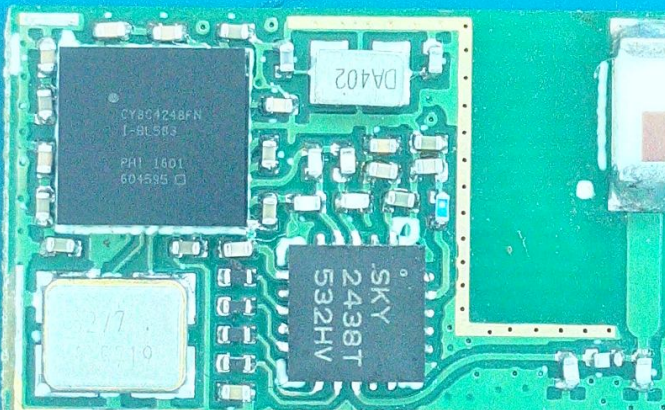
<b>Module</b>	<b>IC Part Number</b>	<b>CPU Speed (MHz)</b>	<b>Flash Size (KB)</b>	<b>Package</b>	<b>Bluetooth version</b>
CYBLE-224110-00	CY8C4248FNI-BL483	48	256	76-WLC-SP	4.1
CYBLE-224116-01	CY8C4248FNI-BL583	48	256	76-WLC-SP	4.2

The RF character of these two modules is the same.

Operation Frequency	2402 MHz – 2480 MHz
No. of Channel	40
Channel Spacing	2 MHz
Modulation	GFSK
Transmit power (ERP)	9.5 dBm (8.9mW)
Data Rate	1 Mbps
Antenna Type	Chip Antenna
No. of Antenna	One
Antenna Gain	0.5 dBi
Supply Voltage	2.0V to 3.6V (test under 2.1V)
Dimension	9.5mm*15.4mm
Working Environment	-40 °C to +105 °C

Below is detailed difference between BLE4.2 and BLE4.1 chip:

- 1) 4.2 has improved security compared to 4.1 – this is ECDH on top of AES-128 in 4.2, whereas 4.1 is AES-128 only. This allows for transfer without having to exchange keys over the air. ECDH essentially embeds the key changes into the data transfer.
- 2) 4.2 has improved privacy compared to 4.1 – MAC address changes after a period of time for the BLE device. This is the same in 4.1 and 4.2, however in 4.2 the MAC address changing is happening in the link layer (where it was done in the GATT layer in 4.1). This change makes it so that you can use the feature without waking the entire system/stack.
- 3) Increase the maximum packet length from 37 bytes to 255 bytes.

	CYBLE-224110-00
	CYBLE-224116-01

*Yedan LI*

Yedan LI / System engineer  
Cypress Semiconductor