



# TEST REPORT

*For*

**Applicant :** Wonders Technology Co.,Ltd

DOSS Industrial Zone, Qiping Kengdu Industrial

**Address :** Area Guihua Village, Guanlan Town Baoan District,  
ShenZhen, China

**Product Name :** Clip-It Wireless Speaker

**Model Name :** HX-P150, DS-1593

**Brand Name :** HMDX

**FCC ID :** WC2-HXP150

**Report No. :** MTE/SAL/A15020234

**Date of Issue :** Feb. 14, 2015

**Issued by :** Most Technology Service Co., Ltd.

**Address :** No.5, 2nd Langshan Road, North District, Hi-tech Industrial  
Park, Nanshan, Shenzhen, Guangdong, China

**Tel :** 86-755-8602 6850

**Fax :** 86-755-2698 0464

*The report consists 53 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.*

## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1 Product Information.....	5
2.2 Objective .....	5
2.3 Test Standards and Results .....	6
2.4 Environmental Conditions.....	6
<b>3. TEST METHODOLOGY.....</b>	<b>7</b>
3. 1TEST FACILITY .....	7
3.2 GENERAL TEST PROCEDURES.....	7
<b>4. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>8</b>
4.1 SETUP CONFIGURATION OF EUT .....	8
4.2 SUPPORT EQUIPMENT .....	8
4.3 TEST EQUIPMENT LIST .....	9
<b>5. 47 CFR Part 15 C Requirements .....</b>	<b>10</b>
5.1 RF EXPOSURE .....	10
5.1.1 Applicable Standard.....	10
5.1.2 Measurement Result.....	10
5.2 ANTENNA REQUIREMENT .....	11
5.2.1 Applicable Standard .....	11
5.2.2 Evaluation Criteria.....	11
5.2.3 Result: Compliance. ....	11
5.3 AC Power Line Conducted Emission.....	12
5.3.1Requirement .....	12
5.3.2 Block Diagram of Test Setup.....	12
5.3.3 Test procedure .....	12
5.3.4 Test Result.....	12
5.4 Radiated Emission.....	15
5.4.1Requirement .....	15
5.4.2 Test Configuration.....	15
5.4.3 Test Procedure: .....	16
5.4.4 Test Result.....	17
5 Conducted Peak Output Power.....	20
5.5 Conducted Peak Output Power.....	26
5.5.1 Requirement .....	26
5.5.2 Block Diagram of Test Setup.....	26
5.5.3 Test Procedure .....	26
5.5.4 Test Result.....	26
5.6 20dB Emission Bandwidth.....	30
5.6.1 Test Requirement .....	30
5.6.2 Test Procedure .....	30
5.6.3 Test Result.....	30
5.7 Carrier Frequency Separation .....	34
5.7.1 Test Requirement .....	34

5.7.2 Test Procedure .....	34
5.7.3 Test Result.....	34
5.8 Number of Hopping Channel.....	38
5.8.1 Test Requirement.....	38
5.8.2 Test Procedure .....	38
5.8.3 Test Result.....	38
5.9 Dwell Time.....	40
5.9.1 Test Requirement.....	40
5.9.2 Test Procedure .....	40
5.9.3 Test Result.....	40
5.9 Band Edge and Conducted Spurious Emissions .....	44
5.9.1 Test Requirement.....	44
5.9.2 Test Procedure .....	44
5.9.3 Test Result.....	44
5.10 Restricted Frequency Bands.....	49
5.10.1 Test Requirement.....	49
5.10.2 Test Configuration .....	49
5.10.3 Test Procedure:.....	49
5.10.4 Test Result .....	49

# 1. VERIFICATION OF CONFORMITY

**Equipment Under Test:** Clip-It Wireless Speaker

**Brand Name:** HMDX

**Model Number:** HX-P150

**FCC ID:** WC2-HXP150

**Applicant:** Wonders Technology Co.,Ltd

DOSS Industrial Zone, Qiping Kengdu Industrial Area Guihua  
Village, Guanlan Town Baoan District, ShenZhen, China

**Manufacturer:** Wonders Technology Co.,Ltd

DOSS Industrial Zone, Qiping Kengdu Industrial Area Guihua  
Village, Guanlan Town Baoan District, ShenZhen, China

**Technical Standards:** 47 CFR Part 15 Subpart C

**File Number:** MTE/SAL/A15020234

**Date of test:** Feb. 09 - Feb.12, 2015

**Deviation:** None

**Condition of Test**

**Sample:** Normal

**Test Result:** PASS

The above equipment was tested by Most Technology Service Co., Ltd. for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):

Sophia Liu

Feb. 09-12, 2015

Review by (+ signature):



Feb. 13, 2015

Approved by (+ signature):

Yvette Zhou(Manager)

Feb. 14, 2015

## 2. GENERAL INFORMATION

### 2.1 Product Information

<b>Product</b>	Clip-It Wireless Speaker
<b>Brand Name</b>	HMDX
<b>Model Number</b>	HX-P150
<b>Series Model Name:</b>	DS-1593
<b>Series Model Difference description:</b>	Only difference in model name
<b>Power Supply</b>	DC 5V by USB Port
<b>Frequency Range</b>	2402MHz -2480MHz
<b>Modulation Type:</b>	GFSK, $\pi/4$ -DQPSK, 8DPSK
<b>Modulation Technique</b>	FHSS
<b>Channel Number</b>	79
<b>Antenna Type</b>	Internal PCB Antenna, 0dBi
<b>Temperature Range</b>	0°C ~ +45°C

**NOTE:**

1. For a more detailed features description about the EUT, please refer to User's Manual.

### 2.2 Objective

Perform FCC Part 15 Subpart C tests for FCC Marking.

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

## 2.3 Test Standards and Results

No.	Section	Test Items	Result	Date of Test
1	FCC 15.247 (i)	RF EXPOSURE	PASS	2015-02-10
2	FCC 15.203	Antenna Requirement	PASS	2015-02-10
3	FCC15.207 (a)	AC Power Line Conducted Emission	PASS	2015-02-11
4	FCC15.209, 15.247(d)	Radiated Emission	PASS	2015-02-12
5	FCC 15.247 (b)(1)	Conducted Peak Output Power	PASS	2015-02-10
6	FCC 15.247 (a)(1)	20dB Emission Bandwidth	PASS	2015-02-10
7	FCC 15.247 (a)(1)	Carrier Frequency Separation	PASS	2015-02-10
8	FCC 15.247 (a)(1)(iii)	Number of Hopping Channel	PASS	2015-02-10
9	FCC 15.247 (a)(1) (iii)	Dwell Time	PASS	2015-02-10
10	FCC15.247(d)	Band Edge and Conducted Spurious Emissions	PASS	2015-02-10
11	FCC15.247(d)	Restricted Frequency Bands	PASS	2015-02-10

Note: 1. The test result judgment is decided by the limit of measurement standard  
 2. The information of measurement uncertainty is available upon the customer's request.

## 2.4 Environmental Conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C
- Humidity: 30-60 %
- Atmospheric pressure: 86-106 kPa

### 3. TEST METHODOLOGY

#### 3. 1 TEST FACILITY

**Test Site:** Most Technology Service Co., Ltd  
**Location:** No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen, Guangdong, China  
**Description:** There is one 3m semi-anechoic an area test sites and two line conducted labs for final test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014 and CISPR 16 requirements.  
The FCC Registration Number is **490827**. The IC Registration Number is **7103A-1**.  
**Site Filing:** The site description is on file with the Federal Communications Commission, 7435 Oakland Mills Road, Columbia, MD 21046.  
**Instrument**  
**Tolerance:** All measuring equipment is in accord with ANSI C63.4:2014 and CISPR 16 requirements that meet industry regulatory agency and accreditation agency requirement.  
**Ground Plane:** Two conductive reference ground planes were used during the Line Conducted Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire area between the EUT and the antenna.

#### 3.2 GENERAL TEST PROCEDURES

##### Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2014.

##### Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2014, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

## 4. SETUP OF EQUIPMENT UNDER TEST

### 4.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 4.2 SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Data Cable	Power Cable
Notebook	Lenovo	E425	R9-KZL4B	1.6m Un-shielded	1.8m Un-shielded

*Remark:*

*All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

## 4.3 TEST EQUIPMENT LIST

**Instrumentation:** The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calibration date	Calibration Interval
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2014/03/10	1 Year
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2014/03/10	1 Year
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2014/03/07	1 Year
4	Terminator	Hubersuhner	50Ω	No.1	2014/03/07	1 Year
5	RF Cable	SchwarzBeck	N/A	No.1	2014/03/07	1 Year
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2014/03/10	1 Year
7	Bilog Antenna	Sunol	JB3	A121206	2014/03/14	1 Year
8	Horn Antenna	SCHWARZBECK	BBHA9120D	756	2014/03/14	1 Year
9	Horn Antenna	Penn Engineering	9034	8376	2014/03/14	1 Year
10	Cable	Resenberger	N/A	NO.1	2014/03/07	1 Year
11	Cable	SchwarzBeck	N/A	NO.2	2014/03/07	1 Year
12	Cable	SchwarzBeck	N/A	NO.3	2014/03/07	1 Year
13	DC Power Filter	DuoJi	DL2×30B	N/A	2014/03/07	1 Year
14	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2014/03/07	1 Year
15	3 Phase Power Line Filter	DuoJi	FNF 402B30	N/A	2014/03/07	1 Year
16	Test Receiver	Rohde & Schwarz	ESCI	100492	2014/03/10	1 Year
17	Absorbing Clamp	Luthi	MDS21	3635	2014/03/12	1 Year
18	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2014/03/07	1 Year
19	AC Power Source	Kikusui	AC40MA	LM003232	2014/03/10	1 Year
20	Test Analyzer	Kikusui	KHA1000	LM003720	2014/03/10	1 Year
21	Line Impedance Network	Kikusui	LIN40MA-PCR-L	LM002352	2014/03/10	1 Year
22	ESD Tester	Kikusui	KES4021	LM003537	2014/03/07	1 Year
23	EMCPRO System	EM Test	UCS-500-M4	V0648102026	2014/03/10	1 Year
24	Signal Generator	IFR	2032	203002/100	2014/03/10	1 Year
25	Amplifier	A&R	150W1000	301584	2014/03/14	1 Year
26	CDN	FCC	FCC-801-M2-25	47	2014/03/10	1 Year
27	CDN	FCC	FCC-801-M3-25	107	2014/03/10	1 Year
28	EM Injection Clamp	FCC	F-203I-23mm	403	2014/03/10	1 Year
29	RF Cable	MIYAZAKI	N/A	No.1/No.2	2014/03/10	1 Year
30	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2014/03/10	1 Year
31	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2014/03/10	1 Year
32	Telecommunication Test Equipment	R&S	CMU200	N/A	2014/03/07	1 Year
33	8 Loop Antenna	ARA	PLA-1030/B	1029	2015/01/10	1 Year

**NOTE:** Equipments listed above have been calibrated and are in the period of validation.

## 5. 47 CFR Part 15 C Requirements

### 5.1 RF EXPOSURE

#### 5.1.1 Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v05r02:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

$f(\text{GHz})$  is the RF channel transmit frequency in GHz

Power and distance are rounded to the nearest mW and mm before calculation

The result is rounded to one decimal place for comparison

3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

#### 5.1.2 Measurement Result

The maximum conducted output power = 1.748 dBm (1.4955 mW) at 2402 MHz  $[(\text{max. power of channel, mW}) / (\text{min. test separation distance, mm})] [\sqrt{f(\text{GHz})}]$

$$= 1.4955 / 5 * (\sqrt{2.402}) = 0.45 < 3.0$$

So the stand-alone SAR evaluation is not necessary.

## 5.2 ANTENNA REQUIREMENT

### 5.2.1 Applicable Standard

According to FCC § 15.203 , An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 5.2.2 Evaluation Criteria

- (a) Antenna must be permanently attached to the unit.
- (b) Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, Installer shall be responsible for verifying that the correct antenna is employed with the unit.

### 5.2.3 Result: Compliance.

The EUT has one integral antenna arrangement, which was permanently attached and the antenna gain is 0 dBi, fulfill the requirement of this section.

## 5.3 AC Power Line Conducted Emission

### 5.3.1 Requirement


A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the range 150 kHz-30 MHz, shall not exceed the limits in the following table:

Frequency	Maximum RF Line Voltage	
	Q.P. (dBuV)	Average (dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

**\*\*Note:** 1. the lower limit shall apply at the band edges.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

### 5.3.2 Block Diagram of Test Setup

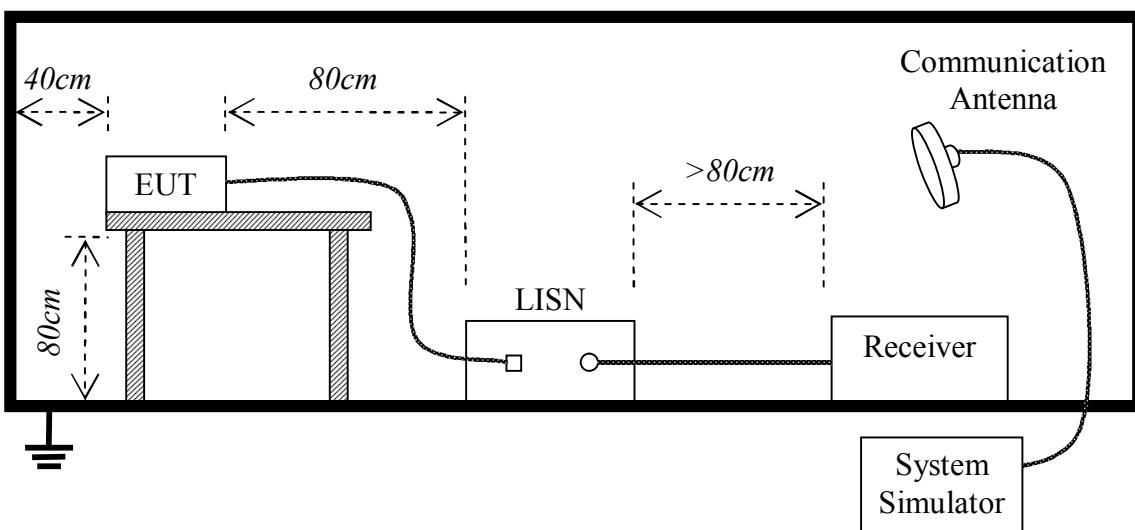

### 5.3.3 Test procedure

1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.
2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).
3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.
4. The bandwidth of test receiver (ESCI) set at 9 KHz.
5. All data was recorded in the Quasi-peak and average detection mode.

### 5.3.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following pages.



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong, China  
Tel: 0755-86026850 Fax: 0755-26013350

### Conducted Emission Measurement


File : HX-P150

Data : #1

Date: 2015-2-11

Time: 16:23:22

80.0 dBuV

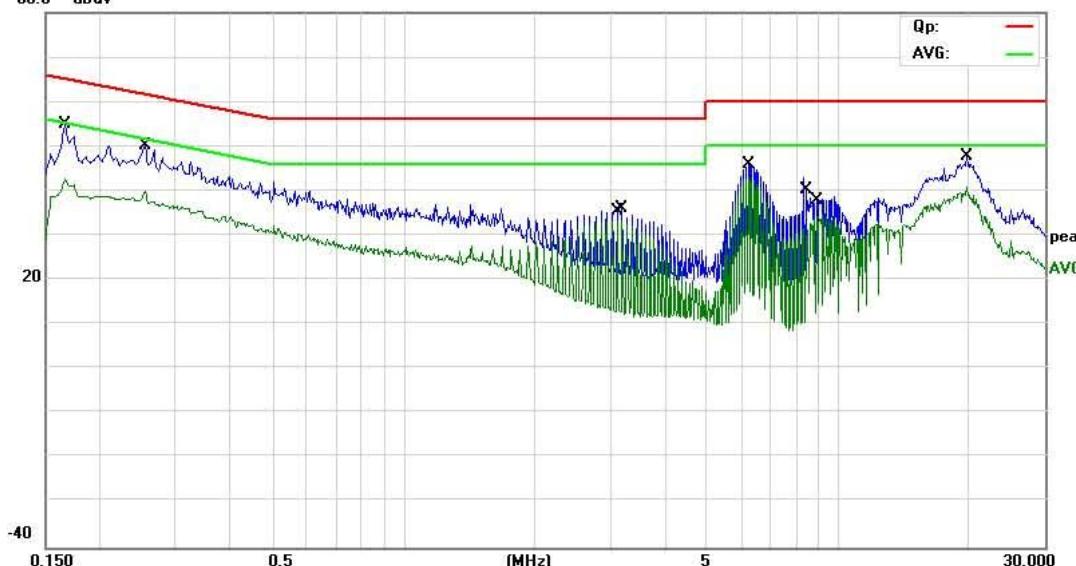

Site MOST #1

Phase: L1

Temperature: 23.9

Limit: FCC Part15 B Class B QP

Power: DC 5.0V by USB Port

Humidity: 53.1 %

EUT: Clip-It Wireless Speaker

M/N: HX-P150

Mode: GFSK

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV				
1		0.1660	44.85	9.96	54.81	65.16	-10.35	QP	
2		0.1660	32.60	9.96	42.56	55.16	-12.60	AVG	
3		0.2540	38.38	11.64	50.02	61.63	-11.61	QP	
4		0.2540	28.24	11.64	39.88	51.63	-11.75	AVG	
5		3.1180	23.36	10.12	33.48	46.00	-12.52	AVG	
6		3.2020	25.85	10.20	36.05	56.00	-19.95	QP	
7		6.2340	34.72	11.26	45.98	60.00	-14.02	QP	
8 *		6.2340	31.66	11.26	42.92	50.00	-7.08	AVG	
9		8.4820	30.44	9.91	40.35	60.00	-19.65	QP	
10		8.9380	24.62	9.64	34.26	50.00	-15.74	AVG	
11		19.8980	38.61	9.00	47.61	60.00	-12.39	QP	
12		19.8980	31.82	9.00	40.82	50.00	-9.18	AVG	

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature: John



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350

### Conducted Emission Measurement


File : HX-P150

Data : #2

Date: 2015-2-11

Time: 16:28:39

80.0 dBuV

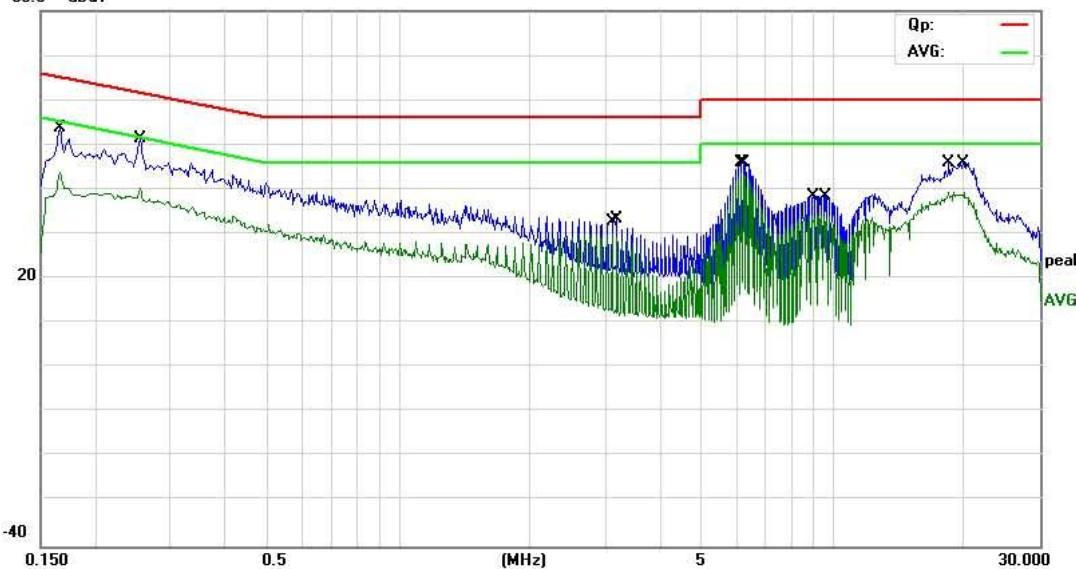

Site MOST #1

Phase: **N**

Temperature: 23.9

Limit: FCC Part15 B Class B QP

Power: DC 5.0V by USB Port

Humidity: 53.1 %

EUT: Clip-It Wireless Speaker

M/N: HX-P150

Mode: GFSK

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over	
							Detector	Comment
1		0.1660	43.81	9.96	53.77	65.16	-11.39	QP
2		0.1660	33.88	9.96	43.84	55.16	-11.32	AVG
3		0.2540	39.63	11.64	51.27	61.63	-10.36	QP
4		0.2540	28.68	11.64	40.32	51.63	-11.31	AVG
5		3.1180	19.96	10.12	30.08	46.00	-15.92	AVG
6		3.2020	23.28	10.20	33.48	56.00	-22.52	QP
7		6.1500	34.71	11.31	46.02	60.00	-13.98	QP
8 *		6.2340	32.02	11.26	43.28	50.00	-6.72	AVG
9		9.0140	29.00	9.59	38.59	60.00	-21.41	QP
10		9.4340	24.86	9.34	34.20	50.00	-15.80	AVG
11		18.6100	30.41	9.00	39.41	50.00	-10.59	AVG
12		19.9580	37.03	9.00	46.03	60.00	-13.97	QP

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature: John

## 5.4 Radiated Emission

### 5.4.1 Requirement

According to FCC section 15.247(d), In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC section 15.209(a), Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ at 3-meter)	Test Distance (m)	Field Strength ( $\text{dB}\mu\text{V}/\text{m}$ at 3-meter)
0.009 - 0.490	$2400/F(\text{kHz})$	300	
0.490 - 1.705	$24000/F(\text{kHz})$	30	
1.705-30	30	30	
30-88	100	3	40
88-216	150	3	43.5
216-960	200	3	46
Above 960	500	3	54

Note:


- For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- For above 1000MHz, limit field strength of harmonics: 54dB $\mu$ V/m@3m (AV) and 74dB $\mu$ V/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in RSS-Gen Cl.8.10, also should comply with the radiated emission limits specified in RSS-Gen Cl.8.9 (above table)


### 5.4.2 Test Configuration

#### Test Setup:


- For radiated emissions from 9kHz to 30MHz

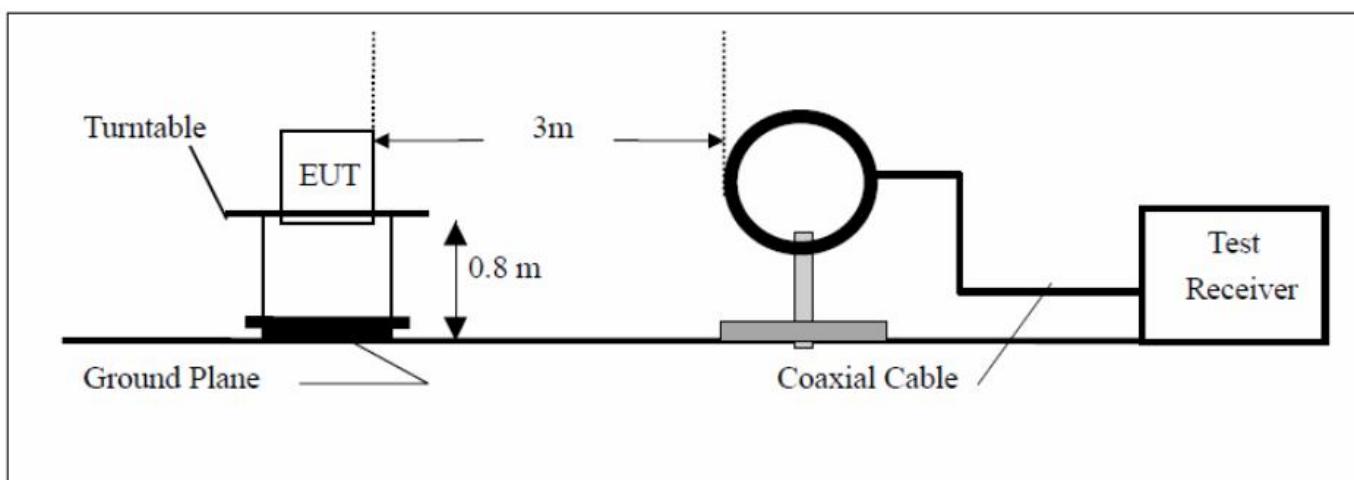

2) For radiated emissions from 30MHz to1GHz

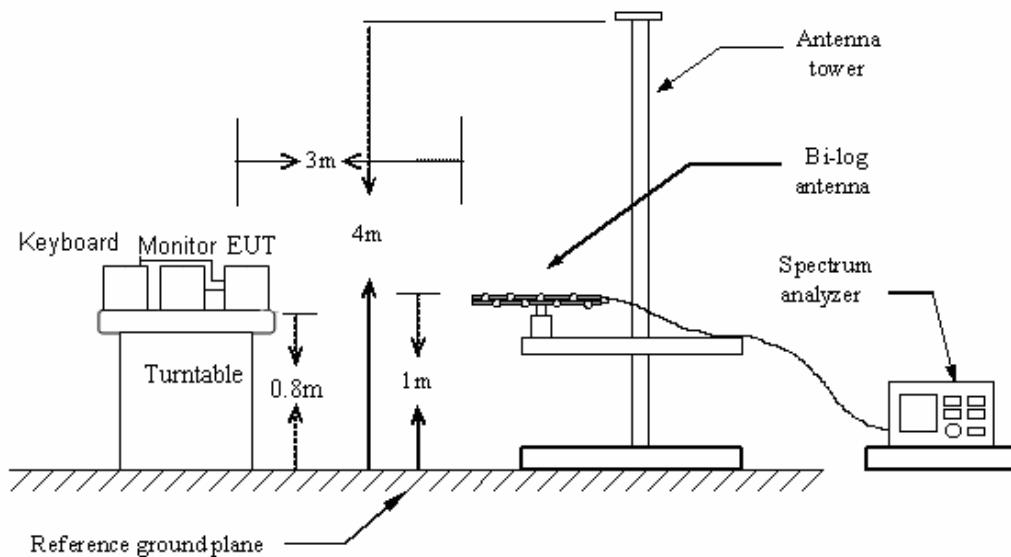

3) For radiated emissions above 1GHz

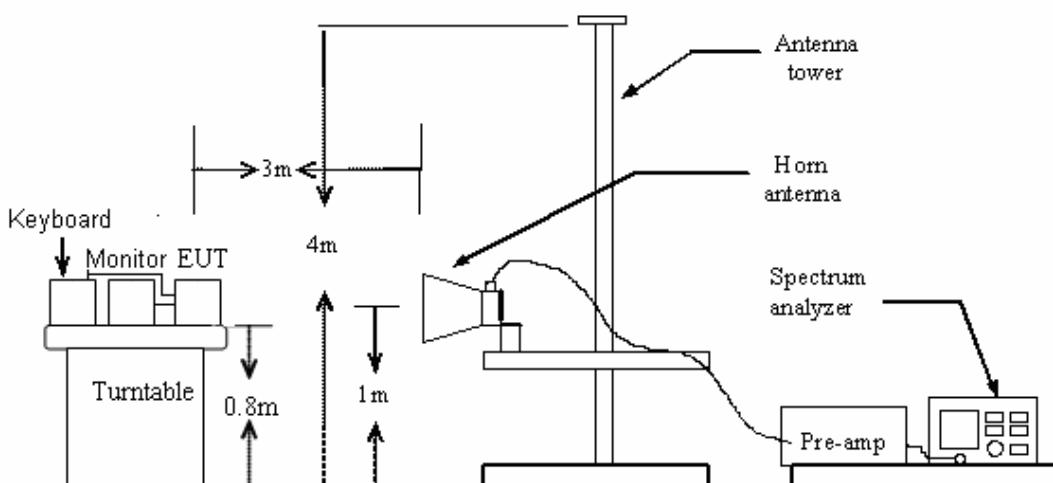

### 5.4.3 Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

5. Set the spectrum analyzer in the following setting as:

Below 1GHz: PEAK: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO QP: RBW=120 kHz / Sweep=AUTO

Above 1GHz: (a)PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b)AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

#### 5.4.4 Test Result

Pass

**Remark:**


1. During the test, pre-scan the GFSK, π/4-QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case in above 1GHz and the GFSK Low channel modulation which it is worse case in below 1GHz.

2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Please refer the following pages.

**Below 1GHz:**

Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350

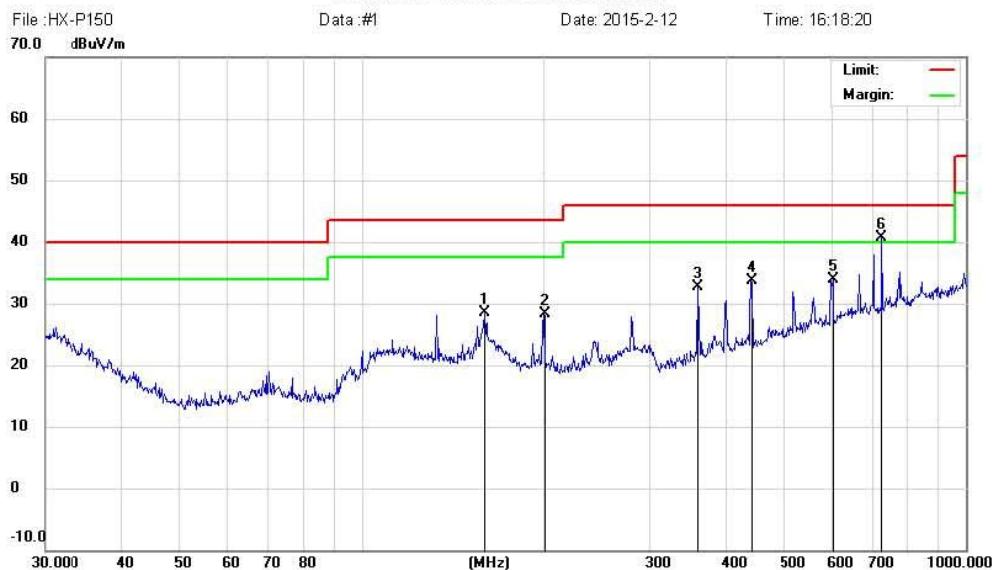**Radiated Emission Measurement**

No.	Mk.	Freq. MHz	Reading Level dB <sub>uV</sub>	Correct Factor dB	Measure- ment dB <sub>uV/m</sub>	Limit dB <sub>uV/m</sub>	Over dB	Antenna Height cm	Table Degree	Comment
1		160.3456	11.28	17.30	28.58	43.50	-14.92	QP		
2		200.6881	11.01	17.30	28.31	43.50	-15.19	QP		
3		359.1860	14.40	18.26	32.66	46.00	-13.34	QP		
4		440.1963	13.34	20.30	33.64	46.00	-12.36	QP		
5		603.5392	10.91	23.07	33.98	46.00	-12.02	QP		
6	*	726.8052	15.80	24.84	40.64	46.00	-5.36	QP		

\*:Maximum data    x:Over limit    l:over margin

Engineer Signature: Robert



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong ,China  
Tel: 0755-86026850 Fax: 0755-26013350


### Radiated Emission Measurement

File : HX-P150  
70.0 dBuV/m

Data : #2

Date: 2015-2-12

Time: 16:26:30

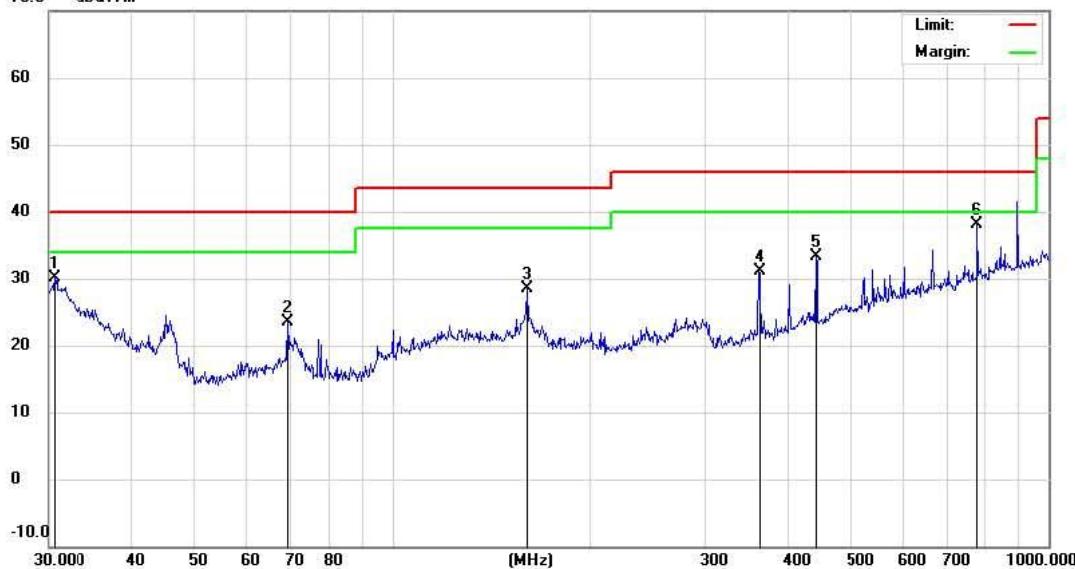

Site: Chamber #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC Part15 B 3M Radiation

Power: DC 5.0V by USB Port

Humidity: 54 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm		Table Degree
								Detector	Comment	
1		30.6378	7.46	22.74	30.20	40.00	-9.80	QP		
2		69.3568	11.79	11.64	23.43	40.00	-16.57	QP		
3		160.9089	11.23	17.29	28.52	43.50	-14.98	QP		
4		361.7138	12.81	18.28	31.09	46.00	-14.91	QP		
5		441.7425	13.12	20.27	33.39	46.00	-12.61	QP		
6	*	779.6067	11.86	26.19	38.05	46.00	-7.95	QP		

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature: Robert

**Above 1GHz**

Address: No 5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350

**Radiated Emission Measurement**

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2402.000	103.12	-8.43	94.69	74.00	20.69	peak		
2	*	2402.000	86.21	-8.43	77.78	54.00	23.78	AVG		
3		5200.000	49.74	-4.49	45.25	74.00	-28.75	peak		
4		5200.000	41.22	-4.49	36.73	54.00	-17.27	AVG		
5		16780.00	42.04	6.20	48.24	74.00	-25.76	peak		
6		16780.00	31.51	6.20	37.71	54.00	-16.29	AVG		


\*:Maximum data    x:Over limit    l:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong ,China  
Tel: 0755-86026850 Fax: 0755-26013350

### Radiated Emission Measurement

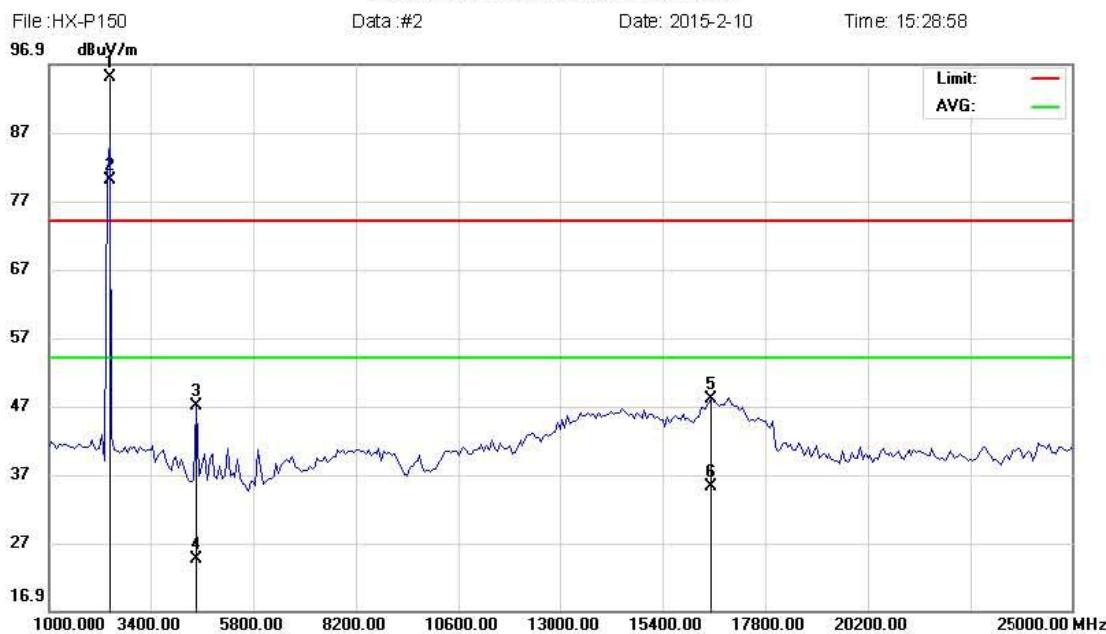

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH0

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1	X	2402.000	103.40	-8.43	94.97	74.00	20.97	peak		
2	*	2402.000	88.43	-8.43	80.00	54.00	26.00	AVG		
3		4480.000	54.55	-7.60	46.95	74.00	-27.05	peak		
4		4480.000	32.24	-7.60	24.64	54.00	-29.36	AVG		
5		16540.00	42.64	5.40	48.04	74.00	-25.96	peak		
6		16540.00	29.80	5.40	35.20	54.00	-18.80	AVG		

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350

### Radiated Emission Measurement



Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH39

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dB	Detector	cm	degree	
1	X	2441.000	105.10	-8.36	96.74	74.00	22.74	peak		
2	*	2441.000	90.20	-8.36	81.84	54.00	27.84	AVG		
3		4900.000	52.52	-5.00	47.52	74.00	-26.48	peak		
4		4900.000	38.63	-5.00	33.63	54.00	-20.37	AVG		
5		16660.00	42.79	5.80	48.59	74.00	-25.41	peak		
6		16660.00	30.64	5.80	36.44	54.00	-17.56	AVG		

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350

### Radiated Emission Measurement



Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH39

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	X	2441.000	102.80	-8.36	94.44	74.00	20.44	peak		
2	*	2441.000	89.43	-8.36	81.07	54.00	27.07	AVG		
3		5200.000	52.46	-4.49	47.97	74.00	-26.03	peak		
4		5200.000	37.99	-4.49	33.50	54.00	-20.50	AVG		
5		16540.00	42.31	5.40	47.71	74.00	-26.29	peak		
6		16540.00	39.36	5.40	44.76	54.00	-9.24	AVG		

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong ,China  
Tel: 0755-86026850 Fax: 0755-26013350

### Radiated Emission Measurement

File : HX-P150

Data : #5

Date: 2015-2-10

Time: 16:14:30



Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH78

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	X	2480.000	104.40	-8.30	96.10	74.00	22.10	peak			
2	*	2480.000	88.51	-8.30	80.21	54.00	26.21	AVG			
3		5200.000	50.98	-4.49	46.49	74.00	-27.51	peak			
4		5200.000	39.35	-4.49	34.86	54.00	-19.14	AVG			
5		16540.00	42.26	5.40	47.66	74.00	-26.34	peak			
6		16540.00	39.32	5.40	44.72	54.00	-9.28	AVG			


\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350

### Radiated Emission Measurement

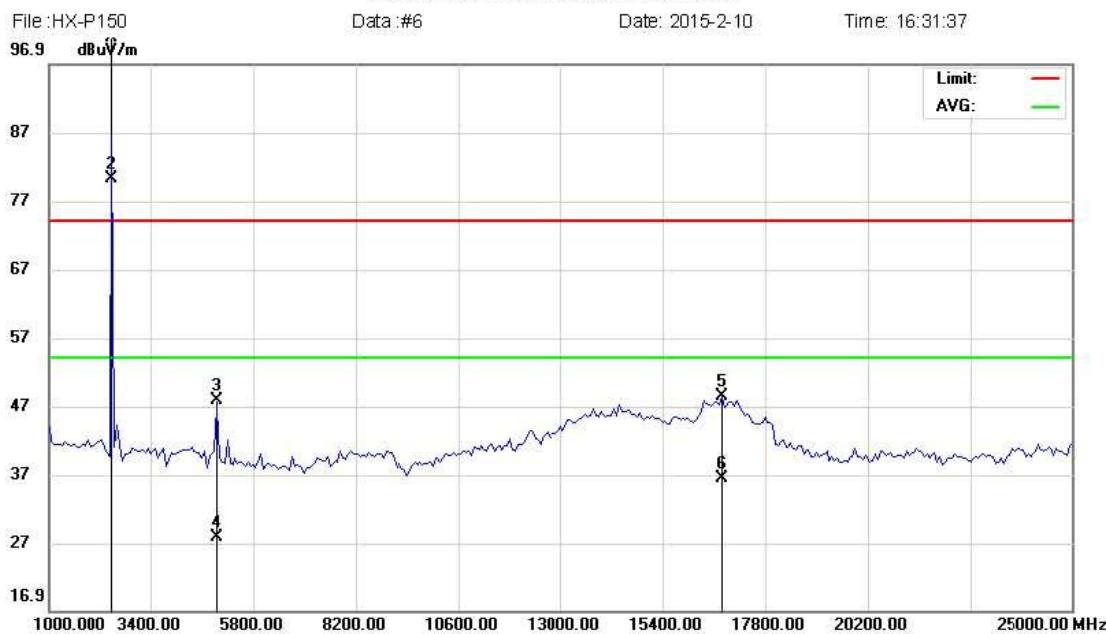

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH78

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	2480.000	109.20	-8.30	100.90	74.00	26.90	peak			
2	X	2480.000	88.43	-8.30	80.13	54.00	26.13	AVG			
3		4960.000	52.04	-4.27	47.77	74.00	-26.23	peak			
4		4960.000	32.10	-4.27	27.83	54.00	-26.17	AVG			
5		16780.00	42.19	6.20	48.39	74.00	-25.61	peak			
6		16780.00	30.22	6.20	36.42	54.00	-17.58	AVG			

\*:Maximum data    x:Over limit    !:over margin


Engineer Signature:

## 5.5 Conducted Peak Output Power

### 5.5.1 Requirement

According to FCC Section 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

### 5.5.2 Block Diagram of Test Setup

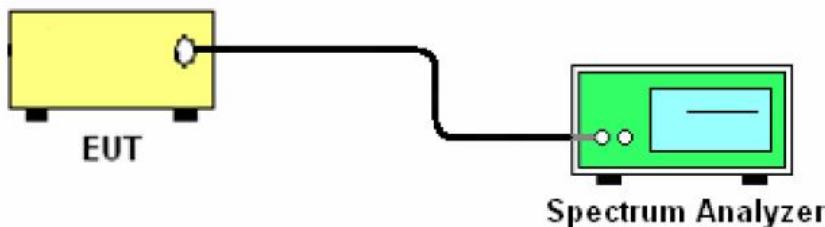


### 5.5.3 Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.


### 5.5.4 Test Result

<b>Test Item:</b>	Peak Output Power	<b>Temperature :</b>	23°C
<b>Test Engineer:</b>	Kang	<b>Relative Humidity :</b>	65%


<b>Mode</b>	<b>Channel</b>	<b>Frequenc y (MHz)</b>	<b>Peak Output Power(dBm)</b>	<b>Limit</b>		<b>Pass/Fail</b>
				<b>(mW)</b>	<b>(dBm)</b>	
BDR (GFSK)	Low	2402	1.748	125	20.97	Pass
	Middle	2441	1.399	125	20.97	Pass
	High	2480	1.07	125	20.97	Pass
EDR (π/4-DQPSK)	Low	2402	1.72	125	20.97	Pass
	Middle	2441	1.336	125	20.97	Pass
	High	2480	0.995	125	20.97	Pass
EDR (8DPSK)	Low	2402	1.733	125	20.97	Pass
	Middle	2441	1.327	125	20.97	Pass
	High	2480	1.000	125	20.97	Pass

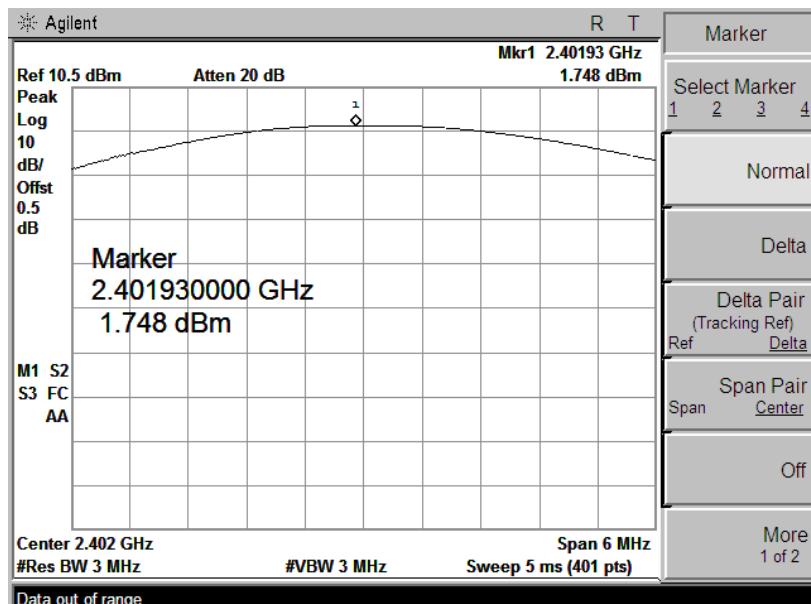




Ch 0

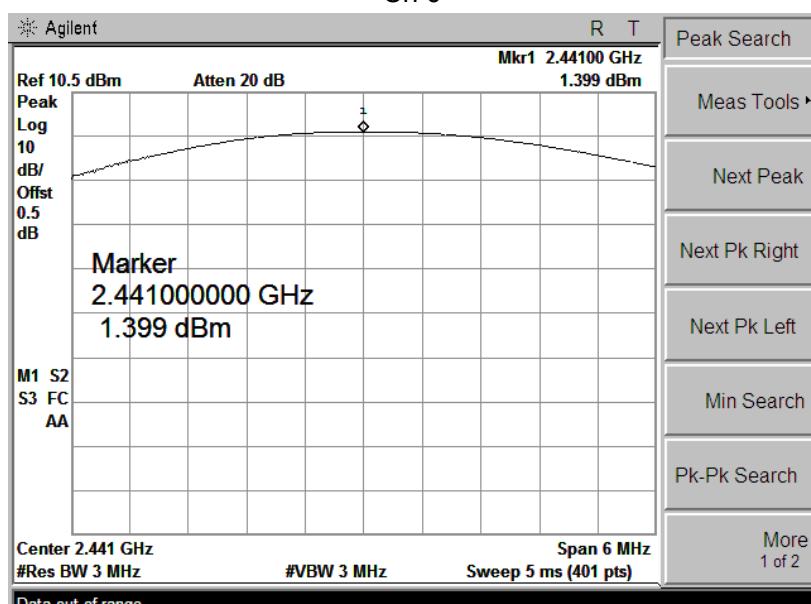


Ch 39

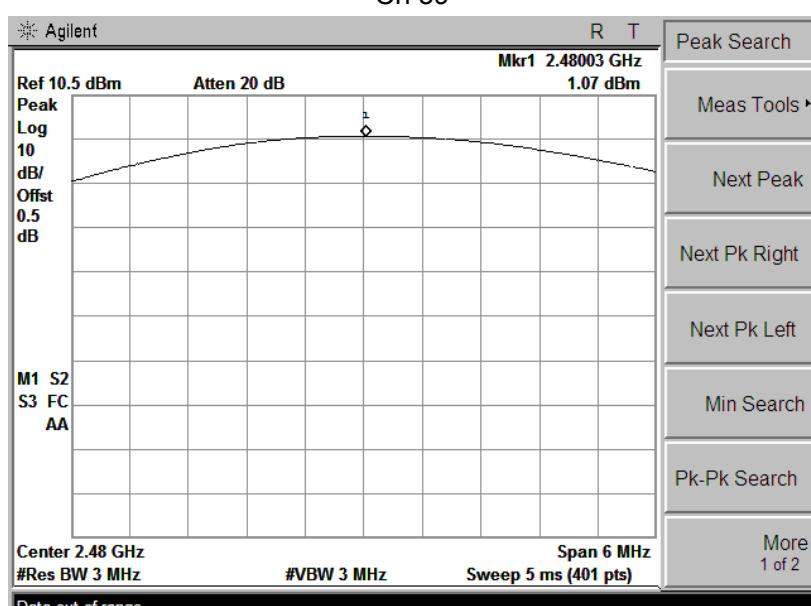


Ch 78




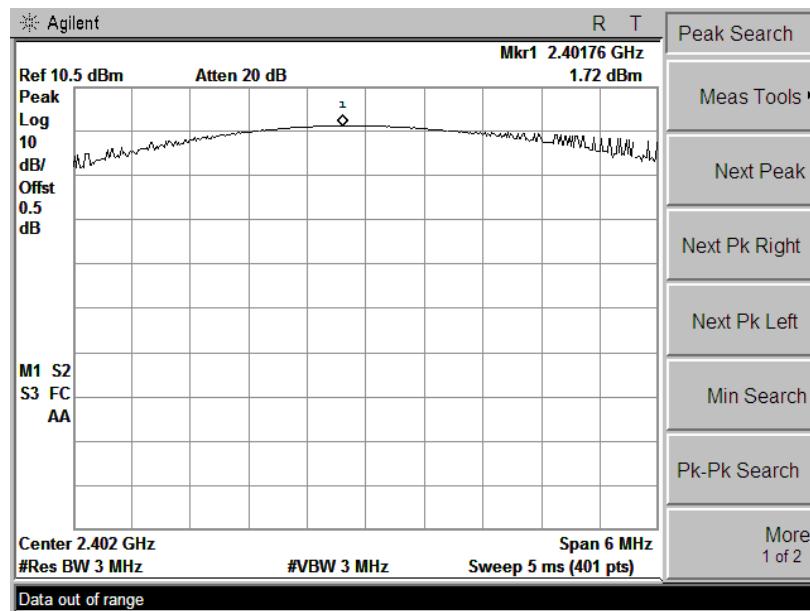$\pi/4$ -DQPSK Mode

Ch 0

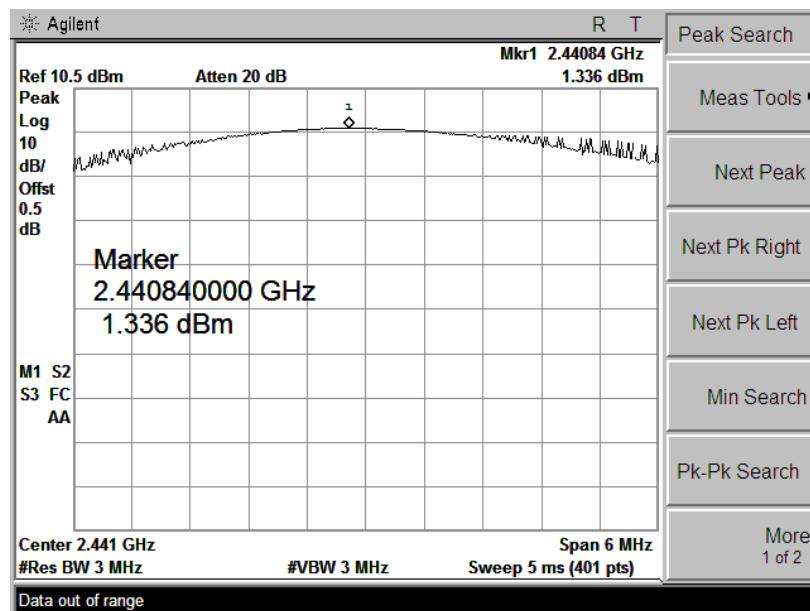


Ch 39

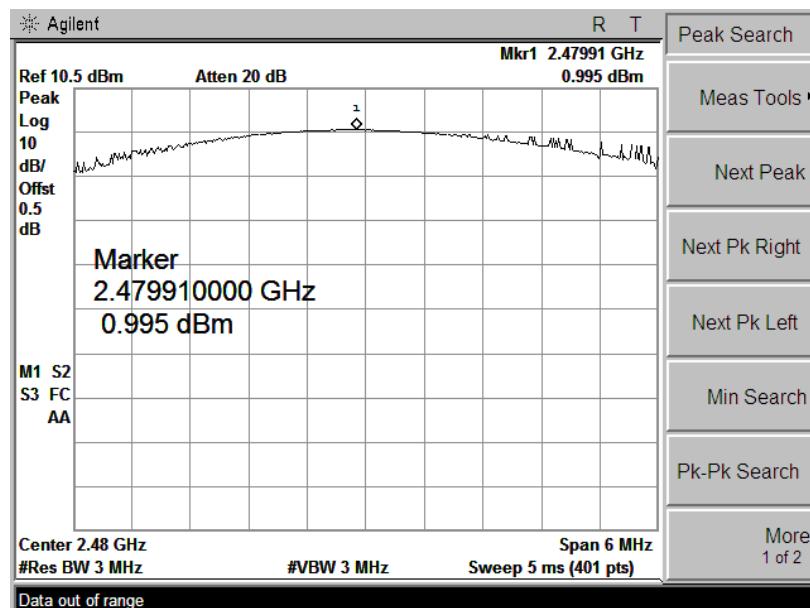


Ch 78


## 8DPSK Mode

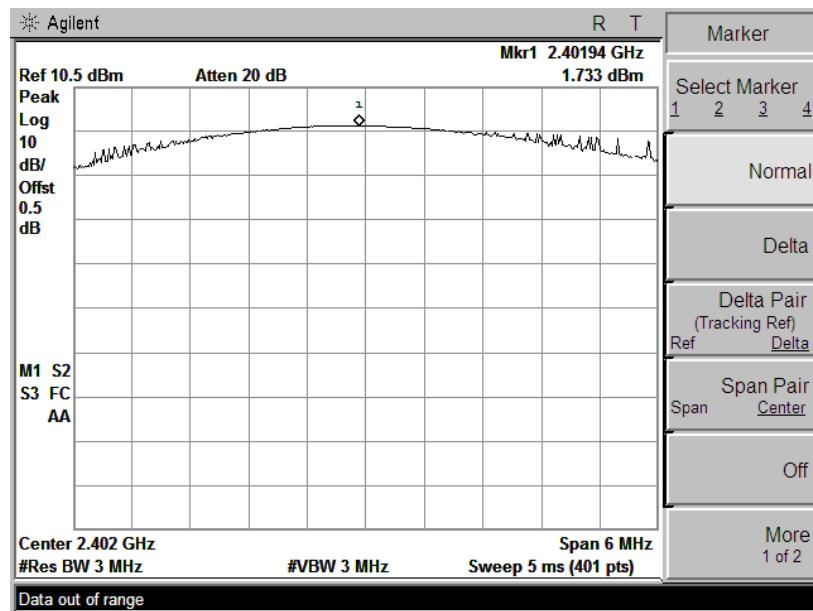

Ch 0

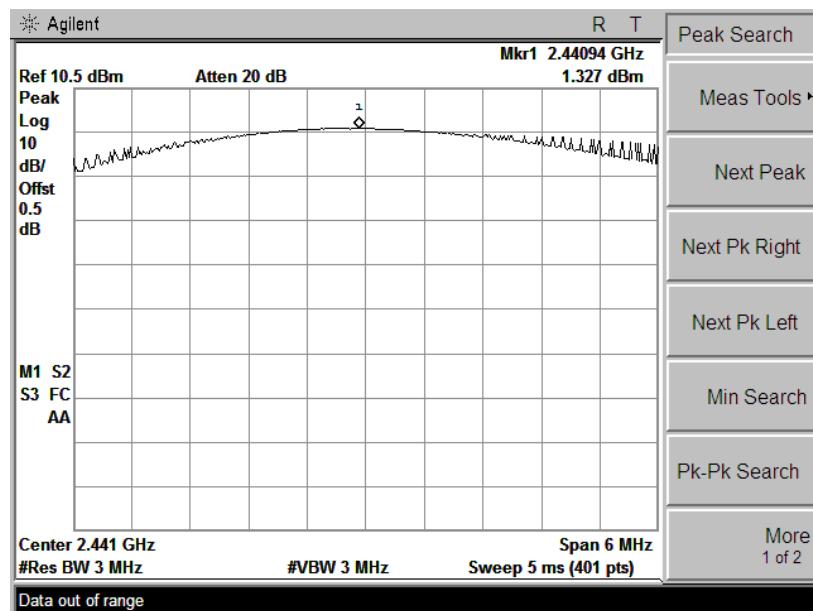

Ch 39

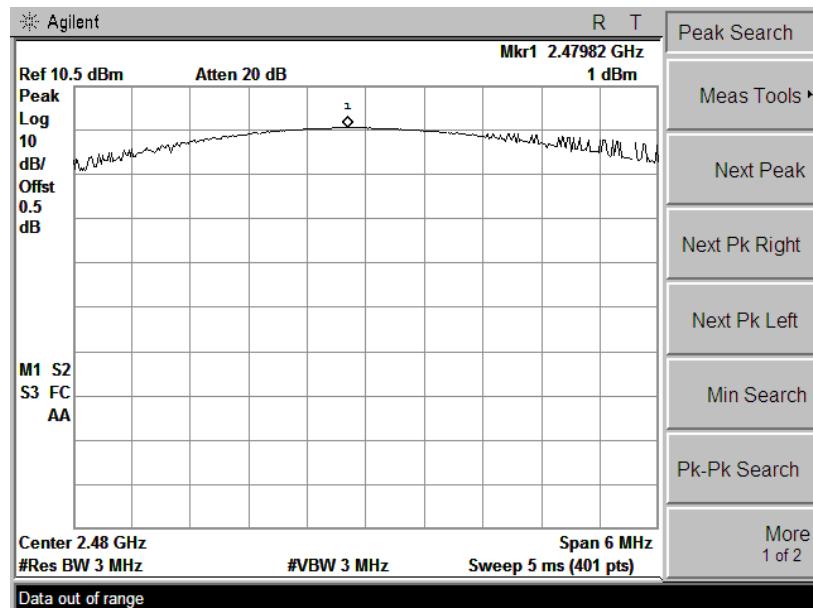

## 5.6 20dB Emission Bandwidth

### 5.6.1 Test Requirement

The bandwidth of a frequency hopping channel is the -20 dB emission bandwidth, measured with the hopping stopped.

### 5.6.2 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### 5.6.3 Test Result


<b>Test Item:</b>	20dB Emission Bandwidth	<b>Temperature :</b>	23°C
<b>Test Engineer:</b>	Kang	<b>Relative Humidity :</b>	65%

<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>20dB Bandwidth(MHz)</b>
BDR (GFSK)	Low	2402	1.053
	Middle	2441	1.059
	High	2480	1.058
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.337
	Middle	2441	1.378
	High	2480	1.379
EDR (8DPSK)	Low	2402	1.336
	Middle	2441	1.334
	High	2480	1.353


## GFSK Mode

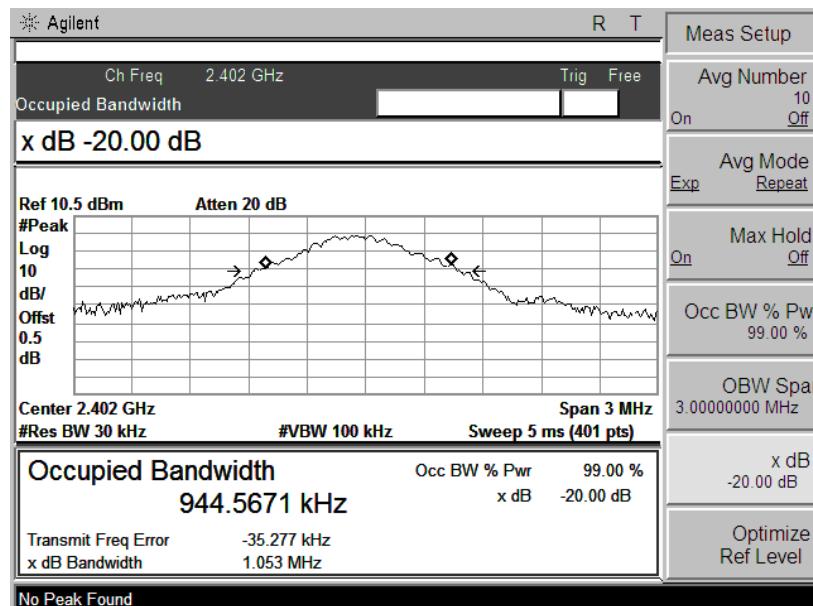


Ch 0

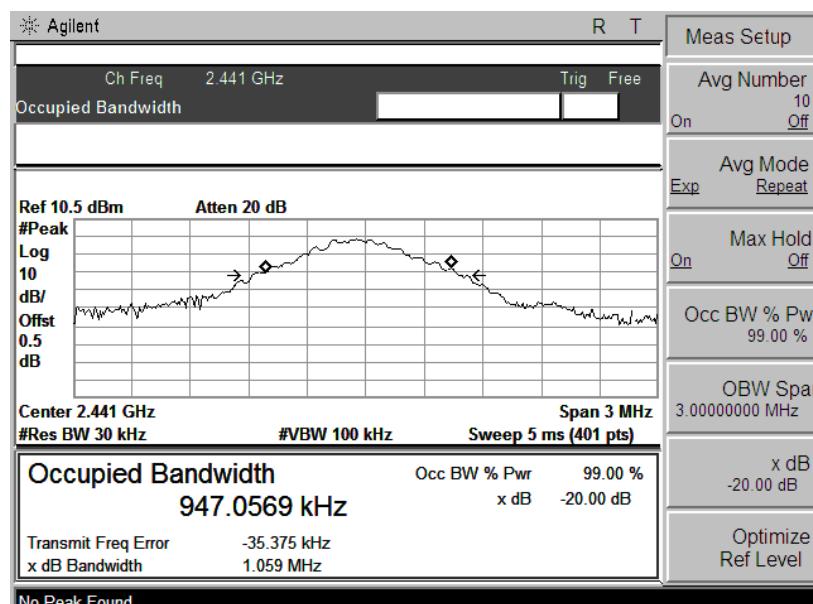


Ch 39

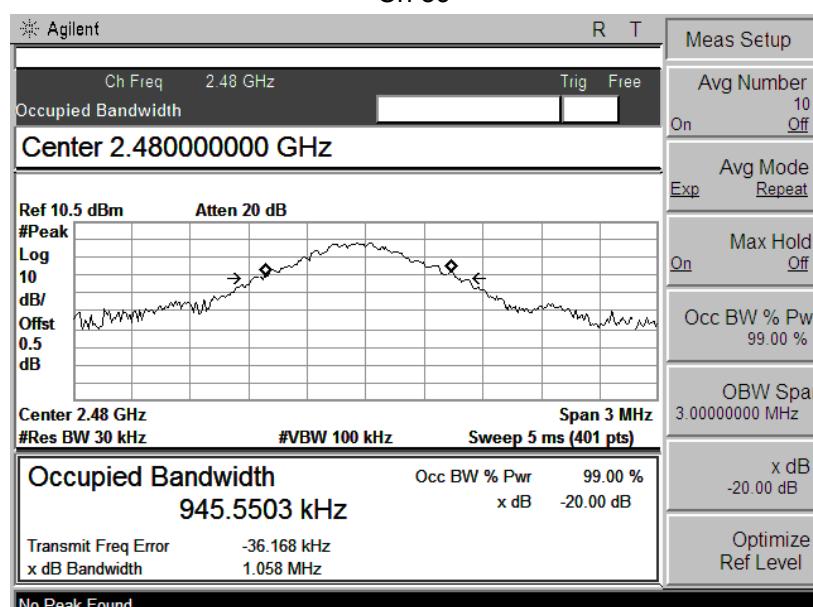


Ch 78

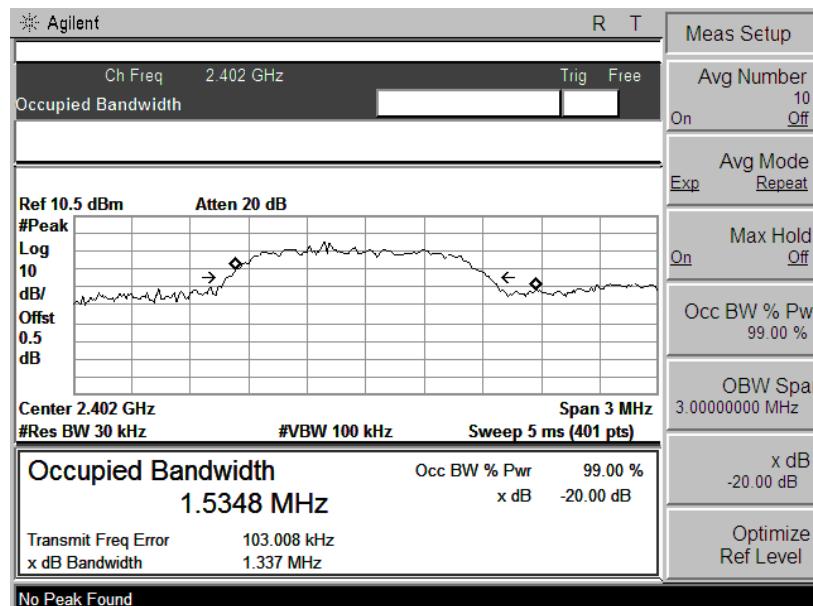$\pi/4$ -DQPSK Mode

Ch 0

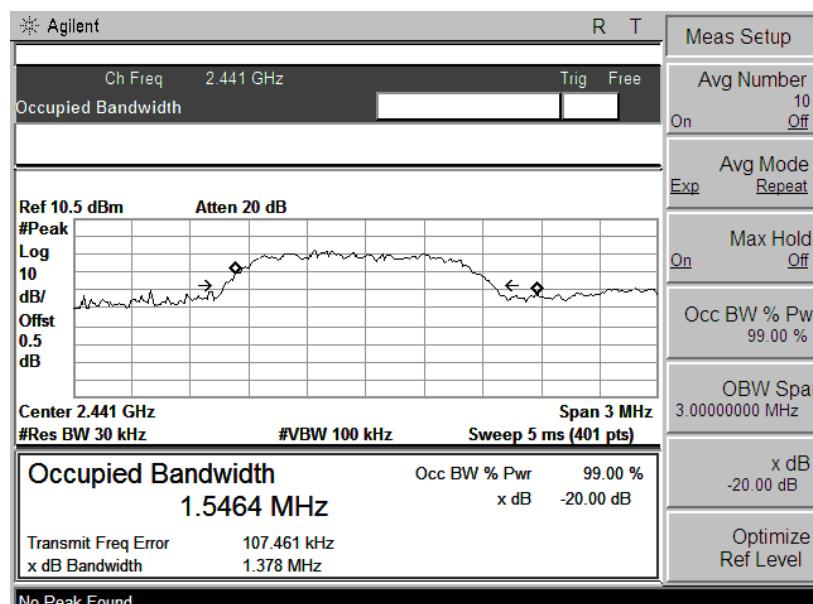


Ch 39

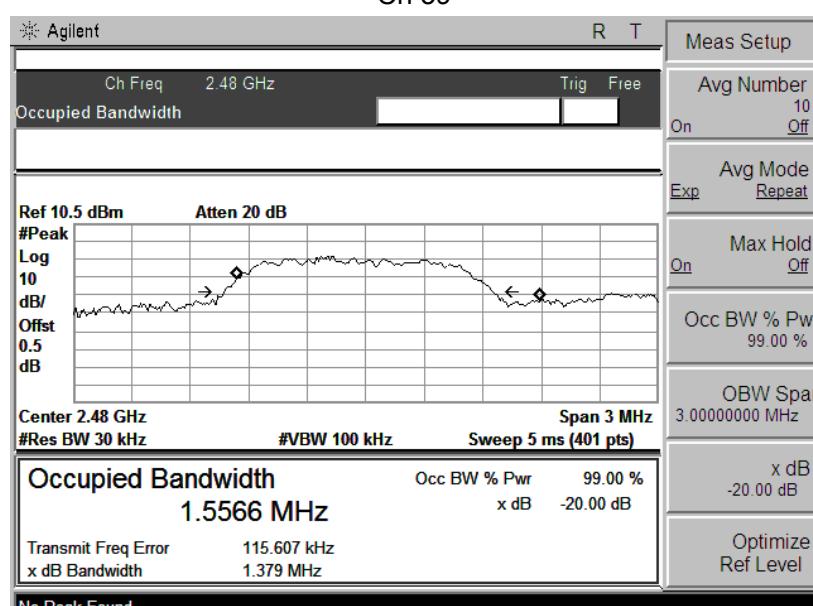


Ch 78


## 8DPSK Mode

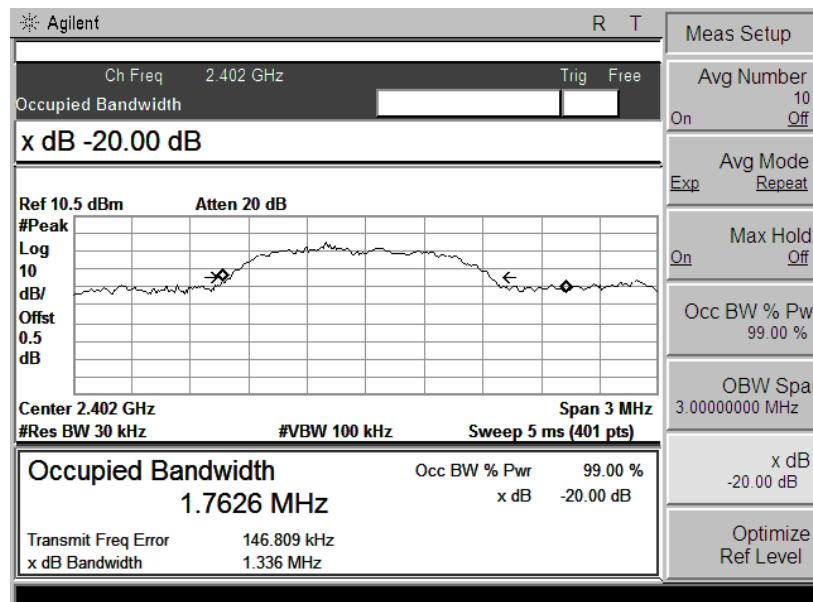

Ch 0

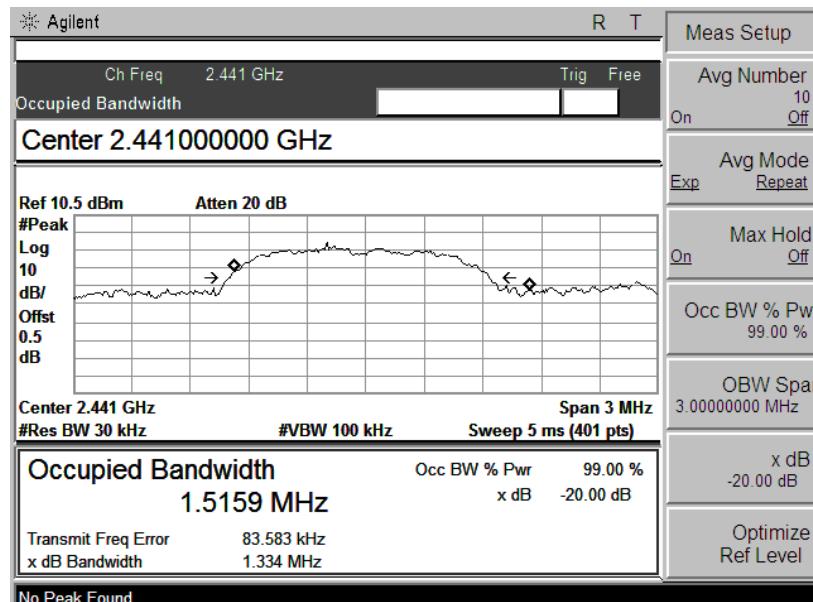

Ch 39

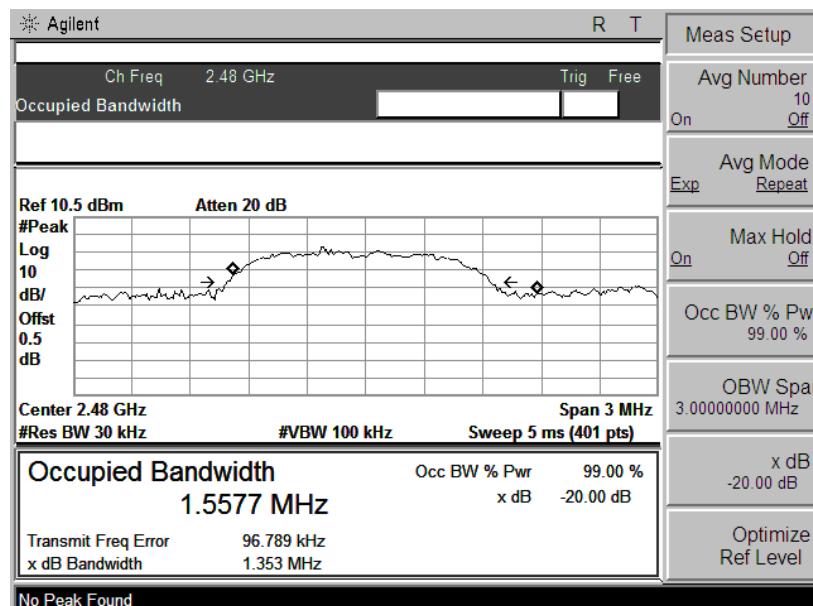

## 5.7 Carrier Frequency Separation

### 5.7.1 Test Requirement

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### 5.7.2 Test Procedure




1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

### 5.7.3 Test Result


<b>Test Item:</b>	Carrier Frequency Separation	<b>Temperature :</b>	23°C
<b>Test Engineer:</b>	Kang	<b>Relative Humidity :</b>	65%

<b>Mode</b>	<b>Channel</b>	<b>Frequency (MHz)</b>	<b>Channel Separation (MHz)</b>	<b>Limit (MHz)</b>	<b>Result</b>
BDR (GFSK)	Low	2402	1.013	0.702	Pass
	Middle	2441	1.012	0.706	Pass
	High	2480	1.013	0.706	Pass
EDR ( $\pi/4$ -DQPSK)	Low	2402	1.005	0.892	Pass
	Middle	2441	1.005	0.919	Pass
	High	2480	1.006	0.919	Pass
EDR (8DPSK)	Low	2402	1.013	0.891	Pass
	Middle	2441	1.005	0.890	Pass
	High	2480	1.013	0.903	Pass


## GFSK Mode

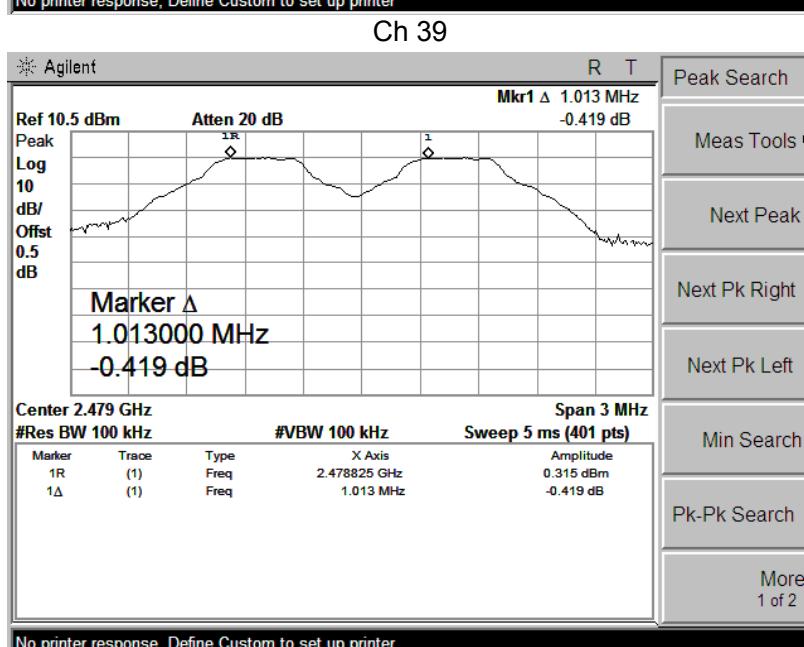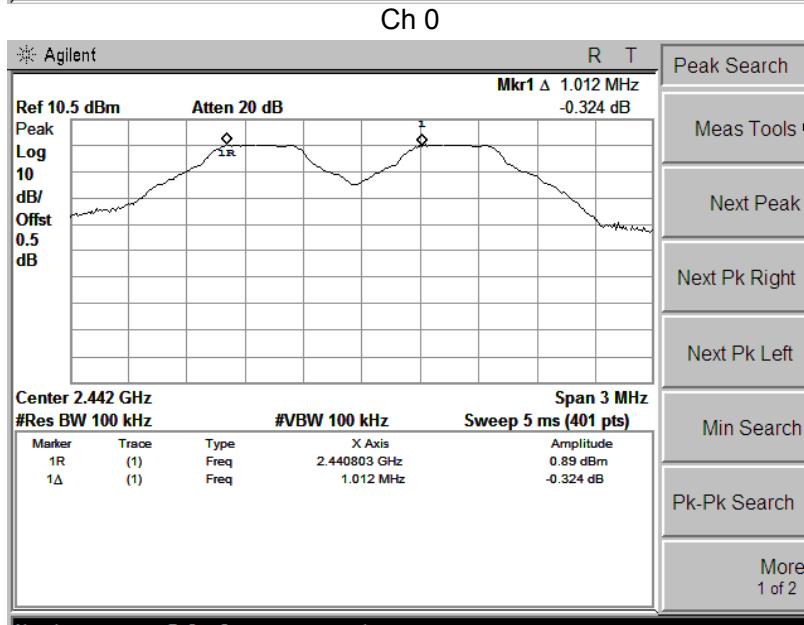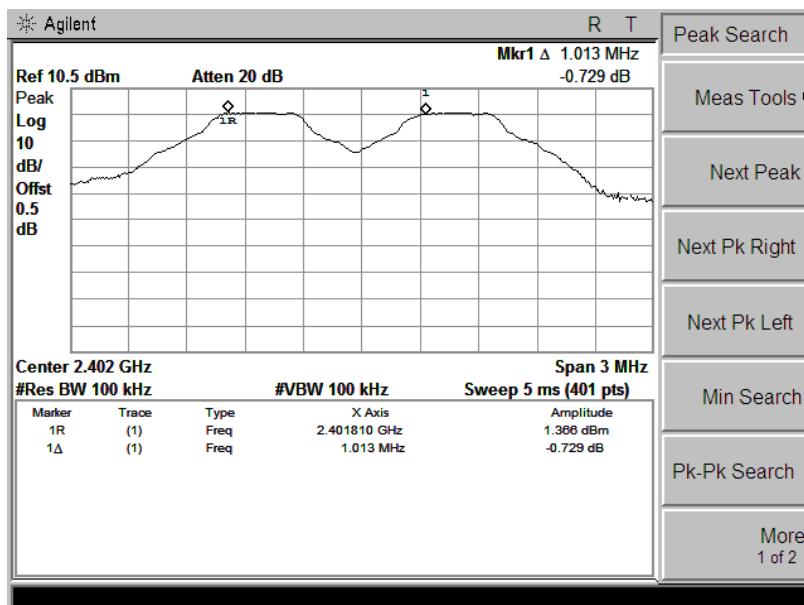


Ch 78

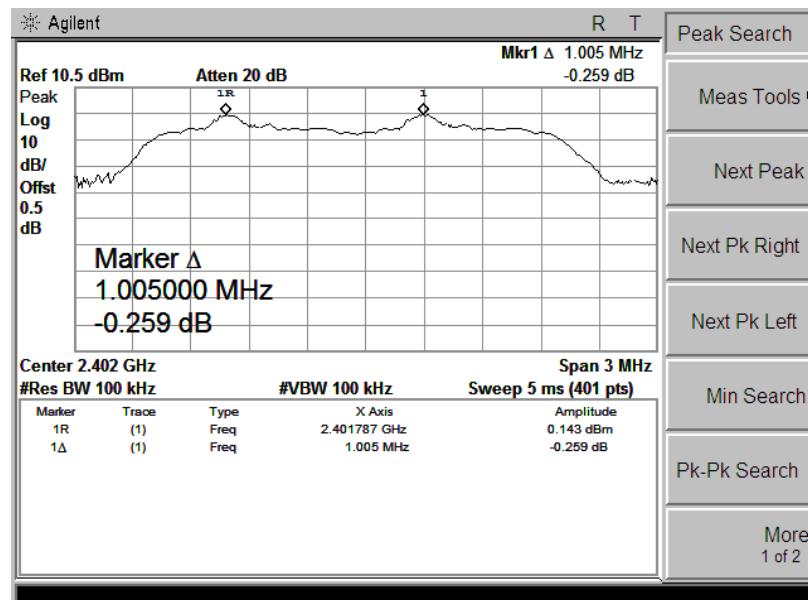$\pi/4$ -DQPSK Mode

Ch 0

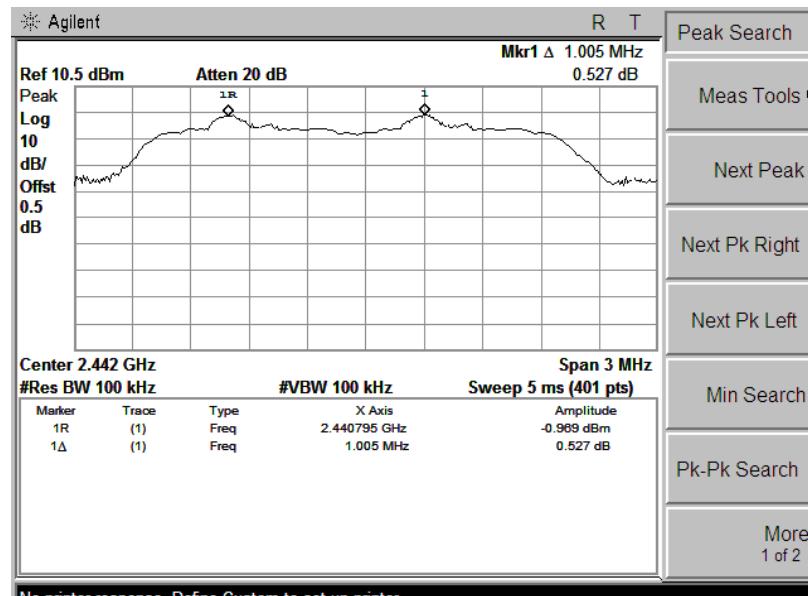


Ch 39

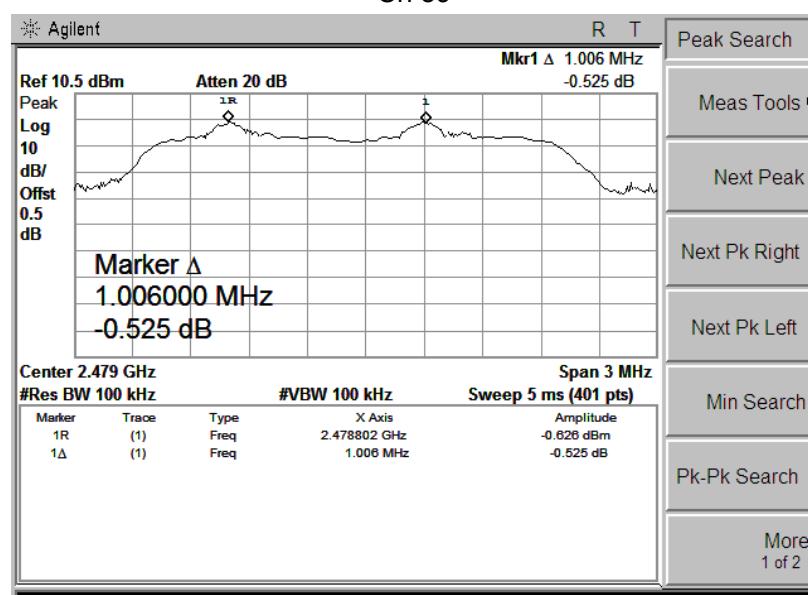


Ch 78


## 8DPSK Mode

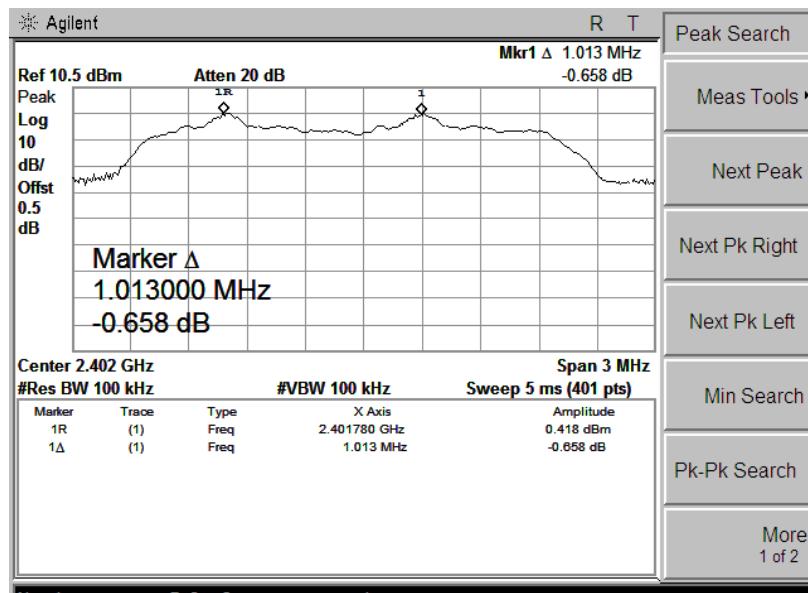

Ch 0

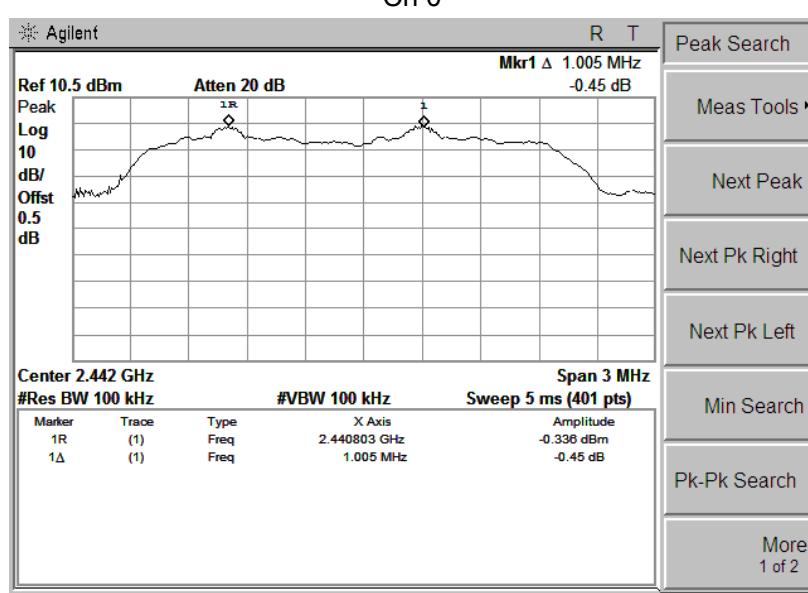

Ch 39

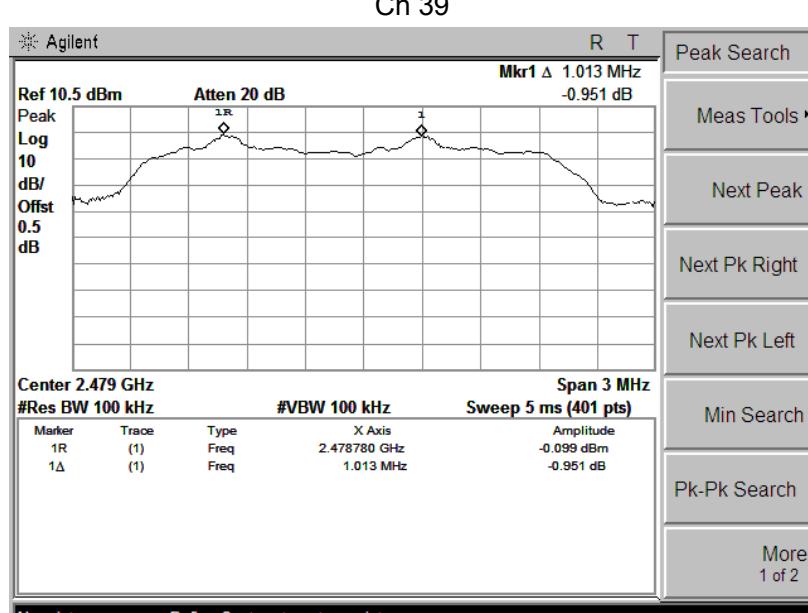

Ch 78

## 5.8 Number of Hopping Channel

### 5.8.1 Test Requirement

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.


### 5.8.2 Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.



### 5.8.3 Test Result

<b>Test Item:</b>	Number of Hopping Channel	<b>Temperature :</b>	23°C
<b>Test Engineer:</b>	Kang	<b>Relative Humidity :</b>	65%

<b>Mode</b>	<b>Frequency Range (MHz)</b>	<b>Number of Hopping Channel</b>	<b>Limit</b>
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

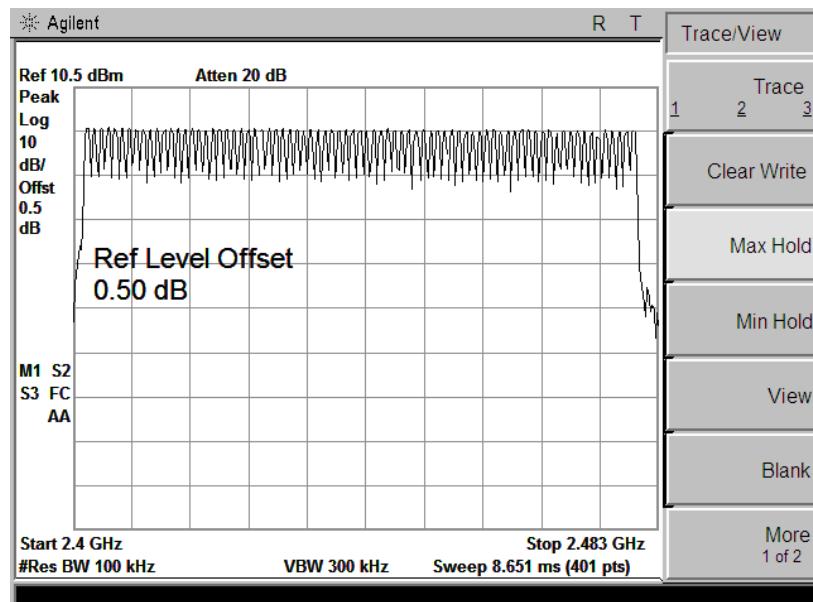

GFSK Mode

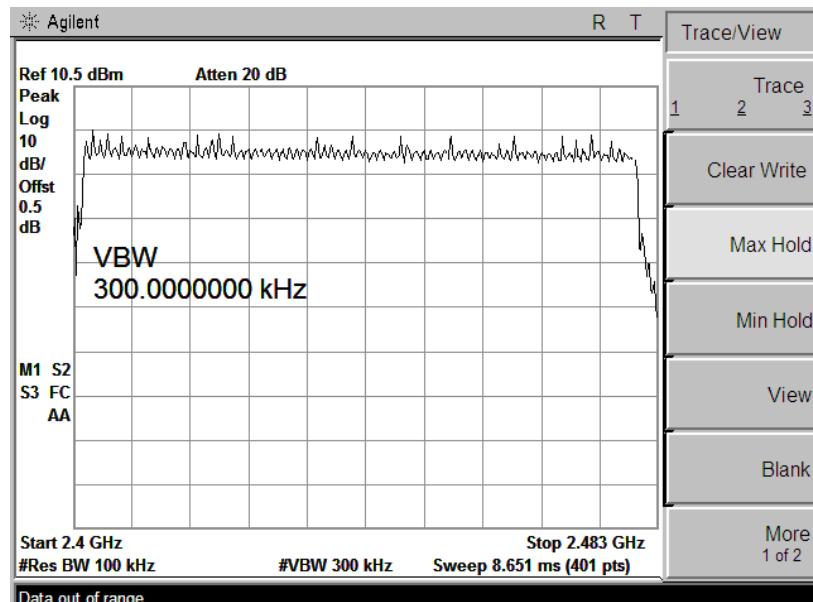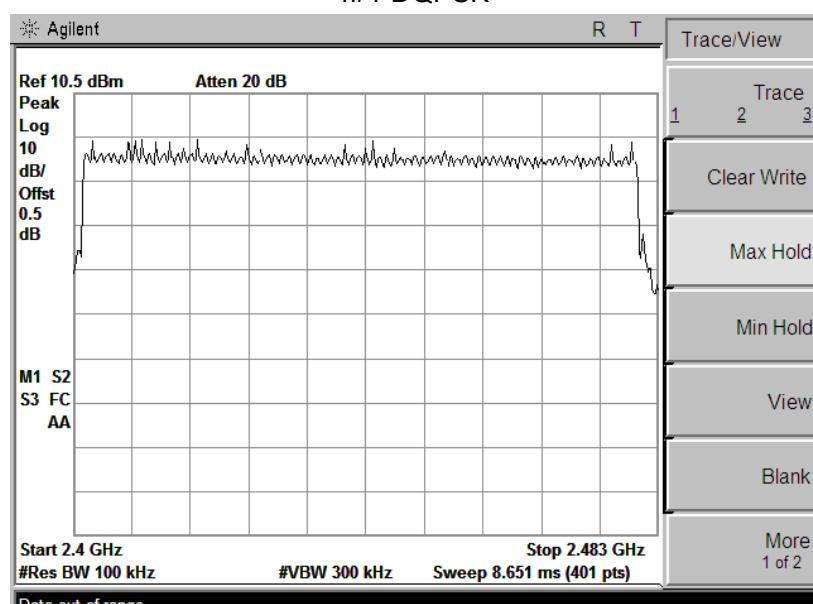 $\pi/4$ -DQPSK

8DPSK Mode

## 5.9 Dwell Time

### 5.9.1 Test Requirement

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### 5.9.2 Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as  $0.4 * \text{channel no. (s)}$ , the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length \* hope rate/ number of hopping channels \* 31.6s Hop rate=1600/s

### 5.9.3 Test Result

<b>Test Item:</b>	Dwell Time	<b>Temperature :</b>	25°C
<b>Test Engineer:</b>	Henry	<b>Relative Humidity :</b>	65%

Mode	Packet	Pulse Time (ms)	Dwell Time(ms)	Limit(ms)	Result
GFSK	DH1	0.42	134.4	400	Pass
	DH3	1.68	268.8	400	Pass
	DH5	2.81	299.5	400	Pass
$\pi/4$ DQPSK	2DH1	0.42	134.4	400	Pass
	2DH3	1.66	265.6	400	Pass
	2DH5	2.81	299.5	400	Pass
8DPSK	3DH1	0.40	128.0	400	Pass
	3DH3	1.68	268.8	400	Pass
	3DH5	2.82	300.6	400	Pass


Note:

1:DH1 Packet permit maximum  $1600/79/2=10.12$  hops per second in each channel (1 time slot RX. 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.


2: DH3 Packet permit maximum  $1600/79/4=5.06$  hops per second in each channel (3 time slots RX. 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.

3: DH5 Packet permit maximum  $1600/79/6=3.37$  hops per second in each channel (5 time slots RX. 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.


## GFSK Mode

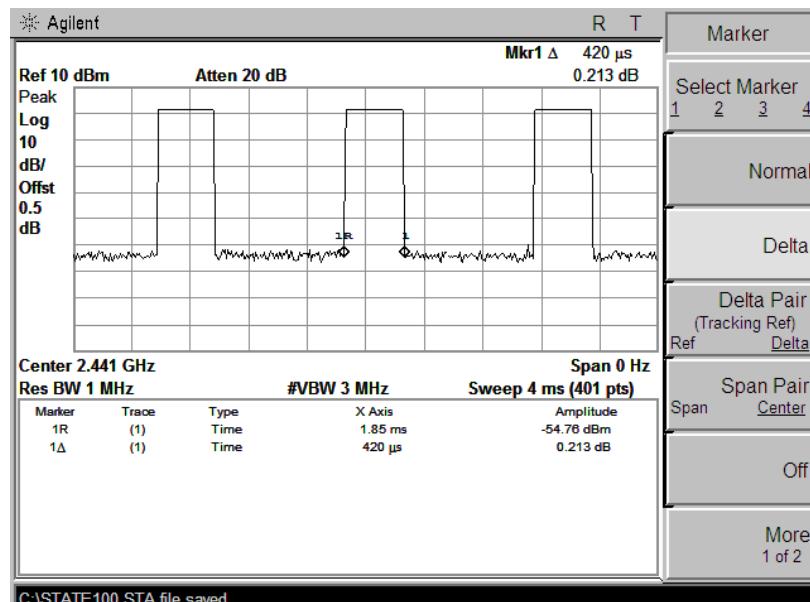


DH1

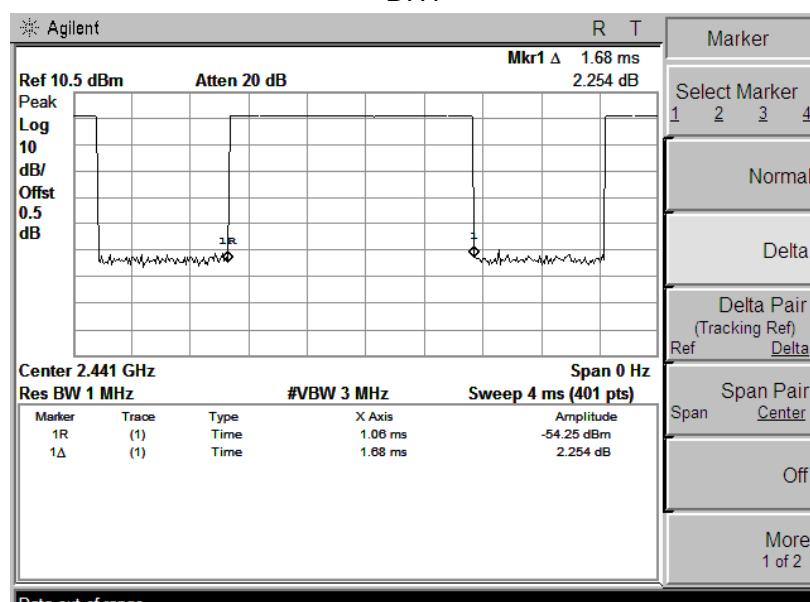


DH3

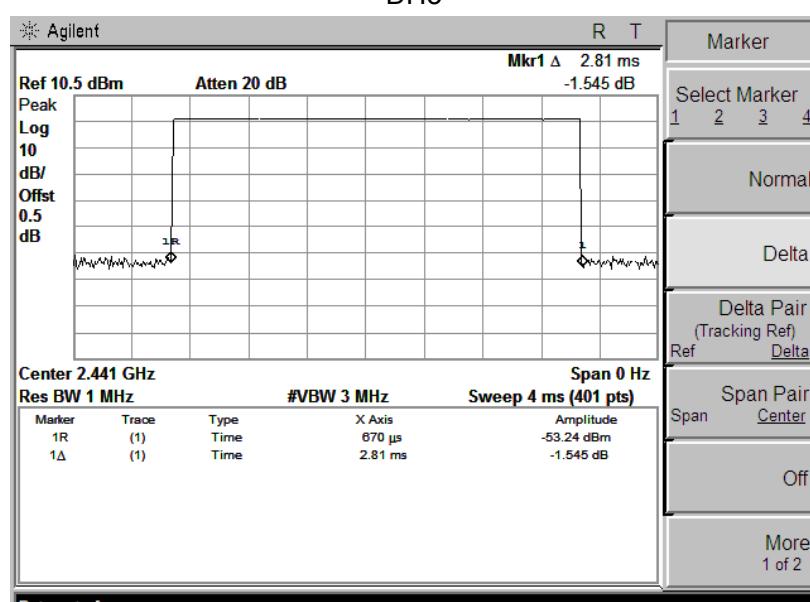


DH5

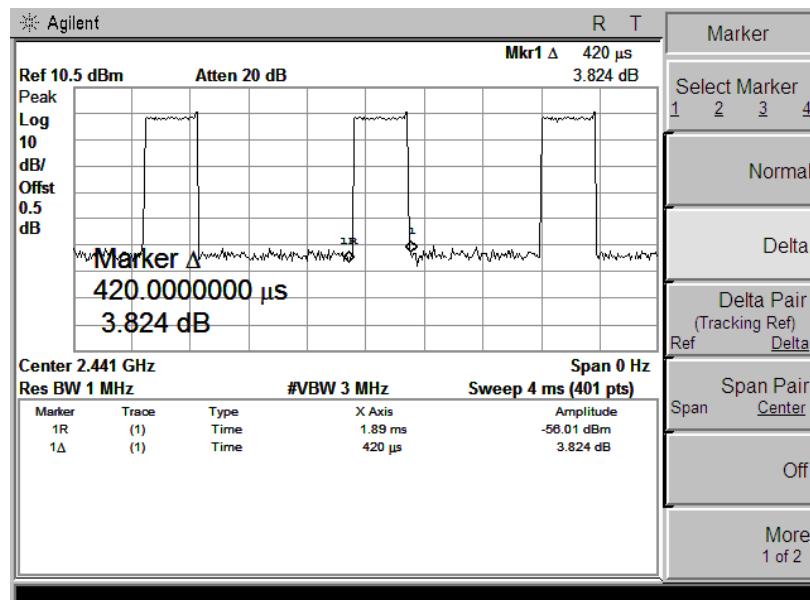$\pi/4$ -DQPSK Mode

DH1

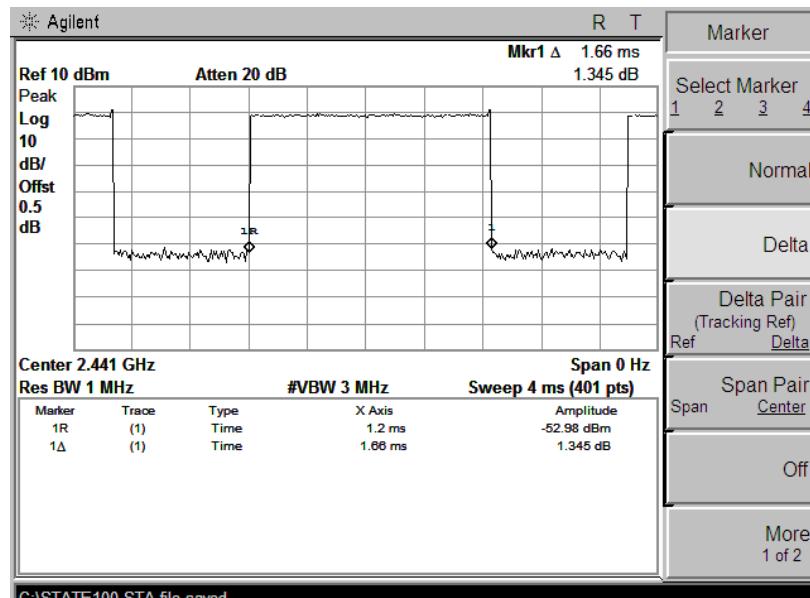


DH3

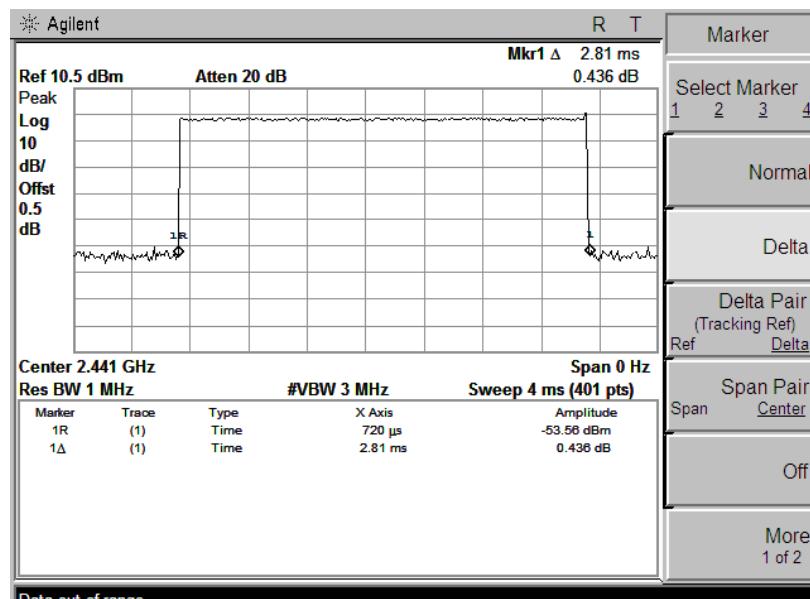


DH5


## 8DPSK Mode

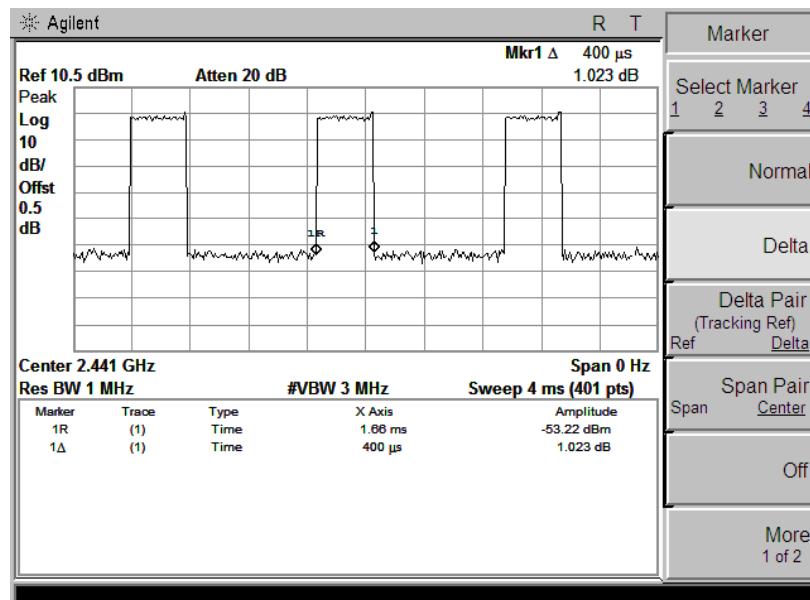

DH1

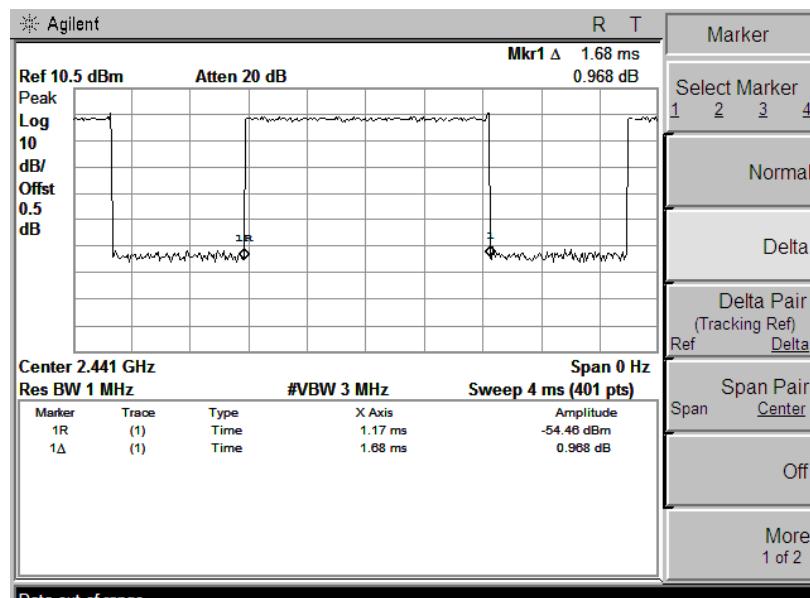

DH3

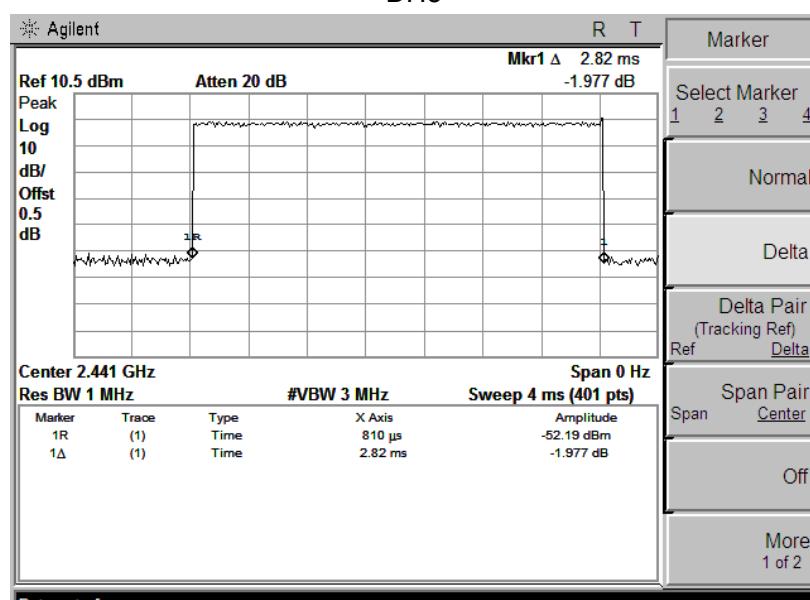

DH5

## 5.9 Band Edge and Conducted Spurious Emissions

### 5.9.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

### 5.9.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### 5.9.3 Test Result



Pass

#### Remark:


During the Conducted Spurious Emissions test, pre-scan the GFSK,  $\pi/4$ -QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

<b>Test Item:</b>	Band Edge	<b>Temperature :</b>	23°C
<b>Test Engineer:</b>	Kang	<b>Relative Humidity :</b>	65%




## Band Edge, Left Side

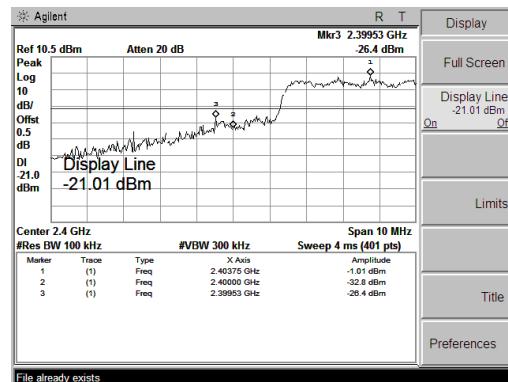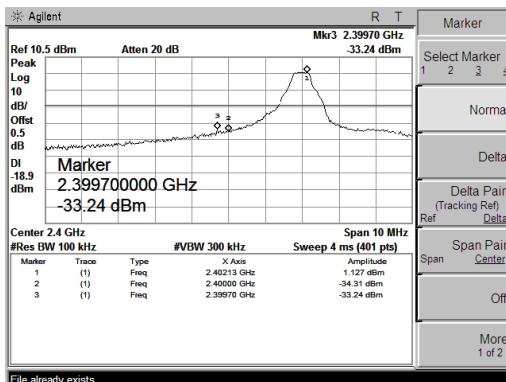

GFSK Mode, Non-Hopping

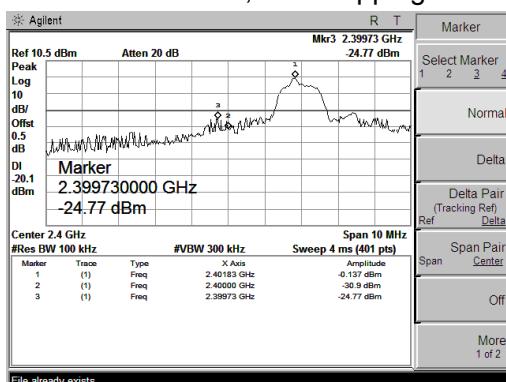


GFSK Mode, Non-Hopping

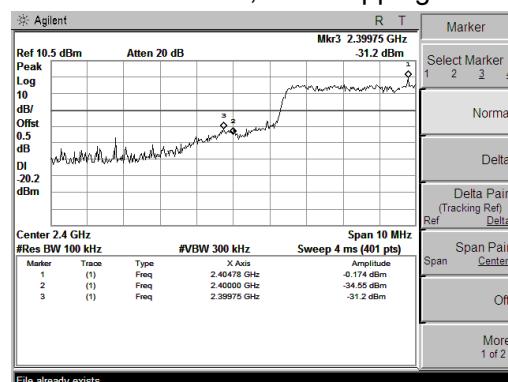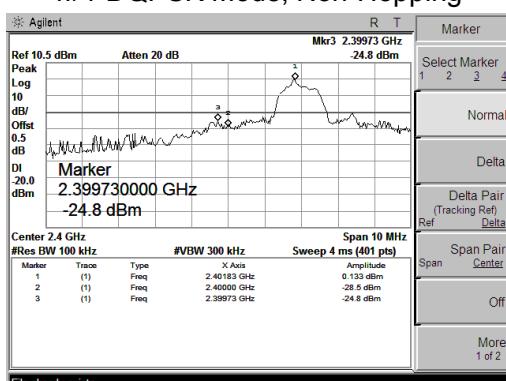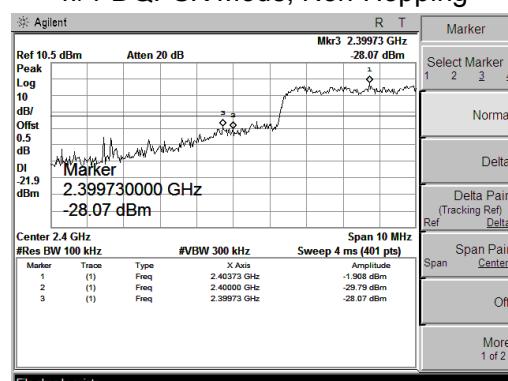 $\pi/4$ -DQPSK Mode, Non-Hopping $\pi/4$ -DQPSK Mode, Non-Hopping


8DPSK Mode, Non-Hopping

8DPSK Mode, Non-Hopping


## Band Edge, Right Side

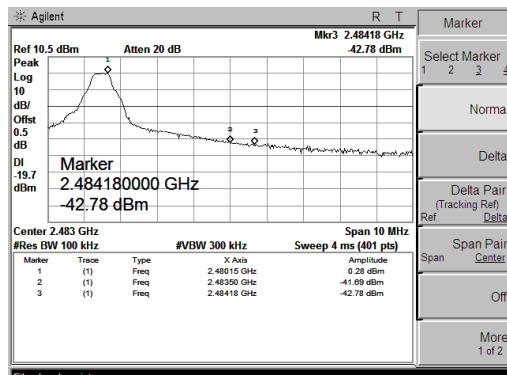


GFSK Mode, Non-Hopping

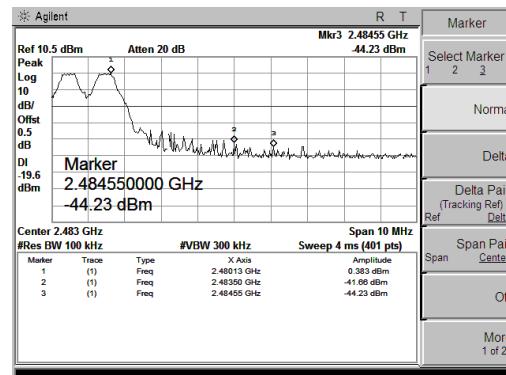


GFSK Mode, Non-Hopping

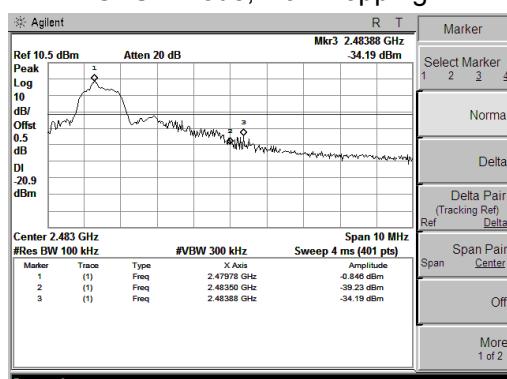


π/4-DQPSK Mode, Non-Hopping

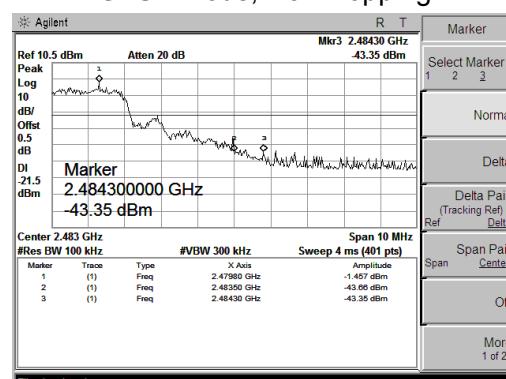

π/4-DQPSK Mode, Non-Hopping








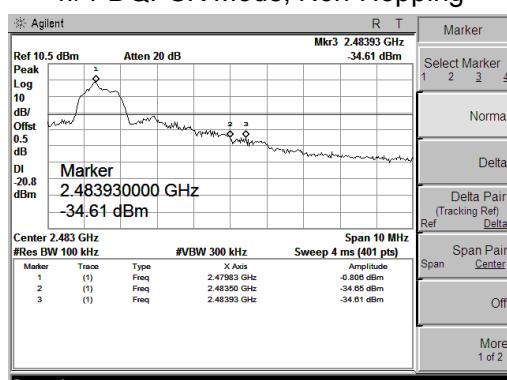


8DPSK Mode, Non-Hopping

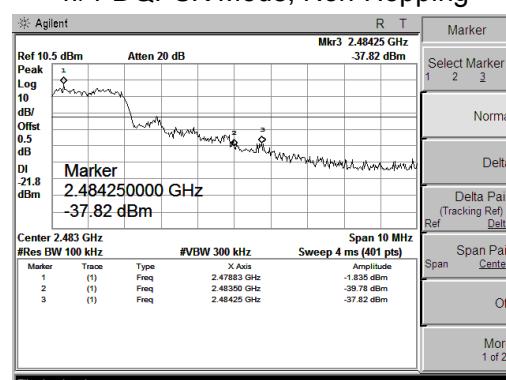

8DPSK Mode, Non-Hopping

## Conducted Spurious Emissions

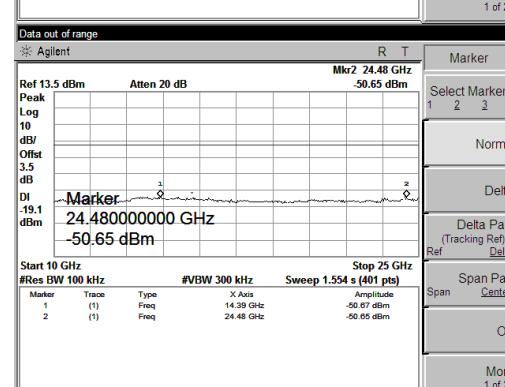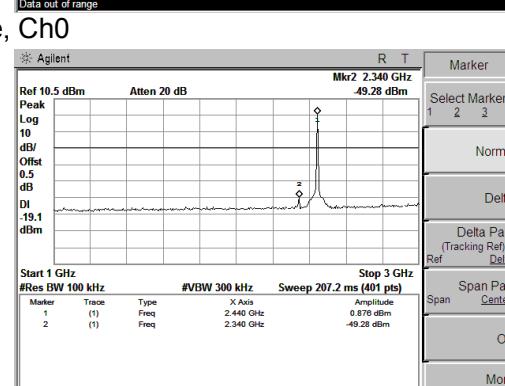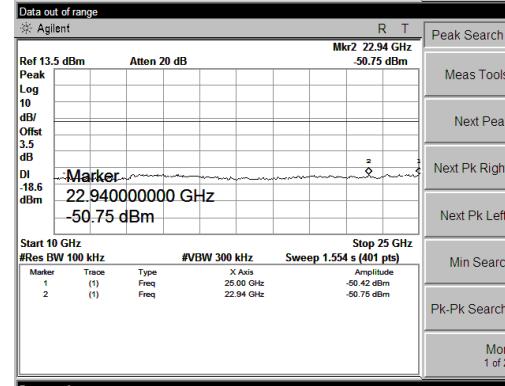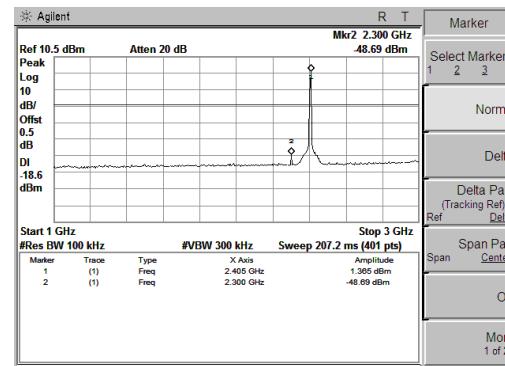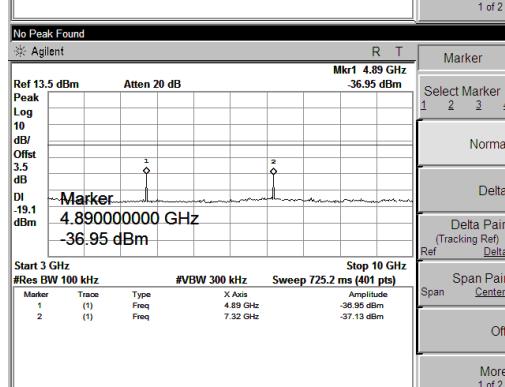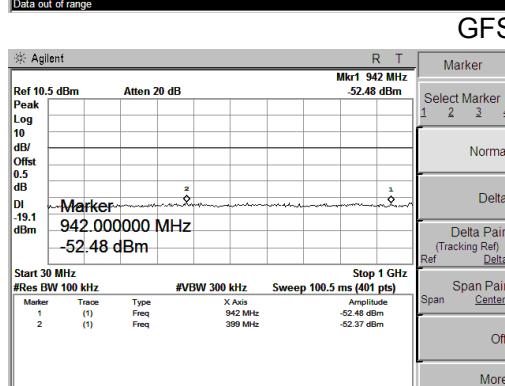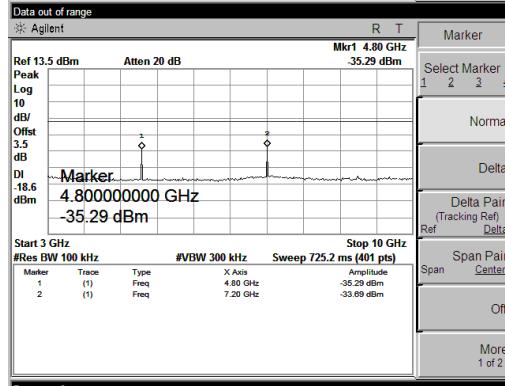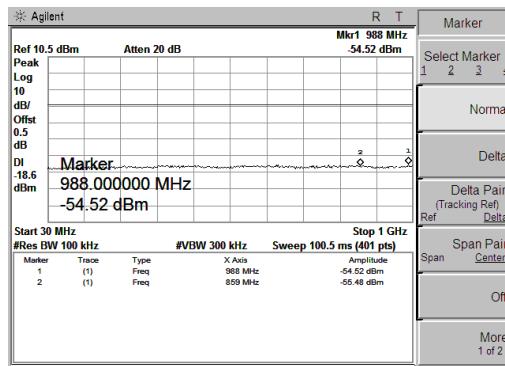

## GFSK Mode, Ch0

GFSK Mode, Ch0


Marker Select Marker 1 2 3 4

Normal Delta Delta Pair (Tracking Ref) Delta

Span Pair Center Off More 1 of 2

## GFSK Mode, Ch39

## Conducted Spurious Emissions

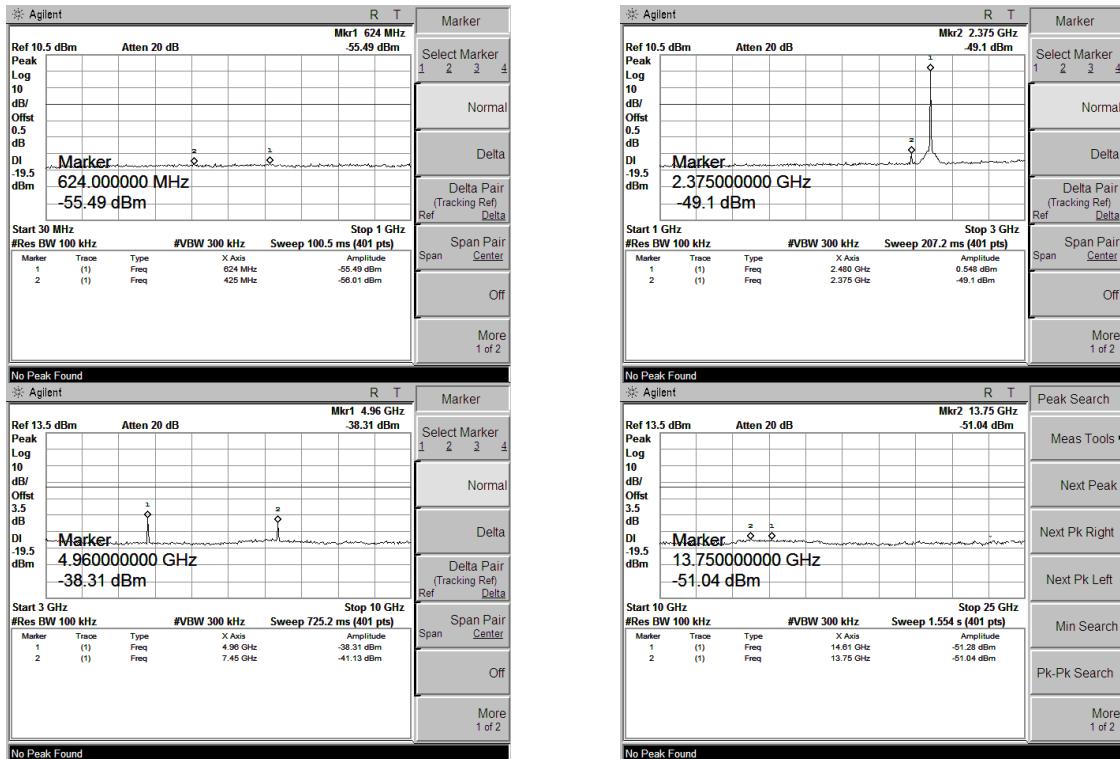

GFSK Mode, Ch78  
 $\pi/4$ -DQPSK Mode, Hopping


## 5.10 Restricted Frequency Bands

### 5.10.1 Test Requirement

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 5.10.2 Test Configuration

#### Test Setup:

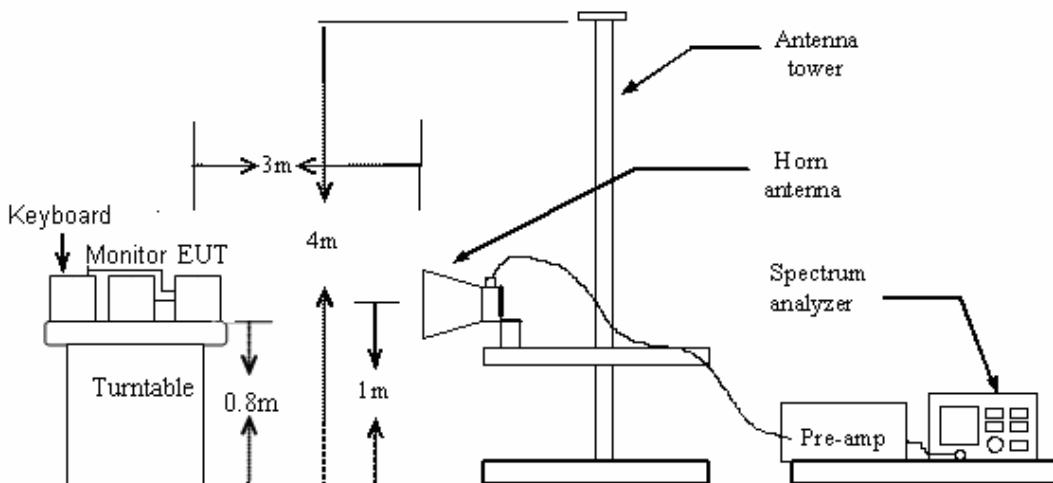

### 5.10.3 Test Procedure:

1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.

### 5.10.4 Test Result

Pass

Note: All test modes are performed, only the worst case is recorded in this report.

Please refer the following plots.



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
Guangdong ,China  
Tel: 0755-86026850 Fax: 0755-26013350


### Radiated Emission Measurement

File : HX-P150

Data : #11

Date: 2015-2-10

Time: 16:42:12

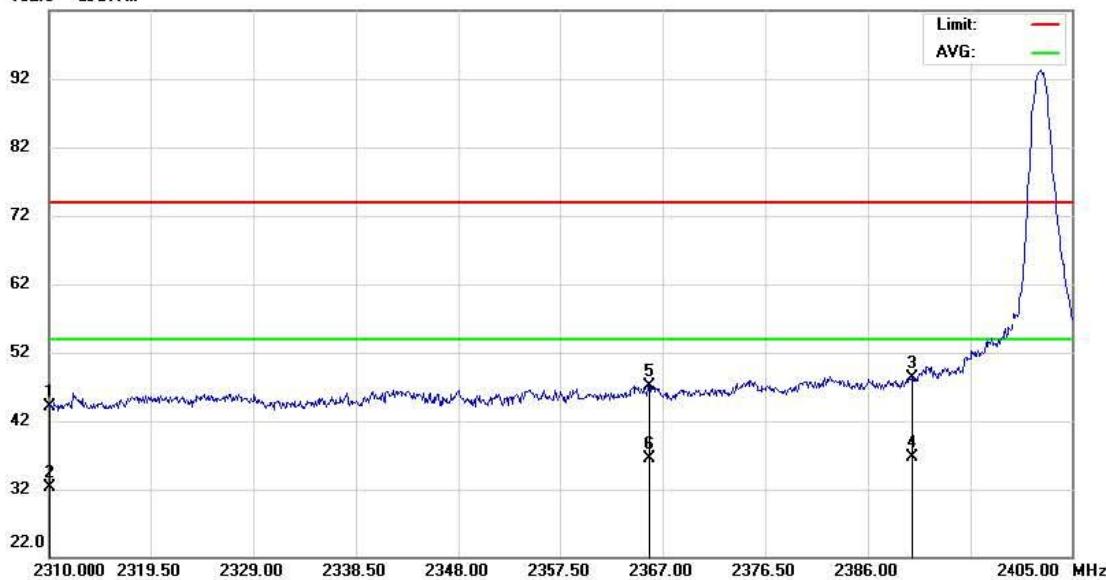102.0 dB<sub>UV/m</sub>

Site: site #1

Polarization: Vertical

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH0

Note:

No.	Mk.	Freq. MHz	Reading Level dB <sub>UV</sub>	Correct Factor dB	Measure- ment dB <sub>UV/m</sub>	Limit dB <sub>UV/m</sub>	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2310.000	34.13	10.04	44.17	74.00	-29.83	peak			
2		2310.000	22.30	10.04	32.34	54.00	-21.66	AVG			
3		2390.000	38.02	10.36	48.38	74.00	-25.62	peak			
4	*	2390.000	26.31	10.36	36.67	54.00	-17.33	AVG			
5		2365.765	36.90	10.26	47.16	74.00	-26.84	peak			
6		2365.765	26.30	10.26	36.56	54.00	-17.44	AVG			

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350


### Radiated Emission Measurement

File : HX-P150

Data : #12

Date: 2015-2-10

Time: 16:55:51

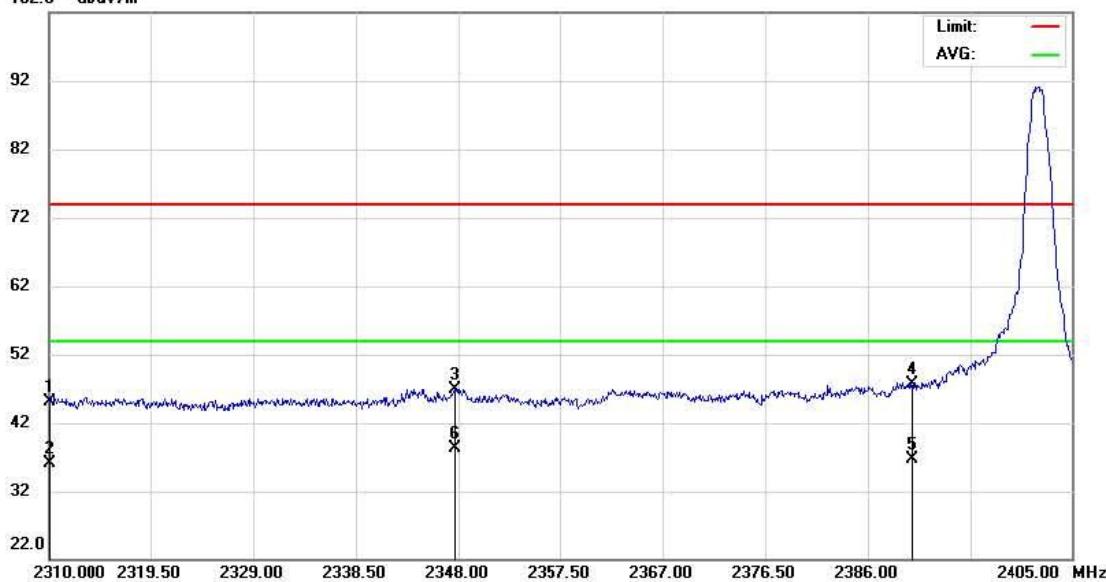102.0 dB<sub>UV/m</sub>

Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH0

Note:

No.	Mk.	Freq. MHz	Reading Level dB <sub>UV</sub>	Correct Factor dB	Measure- ment dB <sub>UV/m</sub>	Limit dB <sub>UV/m</sub>	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2310.000	35.10	10.04	45.14	74.00	-28.86	peak			
2		2310.000	26.10	10.04	36.14	54.00	-17.86	AVG			
3		2347.620	36.81	10.19	47.00	74.00	-27.00	peak			
4		2390.000	37.36	10.36	47.72	74.00	-26.28	peak			
5		2390.000	26.41	10.36	36.77	54.00	-17.23	AVG			
6	*	2347.620	28.10	10.19	38.29	54.00	-15.71	AVG			

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350


### Radiated Emission Measurement

File : HX-P150

Data : #13

Date: 2015-2-10

Time: 17:09:42

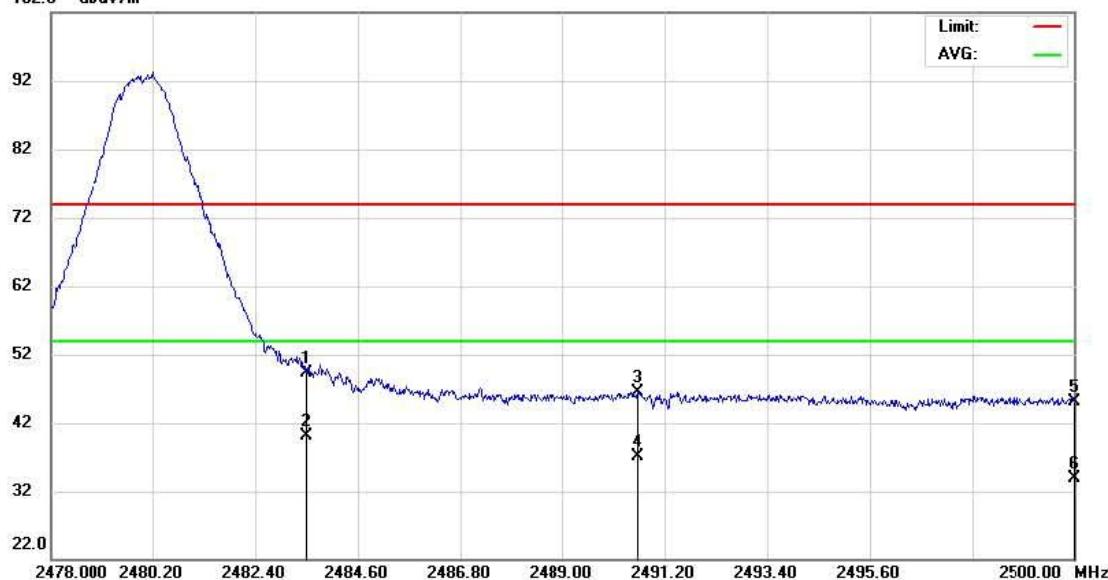102.0 dB<sub>UV/m</sub>

Site: site #1

Polarization: **Vertical**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH78

Note:

No.	Mk.	Freq. MHz	Reading Level dB <sub>UV</sub>	Correct Factor dB	Measure- ment dB <sub>UV/m</sub>	Limit dB <sub>UV/m</sub>	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2483.500	38.65	10.73	49.38	74.00	-24.62	peak			
2 *		2483.500	29.30	10.73	40.03	54.00	-13.97	AVG			
3		2490.628	35.74	10.76	46.50	74.00	-27.50	peak			
4		2490.628	26.43	10.76	37.19	54.00	-16.81	AVG			
5		2500.000	34.36	10.80	45.16	74.00	-28.84	peak			
6		2500.000	23.16	10.80	33.96	54.00	-20.04	AVG			

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:



Address: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park  
 Guangdong ,China  
 Tel: 0755-86026850 Fax: 0755-26013350


### Radiated Emission Measurement

File : HX-P150

Data : #14

Date: 2015-2-10

Time: 17:18:56

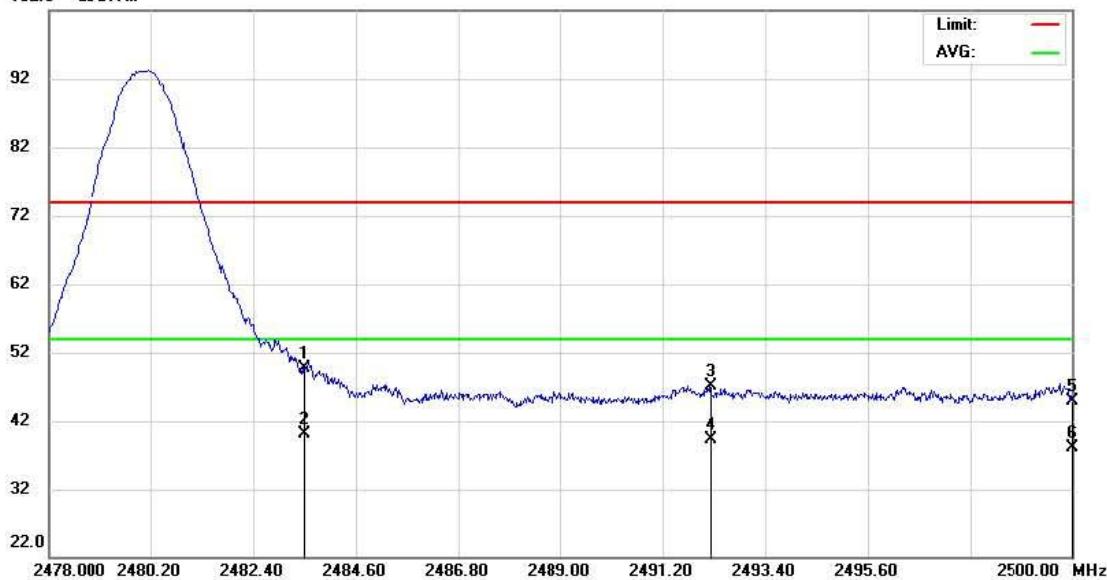102.0 dB<sub>UV/m</sub>

Site: site #1

Polarization: **Horizontal**

Temperature: 23

Limit: FCC RF LIMIT PEAK

Power: DC 5.0V by USB port

Humidity: 52 %

EUT: Clip-It Wireless Speaker

Distance: 3m

M/N: HX-P150

Mode: GFSK-CH78

Note:

No.	Mk.	Freq. MHz	Reading Level dB <sub>UV</sub>	Correct Factor dB	Measure- ment dB <sub>UV/m</sub>	Limit dB <sub>UV/m</sub>	Over dB	Detector	Antenna Height cm	Table Degree	Comment
1		2483.500	38.97	10.73	49.70	74.00	-24.30	peak			
2	*	2483.500	29.30	10.73	40.03	54.00	-13.97	AVG			
3		2492.212	36.32	10.77	47.09	74.00	-26.91	peak			
4		2492.212	28.61	10.77	39.38	54.00	-14.62	AVG			
5		2500.000	34.18	10.80	44.98	74.00	-29.02	peak			
6		2500.000	27.30	10.80	38.10	54.00	-15.90	AVG			

\*:Maximum data    x:Over limit    !:over margin

Engineer Signature:

End of Report