


Omago Smart Diaper Sensor Dock User Manual

Thank you for purchasing Omago Intelligent Diaper Sensor. Please read this user manual in detail and follow up the instruction.

*** Omago Intelligent Diaper Sensor is not included, you can purchase it separately

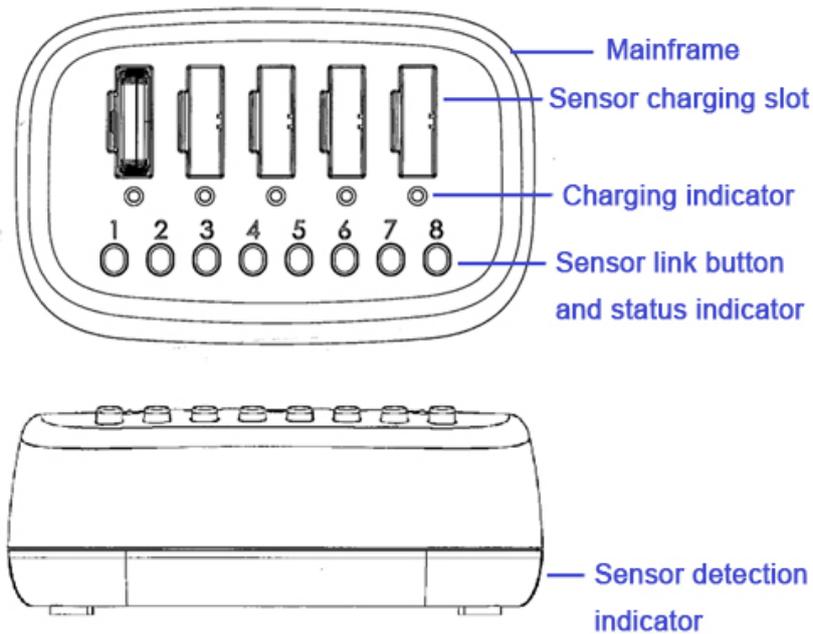

Instructions

Charge Omago Intelligent Diaper Sensor before starting to use.

The device will be a normal state by the indicator from LED_1 to LED_8 flickering back and forth one time.

1. Pairing the Dock with the Intelligent Diaper Sensor

The Dock can pair with up to 8 Smart Diaper Sensors. You can get every paired Smart Diaper sensor status by the led on Dock.

Please select the sensor link button on the Dock, such as 1. After pressing the link button, the button led will flash blue. Take one Intelligent Diaper Sensor and press the connection button for 3-5 seconds for pairing. The link button led will become constant blue if pairing successfully. If not, please repeat the link process. Please pair all these 8 Intelligent Diaper Sensor by the above

process and one by one each time. You can number the Intelligent Diaper Sensors by a sticker for corresponding to the link button on Dock.

2. Battery charge

Omago Intelligent Diaper Sensor uses a built-in rechargeable battery. Before starting to use, please insert the sensor into charge slot for charging the battery completely.

When the link button led on Dock flashing purple, please insert the sensor into charge slot for charging. The charging led will become constant green after complete charging.

3. Intelligent Diaper Sensor re-paired with the Dock

When the sensor inserting to charge slot for charging, it will be automatically unpaired with the corresponding link button on the Dock. The link button will flash blue. You can press the link button off. Take a new unpaired Intelligent Diaper Sensor and re-pair it with this link button by the above pairing process and numbering.

If the Intelligent Diaper Sensor is out of connection range, the link button led on Dock will flash blue and sensor led will flash red. For example, if the baby is carried away from the nursery room (the link button corresponding to the Dock will flash blue and the sensor flashes red), it will automatically connect to the Dock again when coming back to the nursery room.

4. Put Smart Diaper Sensor into strap and stick to the position of the diaper corresponding to the human excretory hole to get the best effect.

5. When the Sensor detects PEE volume of the diaper has reached a certain level or the stool, the breathing led on the Dock will flash, and the corresponding sensor connection button will flash blue and red. Please change the diaper for cleaning purposes. After changing the diaper, the Dock breathing led will be off and the link button turns constant blue.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- . Reorient or relocate the receiving antenna.*
- . Increase the separation between the equipment and receiver.*
- . Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.*
- . Consult the dealer or an experienced radio/TV technician for help.*

FCC Caution: To assure continued compliance, any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. (Example - use only shielded interface cables when connecting to computer or peripheral devices).

FCC Radiation Exposure Statement

This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The antennas used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.