

FCC Test Report

Equipment : Thermal Label Printer
Brand Name : Godex
Model Name : STE5
FCC ID : WD6STE5
Standard : 47 CFR FCC Part 15.225
Operating Band : 13.553 – 13.567 MHz (channel freq. 13.56 MHz)
Equipment Class : DXX
Applicant : GODEX INTERNATIONAL CO., LTD.
Manufacturer : 13F., No.168, Jian-Kang Rd., Zhonghe Dist.,
New Taipei City 235, Taiwan R.O.C.

The product sample received on Sep. 27, 2013 and completely tested on Dec. 03, 2013. We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2009 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:


Vic Hsiao / Supervisor



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Accessories	6
1.3	Testing Applied Standards	6
1.4	Testing Location Information	6
1.5	Measurement Uncertainty	7
2	TEST CONFIGURATION OF EUT	8
2.1	The Worst Case Modulation Configuration	8
2.2	Test Channel Frequencies Configuration.....	8
2.3	The Worst Case Measurement Configuration	8
2.4	Test Setup Diagram	9
3	TRANSMITTER TEST RESULT	11
3.1	AC Power-line Conducted Emissions	11
3.2	Emission Bandwidth.....	17
3.3	Field Strength of Fundamental Emissions and Spectrum Mask.....	19
3.4	Transmitter Radiated Unwanted Emissions	21
3.5	Frequency Stability.....	30
4	TEST EQUIPMENT AND CALIBRATION DATA.....	32
APPENDIX A. TEST PHOTOS		
APPENDIX B. PHOTOGRAPHS OF EUT		

Summary of Test Result

Conformance Test Specifications					
Report Clause	Ref. Std. Clause	Description	Measured	Limit	Result
1.1.2	15.203	Antenna Requirement	Antenna connector mechanism complied	FCC 15.203	Complied
3.1	15.207	AC Power-line Conducted Emissions	[dBuV]: 0.1540270MHz 51.60 (Margin 14.18dB) – QP 30.63 (Margin 25.15dB) - AV	FCC 15.207	Complied
3.2	15.215(c)	Emission Bandwidth	20dB Bandwidth 2.47 [kHz] FL: 13.55923 MHz FH: 13.56171 MHz	Fall in band $F_L \geq 13.553$ MHz $F_H \leq 13.567$ MHz	Complied
3.3	15.225(a)~(d)	Field Strength of Fundamental Emissions and Spectrum Mask	Fundamental Emissions quasi peak:47.34 dBuV/m at 3m Device complies with spectrum mask – refer to test data	124 dBuV/m at 3m	Complied
3.4	15.225(d)	Transmitter Radiated Unwanted Emissions	[dBuV/m at 3m]: 622.670MHz 45.76 (Margin 0.24dB) - QP	FCC 15.209	Complied
3.5	15.225(e)	Frequency Stability	38.42 ppm	$\pm 0.01\%$ (100ppm)	Complied



SPORTON INTERNATIONAL INC.
TEL : 886-3-327-3456
FAX : 886-3-327-0973

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range	Modulation	Ch. Frequency (MHz)	Channel Number	Field Strength (dBuV/m)
13.553 – 13.567 MHz	ISO 14443-2 (ASK)	13.56	1	47.34
Note 1: Field strength performed quasi peak level at 3m.				

1.1.2 Antenna Information

Antenna Category	
<input type="checkbox"/>	Equipment placed on the market without antennas
<input checked="" type="checkbox"/>	Integral antenna (antenna permanently attached)
<input type="checkbox"/>	External antenna (dedicated antennas)

1.1.3 Type of EUT

Identify EUT	
EUT Serial Number	N/A
Presentation of Equipment	<input type="checkbox"/> Production ; <input type="checkbox"/> Pre-Production ; <input checked="" type="checkbox"/> Prototype
Type of EUT	
<input checked="" type="checkbox"/>	Stand-alone
<input type="checkbox"/>	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
<input type="checkbox"/>	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.:
<input type="checkbox"/>	Other:


1.1.4 Test Signal Duty Cycle

Operated Mode for Worst Duty Cycle	
<input checked="" type="checkbox"/>	Operated test mode for worst duty cycle
Test Signal Duty Cycle (x)	Voltage Duty Factor [dB] – (20 log 1/x)
<input checked="" type="checkbox"/> 100%	0

1.1.5 EUT Operational Condition

Supply Voltage	<input checked="" type="checkbox"/> AC mains	<input type="checkbox"/> DC	
Type of DC Source	<input type="checkbox"/> Internal DC supply	<input checked="" type="checkbox"/> External DC adapter	<input type="checkbox"/> Battery

1.2 Accessories

Accessories Information				
Switching Adapter	Brand Name	GoDEX	Model Name	WDS060240
	Power Rating	I/P: 100-240V ~1.6A 50-60Hz ; O/P: 24V  2.5A		

Reminder: Regarding to more detail and other information, please refer to user manual.

1.3 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2009
- ♦ FCC KDB 174176

1.4 Testing Location Information

Testing Location				
<input checked="" type="checkbox"/>	HWA YA	ADD : No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.		
		TEL : 886-3-327-3456 FAX : 886-3-327-0973		
Test Condition		Test Site No.	Test Engineer	Test Environment
AC Conduction		CO04-HY	Zeus	24°C / 49%
RF Conducted		TH01-HY	Cain	23.6°C / 67%
Radiated Emission		03CH02-HY	Daniel	21.9°C / 49%

1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty		
Test Item		Uncertainty
AC power-line conducted emissions		± 2.26 dB
Emission bandwidth		± 1.42 %
Unwanted emissions, conducted	9 – 150 kHz	± 0.38 dB
	0.15 – 30 MHz	± 0.42 dB
	30 – 1000 MHz	± 0.51 dB
All emissions, radiated	9 – 150 kHz	± 2.49 dB
	0.15 – 30 MHz	± 2.28 dB
	30 – 1000 MHz	± 2.56 dB
Temperature		± 0.8 °C
Humidity		± 3 %
DC and low frequency voltages		± 3 %
Time		± 1.42 %
Duty Cycle		± 1.42 %

2 Test Configuration of EUT

2.1 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Modulation Mode	Field Strength (dBuV/m at 3 m)
NFC-ASK	47.34

2.2 Test Channel Frequencies Configuration


Test Channel Frequencies Configuration	
Modulation Mode	Test Channel Frequencies (MHz) – FX (Frequencies Abbreviations)
NFC-ASK	13.56-(F1)

2.3 The Worst Case Measurement Configuration


The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	Operating Mode Description
1	AC Power & Radio link

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Field Strength of Fundamental Emissions Spectrum Mask, Transmitter Radiated Unwanted Emissions Frequency Stability
Test Condition	Radiated measurement
User Position	<input checked="" type="checkbox"/> EUT will be placed in fixed position.
	<input type="checkbox"/> EUT will be placed in mobile position and operating multiple positions. EUT shall be performed two orthogonal planes.
	<input type="checkbox"/> EUT will be a hand-held or body-worn battery-powered devices and operating multiple positions. EUT shall be performed two or three orthogonal planes.
Operating Mode < 1GHz	<input checked="" type="checkbox"/> 1. AC Power & Radio link
Modulation Mode	NFC-ASK


2.4 Test Setup Diagram

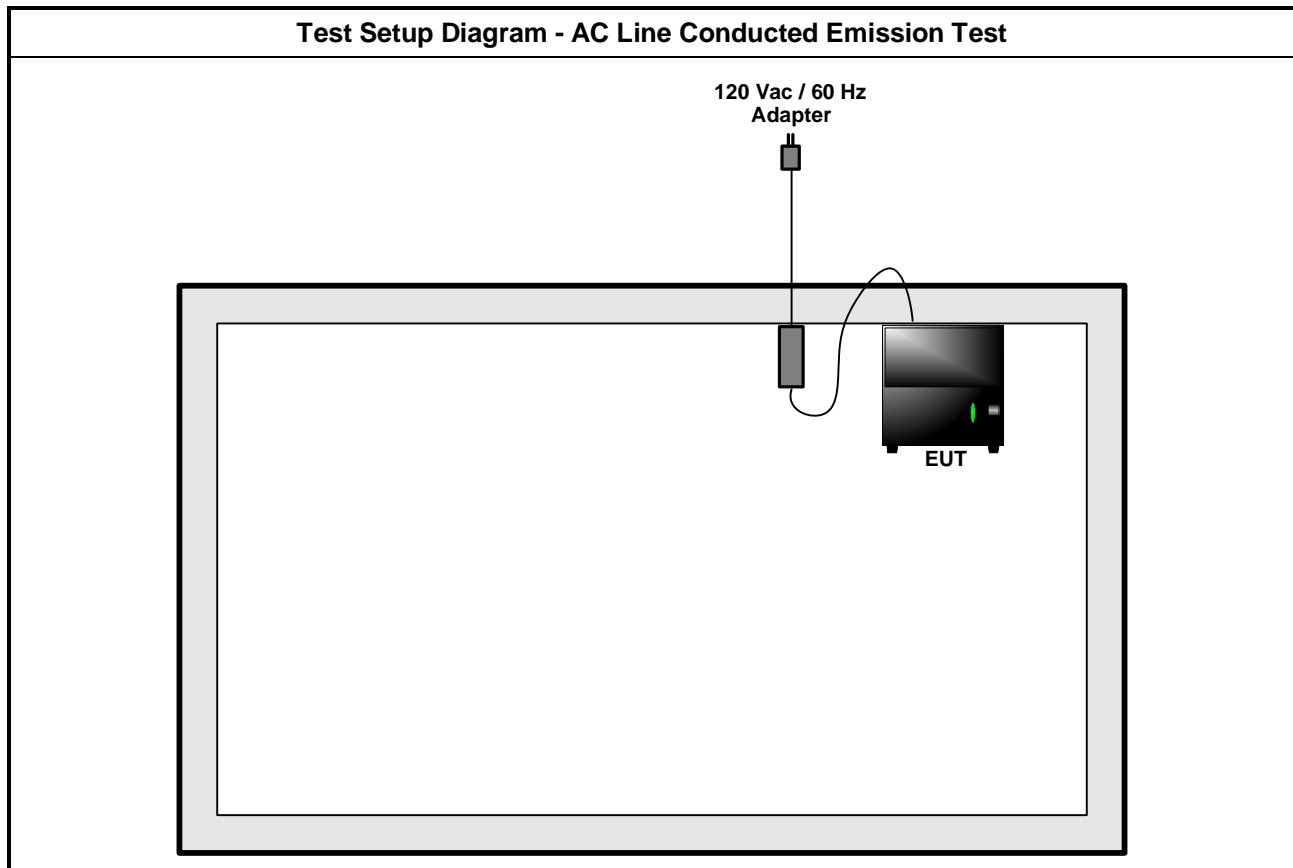

Test Setup Diagram - Radiated Below 30MHz Test

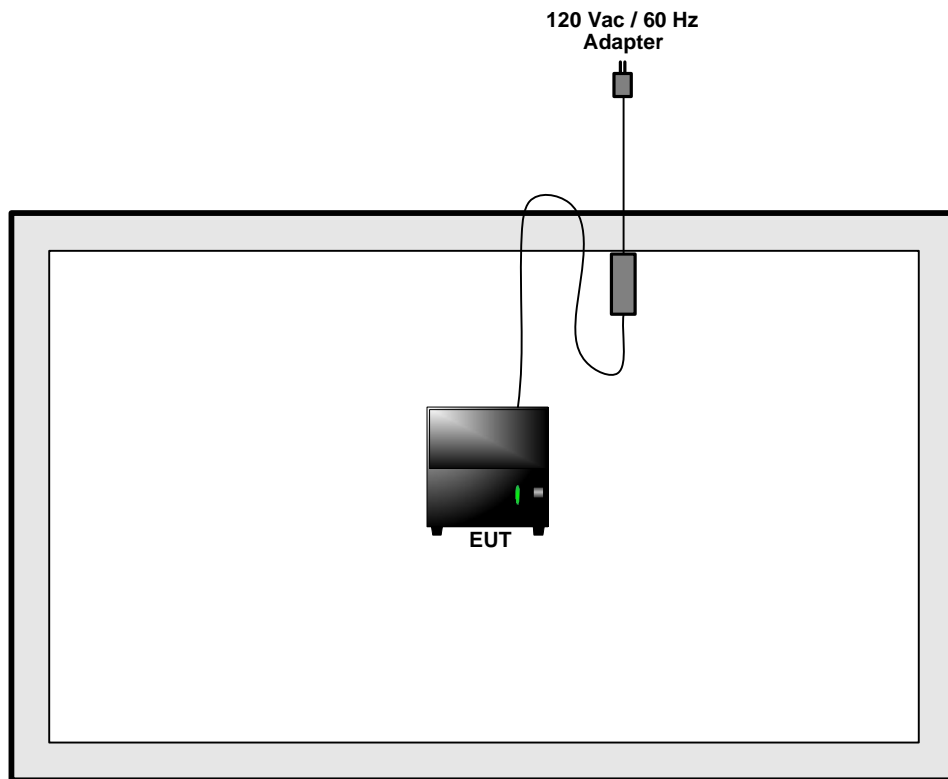

Test Setup Diagram - Radiated Above 30MHz Test

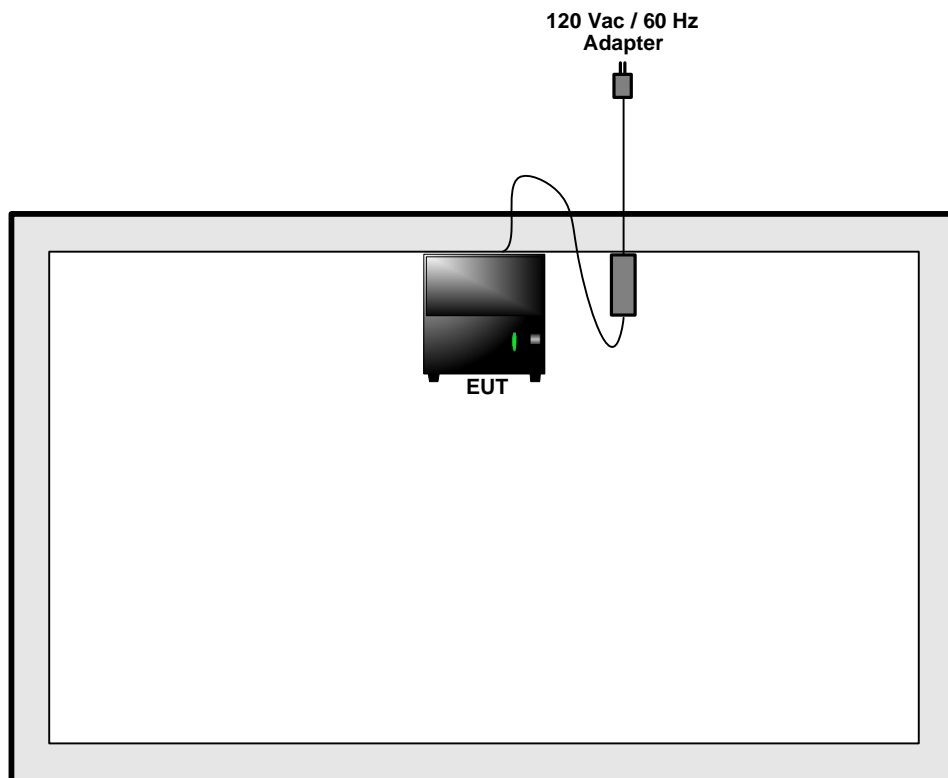

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10-2009, clause 6.2 for AC power-line conducted emissions.
<input checked="" type="checkbox"/>	If AC conducted emissions fall in operating band, then following below test method confirm final result.
<input type="checkbox"/>	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
<input checked="" type="checkbox"/>	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

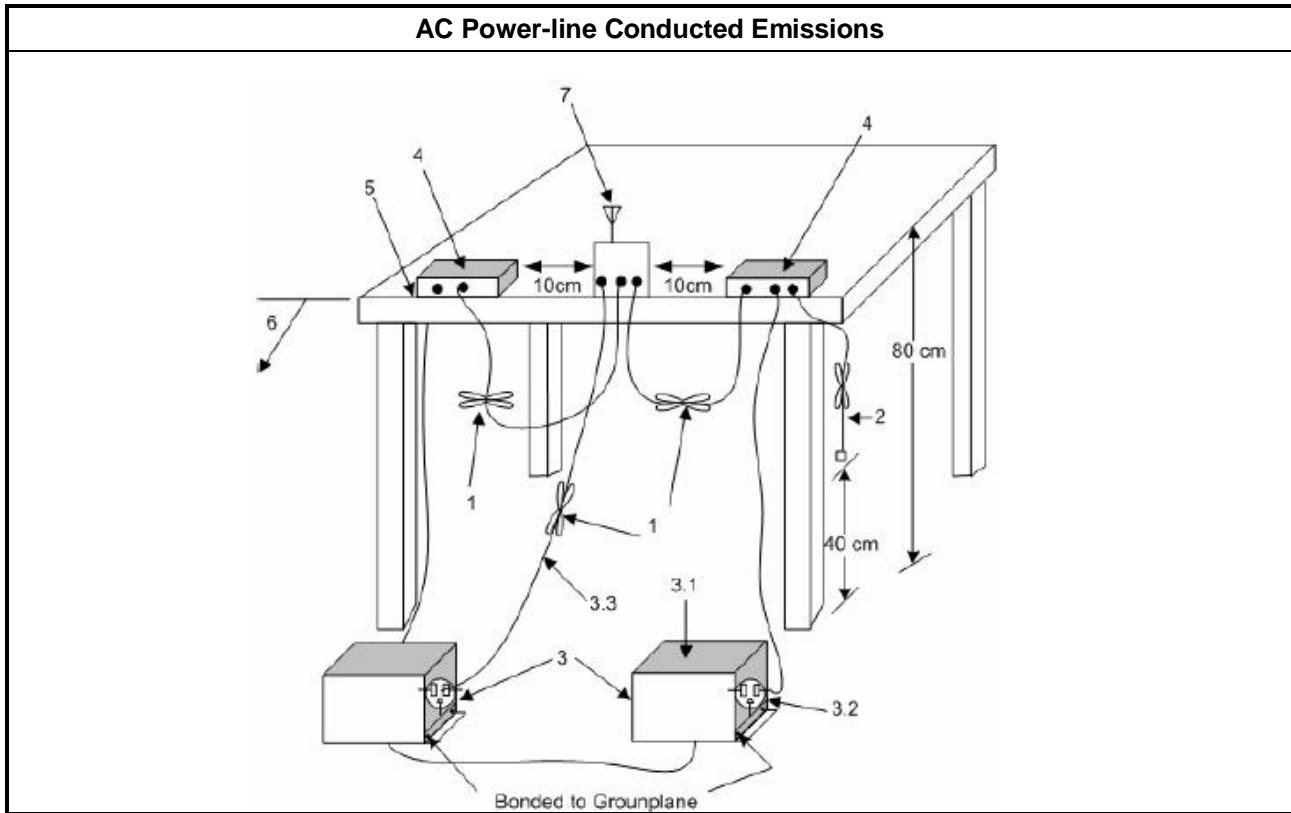


3.1.5 Test Result of AC Power-line Conducted Emissions

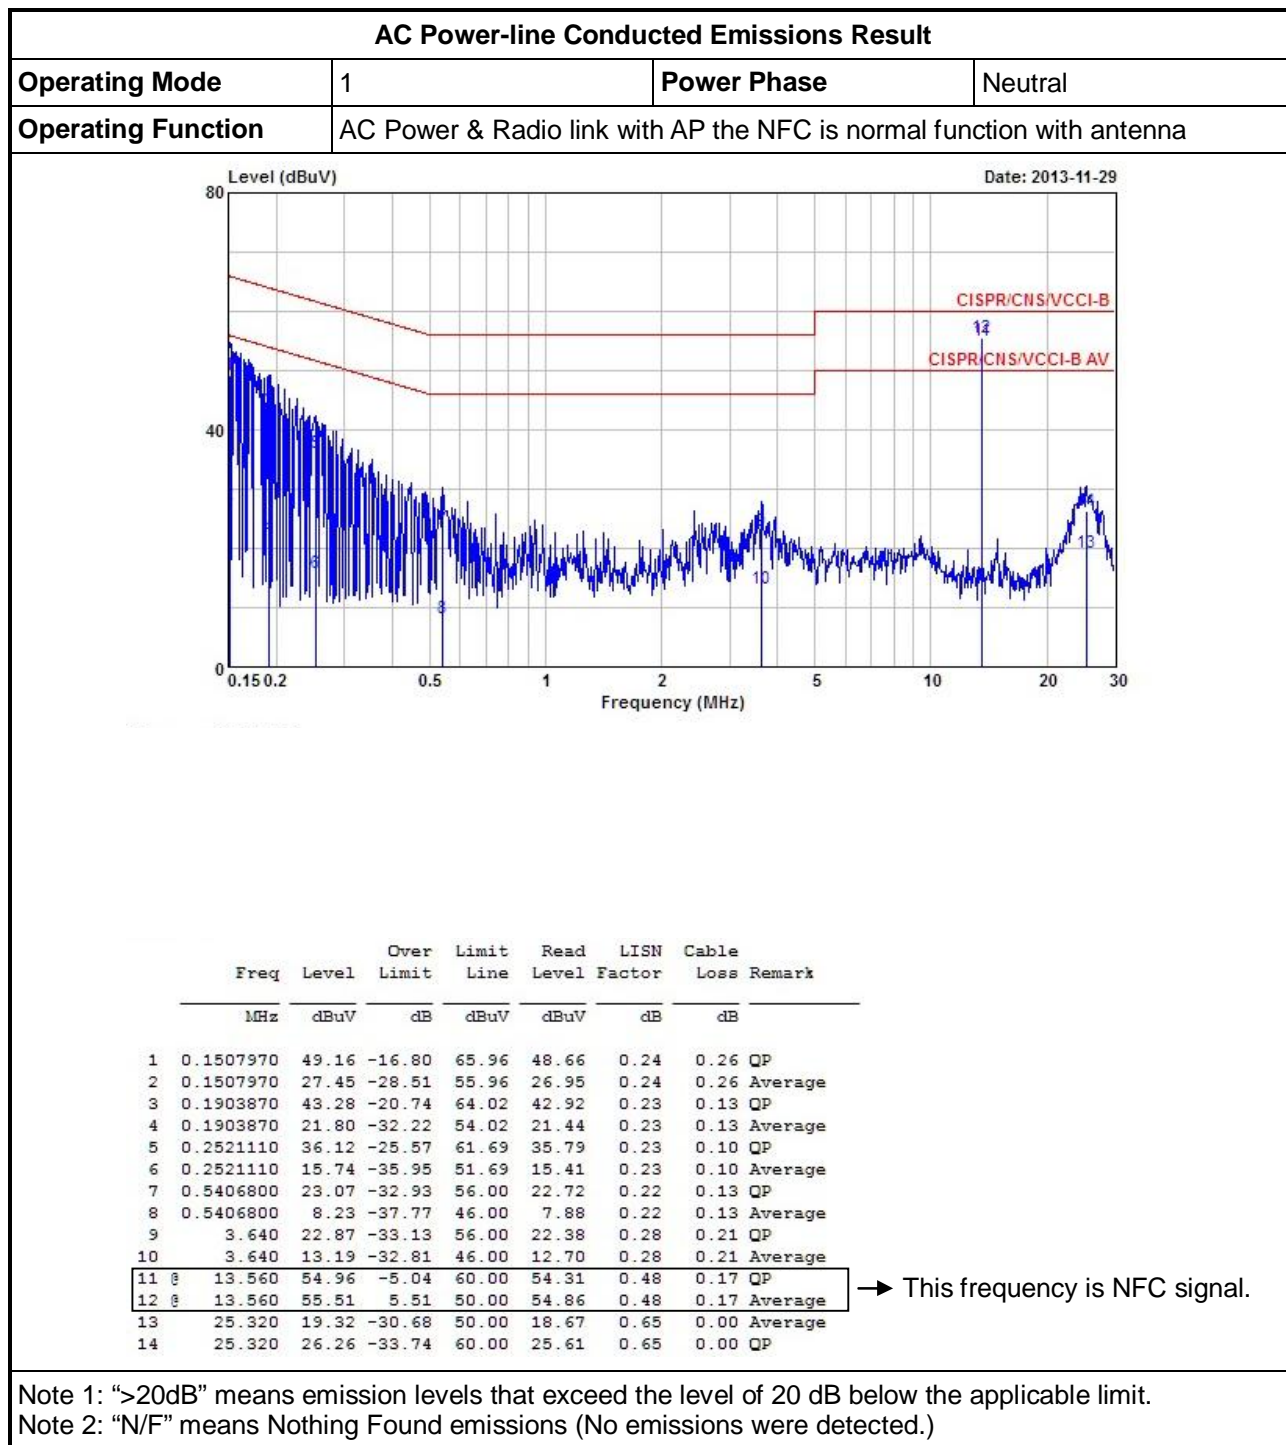

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with AP the NFC is normal function with antenna		

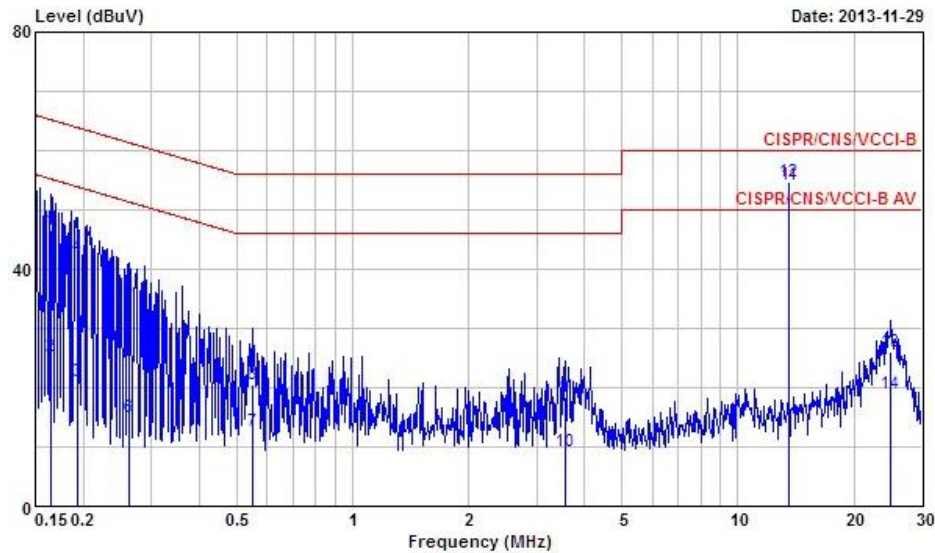

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1641380	46.65	-18.60	65.25	46.33	0.11	0.21	QP
2	0.1641380	25.27	-29.98	55.25	24.95	0.11	0.21	Average
3	0.1934380	21.00	-32.89	53.89	20.77	0.11	0.12	Average
4	0.1934380	42.14	-21.75	63.89	41.91	0.11	0.12	QP
5	0.2630270	34.99	-26.35	61.34	34.78	0.11	0.10	QP
6	0.2630270	15.02	-36.32	51.34	14.81	0.11	0.10	Average
7	0.5522610	12.56	-33.44	46.00	12.32	0.10	0.14	Average
8	0.5522610	20.54	-35.46	56.00	20.30	0.10	0.14	QP
9	3.570	18.30	-37.70	56.00	17.93	0.15	0.22	QP
10	3.570	9.16	-36.84	46.00	8.79	0.15	0.22	Average
11	13.560	54.27	-5.73	60.00	53.83	0.27	0.17	QP
12	13.560	54.83	4.83	50.00	54.39	0.27	0.17	Average
13	24.920	26.03	-33.97	60.00	25.68	0.34	0.01	QP
14	24.920	18.82	-31.18	50.00	18.47	0.34	0.01	Average


→ This frequency is NFC signal.

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Neutral
Operating Function	AC Power & Radio link with AP the NFC is normal function and antenna terminal		

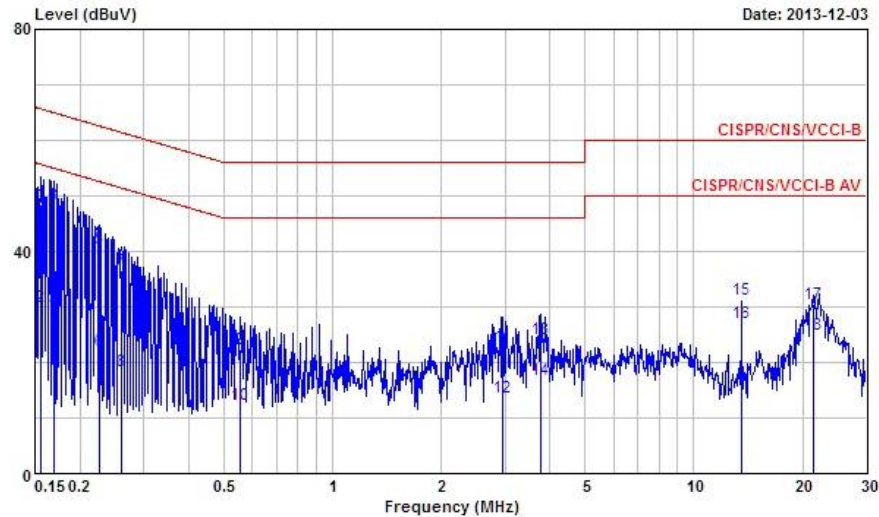


	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.1556680	48.52	-17.17	65.69	48.03	0.24	0.25	QP
2	0.1556680	30.02	-25.67	55.69	29.53	0.24	0.25	Average
3	0.1694400	48.37	-16.62	64.99	47.94	0.24	0.19	QP
4	0.1694400	29.50	-25.49	54.99	29.07	0.24	0.19	Average
5	0.2255640	40.42	-22.19	62.61	40.09	0.23	0.10	QP
6	0.2255640	22.02	-30.59	52.61	21.69	0.23	0.10	Average
7	0.2602550	36.46	-24.96	61.42	36.13	0.23	0.10	QP
8	0.2602550	18.47	-32.95	51.42	18.14	0.23	0.10	Average
9	0.5551950	22.31	-33.69	56.00	21.95	0.22	0.14	QP
10	0.5551950	12.27	-33.73	46.00	11.91	0.22	0.14	Average
11	2.960	22.92	-33.08	56.00	22.41	0.27	0.24	QP
12	2.960	13.68	-32.32	46.00	13.17	0.27	0.24	Average
13	3.760	24.23	-31.77	56.00	23.73	0.29	0.21	QP
14	3.760	16.75	-29.25	46.00	16.25	0.29	0.21	Average
15	13.560	31.21	-28.79	60.00	30.56	0.48	0.17	QP
16	13.560	26.99	-23.01	50.00	26.34	0.48	0.17	Average
17	21.490	30.40	-29.60	60.00	29.67	0.59	0.14	QP
18	21.490	25.00	-25.00	50.00	24.27	0.59	0.14	Average

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	AC Power & Radio link with AP the NFC is normal function and antenna terminal		

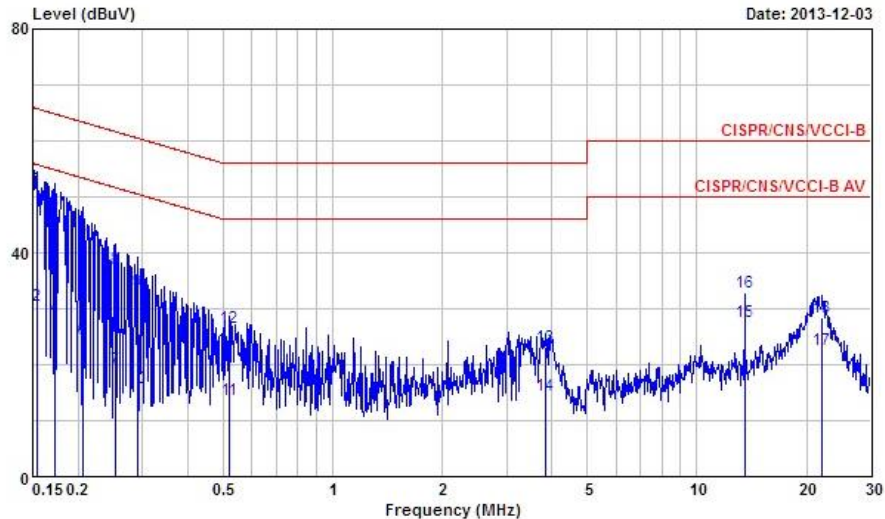

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.1540270	51.60	-14.18	65.78	51.24	0.11	0.25	QP
2	0.1540270	30.63	-25.15	55.78	30.27	0.11	0.25	Average
3	0.1721540	47.35	-17.51	64.86	47.06	0.11	0.18	QP
4	0.1721540	28.35	-26.51	54.86	28.06	0.11	0.18	Average
5	0.2061360	42.62	-20.74	63.36	42.41	0.11	0.10	QP
6	0.2061360	24.41	-28.95	53.36	24.20	0.11	0.10	Average
7	0.2521110	19.13	-32.56	51.69	18.92	0.11	0.10	Average
8	0.2521110	37.09	-24.60	61.69	36.88	0.11	0.10	QP
9	0.2924290	33.25	-27.21	60.46	33.05	0.10	0.10	QP
10	0.2924290	15.75	-34.71	50.46	15.55	0.10	0.10	Average
11	0.5209950	13.81	-32.19	46.00	13.58	0.10	0.13	Average
12	0.5209950	26.53	-29.47	56.00	26.30	0.10	0.13	QP
13	3.840	23.27	-32.73	56.00	22.91	0.15	0.21	QP
14	3.840	14.41	-31.59	46.00	14.05	0.15	0.21	Average
15	13.560	27.61	-22.39	50.00	27.17	0.27	0.17	Average
16	13.560	32.78	-27.22	60.00	32.34	0.27	0.17	QP
17	22.060	22.74	-27.26	50.00	22.31	0.32	0.11	Average
18	22.060	28.37	-31.63	60.00	27.94	0.32	0.11	QP

Note 1: ">20dB" means emission levels that exceed the level of 20 dB below the applicable limit.
 Note 2: "N/F" means Nothing Found emissions (No emissions were detected.)

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

20dB Bandwidth Limit	
<input checked="" type="checkbox"/>	Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	For the emission bandwidth refer ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

3.2.4 Test Setup

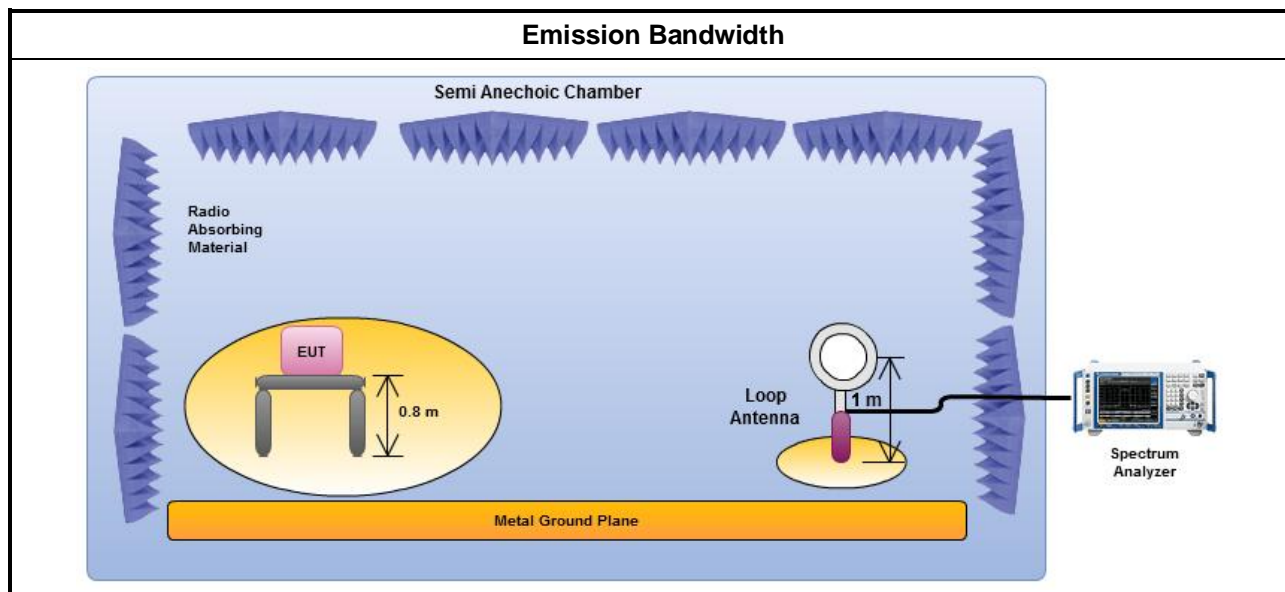

3.2.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result					
Modulation Mode	Frequency (MHz)	20dB Bandwidth (kHz)	F _L at 20dB BW (kHz)	F _H at 20dB BW (MHz)	99% Bandwidth (kHz)
NFC-ASK	13.56	2.47	13.55923	13.56171	2.09
Limit		N/A	13.553	13.567	N/A
Result		Complied			

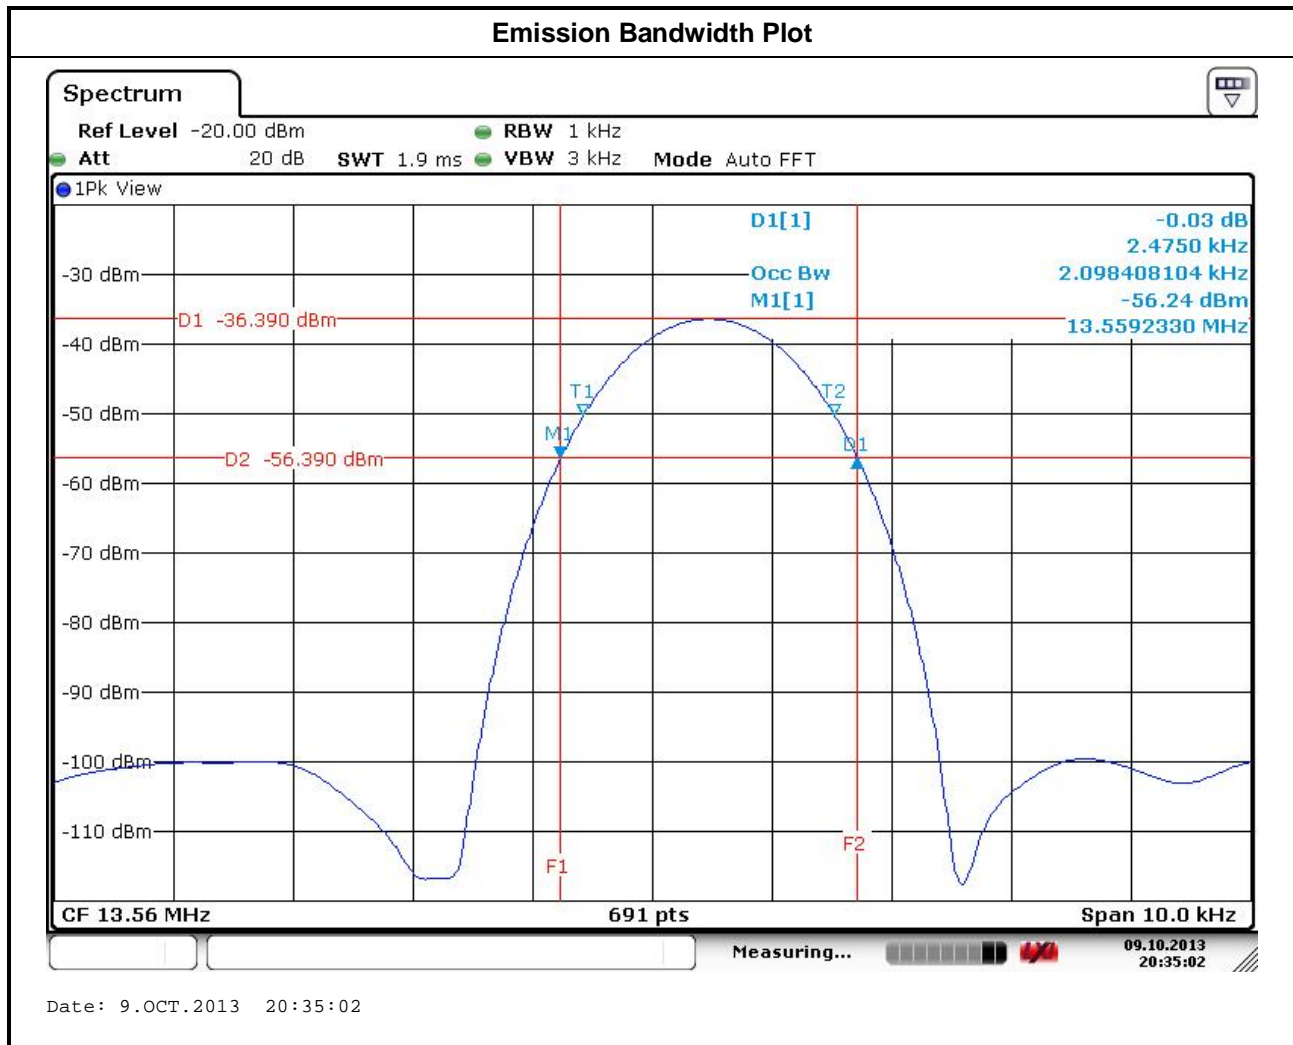

3.3 Field Strength of Fundamental Emissions and Spectrum Mask

3.3.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
Fundamental	15848	84.0	103.08	124.0	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures


Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 10m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.

3.3.4 Test Setup

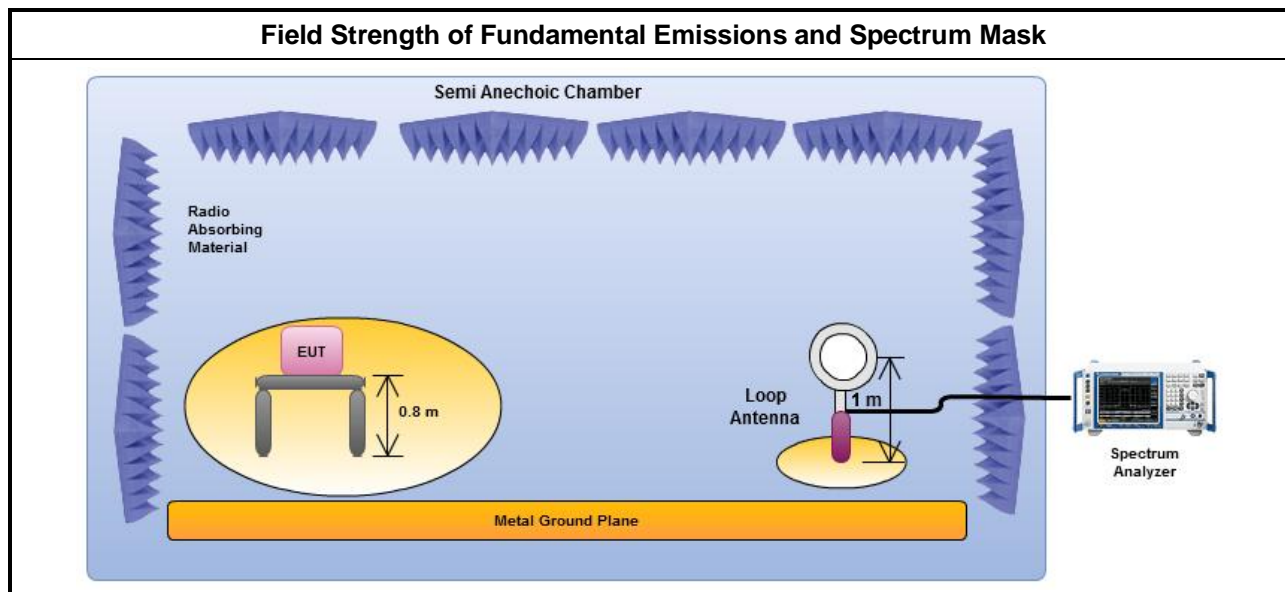

3.3.5 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Polarization	Margin (dB)	Limit (dBuV/m)@3m
NFC-ASK	F1	47.34	H	76.66	124.0
Result		Complied			
Note 1: Measurement worst emissions of receive antenna polarization: V (Vertical).					

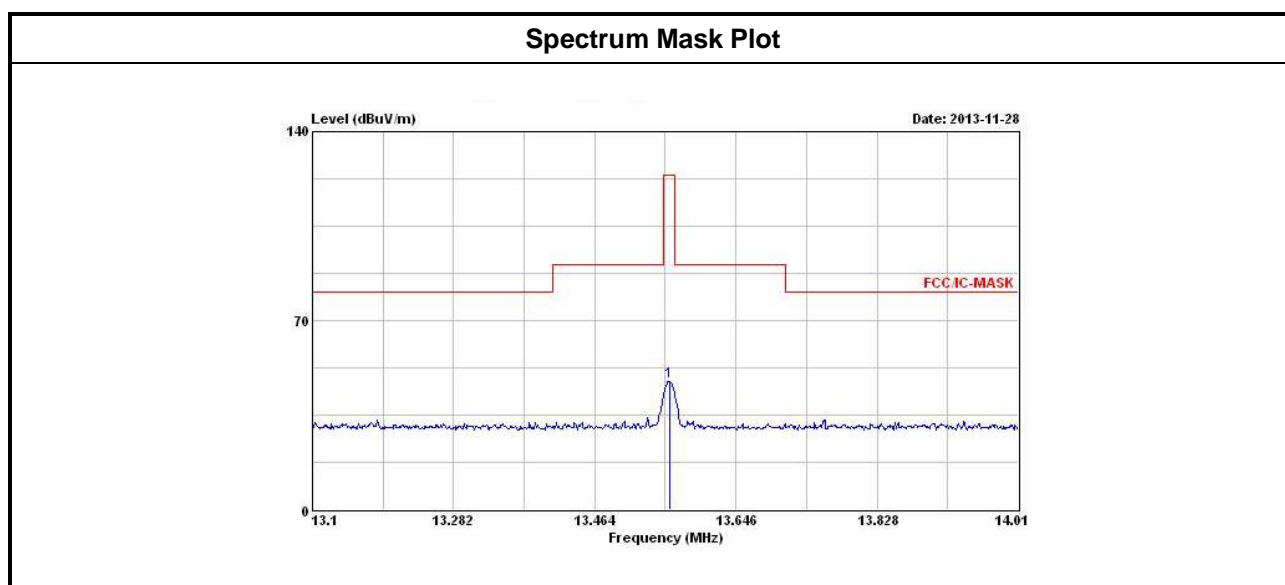

3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.4.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 10m.
<input checked="" type="checkbox"/>	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
<input type="checkbox"/>	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
<input checked="" type="checkbox"/>	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
<input checked="" type="checkbox"/>	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
<input checked="" type="checkbox"/>	The any unwanted emissions level shall not exceed the fundamental emission level.
<input checked="" type="checkbox"/>	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.4 Test Setup

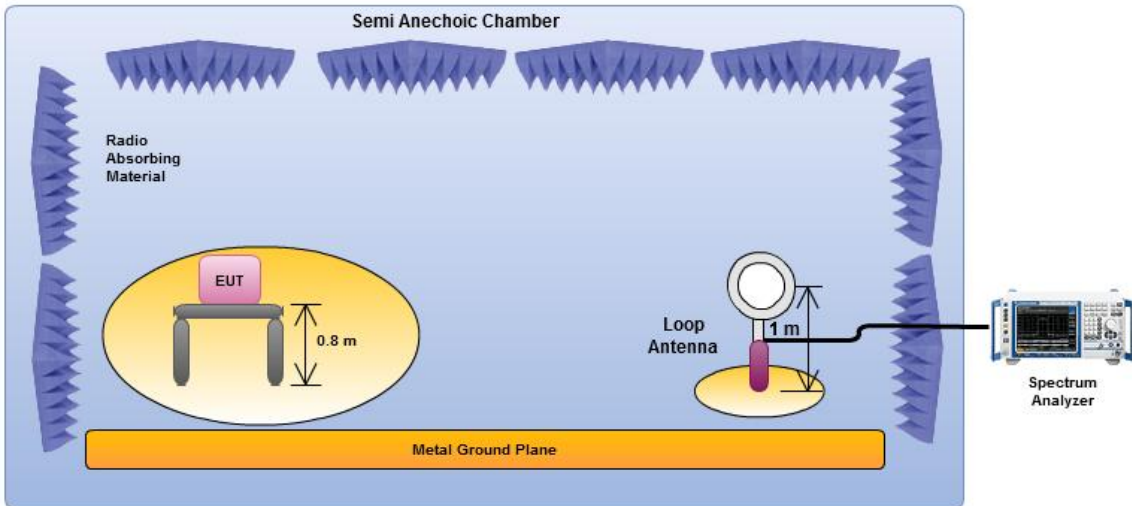
Transmitter Radiated Unwanted Emissions

<p>Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. The center of the loop shall be 1 m above the ground. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna. the antenna height shall be varied from 1 m to 4 m.</p>

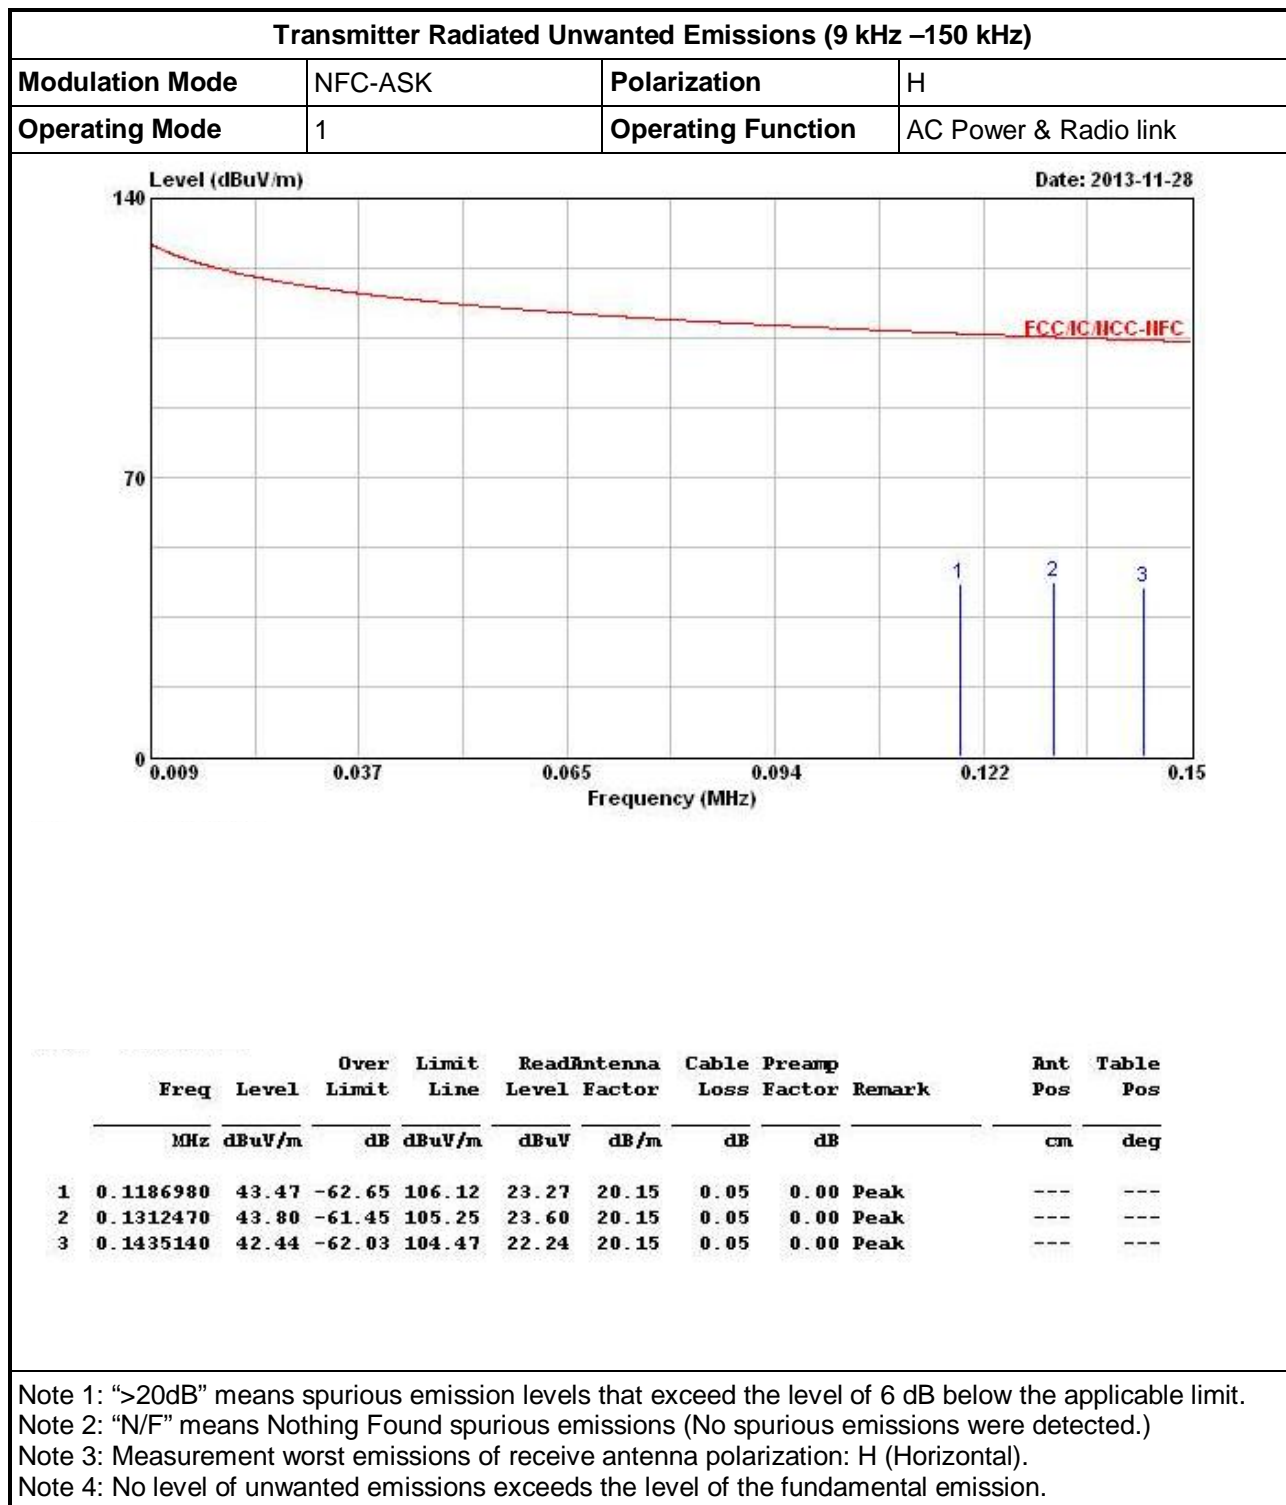3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)



Transmitter Radiated Unwanted Emissions (150 kHz – 2 MHz)

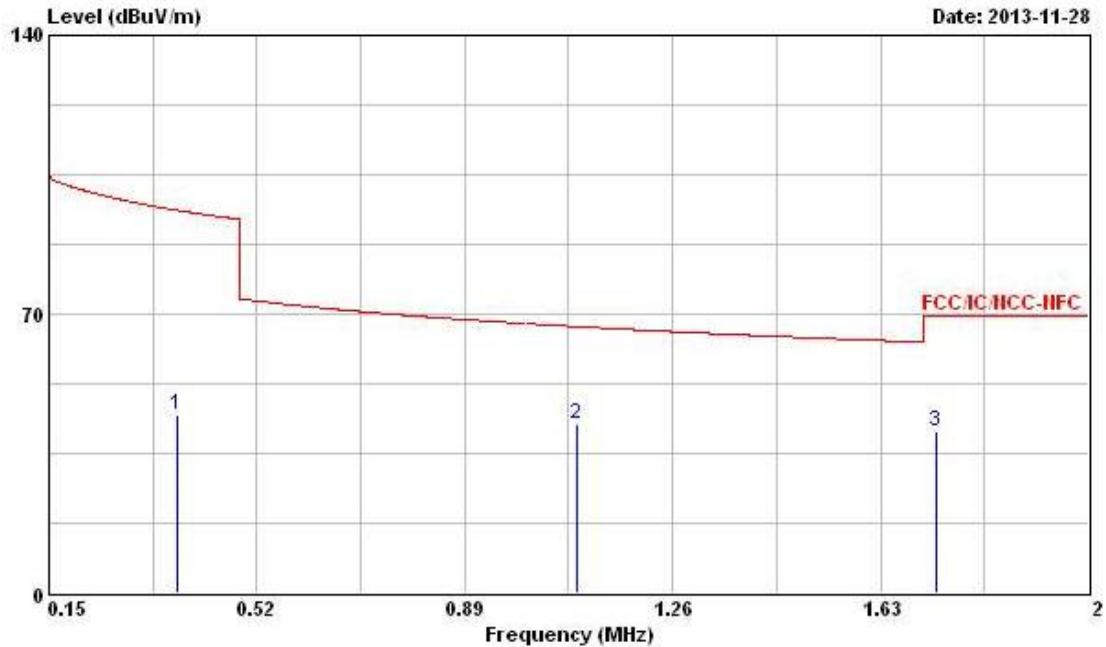Modulation Mode	NFC-ASK	Polarization	H
Operating Mode	1	Operating Function	AC Power & Radio link



	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	0.3775500	44.85	-51.22	96.07	24.70	20.10	0.05	0.00	Peak	---	---
2	1.090	42.50	-24.36	66.86	22.48	19.92	0.10	0.00	Peak	---	---
3	1.730	40.54	-29.00	69.54	20.38	20.00	0.16	0.00	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (2 MHz – 8 MHz)

Modulation Mode	NFC-ASK	Polarization	H
Operating Mode	1	Operating Function	AC Power & Radio link

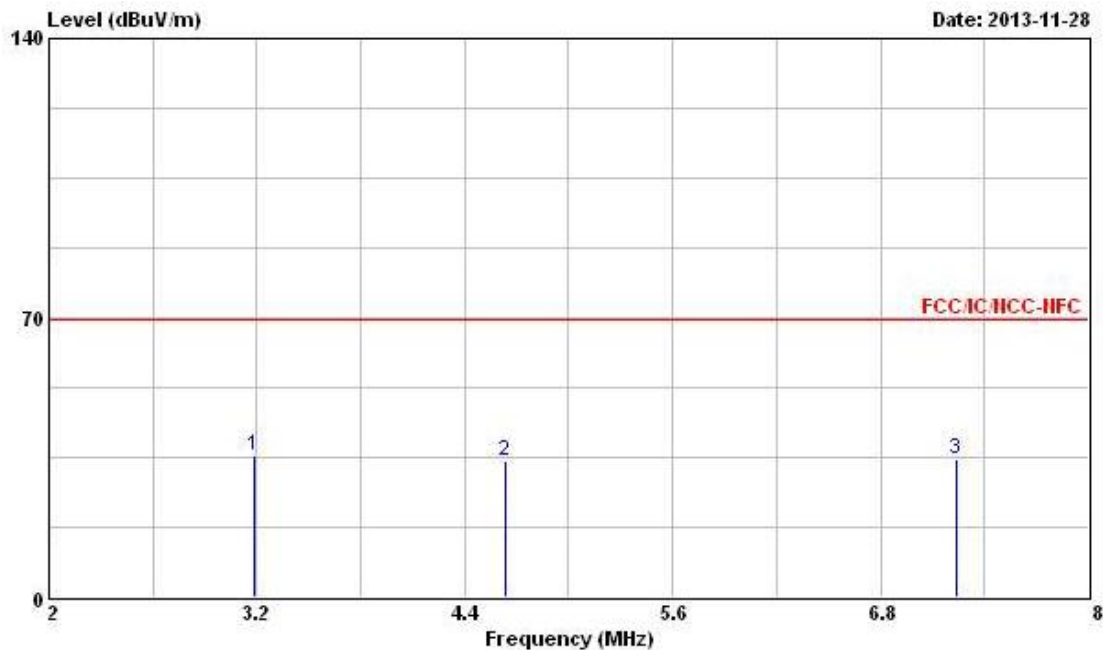

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1	3.190	35.31	-34.23	69.54	15.12	20.00	0.19	0.00	Peak	---
2	4.630	33.89	-35.65	69.54	13.63	20.04	0.22	0.00	Peak	---
3	7.240	34.63	-34.91	69.54	14.23	20.10	0.30	0.00	Peak	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (8 MHz – 25 MHz)

Modulation Mode	NFC-ASK	Polarization	H
Operating Mode	1	Operating Function	AC Power & Radio link

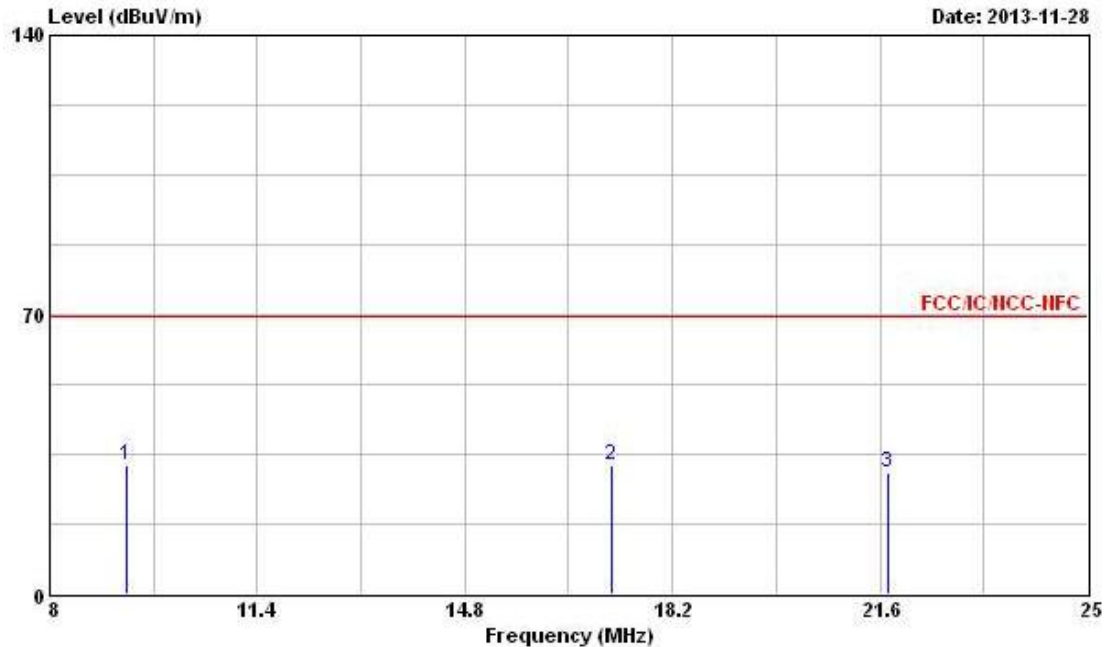

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	9.260	32.08	-37.46	69.54	11.62	20.10	0.36	0.00	Peak	---	---
2	17.210	32.25	-37.29	69.54	11.57	20.14	0.54	0.00	Peak	---	---
3	21.720	30.47	-39.07	69.54	9.67	20.17	0.63	0.00	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

Transmitter Radiated Unwanted Emissions (25 MHz – 30 MHz)

Modulation Mode	NFC-ASK	Polarization	H
Operating Mode	1	Operating Function	AC Power & Radio link

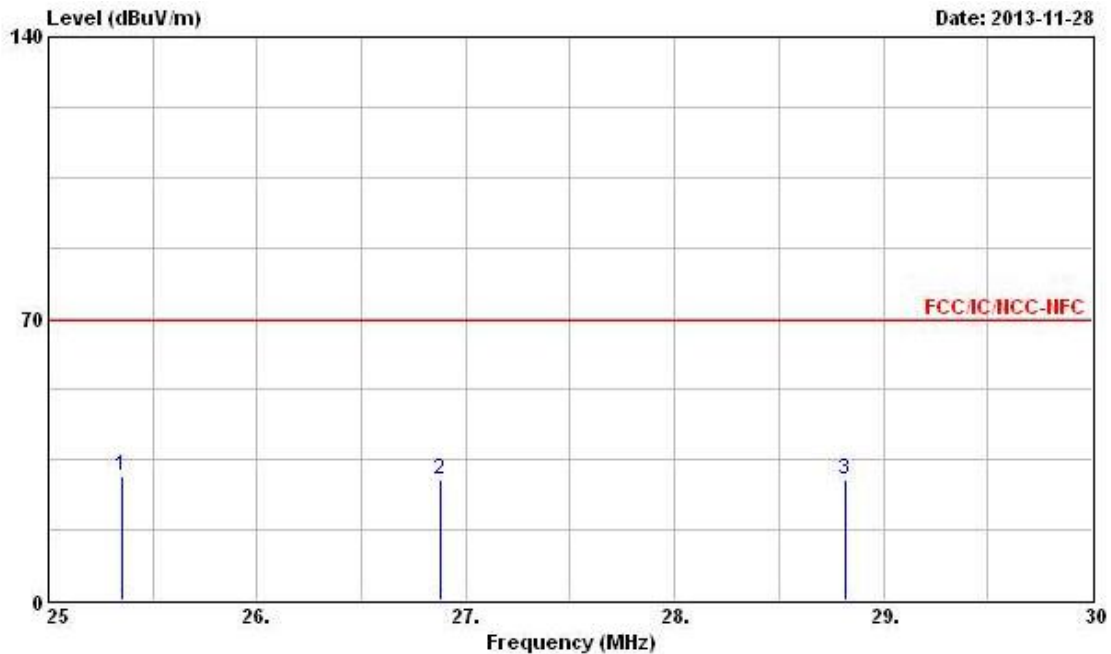

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	25.350	30.67	-38.87	69.54	9.89	20.10	0.68	0.00	Peak	---	---
2	26.880	30.14	-39.40	69.54	9.32	20.10	0.72	0.00	Peak	---	---
3	28.820	29.93	-39.61	69.54	9.09	20.10	0.74	0.00	Peak	---	---


Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).


Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

3.4.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)

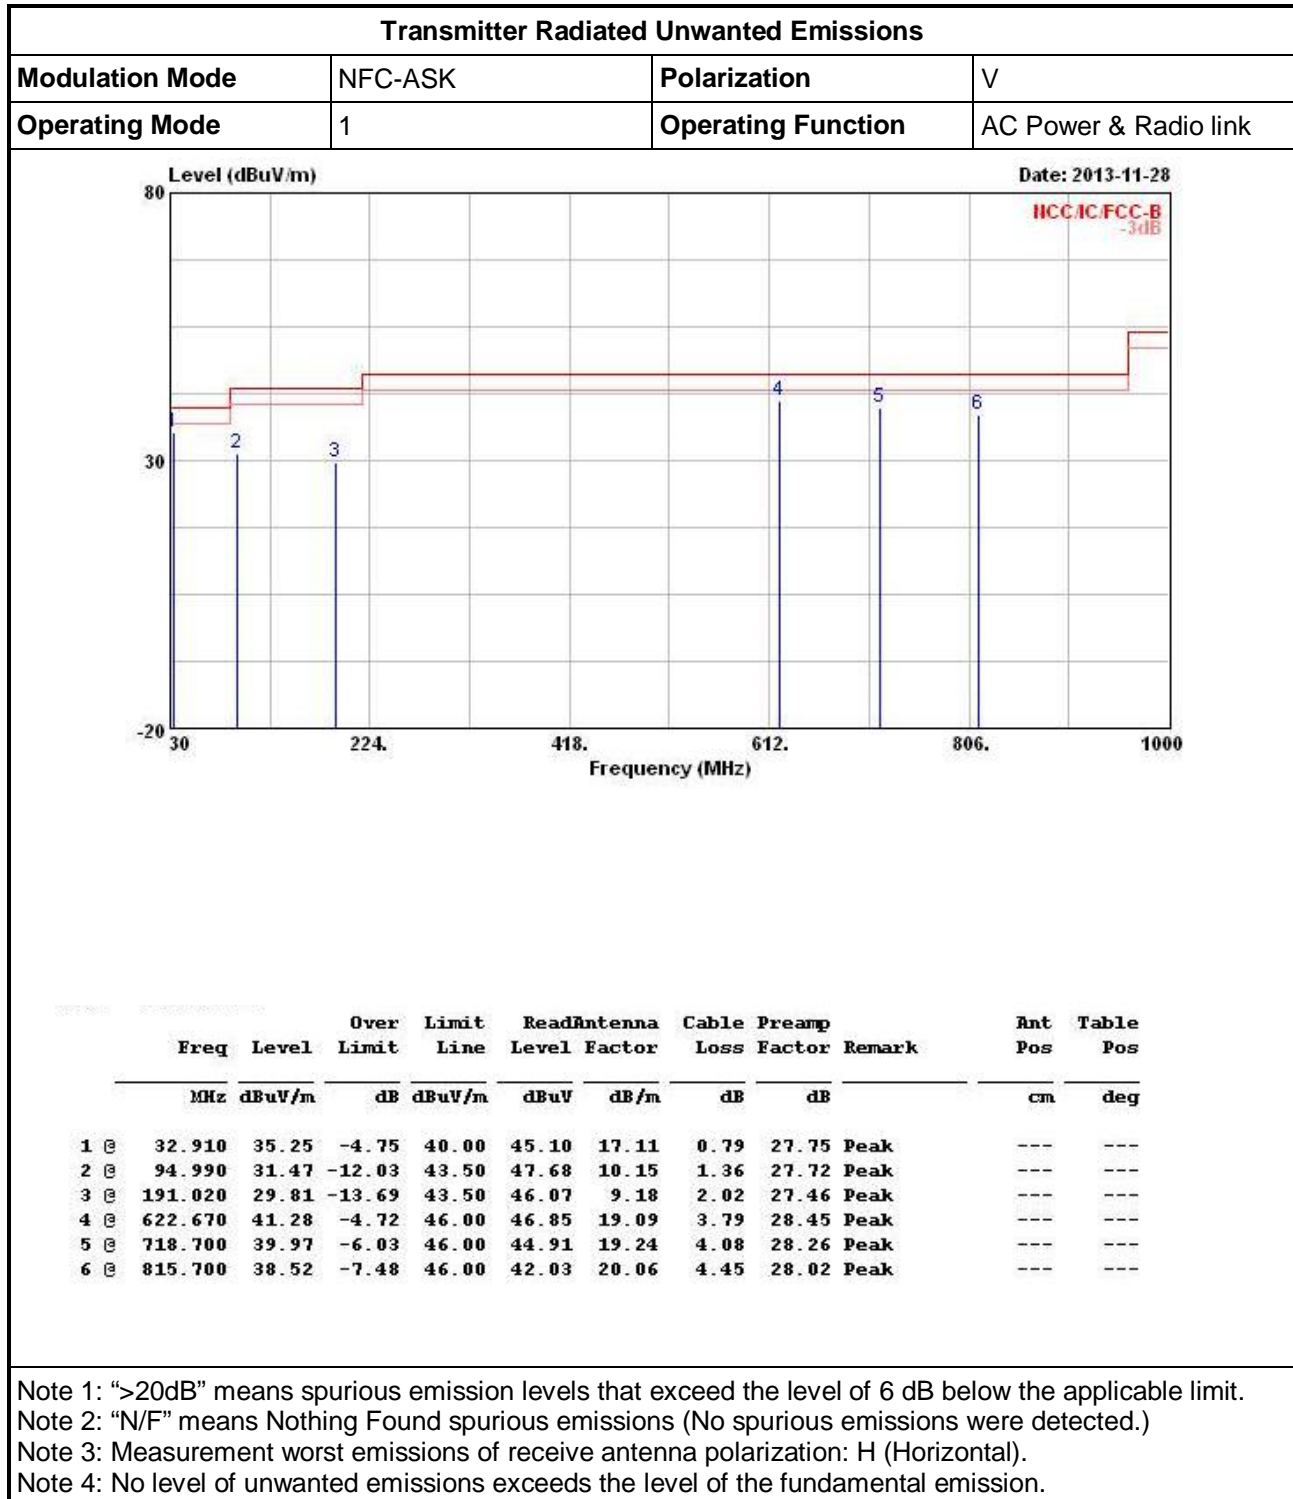

Transmitter Radiated Unwanted Emissions

Modulation Mode	NFC-ASK	Polarization	H
Operating Mode	1	Operating Function	AC Power & Radio link

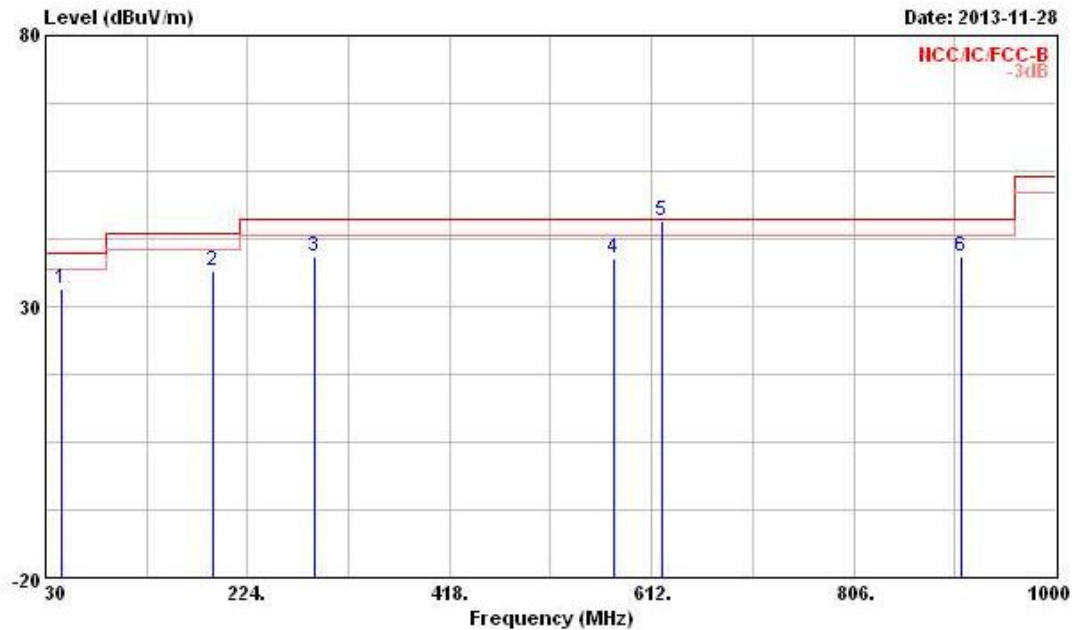

	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp			Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
			dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	44.550	33.16	-6.84	40.00	50.04	9.77	0.93	27.58	Peak	---	---
2	191.020	36.71	-6.79	43.50	52.97	9.18	2.02	27.46	Peak	---	---
3	288.020	39.37	-6.63	46.00	51.00	13.04	2.51	27.18	Peak	---	---
4	575.140	38.78	-7.22	46.00	44.94	18.71	3.62	28.49	Peak	---	---
5	622.670	45.76	-0.24	46.00	51.33	19.09	3.79	28.45	QP	---	---
6	909.790	39.19	-6.81	46.00	41.67	20.63	4.65	27.76	Peak	---	---

Note 1: ">20dB" means spurious emission levels that exceed the level of 6 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement worst emissions of receive antenna polarization: H (Horizontal).

Note 4: No level of unwanted emissions exceeds the level of the fundamental emission.

3.5 Frequency Stability

3.5.1 Frequency Stability Limit

Frequency Stability Limit	
<input checked="" type="checkbox"/>	Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
<input checked="" type="checkbox"/>	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
<input checked="" type="checkbox"/>	Frequency stability with respect to ambient temperature
<input checked="" type="checkbox"/>	Frequency stability when varying supply voltage
<input type="checkbox"/>	For conducted measurement.
<input checked="" type="checkbox"/>	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.5.4 Test Setup

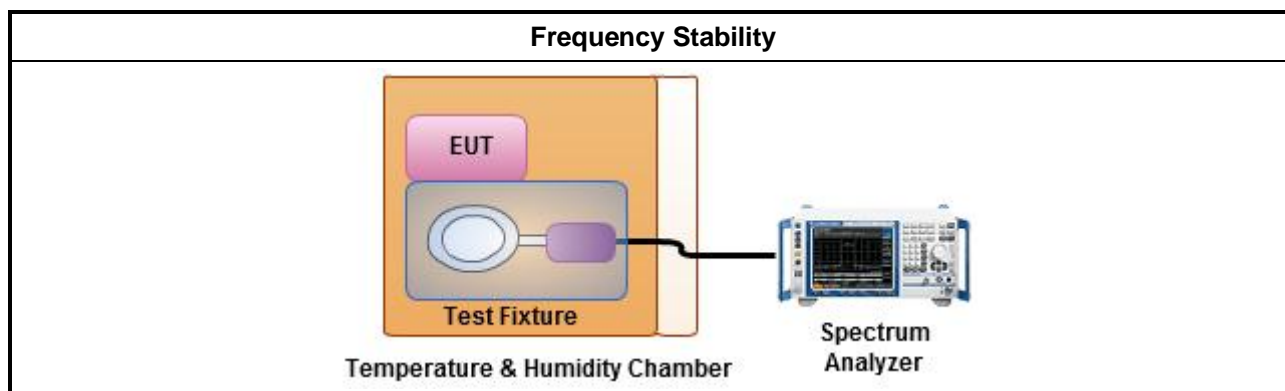

3.5.5 Test Result of Frequency Stability

Frequency Stability Result		
Power Level	1	Frequency Stability Max. Deviation Limit < 100 ppm
Condition	Freq. (MHz)	10 min
T _{20°C} V _{max}	13.56046	34.14
T _{20°C} V _{min}	13.56048	35.25
T _{50°C} V _{nom}	13.56038	27.73
T _{40°C} V _{nom}	13.56038	27.73
T _{30°C} V _{nom}	13.56042	30.97
T _{20°C} V _{nom}	13.56047	34.66
T _{10°C} V _{nom}	13.56049	36.28
T _{0°C} V _{nom}	13.56051	37.39
T _{-10°C} V _{nom}	13.56052	38.42
T _{-20°C} V _{nom}	13.56052	38.42
Result		Complied
Note 1: Measure at 85 % [V _{min}] and 115 % [V _{max}] of the nominal voltage [V _{nom}]. The nominal voltage refer test report clause 1.1.5 for EUT operational condition.		

4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz ~ 2.75GHz	Mar. 26, 2013	Conduction (CO04-HY)
LISN	SCHWARZBECK MESS-ELEKTRONIK	NSLK 8127	8127-477	9kHz ~ 30MHz	Jan. 21, 2013	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Spectrum Analyzer	R&S	FSV 40	101013	9KHz~40GHz	Jan. 29, 2013	Conducted (TH01-HY)
AC Power Source	G.W	APS-9102	EL920581	AC 0V ~ 300V	Jul. 16, 2013	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	-20 ~ 100℃	Nov. 21, 2012	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Jun. 27, 2013	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	May 11, 2013	Radiation (03CH02-HY)
Amplifier	Agilent	8447D	2944A11146	100kHz ~ 1.3GHz	Jul. 17, 2013	Radiation (03CH02-HY)
Spectrum Analyzer	R&S	FSP40	100593	9kHz ~ 40GHz	Oct. 03, 2013	Radiation (03CH02-HY)
Receiver	R&S	ESU26	1302.6005.26	20Hz ~ 26.5GHz	Apr. 02, 2013	Radiation (03CH02-HY)
Bilog Antenna	SCHAFFNER	CBL61128	2723	30MHz ~ 2GHz	Oct. 10, 2013	Radiation (03CH02-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	9kHz ~ 1GHz	Nov. 09, 2013	Radiation (03CH02-HY)
Turn Table	Chaintek Instruments	3000	MF7802058	0~ 360 degree	N/A	Radiation (03CH02-HY)
Antenna Mast	MF	MF7802	MF780208205	1 ~ 4 m	N/A	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is one year.

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Loop Antenna	TESEQ	HLA 6120	31244	9 kHz ~ 30 MHz	Dec. 02, 2012	Radiation (03CH02-HY)

Note: Calibration Interval of instruments listed above is two year.