



Measurement of RF Interference from a Model No. H71191-00024-8 SYNC module Transmitter

For : S1nn GmbH & Co KG
Entennest 1
Esslingen, GERMANY

P.O. No. : 4500000964
Date Received : July 22, 2008
Date Tested : July 22 through September 29, 2008
Test Personnel : Richard E. King
Specification : FCC Part 15, Subpart C, Section 15.247 for Frequency
Hopping Spread Spectrum Intentional Radiators within the
2400-2483.5MHz band.
: Industry Canada RSS-210

Test Report By :
Richard E. King

Richard E. King

Approved By :
Raymond J. Klouda
Raymond J. Klouda
Registered Professional Engineer of
Illinois - 44894

Raymond J. Klouda

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1	INTRODUCTION	5
1.1	Scope of Tests	5
1.2	Purpose	5
1.3	Deviations, Additions and Exclusions.....	5
1.4	EMC Laboratory Identification	5
1.5	Laboratory Conditions	5
2	APPLICABLE DOCUMENTS	5
3	TEST ITEM SET-UP AND OPERATION	6
3.1	General Description.....	6
3.1.1	Power Input	6
3.1.2	Peripheral Equipment	6
3.1.3	Interconnect Cables	6
3.1.4	Grounding.....	6
3.2	Operational Mode.....	6
3.3	Test Item Modifications	6
4	TEST FACILITY AND TEST INSTRUMENTATION.....	6
4.1	Shielded Enclosure	6
4.2	Test Instrumentation.....	6
4.3	Calibration Traceability.....	6
4.4	Measurement Uncertainty	7
5	TEST PROCEDURES.....	7
5.1	Powerline Conducted Emissions.....	7
5.1.1	Requirements	7
5.2	Radiated Measurements	7
5.2.1	Requirements	7
5.2.2	Procedures	7
5.2.3	Results	9
5.3	20 dB Bandwidth	9
5.3.1	Requirements	9
5.3.2	Procedures	9
5.3.3	Results	9
5.4	Carrier Frequency Separation.....	9
5.4.1	Requirements	9
5.4.2	Procedures	9
5.4.3	Results	9

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

5.5	Number of Hopping Frequencies	9
5.5.1	Requirements	9
5.5.2	Procedures	10
5.5.3	Results	10
5.6	Time of Occupancy	10
5.6.1	Requirements	10
5.6.2	Procedures	10
5.6.3	Results	10
5.7	Peak Output Power	10
5.7.1	Requirements	10
5.7.2	Procedures	10
5.7.3	Results	11
5.8	Bandedge Compliance	11
5.8.1	Requirements	11
5.8.2	Procedures	11
5.8.3	Results	12
5.9	Power Spectral Density	12
5.9.1	Requirements	12
5.9.2	Procedures	12
5.9.3	Results	12
6	CONCLUSIONS	12
7	CERTIFICATION	12
8	ENDORSEMENT DISCLAIMER	13
9	EQUIPMENT LIST	14

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.



REVISION HISTORY

Revision	Date	Description
—	Sept. 29, 2008	Initial release

**Measurement of RF Emissions from a S1nn GmbH & Co KG
SYNC module, Part No. H71191-00024-8 transmitter**

1 INTRODUCTION

1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on a SYNC module, Part No. H71191-00024-8, Serial No. 1K63001R transmitter (hereinafter referred to as the test item). The test item is a BlueTooth hybrid spread spectrum transmitter. The transmitter was designed to transmit in 2400-2483.5 MHz, band using an internal antenna. The test item was manufactured and submitted for testing by S1nn GmbH & Co KG located in Esslingen, GERMANY.

1.2 Purpose

The test series was performed to determine if the test item meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Section 15.247 for Intentional Radiators and Industry Canada's RSS-210 for Low-power License-exempt radio communication devices. Testing was performed in accordance with ANSI C63.4-2003.

1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series

1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

1.5 Laboratory Conditions

The temperature at the time of the test was 22.1°C and the relative humidity was 22%.

2 APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2007
- ANSI C63.4-2003, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- Industry Canada RSS-210, Issue 7, June 2007, "Spectrum Management and Telecommunications Radio Standards Specification, Low-power License-exempt radio communication devices (All Frequency Bands): Category I Equipment"
- Industry Canada RSS-GEN, Issue 2, June 2007, "Spectrum Management and Telecommunications Radio Standards Specification, General Requirements and Information for the Certification of radio communication equipment"

3 TEST ITEM SET-UP AND OPERATION

3.1 General Description

The test item is a SYNC module BlueTooth hybrid spread spectrum transmitter, Part No. H71191-00024-8. A block diagram of the test item setup is shown as Figure 1. The laptop was connected to the test item with 30 feet of CAN bus communication fiber optic leads. The laptop was connected to the test item during all tests.

3.1.1 Power Input

The test item obtained 13.5VDC from an external power supply simulating the typical power input from an automotive battery.

3.1.2 Peripheral Equipment

The following peripheral equipment was submitted with the test item:

Item	Description
PC laptop	ASUS Eee PC series. Model EEEPC4G-BK042 serial number 840AAQ142613.

3.1.3 Interconnect Cables

The following interconnect cables were submitted with the test item:

Item	Description
Cable harness	2.5 foot long wiring harness from the test item to the power source.
USB lead	One meter long USB to USB 2 cable was connected to the USB 2 port of the test item.

3.1.4 Grounding

The test item was grounded through the return lead of the power supply simulating typical input power in an automobile.

3.2 Operational Mode

For all tests the test item was placed on an 80cm high non-conductive stand. The test item was energized. The test item could be programmed using the supplied PC laptop to operate in each of the following modes: transmit at 2402.0 MHz, 2441.0 MHz and 2480.0 MHz, frequency hopping enabled or inquiry.

3.3 Test Item Modifications

No modifications were required for compliance.

4 TEST FACILITY AND TEST INSTRUMENTATION

4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in **Table 9-1**.

4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National

Institute of Standards and Technology (NIST).

4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements		
Combined Standard Uncertainty	1.07	-1.07
Expanded Uncertainty (95% confidence)	2.1	-2.1
Radiated Emission Measurements		
Combined Standard Uncertainty	2.26	-2.18
Expanded Uncertainty (95% confidence)	4.5	-4.4

5 TEST PROCEDURES

5.1 Powerline Conducted Emissions

5.1.1 Requirements

Since the test item is typically powered with 13.5VDC from an automotive battery, no conducted emissions tests are required.

5.2 Radiated Measurements

5.2.1 Requirements

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated emissions measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

5.2.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high semi anechoic chamber. The radiated emissions were investigated over the frequency range of 30 MHz to 24.0 GHz.

- 1) For all harmonics not in the restricted bands, the following procedure was used:
 - a) The field strength of the fundamental was measured using a double ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The test item was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the test item was rotated through all axis to ensure the maximum readings were recorded for the test item.
 - d) All harmonics not in the restricted bands must be at least 20 dB below level measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.
- 2) For all emissions in the restricted bands, the following procedure was used:
 - a) The field strengths of all emissions below 1 GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 100 kHz was used on the spectrum analyzer.
 - b) The field strengths of all emissions above 1 GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 1 MHz was used on the spectrum analyzer.
 - c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The test item was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
 - iv) In instances where it was necessary to use a shortened cable between the measuring antenna and the spectrum analyzer. The measuring antenna was not raised or lowered to ensure maximized readings, instead the test item was rotated through all axis to ensure the maximum readings were recorded for the test item.
 - d) For all radiated emissions measurements below 1 GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are re-measured using a quasi-peak detector.
 - e) For all radiated emissions measurements above 1 GHz, the peak readings must comply with the 15.35(b) limits. 15.35(b) states that when average radiated emissions measurements are specified, there also is a limit on the peak level of the radiated emissions. The limit on the peak radio frequency emissions is 20 dB

above the maximum permitted average emission limit applicable to the equipment under test. Therefore all peak readings above 1 GHz must be no greater than 20 dB above the limits specified in 15.209(a).

5.2.3 Results

The preliminary radiated emissions plots are presented on pages 17 through 40. Factors for the antennas and cables were added to the data before it was plotted. This data is only presented for a reference, and is not used as official data. Final radiated emissions data are presented on data pages 23 through 40. As can be seen from the data, all emissions measured from the test item were within the specification limits. Photographs of the test configuration for radiated emission are shown as Figures 2.

5.3 20 dB Bandwidth

5.3.1 Requirements

Per section 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate within an output power no greater than 125 mW.

5.3.2 Procedures

The test item was setup inside the chamber. With the hopping function disabled, the test item was allowed to transmit continuously. The frequency hopping channel was set separately to low, middle, and high hopping channels. The resolution bandwidth (RBW) was set to > to 1% of the 20 dB BW.

The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The analyzer's display was plotted using a 'screen dump' utility.

5.3.3 Results

The plots on pages 41 through **Error! Bookmark not defined.** show that the maximum 20 dB bandwidth was 794.58 kHz. The 99% bandwidth measurement was 812.32 kHz.

5.4 Carrier Frequency Separation

5.4.1 Requirements

Per section 15.247(a)(1), alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate within an output power no greater than 125 mW.

5.4.2 Procedures

The test item was setup inside the chamber. With the hopping function enabled, the test item was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to > to 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the peaks of at least two adjacent channels. When the trace had stabilized after multiple scans, the marker-delta function was used to determine the separation between the peaks of the adjacent channels. The analyzer's display was plotted using a 'screen dump' utility.

5.4.3 Results

Page 44 shows the carrier frequency separation. As can be seen from this plot, the carrier frequency separation is 1.035 MHz which is greater than the 20 dB bandwidth of the hopping channel (794.58 kHz).

5.5 Number of Hopping Frequencies

5.5.1 Requirements

Per section 15.247(a)(1)(iii), frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels.

5.5.2 Procedures

The test item was setup inside the chamber. With the hopping function enabled, the test item was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to > to 1% of the span. The peak detector and 'Max-Hold' function were engaged. The span was set wide enough to capture the entire frequency band of operation.

The test item's signal was allowed to stabilize after multiple scans. The number of hopping frequencies was counted. The analyzer's display was plotted using a 'screen dump' utility.

5.5.3 Results

Page 45 shows the number of hopping frequencies. As can be seen from this plot, the number of hopping frequencies is 79 which is greater than the minimum number of required hopping frequencies for systems operating in the 2400-2483.5 MHz band.

5.6 Time of Occupancy

5.6.1 Requirements

Per section 15.247(a)(1)(iii), for frequency hopping systems operating in the 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.6.2 Procedures

The test item was setup inside the chamber. With the hopping function enabled, the test item was allowed to transmit continuously.

The resolution bandwidth (RBW) was set to 1 MHz. The peak detector and 'Max-Hold' function were engaged. With the span set to 0 Hz, the sweep time was adjusted to capture a single event in order to measure the dwell time per hop. The analyzer's display was plotted using a 'screen dump' utility. Then, the sweep time was expanded to greater than 0.4 seconds multiplied by the number of hopping channels employed (.4 seconds *79 hops = 31.6 seconds).

5.6.3 Results

Pages 46 through 49 show the plots for the time of occupancy (dwell time). As can be seen from the plots, the time of occupancy can be determined by 390.78 uS multiplied by 320 hops within a 31.6 second sweep. This calculated value is equal to 125.04 mS which is less than the 0.4 seconds maximum allowed.

5.7 Peak Output Power

5.7.1 Requirements

Per section 15.247(b)(1), For frequency hopping systems operating in the 2400-2483.5MHz band and employing at least 75 hopping channels. The peak output power shall not be greater than 1 watt. All other systems in the 2400-2483.5MHz band shall not be greater than 0.125 watts. Per section 15.247(b)(4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6 dBi antenna gain, the maximum EIRP can be increased by 6 dB to 4 Watt (36 dBm).

5.7.2 Procedures

The test item was placed on the non-conductive stand and set to transmit. A double ridged waveguide antenna was placed at a test distance of 3 meters from the test item. The test item was maximized for worst case emissions (or maximum output power) in a 1MHz resolution bandwidth of the measurement receiver at the measuring antenna. The maximum meter reading was recorded. The peak power output was measured for the 2402.0 MHz, 2441.0 MHz and 2480.0 MHz hopping frequencies.

The equivalent power was determined from the field intensity levels measured at 3 meters using the substitution method. To determine the emission power, a second double ridged waveguide antenna was then set in place of the test item and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss and antenna gain, as required. The peak power output was calculated for 2402.0 MHz, 2441.0 MHz and 2480.0 MHz hopping frequencies.

5.7.3 Results

The results are presented on page 50. The maximum EIRP measured from the transmitter was 7.8 dBm or 6.03 mW which is below the 4 Watt (36 dBm) limit.

5.8 Bandedge Compliance

5.8.1 Requirements

Per section 15.247(d), the emissions at the bandedges must be at least 20 dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required. In addition, the radiated emissions which fall in the restricted band beginning at 2483.5 MHz must meet the general limits of 15.209(a).

5.8.2 Procedures

- 1) The test item was placed in the test chamber.
- 2) The test item was set to transmit continuously at the channel closest to the low band-edge (hopping function disabled).
- 3) The meter reading was recorded.
- 4) To determine the bandedge compliance at the low end of the test item's operating frequency range, the following spectrum analyzer settings were used:
 - a) Center frequency = low band-edge frequency.
 - b) Span = Wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation.
 - c) Resolution bandwidth (RBW) = 100 kHz (at least 1% of the span).
 - d) The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
 - e) The marker was set on the peak of the in-band emissions. A display line was placed 20 dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20 dB down display line. (All emissions to the left of the center frequency (bandedge) must be below the display line.)
 - f) The analyzer's display was plotted using a 'screen dump' utility.
- 5) Step 5) was repeated with the frequency hopping function enabled.
- 6) The test item was set to transmit continuously at the channel closest to the high band-edge (hopping

function disabled).

- 7) The test item was maximized for worst case emissions at the measuring antenna. A peak reading was taken with a resolution bandwidth of 1 MHz and a video bandwidth of 1 MHz or greater. An average reading was then taken with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz. The maximum peak and average meter readings were recorded.
- 8) To determine the bandedge compliance at the high end of the test item's operating frequency range, the following spectrum analyzer settings were used:
 - a) Center frequency = high band-edge frequency (2483.5MHz).
 - b) Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation.
 - c) Resolution bandwidth (RBW) = 1MHz. Video bandwidth (VBW) = 1MHz.
 - d) The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The maximum meter reading was recorded.
 - e) Resolution bandwidth (RBW) = 1MHz. Video bandwidth (VBW) = 10Hz.
 - f) The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The maximum meter reading was recorded.
- 9) The previous steps were repeated with the frequency hopping function enabled.

5.8.3 Results

Pages 51 through 53 show the radiated band-edge compliance results. As can be seen from these pages, the emissions at the low end bandedge are within the 20 dB down limits. The emissions at the high end bandedge are within the general limits.

5.9 Power Spectral Density

5.9.1 Requirements

Per section 15.247(d), the peak power spectral density from the intentional radiator shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

5.9.2 Procedures

The test item was put into inquiry mode. The resolution bandwidth (RBW) was initially set to 3MHz to set the reference level. Knowing the peak level, the result of this plot was used to determine the 8dBm limit. The resolution bandwidth (RBW) was set to 3kHz, the sweep time was set to the span divided by 3kHz (1 MHz/3kHz = 333 seconds). The peak detector and 'Max-Hold' function was engaged. The analyzer's display was plotted using a 'screen dump' utility.

5.9.3 Results

Data page 54 shows the power spectral density results. As can be seen from this plot, the peak power density is less than 8dBm in a 3kHz band during any time interval of continuous transmission.

6 CONCLUSIONS

It was determined that the S1nn GmbH & Co KG SYNC module, Part No. H71191-00024-8 BlueTooth hybrid spread spectrum transmitter, Serial No. 1K63001R, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart C, Sections 15.207 and 15.247 for Intentional Radiators Operating within the 2400-2483.5 MHz band, and Industry Canada's RSS-210 for Low-power License-exempt radio communication devices when tested per ANSI C63.4-2003.



7 CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

8 ENDORSEMENT DISCLAIMER

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



9 EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APW0	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G	PL2926/0646	20GHZ-26.5GHZ	11/30/2007	11/30/2008
APW2	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5R0-10	PL2925	1GHZ-20GHZ	11/30/2007	11/30/2008
CDN1	COMPUTER	GATEWAY	PROV700C	022368720	700MHZ	N/A	
CMA0	MULTI-DEVICE CONTROLLER	EMCO	2090	9701-1213	---	N/A	
GRE0	SIGNAL GENERATOR	AGILENT TECHNOLOGIES	E4438C	MY42083127	250KHZ-6GHZ	1/7/2008	1/7/2009
HRG6	LASERJET 2100	HEWLETT PACKARD	C1470A	USGG109744	---	N/A	
NHG1	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NTA0	BILOG ANTENNA	CHASE EMC LTD.	BILOG CBL6112	2057	0.03-2GHZ	6/11/2008	6/11/2009
NWI0	RIDGED WAVE GUIDE	AEL	H1498	153	2-18GHZ	10/13/2007	10/13/2008
NWI1	RIDGED WAVE GUIDE	AEL	H1498	154	2-18GHZ	10/13/2007	10/13/2008
RBB0	EMI TEST RECEIVER 20HZ TO 40 GHZ.	ROHDE & SCHWARZ	ESIB40	100250	20 HZ TO 40GHZ	11/5/2007	11/5/2008
XOB1	ADAPTER	HEWLETT PACKARD	K281C	10422	18-26.5GHZ	NOTE 1	
XPR0	HIGH PASS FILTER	K&L MICROWAVE	11SH10-4800/X20000	001	4.8-20GHZ	7/30/2008	7/30/2009

I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.



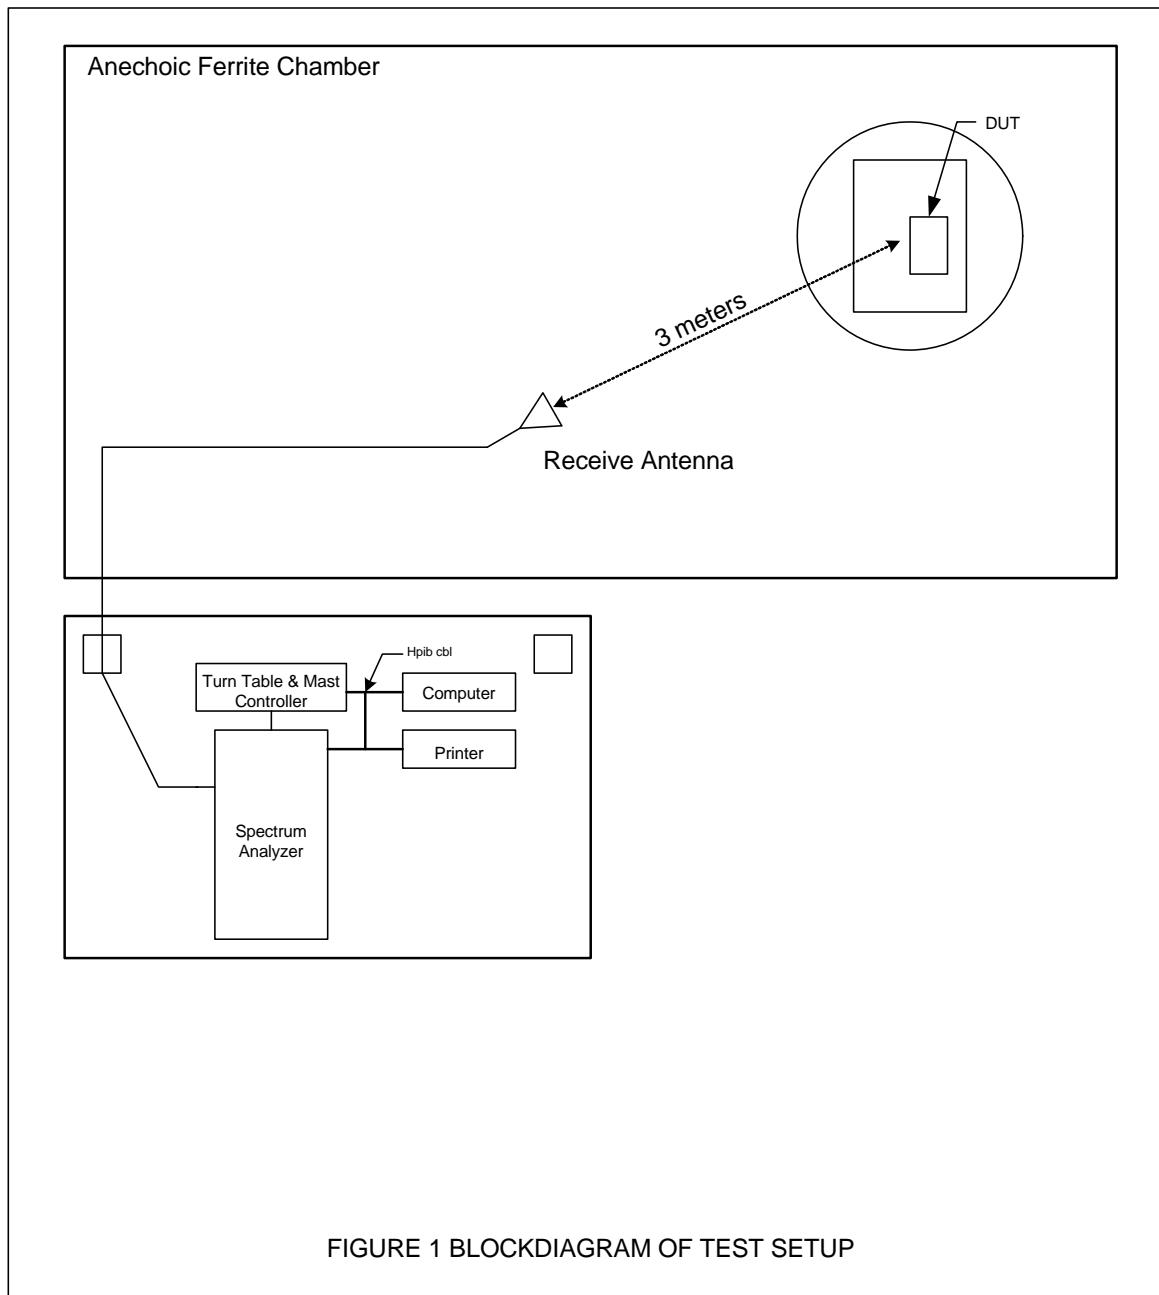


Figure 2

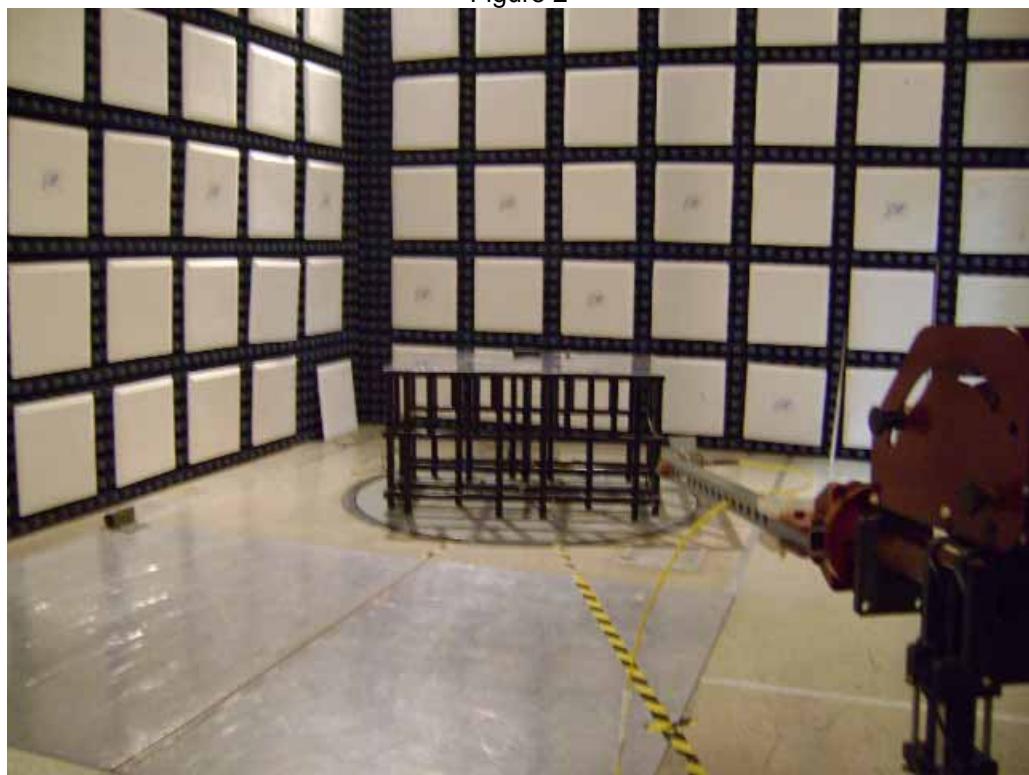

Test Set-up for Radiated Emissions – Horizontal Polarization

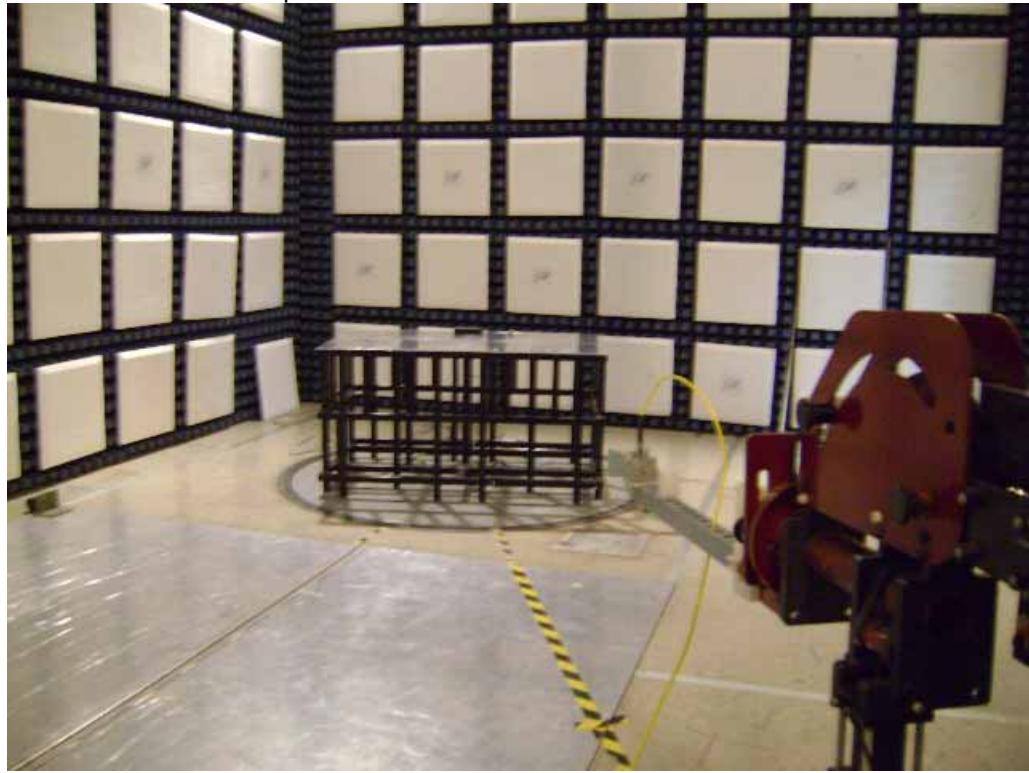


Test Set-up for Radiated Emissions – Vertical Polarization

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNIT RCU EMI RUN 11

SPEC / TEST	PRELIM RADIATED EMISSIONS
MANUFACTURER	SINN GmbH & Co KG
MODEL No.	H71191-000024-8
SERIAL No.	1K63001R
MODE	Tx & 2402MHz
SCANS/BAND	1
NOTES	
TEST DATE	24 Sep 2008 16:01:02
ANT. POLARIZ.	HORIZONTAL

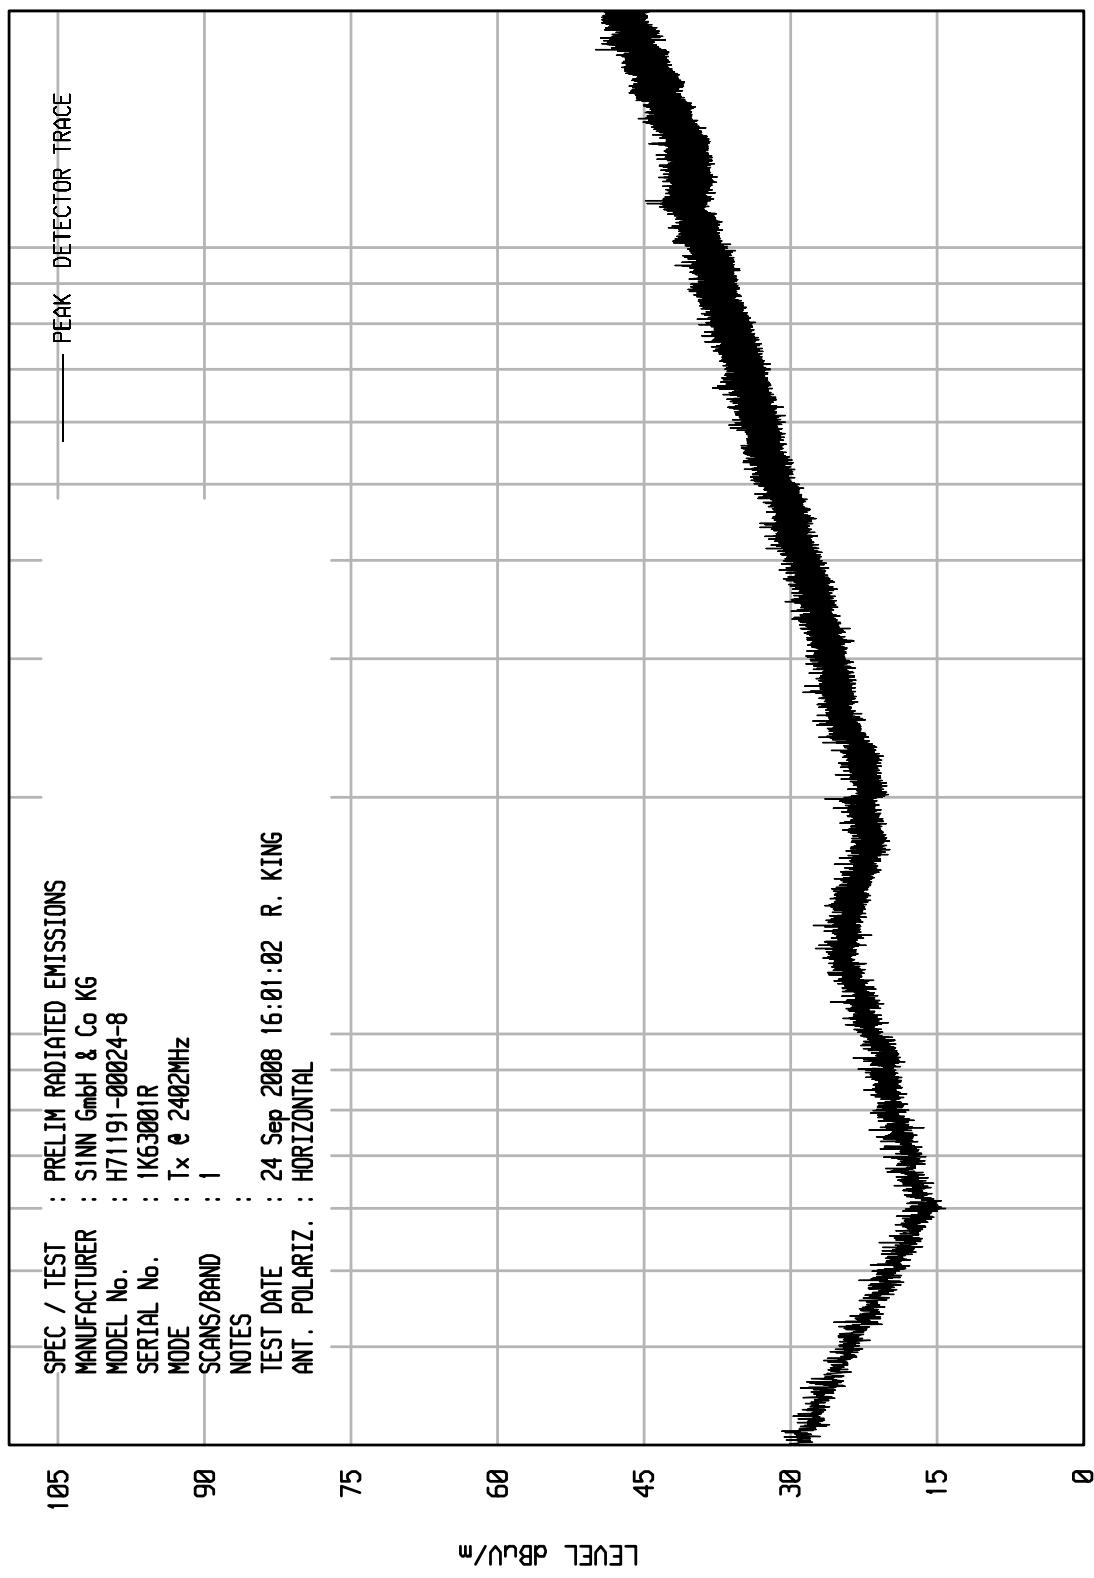


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNIT RCU EMI RUN 12

SPEC / TEST	PRELIM RADIATED EMISSIONS
MANUFACTURER	SINN GmbH & Co KG
MODEL No.	H71191-000024-8
SERIAL No.	1K63001R
MODE	Tx & 2402MHz
SCANS/BAND	1
NOTES	
TEST DATE	24 Sep 2008 16:03:40
ANT. POLARIZ.	VERTICAL

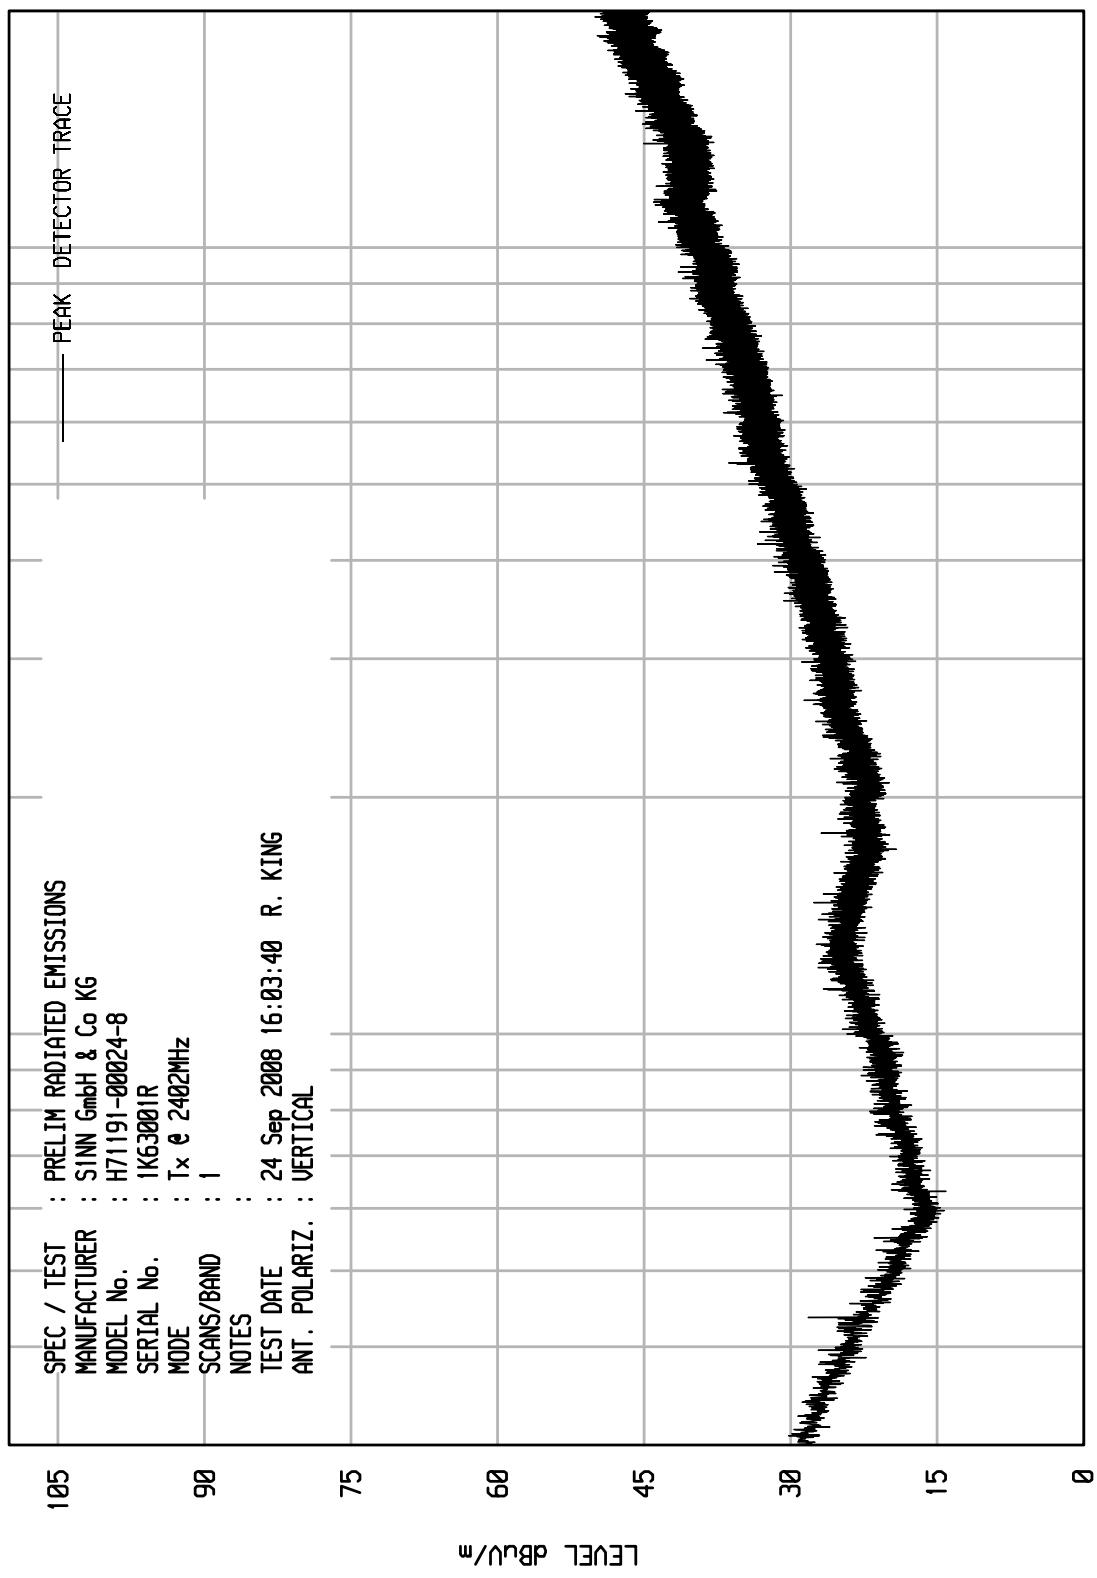


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNIT RCU EMI RUN 10

SPEC / TEST		PRELIM RADIATED EMISSIONS
MANUFACTURER	:	SINN GmbH & Co KG
MODEL No.	:	H71191-00024-8
SERIAL No.	:	IK63001R
MODE	:	Tx & 2441MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	24 Sep 2008 15:56:38
ANT. POLARIZ.	:	HORIZONTAL

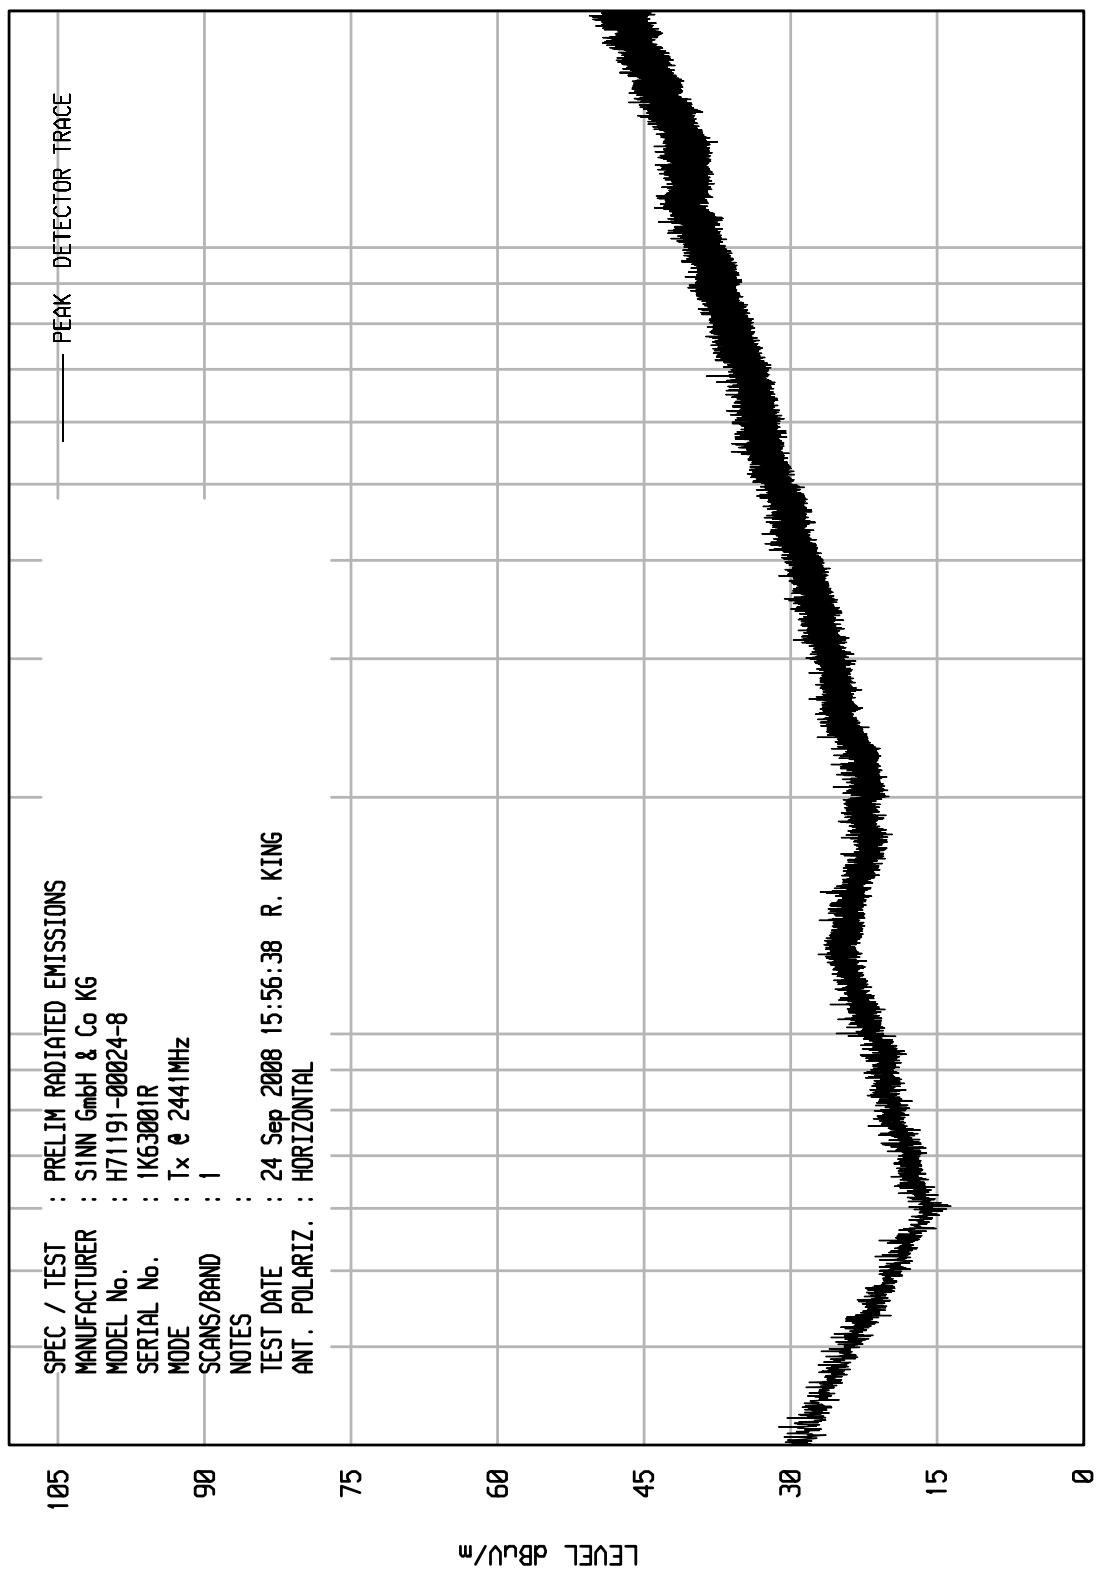


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNITU RCU EMI RUN 9

SPEC / TEST		PRELIM RADIATED EMISSIONS
MANUFACTURER	:	SINN GmbH & Co KG
MODEL No.	:	H71191-000024-8
SERIAL No.	:	1K63001R
MODE	:	Tx & 2441MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	24 Sep 2008 15:54:12
ANT. POLARIZ.	:	VERTICAL

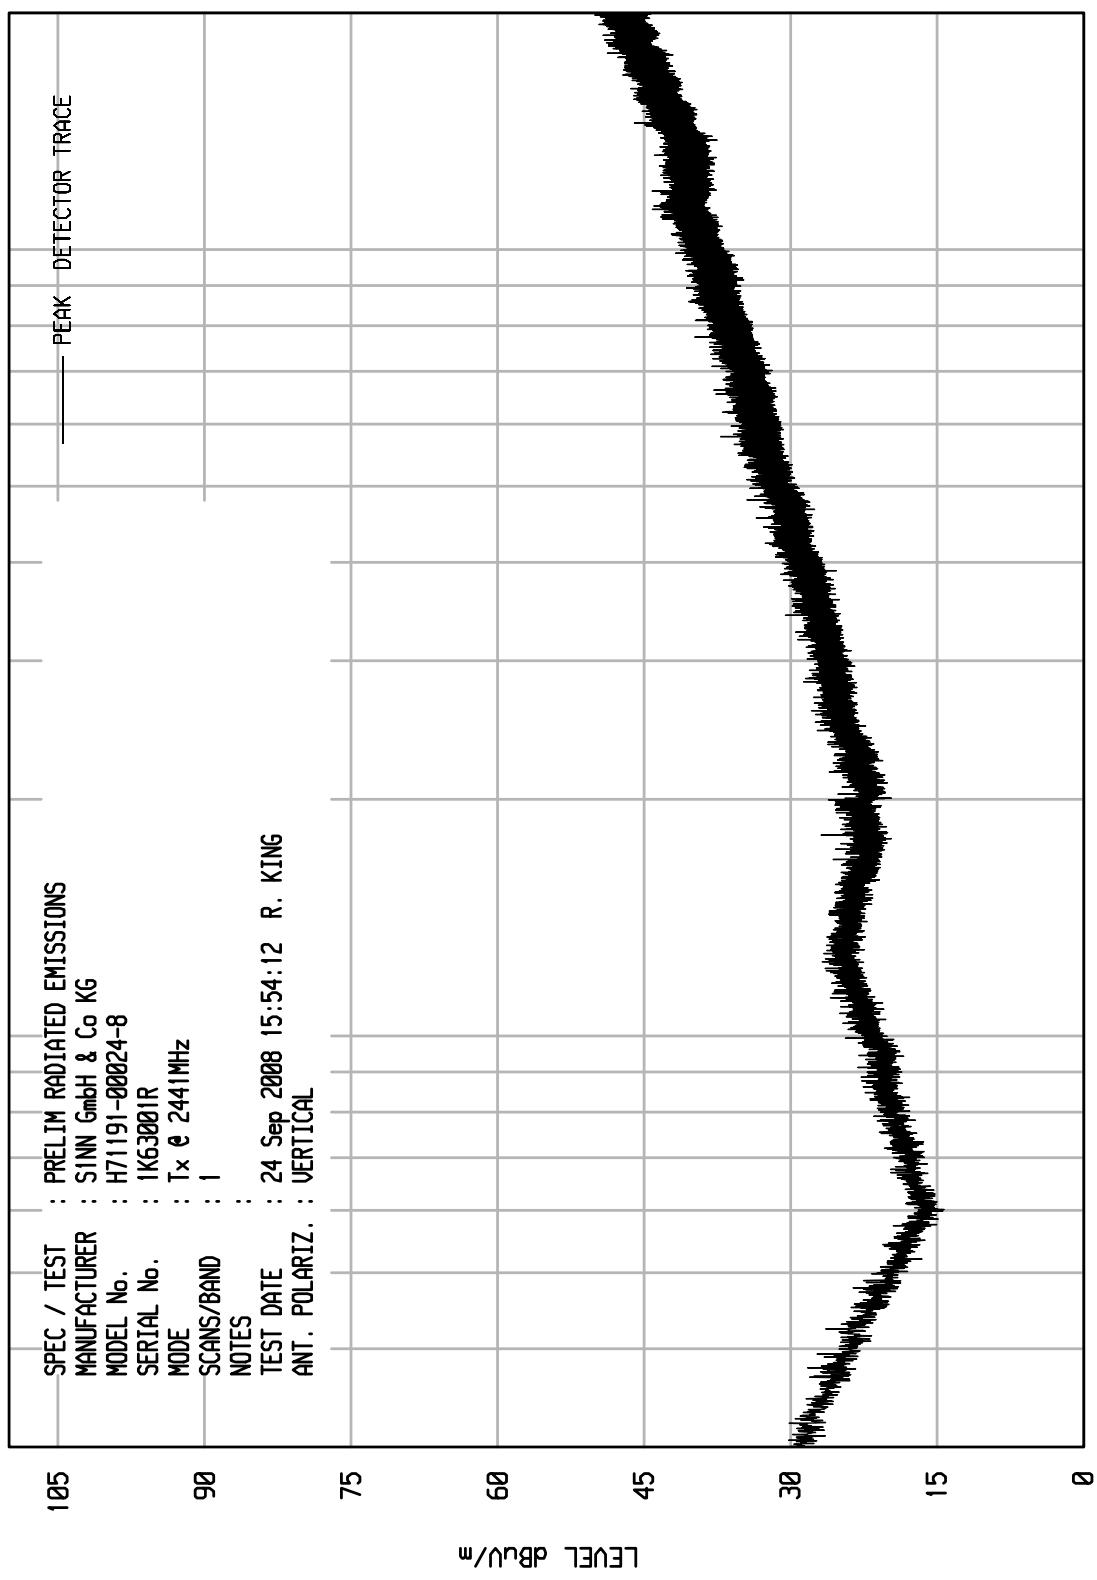


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNIT RCU EMI RUN 7


SPEC / TEST	PRELIM RADIATED EMISSIONS
MANUFACTURER	SINN GmbH & Co KG
MODEL No.	H71191-000024-8
SERIAL No.	1K63001R
MODE	Tx & 248MHz
SCANS/BAND	1
NOTES	
TEST DATE	24 Sep 2008 15:45:09
ANT. POLARIZ.	HORIZONTAL

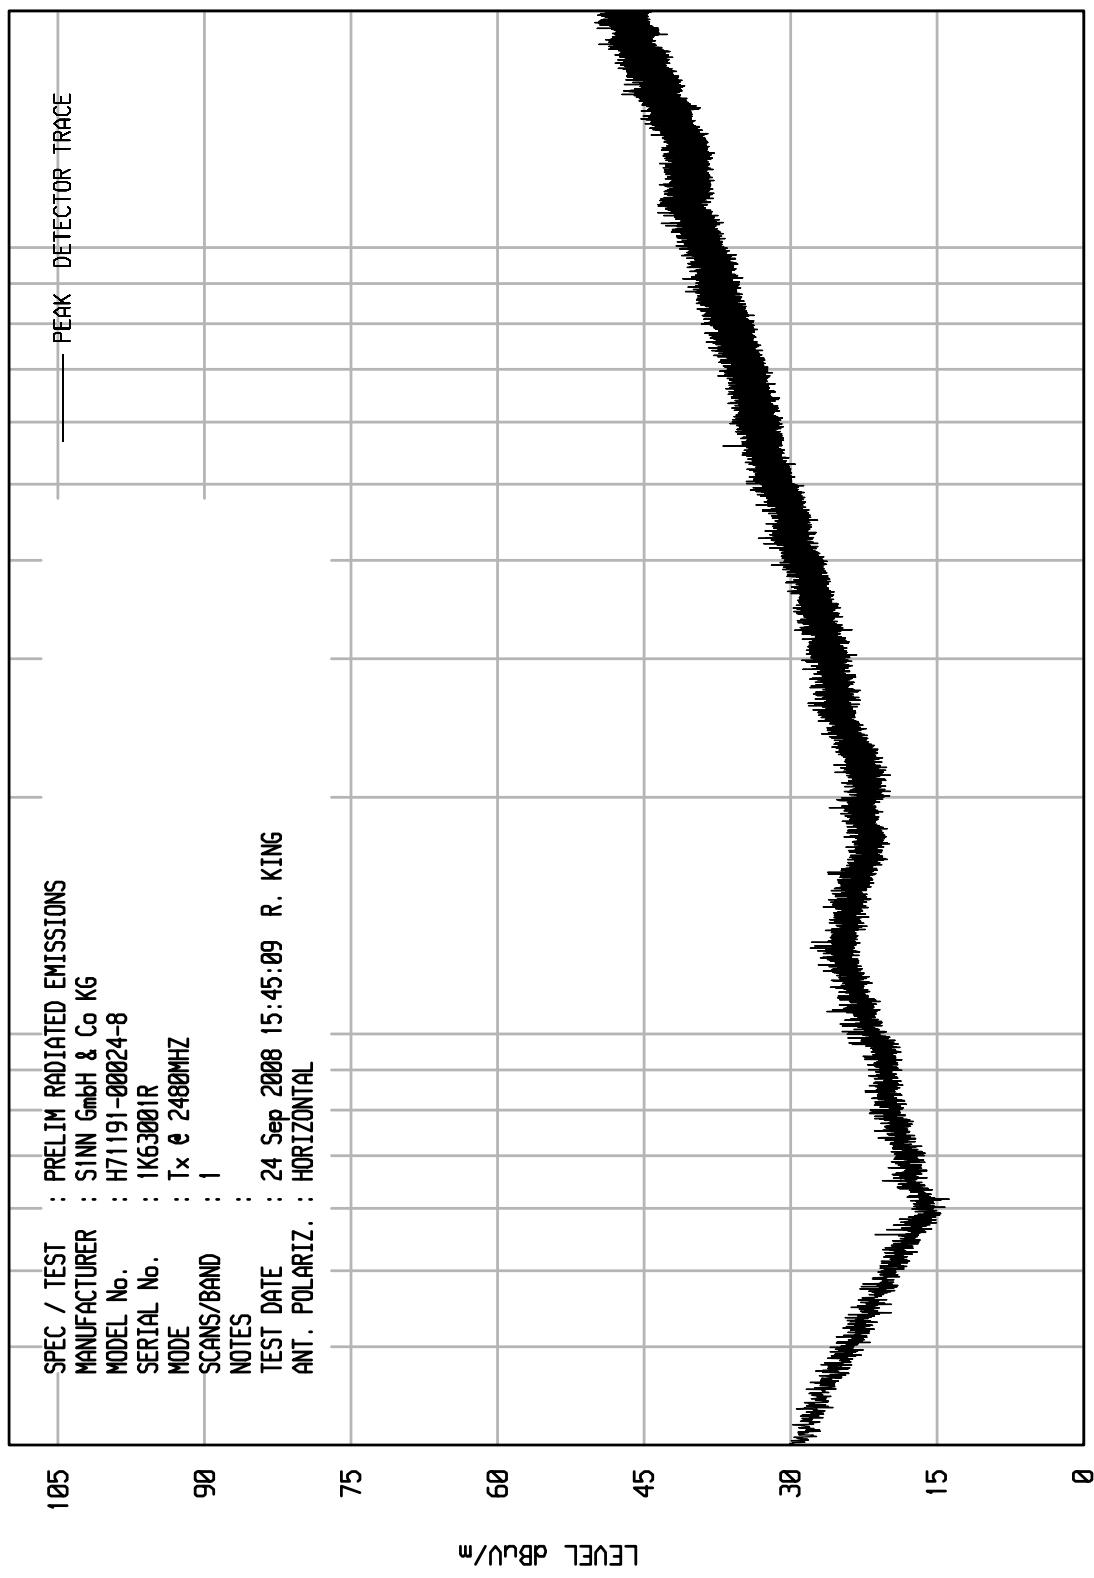

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08


UNI TU RCU EMI RUN 8

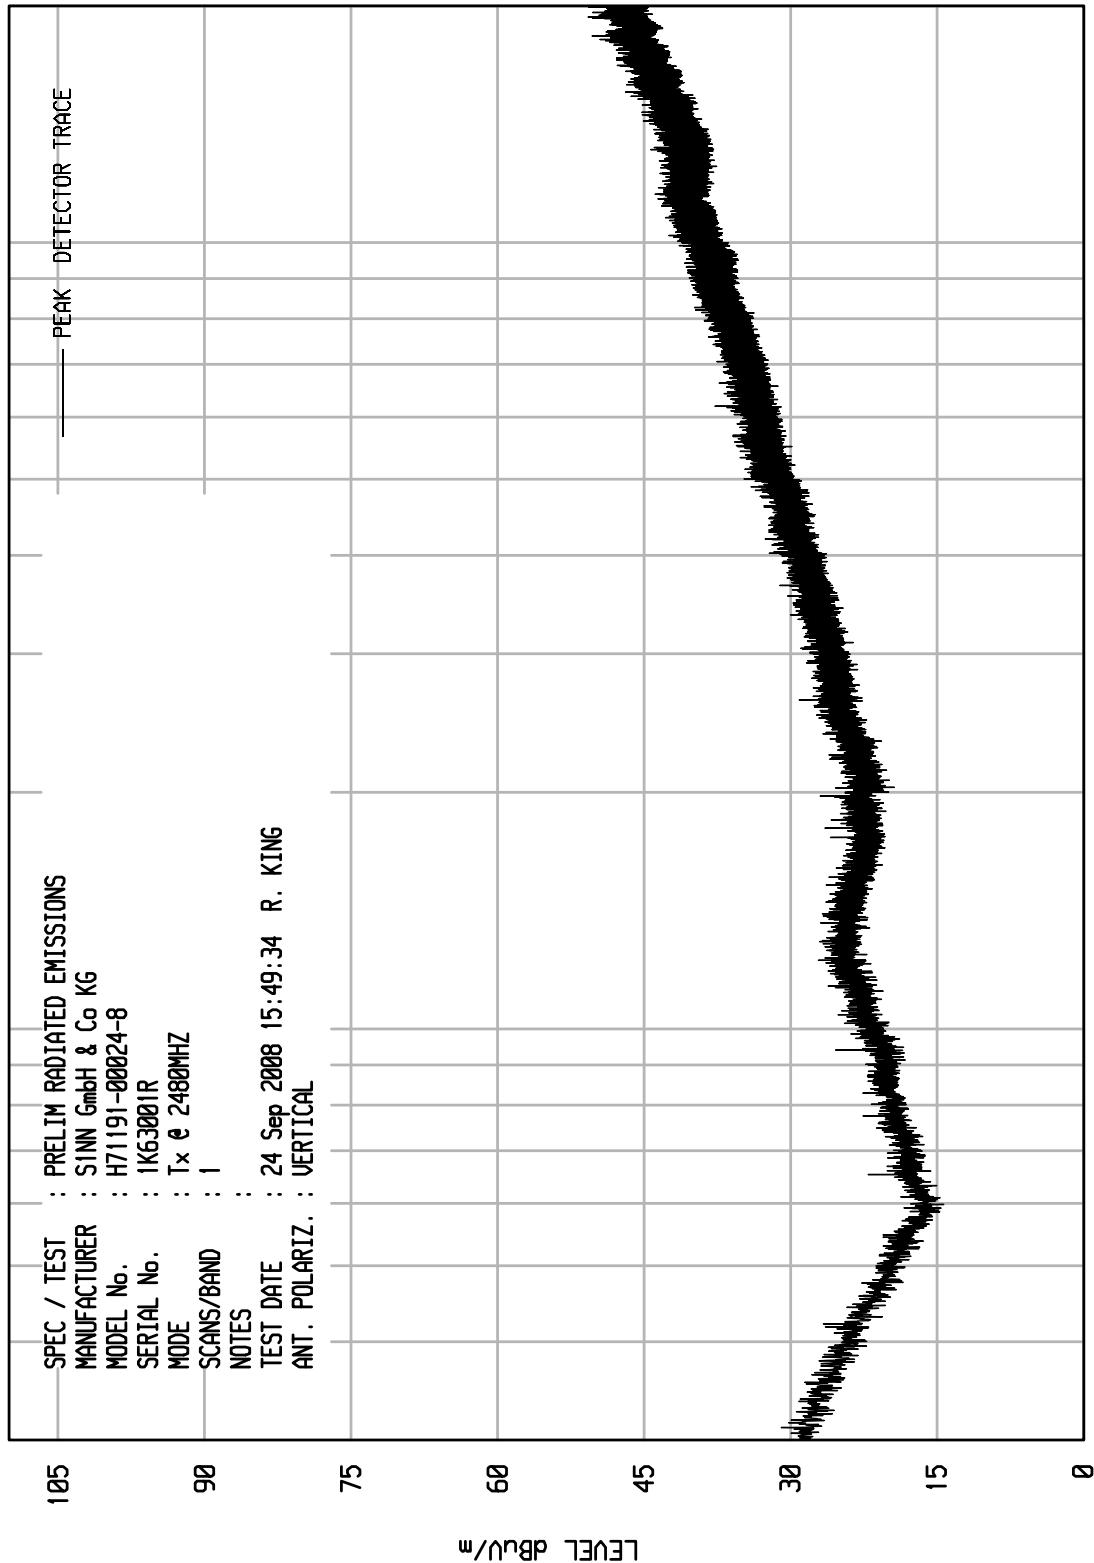


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNITU RCU EMI RUN 1

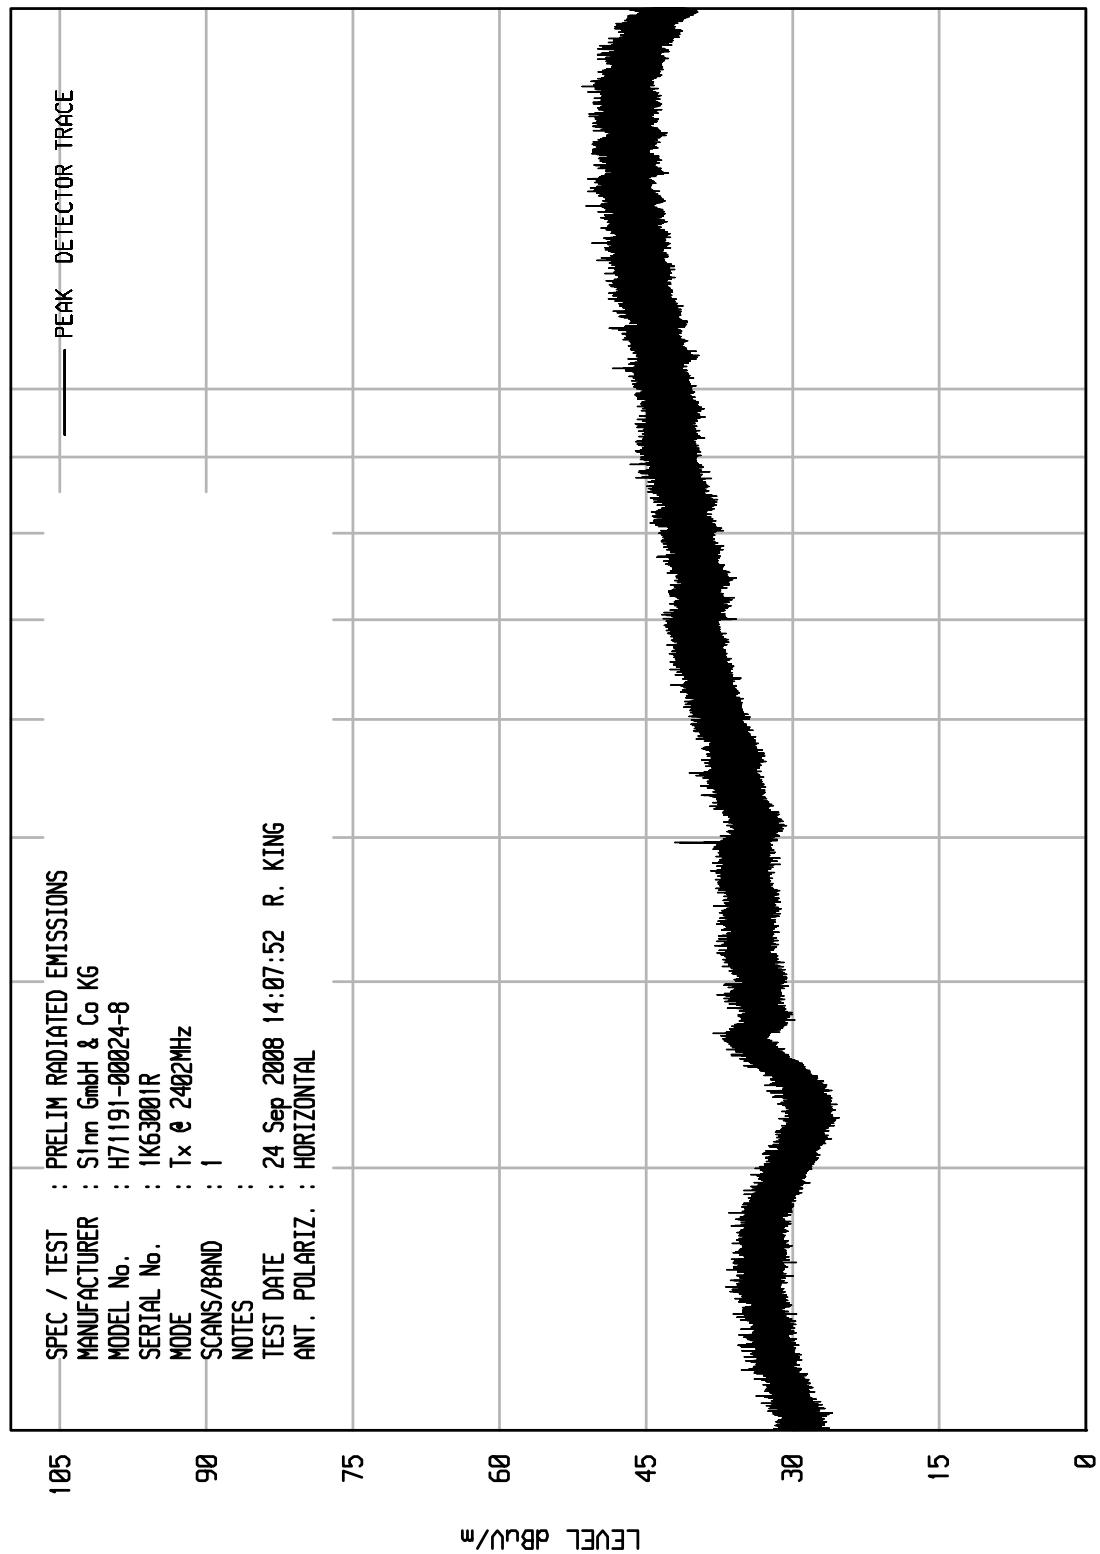

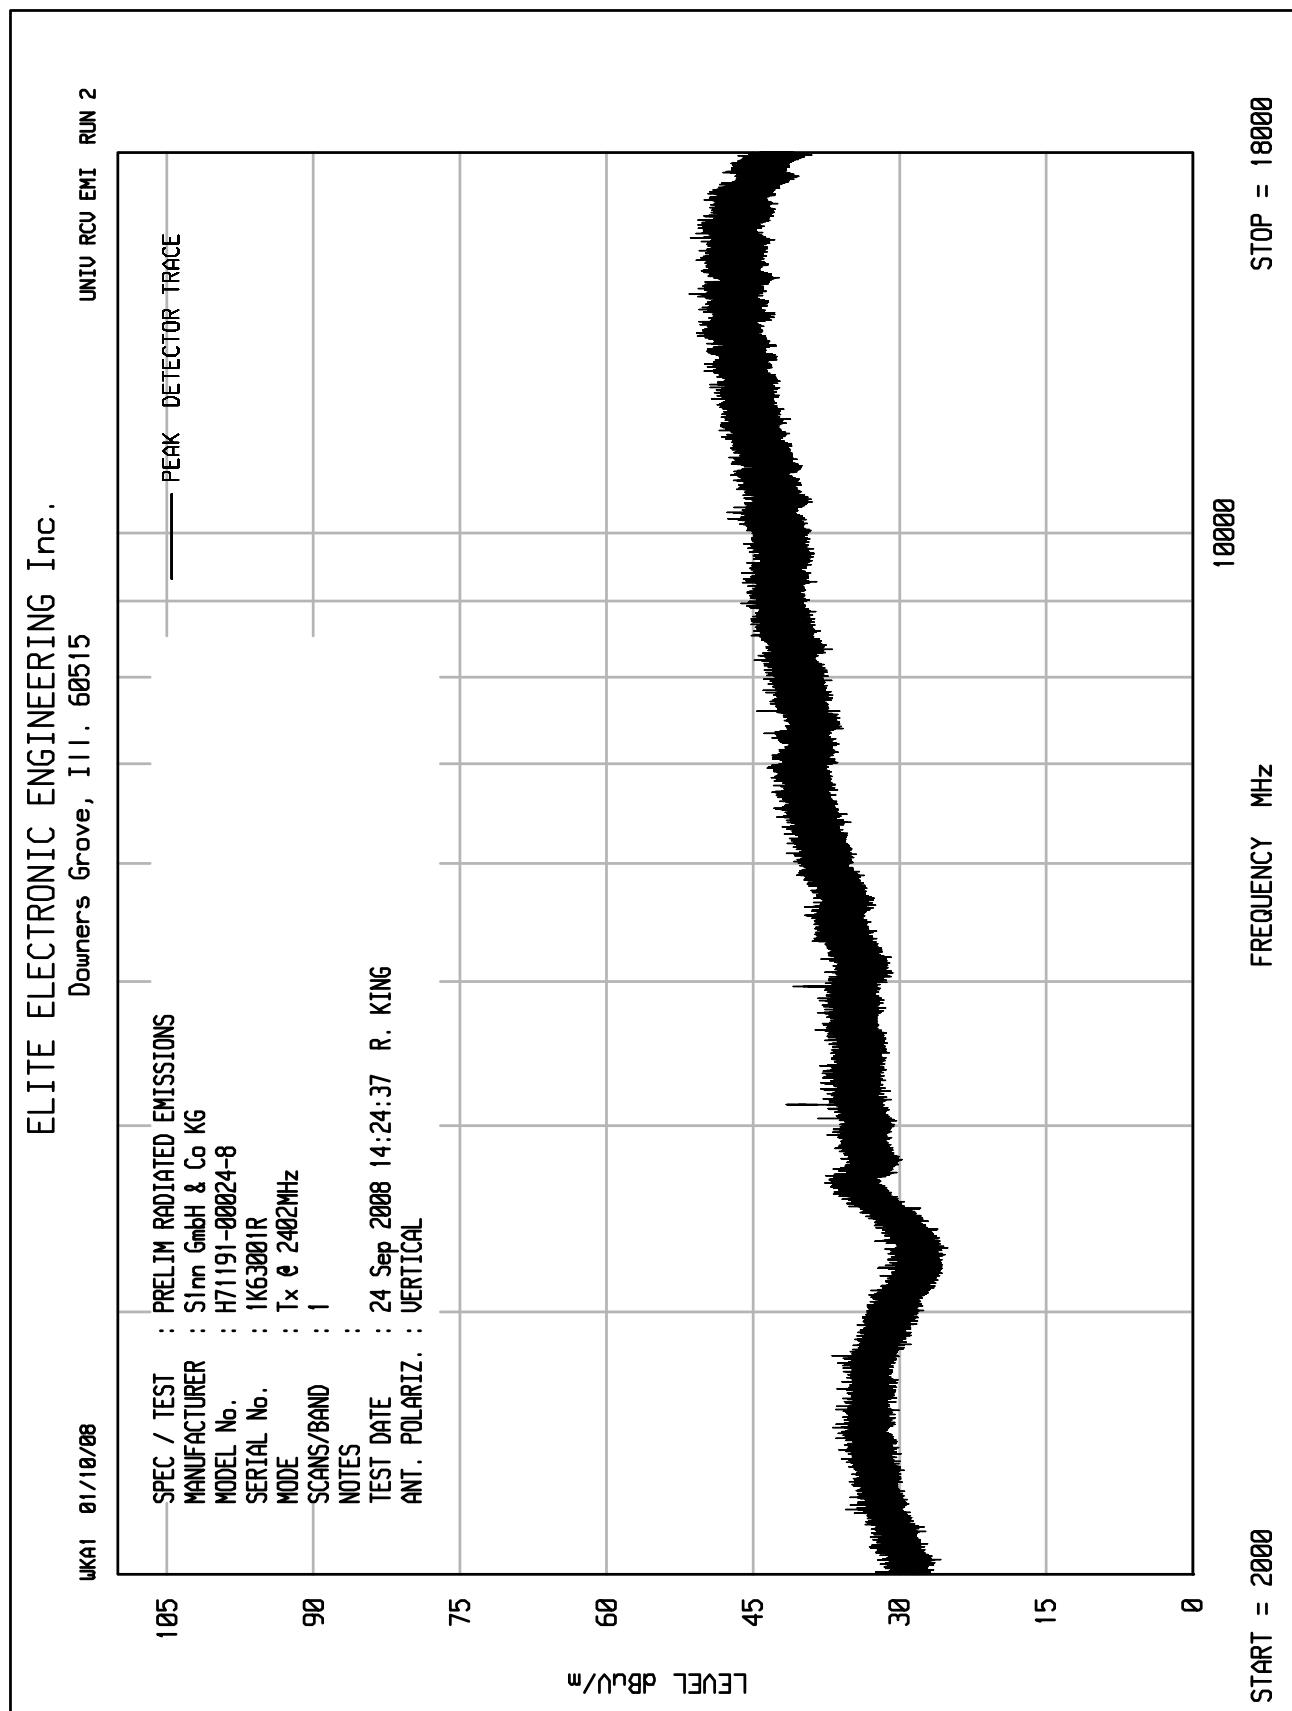


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNIT RCU EMI RUN 4

SPEC / TEST	PRELIM RADIATED EMISSIONS
MANUFACTURER	Siem GmbH & Co KG
MODEL No.	H71191-00024-8
SERIAL No.	IK63001R
MODE	Tx & 244MHz
SCANS/BAND	1
NOTES	
TEST DATE	24 Sep 2008 14:54:40
ANT. POLARIZ.	HORIZONTAL

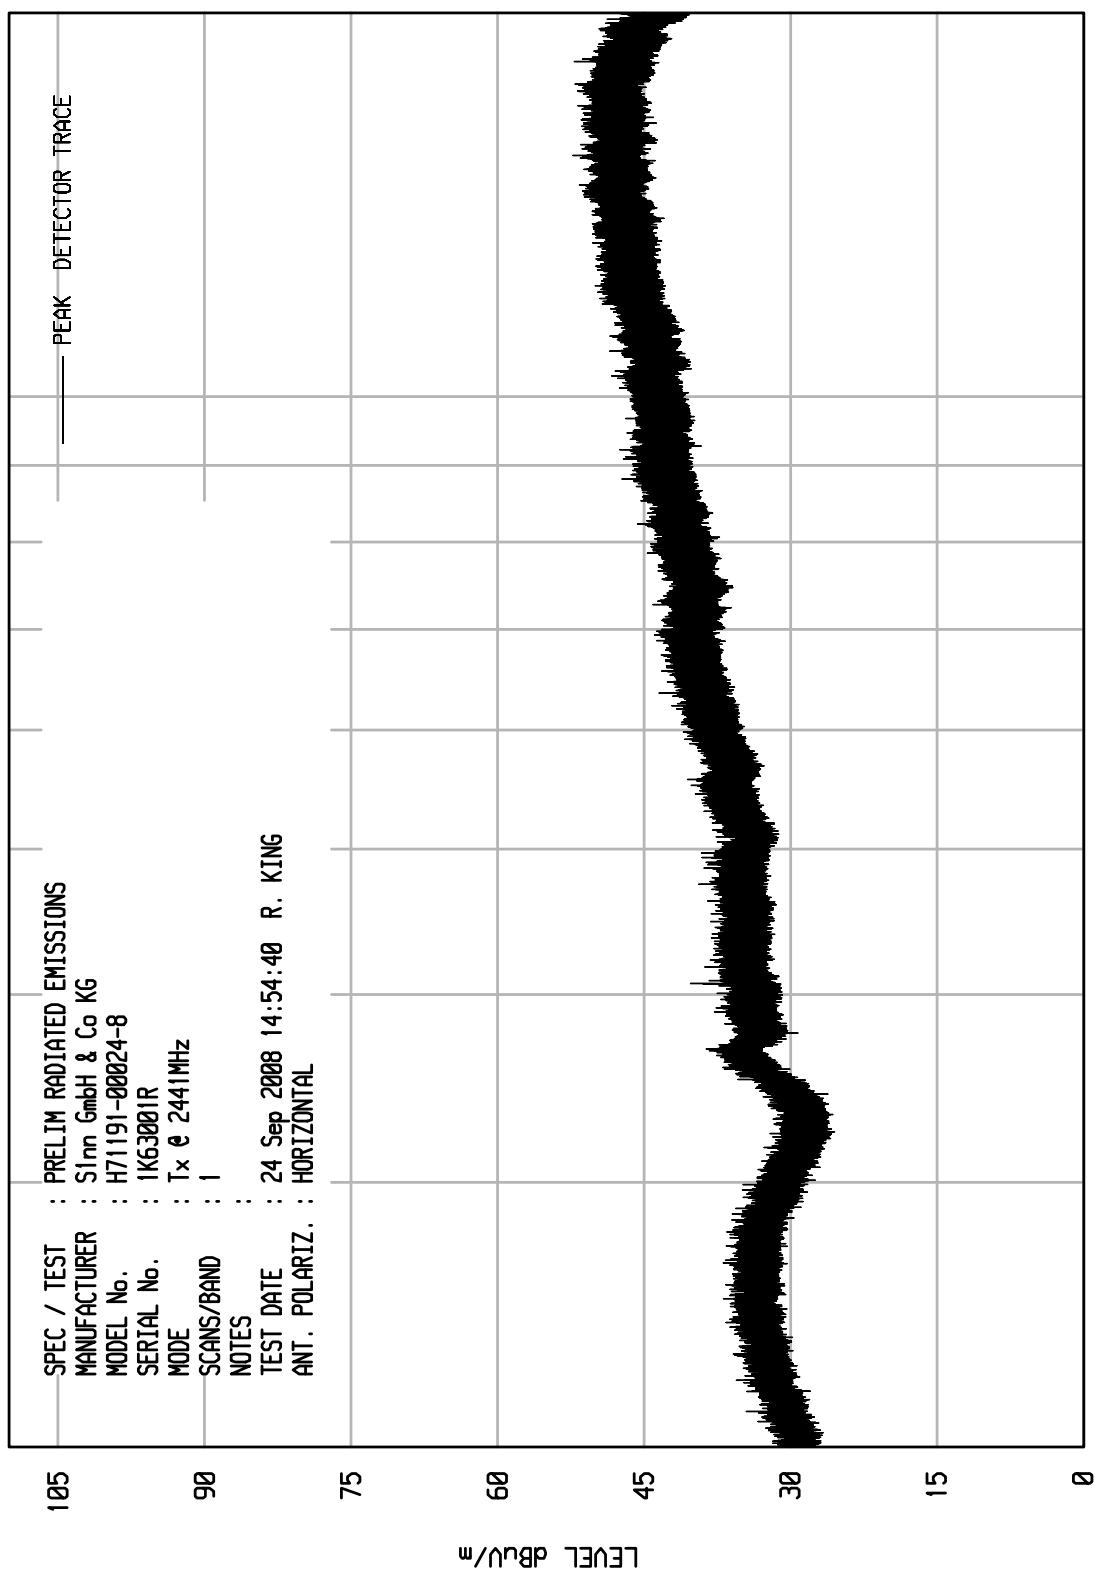


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNIT RCU EMI RUN 3

SPEC / TEST	PRELIM RADIATED EMISSIONS
MANUFACTURER	Siem GmbH & Co KG
MODEL No.	H71191-00024-8
SERIAL No.	IK63001R
MODE	Tx & 244MHz
SCANS/BAND	1
NOTES	
TEST DATE	24 Sep 2008 14:42:08
ANT. POLARIZ.	VERTICAL

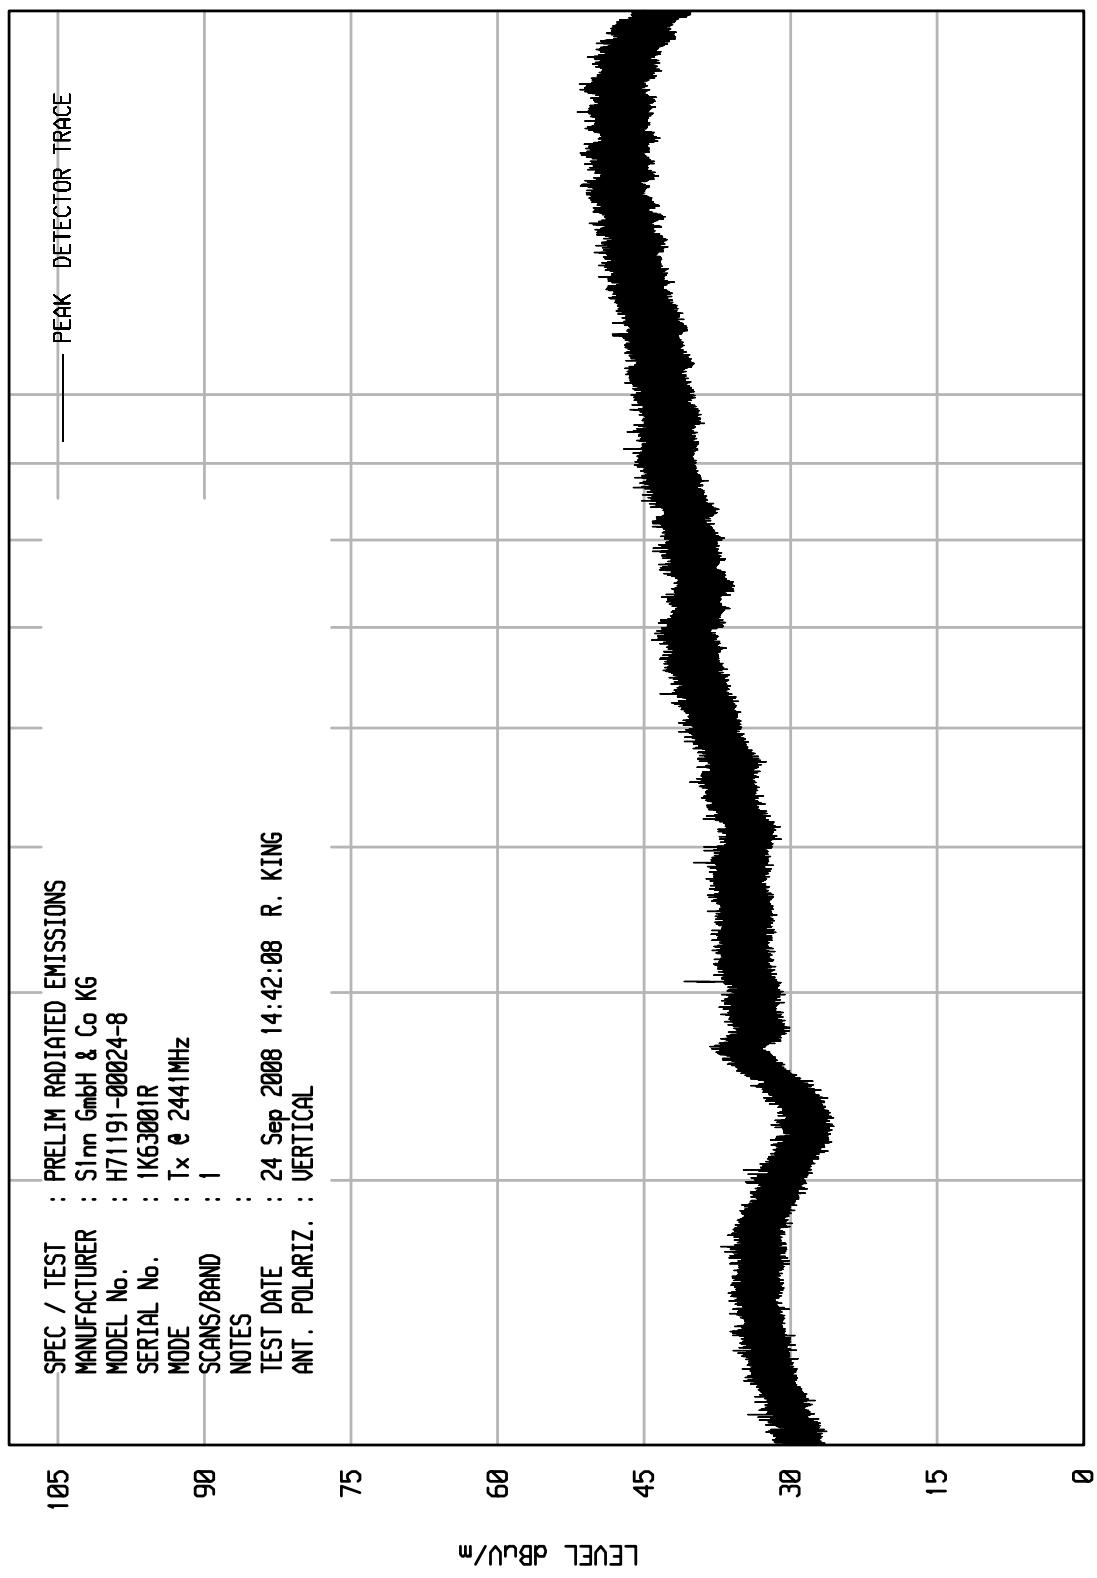


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/10/08

UNIT RCU EMI RUN 5

SPEC / TEST	PRELIM RADIATED EMISSIONS
MANUFACTURER	Siemens GmbH & Co KG
MODEL No.	H71191-000024-8
SERIAL No.	IK63001R
MODE	Tx & 248MHz
SCANS/BAND	1
NOTES	
TEST DATE	24 Sep 2008 15:08:04
ANT. POLARIZ.	HORIZONTAL

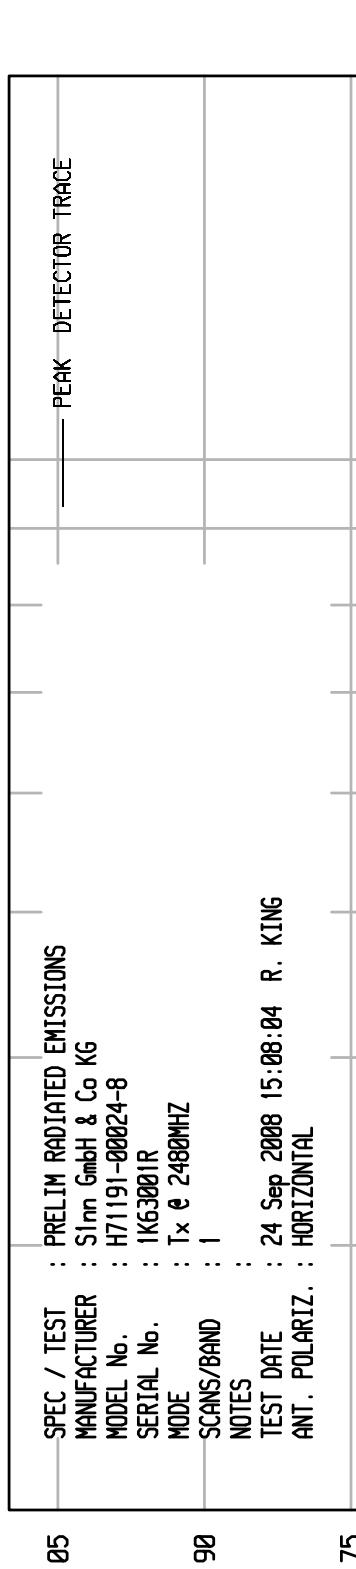

START = 2000

STOP = 18000


10000


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515


WKA1 01/10/08


UNITU RCU EMI RUN 6


SPEC / TEST	PRELIM RADIATED EMISSIONS
MANUFACTURER	Siemens GmbH & Co KG
MODEL No.	H71191-000024-8
SERIAL No.	IK63001R
MODE	Tx & 248MHz
SCANS/BAND	1
NOTES	
TEST DATE	24 Sep 2008 15:20:10
ANT. POLARIZ.	VERTICAL

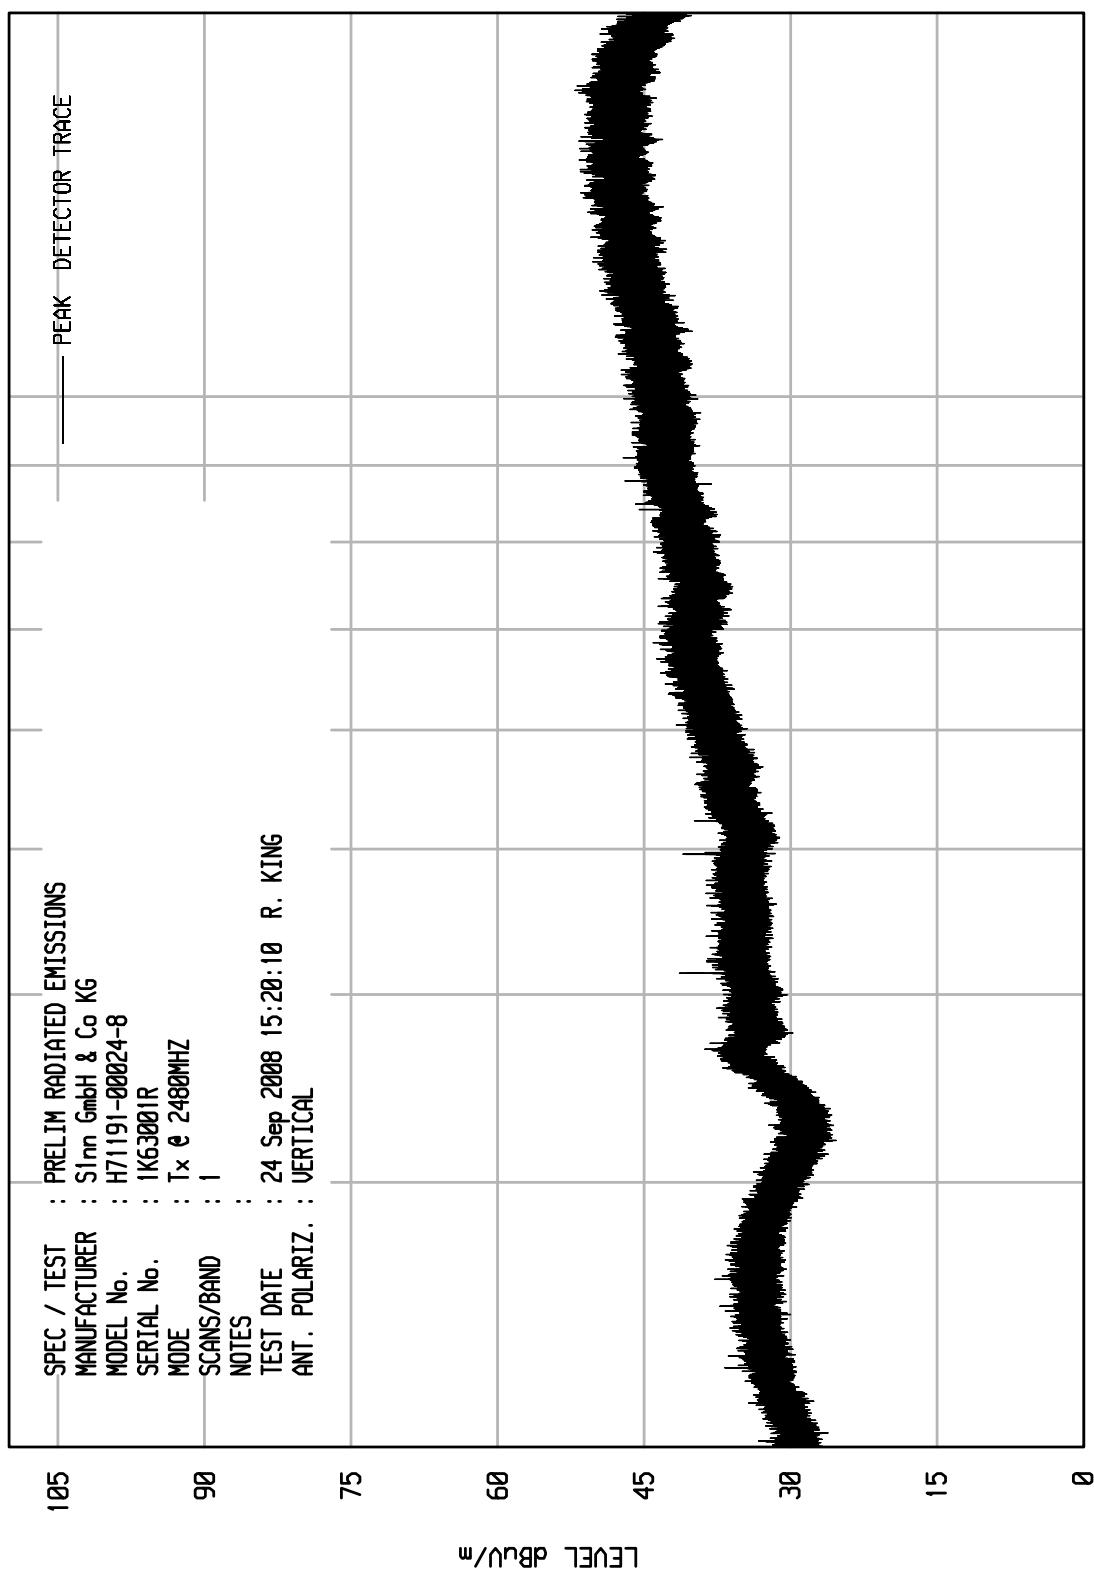


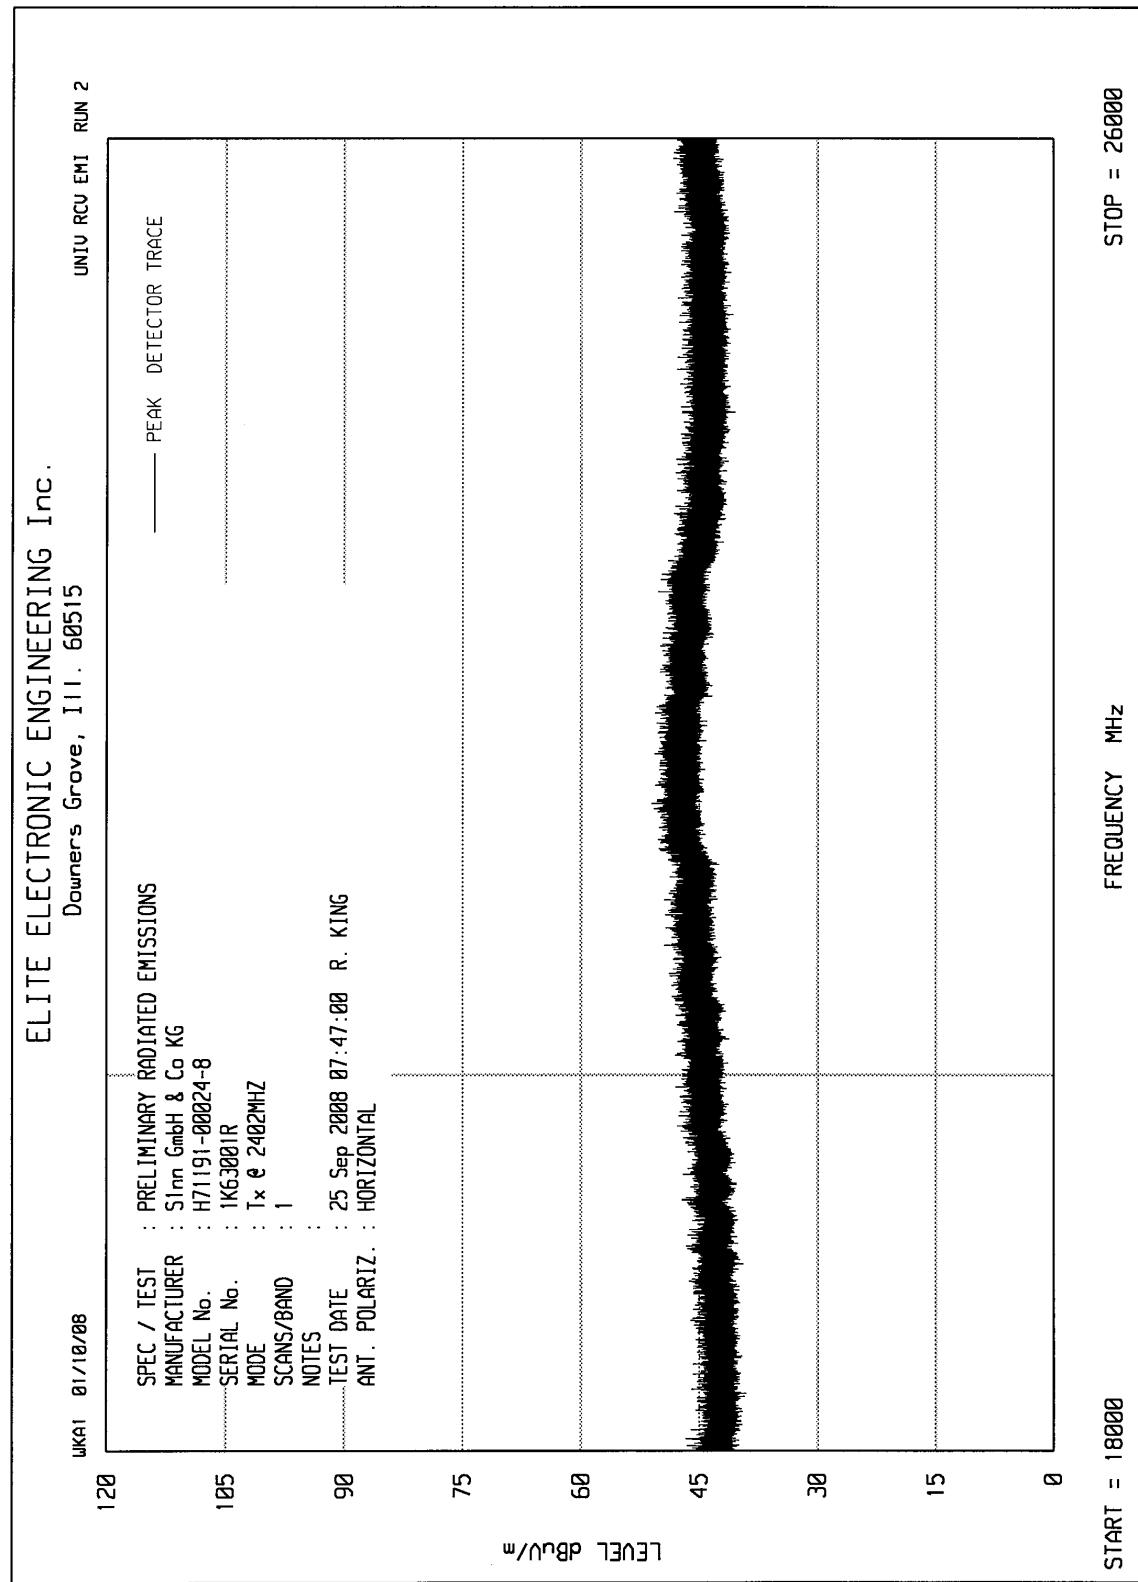


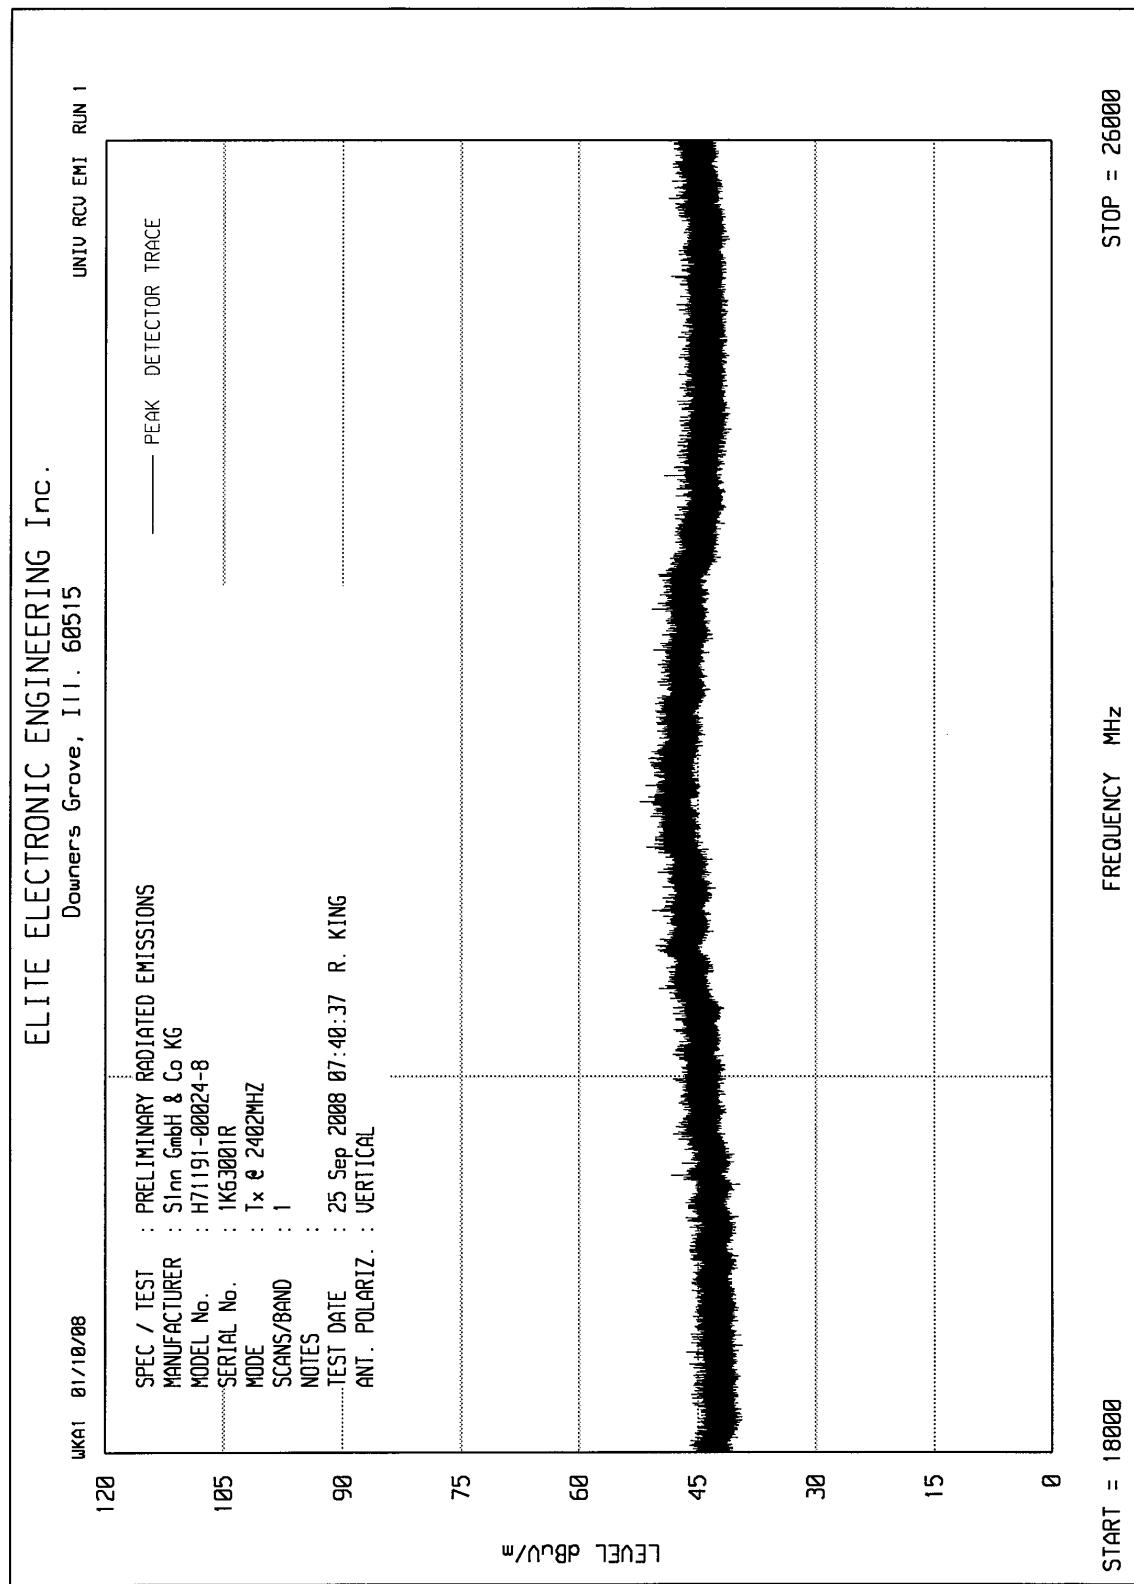

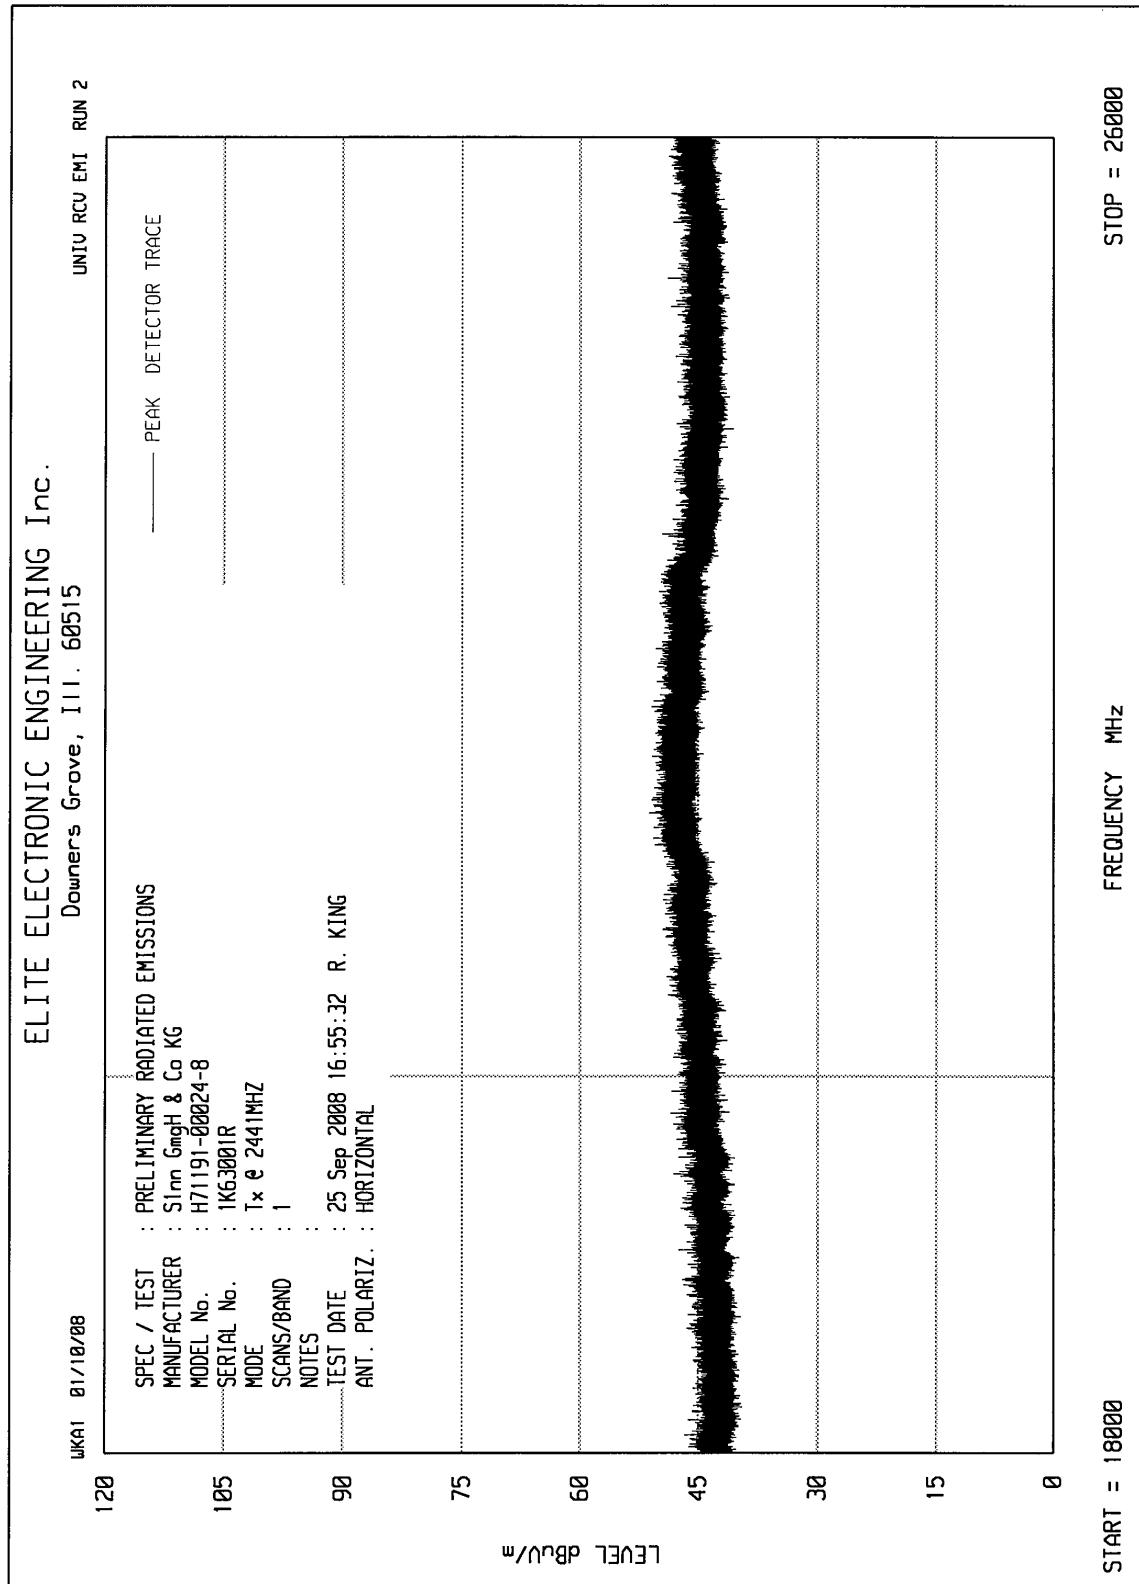

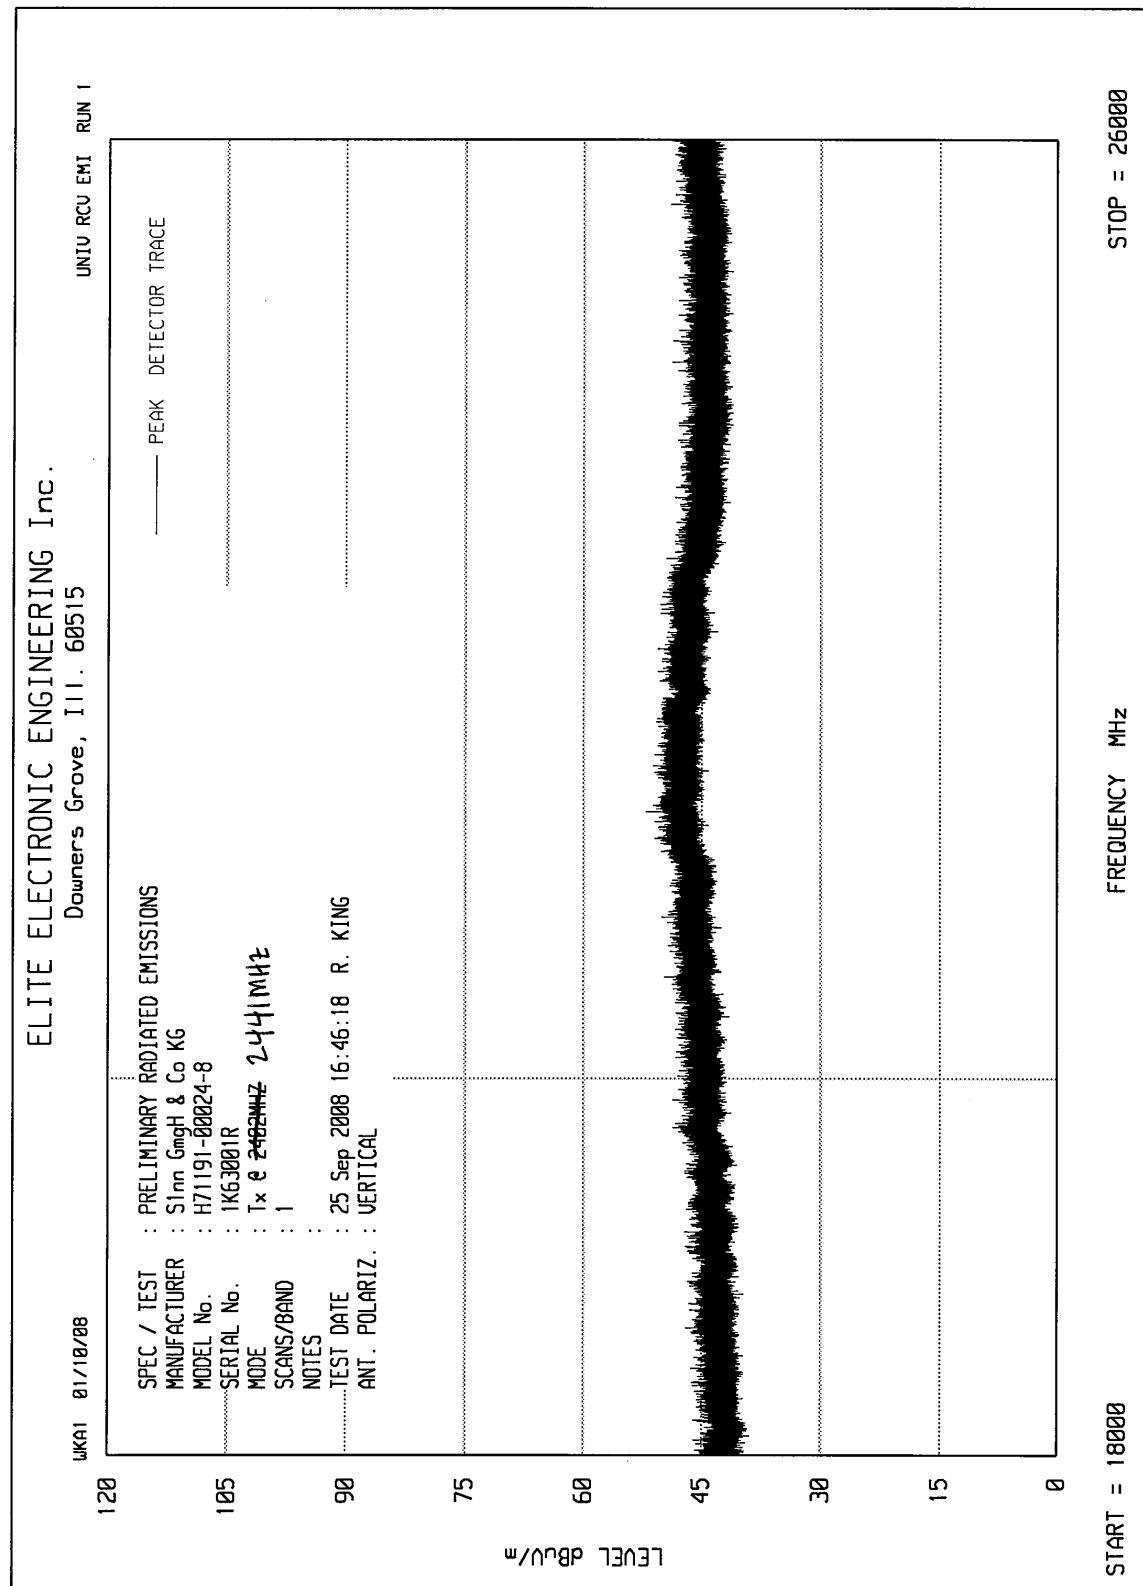

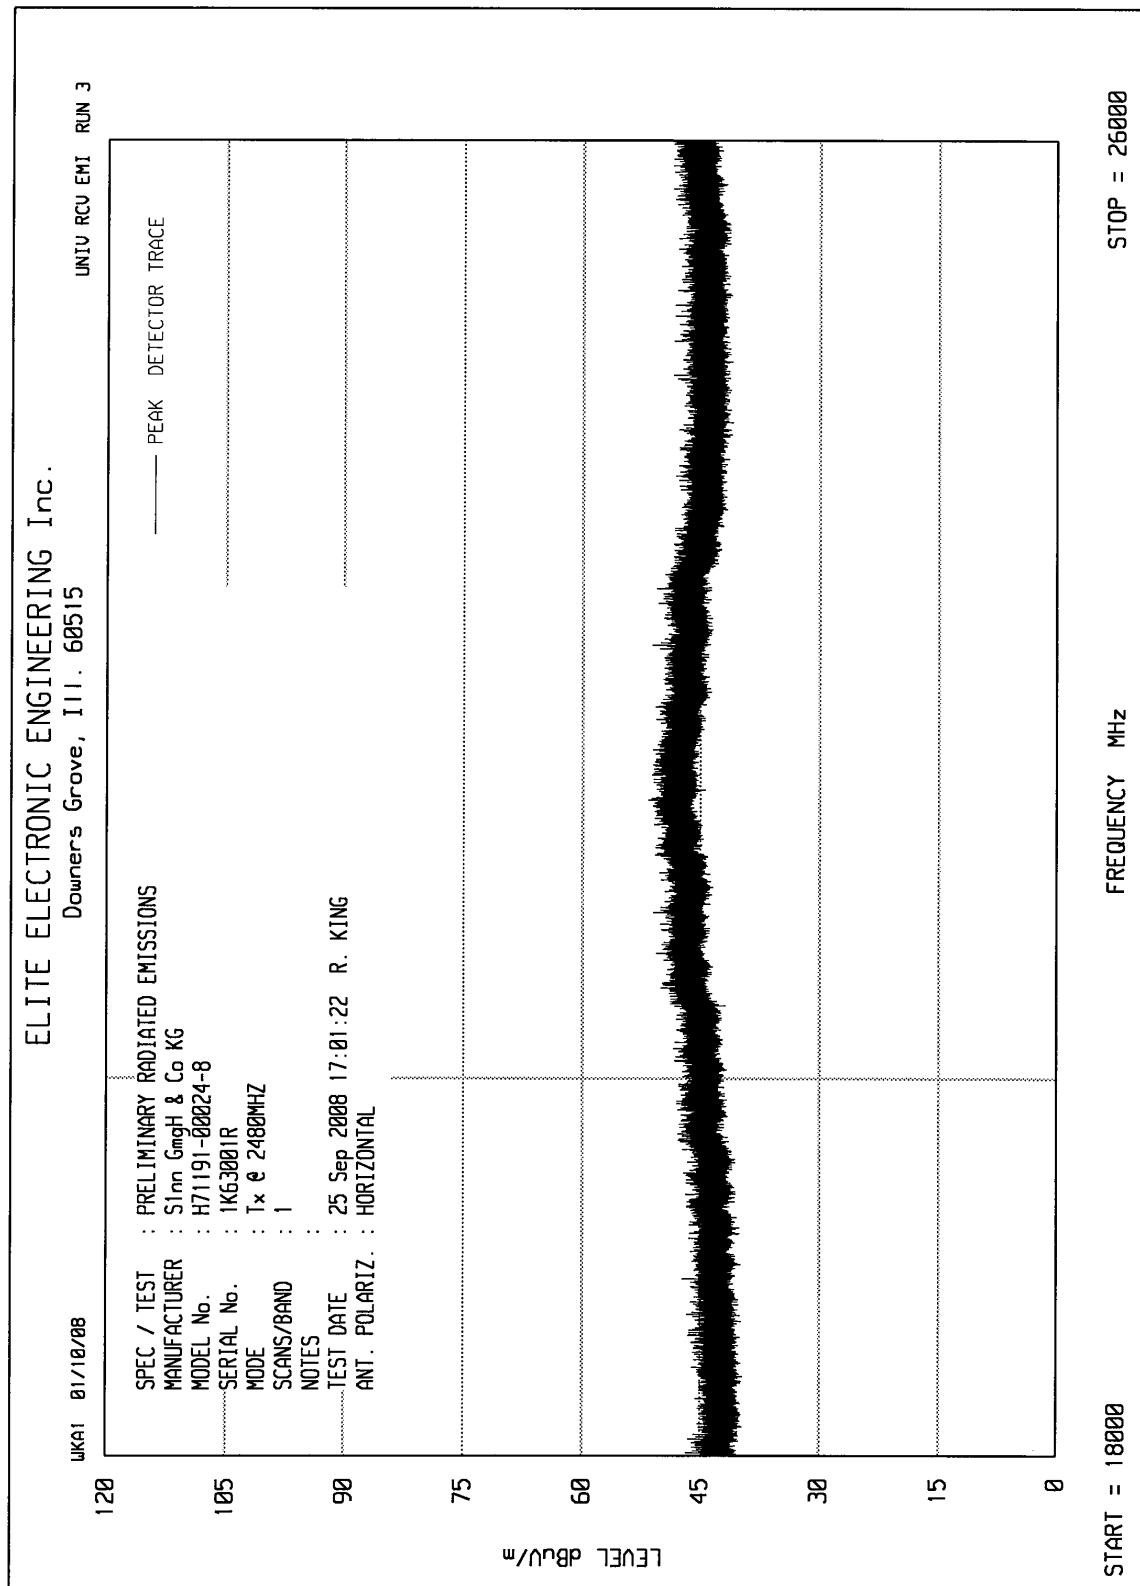

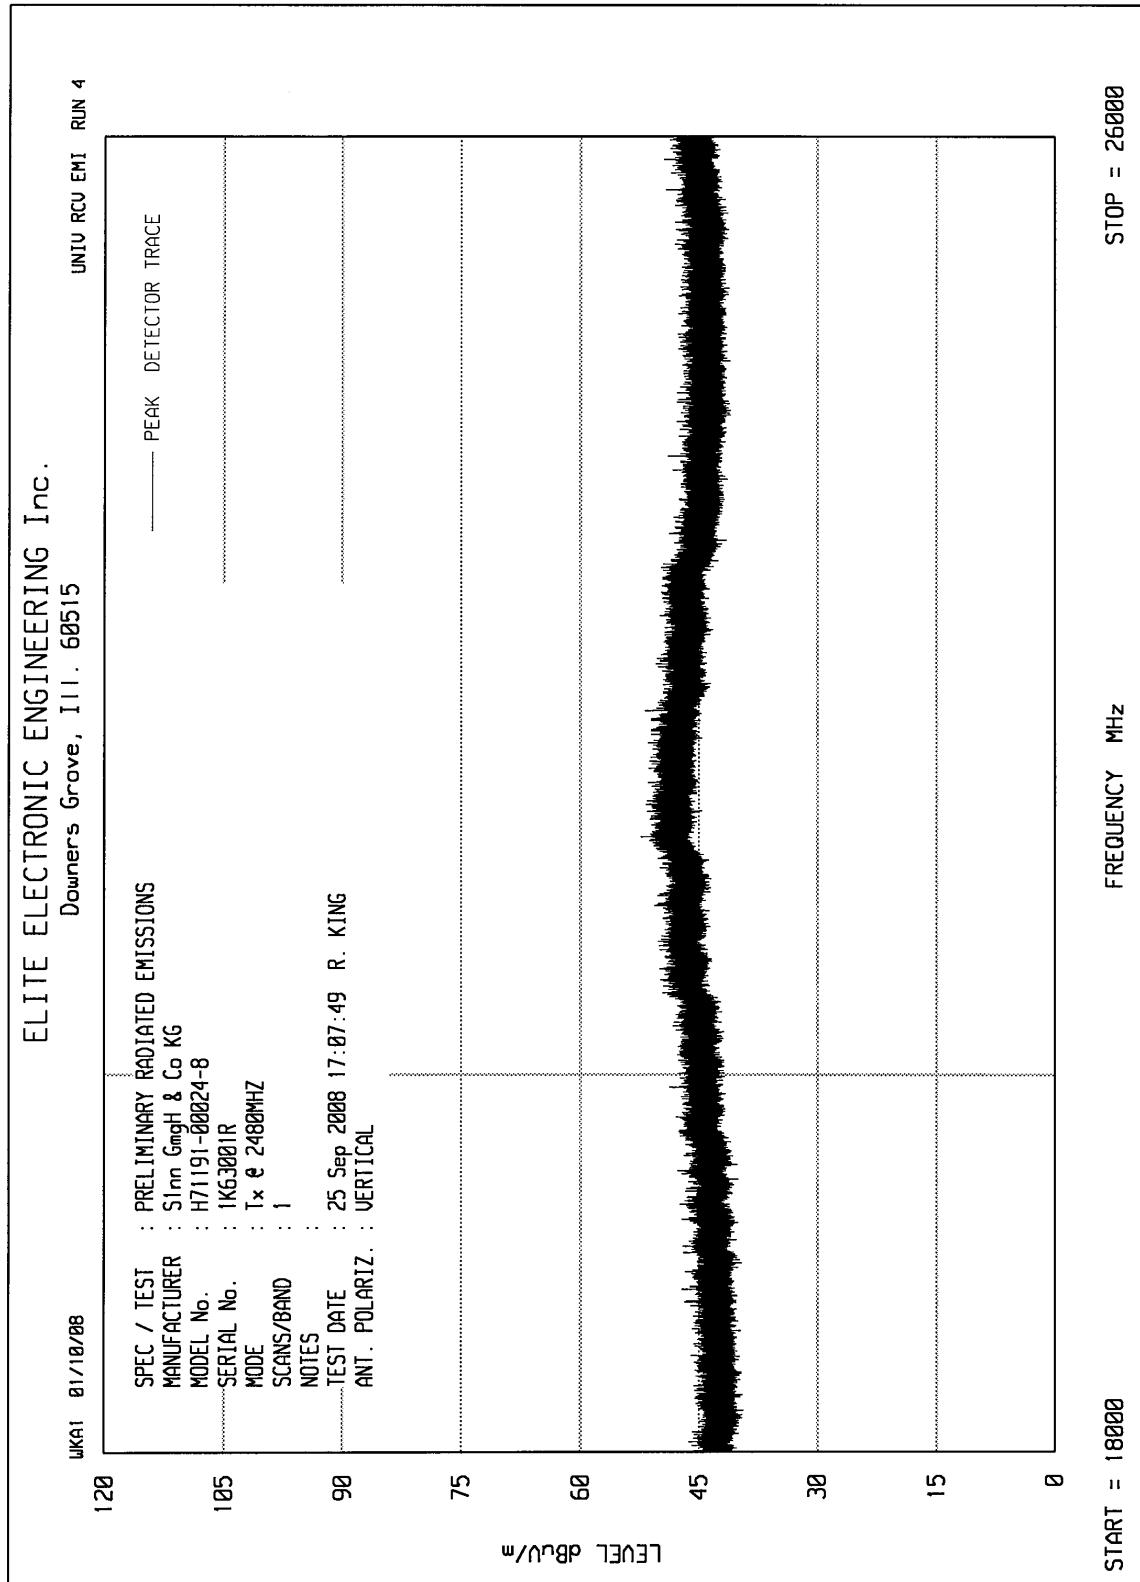



Data Page

Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions
Date : September 25, 2008
Mode : Transmit @ 2402.0MHz
Test Distance : 3 meters
Notes : Gray rows indicate restricted bands which must meet the general limits
: Peak measurements

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Pre Amp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
2402.0	H	69.1		3.8	31.3	0.0	104.2	162427.7	
2402.0	V	63.1		3.8	31.3	0.0	98.2	81126.0	
4804.0	H	46.3		5.7	34.8	-35.9	50.9	351.9	50000
4804.0	V	47.3		5.7	34.8	-35.9	51.9	394.9	50000
7206.0	H	41.6	*	7.6	38.1	-35.5	51.8	389.4	16242.8
7206.0	V	41.8	*	7.6	38.1	-35.5	52.1	401.2	16242.8
9608.0	H	42.0	*	8.6	39.6	-35.1	55.1	568.8	16242.8
9608.0	V	43.7	*	8.6	39.6	-35.1	56.9	698.1	16242.8
12010.0	H	41.3	*	9.8	41.4	-34.4	58.1	807.3	50000
12010.0	V	40.9	*	9.8	41.4	-34.4	57.8	771.9	50000
14412.0	H	41.4	*	10.9	43.6	-33.9	62.1	1271.3	16242.8
14412.0	V	42.2	*	10.9	43.6	-33.9	62.9	1392.3	16242.8
16814.0	H	40.4	*	11.6	44.8	-33.9	62.9	1401.1	16242.8
16814.0	V	40.0	*	11.6	44.8	-33.9	62.5	1338.0	16242.8
19216.0	H	35.1	*	2.2	40.4	-27.5	50.2	323.8	50000
19216.0	V	35.0	*	2.2	40.4	-27.5	50.1	320.1	50000
21618.0	H	36.5	*	2.2	40.6	-26.2	53.1	452.8	16242.8
21618.0	V	36.5	*	2.2	40.6	-26.2	53.1	452.8	16242.8
24020.0	H	33.7	*	2.2	40.6	-27.4	49.1	285.7	16242.8
24020.0	V	33.7	*	2.2	40.6	-27.4	49.1	285.7	16242.8

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked BY : *Richard E. King*

Richard E. King



Data Page

Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions
Date : September 25, 2008
Mode : Transmit @ 2402.0MHz
Test Distance : 3 meters
Notes : Gray rows indicate restricted bands which must meet the general limits
: Average measurements

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Pre Amp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
2402.0	H	69.1		3.8	31.3	0.0	104.2	162427.7	
2402.0	V	63.1		3.8	31.3	0.0	98.2	81126.0	
4804.0	H	46.3		5.7	34.8	-35.9	50.9	351.9	500
4804.0	V	47.3		5.7	34.8	-35.9	51.9	394.9	500
7206.0	H	30.7	*	7.6	38.1	-35.5	40.9	111.4	16242.8
7206.0	V	30.6	*	7.6	38.1	-35.5	40.8	110.1	16242.8
9608.0	H	31.9	*	8.6	39.6	-35.1	45.0	178.6	16242.8
9608.0	V	31.9	*	8.6	39.6	-35.1	45.0	178.6	16242.8
12010.0	H	32.0	*	9.8	41.4	-34.4	48.8	276.4	500
12010.0	V	29.3	*	9.8	41.4	-34.4	46.1	202.6	500
14412.0	H	28.2	*	10.9	43.6	-33.9	48.8	276.8	16242.8
14412.0	V	28.5	*	10.9	43.6	-33.9	49.1	286.6	16242.8
16814.0	H	28.8	*	11.6	44.8	-33.9	51.3	368.9	16242.8
16814.0	V	28.6	*	11.6	44.8	-33.9	51.1	360.6	16242.8
19216.0	H	20.1	*	2.2	40.4	-27.5	35.2	57.6	500
19216.0	V	20.1	*	2.2	40.4	-27.5	35.2	57.6	500
21618.0	H	22.1	*	2.2	40.6	-26.2	38.7	86.3	18308.8
21618.0	V	22.8	*	2.2	40.6	-26.2	39.4	93.5	18308.8
24020.0	H	20.4	*	2.2	40.6	-27.4	35.8	61.8	18308.8
24020.0	V	20.5	*	2.2	40.6	-27.4	35.9	62.5	18308.8

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked BY : *Richard E. King*

Richard E. King



Data Page

Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions
Date : September 24, 2008
Mode : Transmit @ 2441.0 MHz
Test Distance : 3 meters
Notes : Gray rows indicate restricted bands which must meet the general limits
: Peak measurements

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Pre Amp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
2441.0	H	68.6		3.8	31.3	0.0	103.8	154273.1	
2441.0	V	64.1		3.8	31.3	0.0	99.3	91894.6	
4882.0	H	45.2		5.8	34.9	-35.9	49.9	314.3	5000.0
4882.0	V	48.2		5.8	34.9	-35.9	52.9	441.9	5000.0
7323.0	H	46.7	*	7.7	38.2	-35.5	57.0	711.9	15427.3
7323.0	V	45.5	*	7.7	38.2	-35.5	55.8	620.0	15427.3
9764.0	H	46.2	*	8.6	39.8	-35.1	59.5	941.5	15427.3
9764.0	V	46.5	*	8.6	39.8	-35.1	59.8	974.6	15427.3
12205.0	H	46.7	*	9.9	41.5	-34.4	63.7	1522.5	5000.0
12205.0	V	45.5	*	9.9	41.5	-34.4	62.5	1326.0	5000.0
14646.0	H	45.4	*	11.0	44.1	-33.9	66.6	2138.6	15427.3
14646.0	V	45.1	*	11.0	44.1	-33.9	66.3	2066.0	15427.3
17087.0	H	45.0	*	11.8	44.7	-33.9	67.6	2385.6	15427.3
17087.0	V	46.2	*	11.8	44.7	-33.9	68.8	2739.0	15427.3
19528.0	H	35.1	*	2.2	40.4	-27.2	50.5	335.6	5000.0
19528.0	V	35.0	*	2.2	40.4	-27.2	50.4	331.8	5000.0
21969.0	H	36.5	*	2.2	40.6	-26.9	52.3	414.3	15427.3
21969.0	V	36.5	*	2.2	40.6	-26.9	52.3	414.3	15427.3
24410.0	H	33.8	*	2.2	40.6	-27.5	49.2	287.9	15427.3
24410.0	V	33.7	*	2.2	40.6	-27.5	49.1	284.6	15427.3

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked BY : *Richard E. King*

Richard E. King



Data Page

Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions
Date : September 24, 2008
Mode : Transmit @ 2441.0 MHz
Test Distance : 3 meters
Notes : Gray rows indicate restricted bands which must meet the general limits
: Average measurements

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Pre Amp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
2441.0	H	68.6		3.8	31.3	0.0	103.8	154273.1	
2441.0	V	64.1		3.8	31.3	0.0	99.3	91894.6	
4882.0	H	45.2		5.8	34.9	-35.9	49.9	314.3	500.0
4882.0	V	48.2		5.8	34.9	-35.9	52.9	441.9	500.0
7323.0	H	31.6	*	7.7	38.2	-35.5	41.9	125.1	15427.3
7323.0	V	31.7	*	7.7	38.2	-35.5	42.0	126.6	15427.3
9764.0	H	31.4	*	8.6	39.8	-35.1	44.7	171.3	15427.3
9764.0	V	31.4	*	8.6	39.8	-35.1	44.7	171.3	15427.3
12205.0	H	31.8	*	9.9	41.5	-34.4	48.8	273.9	500.0
12205.0	V	31.7	*	9.9	41.5	-34.4	48.7	270.7	500.0
14646.0	H	31.6	*	11.0	44.1	-33.9	52.8	436.6	15427.3
14646.0	V	31.6	*	11.0	44.1	-33.9	52.8	436.6	15427.3
17087.0	H	31.6	*	11.8	44.7	-33.9	54.2	510.0	15427.3
17087.0	V	31.6	*	11.8	44.7	-33.9	54.2	510.0	15427.3
19528.0	H	20.1	*	2.2	40.4	-27.2	35.5	59.7	500.0
19528.0	V	20.0	*	2.2	40.4	-27.2	35.4	59.0	500.0
21969.0	H	22.1	*	2.2	40.6	-26.9	37.9	78.9	15427.3
21969.0	V	22.2	*	2.2	40.6	-26.9	38.0	79.9	15427.3
24410.0	H	20.3	*	2.2	40.6	-27.5	35.7	60.9	15427.3
24410.0	V	20.2	*	2.2	40.6	-27.5	35.6	60.2	15427.3

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked BY : *Richard E. King*

Richard E. King



Data Page

Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions
Date : September 24, 2008
Mode : Transmit @ 2480.0 MHz
Test Distance : 3 meters
Notes : Gray rows indicate restricted bands which must meet the general limits
: Peak measurements

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Pre Amp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
2480.0	H	69.2		3.8	31.4	0.0	104.4	166486.4	
2480.0	V	63.3		3.8	31.4	0.0	98.5	84504.3	
4960.0	H	40.8		5.8	34.9	-35.9	45.6	190.4	5000.0
4960.0	V	47.6		5.8	34.9	-35.9	52.4	414.6	5000.0
7440.0	H	41.7	*	7.7	38.2	-35.5	52.1	404.0	5000.0
7440.0	V	42.9	*	7.7	38.2	-35.5	53.4	466.5	5000.0
9920.0	H	41.2	*	8.5	39.9	-35.0	54.6	536.5	16648.6
9920.0	V	42.9	*	8.5	39.9	-35.0	56.3	654.0	16648.6
12400.0	H	41.4	*	1.2	41.5	-34.4	49.8	308.7	5000.0
12400.0	V	42.0	*	1.2	41.5	-34.4	50.3	327.7	5000.0
14880.0	H	40.4	*	1.3	44.6	-34.0	52.3	411.5	16648.6
14880.0	V	38.4	*	1.3	44.6	-34.0	50.3	326.5	16648.6
17360.0	H	39.5	*	1.5	44.6	-33.9	51.8	387.1	16648.6
17360.0	V	39.3	*	1.5	44.6	-33.9	51.5	376.6	16648.6
19840.0	H	35.1	*	2.2	40.4	-26.9	50.8	347.4	5000.0
19840.0	V	35.0	*	2.2	40.4	-26.9	50.7	343.5	5000.0
22320.0	H	36.5	*	2.2	40.6	-27.1	52.2	408.7	5000.0
22320.0	V	36.5	*	2.2	40.6	-27.1	52.2	408.7	5000.0
24800.0	H	33.7	*	2.2	40.7	-27.2	49.4	293.7	16648.6
24800.0	V	33.7	*	2.2	40.7	-27.2	49.4	293.7	16648.6

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked BY : *Richard E. King*

Richard E. King



Data Page


Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, Section 15.247, Radiated Emissions
Date : September 24, 2008
Mode : Transmit @ 2480.0 MHz
Test Distance : 3 meters
Notes : Gray rows indicate restricted bands which must meet the general limits
: Average measurements

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Pre Amp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
2480.0	H	69.2		3.8	31.4	0.0	104.4	166486.4	
2480.0	V	63.3		3.8	31.4	0.0	98.5	84504.3	
4960.0	H	40.8		5.8	34.9	-35.9	45.6	190.4	500.0
4960.0	V	47.6		5.8	34.9	-35.9	52.4	414.6	500.0
7440.0	H	30.7	*	7.7	38.2	-35.5	41.2	114.2	500.0
7440.0	V	30.7	*	7.7	38.2	-35.5	41.2	114.2	500.0
9920.0	H	31.3	*	8.5	39.9	-35.0	44.7	172.0	16648.6
9920.0	V	31.3	*	8.5	39.9	-35.0	44.7	172.0	16648.6
12400.0	H	31.3	*	1.2	41.5	-34.4	39.7	96.1	500.0
12400.0	V	31.2	*	1.2	41.5	-34.4	39.6	95.0	500.0
14880.0	H	32.0	*	1.3	44.6	-34.0	43.9	157.2	16648.6
14880.0	V	31.9	*	1.3	44.6	-34.0	43.8	155.4	16648.6
17360.0	H	32.1	*	1.5	44.6	-33.9	44.4	165.1	16648.6
17360.0	V	32.1	*	1.5	44.6	-33.9	44.4	165.1	16648.6
19840.0	H	20.1	*	2.2	40.4	-26.9	35.8	61.8	500.0
19840.0	V	20.0	*	2.2	40.4	-26.9	35.7	61.1	500.0
22320.0	H	22.1	*	2.2	40.6	-27.1	37.8	77.9	500.0
22320.0	V	22.1	*	2.2	40.6	-27.1	37.8	77.9	500.0
24800.0	H	20.3	*	2.2	40.7	-27.2	36.0	62.8	16648.6
24800.0	V	20.3	*	2.2	40.7	-27.2	36.0	62.8	16648.6

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked BY : *Richard E. King*

Richard E. King

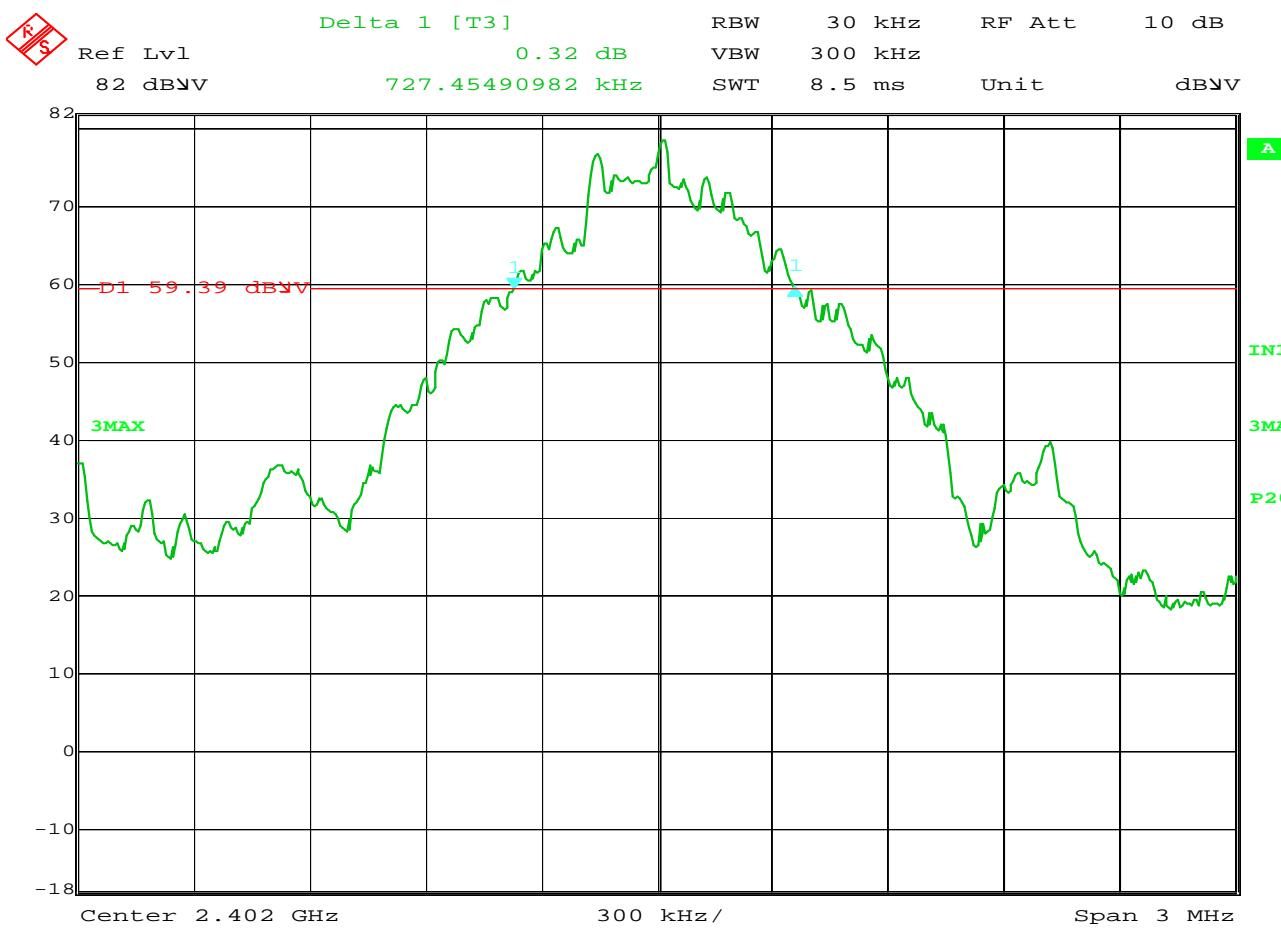


FCC 15.247 20 dB Bandwidth Measurement

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Transmit @ 2402.0 MHz
NOTES :

Checked BY : *RICHARD E. KING*

Richard E. King

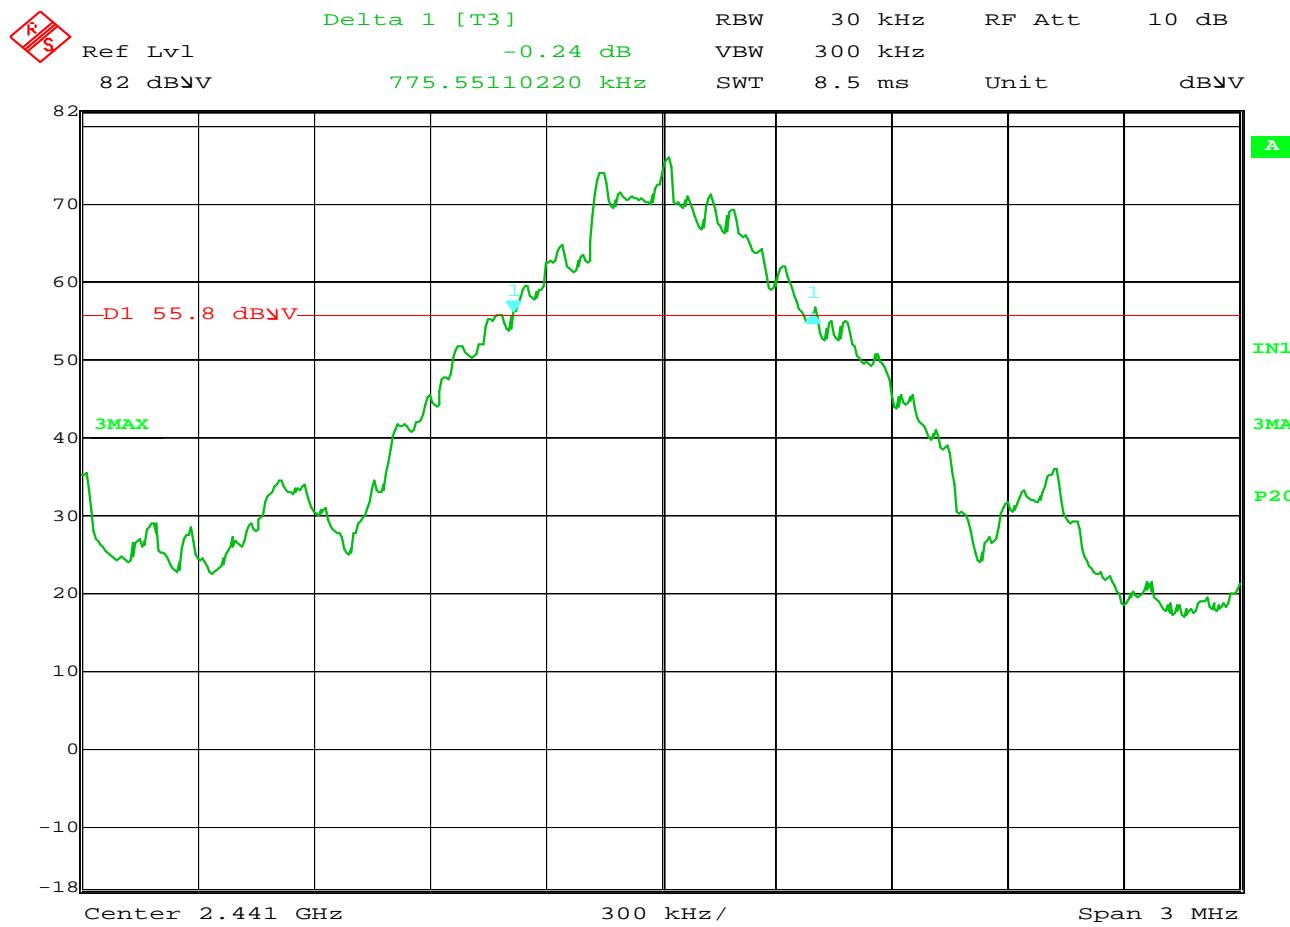


FCC 15.247 20 dB Bandwidth Measurement

MANUFACTURER : S1nn GmbH & Co KG
 TEST ITEM : SYNC module
 MODEL NUMBER : H71191-00024-8
 TEST MODE : Transmit @ 2441.0 MHz
 NOTES :

Checked BY : *RICHARD E. KING*

Richard E. King

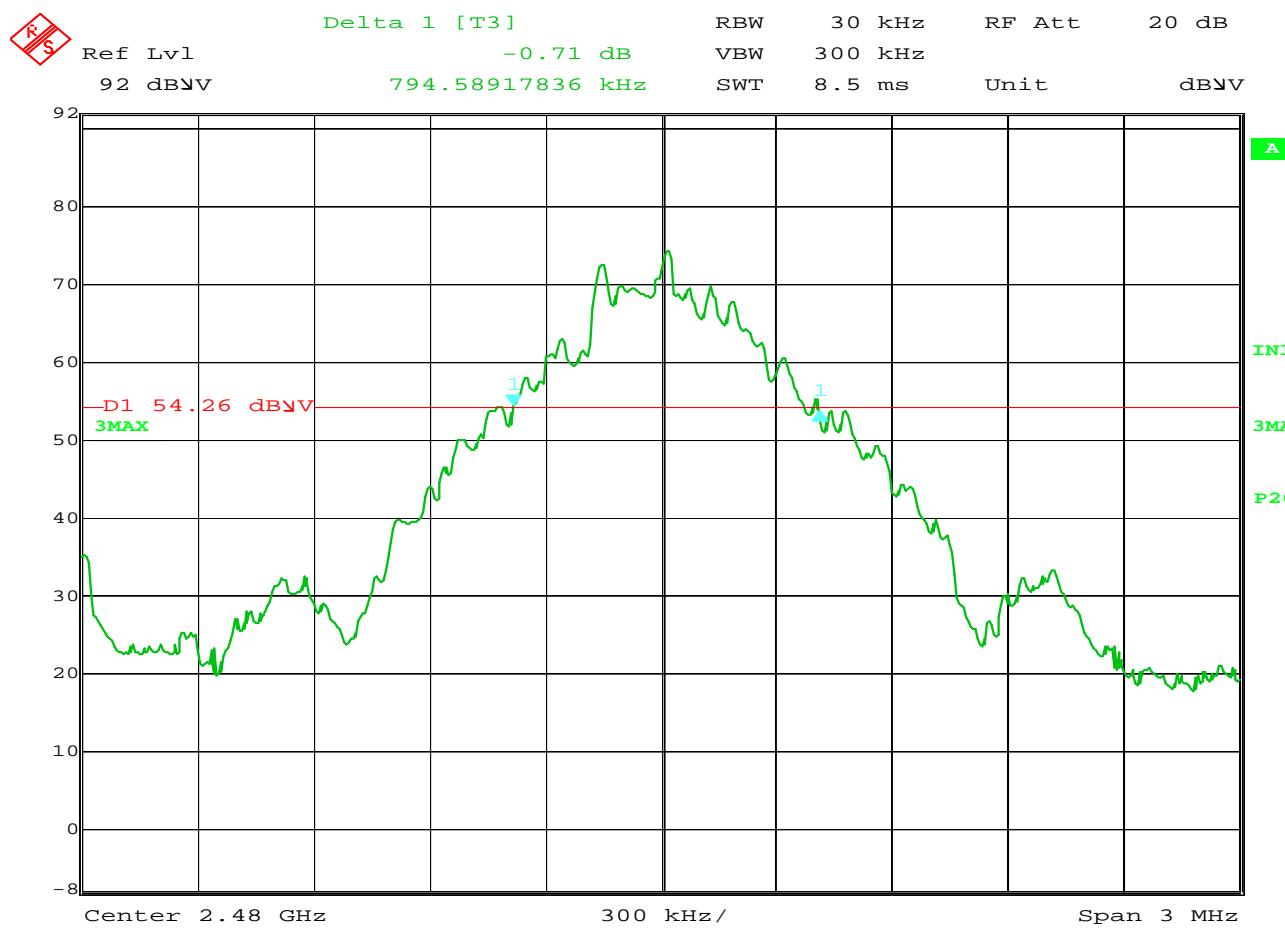


FCC 15.247 20 dB Bandwidth Measurement

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Transmit @ 2480.0 MHz
NOTES :

Checked BY : *RICHARD E. KING*

Richard E. King

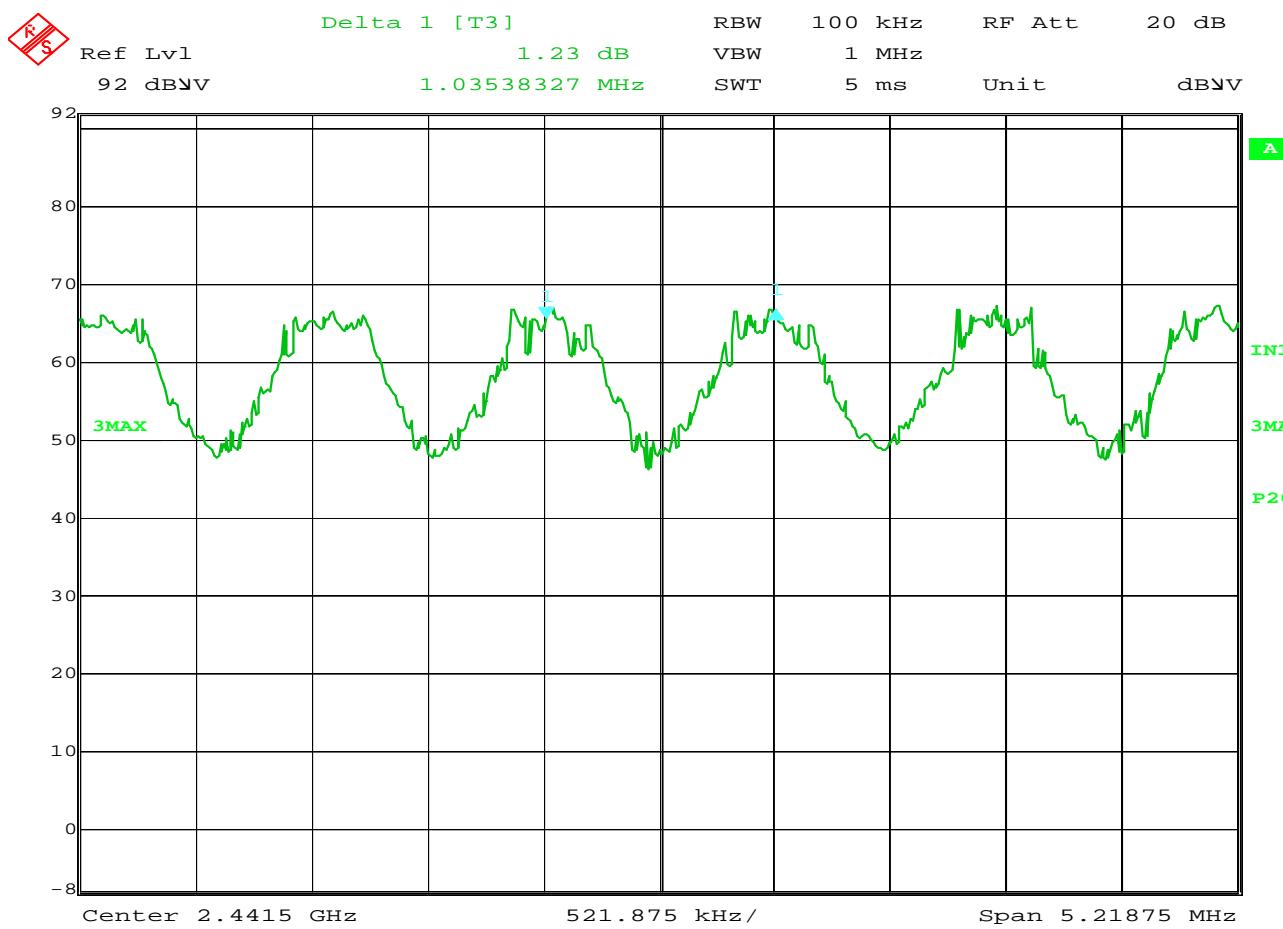


Date: 22.JUL.2008 22:27:25

FCC 15.247 Carrier Frequency Separation

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Frequency Hopping Enabled
NOTES :

Checked BY : RICHARD E. KING

Richard E. King

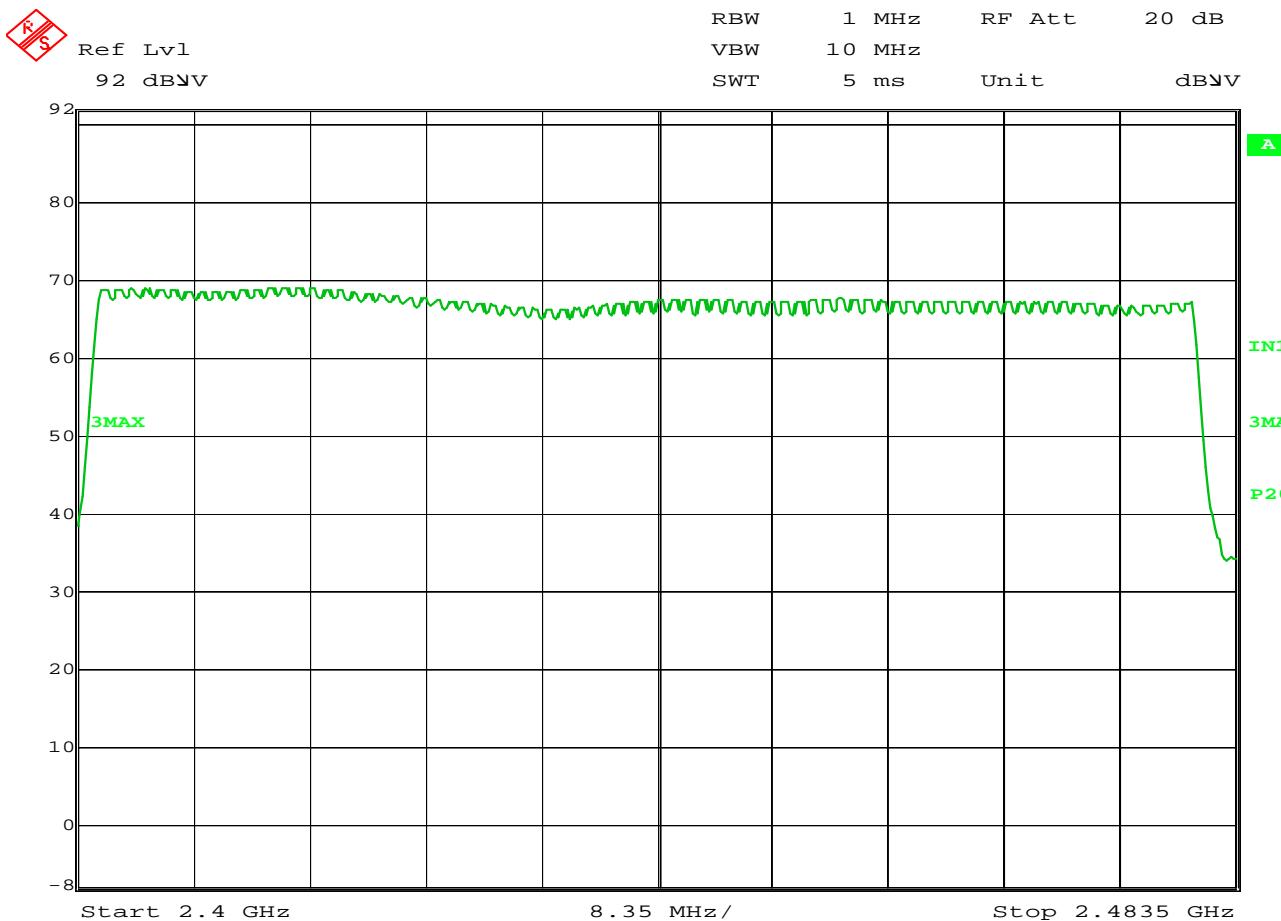


Date: 22.JUL.2008 22:20:45

FCC 15.247 Number of Hopping Frequencies

MANUFACTURER : S1nn GmbH & Co KG
 TEST ITEM : SYNC module
 MODEL NUMBER : H71191-00024-8
 TEST MODE : Frequency Hopping Enabled
 NOTES : Number of hopping channels = 79

Checked BY : *RICHARD E. KING*

Richard E. King

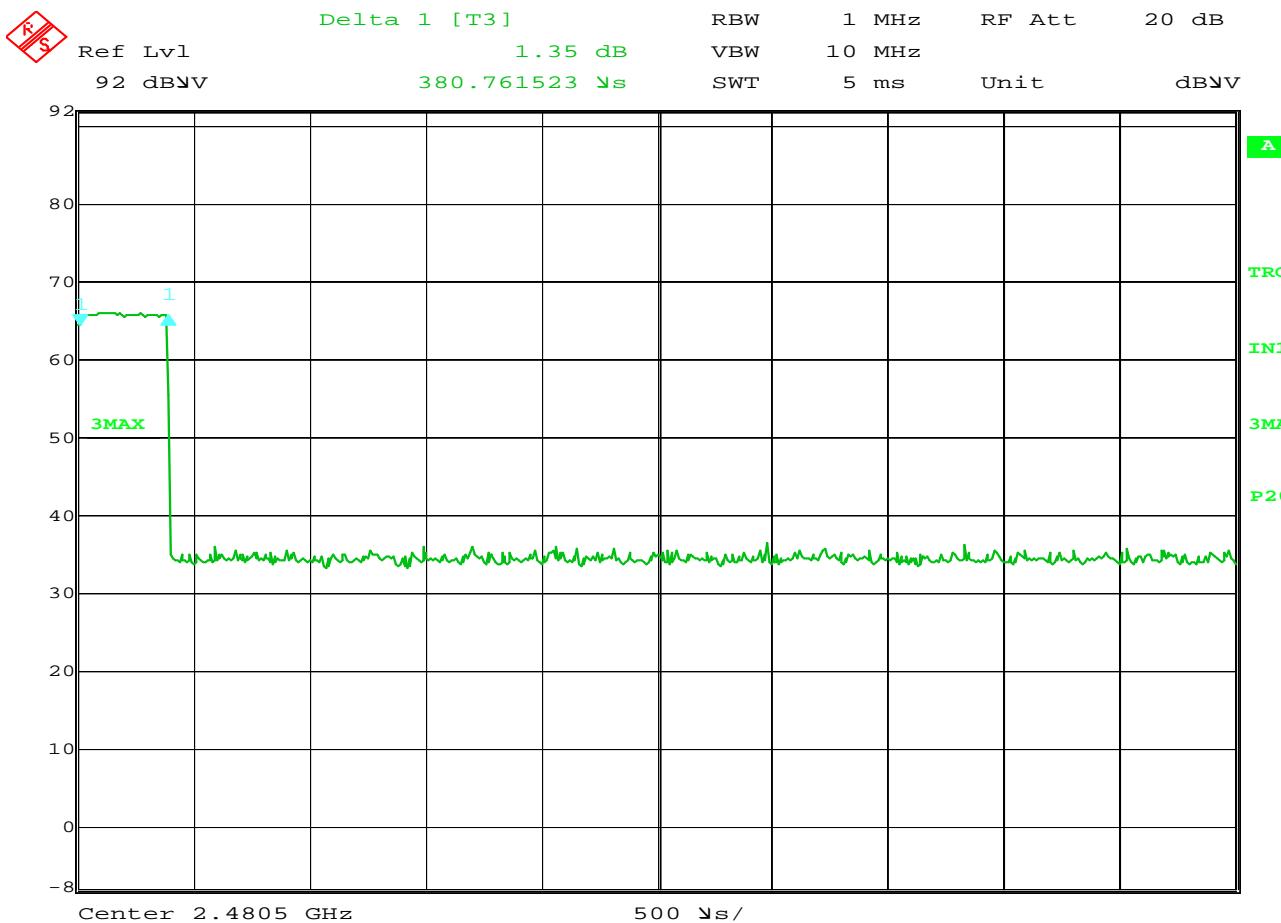


Date: 22.JUL.2008 22:32:31

FCC 15.247 Dwell Time

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Frequency Hopping Enabled
NOTES : 390.78 uS On time

Checked BY : RICHARD E. KING

Richard E. King

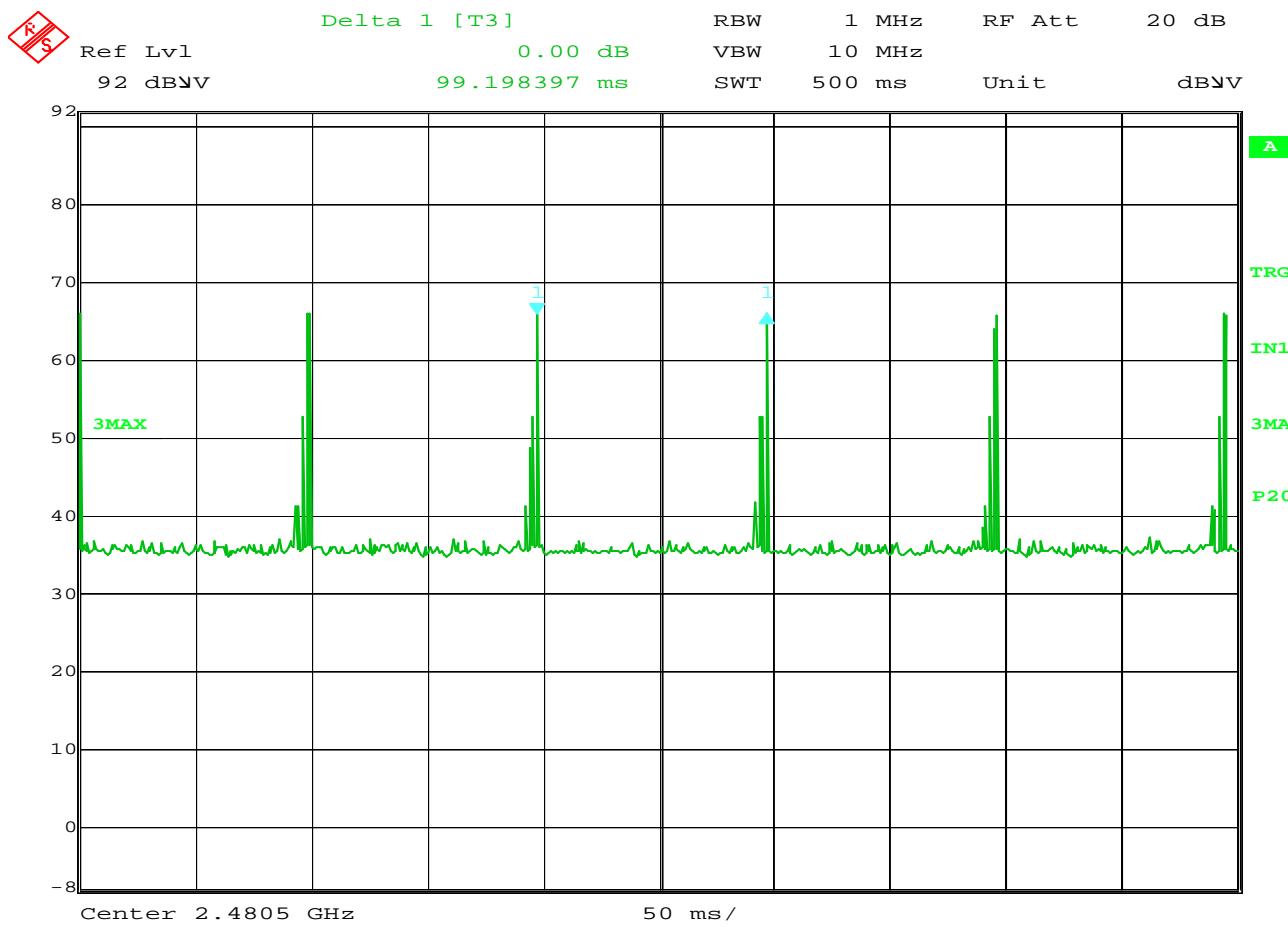


Date: 22.JUL.2008 22:34:09

FCC 15.247 Dwell Time

MANUFACTURER : S1nn GmbH & Co KG
 TEST ITEM : SYNC module
 MODEL NUMBER : H71191-00024-8
 TEST MODE : Frequency Hopping Enabled
 NOTES : 99.198 mS between pulses

Checked BY : *RICHARD E. KING*

Richard E. King

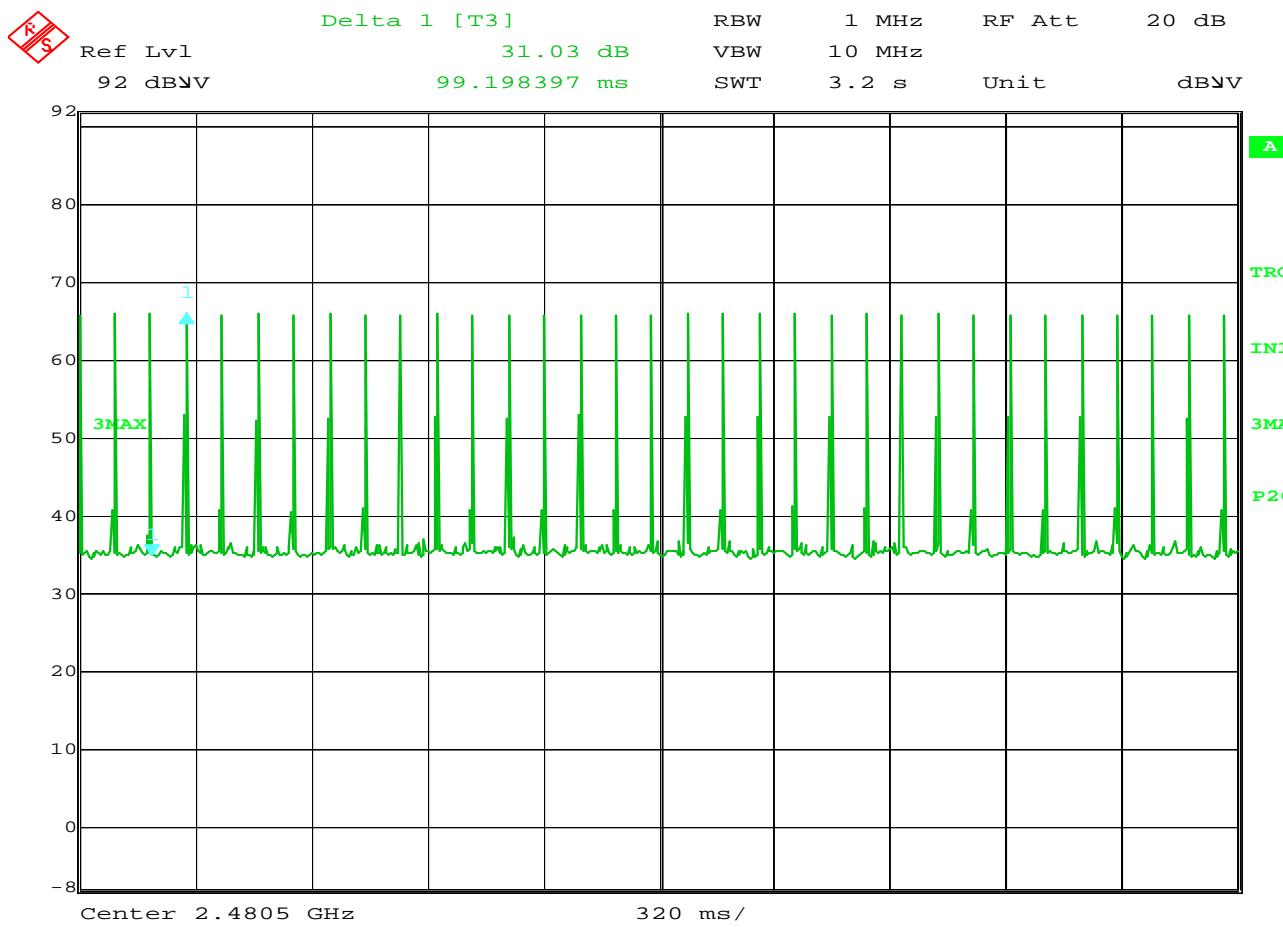


Date: 22.JUL.2008 22:35:13

FCC 15.247 Dwell Time

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Frequency Hopping Enabled
NOTES : 32 pulses in 3.16 seconds

Checked BY : *RICHARD E. KING*

Richard E. King

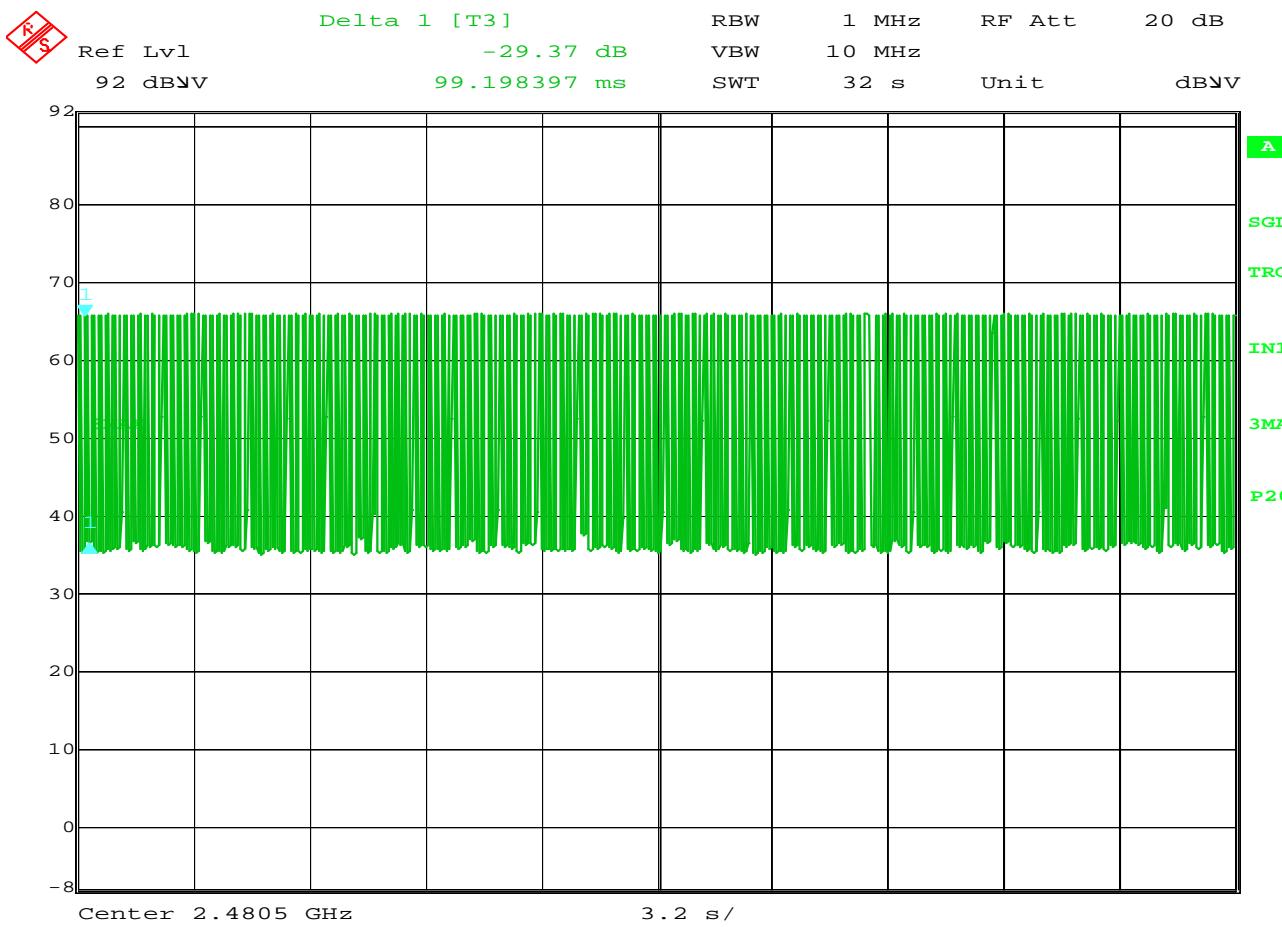

Date: 22.JUL.2008 22:42:14

FCC 15.247 Dwell Time

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Frequency Hopping Enabled
NOTES : 320 pulses in 31.6 S
: 320 pulses * 390.78uS = 125.04 mS

Checked BY : *RICHARD E. KING*

Richard E. King




Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, 15.247, Peak Output Power
: Radiated Measurement
Date : September 24, 2008
Notes : Test Distance is 3 meters

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Matched Signal Generator Reading dBm	Antenna Gain dB	Cable Loss dB	EIRP dBm	Limit dBm
2402	H	69.1	3.5	6.4	3.0	6.9	36
2402	V	63.1	-2.6	6.4	3.0	0.8	36
2441	H	68.6	1.7	6.6	3.1	5.2	36
2441	V	64.1	-1.8	6.6	3.1	1.7	36
2480	H	69.2	4.2	6.7	3.1	7.8	36
2480	V	63.3	-0.8	6.7	3.1	2.8	36

EIRP = Sig. Gen. Reading + Antenna Gain – Cable Loss

Checked BY : *RICHARD E. KING*

Richard E. King

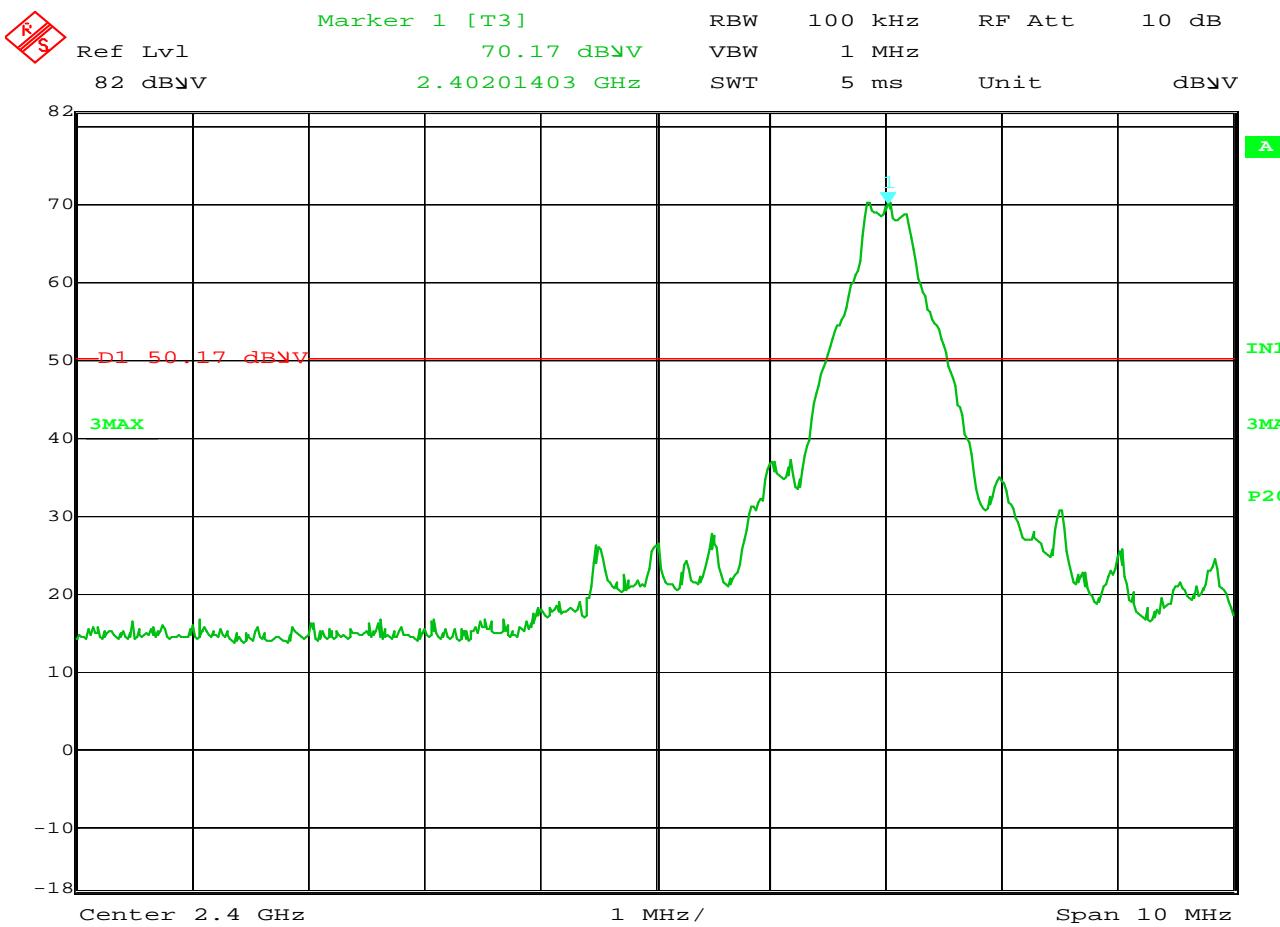


Date: 23.SEP.2008 15:57:51

FCC 15.247 Bandedge Compliance

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Transmit @ 2402.0 MHz
NOTES : 20 dBc

Checked BY : *RICHARD E. KING*

Richard E. King

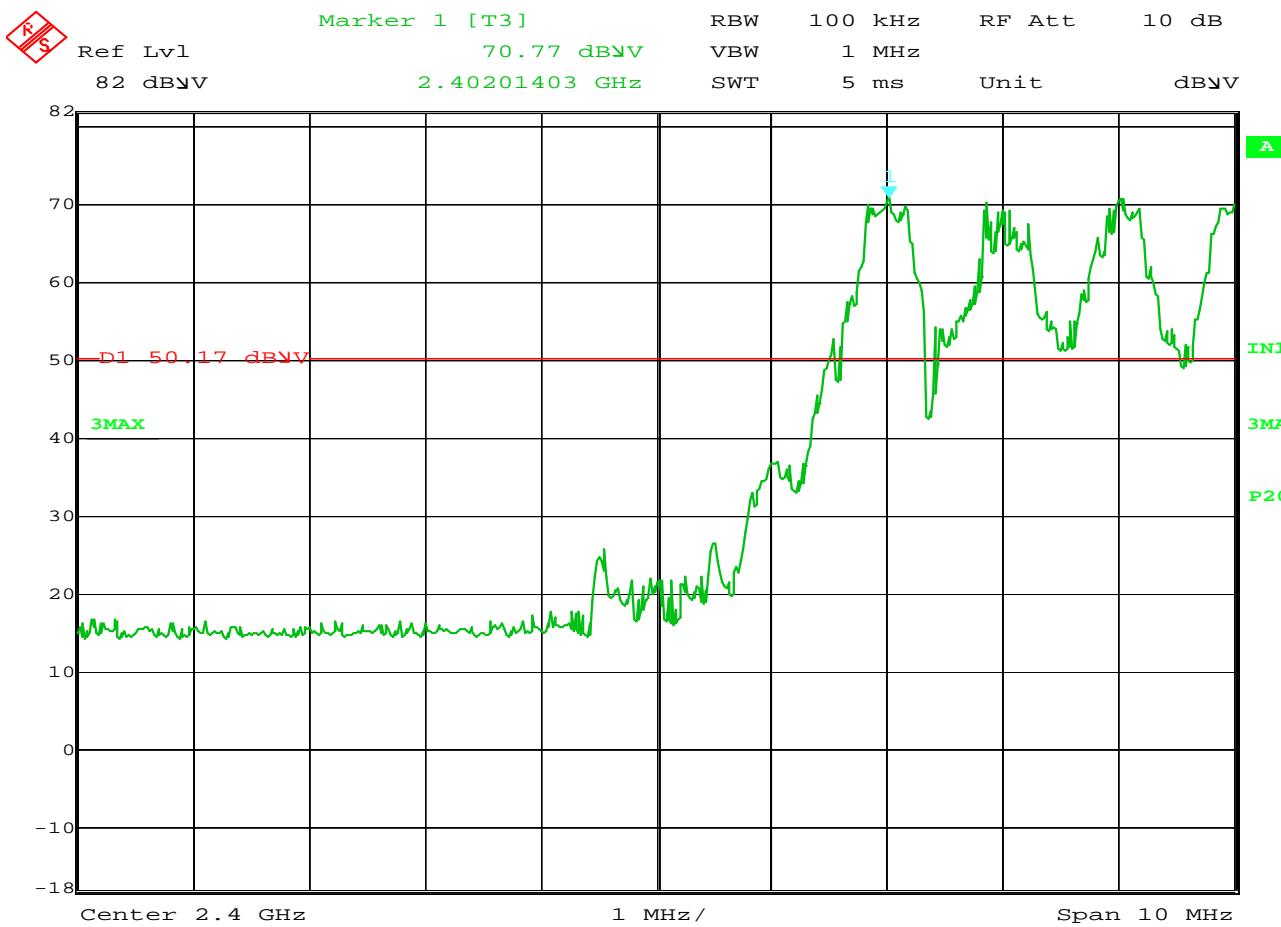

Date: 23.SEP.2008 16:04:12

FCC 15.247 Bandedge Compliance

MANUFACTURER : S1nn GmbH & Co KG
 TEST ITEM : SYNC module
 MODEL NUMBER : H71191-00024-8
 TEST MODE : Frequency Hopping Enabled
 NOTES : 20 dBc

Checked BY : *RICHARD E. KING*

Richard E. King




Data Page

Manufacturer : S1nn GmbH & Co KG
Model No. : H71191-00024-8
Serial No. : 1K63001R
Test Specification : FCC Part 15, Subpart C, Section 15.247, Bandedge Compliance
Date : September 24, 2008
Mode : Transmit @ 2480.0 MHz
Test Distance : 3 meters
Notes : Radiated measurements with 1 MHz RBW;
: Average measurements made using 10 Hz VBW in linear mode.

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Pre Amp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
Frequency Hopping Not Enabled									
2483.5	H	12.2	Ambient	3.8	31.4	0.0	47.4	234.9	500.0
Frequency Hopping Enabled									
2483.5	H	11.8	Ambient	3.8	31.4	0.0	47.0	224.9	500.0

Checked BY : *RICHARD E. KING*

Richard E. King

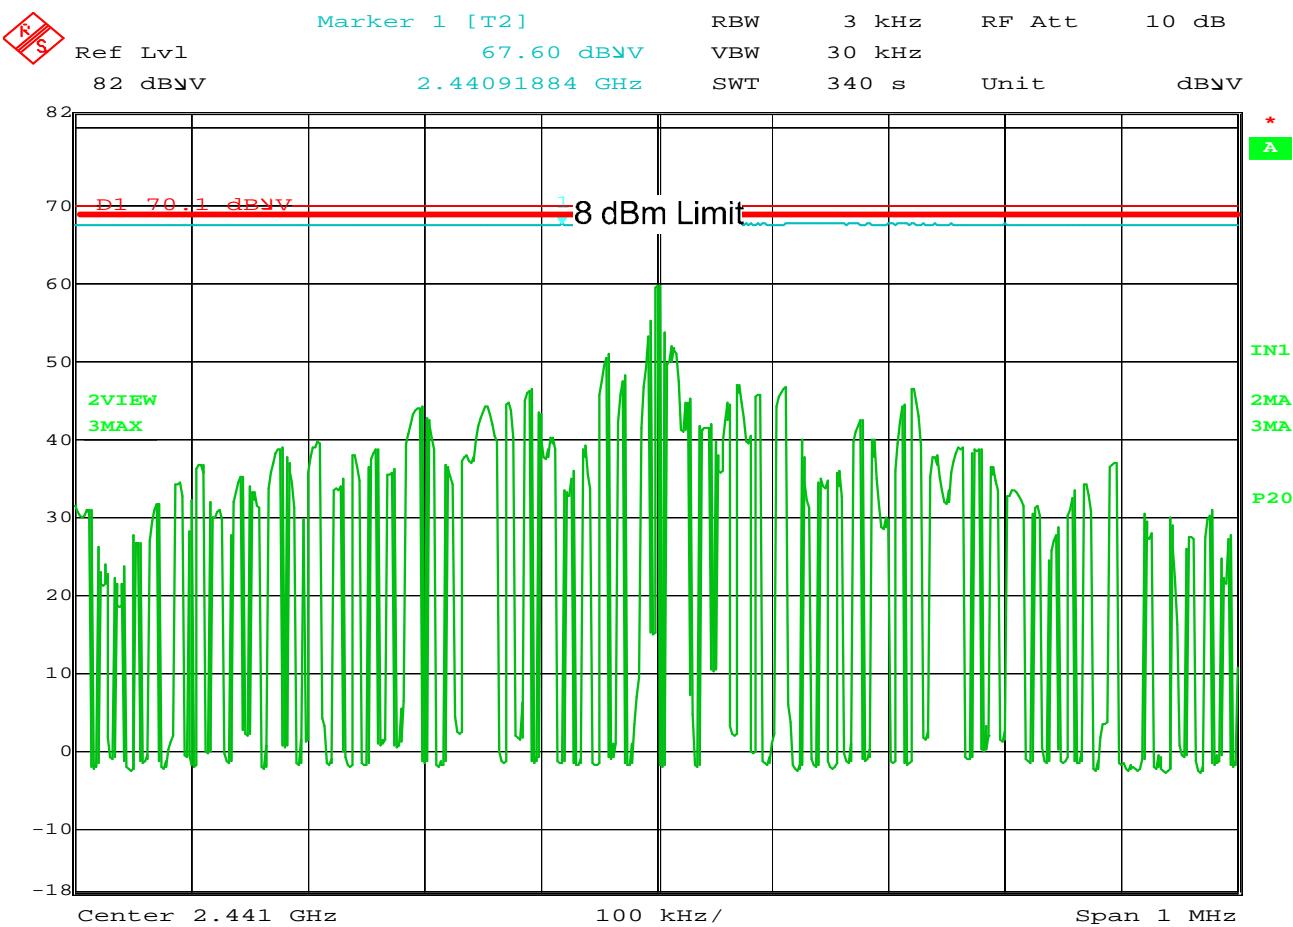

FCC 15.247 Power Spectral Density

MANUFACTURER : S1nn GmbH & Co KG
TEST ITEM : SYNC module
MODEL NUMBER : H71191-00024-8
TEST MODE : Inquiry
NOTES : 104.4dB_{uV/m} = 7.8 dBm matched in 100kHz RBW.
 : Blue trace = 67.6 dB_{uV} at peak equivalent to 7.8 dBm.
 : Display line is equal to +8dBm (8 - 7.8 = 0.2 dB; 67.6 dB_{uV} + 0.2 dB = 67.8dB_{uV})
 : Green trace = power spectral density in 3kHz RBW with 340 second sweep time.

Checked BY : *RICHARD E. KING*

Richard E. King