


## Operating Instructions


The 2GIG-DW10-345 is a Thin Door/Window Contact that can be installed on doors, windows, and many other objects that open and close. The sensor transmits signals to the control panel when a magnet mounted near the sensor is moved away from or closer to the sensor. The sensor has an external input that accepts N/C dry contact devices. The sensor is also equipped with a cover tamper for additional security.

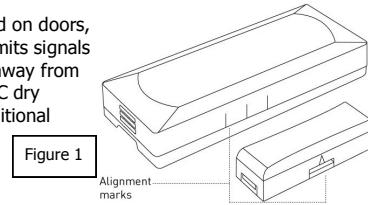

## Installation & Mounting Guidelines

Use the following guidelines for internal switch usage:

1. Mount the sensor on the door frame and the magnet on the door. If the sensor is used on double doors, mount the sensor on the least-used door and the magnet on the most-used door.
2. If possible, locate sensors within 100 ft. (30 m) of the panel. While a transmitter may have a range of 500 ft. (150 m) or more out in the open, the environment at the installation site can have a significant effect on transmitter range. Sometimes a change in sensor orientation can help overcome adverse wireless conditions.
3. Make sure the alignment arrow on the magnet points to the alignment mark on the sensor (see *Figure 1*).
4. Place sensors at least 4.7 in. (12 cm) above the floor to avoid damaging them.
5. Avoid mounting sensors in areas where they will be exposed to moisture or where the sensor operating temperature range of 32 to 120°F (0 to 49°C) will be exceeded.
6. Use spacers (not included) to keep sensors and magnets away from metal or metallic surfaces such as foil wallpaper.
7. Avoid mounting sensors in areas with a large quantity of metal or electrical wiring, such as a furnace or utility room.

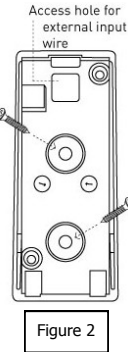


To mount the sensor, do the following:

1. Place the base of the sensor in the desired location and secure with included screws (see *Figure 2*).
2. When mounting the magnet, line up the arrow on the magnet with the middle line on one side of the sensor (see *Figure 1*). Mount the magnet no more than 0.4 in. (1 cm) away from the sensor. Be sure to secure the magnet with provided adhesive.

To use the external input:

1. Repeat above instructions for mounting.
2. Drill hole through access hold, if needed (see *Figure 2*).
3. Plug two-pin connector into J1 (see *Figure 3*).
4. Connect wire to N/C dry contact device.

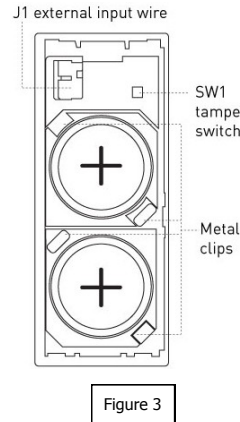

## Programming

The following steps describe general guidelines for programming (learning) the sensor into panel memory. Refer to the specific panel's installation instructions for complete programming details.

1. To remove the sensor cover, use your finger to press the tab on the end of the case. This will disengage the clip holding the cover to the base.
2. Set the panel to sensor learning mode.
3. Press and release the tamper switch (SW1) on the sensor until the panel responds (see *Figure 3*).
4. Replace the base of the sensor.
5. Exit program mode.

## Testing

Before mounting the sensor, verify that the sensor mounting location provides good RF communication to the panel. To verify, do the following:

1. Put the control panel into sensor test mode.
2. Hold the magnet next to the alignment mark on the side of the sensor and then pull the magnet away from the sensor.
3. Listen for siren or keypad beeps to determine appropriate response (refer to the control panel installation instructions).
4. Exit sensor test mode.

## Battery Installation & Replacement

Under normal conditions the battery can last up to 5 years. If a sensor battery is low, a low battery notification will be indicated on the 2GIG Alarm Control Panel's screen. When the 2GIG alarm system indicates that there is a sensor with a low battery, replace the battery immediately. Use only the recommended replacement batteries (see *Specifications*).

To install or replace the battery, do the following:

1. To remove the sensor cover, use your finger to press the tab on the end of the case. This will disengage the clip holding the cover to the base.
2. Place a small flathead screwdriver in the slot between the metal clip (see *Figure 3*) and the battery and twist the screwdriver slightly while holding back one of the black plastic edges holding the battery.
3. Insert the replacement battery with the + sign facing out. (see *Figure 3*)
4. Verify programming and RF communication with the panel. (see *Testing*).

**WARNING! The polarity of the battery must be observed, as shown (see *Figure 3*). Improper handling of lithium batteries may result in heat generation, explosion or fire, which may lead to personal injuries. Replace only with the same or equivalent type of battery as recommended by the manufacturer. (see *Specifications*)**

**Batteries must not be recharged, disassembled or disposed of in fire.** Disposal of used batteries must be made in accordance with the waste recovery and recycling regulations in your area.

Keep away from small children. If batteries are swallowed, promptly see a doctor.

**California Only:** This Perchlorate warning applies only to Manganese Dioxide Lithium cells sold or distributed ONLY in California, USA. Perchlorate Material-special handling may apply. See [www.dtsc.ca.gov/hazardouswaste/perchlorate](http://www.dtsc.ca.gov/hazardouswaste/perchlorate).

## Specifications

Wireless Signal Range	500 ft., open air, with 2GIG Wireless Alarm Control Panel
Code Outputs	Alarm; Alarm Restore; External Alarm; External Restore; Tamper; Tamper Restore; Supervisory; Low Battery
Transmitter Frequency	345.000 MHz (crystal controlled)
Transmitter Frequency Tolerance	± 10 kHz
Transmitter Bandwidth	24 kHz
Modulation Type	Amplitude Shift Keying—On/Off Keying (ASK-OOK)
Unique ID Codes	Over one (1) million different code combinations
Supervisory Interval	70 minutes
Peak Field Strength	Typical 36,000 uV/m at 3m
External Input Sampling Current	20 uA
External Input	Accepts N/C dry contact devices
Reed Switch Magnetic Sensitivity	10 to 20 amp turns
Reed Sensitivity	0.625 in. (1.59 cm) minimum gap, 0.85 in. (2.16 cm) typical
Magnet Type	Rare earth
Magnet Dimensions (LxWxH)	1.3 x 0.435 x 0.312 in. (3.3 x 1.1 x 0.79 cm)
Sensor Dimensions (LxWxH)	2.59 x 1.03 x 0.49 in. (6.58 x 2.62 x 1.24 cm)
Weight (including battery & magnet)	1.1 oz. (31.2 g)
Housing Material	ABS plastic
Color	White
Operating Temperature	32° to 120°F (0° to 49°C)
Relative Humidity	5-95% Non-Condensing
Battery (included, not installed)	Two (2) Panasonic CR2032, 3 VDC, 225 mAh or equivalent Lithium coin batteries
Battery Life	5 years
Regulatory Listing(s)	ETL, FCC Part 15, Industry Canada
Warranty*	Two (2) years
Included Accessories	Two (2) Phillip's flat-head screws, one (1) two-pin connector with a 12" flying 2-wire lead, adhesive strip

## FCC COMPLIANCE STATEMENT\*

This device complies with FCC Rules and Regulations as Part 15 devices, as well as Industry Canada Rules and Regulations. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

FCC ID: WDQ-DW10345

Industry Canada ID: 7794A-DW10345

Note: Changes or modifications to the device may void FCC compliance.

\*For more warranty and compliance information, visit our website ([www.2gig.com](http://www.2gig.com)).