


BEGAN TO USE:


OVERVIEW

DISPLAY UNIT-FRONT VIEW

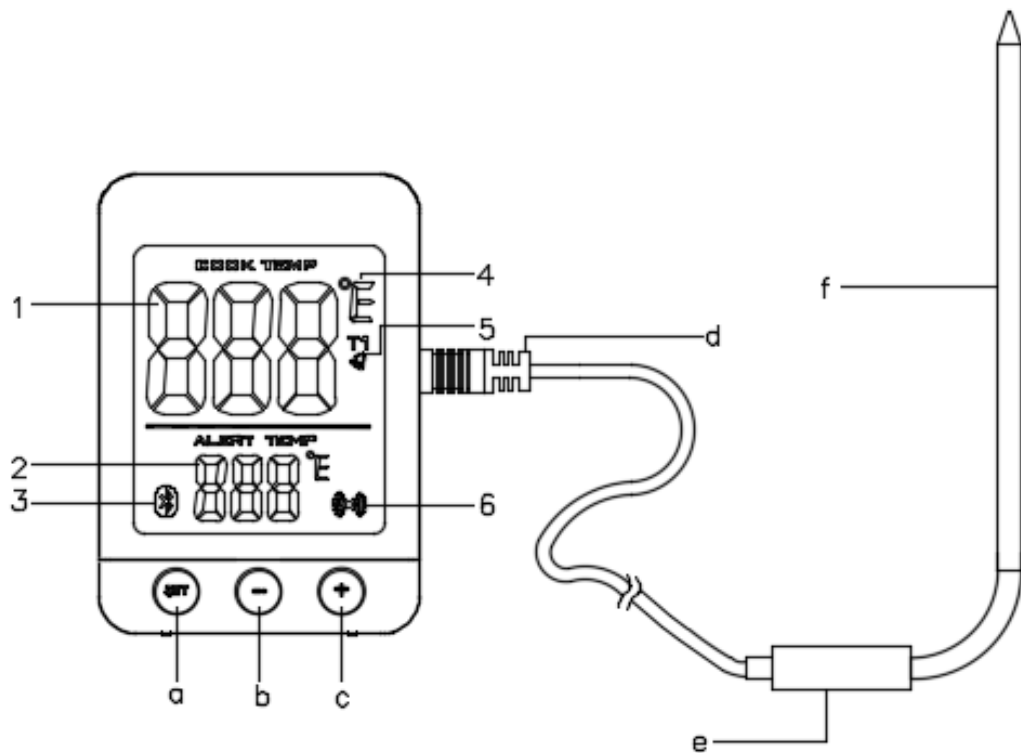

1. Cook temperature
 2. Alert temperature
 3. Bluetooth indicator
 4. °C/°F: temperature measurement unit
 5. Alerts
 6. Pairing indicator
- a. **SET**: Enter mode set-up; confirm setting; press and hold for 3sec to power off
- b. **-**: Decrease value of the setting; °C/°F temperature measurement unit
- c. **+**: Increase value of the setting
- d. Metal Probe Connector Wire
- e. Silicone sleeve
- f. Metal probe

DISPLAY UNIT-REAR VIEW

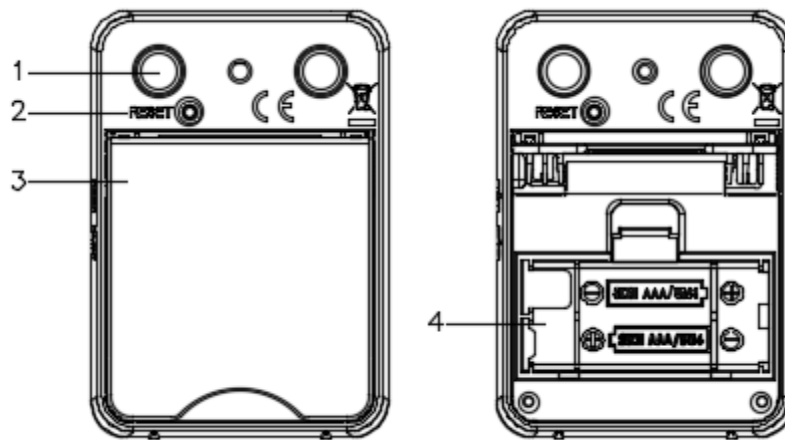

1. Magnet
2. Reset button
3. Pay feet
4. Battery compartment

1. Install your battery

2. Carefully plug the meat probe into the bottom socket

3. Download APP (Smart Thermo)

3.1 Connect the APP Store to search Smart Thermo with the following device

iPhone (4S and later)

iPad (3rd generation and later)

iPad mini (all generations)

3.2 Download Android APP application software URL

<https://play.google.com/store/apps/details?id=com.bbq.project>

Support Android 4.3 and later

4. Pairing your smart thermo

4.1 open the APP software, click the icon to open the APP (🍖) - > Enter Bluetooth interface

click on the search -> waiting for data reception.

4.2, button operation

<SET> key

- * press [SET] key to wake up.
- * press 3sec the [SET] key to enter the sleep state.
- * short press [SET] key, enter alarm temperature setting state.
- * short press [SET] key to exit setup.

<+> key

- * short press [+] button, the alarm parameters accumulated.
- * long press [+] button, alarm quickly accumulate parameters.

< - > key

- * short press [-] keys, alarm parameters decrease.
- * long press button, the alarm parameters rapid decline.
- * short press key [-], switching temperature units(°C/°F).

4.3 LED backlight

- * LED display 3 colors are green, blue, red.

green: **Cook temperature** < (Alert temperature -10 °C)

blue: (Alert temperature -10 °C) ≤ **Cook temperature** < Alert temperature

red: Alert temperature ≤ **Cook temperature**

- * When no operation, the LED will turn off after about 10 seconds.

4.4, low voltage alarm

- * when the battery power is low, screen displays "LO".
- * send low power information to the APP, APP prompts to replace the battery and alarm.
- * SMART THERMO shows "LO" about 3sec and then automatically goes to sleep.

4.5 temperature measurement range

- * device measuring temperature from -25°C to 300°C (-13°F to 572°F)
- * Display "LLL" when the temperature is below the minimum temperature or when the probe plug is not inserted.

- * when the temperature is higher than the maximum temperature, displays "HHH" .

5. APP function

5.1 automatic or manual searches for Bluetooth devices

- * open APP to enter the match screen beneath the display [search] or [lift] button
- * click [search] APP automatically find the surrounding Bluetooth devices, automatically connect and enter the temperature display interface
- * when Bluetooth connection failed the main interface [pairing] flashes
- * after unbound the device, the user can connect to the new equipment.

5.2 APP main interface

- * display device temperature
- * set temperature (file mode and temperature mode)
- * set countdown setting time (countdown mode)
- * menu setting key
- * pairing key
- * task start (stop) key

5.3 select the measurement unit

- * tap to view the Profile options of food
- * tap on your food type
- * tap to select cooking degree and temperature can be adjusted up and down 2 degrees
- * Tap to go back to the previous screen to save.

5.4 file selection function

- * click the settings button to enter the settings menu.
- * click on file options
- * click to add food or delete the food that has been set
- * alarm temperature settings.

5.5 timer settings

- * tap to view the Profile options of timer

- *slide down and up to set time you need. Timer measurement range: 23H 59M 59S

- * tap to go back to the previous screen to save.5.6 alarm bell setting.

5.6 select alarm

- * tap to view the Profile options of rings

- * tap to choose your favorite ring

- * tap to go back to the previous screen to save

- *if food is cooked, alarm ring will ring and show notification menu.

Temperature will show on device screen and LED backlight will flash 5 times.

5.7 sharing

- * Tap to view the Profile options of camera

- * Tap on camera button .

- * Tap on share button and food cooking photos you took will be shared in your community.

Warning

Meat Probe acceptable temperature range: -13°F to 572°F (-25°C to 300°C)

The Meat Probe should always be inserted into the center of the item which is being cooked for an accurate temperature.

The Stainless-steel probe and wires will get hot. Always wear heat-resistant gloves when handling.

Do not use probe in a microwave oven or exposed to flames or temperatures exceeding 572°F (300°C).

Keep the probe and wires away from children.

Not intended for children under 12 years old.

Care

Clean the probe after each use.

Wash the stainless-steel probe with hot soapy water and dry thoroughly.

Do not immerse the probe in water while cleaning.

Do not expose the probe plug to water or other liquids. This will result in bad connections and faulty readings.

Wipe the thermometer base with a damp cloth. Do not use immerse in water.

To avoid damage, do not use cleaning agents or abrasive cleaners.

SPECIFICATION

TYPE	DESCRIPTION
DISPLAY UNIT	
LxW	52x45 mm
Temperature measuring range	-25°C to 300°C (-13°F to 572°F)
Temperature unit	°C/°F
Power	2xAAA batteries
PROBE WRAP	
LxWxH	84x58.5x28mm
METAL PROBE	
Length	122mm
Heat resistance for metal probe	Around 300°C(572°F)
Temperature range	-25°C to 300°C (-13°F to 572°F)
Battery life	1 Year
Bluetooth Range	25 meters(open territory)

Warning Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

This device has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This device generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this device does cause harmful interference to radio or television reception, which can be determined by turning the device off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the device and receiver.
- Connect the device into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment