


WDC to dual Validation (DV reader option) reader connection



WDC to Prox connection (PSEBH/SE/PH reader options)

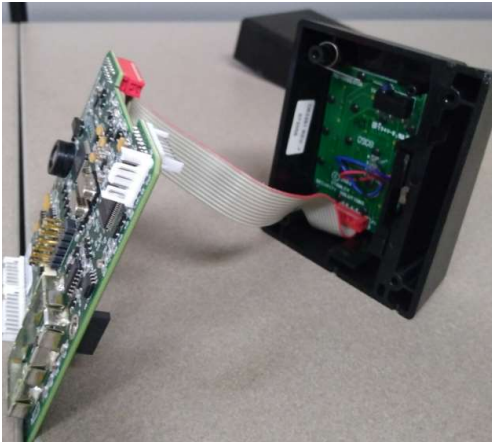