

TEST REPORT

Report No: KST-FCR-110005

Applicant	Name	Dasan Electron Co.,Ltd.
	Address	#307, PI-dong, Kyunggi Techno Park, 1271-11, Sa-dong, Ansan-si, Kyunggi-do, Korea
Manufacturer	Name	Dasan Electron Co.,Ltd.
	Address	Dasan Electron Co.,Ltd.
Equipment	Name	Bluetooth Headset
	Model No	DA-581BT
	Usage	Wireless Hands-free for Cellular phone
	FCC ID	WF2DA-581BT
Test Standard	FCC CFR 47, Part 15. Subpart C-15.247	
Test Date(s)	2011. 03.21 ~ 2011. 03.23	
Issue Date	2011. 03. 28	
Test Result	Compliance	

Supplementary Information

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C 63.4-2003.

We attest to the accuracy of data and all measurements reported herein were performed by KOSTEC Co., Ltd. and were made under Chief Engineer's supervision. We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Tested by Mi Young, Lee

Approved by Gyeong Hyeon, Park

Signature



Signature



Table of Contents

1. GENERAL INFORMATION	3
1.1 Test Facility	3
1.2 Location	3
2. EQUIPMENT DESCRIPTION	4
3. SYSTEM CONFIGURATION FOR TEST	5
3.1 Characteristics of equipment	5
3.2 Used peripherals list	5
3.3 Product Modification	5
3.4 Operating Mode	5
3.5 Test Setup of EUT	5
3.6 Parameters of Test Software Setting	6
3.7 Table for Test condition	6
3.8 Used Test Equipment List	7
4. SUMMARY TEST RESULTS	9
5. MEASUREMENT RESULTS	10
5.1 Carrier Frequency Separation	10
5.2 Number of hopping frequencies	14
5.3 Time of occupancy (Dwell Time)	16
5.4 Max. Conducted peak output power	18
5.5 Conducted peak power spectral density	21
5.6 Band-edge Compliance of RF Conducted emissions	23
5.7 Band-edge Compliance of RF Radiated emissions	26
5.8 Spurious RF Conducted emissions	29
5.9 Spurious RF Radiated emissions	35
5.10 Antenna requirement	40
5.11 AC Power Conducted emissions	41
Appendix 1. Photographs of test setup	44
Appendix 2. Photographs of test setup	45
Appendix 3. Photographs of test setup	47

1. GENERAL INFORMATION

1.1 Test Facility

Test laboratory and address

KOSTEC Co., Ltd.

180-254, Annyeong-dong, Hwaseong-si, Gyeonggi-do, South Korea

The open area field test site and conducted measurement facility are used for these testing. This site at was fully described in a reports submitted to the Federal Communications Commission (FCC).

The details of these reports have been found to be in complies with the requirements of Section 2.948 of the FCC Rules on November 14, 2002. The facility also complies with the radiated and conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission (FCC) has the reports on file and KOSTEC Co., Ltd. is listed under FCC Registration No.525762. The test site has been approved by the FCC for public use and is List in the FCC Public Access Link CORES (Commission Registration System)

Registration information


KCC (Korea Communications Commission) Number : KR0041

KOLAS(Korea Laboratory Accreditation Scheme) Number : 232

FCC Registration Number(FRN) : 525762

VCCI Registration Number : R-1657 / C –1763

1.2 Location

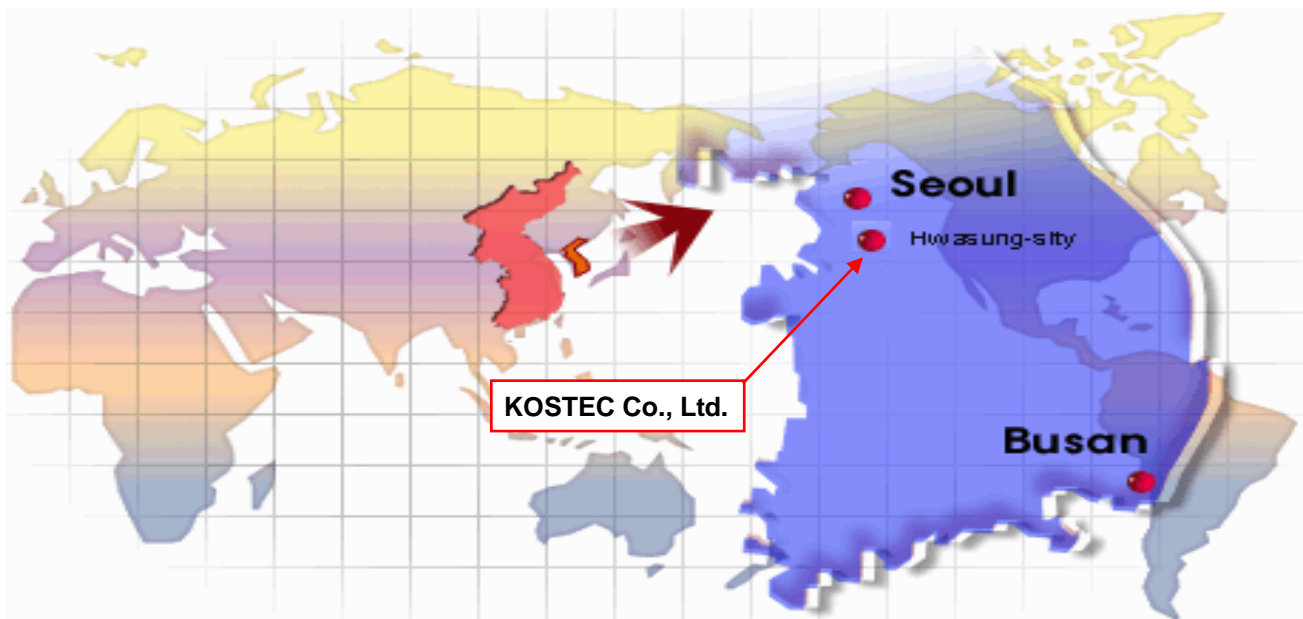

2. EQUIPMENT DESCRIPTION

The product specification described herein was declared by manufacturer. And refer to user's manual for the details.

1) Equipment Name	Bluetooth Headset
2) Model No	DA-581BT
3) Brand Name	None
4) Usage	Wireless Hands-free for Cellular phone
5) Serial Number	Prototype
6) ITU emission Code	1M00F1D
7) Oscillation Type	PLL (Phase Local Loop)
8) Modulation Type	FHSS(Frequency Hopping Spread Spectrum), GFSK
9) Emission Type	F1D
10) Maximum Power	4.71 mW (6.73 dBm)**
11) Operated Frequency	TX : 2 402 MHz ~ 2 480 MHz RX : 2 402 MHz ~ 2 480 MHz
12) Channel spacing / Number	1 MHz / 79 Ch
13) Communication Type	Half duplex
14) Communication access Method	FHSS(Frequency Hopping Spread Spectrum)
15) Final Amplifier	U1
16) Weight / Dimension	100g / 60(L) mm x 30(W) mm x 40(D) mm
17) Operation temperature	- 20 °C ~ + 80 °C
18) Power Source	DC 3.7 V, 300 mA (Lithium polymer recharge battery)
19) Antenna Description	Type: Chip type, Connect type: Fixed on PCB, Length: 9 mm, Gain: 3.5 dBi
20) Bluetooth Profile	A2DP
21) FCC ID	WF2DA-581BT

** it is maximum peak conducted power in band

3. SYSTEM CONFIGURATION FOR TEST

3.1 Characteristics of equipment

This equipment is named Bluetooth Headset and used to wireless hands-free for Cellular phone.

Communication type is frequency hopping spread system(FHSS), and also it does not support the EDR (Enhanced Data Rate)

3.2 Used peripherals list

Description	Model No.	Serial No.	Manufacture	Remark
PC	LS40	1402KIAW215672	LG-IBM	
TEST JIG	None	None	Dasan Electorn Co.,Ltd.	

3.3 Product Modification

N/A


3.4 Operating Mode

All measurements were intended to emit maximum RF signal from EUT continuously.

3.5 Test Setup of EUT

The measurements were taken in continuous transmit / receive mode using the TEST MODE.

For controlling the EUT as TEST MODE, the test program and the test Jig were provided by the applicant.


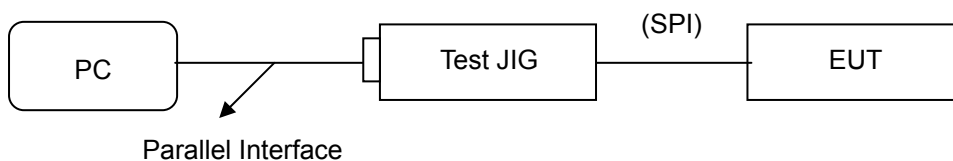


3.6 Parameters of Test Software Setting

During testing, for channel & mode and un-mod, hopping setting is controlled Test Jig with S/W program provided by manufacturer and is going to be fixed on the firmware of the final end product.

Description	Model & Serial No.	Manufacture	Remark
Test Jig*	None	Dasan Co.,Ltd.	It is perform to connection for Control command data between Bluetooth S/W on PC and RF chip board
Test Software		Bluesuite Ver 1.0 (BlueTest3)	

Test Jig photos

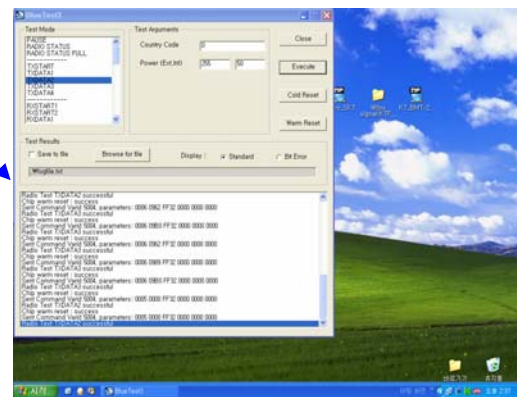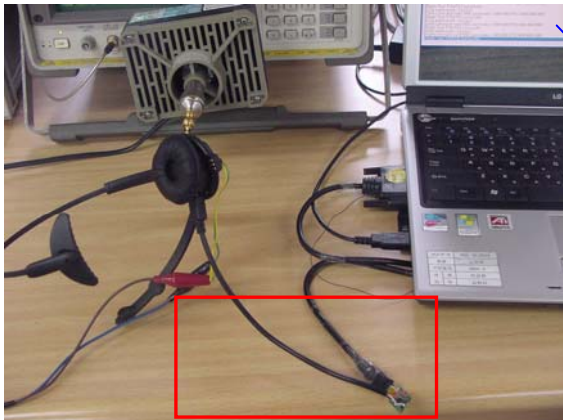

3.7 Table for Test condition

Test Items	Channel No	Frequency (MHz)	Operated Condition
Carrier frequency separation	1, 2	2 402, 2 403	Hopping on and continuous modulation setting mode
	40, 41	2 441, 2 442	
	78, 79	2 479, 2 480	
Number of hopping frequencies	1 ~ 79	2 402 ~ 2 480	Hopping on mode
Time of occupancy (Dwell Time)	40	2 441	Hopping on mode
Conducted peak output power	1	2 402	Hopping off and continuous modulation setting mode
	40	2 441	
	79	2 480	
Band-edge Compliance	1	2 402	Hopping off and continuous modulation setting mode
	79	2 480	
Spurious RF conducted emissions	-	-	Frequency band setting by required standard (FCC Rules)*
Spurious radiated emissions	-	-	

*Note: Channel number is selected lowest, middle, highest channel and also hopping on/off mode operation

3.8 Used Test Equipment List

No.	Instrument	Model	Serial No.	Manufacturer	Due to Cal. Date	Used
1	Temperature & Humidity Chamber	EY-101	90E14260	TABAI ESPEC	2011.12.02	<input type="checkbox"/>
2	Spectrum Analyzer	8563E	3846A10662	Agilent Technology	2012.01.29	<input checked="" type="checkbox"/>
3	Spectrum Analyzer	FSP	100083	Rohde & Schwarz	2012.03.03	<input type="checkbox"/>
4	Vector signal Analyzer	89441A	3416A02620	Agilent Technology	2011.05.20	<input type="checkbox"/>
5	Test Receiver	ESPI3	100109	Rohde & Schwarz	2012.03.03	<input checked="" type="checkbox"/>
6	Modulation analyzer	8901A	3538A07071	Agilent Technology	2011.05.20	<input type="checkbox"/>
7	Audio analyzer	8903B	3514A16919	Agilent Technology	2011.05.20	<input type="checkbox"/>
8	EPM Series Power meter	E4418B	GB39512547	Agilent Technology	2011.05.20	<input type="checkbox"/>
9	RF Power Sensor	ECP-E18A	US37181768	Agilent Technology	2011.05.20	<input type="checkbox"/>
10	Microwave Frequency Counter	5352B	2908A00480	Agilent Technology	2011.05.20	<input type="checkbox"/>
11	Digital Signal Generator	E4436B	US39260458	H.P	2011.05.20	<input checked="" type="checkbox"/>
12	RF signal Generator	8657D	3342A00616	Agilent Technology	2011.05.20	<input type="checkbox"/>
13	Tracking CW Signal Source	85645A	070521-A1	H.P	2011.05.20	<input type="checkbox"/>
14	Ultra broadBand Antenna	HL562	100075	Rohde & Schwarz	2012.03.30	<input checked="" type="checkbox"/>
15	Ultra broadBand Antenna	HL562	100076	Rohde & Schwarz	2012.03.30	<input type="checkbox"/>
16	Dipole Antenna	HZ-12	100005	Rohde & Schwarz	2012.04.05	<input type="checkbox"/>
17	Dipole Antenna	HZ-13	100007	Rohde & Schwarz	2012.04.05	<input type="checkbox"/>
18	Horn Antenna	3115	2996	EMCO	2012.06.13	<input checked="" type="checkbox"/>
19	Loop Antenna	6502	9203-0493	EMCO	2011.06.11	<input type="checkbox"/>
20	Dummy Load Antenna	8173	3780	Bird Electronic	2011.05.20	<input type="checkbox"/>
21	RF Power Amplifier	8347A	3307A01571	H.P	2011.05.20	<input checked="" type="checkbox"/>
22	Microwave Amplifier	8349B	2627A01037	H.P	2011.05.20	<input type="checkbox"/>
23	Attenuator	8498A	3318A09485	H.P	2011.05.20	<input checked="" type="checkbox"/>
24	Attenuator	50FH-030-500	1404109433	JEW Industries Inc.	2011.05.20	<input type="checkbox"/>
25	Attenuator	UFA-20NPJ-20	IF836	TAMAGAWA Electronic	2011.05.20	<input type="checkbox"/>
26	Band rejection filter	3TNF-0006	26	Dover Tech	2011.05.20	<input type="checkbox"/>
27	Band rejection filter	3TNF-0007	311	Dover Tech	2011.05.20	<input type="checkbox"/>
28	Band rejection filter	3TNF-0007	317	Dover Tech	2011.05.20	<input type="checkbox"/>
29	Directional coupler	779D	07271	H.P	2011.05.20	<input type="checkbox"/>

30	SLIDAC	None	0207-4	Myoung-Sung Electronic Co., Ltd.	2011.05.20	<input type="checkbox"/>
31	DC Power supply	DRP-5030	9028029	Digital Electronic Co.,Ltd	2011.05.20	<input type="checkbox"/>
32	DC Power supply	UP-3005T	68	Unicon Co.,Ltd	2011.05.20	<input type="checkbox"/>
33	DC Power supply	E3610A	KR24104505	Agilent Technology	2011.05.20	<input checked="" type="checkbox"/>
34	Antenna Master	-	-	Daeil EMC	-	<input checked="" type="checkbox"/>
35	Turn Table	-	-	Daeil EMC	-	<input checked="" type="checkbox"/>

4. SUMMARY TEST RESULTS

Description of Test	FCC Rule	Reference Clause	Used	Test Result
Carrier frequency separation (20 dB bandwidth)	15.247(a)(1)	Clause 5.1	☒	Compliance
Number of hopping frequencies	15.247(a)(1)(iii)	Clause 5.2	☒	Compliance
Time of occupancy (Dwell Time)	15.247(a)(1)(iii)	Clause 5.3	☒	Compliance
Max. Conducted peak output power	15.247(b)(1)	Clause 5.4	☒	Compliance
Conducted peak output power spectrum density	15.247(e)	Clause 5.5	☒	Compliance
Band edge compliance of RF conducted emissions	15.247(d)	Clause 5.6	☒	Compliance
Band edge compliance of RF radiated emissions	15.247(d) 15.205 & 15.209	Clause 5.7	☒	Compliance
Spurious RF conducted emissions	15.247(d)	Clause 5.8	☒	Compliance
Spurious RF radiated emissions	15.247(d), 15.209	Clause 5.9	☒	Compliance
Antenna requirement	15.203, 15.247	Clause 5.10	☒	Compliance
<p>Compliance : The EUT complies with the essential requirements in the standard. Not Compliance : The EUT does not comply with the essential requirements in the standard. N/A : The test was not applicable in the standard.</p>				

5. MEASUREMENT RESULTS

5.1 Carrier Frequency Separation

5.1.1 Standard Applicable [FCC §15.247(a),(1)]

Frequency hopping systems operating in the (2 400 ~ 2 483.5) MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

5.1.2 Test Environment conditions

- Ambient temperature : 20 °C,
- Relative Humidity : (50 ~ 52) % R.H.

5.1.3 Measurement Procedure

The carrier frequency separation was measured with a spectrum analyzer connected to the antenna terminal while EUT had its hopping function enabled.

After the trace being stable, the reading value between the peak of the adjacent channels using the marker-Delta function was recorded as the measurement results.

The spectrum analyzer is set to the as follows :


- Span : wide enough to capture the peak of two adjacent channels
- RBW : $\geq 1\%$ of the span
- VBW : \geq RBW
- Sweep : auto
- Detector function : peak
- Trace : max hold

5.1.4 Measurement Result


Channel No.	Frequency (MHz)	Test Results		
		Measured Value [MHz]	Result	Limit
1, 2	2 402 MHz, 2 403 MHz	1, 026	Pass	≥ 25 kHz or 2/3 20dB bandwidth
40, 41	2 441 MHz, 2 442 MHz	1, 020	Pass	
78, 79	2 479 MHz, 2 480 MHz	1, 020	Pass	

5.1.5 Test Plot


Channel 1, 2 (2 402 MHz, 2 403 MHz)

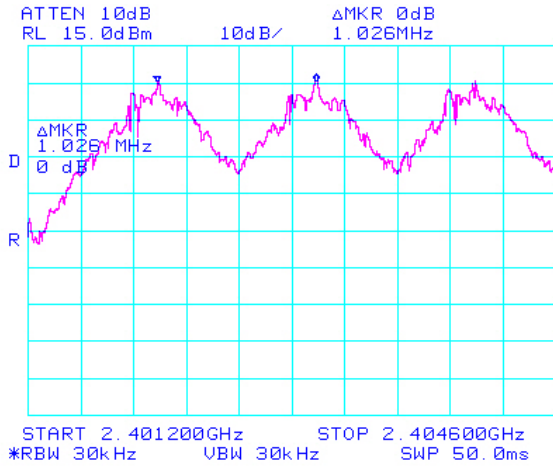

Channel 40, 41 (2 441 MHz, 2 442 MHz)

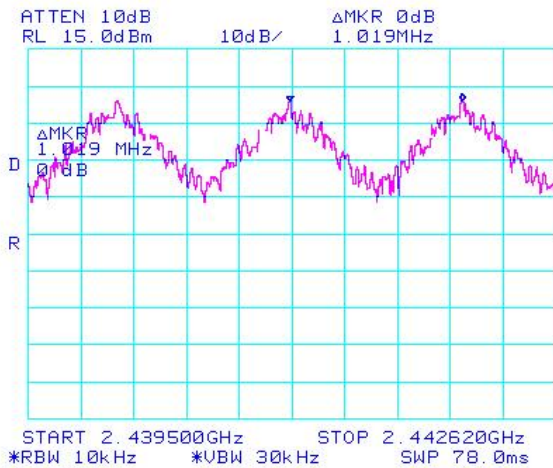

Channel 78, 79 (2 479 MHz, 2 480 MHz)

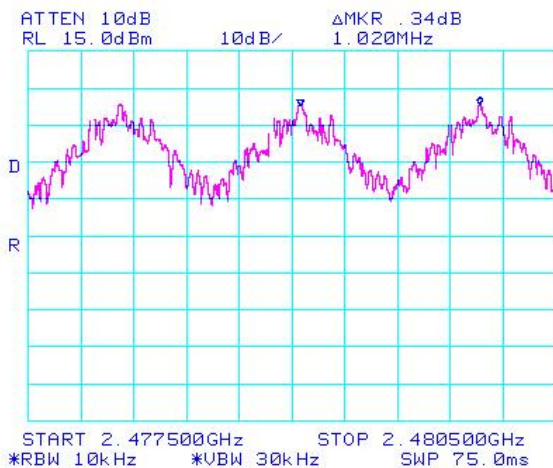


5.1.6 Test Plot (20 dB Occupied bandwidth)

Channel 1 (2 402 MHz)



Channel 40 (2 441 MHz)

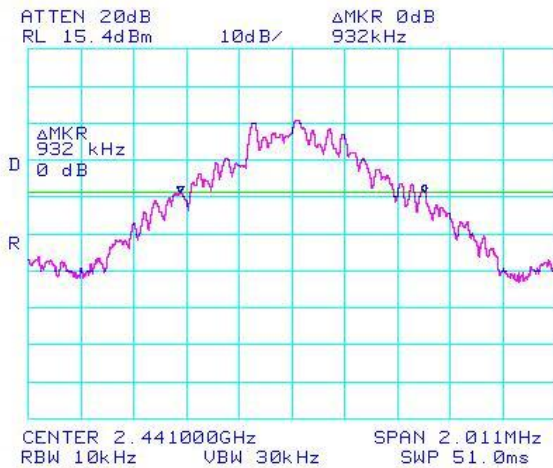

Channel 79 (2 480 MHz)



* Note : above the 20 dB Bandwidth measurement method is described FCC Public Notice(DA 00-705),
and setting method on spectrum analyzer is as follows ;

- Span : approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
- RBW : $\geq 1\%$ of the 20 dB bandwidth
- VBW : \geq RBW
- Sweep : auto
- Detector function : peak
- Trace : max hold

5.2 Number of hopping frequencies

5.2.1 Standard Applicable [FCC §15.247(a),(1)(iii)]

Frequency hopping systems in the (2 400 ~ 2 483.5) MHz band shall use at least 15 channels

5.2.2 Test Environment conditions

- Ambient temperature : 20 °C,
- Relative Humidity : (50 ~ 52) % R.H.

5.2.3 Measurement Procedure

The number of hopping frequencies was measured with a spectrum analyzer connected to the antenna

Terminal to get higher resolution, two frequency ranges within the (2 400 ~ 2 483.5) MHz Frequency hopping band were examined. The EUT must have its hopping function enabled.

After the trace being stable, it may prove necessary to break the span up to sections, in order to clearly show All of the hopping frequencies.

The spectrum analyzer is set to the as follows :


- Span : the frequency band of operation
- Resolution (or IF) Bandwidth(RBW) : ≥ 1% of the span
- Video (or Average) Bandwidth(VBW) : ≥ RBW
- Sweep : auto
- Detector function : peak
- Trace : max hold

5.2.4 Measurement Result

Channel Number	Hopping frequency band (MHz)	Test Results		
		Measured total number of Hopping Channels	Limit	Result
1 ~ 79	(2 402 ~ 2 480) MHz	79	≥ 15	Complies

5.2.5 Test Plot (RBW: 100 kHz, VBW: 300 kHz)

1. Hopping channel number / ch1 ~ ch 79

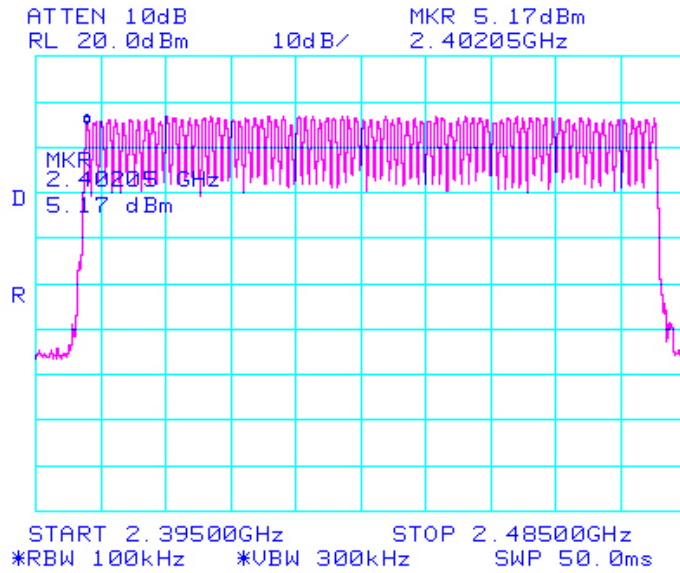

5.3 Time of occupancy (Dwell Time)

5.3.1 Standard Applicable [FCC §15.247(a),(1)(iii)]

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.3.2 Test Environment conditions

- Ambient temperature : 20 °C ,
- Relative Humidity : (50 ~ 52) % R.H.

5.3.3 Measurement Procedure

The dwell time was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function enabled. After used the marker-delta function to determine the dwell time.

The spectrum analyzer is set to the as follows :


- Span : Zero , Centered on a hopping channel
- Resolution (or IF) Bandwidth(RBW) : 1 MHz
- Video (or Average) Bandwidth(VBW) : \geq RBW
- Sweep : auto
- Detector function : peak
- Trace : max hold

5.3.4 Measurement Result


Bust width per one hop (μ s)	Test Results		
	Measured dwell time (ms)	Limit	Result
393.33	125.909	\leq 0.4	Complies

5.3.5 Test Plot

1. Burst width in one hop (μs)

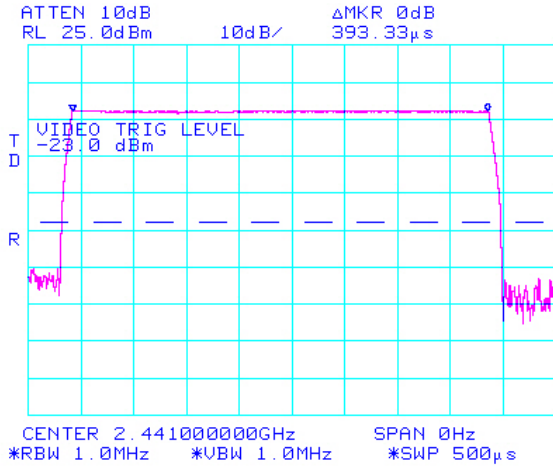

2. Number of hop channel per 1 sec

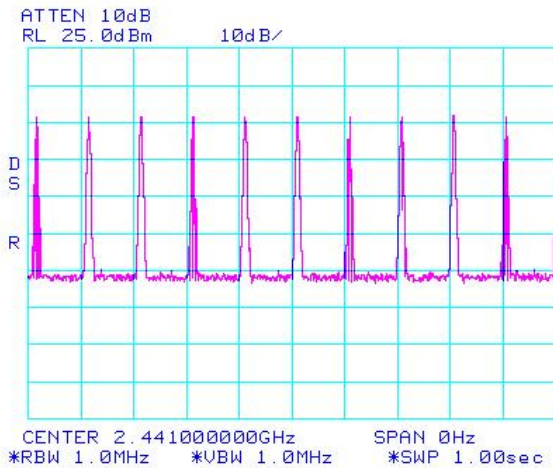

The system makes worst case 1 600 hops per second or 1 time slot has a length of $625\mu\text{s}$ with 79 channels. a one Packet need 1 time slot for transmitting and 1 time slot for receiving. Then the system makes worst case $1600/2 = 800$ hops per second with 79 channels. so have a each channel $800/79 = 10.13$ times per total time of occupancy is get by multiplying the measured number of transmissions occurred during second and so for a period of $0.4 \times 79 = 31.6$ seconds. According to it has $10.13 \times 31.6 = 320.11$ times of appearance. so we have $320.11 \times 393.33 \mu\text{s} = 125.909 \text{ ms}$ per 31.6 second.

Dwell time = time slot \times hop rate / number of hopping channels $\times 31.6 \text{ s}$

DH 1 time slot = time slot $\times (1600/2) / 79 \times 31.6 \text{ s}$

※ This product is have a only DH 3 Time slot

5.4 Max. Conducted peak output power

5.4.1 Standard Applicable [FCC §15.247(b)(1)]

For systems using digital modulation in the (2 400 ~ 2 483.5) Mhz bands : 1 Watt.

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.

5.4.2 Test Environment conditions

- Ambient temperature : 22 °C ,
- Relative Humidity : (52 ~ 54) % R.H.

5.4.3 Measurement Procedure


- ① Reference frequency generated from the signal generator is supply to spectrum analyzer input port via RF cable and attenuator, and then, it's apply to offset value on spectrum analyzer as follows ;
on spectrum analyzer [Amplitude→1 More of 3→REF LVL OFFSET(measured loss dB)]
- ② Remove the antenna from the EUT and then connected to spectrum analyzer via a suitable low loss RF cable and attenuator.
- ③ Place the EUT on the table and set it hopping function disable at the lowest, middle and the highest available channels.
- ④ Spectrum analyzer was used to directly measure the output power from RF output port on the EUT in continuously transmitting modulation
- ⑤ After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission
- ⑥ The indicated level is the peak output power.
- ⑦ please refer to the detailed procedure method FCC Public Notice(DA 00-705)

*The spectrum analyzer is set to the as follows ;

- Span : approximately 5 times the 20 dB bandwidth
- RBW : > 20 dB bandwidth of the emission being measured
- VBW : ≥ RBW
- Sweep : auto
- Detector function : peak
- Trace : max hold

* Above measurement frequency is selected to the lowest, Middle and Highest channel

5.4.4 Test Setup Configuration

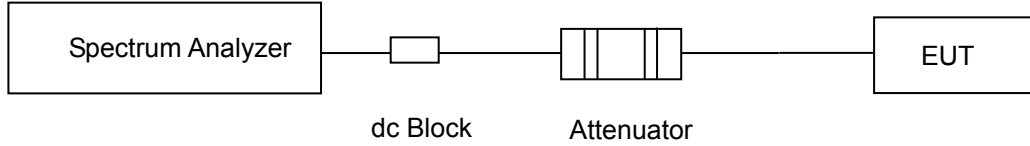


5.4.5 Measurement Result

Channel No.	Frequency [MHz]	Test Results		
		Measured power [dBm]	Limit [dBm]	Result
1	2 402	5.90**	≤ 30	Pass
40	2 441	6.73**		Pass
79	2 480	6.07**		Pass


** it is conducted power

5.4.6 Test Plot


Channel 1 (2 402 MHz)

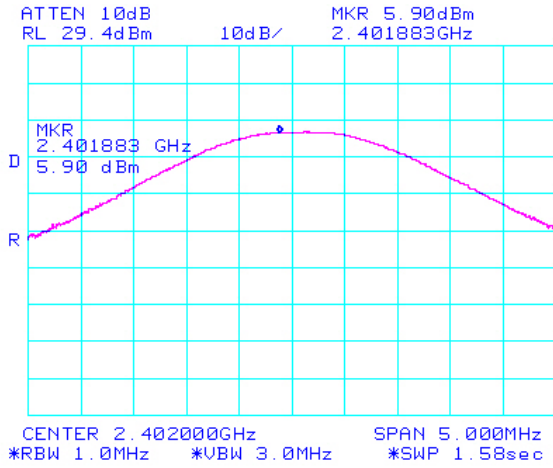

Channel 40 (2441 MHz)

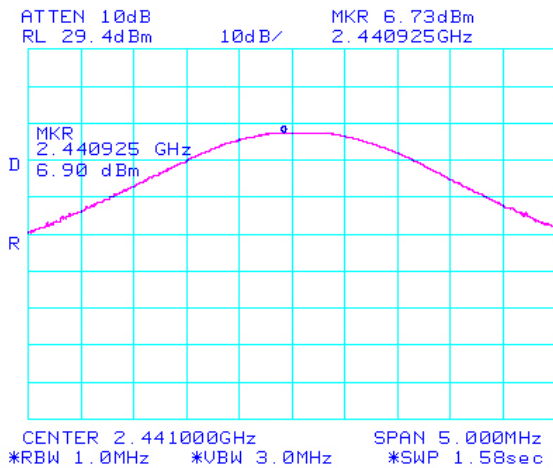

Channel 79 (2 480 MHz)

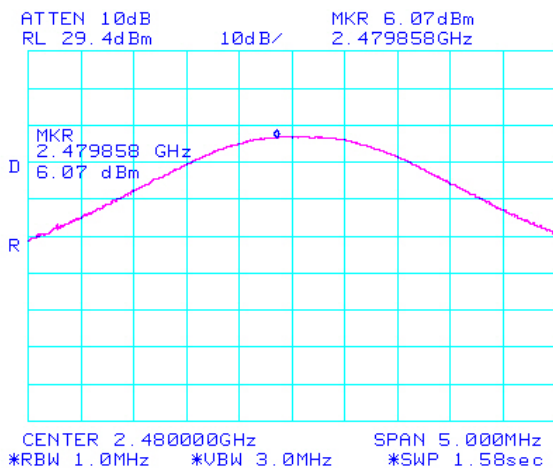

5.5 Conducted peak power spectral density

5.5.1 Standard Applicable [FCC §15.247(e)]

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmit

5.5.2 Test Environment conditions

- Ambient temperature : 22 °C,
- Relative Humidity : (52 ~ 54) % R.H.

5.5.3 Measurement Procedure

The power spectral density conducted from the intentional radiator was measured with a spectrum analyzer connected to the antenna terminal, while EUT had its hopping function disable at the highest , middle and the lowest available channels. After the trace being stable, Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak power spectral density.

The spectrum analyzer is set to the as follows :


- Span : 900 kHz
- RBW : 3 kHz
- VBW : 10 kHz (≥ RBW)
- Sweep : auto
- Detector function : peak
- Trace : max hold

5.5.4 Measurement Result


Ch.	Frequency [MHz]	Test Results		
		Measured PSD [dBm]	Limit	Result
1	2 402	1.90	8 dBm	Complies
40	2 441	2.07		Complies
79	2 480	2.03		Complies

5.5.5 Test Plot


Channel 1 (2 402 MHz)

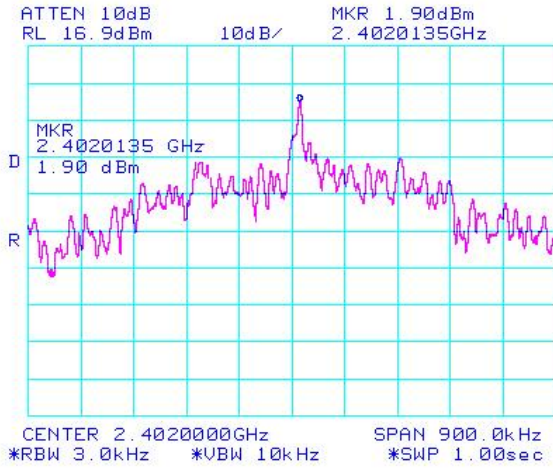

Channel 40 (2441 MHz)

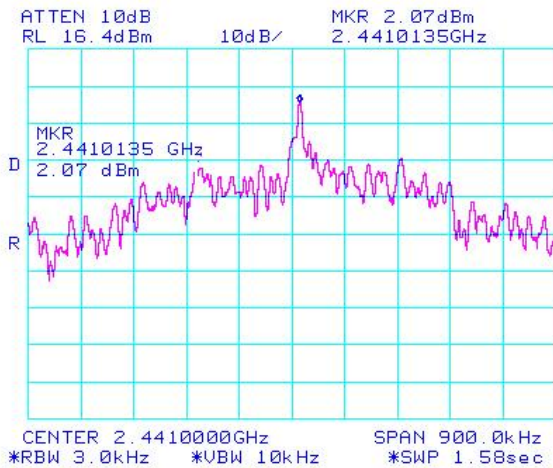

Channel 79 (2 480 MHz)

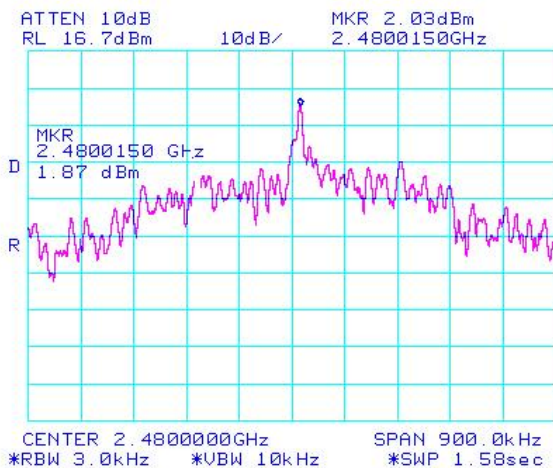

5.6 Band-edge Compliance of RF Conducted emissions

5.6.1 Standard Applicable [FCC §15.247(d)]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF conducted.

5.6.2 Test Environment conditions

- Ambient temperature : 20 °C ,
- Relative Humidity : (50 ~ 51) % R.H.


5.6.3 Measurement Procedure

- ① Pre-calibration for the spectrum analyzer has to be done first through a reference CW signal from CAL OUT(-10 dBm)
- ② Reference frequency generated from the signal generator is supply to spectrum analyzer input port via RF cable and attenuator, and then, it's apply to offset value on spectrum analyzer as follows ;
on spectrum analyzer [Amplitude→1 More of 3→REF LVL OFFSET(measured loss dB)]
- ③ Remove the antenna from the EUT and then, connected to spectrum analyzer via a dc Block, suitable low loss RF cable and attenuator.
- ④ Place the EUT on the table and set on the emission at the band-edge,
- ⑤ After the trace being stable, Use the marker-to-peak function to move the marker to the peak of the in-band emission.
- ⑥ The marker-delta value now displayed must comply with the limit specified in above standard.
- ⑦ please refer to the detailed procedure method FCC Public Notice(DA 00-705)

The spectrum analyzer is set to the as follows :

- Span : Wide enough to capture the peak level of the emission operating on the channel closet to the Band-edge, as well as any modulation products which fall outside of the authorized band of operation
- RBW : ≥ 1 % of the span
- VBW : \geq RBW
- Sweep : auto
- Detector function : peak
- Trace : Max hold

5.6.4 Test Setup Configuration

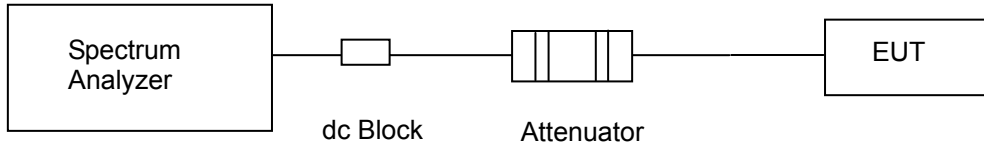

5.6.5 Measurement Result


Setting Channel	Frequency Range [MHz]	Test Results		
		Measured value [dBc]	Limit [dBc]	Result
Lowest channel (2 402 MHz)	2,400 000 MHz ~ 2,403 200 MHz	- 42.33	≤ - 20	Pass
Highest channel (2 480 MHz)	2.478 500 MHz ~ 2.483 500 MHz	- 36.33		Pass

5.6.6 Test Plot

Lowest Channel 1 (2 402 MHz)



Highest Channel 79 (2480 MHz)

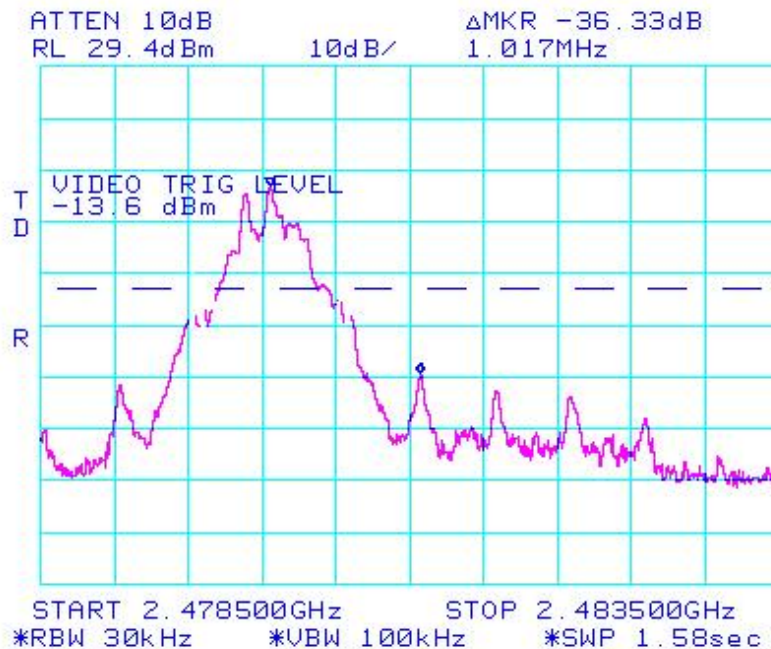

※ Above measured delta value is displayed at band edge point from lowest and highest frequency

5.7 Band-edge Compliance of RF Radiated emissions

5.7.1 Standard Applicable [FCC §15.247(d)]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on RF radiated measurement, and also it fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) Above limitation value is refer to Table [1] & [2] of Clause 5.9.1

5.7.2 Test Environment conditions

- Ambient temperature : 20 °C,
- Relative Humidity : (50 ~ 51) % R.H.

5.7.3 Measurement Procedure

please refer to the clause 5.9.3

5.7.4 Test Setup Configuration

please refer to the clause 5.9.5

5.7.5 Measurement Result

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn. (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
2, 482.85	28.75	225	1.6	H	28.84	2.37	20	39.96	54	14.04	Pass
2, 482.85	39.57	115	1.6	V	28.84	2.37	20	50.78	74	23.22	Pass

※ Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35



※ Limit: 54dB μ V/m(Average), 74dB μ V/m(Peak)

※ Above Limit is according to the FCC Rule part 15 subpart C 15.209 based on 15.205



Freq.(MHz) : Measurement frequency, Reading(dB μ V/m) : Indicated value for Spectrum analyzer,
Table (Deg) : Directional degree of Turn table,
Antenna (Height, Pol, Fctr) : Antenna Height, Polarization and Factor
Cbl(dB) : Cable loss, Pre AMP(dB) : Preamplifier gain(dB)
Meas Result (dB μ V/m) : Reading(dB μ V/m)+ Antenna factor.(dB/m) + CL(dB) - Pre AMP(dB)
Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB) : FCC Limit (dB μ V/m) – Meas Result(dB μ V/m),

5.7.6 Test Plot (Low Band)

⇒ Frequency band (2 380 MHz ~ 2 390 MHz)

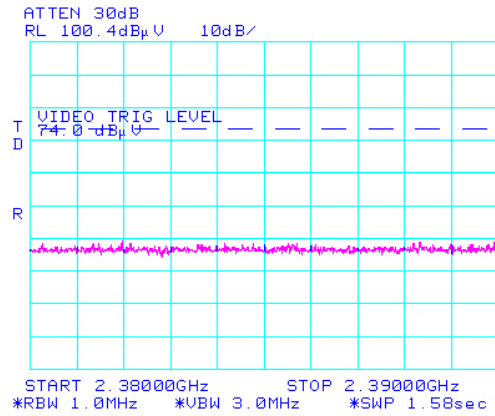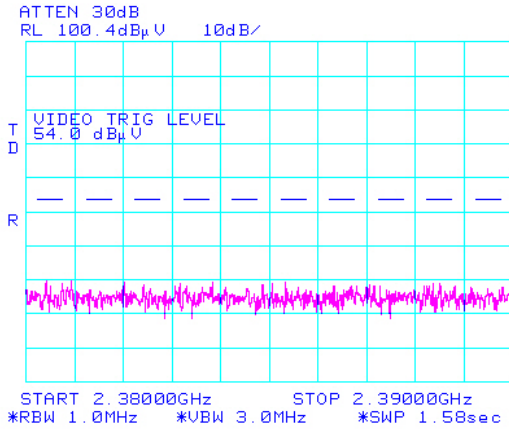



⇒ Frequency band (2 390 MHz ~ 2 402 MHz)

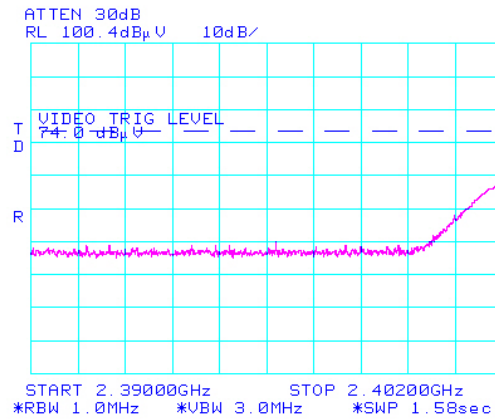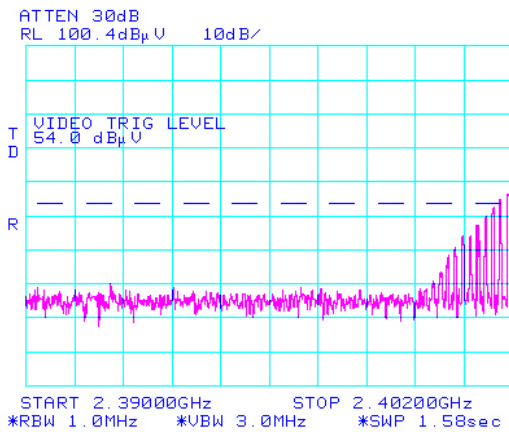



※ Above plots is indicated average and peak value per required frequency band

5.7.7 Test Plot (High Band)

⇒ Frequency band (2 480 MHz ~ 2 483.5 MHz)

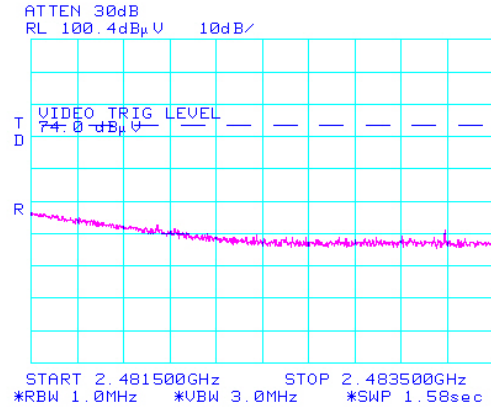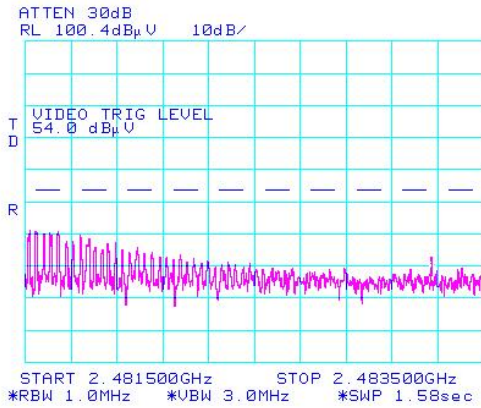

⇒ Frequency band (2 483.5 MHz ~ 2 490 MHz)

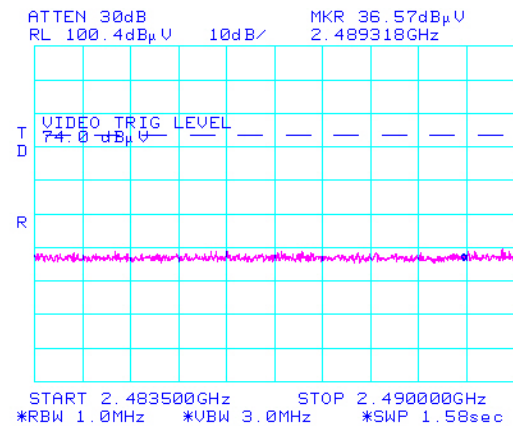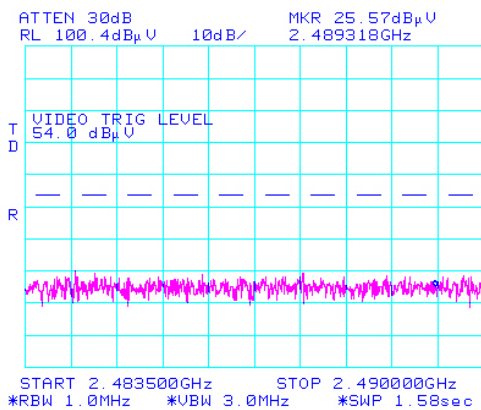

※ Above plots is indicated average and peak value per required frequency band

5.8 Spurious RF Conducted emissions

5.8.1 Standard Applicable [FCC §15.247(d)]

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

5.8.2 Test Environment conditions

- Ambient temperature : 20 °C,
- Relative Humidity : (50 ~ 51) % R.H.


5.8.3 Measurement Procedure

- ① Pre-calibration for the spectrum analyzer has to be done first through a reference CW signal from CAL OUT(-10 dBm)
- ② Reference frequency generated from the signal generator is supply to spectrum analyzer input port via RF cable and attenuator, and then, it's apply to offset value on spectrum analyzer as follows ;
on spectrum analyzer [Amplitude→1 More of 3→REF LVL OFFSET(measured loss dB)]
- ③ Remove the antenna from the EUT and then, connected to spectrum analyzer via a dc Block, suitable low loss RF cable and attenuator.
- ④ Place the EUT on the table and set on the emission at the out band
- ⑤ After the trace being stable, Use the marker-to-peak function to move the marker to the peak of the in-band emission.
- ⑥ The marker-delta value now displayed spurious emission must comply with the limit specified in above standard.
- ⑦ please refer to the detailed procedure method FCC Public Notice(DA 00-705)

The spectrum analyzer is set to the as follows :

- Span : wide enough to capture the peak level of the in-band emission and all spurious emissions from the Lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
 - RBW : 100 kHz
 - VBW : ≥ RBW
 - Sweep : Auto
 - Detector function : Peak
 - Trace : Max hold

5.8.4 Test Setup Configuration

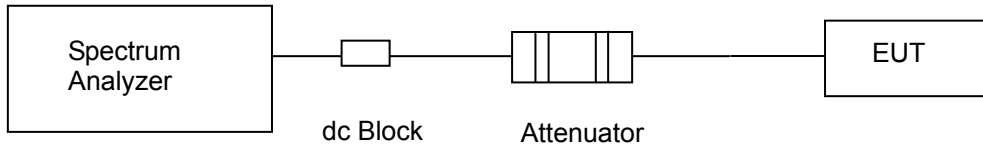

5.8.5 Measurement Result


Hopping mode	Channel Range	Frequency band [MHz]	Test Results		
			Measured value [dBc]	Limit [dBc]	Result
Hopping off	Lowest channel 1 (2 402 MHz)	30 MHz – 2.5 GHz	-36.34	≤ - 20	Compliance
		2 GHz – 26.5 GHz	-32.67		Compliance
	Middle channel 40 (2 441 MHz)	30 MHz – 2.5 GHz	-38.50		Compliance
		2 GHz – 26.5 GHz	-34.50		Compliance
	Highest channel 79 (2 480 MHz)	30 MHz – 3.0 GHz	-37.33		Compliance
		2 GHz – 26.5 GHz	-33.33		Compliance
Hopping on	Hopping ch (1~ 79)	30 MHz – 3.0 GHz	-37.16	Compliance	
		2 GHz – 26.5 GHz	-33.00	Compliance	

*Note: Hopping mode and Harmonic level is 20dB below within the band that contains the highest level of the desired power


5.8.6 Test Plot (Hopping off)

▣ Setting Channel (2 402 MHz)

⇒ Frequency Range (30 MHz ~ 2.5 GHz)

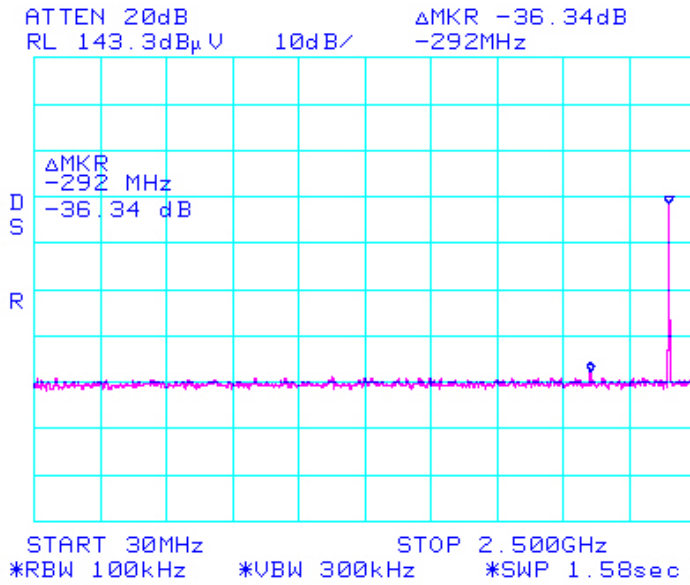


⇒ Frequency Range (2 GHz ~ 26.5 GHz)

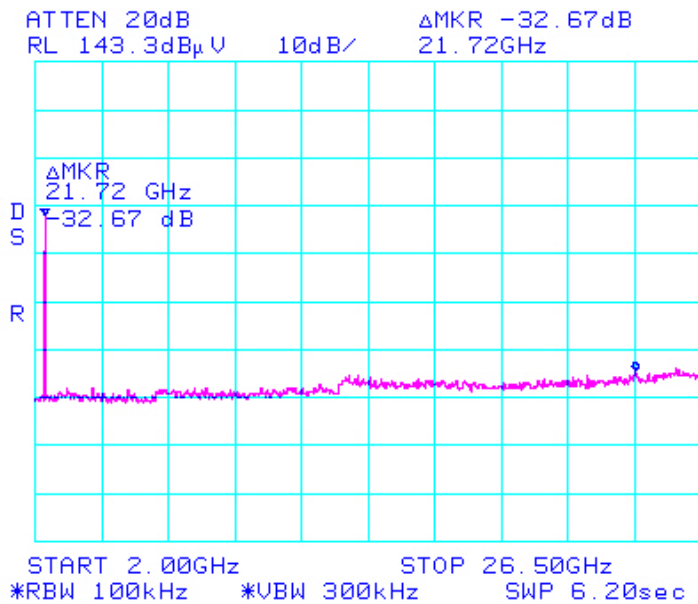


▣ Setting Channel (2 441 MHz)

⇒ Frequency Range (30 MHz ~ 3.0 GHz)

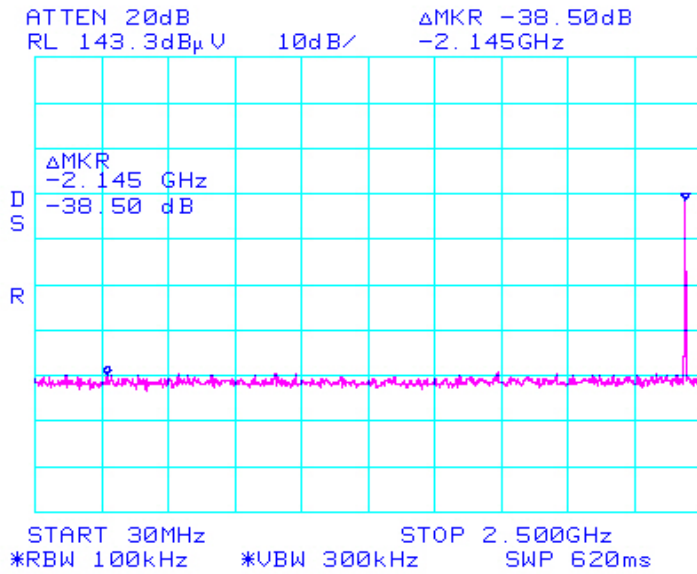


⇒ Frequency Range (2 GHz ~ 26.5 GHz)

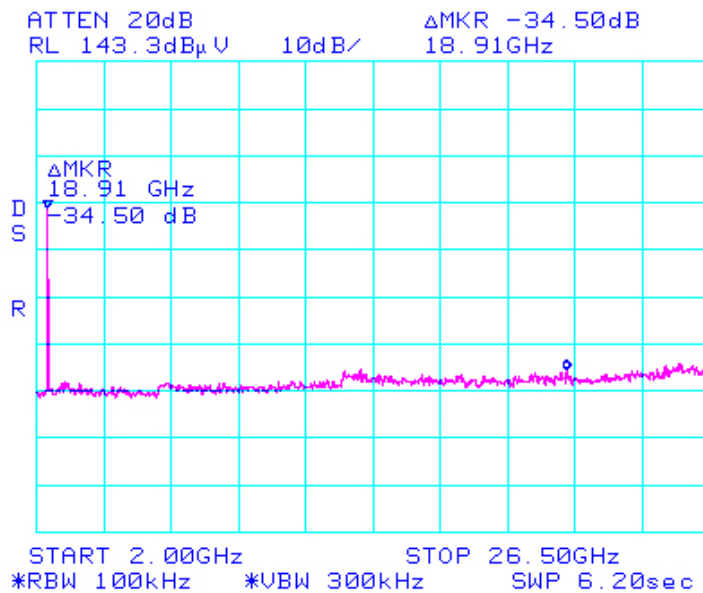


■ Setting Channel (2 480 MHz)

⇒ Frequency Range (30 MHz ~ 3.0 GHz)

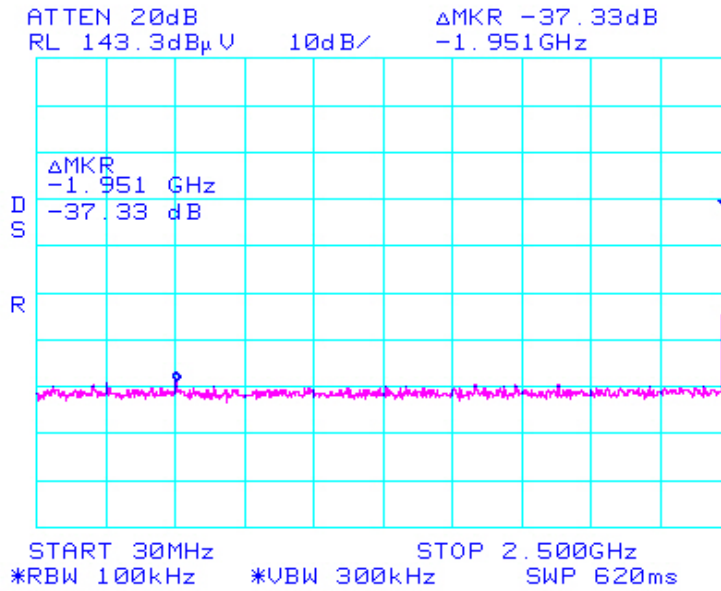


⇒ Frequency Range (2 GHz ~ 26.5 GHz)

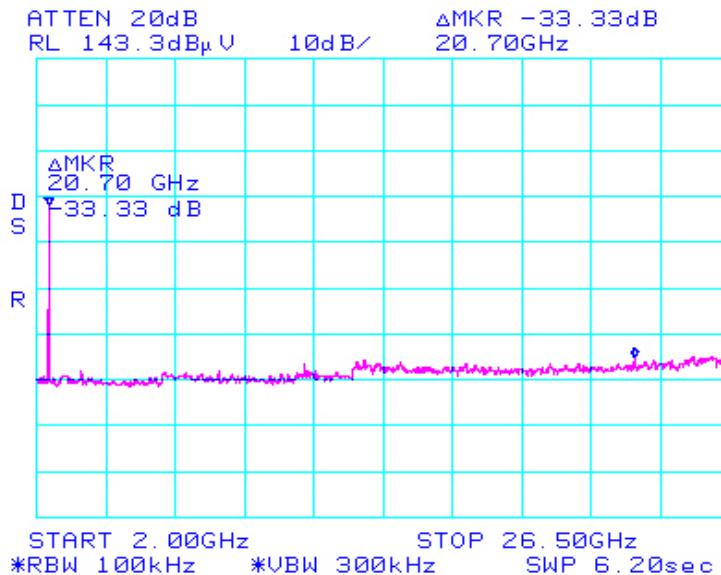


5.8.7 Test Plot (Hopping on)

⇒ Frequency band (30 MHz ~ 2.5 GHz)

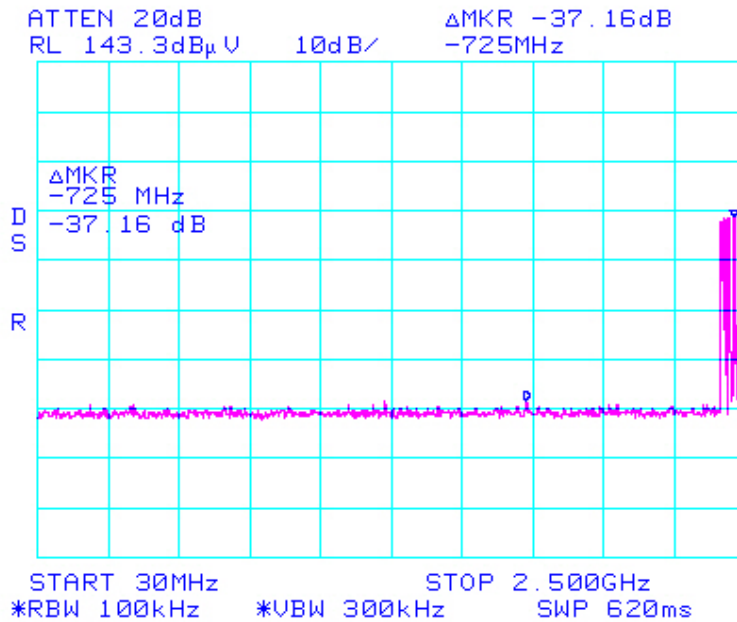

⇒ Frequency band (2 GHz ~ 26.5 GHz)

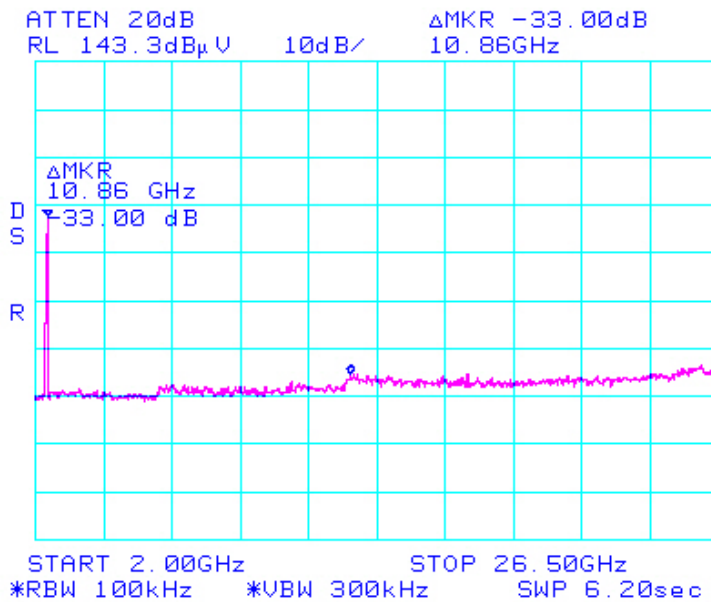

5.9 Spurious RF Radiated emissions

5.9.1 Standard Applicable [FCC §15.247(d)]

All other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10 GHz, the frequency Range of measurements : to the tenth harmonic of the highest fundamental frequency or to 40 GHz, Whichever is lower. In addition, radiated emissions which fall in the restricted bands, as defined in Sec.15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a)

§15.209. [Table 1] limits for radiated emissions measurements (distance at 3m)

Frequency Band [MHz]	Limit [$\mu\text{V}/\text{m}$]	Limit [dB $\mu\text{V}/\text{m}$]	Detector
30 - 88	100 **	40.00	Quasi peak
88 - 216	150 **	43.52	Quasi peak
216 - 960	200 **	46.02	Quasi peak
Above 960	500	54.00	Average

** fundamental emissions from intentional radiators operation under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, or 470-806 MHz. However, operation within these Frequency bands is permitted under other sections of this Part Section 15.231 and 15.241

§15.205. [Table 2] Restrict Band of Operation

Only spurious emissions are permitted in any of the frequency bands listed below ;			
[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505**	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.
4.177 25 - 4.177 75	37.5 -38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.38 6 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	Above 38.6

** Until February 1, 1999, this restricted band shall be 0.490-0.510

5.9.2 Test Environment conditions

- Ambient temperature : 20 °C ,
- Relative Humidity : (50 ~ 51) % R.H.

5.9.3 Measurement Procedure

The measurements procedure of the transmitter radiated E-field is as following describe method.

a pre-scan is performed in a Shield chamber to determine the accurate frequencies before final test, after maximum emissions level will be checked on a open test site and measuring distance is 3 m from EUT to test antenna.(O.A.T.S is ensured that comply with at least 6 dB above the ambient noise level)

- ① The EUT was powered ON with normal operating mode and placed on a 0.8 meter high non-conductive table on the reference ground plane. If EUT is connected to cables, that were fixed to cause maximum emission.
- ② For above 1 GHz, the test antenna is used on Horn antenna, and if the below 1 GHz, broad-band antenna were used. It made with the antenna positioned in both the horizontal and vertical plane of polarization.
- ③ The output of the test antenna will be connected to a measuring receiver, and it is set to tuned over the frequency range according to required standard
- ④ For emission frequencies measured below 1 GHz, The measuring bandwidth and detector type of the measurement receiver is set on a 120 kHz resolution bandwidth using measurement instrumentation employing a CISPR Quasi Peak detector, and for above 1 GHz, set the spectrum analyzer on a 1 MHz resolution bandwidth with average and peak detector for each frequency.
- ⑤ The frequencies at which a relevant radiated signal component is detected, the test antenna will be raised and lowered through the specified heights range(from 1 to 4 meters) in horizontal polarized orientation, until an maximum signal level is detected on the measuring receiver(or spectrum analyzer).
- ⑥ Repeat step ⑤ with antennal in vertical polarized orientations.
- ⑦ The transmitter is position x,y,z axis on turn table rotating through 360 degrees, until the maximum signal level is detected by the measuring receiver.
- ⑧ The receiver is scanned from requested measuring frequency band and then the maximum meter reading is recorded. The radiated emissions were record the test result.

- The measurement results are obtained as described below:


$$\text{Result}(\text{dB}_{\mu\text{A}/\text{m}}) = \text{Reading}(\text{dB}_{\mu\text{A}}) + \text{Antenna factor}(\text{dB}/\text{m}) + \text{CL}(\text{dB}) + \text{other applicable factor}(\text{dB})$$

- ※ if necessary, additionally receiver is adopted high-pass filter and preamp because lower radiated signal

5.9.4 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are test receiver, Cable loss, Antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, Antenna frequency interpolation, measurement distance variation, Site imperfection, mismatch, and system repeatability based on NIS 80,81, The measurement uncertainty level with a 95 % confidence level were apply to Uncertainty of a radiation emissions measurement at OATS(Open Area Test Site) of KOSTEC is ± 4.0 dB

5.9.5 Test Configuration

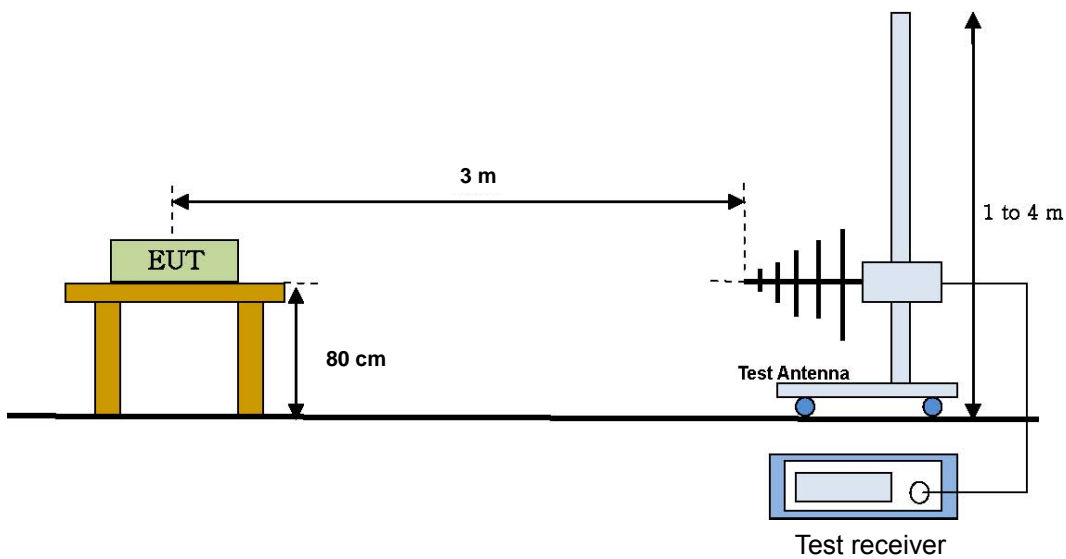

※ In case of above 1 GHz is using the Horn antenna instead of Broad-band Antennal

[Radiated emission setup]

5.9.6 Measurement Result

■ Lowest Channel 1 (2 402 MHz)

Below 1 GHz

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
607.22	36.65	205	1.6	V	16.97	1.19	20	34.81	46.02	11.21	Pass
852.25	29.86	135	1.7	V	20.13	1.35	20	31.34	46.02	14.68	Pass
Above 852.25	Nil emission										

Above 1 GHz

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn. (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
2.528	18.38	115	1.6	H	29.00	2.37	20	29.75	54	24.25	Pass
2,528	29.42	115	1.6	H	29.00	2.37	20	40.79	74	33.21	Pass
Above 2,528	Nil emission										

■ Middle Channel 40 (2 441 MHz)

Below 1 GHz

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
645.18	31.20	205	1.8	V	16.97	1.19	20	29.36	46.02	16.66	Pass
890.15	30.00	100	1.7	V	20.13	1.35	20	31.48	46.02	14.54	Pass
Above 890.15	Nil emission										

Above 1 GHz

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn. (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
2.545	19.28	80	1.5	V	29.00	2.37	20	30.65	54	23.35	Pass
2,545	31.20	80	1.5	V	29.00	2.37	20	42.57	74	31.43	Pass
Above 2,545	Nil emission										

■ Highest Channel 79 (2 480 MHz)

Below 1 GHz

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
683.12	30.25	213	1.6	V	16.98	1.21	20	28.44	46.02	17.58	Pass
929.15	28.30	134	1.8	V	20.13	1.35	20	29.78	46.02	16.24	Pass
Above 929.15	Nil emission										

Above 1 GHz

Freq. (MHz)	Reading (dB μ V/m)	Table (Deg)	Antenna			CL (dB)	Pre AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn. (dB)	Result
			Height (m)	Pol. (H/V)	Fctr. (dB/m)						
2.596	22.25	100	1.6	V	29.00	2.33	20	33.58	54	20.42	Pass
2.596	35.24	100	1.6	V	29.00	2.33	20	46.57	74	27.43	Pass
Above 2,596	Nil emission										

- ※ Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- ※ Limit: 54dB μ V/m(Average), 74dB μ V/m(Peak)
- ※ Duty factor is 9.94 dB(as following the clause 5.8.7 Duty factor measurement plot (ie: if Average value is 10 dBm, peak value is 19.94 dBm)
- Above factor is based on next page of actually display on spectrum analyzer

Freq.(MHz) : Measurement frequency, Reading(dB μ V/m) : Indicated value for test receiver,
 Table (Deg) : Directional degree of Turn table,
 Antenna (Height, Pol, Fctr) : Antenna Height, Polarization and Factor
 Cbl(dB) : Cable loss, Pre AMP(dB) : Preamplifier gain(dB)
 Meas Result (dB μ V/m) : Reading(dB μ V/m)+ Antenna factor.(dB/m) + CL(dB) - Pre AMP(dB)
 Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB) : FCC Limit (dB μ V/m) – Meas Result(dB μ V/m),

5.10 Antenna requirement

5.10.1 Standard applicable [FCC §15.203, §15.247(4)(1)]

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that user a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit So that broken antenna can be replaced by the user, but the Use of a standard antenna jack or electrical connector is prohibited.

And according to §15.247(4)(1), the conducted output power limit specified in paragraph (b) of this section. is based on the use of antennas with directional gains that do not exceed 6dBi.

According to above requirement standard's This product's antenna type is an Chip type and it's gain is 3.5 dBi, So radiated emission field strength from EUT is below requirement standard limit

5.10.2 Antenna gain

Frequency Band	Gain [dBi]	Limit [dBi]	Results
(2 400 ~ 2 485) MHz	3.5	≤ 6	Compliance

5.11 AC Power Conducted emissions

5.11.1 Standard Applicable [FCC §15.207(a)]

For intentional radiator that is designed to be connected to the public utility(AC)power line, the radio frequency Voltage that is conducted back onto the AC power line on any frequencies hopping mode within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 uH / 50 ohms line Impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on The measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

§15.207 limits for AC line conducted emissions;

Frequency of Emission(MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 **
0.5 ~ 5	56	46
5 ~ 30	60	50

** Decreases with the logarithm of the frequency

5.11.2 EUT used cable

Cable Type	Shield	Length (m)	Ferrite	Connector type	Connection Point 1	Connection Point 2
USB	Y	1.8	Y	USB	E.U.T.	Notebook PC

5.11.3 Operating conditions


The operating mode/system was as follows in details:

Establish of BT communication link between Headset(EUT) and Note Book PC under the battery charging mode through USB connection. The Bluetooth headset was set up with send to continuous maximum signal emissions)

5.11.4 Used Peripherals

Description	Model Number	Serial Number	Manufacturer
Monitor	V2410f	CN-0G550M-72872-9CT-05HL	Dell Inc.
Printer	K10193	CME010800428	CANON HI-TECH
External HDD	ND-2500	None	NEXTO DI
SD CARD	SD-M128	0529S18304H	Toshiba
Note Book PC	PP25L	CN-0U8042-70166-87G-0AIL	Dell Inc.
Adaptor	DA65NS4-00	CN-0XK850-48661-84P-25QH	DELTA ELECTRONICS
Headset	happycall	None	None

5.11.5 E.U.T Test Configuration

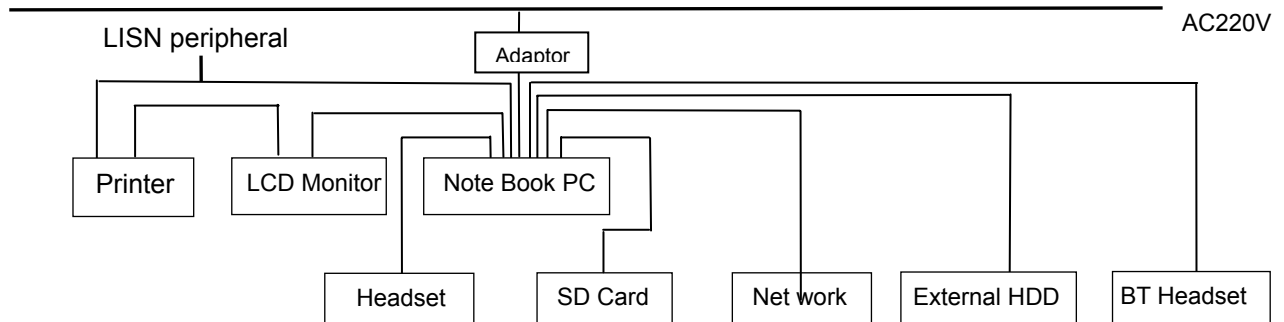

5.11.6 Measurement Procedure

EUT was placed on a non-metallic table height of 0.8 m above the reference ground plane.

Cables connected to EUT were fixed to cause maximum emission.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization.

The measurement antenna was varied in height above the conducting ground plane to obtain the Maximum signal strength.


5.11.7 Test Data

FREQ. (MHz)	LEVEL(dB μV)		LINE Pol	Loss (dB)	LIMIT(dB μV)		MARGIN(dB)	
	QP	AV			QP	AV	QP	AV
0.150	44.58	20.62	N	0.08	65.36	55.36	20.78	34.74
0.201	51.04	40.45	L	0.29	63.53	53.53	12.49	13.08
0.205	48.31	37.34	L	0.29	61.12	51.12	12.81	13.78
2.005	30.86	26.37	N	0.57	56.00	46.00	25.14	19.63
2.072	30.34	26.73	N	0.57	56.00	46.00	25.66	19.27
2.338	29.48	24.32	N	0.57	56.00	46.00	26.52	21.68
6.635	28.69	16.58	L	0.97	60.00	50.00	31.31	33.42
17.693	29.74	26.66	N	1.77	60.00	50.00	30.26	23.34
18.302	30.79	27.31	N	1.77	60.00	50.00	29.21	22.69


* Note: Measurement uncertainty ; ± 2.4 dB ($K=2$)

■ Conducted Emission test graph

Line_Live

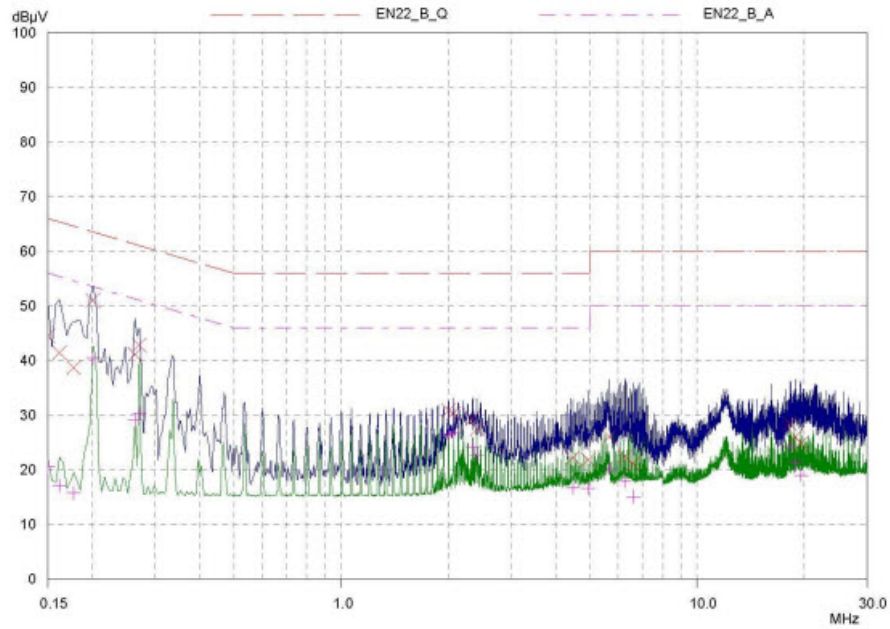


Line_ Neutral

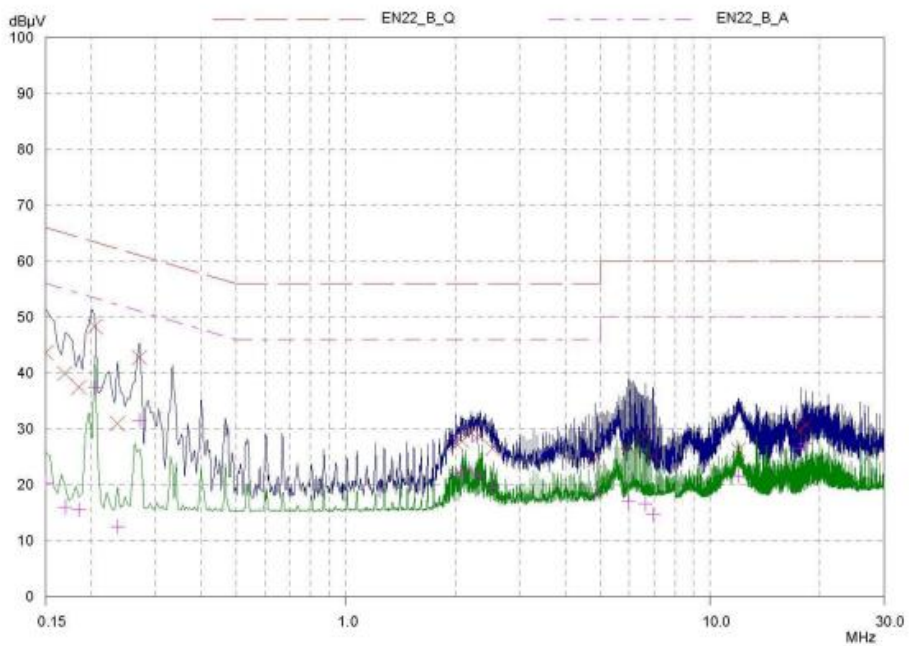

Appendix 1. Photographs of test setup

Conducted RF measurements

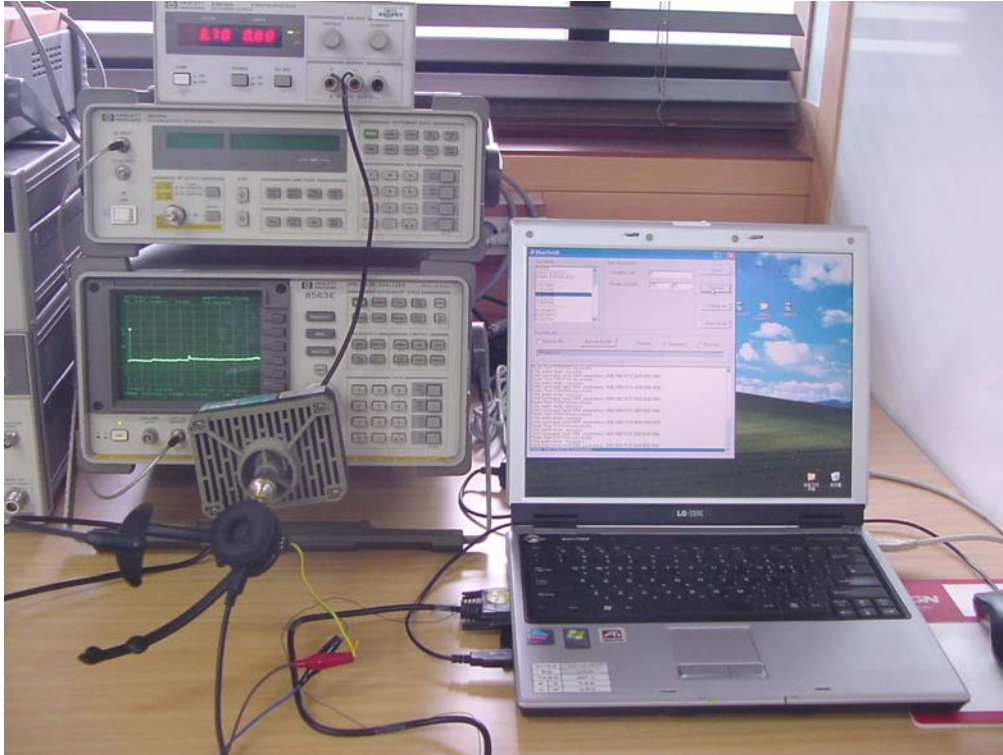

Blank

Appendix 2. Photographs of test setup

Radiated RF measurement (Below 1 GHz)



Radiated RF measurement (Above 1 GHz)



a pre-scan is performed in a Shield chamber to determine the accurate frequencies before final test(O.A.T.S),
after maximum emissions level will be checked on a open test site

Radiated RF Spurious measurement (Anechoic Chamber)



Measurement Room



Appendix 3. Photographs of test setup

Power line conducted emission_ Front



Power line conducted emission_ Rear

