

TRaC Wireless Test Report : TTR-001468WUS1

Applicant : AGD Systems Ltd.

Apparatus : AGD 315-207-000

Specification(s) : CFR47 Part 15.245, July 2008

Purpose of Test : Certification

FCCID : WH3AGD315-207

Authorised by :



: Radio Product Manager

Issue Date : 10th May 2011

Authorised Copy Number : PDF

Contents

Section 1:	Introduction	3
1.1	General	3
1.2	Tests Requested By	4
1.3	Manufacturer	4
1.4	Apparatus Assessed	4
1.5	Test Result Summary	5
1.6	Notes relating to the assessment	6
1.7	Deviations from Test Standards	6
Section 2:	Measurement Uncertainty	7
2.1	Measurement Uncertainty Values	7
Section 3:	Modifications	9
3.1	Modifications Performed During Assessment	9
Appendix A:	Formal Emission Test Results	10
A1	Transmitter Intentional Emission Radiated	11
A2	Radiated Electric Field Emissions	12
A3	Power Line Conducted Emissions	15
Appendix B:	Supporting Graphical Data	16
Appendix C:	Additional Test and Sample Details	21
Appendix D:	Additional Information	27
Appendix E:	Photographs and Figures	28

Section 1:**Introduction****1.1 General**

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by: TRaC Telecoms & Radio []
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Telecoms & Radio [X]
Unit 1
Pendle Place
Skelmersdale
West Lancashire, WN8 9PN
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Test Engineer: Dan Winstanley

Report author: Dan Winstanley

This report must not be reproduced except in full without prior written permission from TRaC Telecoms & Radio.

1.2 Tests Requested By

This testing in this report was requested by:

AGD Systems Ltd.
Whitelion House
Gloucester Road
Staverton
Cheltenham GL51 0TF
Gloucestershire, UK

1.3 Manufacturer

Same as above.

1.4 Apparatus Assessed

The following apparatus was assessed between 03-03-2011 and 05-05-2011:

AGD 315-207-000

The above equipment is a 24.125 GHz Microwave Vehicle Detector.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Spurious Emissions Radiated <1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.209	ANSI C63.10	Pass
Spurious Emissions Radiated >1000MHz	Title 47 of the CFR: Part 15 Subpart (c) 15.209	ANSI C63.10	Pass
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart (c) 15.207	ANSI C63.10	N/A
Intentional Emission Frequency	Title 47 of the CFR: Part 15 Subpart (c) 15.245(b)	ANSI C63.10	Pass
Intentional Emission Field Strength	Title 47 of the CFR: Part 15 Subpart (c) 15.245(b)	ANSI C63.10	Pass
Intentional Emission Band Occupancy	Title 47 of the CFR: Part 15 Subpart (c) 15.215(c)	ANSI C63.10	Pass
Intentional Emission ERP (mW)	Title 47 of the CFR: Part 15 Subpart (c) 15.252(b)	ANSI C63.10	N/A
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart (b) 15.109	ANSI C63.10	N/A
Antenna Arrangements Integral:	Title 47 of the CFR: Part 15 Subpart (c) 15.203	-	Pass
Antenna Arrangements External Connector	Title 47 of the CFR: Part 15 Subpart (c) 15.204	-	N/A
Restricted Bands	Title 47 of the CFR: Part 15 Subpart (c) 15.205	-	Pass
Maximum Frequency of Search	Title 47 of the CFR: Part 15 Subpart (c) 15.33	-	Pass
Extrapolation Factor	Title 47 of the CFR: Part 15 Subpart (c) 15.31(f)	-	N/A

Abbreviations used in the above table:

CFR : Code of Federal Regulations
REFE : Radiated Electric Field Emissions

ANSI : American National Standards Institution
PLCE : Power Line Conducted Emissions

1.6 Notes relating to the assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Measurement Uncertainty Values****Radio Testing – General Uncertainty Schedule**

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**

Uncertainty in test result (Equipment – TRL05) = **1.08dB**

Uncertainty in test result (Equipment – TRL479) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**

Uncertainty in test result (Equipment – TRL05) = **0.113ppm**

Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,
Uncertainty in test result (1GHz-18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious Emissions

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**

Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

[12] Power Line Conduction

Uncertainty in test result = **3.4dB**

[13] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[14] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[15] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[16] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[17] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[18] Receiver Threshold

Uncertainty in test result = **3.23dB**

[19] Transmission Time Measurement

Uncertainty in test result = **7.98%**

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment.

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
EUT	: Equipment Under Test	ATS	: Alternative Test Site
SE	: Support Equipment	Ref	: Reference
L	: Live Power Line	Freq	: Frequency
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 Transmitter Intentional Emission Radiated

Carrier power was verified with the EUT transmitting Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.245(b)
Measurement standard	ANSI C63.10:2003
EUT sample number	S01
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Temperature	20 ⁰ C

FREQ. (MHz)	MEASUREMENT DISTANCE Meters	MEASUREMENT Rx. READING (dB μ V/m)	EXTRAP. FACTOR (dB)	FIELD STRENGTH (mV/m)
24088	3	113.48	-	472.06
Limit value @ fc		2500 mV/m @ 3m		
Band occupancy @ -20 dBc		f _{lower} (MHz)		f _{higher} (MHz)
		24082.371		24162.820
		Bandwidth = 80.448 MHz		

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Receiver detector @ fc = Peak, wideband power meter
 - 3 When battery powered the EUT was powered with new batteries

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.10
 - 2 Measuring distances 3m
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded

A2 Radiated Electric Field Emissions

Preliminary scans were performed using a peak detector with the RBW = 100 kHz. The radiated electric field emission test applies to all spurious emissions and harmonics emissions. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit as required.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site : 3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details:	
Regulation	Title 47 of the CFR, Part 15 Subpart (c) Clause 15.209
Measurement standard	ANSI C63.10:2003
Frequency range	30MHz to 100GHz
EUT sample number	S01
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Temperature	20 ⁰ C
Photographs (Appendix F)	1 & 2

The worst case radiated emission measurements for spurious emissions and harmonics are listed overleaf:

	FREQ (MHz)	Meas Rx (dBuV)	Cable Loss (dB)	Antenna Fact (dB/m)	Pre-amp (dB)	Field Strength (dBuV/m)	Extrap Fact	Field Strength (uV/m)	Limit (uV/m)
1	50.6	15.1	1.1	7.5	-	23.7	-	15.31	100
2	50.85	12.1	1.1	7.5	-	20.7	-	10.84	100
3	85.6	23.5	1.1	7.7	-	32.3	-	41.21	100
4	86.1	23	1.1	7.8	-	31.9	-	39.36	100
5	86.35	19	1.1	7.9	-	28	-	25.12	100
6	99.4	31.9	1.1	10.2	-	43.2	-	144.54	150
7	99.9	34.6	1.1	10.3	-	46	-	199.53	150
8	149.55	24.9	1.4	10	-	36.3	-	65.31	150
9	152	29.5	1.4	9.8	-	40.7	-	108.39	150
10	169.3	21	1.5	9.2	-	31.7	-	38.46	150
11	174.15	19.8	1.5	8.8	-	30.1	-	31.99	150
12	243.7	19.7	1.8	11.4	-	32.9	-	44.16	200
13	245.65	24	1.8	11.7	-	37.5	-	74.99	200
14	246.8	23.5	1.8	11.8	-	37.1	-	71.61	200
15	247.15	24.4	1.8	11.8	-	38	-	79.43	200
16	247.65	24.5	1.8	11.8	-	38.1	-	80.35	200
17	247.85	19.3	1.8	11.8	-	32.9	-	44.16	200
18	249.15	23.7	1.8	11.9	-	37.4	-	74.13	200
19	251.35	23	1.8	12.2	-	37	-	70.79	200
20	252.85	24.1	1.8	12.4	-	38.3	-	82.22	200
21	256.3	20.7	1.8	12.6	-	35.1	-	56.89	200
22	263.15	21.3	1.9	13.2	-	36.4	-	66.07	200
23	264.85	24.8	1.9	13	-	39.7	-	96.61	200
24	299.8	27.4	2	13	-	42.4	-	131.83	200
25	305.5	26.2	2	13.2	-	41.4	-	117.49	200
26	340.95	21.3	2.1	14.1	-	37.5	-	74.99	200
27	356.5	16.7	2.2	14.6	-	33.5	-	47.32	200
28	357.5	16.4	2.2	14.7	-	33.3	-	46.24	200
29	380.15	16.1	2.2	15.1	-	33.4	-	46.77	200
30	392.35	22.8	2.3	15.4	-	40.5	-	105.93	200
31	399.7	21.6	2.3	15.8	-	39.7	-	96.61	200
32	407.75	21.8	2.3	16.2	-	40.3	-	103.51	200
33	455.25	14.1	2.5	16.3	-	32.9	-	44.16	200
34	456.45	17.7	2.5	16.3	-	36.5	-	66.83	200
35	459.9	16.9	2.5	16.4	-	35.8	-	61.66	200
36	485.1	14.4	2.6	17	-	34	-	50.12	200
37	490.7	22.1	2.6	17	-	41.7	-	121.62	200
38	499.7	19.8	2.6	17.2	-	39.6	-	95.50	200
39	509.4	19.6	2.6	17.3	-	39.5	-	94.41	200
40	509.45	20.1	2.6	17.3	-	40	-	100.00	200
41	529.9	20	2.7	17.5	-	40.2	-	102.33	200
42	538.5	18.1	2.7	18	-	38.8	-	87.10	200
43	541.25	10.3	2.7	18.2	-	31.2	-	36.31	200
44	542	13.4	2.7	18.3	-	34.4	-	52.48	200
45	569.25	15.7	2.7	18.5	-	36.9	-	69.98	200
46	588.95	19.3	2.8	18.6	-	40.7	-	108.39	200
47	589	17.3	2.8	18.6	-	38.7	-	86.10	200
48	600.4	16.2	2.8	18.6	-	37.6	-	75.86	200
49	608.45	16	2.8	18.5	-	37.3	-	73.28	200
50	611.4	16.5	2.8	18.5	-	37.8	-	77.62	200
51	48165.3	-	-	-	-	47.76	-	244.275	7500

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1 for emissions below 30MHz the cable losses are assumed to be negligible.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 4 For Frequencies below 1 GHz, RBW= 120 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak RBW=VBW= 1MHz
Average RBW=VBW= 1MHz

The upper and lower frequency of the measurement range was decided according to 47 CFR, Part 15:2008 Clause 15.33(a) and 15.33(a)(1).

Radiated emission limits 47 CFR, Part 15: Clause 15.209 for all emissions:

Frequency of emission (MHz)	Field strength ($\mu\text{V/m}$)	Measurement Distance (m)	Field strength ($\text{dB}\mu\text{V/m}$)
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels:

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels			✓	
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A3 Power Line Conducted Emissions

Test Details	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.207
Measurement standard	ANSI C63.10
Frequency range	150kHz to 30MHz
EUT sample number	S01, S02
Modification state	0
SE in test environment	N/A
SE isolated from EUT	N/A
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 3

Preview power line conducted emission measurements were performed with a peak detector in a screened room. The effect of the EUT set-up on the measurements is summarised in note (b). Where applicable formal measurements of the emissions were performed with a peak, average and/or quasi peak detector. The EUT was set to transmit on its lowest, centre and highest carrier frequency in turn. The formal measurements are detailed below:

The worst-case power line conducted emission measurements are listed below:

Results measured using the average detector compared to the average limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
No significant emissions within 20 dB of the limit.						

Results measured using the quasi-peak detector compared to the quasi-peak limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	0.175	Neutral Line	45.28	64.72	19.44	Pass

Appendix B:


Supporting Graphical Data

This appendix contains graphical data obtained during testing.

Notes:


- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

Radiated Emissions from 9 GHz to 13 GHz

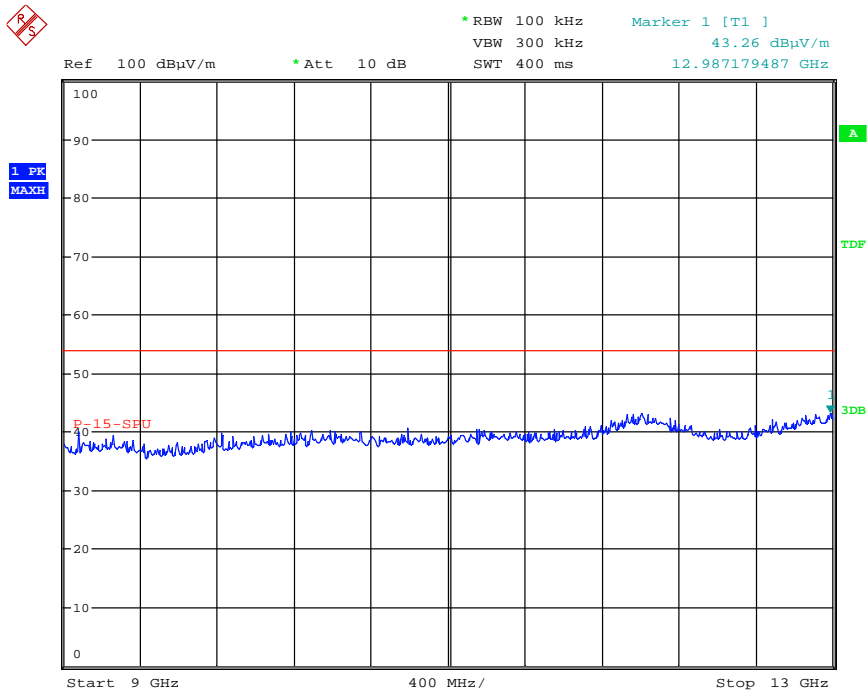


Date: 21.APR.2011 13:19:48

Radiated Emissions from 13 GHz to 18 GHz

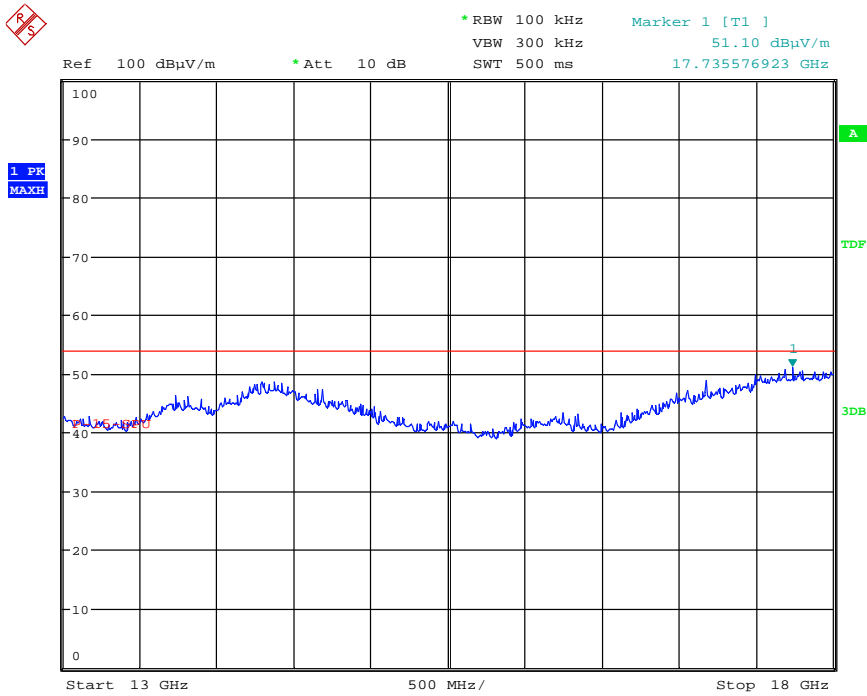


Date: 21.APR.2011 13:20:34

Radiated Emissions from 18 GHz to 26.5 GHz

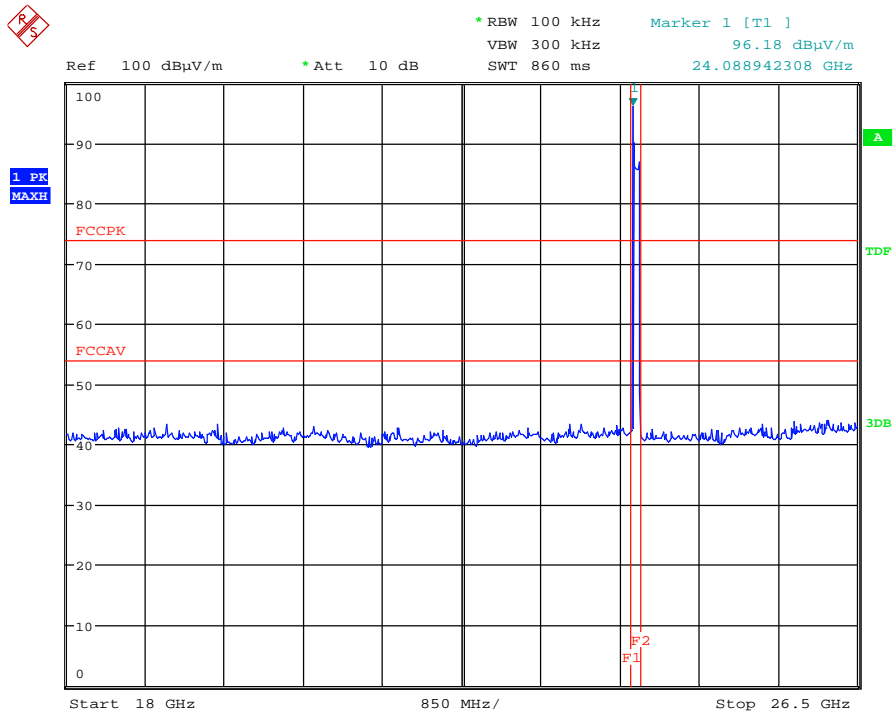


Date: 28.APR.2011 14:17:15

Occupied Bandwidth

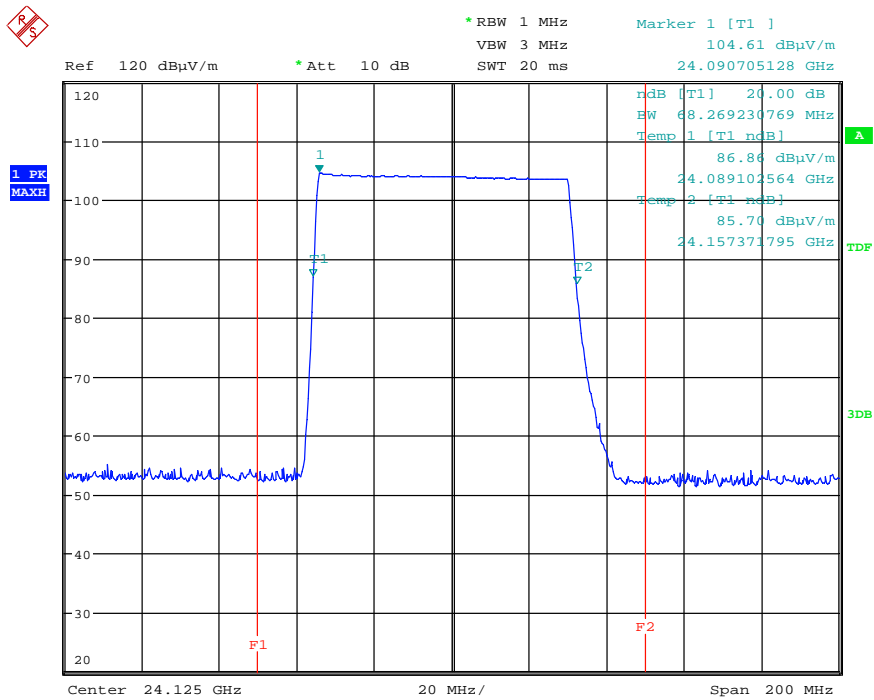

Date: 28.APR.2011 14:30:45

AC Powerline Conducted Emissions Plot

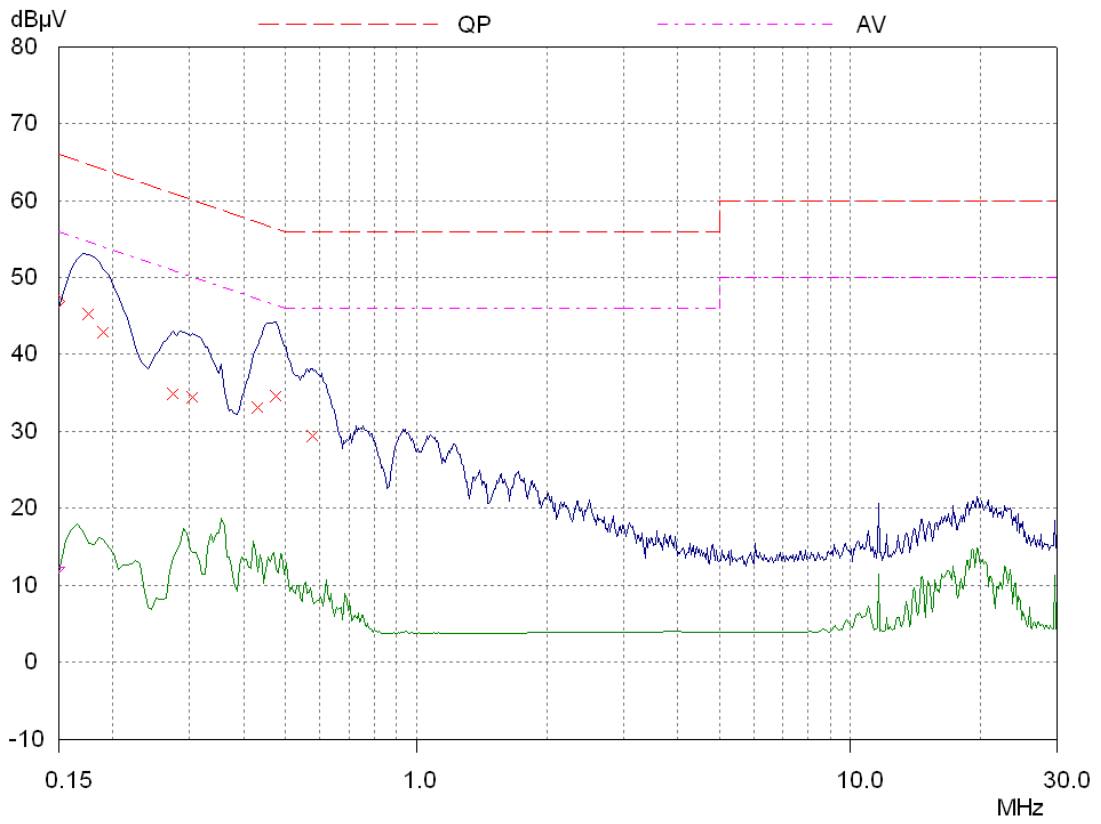

C1 Test samples

The following samples of the apparatus were submitted by the client for testing:

Sample No.	Description	Identification
01	AGD 315-207-000	None

C2 EUT operating mode during testing

During testing, the EUT was exercised as described in the following tables:

Test	Description of Operating Mode
All tests detailed in this report	EUT permanently transmitting.

C3 EUT Configuration Information

The EUT was submitted for testing in one single possible configuration.

C4 List of EUT Ports

The tables below describe the termination of EUT ports:

Sample : S01
Tests : Radiated

Port	Description of Cable Attached	Cable length	Equipment Connected
1	6 Core Unshielded	5m	Power Supply Unit and Notebook Computer

C5 Details of Equipment Used

Type Of Equipment	Maker/Supplier	Model No.	Serial No.	Trl No.
Horn Antenna	Emco	3115	9010-3580	138
Horn Antenna	Emco	3115	9010-3581	139
Bicone Antenna	Chase	VHA 9103 balu	TRL193	193
Log Periodic	Chase	UPA6108	1061	203
Horn Antenna 20dB WG22	Flann	20240-20	322	300
Horn Antenna 20dB WG22	Flann	22240-20	394	301
Bicone Elements	Schwarzbeck	VHBA 9123	N/A	UH29
Multimeter	AVOmeter	M3004	M3270006	UH41
Power Meter	Marconi	6960B	236997/010	UH096
Power Supply	Thandor	PL320QMD	044749	UH100
Spectrum Analyser	R & S	FSU 46	200034	UH281
Receiver/Analyser	R & S	ESU 26	100081	UH377
Oscilloscope	Tektronix	TDS520B	B020491	UH122
Crystal Detector/RF Diode	HP	423A	N/A	UH302
RF Power Sensor	Marconi	6924	951206/006	UH129
DC Supply Unit	Thandor	PL320QMD	044749	UH100
Pre-Amplifier	Agilent	8449B	3008AO16	572
Log-Periodic Antenna	Schwarzbeck	UHALP9108	AC2404C/1	UH28
Spectrum Analyser	HP	S563A	3133A00894	654

Appendix D:

Additional Information

No additional information is included within this test report.

Appendix E:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement: AGD 315 distant view



Photograph 1

