



**REPORT ON THE CERTIFICATION TESTING OF A
AGD SYSTEMS Ltd
AGD932
WITH RESPECT TO
THE FCC RULES CFR 47, PART 15.249 July 2008
INTENTIONAL RADIATOR SPECIFICATION**

TEST REPORT NO: RU1550/9029
COPY NO: 1
ISSUE NO: 1
FCC ID: WH3AGD932-24

**REPORT ON THE CERTIFICATION TESTING OF A
AGD SYSTEMS Ltd
AGD932
WITH RESPECT TO
THE FCC RULES CFR 47, PART 15.249 July 2008
INTENTIONAL RADIATOR SPECIFICATION**

TRaC
testing regulatory and compliance

TEST DATE: 15th January – 12th February 2009

TESTED BY: _____ D WINSTANLEY
APPROVED BY: _____ J CHARTERS
RADIO SECTION
LEADER
DATE: 12th March 2009

Distribution:

- Copy Nos:
1. AGD Systems Ltd
 2. FCC EVALUATION LABORATORIES
 3. TRaC Telecoms & Radio

THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE

The results herein relate only to the sample tested. Full results are contained in the relevant works order file.

CONTENTS

	PAGE		
CERTIFICATE OF CONFORMITY & COMPLIANCE	4		
APPLICANT'S SUMMARY	5		
EQUIPMENT TEST CONDITIONS	6		
TESTS REQUIRED	6		
TEST RESULTS	7 - 9		
		ANNEX	
PHOTOGRAPHS		A	
PHOTOGRAPH No. 1: Test setup			
PHOTOGRAPH No. 2: Transmitter front view			
PHOTOGRAPH No. 3: Transmitter rear view			
PHOTOGRAPH No. 4: PSU & Data PCB track side			
PHOTOGRAPH No. 5: PSU & Data PCB component side			
PHOTOGRAPH No. 6: RF Module Antenna side			
PHOTOGRAPH No. 7: RF Module Rear side			
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST		B	
MEASUREMENT UNCERTAINTY		C	
TEST EQUIPMENT CALIBRATION		D	
BAND OCCUPANCY PLOT		E	
EMISSIONS GRAPH(s)		F	
Notes:			
1. Component failure during test		YES	[]
		NO	[X]
2. If Yes, details of failure:			
3. The facilities used for the testing of the product contain in this report are FCC Listed.			
4. The contents of the attached applicants declarations and other supplied information are not covered by the scope of this laboratory's UKAS or FCC accreditations' and is provided in good faith.			



CERTIFICATE OF CONFORMITY & COMPLIANCE

FCC IDENTITY: WH3AGD932-24

TESTED IN CONJUNCTION WITH FCCID(s): WH3AGD340
WH3AGD330

PURPOSE OF TEST: Certification

TEST SPECIFICATION: FCC RULES CFR 47, Part 15.249 July 2008

TEST RESULT: Compliant to Specification

EQUIPMENT UNDER TEST: AGD932

ITU: EMISSION CODE: 3M612N0N

EQUIPMENT TYPE: Portable Handheld Target Simulator

PRODUCT USE: Speed Radar Operation Tester

CARRIER EMISSION: 123.45 mV/m @3m

ANTENNA TYPE: Patch Antenna

ALTERNATIVE ANTENNA: Not Applicable

BAND OF OPERATION: 24.00 – 24.25GHZ

CHANNEL SPACING: Not Applicable, Wideband

FREQUENCY GENERATION: External Source Crystal Synthesiser

MODULATION METHOD: Amplitude Digital Angle

POWER SOURCE(s): +3Vdc

TEST DATE(s): 15th January – 12th February 2009

ORDER No(s): 40758

APPLICANT: AGD Systems Ltd

ADDRESS: White Lion House
Gloucester Road
Staverton
Cheltenham
Gloucester
GL51 0TF

TESTED BY: _____ D WINSTANLEY

APPROVED BY: _____ J CHARTERS
RADIO SECTION
LEADER

APPLICANT'S SUMMARY

EQUIPMENT UNDER TEST (EUT): AGD932

EQUIPMENT TYPE: Portable Handheld Target Simulator

PURPOSE OF TEST: Certification

TEST SPECIFICATION(s): FCC RULES CFR 47, Part 15.249 July 2008

TEST RESULT: COMPLIANT Yes
No

APPLICANT'S CATEGORY: MANUFACTURER
IMPORTER
DISTRIBUTOR
TEST HOUSE
AGENT

APPLICANT'S ORDER No(s): 40758

APPLICANT'S CONTACT PERSON(s): Mr R Fyfe
E-mail address: rob.fyfe@agd-systems.com

APPLICANT: AGD Systems Ltd
ADDRESS: White Lion House
Gloucester Road
Staverton
Cheltenham
Gloucester
GL51 0TF

TEL: +44 (0) 1452 854212

FAX: +44 (0) 1452 854213

EUT(s) COUNTRY OF ORIGIN: United Kingdom

TEST LABORATORY: TRaC Telecoms & Radio

UKAS ACCREDITATION No: 0728

TEST DATE(s): 15th January – 12th February 2009

TEST REPORT No: RU1550/9029

EQUIPMENT TEST / EXAMINATIONS REQUIRED

1.	TEST/EXAMINATION	RULE PART	DETECTOR	APPLICABILITY
	Intentional Emission Frequency:	15.249(a)	Average	YES
	Intentional Emission Field Strength:	15.249(a)	Average	YES
	Intentional Emission Band Occupancy:	15.215 (c)	Peak	YES
	Intentional Emission ERP (mW):	N/A	-	NO
	Spurious Emissions – Conducted:	15.207	Quasi Peak Average	YES
	Spurious Emissions – Radiated <1000MHz:	15.209	Quasi Peak	YES
	Spurious Emissions – Radiated >1000MHz:	15.249 15.209	Average	YES
	Maximum Frequency of Search:	15.33	-	YES
	Antenna Arrangements Integral:	15.203	-	YES
	Antenna Arrangements External Connector:	15.204	-	YES
	Restricted Bands	15.205	-	YES
	Extrapolation Factor	15.31(f)	-	YES

- 2. Product Use: Speed Radar Operation Tester
- 3. Emission Designator: 3M612N0N
- 4. Duty Cycle: 100%
- 5. Temperatures: Ambient (Tnom) 22°C
- 6. Supply Voltages: Vnom +3Vdc

Note: Vnom voltages are as stated above unless otherwise shown on the test report page

- 7. Equipment Category:
 - Single channel
 - Two channel
 - Multi-channel
- 8. Channel spacing:
 - Narrowband
 - Wideband

System Description:

The AGD932 is a handheld target simulator for testing radars when installed on site. The AGD932 receives the signal from the radar under test (RUT), modulates the received signal to represent the speed set on the AGD932 and then retransmits the modulated signal. The retransmitted signal simulates the returned signal from a target. The device operates at a distance of 1 – 2 meters from the RUT and the returned signal field strength from the AGD932 is relative to the strength of the received signal from the RUT. The AGD932 will not transmit without the presence of an input signal from an external source (RUT).

TRANSMITTER TESTS

TRANSMITTER SPURIOUS EMISSIONS – RADIATED – PART 15.209

Ambient temperature	=	2°C(<1GHz)	3m measurements <1GHz	[X]
Relative humidity	=	69% (<1GHz),	1m measurements <26.5GHz	[X]
Conditions	=	Open Area Test Site (OATS)	0.3m measurements <100GHz	[X]
Supply voltage	=	+3Vdc	3m extrapolated from 0.3m	[X]
Channel number	=	1		

Bottom Channel	FREQ. (MHz)	MEAS Rx (dBµV)	CABLE LOSS (dB)	ANT. FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACT (dB)	FIELD ST'GH (µV/m)	LIMIT (µV/m)
0.009MHz - 0.49MHz									Note 9
0.49MHz - 1.705MHz									Note 9
1.705MHz - 30MHz									Note 9
30MHz - 88MHz									Note 9
88MHz - 216MHz									Note 9
216MHz - 960MHz	312.20	15.02	2.38	13.20	-	30.6	-	33.88	200
	347.60	18.10	2.50	14.50	-	35.1	-	56.88	200
	372.50	20.92	2.58	14.80	-	38.3	-	82.22	200
	385.60	21.59	2.61	15.50	-	39.7	-	96.60	200
	403.70	19.72	2.68	16.40	-	38.8	-	87.09	200
	458.50	13.80	2.90	17.20	-	33.9	-	49.54	200
	483.45	10.00	2.95	17.75	-	30.7	-	34.27	200
496.95	10.46	3.04	18.90	-	32.4	-	41.67	200	
960MHz - 1GHz									Note 9
1GHz - 100GHz									Note 9
Limits	Restricted Bands 15.205								
	0.009 MHz to 0.49 MHz				2400/f(kHz) µV/m @ 300m				
	0.49 MHz to 1.705 MHz				24000/f(kHz) µV/m @ 30m				
	1.705MHz to 30MHz				30µV/m @ 30m				
	30MHz to 88MHz				100µV/m @ 3m				
	88MHz to 216MHz				150µV/m @ 3m				
	216MHz to 960MHz				200µV/m @ 3m				
	960MHz to 1GHz				500µV/m @ 3m				
	1GHz to 100GHz				500µV/m @ 3m				
	Un-restricted Bands & Harmonics								
	Harmonics				2500µV/m @ 3m				
	All other Emissions				50 dBc or 15.209 Whichever is lesser attenuation @ 3m				

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Emissions were searched to: (x) 1000MHz inclusive, as per Part 15.33a
 - 3 Extrapolation factor 9.5dB from 1m to 3m, as per Part 15.31f
 - 4 Measurements >1GHz @ 1m as per Part 15.31f(1)
 - 5 Receiver detector <1GHz = CISPR, Quasi-Peak, 120kHz bandwidth
 - 6 Receiver detector >1GHz = Average, 1MHz resolution bandwidth, Peak hold for plots
 - 7 New batteries used for battery-powered products.
 - 8 See Annex F for Emissions Graph(s)
 - 9 Only Emissions Within 20dB of the limit are recorded
 - 10 EUT Tested with highest returned output power from either device.

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
 - 2 Measuring distances as Notes 1 to 4 above
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded.

The test equipment used for the Transmitter Spurious Emissions – Radiated – Part 15.209 tests is shown overleaf:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	EQUIPMENT USED
HORN ANTENNA	EMCO	3115	9010 - 3580	138	X
HORN ANTENNA	FLANN	24240-20	124	265A	X
HORN ANTENNA	FLANN	20240-20	322	300	X
PRE AMPLIFIER	AGILENT	8449B	3008A016	572	X
SPECTRUM ANALYSER	HP	8563A	3133A00894	654	X
RECEIVER	R & S	ESVS 10	841431/014	UH186	X
BILOG ANTENNA	YORK	CBL611/A	1618	UH191	X
SPECTRUM ANALYSER	R & S	FSU	200034	UH281	X
HARMONIC MIXER 33 -50 GHz	AGILENT	11970Q	MY30030406	UH365	X
HARMONIC MIXER 50 – 75 GHz	AGILENT	11970V	MY30030198	UH366	X
HARMONIC MIXER 75 – 110 GHz	AGILENT	11970W	MY25210349	UH367	X
HORN ANTENNA	FLANN	23240-20	83	263A	X
HORN ANTENNA	FLANN	25240-20	N/A	N/A	X
HORN ANTENNA	FLANN	27240-20	N/A	N/A	X

TRANSMITTER TESTS

TRANSMITTER INTENTIONAL EMISSION – RADIATED – Part 15.249 July 2008

Ambient temperature	=	22°C(<1GHz),	1m measurements @ fc	[X]
Relative humidity	=	46%(<1GHz),	10m measurements @ fc	[]
Conditions	=	Semi-Anechoic Chamber	30m measurements @ fc	[]
Supply voltage	=	+3Vdc	30m extrapolated from 3m	[]
Channel number	=	1	30m extrapolated from 10m	[]

TESTED RADAR	FREQ. (GHz)	MEAS READING (dBµV)	CABLE LOSS (dB)	ANT FACTOR (dB/m)	PRE AMP (dB)	FIELD ST'GH (dBµV/m)	EXTRAP FACTOR (dB)	FIELD ST'GH (mV/m)
AGD340	24.10150	34.59	4.70	37.50	33.75	110.54	9.54	112.201
AGD330	24.10730	35.42	4.70	37.50	33.75	111.37	9.54	123.450
Limit value @ fc				250 (mV/m)				
Band occupancy @ -20 dBc				f lower		f higher		
				24.105448718 GHz		24.109070513 GHz		

See spectrum analyser plot – Annex E

- Notes:**
- 1 Results quoted are extrapolated as indicated
 - 2 Receiver detector @ fc = Average 1MHz bandwidth
 - 3 When battery powered the EUT was powered with new batteries

- Test Method:**
- 1 As per Radio – Noise Emissions, ANSI C63.4: 2003
 - 2 Measuring distances 1m
 - 3 EUT 0.8 metre above ground plane
 - 4 Emissions maximised by rotation of EUT, on an automatic turntable.
Raising and lowering the receiver antenna between 1m & 4m.
Horizontal and vertical polarisations, of the receive antenna.
EUT orientation in three orthogonal planes.
Maximum results recorded

The test equipment used for the Transmitter Intentional Emission – Radiated – Part 15.249 July 2008 tests is shown below:

TYPE OF EQUIPMENT	MAKER/SUPPLIER	MODEL No	SERIAL No	TRL No	EQUIPMENT USED
HORN ANTENNA	FLANN	20240-20	322	300	X
PRE AMPLIFIER	AGILENT	8449B	3008A016	572	X
SPECTRUM ANALYSER	R & S	FSU	200034	UH281	X

ANNEX A
PHOTOGRAPHS


PHOTOGRAPH No. 1


TEST SETUP









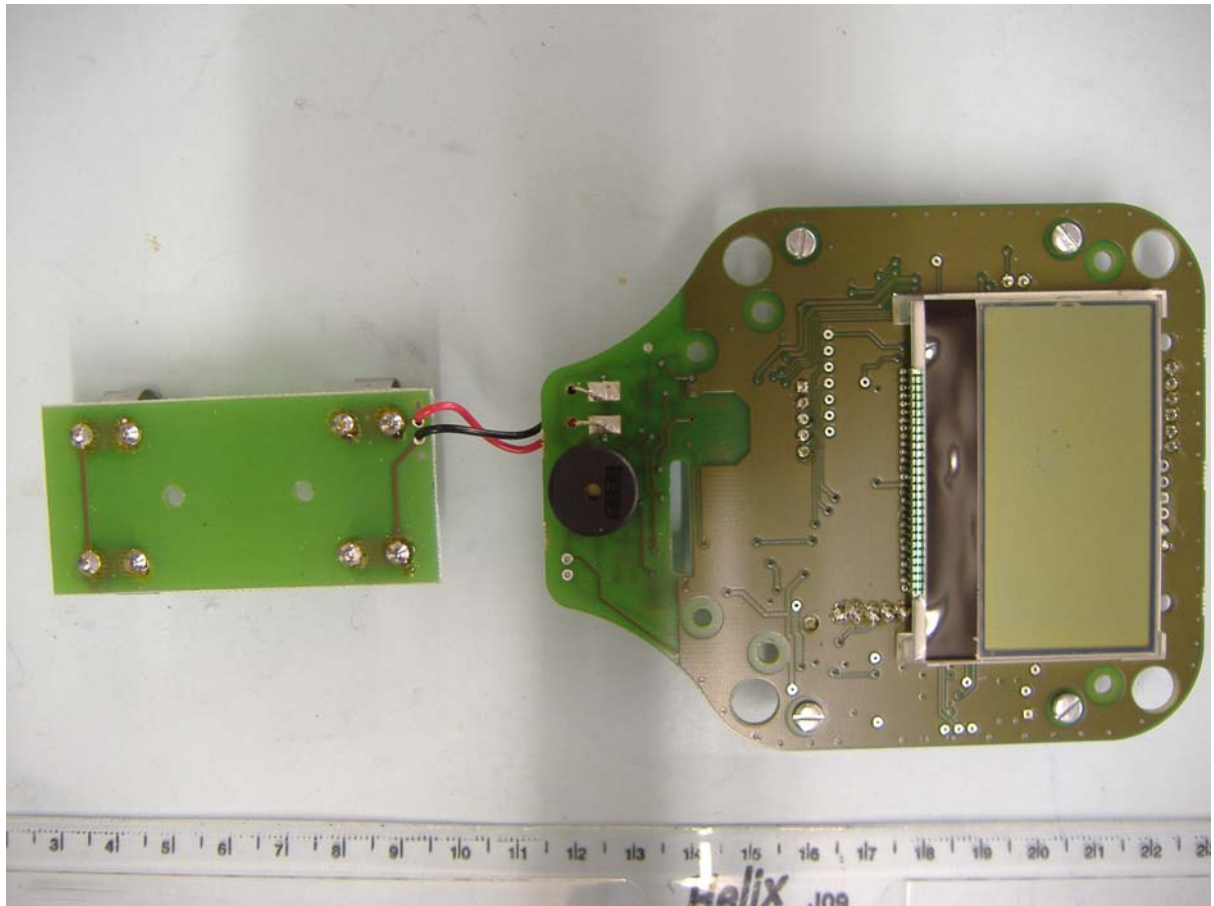

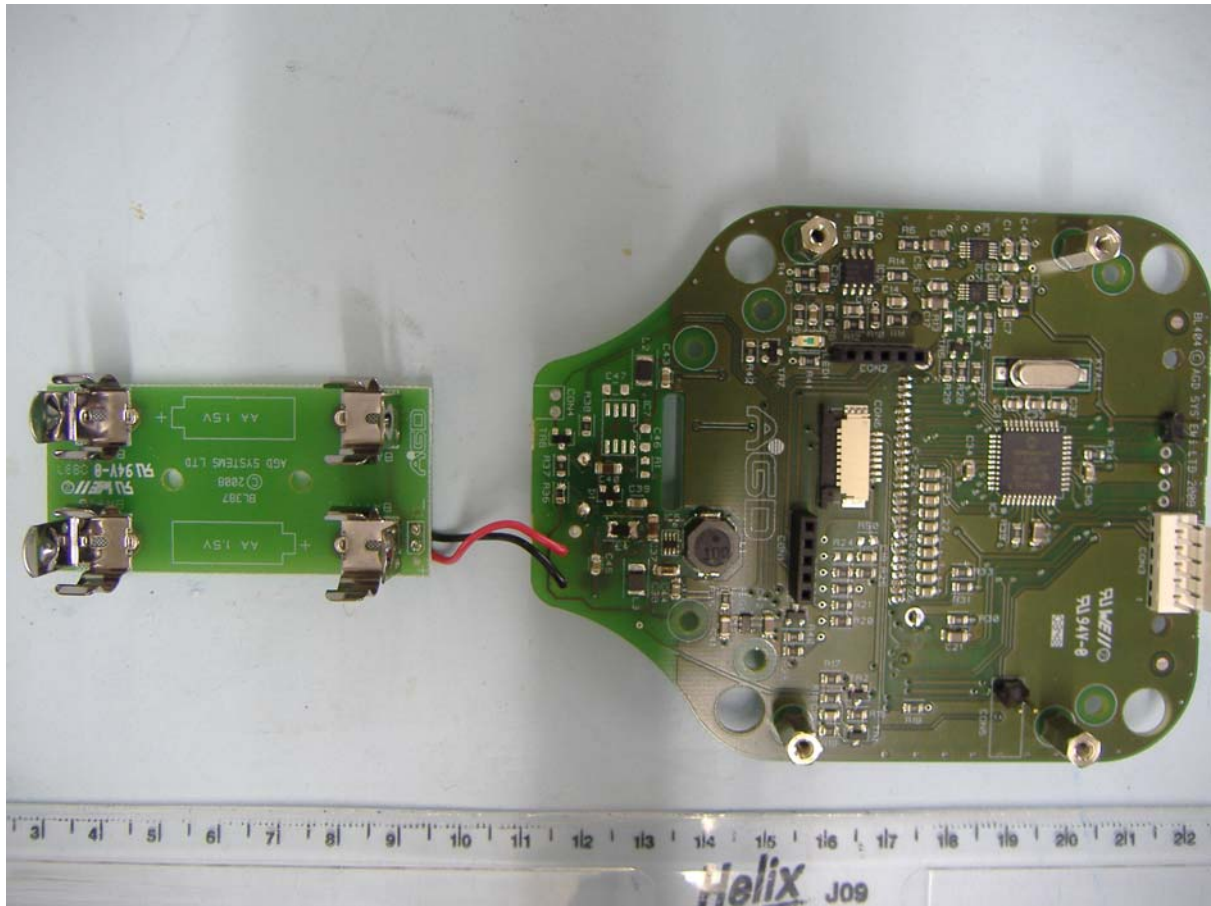

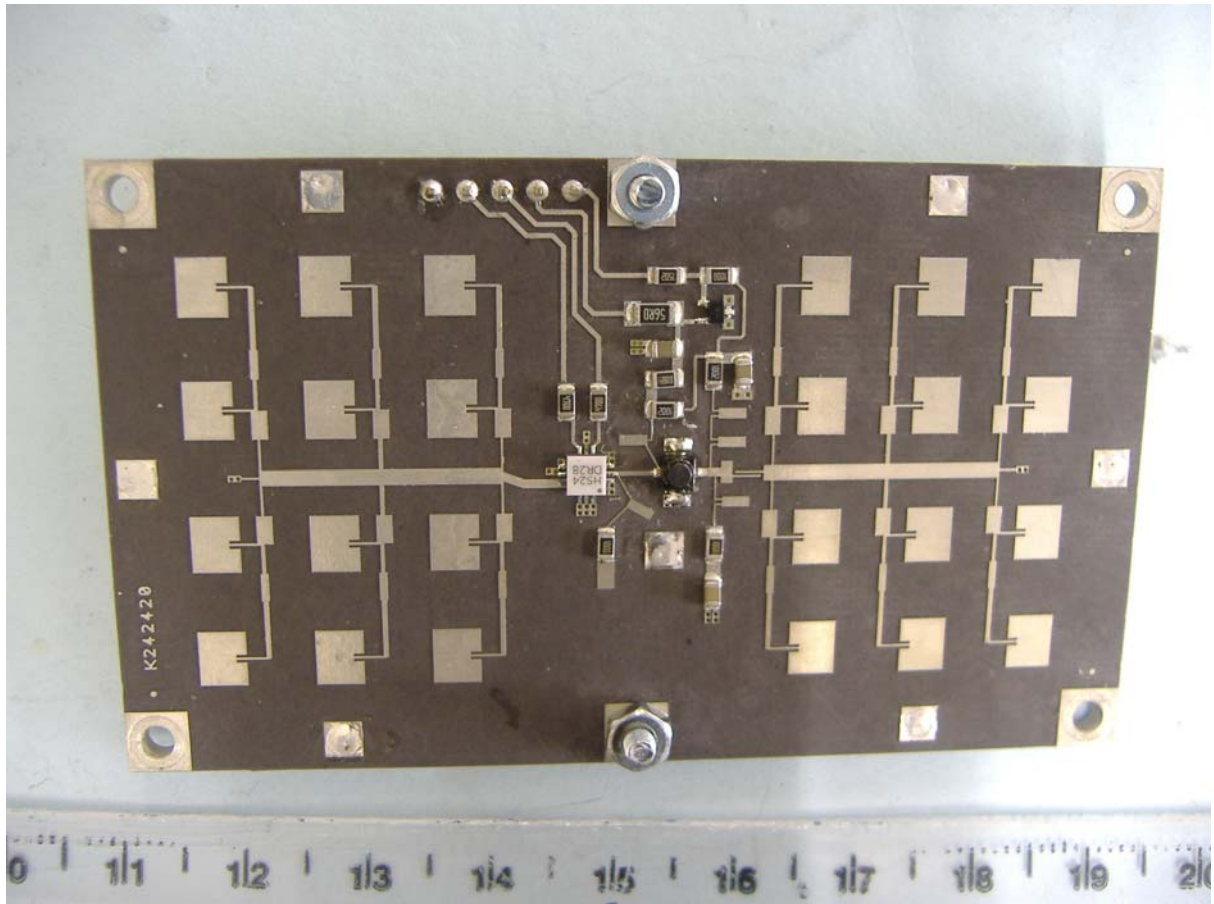

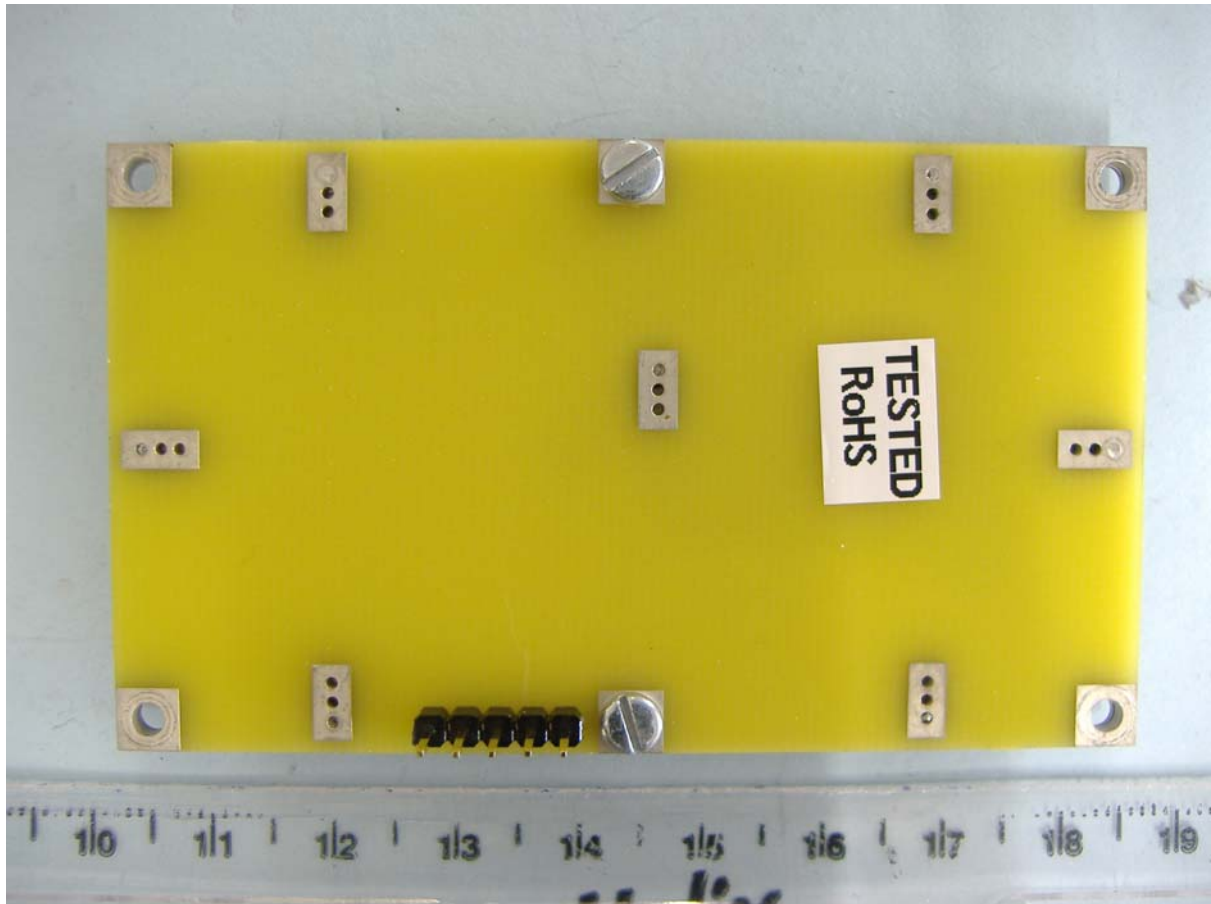

ANNEX B
APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

APPLICANT'S SUBMISSION OF DOCUMENTATION LIST

a.	TCB	-	APPLICATION	[X]
		-	FEE	[X]
b.	AGENT'S LETTER OF AUTHORISATION	-		[X]
c.	MODEL(s) vs IDENTITY	-		[X]
d.	ALTERNATIVE TRADE NAME DECLARATION(s)	-		[]
e.	LABELLING	-	PHOTOGRAPHS	[X]
		-	DECLARATION	[]
		-	DRAWINGS	[]
f.	TECHNICAL DESCRIPTION	-		[X]
g.	BLOCK DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
h.	CIRCUIT DIAGRAMS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
i.	COMPONENT LOCATION	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
j.	PCB TRACK LAYOUT	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
k.	BILL OF MATERIALS	-	Tx	[X]
		-	Rx	[]
		-	PSU	[]
		-	AUX	[]
l.	USER INSTALLATION / OPERATING INSTRUCTIONS	-		[X]

ANNEX C
MEASUREMENT UNCERTAINTY

Radio Testing – General Uncertainty Schedule

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95% confidence where no required test level exists.

[1] Adjacent Channel Power

Uncertainty in test result = **1.86dB**

[2] Carrier Power

Uncertainty in test result (Equipment - TRLUH120) = **2.18dB**

Uncertainty in test result (Equipment – TRL05) = **1.08dB**

Uncertainty in test result (Equipment – TRL479) = **2.48dB**

[3] Effective Radiated Power

Uncertainty in test result = **4.71dB**

[4] Spurious Emissions

Uncertainty in test result = **4.75dB**

[5] Maximum frequency error

Uncertainty in test result (Equipment - TRLUH120) = **119ppm**

Uncertainty in test result (Equipment – TRL05) = **0.113ppm**

Uncertainty in test result (Equipment – TRL479) = **0.265ppm**

[6] Radiated Emissions, field strength OATS 14kHz-18GHz Electric Field

Uncertainty in test result (14kHz – 30MHz) = **4.8dB**, Uncertainty in test result (30MHz – 1GHz) = **4.6dB**,

Uncertainty in test result (1GHz-18GHz) = **4.7dB**

[7] Frequency deviation

Uncertainty in test result = **3.2%**

[8] Magnetic Field Emissions

Uncertainty in test result = **2.3dB**

[9] Conducted Spurious

Uncertainty in test result (Equipment TRL479) Up to 8.1GHz = **3.31dB**

Uncertainty in test result (Equipment TRL479) 8.1GHz – 15.3GHz = **4.43dB**

Uncertainty in test result (Equipment TRL479) 15.3GHz – 21GHz = **5.34dB**

Uncertainty in test result (Equipment TRLUH120) Up to 26GHz = **3.14dB**

[10] Channel Bandwidth

Uncertainty in test result = **15.5%**

[11] Amplitude and Time Measurement – Oscilloscope

Uncertainty in overall test level = **2.1dB**, Uncertainty in time measurement = **0.59%**, Uncertainty in Amplitude measurement = **0.82%**

[11] Power Line Conduction

Uncertainty in test result = **3.4dB**

[12] Spectrum Mask Measurements

Uncertainty in test result = **2.59% (frequency)**
Uncertainty in test result = **1.32dB (amplitude)**

[13] Adjacent Sub Band Selectivity

Uncertainty in test result = **1.24dB**

[14] Receiver Blocking – Listen Mode, Radiated

Uncertainty in test result = **3.42dB**

[15] Receiver Blocking – Talk Mode, Radiated

Uncertainty in test result = **3.36dB**

[16] Receiver Blocking – Talk Mode, Conducted

Uncertainty in test result = **1.24dB**

[17] Receiver Threshold

Uncertainty in test result = **3.23dB**

[18] Transmission Time Measurement


Uncertainty in test result = **7.98%**

ANNEX D
TEST EQUIPMENT CALIBRATION

TRL Number	Equipment Type	Manufacturer	Last Cal Calibration	Calibration Period	Due For Calibration
UH06/07	IC OATS Submission	TRL	01/06/2007	24	01/06/2009
UH028	Log Periodic Ant	Schwarbeck	30/05/2007	24	30/05/2009
UH029	Bicone Antenna	Schwarbeck	06/05/2007	24	06/05/2009
UH041	Multimeter	AVOmeter	21/01/2009	12	21/01/2010
UH122	Oscilloscope	Tektronix	10/12/2007	24	10/12/2009
UH132	Power meter	Marconi	21/01/2009	12	21/01/2010
UH186	Receiver	R&S	19/12/2008	24	19/12/2010
UH191	Bilog Antenna	York	01/10/2008	12	01/10/2009
UH228	Power Sensor	Marconi	22/01/2009	12	22/01/2010
UH281	Spectrum Analyser	R&S	28/10/2008	12	28/10/2009
UH330	K type transition	Maury M'wave	13/06/2008	24	13/06/2010
UH340	Signal Generator	HP	06/05/2008	12	06/05/2009
UH365	Harmonic Mixer	Agilent	16/07/2008	24	16/07/2010
UH366	Harmonic Mixer	Agilent	21/07/2008	24	21/07/2010
UH367	Harmonic Mixer	Agilent	02/07/2008	24	02/07/2010
L005	CMTA	R&S	29/10/2008	12	29/10/2009
L007	Loop Antenna	R&S	22/05/2007	24	22/05/2009
L138	1-18GHz Horn	EMCO	23/05/2007	24	23/05/2009
L139	1-18GHz Horn	EMCO	23/05/2007	24	23/05/2009
L176	Signal Generator	Marconi	06/05/2008	12	06/05/2009
L193	Bicone Antenna	Chase	06/05/2008	24	06/05/2010
L203	Log Periodic Ant	Chase	06/05/2008	24	06/05/2010
L263/A	Horn 18-26GHz	Flann	13/06/2008	24	13/06/2010
L300	Horn 18-26GHz	Flann	12/06/2008	24	12/06/2010
L309	SMA Transition		13/06/2008	24	13/06/2010
L426	Temperature Indicator	Fluke	21/01/2009	12	21/01/2010
L479	Analyser	Anritsu	22/09/2008	12	22/09/2009
L572	Pre Amp	Agilent	04/07/2008	12	04/07/2009
L654	Spectrum Analyser	HP	01/07/2008	12	01/07/2009

ANNEX E
BANDWIDTH PLOT

BANDWIDTH PLOT

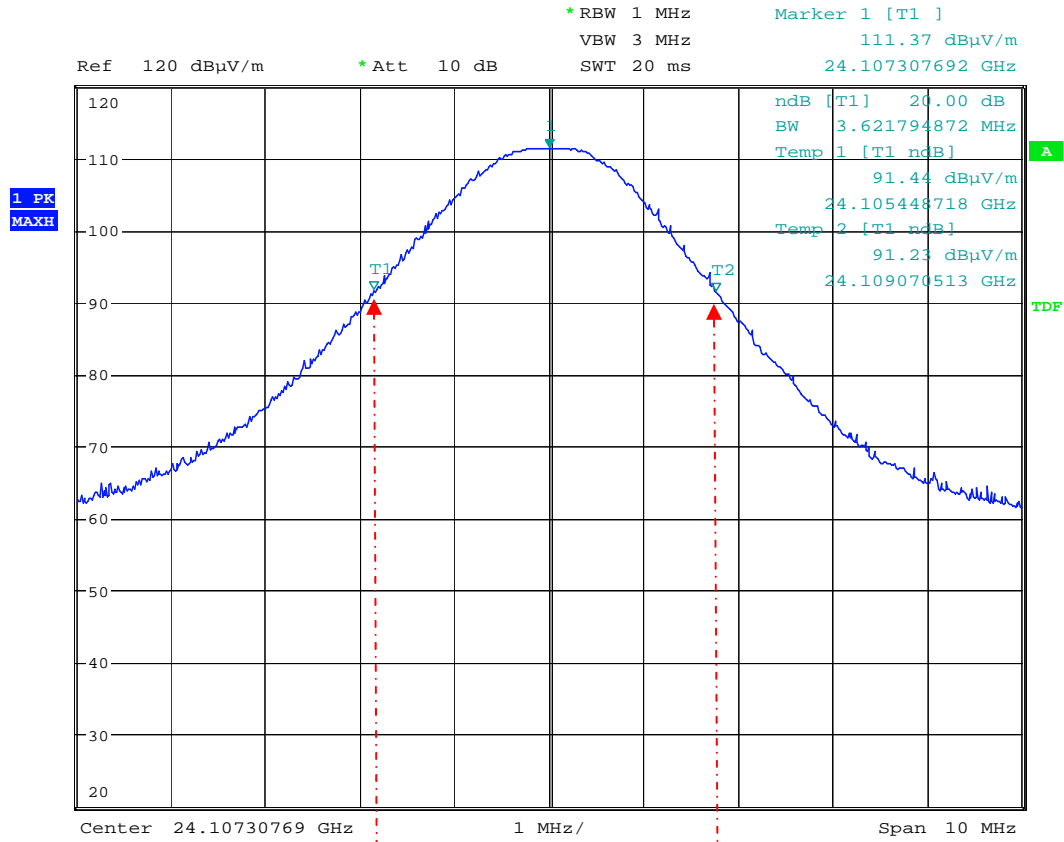


Date: 20.FEB.2009 11:00:06

f_{Lower}


f_{Higher}

f_{Lower} = 24.105448718 GHz
 f_{Higher} = 24.109070513 GHz
 Occupied Bandwidth = 3.62179 MHz

ANNEX F
EMISSIONS GRAPH(s)

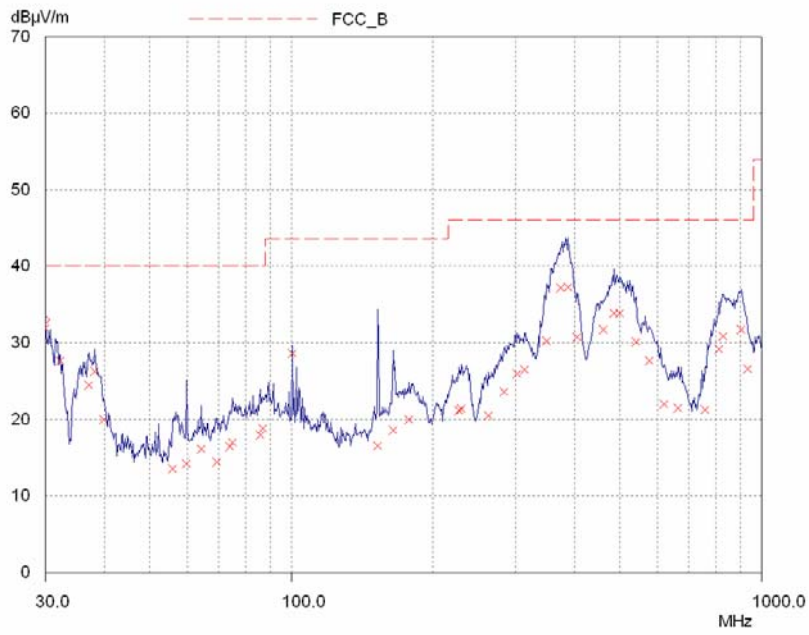


30 MHz – 1GHz

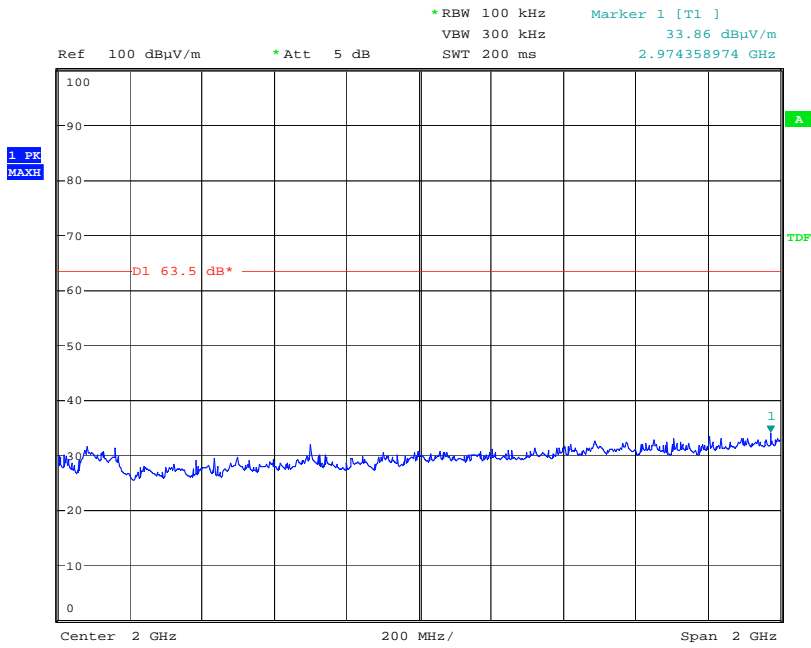


Date: 12.FEB.2009 09:53:53

1GHz – 3GHz

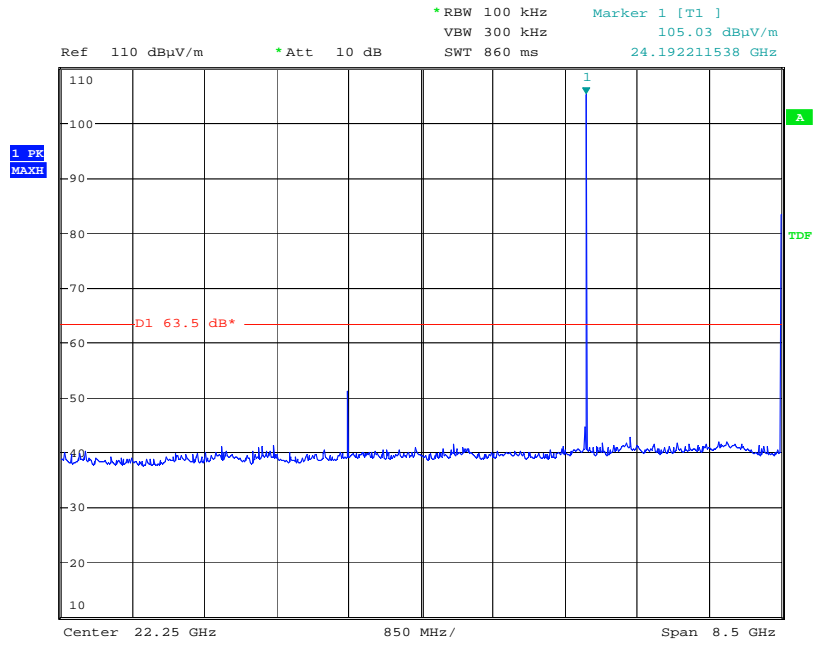

Date: 11.FEB.2009 10:31:56

18 GHz – 26.5GHz

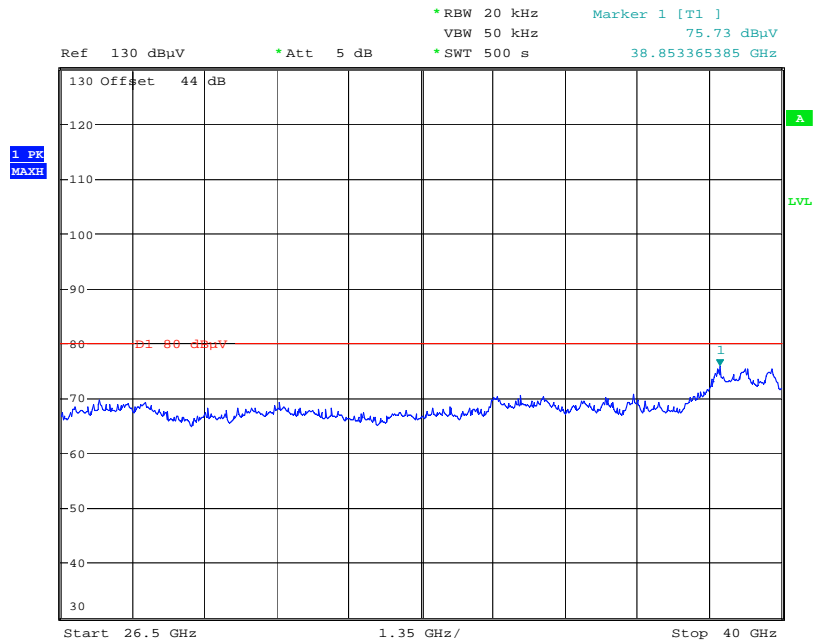

Date: 11.FEB.2009 11:40:41

26.5GHz – 40GHz