

# FCC TEST REPORT

for

Shenzhen Sungworld Electronics Co., LTD.

7 inch Tablet PC

Model Number: M755

Serial Number: Wopad Kids-7Q

FCC ID: WI3-M755

Prepared for : Shenzhen Sungworld Electronics Co., LTD.

Address : 4#, North District, Shangxue Industrial Park Bantian,  
Long Gang District, Shenzhen, China

Prepared by : Keyway Testing Technology Co., Ltd.

Address : Baishun Industrial Zone, Zhangmutou Town,  
Dongguan, Guangdong, China

Tel: 86-769-8718 2258

Fax: 86-769-8718 1058

Report No. : 16KWE063927F



Date of Test : Jun. 8~Jun. 22, 2016

Date of Report : Jun. 23, 2016

## TABLE OF CONTENTS

	Page
<b>Test Report Declaration</b>	
<b>1. TEST SUMMARY .....</b>	4
<b>2. GENERAL PRODUCT INFORMATION .....</b>	4
2.1. Product Function.....	4
2.2. Description of Device (EUT) .....	4
2.3. Independent Operation Modes .....	5
2.4. Test Supporting System .....	5
2.5. TEST SITES.....	5
2.6. List of Test and Measurement Instruments .....	6
<b>3. TEST SET-UP AND OPERATION MODES.....</b>	7
3.1. Principle of Configuration Selection.....	7
3.2. Block Diagram of Test Set-up.....	7
3.3. Test Operation Mode and Test Software.....	7
3.4. Special Accessories and Auxiliary Equipment.....	7
3.5. Countermeasures to Achieve EMC Compliance .....	7
<b>4. EMISSION TEST RESULTS.....</b>	8
4.1. Conducted Emission at the Mains Terminals Test.....	8
4.2. Radiated Emission Test.....	13
<b>5. BAND EDGE COMPLIANCE TEST.....</b>	22
5.1. Limits .....	22
5.2. Test setup .....	22
5.3. TEST Procedure .....	23
<b>6. BANDWIDTH TEST .....</b>	28
6.1. Limits .....	28
6.2. TEST PROCEDURE .....	28
<b>7. OUTPUT POWER TEST .....</b>	31
7.1. Limits .....	31
7.2. Test setup .....	31
7.3. Test result.....	31
<b>8. POWER SPECTRAL DENSITY TEST.....</b>	34
8.1. Limits .....	34
8.2. Test setup .....	34
8.3. Test result .....	34
<b>9. ANTENNA REQUIREMENTS.....</b>	41
9.1. Limits .....	41
9.2. Result.....	41
<b>10. PHOTOGRAPHS OF TEST SET-UP .....</b>	42
<b>11. PHOTOGRAPHS OF THE EUT .....</b>	44

# Keyway Testing Technology Co., Ltd.
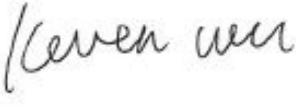
<b>Applicant:</b>	Shenzhen Sungworld Electronics Co., LTD. 4#, North District, Shangxue Industrial Park Bantian, Long Gang District, Shenzhen, China		
<b>Manufacturer:</b>	Shenzhen Sungworld Electronics Co., LTD. 4#, North District, Shangxue Industrial Park Bantian, Long Gang District, Shenzhen, China		
<b>E.U.T:</b>	7 inch Tablet PC		
<b>Model Number:</b>	M755		
<b>Serial Model:</b>	Wopad Kids-7Q		
<b>Trade Name:</b>	N/A	<b>Serial No.:</b>	-----
<b>Date of Receipt:</b>	Jun. 6, 2016	<b>Date of Test:</b>	Jun. 8~Jun. 22, 2016
<b>Test Specification:</b>	FCC Part 15, Subpart 15.247: Oct. 1, 2015 ANSI C63.10:2013 KDB558074 D01 DTS Meas Guidance v03r05		
<b>Test Result:</b>	The equipment under test was found to be compliance with the requirements of the standards applied.		
<b>Issue Date: Jun. 23, 2016</b>			
Tested by:	Reviewed by:	Approved by:	
		 Andy Gao / Supervisor	
Keven Wu / Engineer	Mike Xu / Supervisor	Andy Gao / Supervisor	
<b>Other Aspects:</b> None.			
Abbreviations: OK/P=passed      fail/F=failed      n.a/N=not applicable      E.U.T=equipment under tested			
This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Keyway Testing Technology Co., Ltd.			

# 1. TEST SUMMARY

Test Items	Test Requirement	Result
Conducted Emissions	15.207	PASS
Radiated Emissions	15.205(a)/15.209/15.247(d)	PASS
6dB&99% Bandwidth	15.247(a)(2)	PASS
Power density	15.247(e)	PASS
Maximum Peak Output Power	15.247(b)(3)	PASS
Emissions from out of band	15.247(d)	PASS
Antenna Requirement	15.203	PASS

# 2. GENERAL PRODUCT INFORMATION

## 2.1. Product Function

Refer to Technical Construction Form and User Manual.

## 2.2. Description of Device (EUT)

Product Name:	7 inch Tablet PC
Model No.:	M755
Serial Model:	Wopad Kids-7Q
Model Difference	All the models are the same circuit and RF module, except the model names.
Operation Frequency:	2412MHz~2462MHz (802.11b/802.11g/802.11n(H20)) 2422MHz~2452MHz (802.11n(H40))
Channel numbers:	11 for 802.11b/802.11g/802.11n(H20) ,7 for 802.11n(H40)
Modulation technology:	Direct Sequence Spread Spectrum (DSSS) for (IEEE 802.11b) Orthogonal Frequency Division Multiplexing(OFDM) for (IEEE 802.11g/802.11n)
Data speed (IEEE 802.11b):	1Mbps, 2Mbps, 5.5Mbps, 11Mbps
Data speed (IEEE 802.11g):	6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps
Data speed (IEEE 802.11n):	Up to 150Mbps
Antenna Type:	FPCB
Antenna gain:	1.0dB (declare by Applicant)
Power supply:	DC 3.7V or DC 5V from adapter
Adapter:	Model:HWT-15W-050200AU INPUT:100-240V~50/60Hz OUTPUT:5V,2A

## 2.3. Independent Operation Modes

The basic operation modes are:

2.3.1. EUT work WiFi TX mode, and frequency as below:

		Frequency
Mode 1	802.11b	2412MHz
		2437MHz
		2462MHz
		2412MHz
Mode 2	802.11g	2437MHz
		2462MHz
		2412MHz
Mode 3	802.11n(HT20)	2437MHz
		2462MHz
		2412MHz
Mode 4	802.11 n(HT40)	2437MHz
		2452MHz
		2422MHz
Mode 5		LINK Mode

Remark: According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup”  
802.11b mode:1Mbps ,802.11g mode:6Mbps , 802.11n HT20 mode:MCS0, 802.11n HT20 mode:MCS0

## 2.4. Test Supporting System

None.

## 2.5. TEST SITES

### 2.5.1. Test Facilities

- Lab Qualifications : Certificated by Industry Canada  
 Registration No.: 9868A  
 Date of registration: December 8, 2011
- Certificated by FCC, USA  
 Registration No.: 370994  
 Date of registration: February 21, 2012
- Certificated by CNAS China  
 Registration No.: CNAS L5783  
 Date of registration: August 8, 2012

## 2.6. List of Test and Measurement Instruments

### 2.6.1. For conducted emission at the mains terminals test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,16	Apr. 09,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101315	Apr. 09,16	Apr. 09,17
RF Cable	FUJIKURA	3D-2W	944 Cable	Apr. 09,16	Apr. 09,17

### 2.6.2. For radiated emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESCI	101156	Apr. 09,16	Apr. 09,17
Bilog Antenna	ETS-LINDGREEN	3142D	135452	Apr. 09,16	Apr. 09,17
Spectrum Analyzer	Agilent	E4411B	MY4511304	Apr. 09,16	Apr. 09,17
3m Semi-anechoic Chamber	ETS-LINDGREEN	966	KW01	Apr. 09,16	Apr. 09,17
Signal Amplifier	SONOMA	310	187016	Apr. 09,16	Apr. 09,17
Signal Amplifier	Agilent	8449B	3008A00251	Apr. 09,16	Apr. 09,17
RF Cable	IMRO	IMRO-400	966 Cable 1#	N/A	N/A
MULTI-DEVICE Controller	ETS-LINDGREEN	2090	126913	N/A	N/A
Horn Antenna	SCHWARZBECK	BBHA9170	9170-068	Apr. 09,16	Apr. 09,17
Spectrum Analyzer	Agilent	E4408B	MY44211125	Apr. 09,16	Apr. 09,17
High Pass filter	Micro	HPM50111	324216	Apr. 09,16	Apr. 09,17
Constant temperature and humidity box	GF	GTH-800-40-1P	MAA9906-005	Apr. 09,16	Apr. 09,17
Attenuation	MCE	24-10-34	BN9258	Apr. 02,16	Apr. 02,17
Loop Antenna	ARA	PLA-1030/B	1029	Apr. 02,16	Apr. 02,17
Power Meter	Anritsu	ML2495A	1204003	Apr. 24,16	Apr. 24,17
Power Sensor	Anritsu	MA2411B	1126150	Apr. 24,16	Apr. 24,17

### 3. TEST SET-UP AND OPERATION MODES

#### 3.1. Principle of Configuration Selection

**Emission:** The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the Operating Instructions.

#### 3.2. Block Diagram of Test Set-up

System Diagram of Connections between EUT and Simulators



(EUT: 7 inch Tablet PC)

#### 3.3. Test Operation Mode and Test Software

None.

#### 3.4. Special Accessories and Auxiliary Equipment

Adapter:	Model:HWT-15W-050200AU INPUT:100-240V~50/60Hz OUTPUT:5V,2A
----------	--

#### 3.5. Countermeasures to Achieve EMC Compliance

None.

## 4. EMISSION TEST RESULTS

### 4.1. Conducted Emission at the Mains Terminals Test

#### 4.1.1. Limit 15.209 limits

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

#### 4.1.2. Test Setup


The EUT was put on a wooden table which was 0.8 m high above the ground and connected to the AC mains through the Artificial Mains Network (AMN). Where the mains cable supplied by the manufacture was longer than 0.8 m, the excess was folded back and forth parallel to the cable at the centre so as to form a bundle no longer than 0.4 m.

The EUT was kept 0.4 m from any other earthed conducting surface. Both sides of AC line were checked to find out the maximum conducted emission levels according to the test procedure during the conducted emission test.

The frequency range from 150 kHz to 30 MHz was investigated.

The bandwidth of the test receiver was set at 9 kHz.

Pretest for all mode, The test data of the worst case condition(s) was reported on the following page.

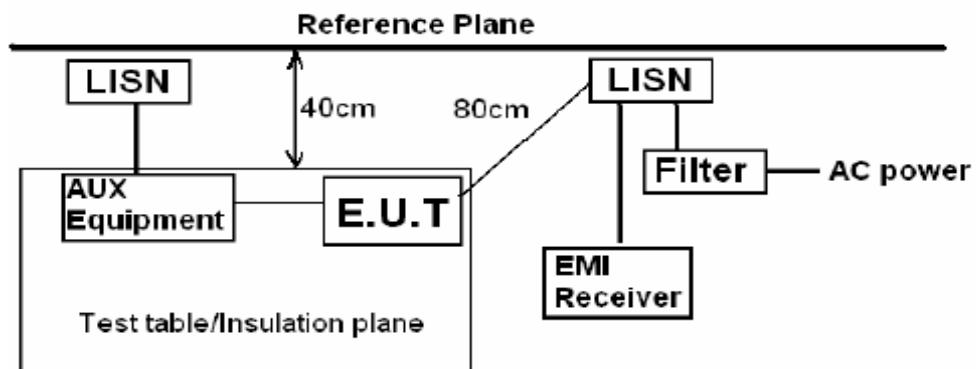


Remark:

E.U.T: Equipment Under Test

LISN: Line Impedance Stabilization Network


Test table height=0.8m

EUT :	7 inch Tablet PC	Model Name :	M755
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

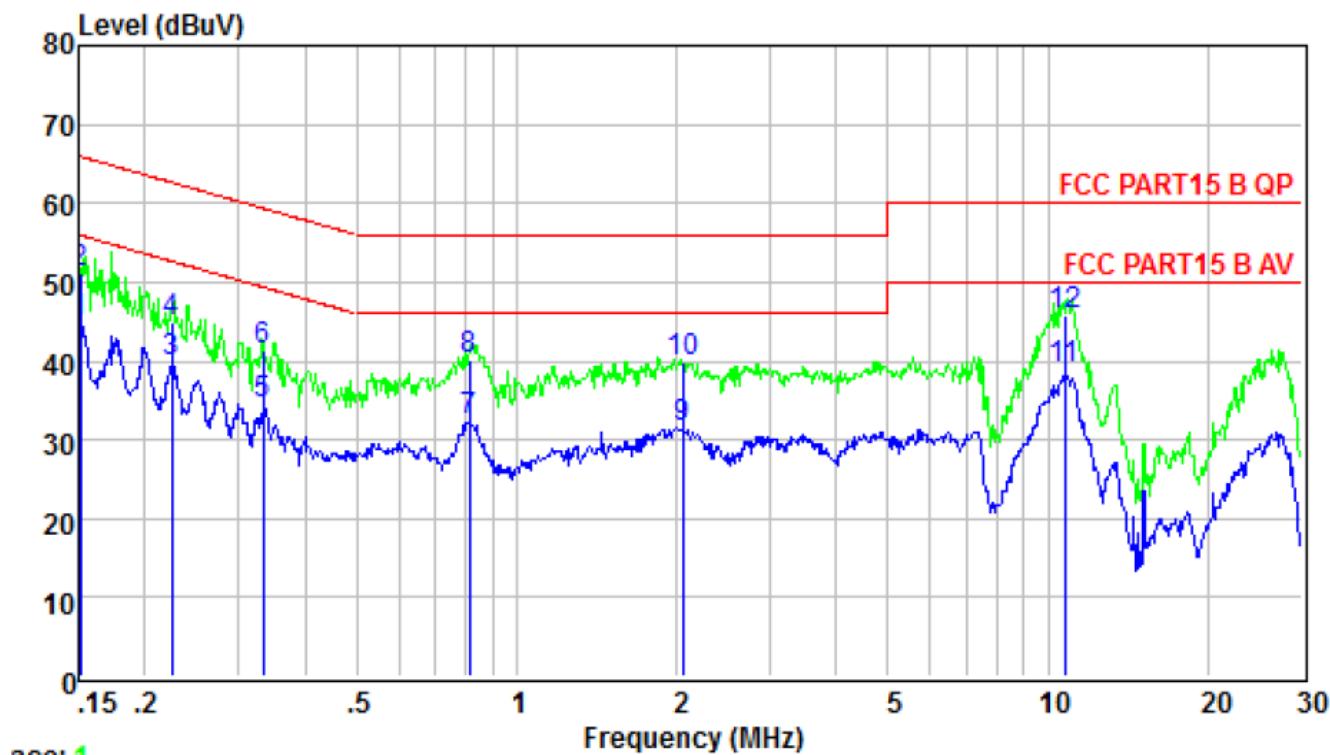


	Freq	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dBuV	dB	
1	0.151	44.79	55.96	-11.17	Average
2	0.151	51.17	65.96	-14.79	QP
3	0.224	39.73	52.66	-12.93	Average
4	0.224	45.03	62.66	-17.63	QP
5	0.334	34.48	49.35	-14.87	Average
6	0.334	41.45	59.35	-17.90	QP
7	0.813	32.56	46.00	-13.44	Average
8	0.813	40.20	56.00	-15.80	QP
9	2.055	31.61	46.00	-14.39	Average
10	2.055	39.86	56.00	-16.14	QP
11	10.733	38.89	50.00	-11.11	Average
12	10.733	45.83	60.00	-14.17	QP

EUT :	7 inch Tablet PC	Model Name :	M755
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 120V/60Hz	Test Mode :	Mode 5

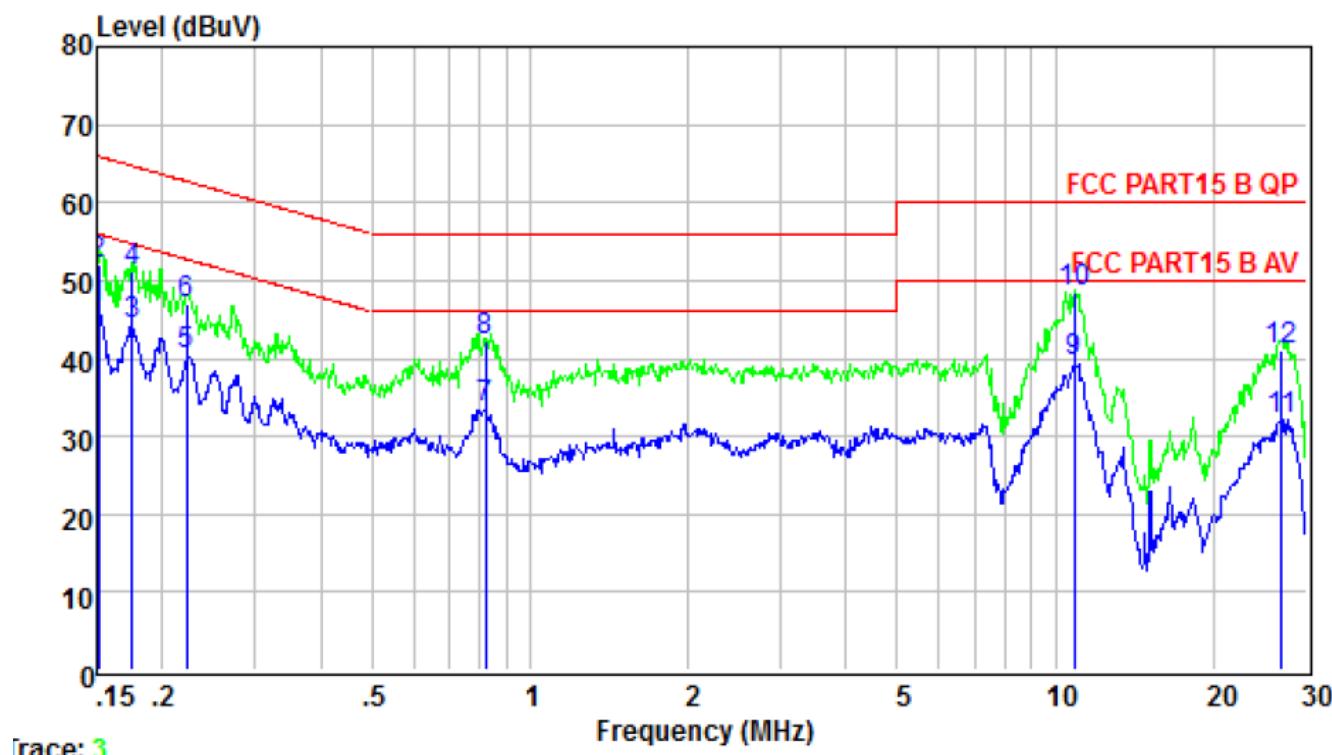


Freq	Level	Limit	Over	Remark
		Line	Limit	
MHz	dBuV	dBuV	dB	
1	0.151	46.34	55.96	-9.62 Average
2	0.151	52.12	65.96	-13.84 QP
3	0.175	44.26	54.72	-10.46 Average
4	0.175	51.09	64.72	-13.63 QP
5	0.222	40.43	62.74	-22.31 Peak
6	0.222	47.03	62.74	-15.71 QP
7	0.822	33.73	46.00	-12.27 Average
8	0.822	42.10	56.00	-13.90 QP
9	10.847	39.55	50.00	-10.45 Average
10	10.847	48.34	60.00	-11.66 QP
11	26.841	32.01	50.00	-17.99 Average
12	26.841	41.09	60.00	-18.91 QP

EUT :	7 inch Tablet PC	Model Name :	M755
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 5

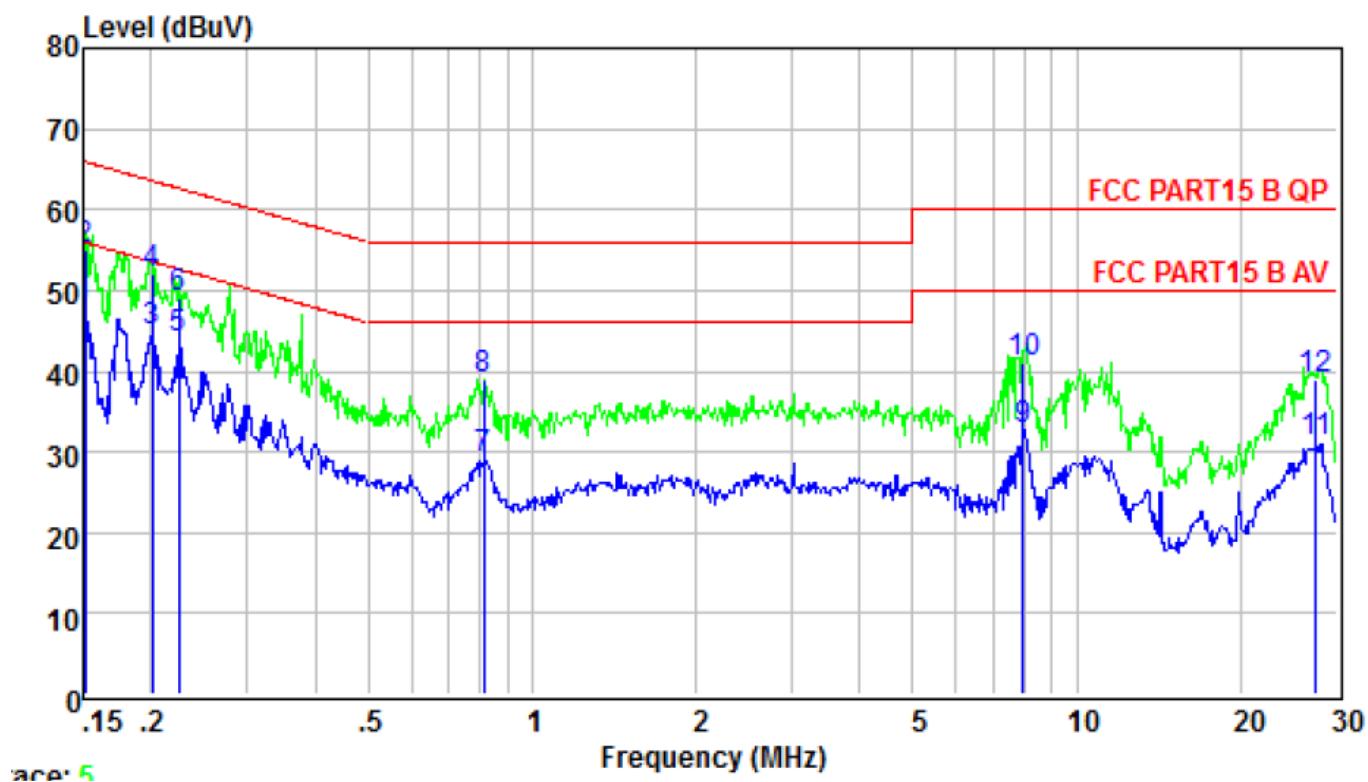

Freq	Level	Limit		Over	Remark
		Line	dBuV		
MHz	dBuV	dBuV	dB		
1	0.151	48.06	55.96	-7.90	Average
2	0.151	55.00	65.96	-10.96	QP
3	0.201	44.86	53.58	-8.72	Average
4	0.201	51.98	63.58	-11.60	QP
5	0.224	43.93	52.66	-8.73	Average
6	0.224	49.04	62.66	-13.62	QP
7	0.813	29.27	46.00	-16.73	Average
8	0.813	38.93	56.00	-17.07	QP
9	7.977	32.58	50.00	-17.42	Average
10	7.977	40.94	60.00	-19.06	QP
11	27.416	31.30	50.00	-18.70	Average
12	27.416	38.92	60.00	-21.08	QP

EUT :	7 inch Tablet PC	Model Name :	M755
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5.0V form Adapter AC 240V/60Hz	Test Mode :	Mode 5

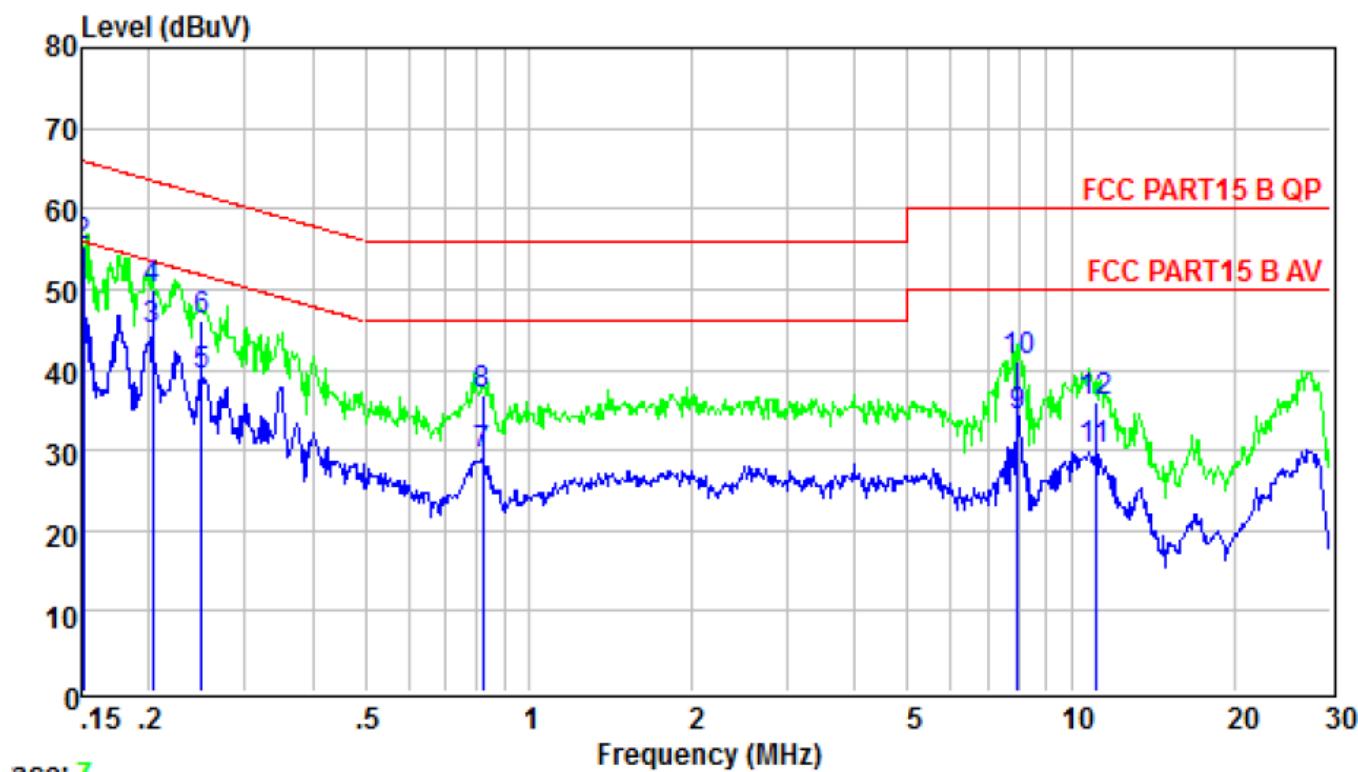

Freq	Level	Limit	Over	Remark
		Line	Limit	
MHz	dBuV	dBuV	dB	
1	0.151	51.50	55.96	-4.46 Average
2	0.151	55.30	65.96	-10.66 QP
3	0.203	44.97	53.49	-8.52 Average
4	0.203	50.03	63.49	-13.46 QP
5	0.249	39.16	51.78	-12.62 Average
6	0.249	46.09	61.78	-15.69 QP
7	0.822	29.31	46.00	-16.69 Average
8	0.822	37.01	56.00	-18.99 QP
9	7.977	34.10	50.00	-15.90 Average
10	7.977	41.09	60.00	-18.91 QP
11	11.080	30.01	50.00	-19.99 Average
12	11.080	36.02	60.00	-23.98 QP

## 4.2. Radiated Emission Test

### 4.2.1. Limit 15.209 limits

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		µV/m	dB(µV)/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 dB(µV)/m (Peak) 54.0 dB(µV)/m (Average)	

### 4.2.2. Restricted bands of operation

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

#### 4.2.3. Test setup

The EUT was placed on a turn table which was 0.8 m(above 1GHz, the high was 1.5m) above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was set 3 m away from the receiving antenna which was mounted on an antenna tower. The measuring antenna moved up and down to find out the maximum emission level. It moved from 1 m to 4 m for both horizontal and vertical polarizations.

The EUT was tested in the Chamber Site. It was pre-scanned with a Peak detector from the spectrum, and all the final readings from the test receiver were measured with the Quasi-Peak detector.


The bandwidth of the EMI test receiver is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 3MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz, Both PK and AV measure, PK detector is used.


The frequency range from 30MHz to 10<sup>th</sup> harmonic (25GHz) are checked. and no any emissions were found from 18GHz to 25 GHz, So the radiated emissions from 18GHz to 25GHz were not record.

- Notes:
1. Emission Level = Antenna Factor + Cable Loss + Meter Reading-Preamp Factor.
  2. Measurement Uncertainty:  $\pm 3.2$  dB at a level of confidence of 95%.
  3. For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.
  4. For emissions below 1GHz, pretest for all mode, The test data of the worst case condition(s) was reported on the following pages.
  5. For Both PK and AV value above 1GHz, PK detector is used.
  6. EUT Pre-scan X/Y/Z orientation, only worst case is presented in the report (Z orientation).


## Radiated Emission Test-Up Frequency Below 30MHz

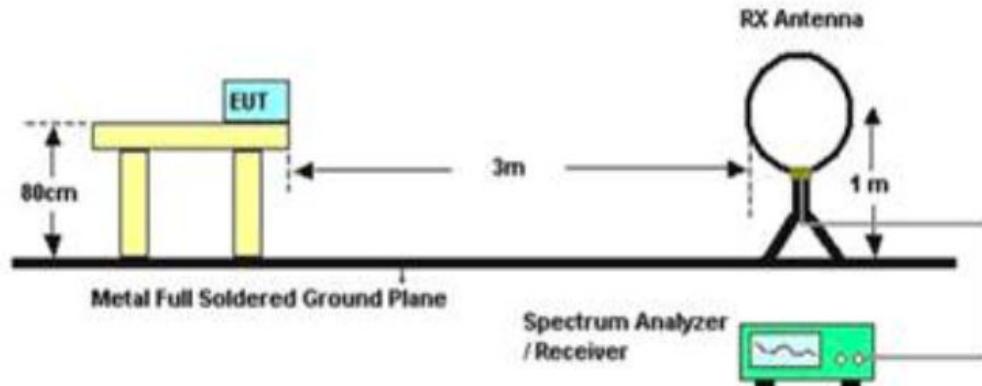

### Below 1GHz

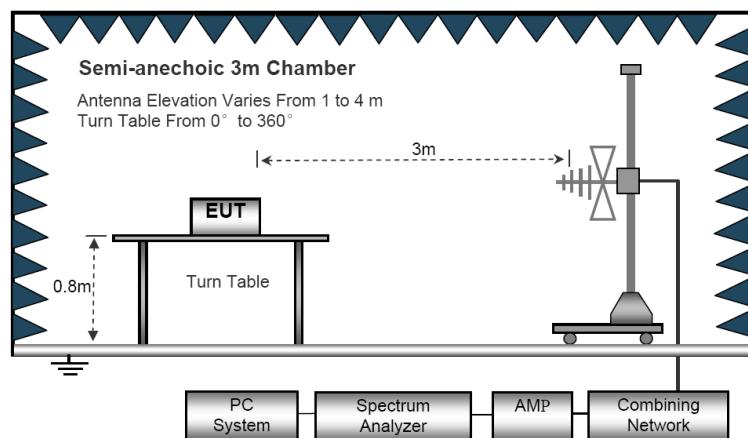

### Above 1GHz

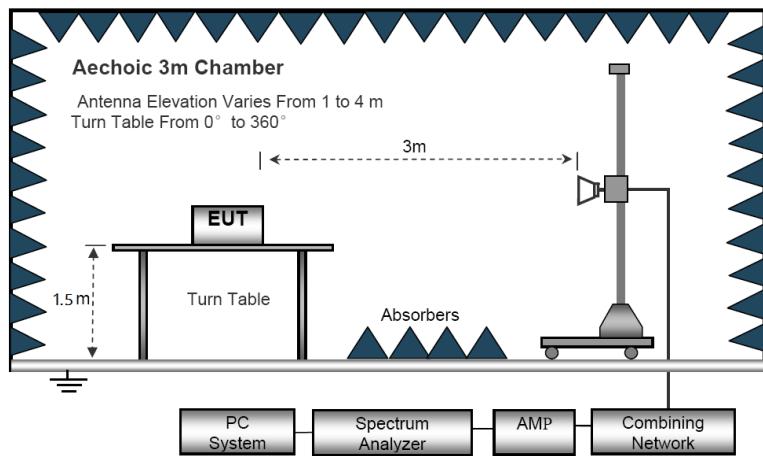

EUT :	7 inch Tablet PC	Model Name :	M755
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 3.7V		

**Below 30MHz**

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	P
--	--	--	--	P

**Note:**


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


Below 1GHz

EUT :	7 inch Tablet PC	Model Name :	M755
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010hPa	Test Mode :	TX
Test Voltage :	DC 3.7V		

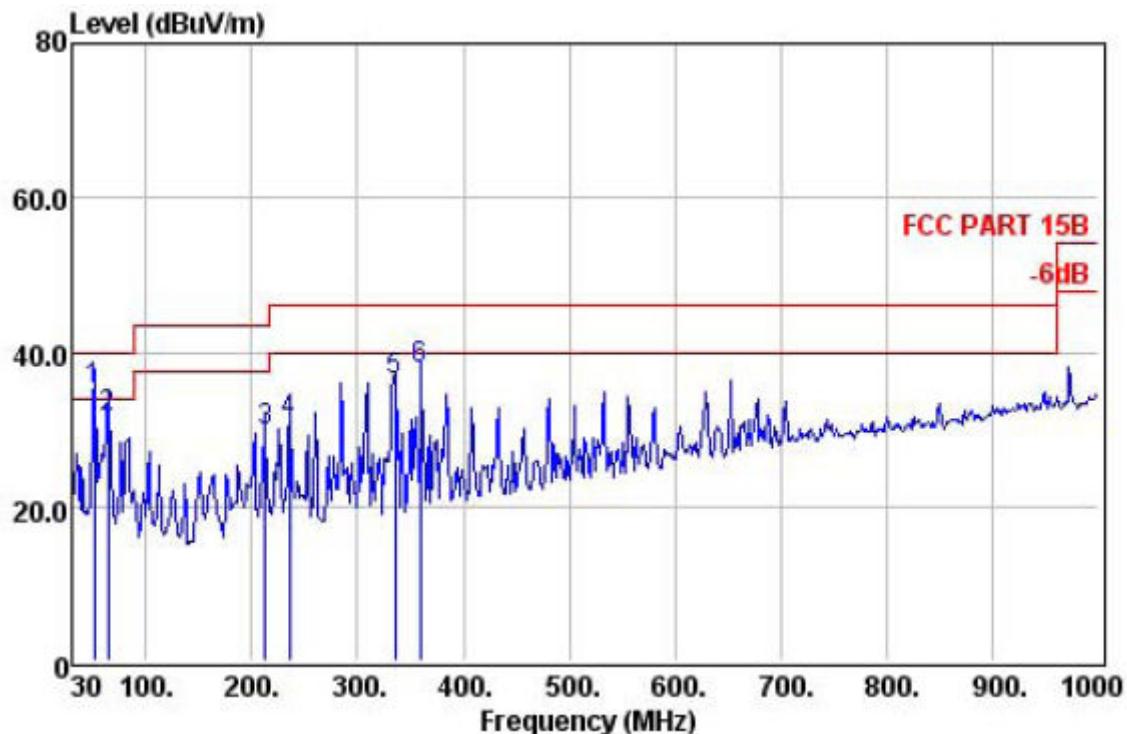**Vertical**

Freq	Preamp Factor	Read	Cable	Limit Line	Over Limit	Remark
		Level	Loss			
MHz	dB	dBuV	dB	dBuV/m	dBuV/m	dB
1	51.34	31.38	57.00	0.75	34.97	40.00 -5.03 QP
2	63.95	31.32	54.84	0.75	31.65	40.00 -8.35 QP
3	212.36	31.06	47.70	1.53	29.76	43.50 -13.74 QP
4	235.64	30.94	47.85	1.61	31.02	46.00 -14.98 QP
5	335.55	30.74	49.86	2.10	36.14	46.00 -9.86 QP
6	359.80	30.62	50.18	2.18	37.85	46.00 -8.15 QP

## Horizontal

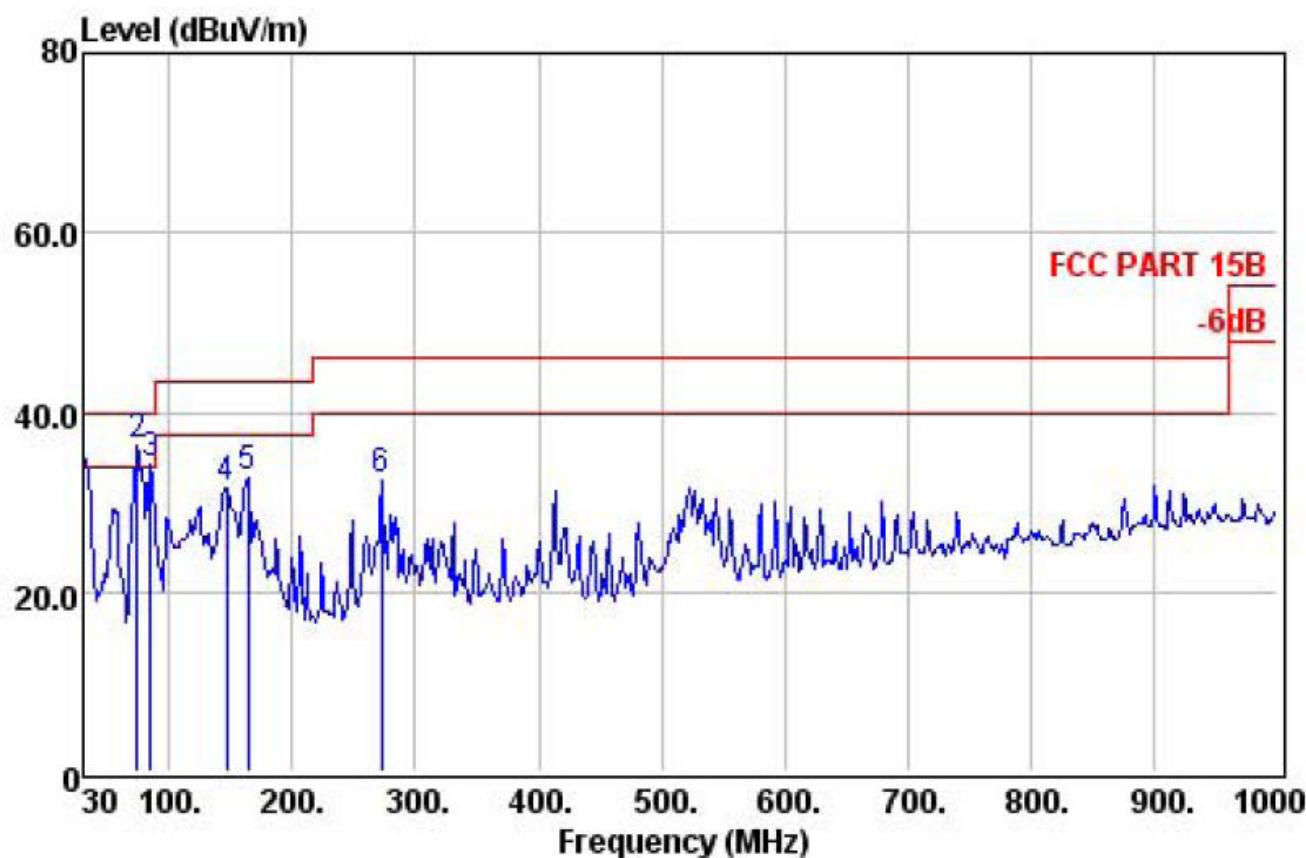

Preamp Freq	Factor	Read	Cable	Limit Line	Over Limit	Remark
		Level	Loss			
MHz		dBuV	dB	dBuV/m	dBuV/m	
1 !	30.00	31.41	48.15	0.56	36.10	40.00 -3.90 QP
2 !	73.65	31.33	59.09	0.85	36.29	40.00 -3.71 QP
3 !	85.29	31.35	56.01	0.94	34.18	40.00 -5.82 QP
4	146.40	31.23	52.72	1.22	31.49	43.50 -12.01 QP
5	163.86	31.21	53.11	1.30	32.75	43.50 -10.75 QP
6	272.50	30.95	48.51	1.78	32.33	46.00 -13.67 QP

## NOTE:

Absolute Level= ReadingLevel+antenna Factor+cable loss-preamp factor,  
 Over Limit= Absolute Level – Limit

**Above 1GHz**

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (2412 MHz)-Above 1G							
Vertical	4824.012	46.32	10.44	56.76	74	-17.24	pk
Vertical	4824.012	38.67	10.44	49.11	54	-4.89	AV
Vertical	7236.000	38.65	12.39	51.04	74	-22.96	Pk
Horizontal	4824.012	47.23	10.44	57.67	74	-16.33	Pk
Horizontal	4824.012	36.53	10.44	46.97	54	-7.03	AVk
Horizontal	7236.000	33.13	12.39	45.52	74	-28.48	Pk
Mid Channel (2437 MHz)-Above 1G							
Vertical	4874.043	46.15	10.4	56.55	74	-17.45	pk
Vertical	4874.043	36.23	10.4	46.63	54	-7.37	AV
Vertical	7311.147	35.45	12.75	48.2	74	-25.8	Pk
Horizontal	4874.043	46.34	10.4	56.74	74	-17.26	Pk
Horizontal	4874.043	37.16	10.4	47.56	54	-6.44	AVk
Horizontal	7311.147	37.45	12.75	50.2	74	-23.8	Pk
High Channel (2462 MHz)- Above 1G							
Vertical	4924.124	48.45	10.39	58.84	74	-15.16	pk
Vertical	4924.124	36.93	10.39	47.32	54	-6.68	AV
Vertical	7386.076	37.34	12.68	50.02	74	-23.98	pk
Horizontal	4924.124	46.86	10.39	57.25	74	-16.75	pk
Horizontal	4924.124	33.65	10.39	44.04	54	-9.96	AV
Horizontal	7386.033	35.74	12.68	48.42	74	-25.58	pk

Note:"802.11b" mode is the worst mode. When PK value is lower than the Average value limit, average didn't record. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has not to be reported.

**Spurious Emission in Band Edge:**

	Frequency (MHz)	Antenna polarization (H/V)	Emission	Band edge Limit		Result
			(dBuV/m)	PK	PK	
802.11b	2390	H	50.23	74.00	54.00	Pass
	2390	V	49.12	74.00	54.00	Pass
	2483.5	H	50.34	74.00	54.00	Pass
	2483.5	V	49.22	74.00	54.00	Pass
802.11g	2390	H	50.42	74.00	54.00	Pass
	2390	V	49.12	74.00	54.00	Pass
	2483.5	H	50.45	74.00	54.00	Pass
	2483.5	V	49.35	74.00	54.00	Pass
802.11n(HT20)	2390	H	50.12	74.00	54.00	Pass
	2390	V	49.45	74.00	54.00	Pass
	2483.5	H	50.23	74.00	54.00	Pass
	2483.5	V	49.14	74.00	54.00	Pass
802.11n(HT40)	2390	H	51.54	74.00	54.00	Pass
	2390	V	50.23	74.00	54.00	Pass
	2483.5	H	51.54	74.00	54.00	Pass
	2483.5	V	50.32	74.00	54.00	Pass

If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.

**Spurious Emission in Restricted Band(1-25G):**

All the modulation modes have been tested and all other emissions more than 20dB below the limit, the worst result was report as below:


Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
802.11b							
Vertical	3266.000	37.12	7.34	44.46	74	-29.54	Pk
Horizontal	3266.000	35.09	7.34	42.43	74	-31.57	PK
Vertical	3334.000	36.12	7.56	43.68	74	-30.32	Pk
Horizontal	3334.000	35.26	7.56	42.82	74	-31.18	PK
802.11g							
Vertical	3354.000	36.43	7.34	43.77	74	-30.23	Pk
Horizontal	3354.000	36.94	7.34	44.28	74	-29.72	PK
Vertical	4180.000	38.65	7.56	46.21	74	-27.79	Pk
Horizontal	4180.000	35.13	7.56	42.69	74	-31.31	PK
802.11n(HT20)							
Vertical	3351.000	38.29	7.34	45.63	74	-28.37	Pk
Horizontal	3351.000	36.25	7.34	43.59	74	-30.41	PK
Vertical	4178.000	37.23	7.56	44.79	74	-29.21	Pk
Horizontal	4178.000	38.12	7.56	45.68	74	-28.32	PK
802.11n(HT40)							
Vertical	3351.000	37.79	7.34	45.13	74	-28.87	Pk
Horizontal	3351.000	36.81	7.34	44.15	74	-29.85	PK
Vertical	4170.000	38.22	7.56	45.78	74	-28.22	Pk
Horizontal	4170.000	38.12	7.56	45.68	74	-28.32	PK

## 5. BAND EDGE COMPLIANCE TEST

### 5.1. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see §15.205(c)).


### 5.2. Test setup

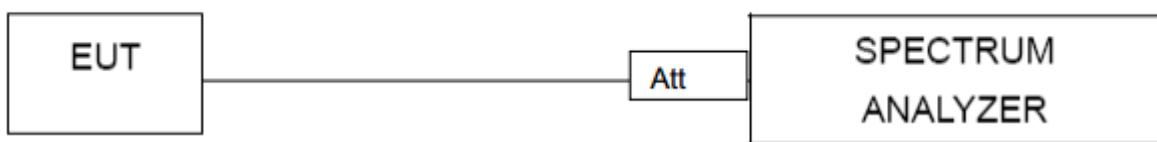


### 5.3. TEST Procedure

- a) Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b) Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
- c) Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
- d) Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- e) Repeat above procedures until all measured frequencies were complete.


## 802.11b: Band Edge, Right Side

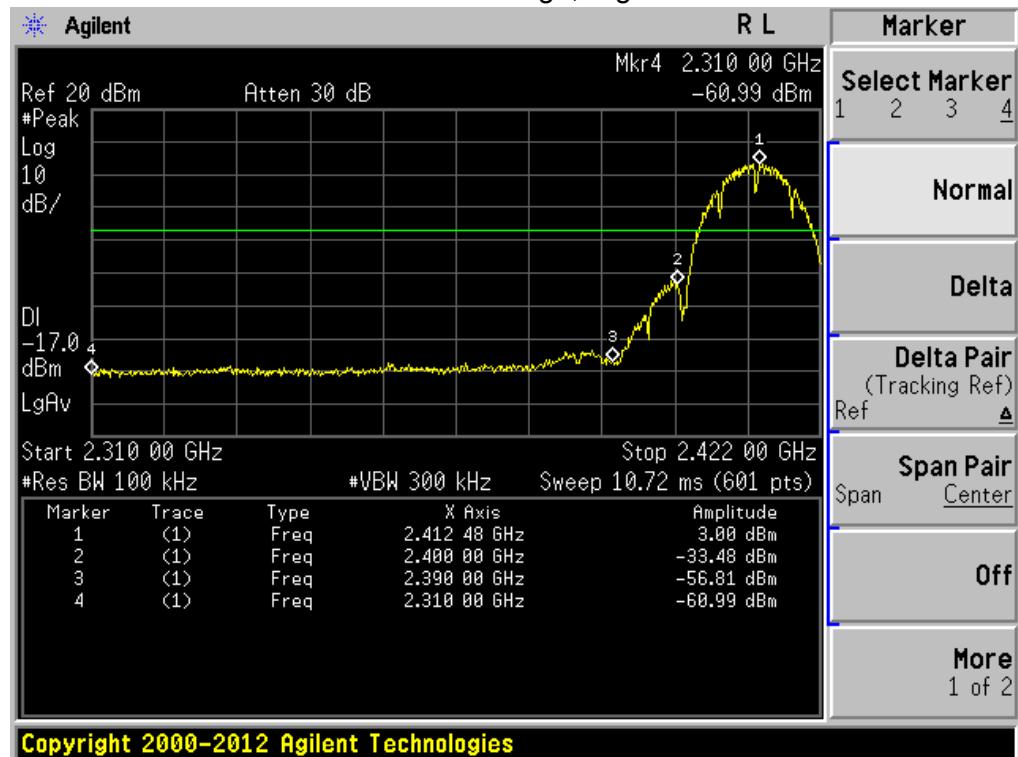


## 802.11b: Band Edge, Left Side

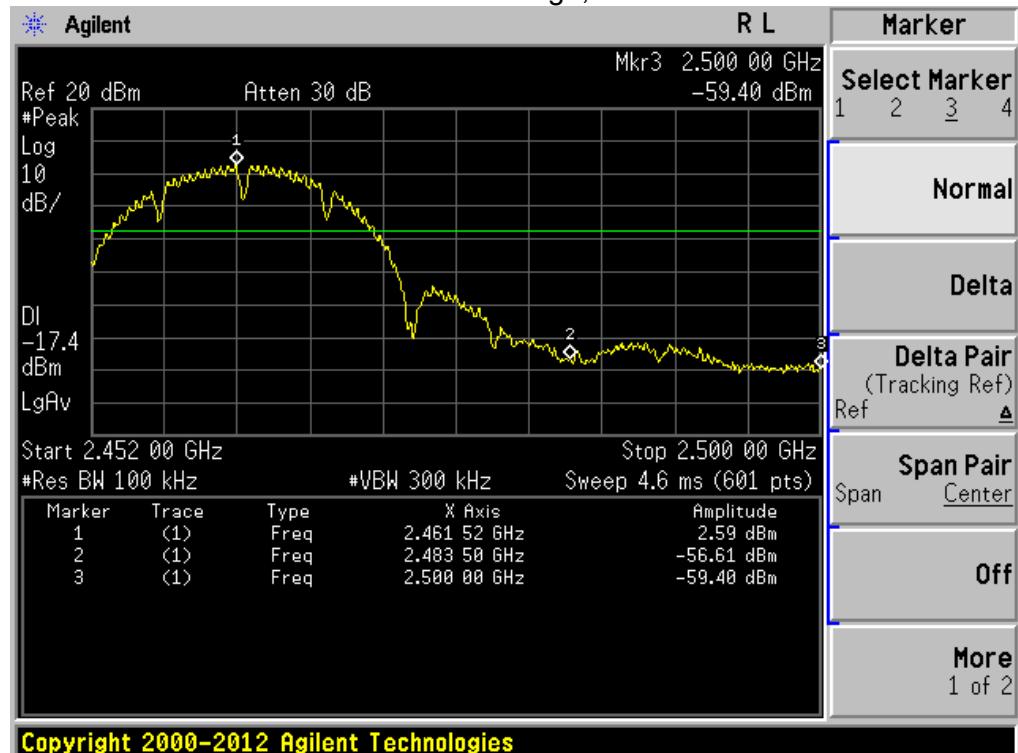


## 802.11g: Band Edge, Right Side

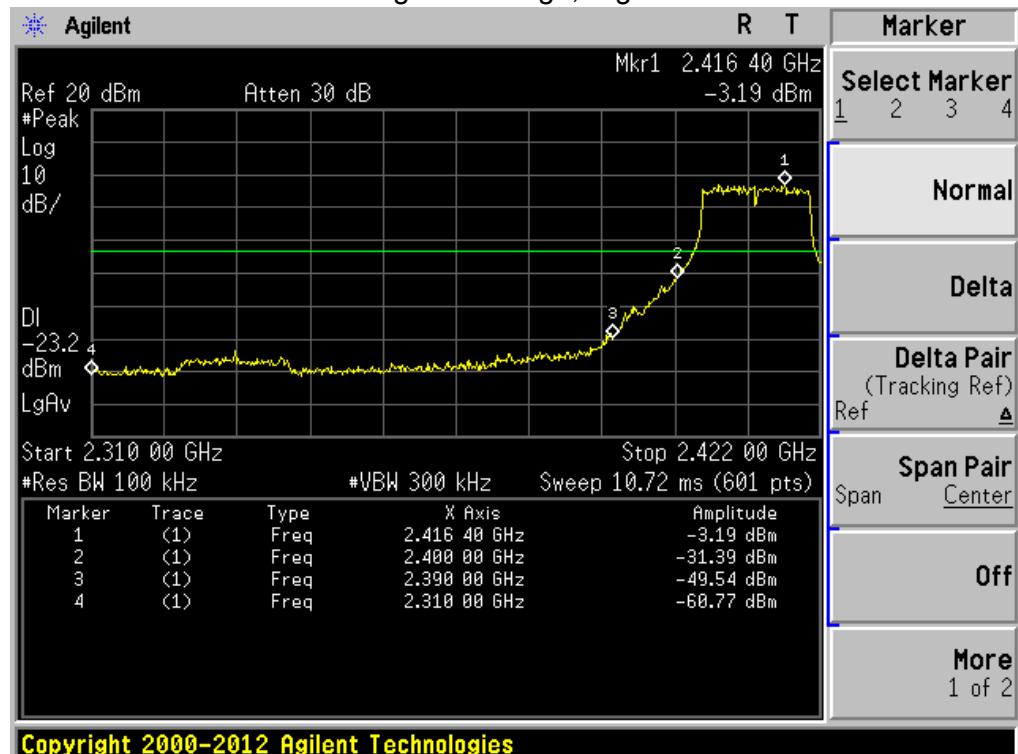


## 802.11g: Band Edge, Left Side

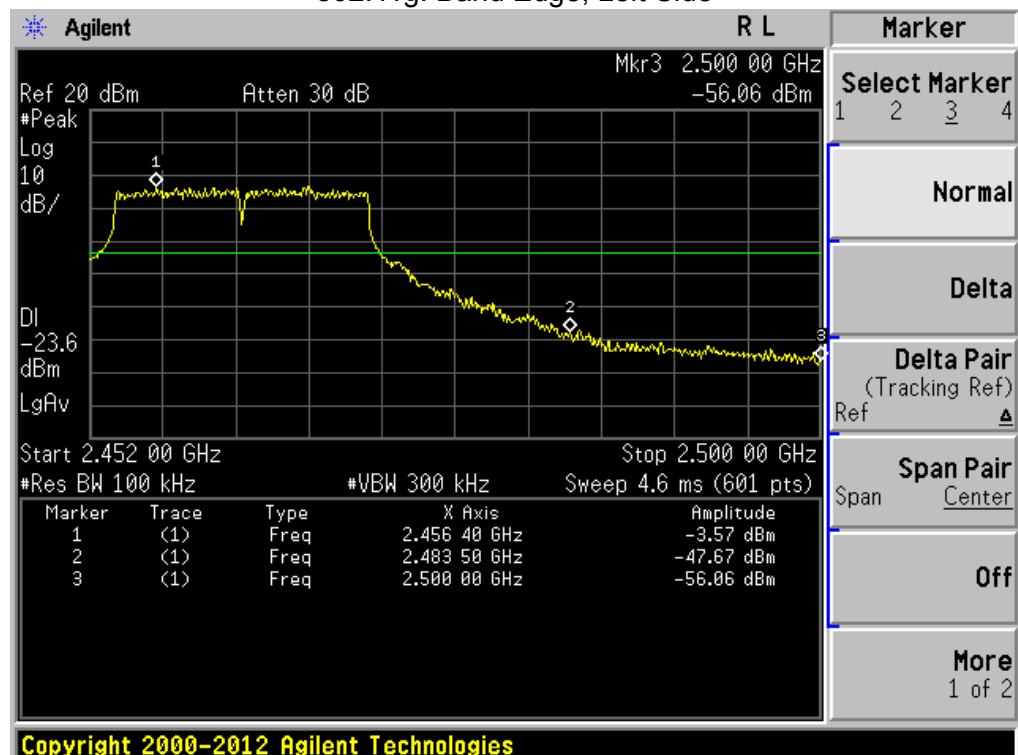


## 802.11n-HT20: Band Edge, Right Side

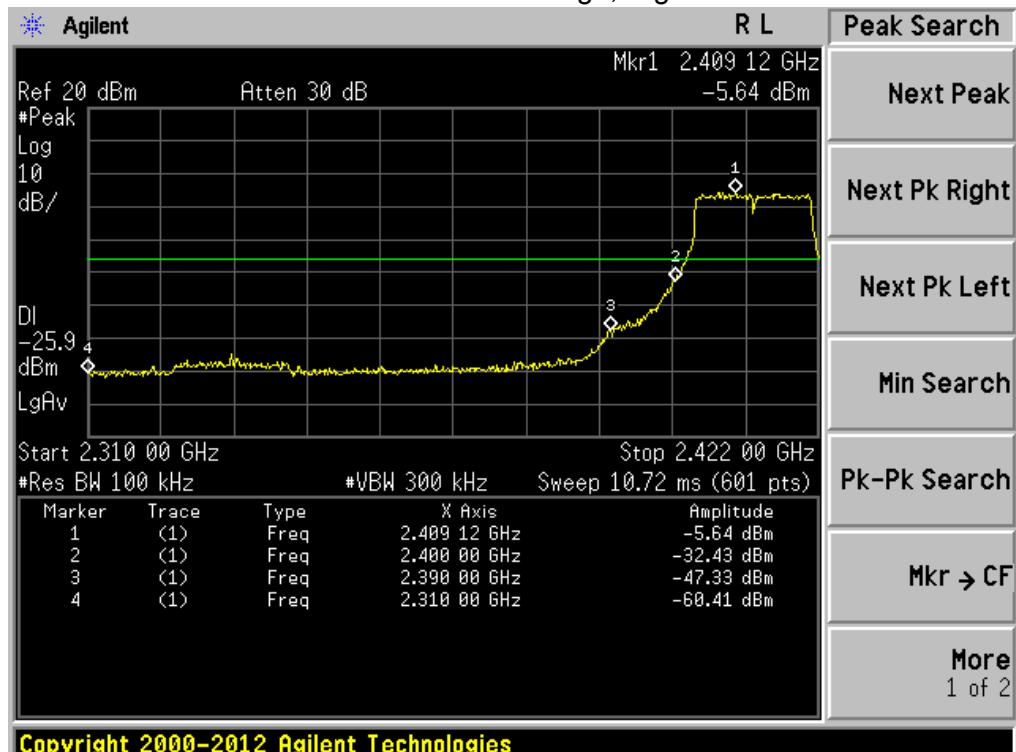


## 802.11n-HT20: Band Edge, Left Side

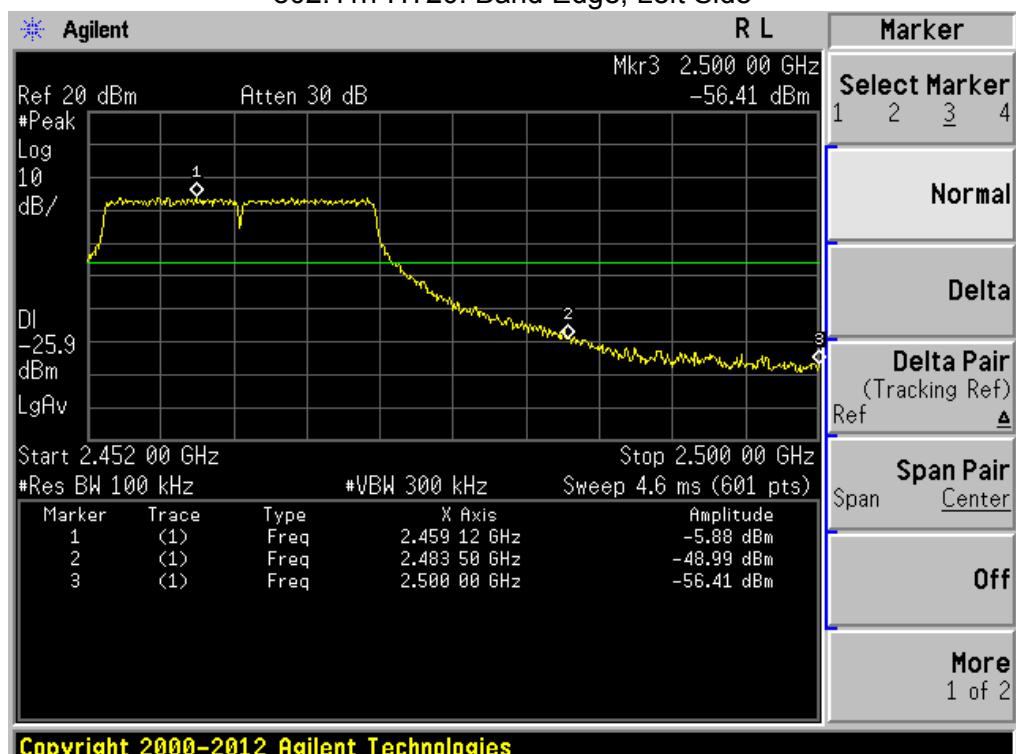

## 802.11n-HT40: Band Edge, Right Side

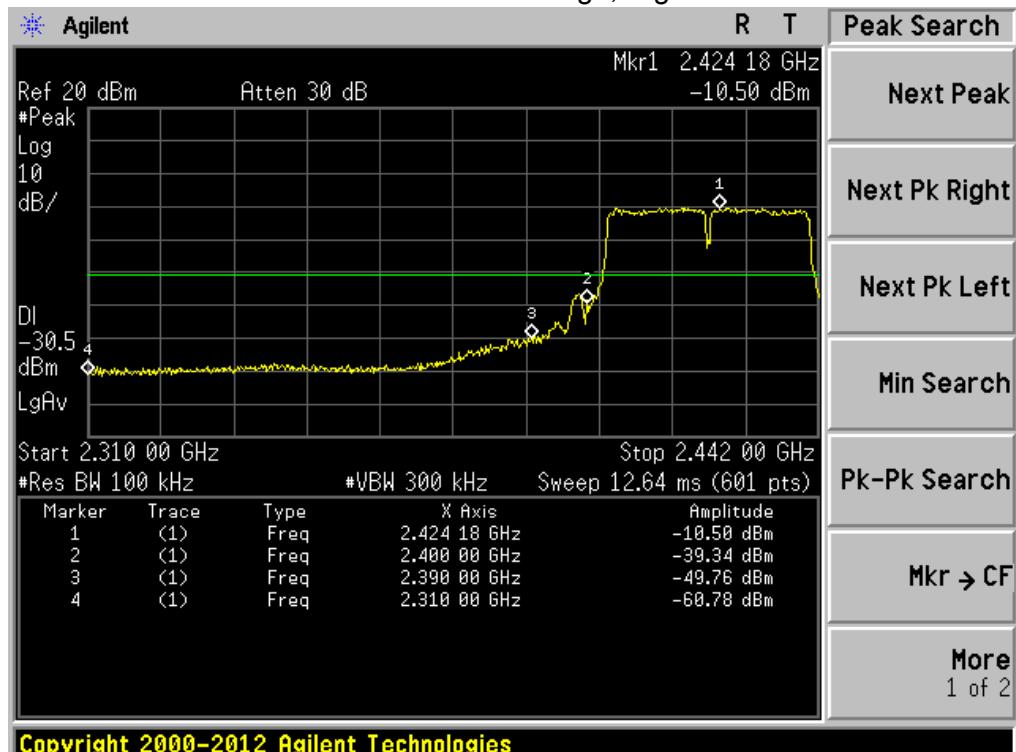

## 802.11n-HT40: Band Edge, Left Side

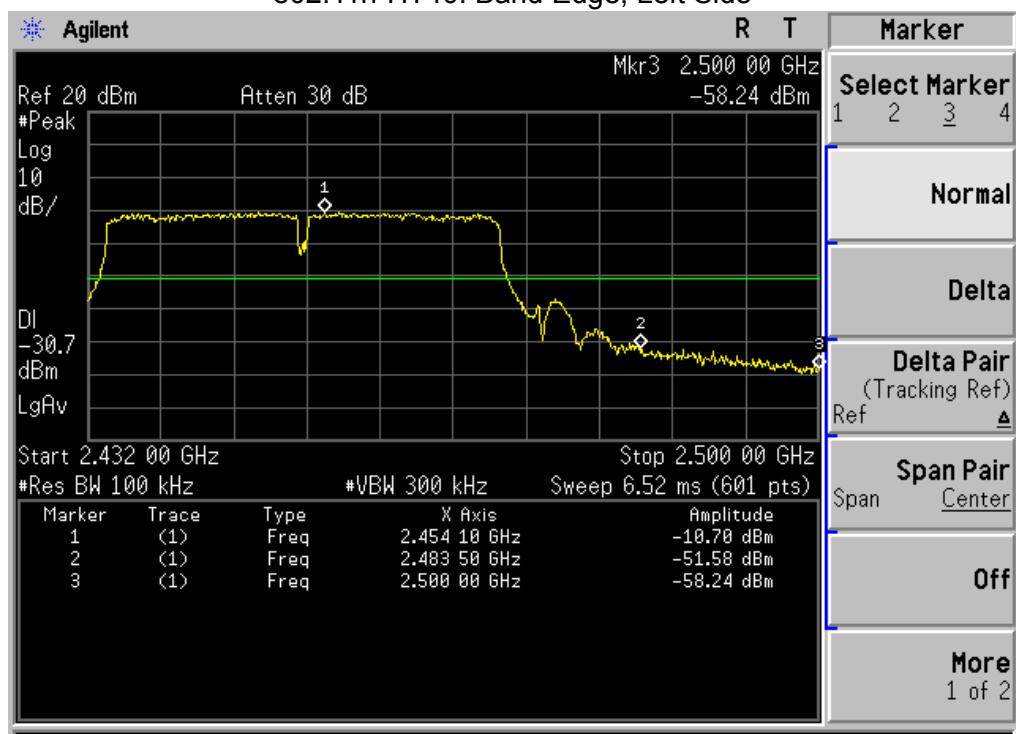

## 6. BANDWIDTH TEST

### 6.1. Limits

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

### 6.2. TEST PROCEDURE

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies Associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

Test data:

	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Result
802.11b	2412	10.076	>0.5	Pass
	2437	9.638	>0.5	Pass
	2462	10.057	>0.5	Pass
802.11g	2412	15.156	>0.5	Pass
	2437	15.153	>0.5	Pass
	2462	15.184	>0.5	Pass
802.11n (HT20)	2412	15.065	>0.5	Pass
	2437	15.114	>0.5	Pass
	2462	15.140	>0.5	Pass
802.11n (HT40)	2422	35.193	>0.5	Pass
	2437	35.192	>0.5	Pass
	2452	35.175	>0.5	Pass


Test plot as follows:

6dB bandwith


802.11b 2412MHz




802.11g 2412MHz

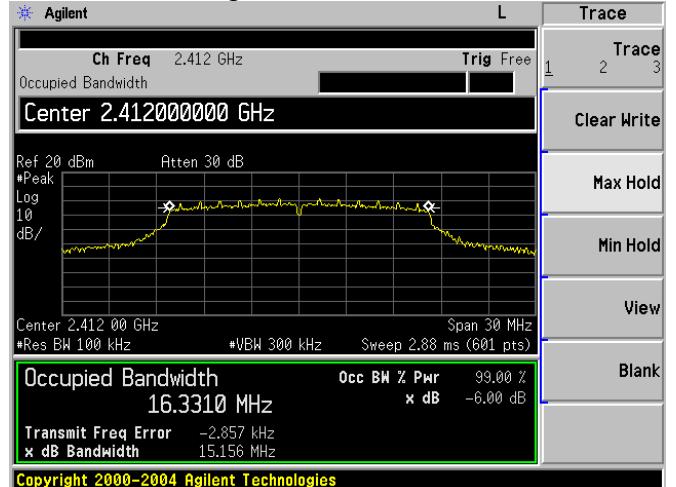


802.11b 2437MHz

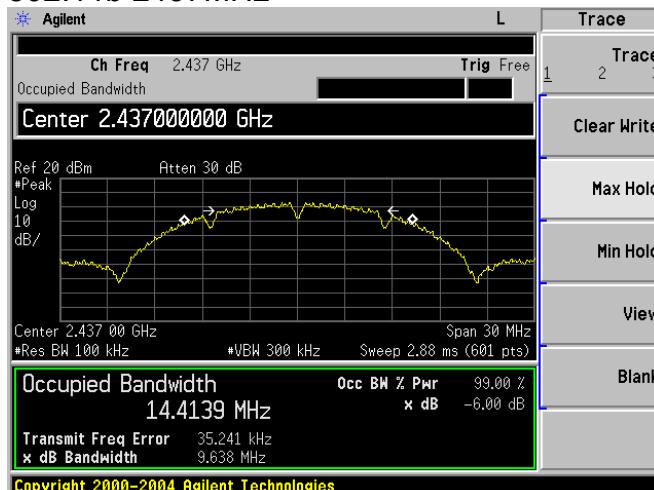


802.11g 2437MHz

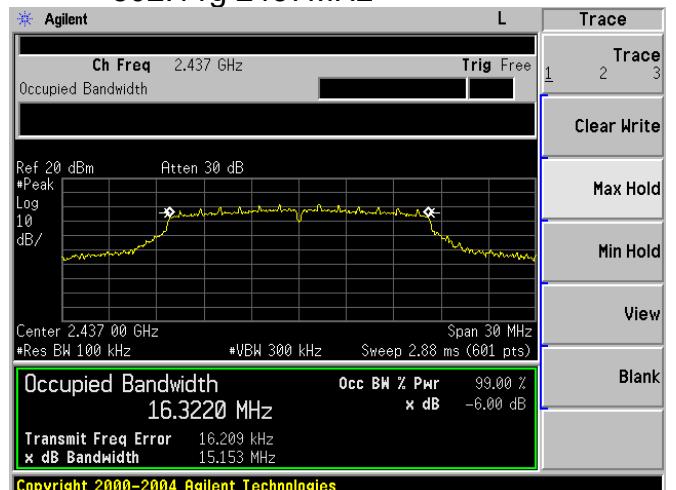


802.11b 2462MHz

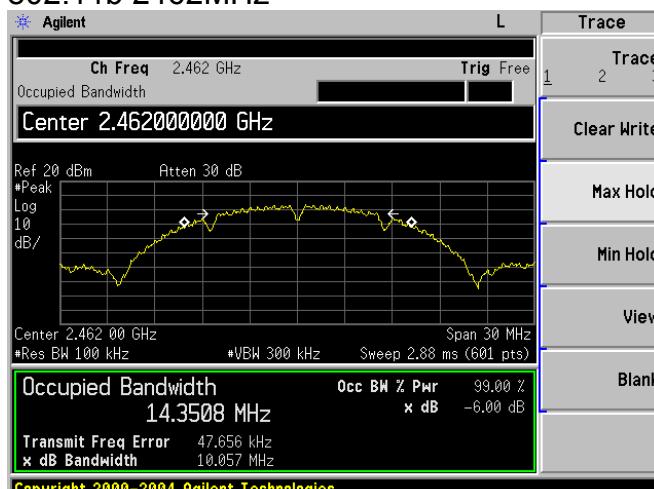


802.11g 2462MHz

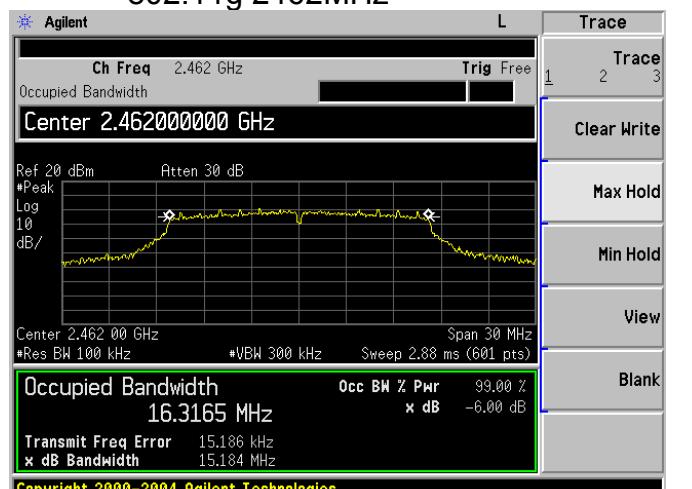


## 802.11n (HT20) 2412MHz

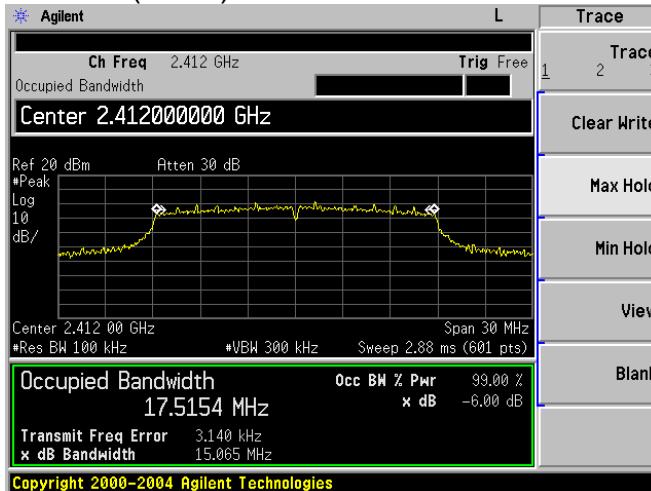


## 802.11n (HT40) 2422MHz

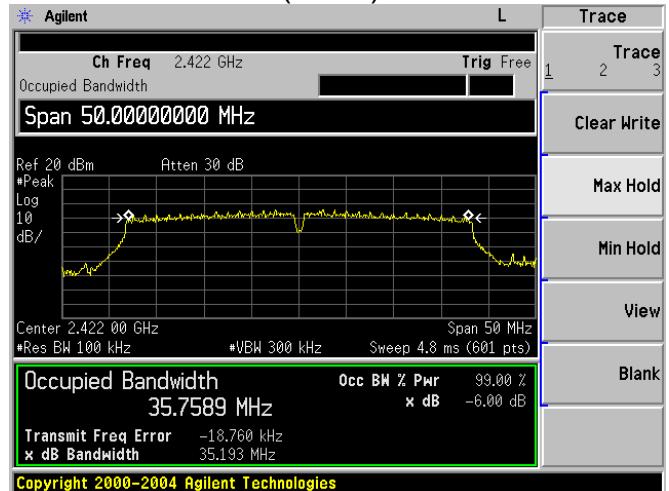


## 802.11n (HT20) 2437MHz

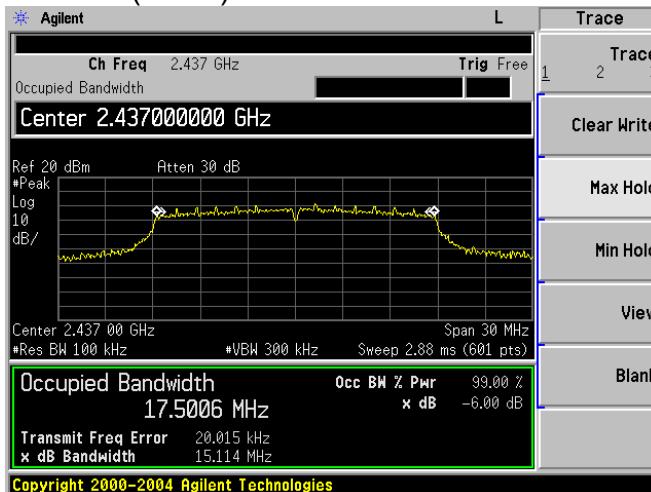


## 802.11n (HT40) 2437MHz

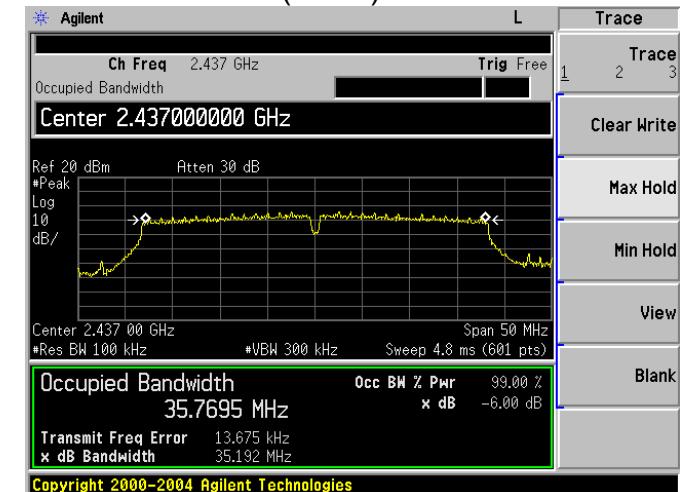

## 802.11n(HT20) 2462MHz

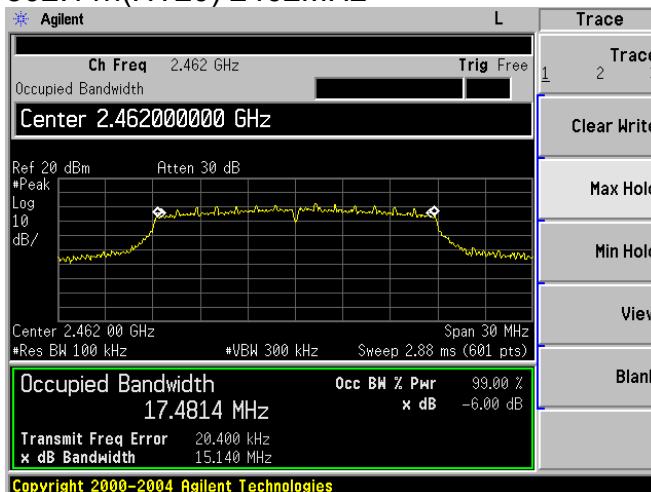

## 802.11n (HT40)2452MHz

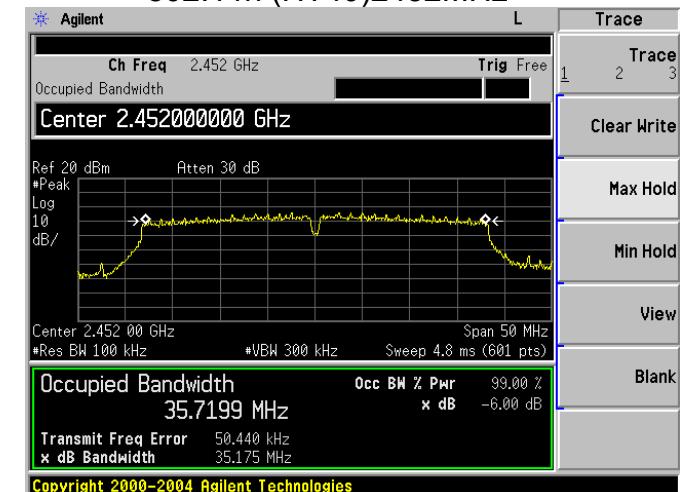

## 7. OUTPUT POWER TEST

### 7.1. Limits

For systems using digital modulation in the 2400~2483.5MHz, The output Power shall not exceed 1W (30dBm)

### 7.2. Test setup

1. The Transmitter output (antenna port) was connected to the power meter.
2. Turn on the EUT and power meter and then record the power value.
3. Repeat above procedures on all channels needed to be tested.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.




### 7.3. Test result


Test Channel	Frequency (MHz)	Maximum Peak Conducted Output Power (PK)	Maximum Peak Conducted Output Power (AV)	LIMIT dBm
		(dBm)	(dBm)	
<b>TX 802.11b Mode</b>				
CH01	2412	12.15	9.21	30
CH06	2437	12.23	9.32	30
CH11	2462	12.28	9.48	30
<b>TX 802.11g Mode</b>				
CH01	2412	11.12	8.44	30
CH06	2437	11.34	8.53	30
CH11	2462	11.15	8.35	30
<b>TX 802.11n(20) Mode</b>				
CH01	2412	10.13	7.61	30
CH06	2437	10.35	7.56	30
CH11	2462	10.63	7.63	30
<b>TX 802.11n(40) Mode</b>				
CH03	2422	10.23	7.64	30
CH06	2437	10.44	7.53	30
CH09	2452	10.25	7.32	30

Note: For power test the duty cycle is 100% in continuous transmitting mode.


## Test plot of Duty Cycle for 802.11b

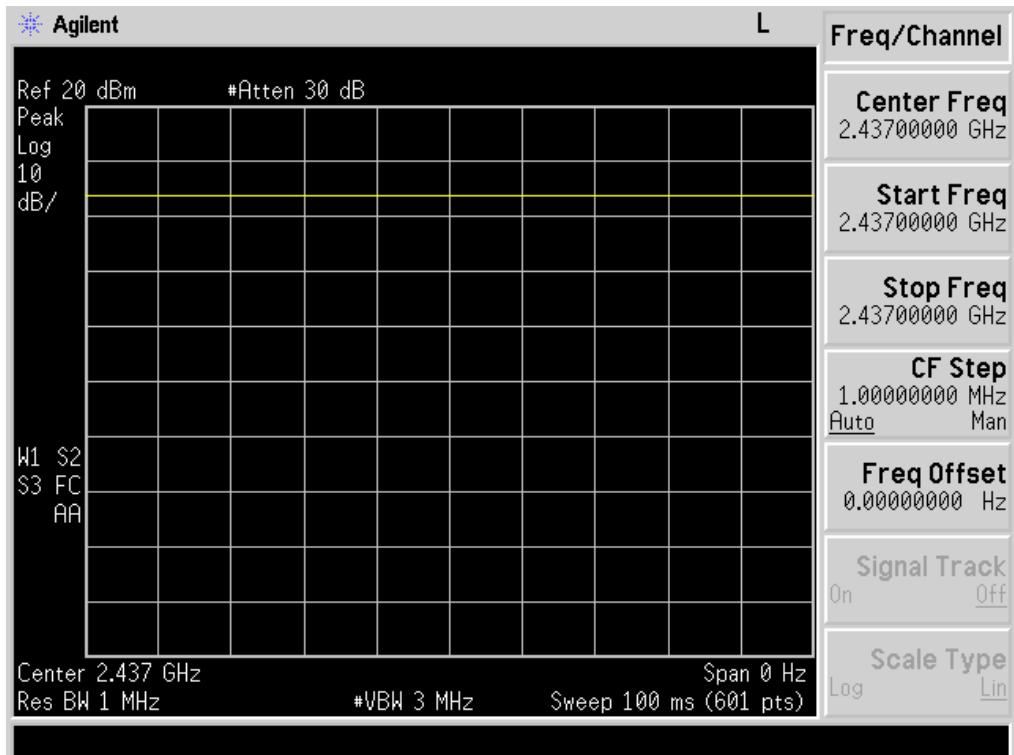


## Test plot of Duty Cycle for 802.11g

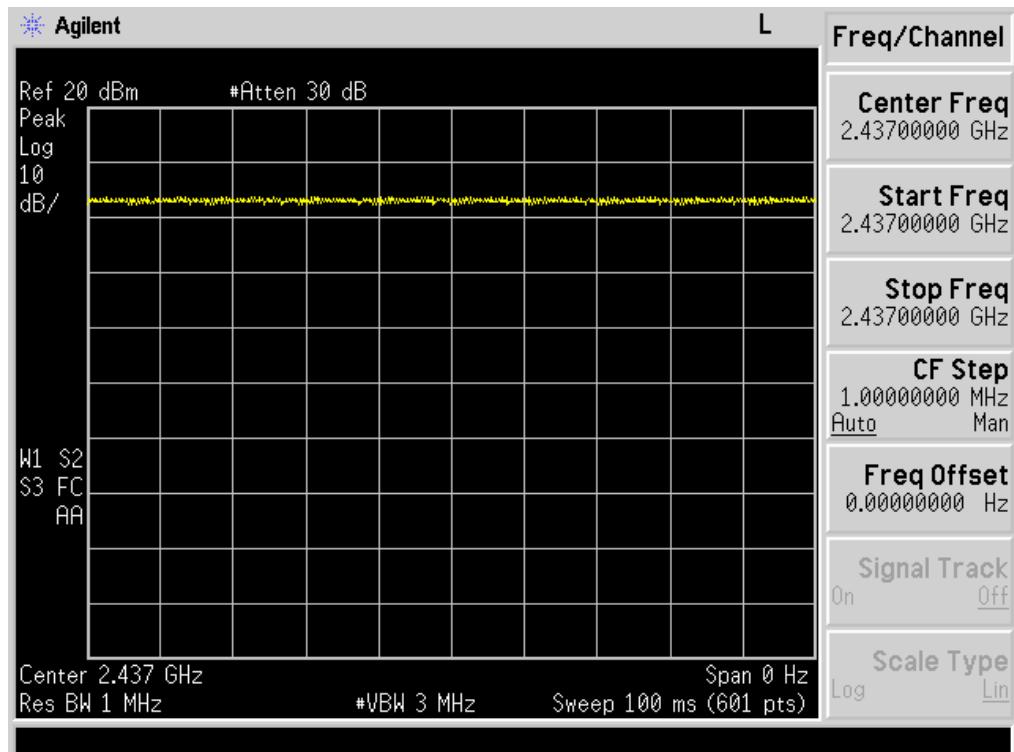

## Test plot of Duty Cycle for 802.11n(HT20)

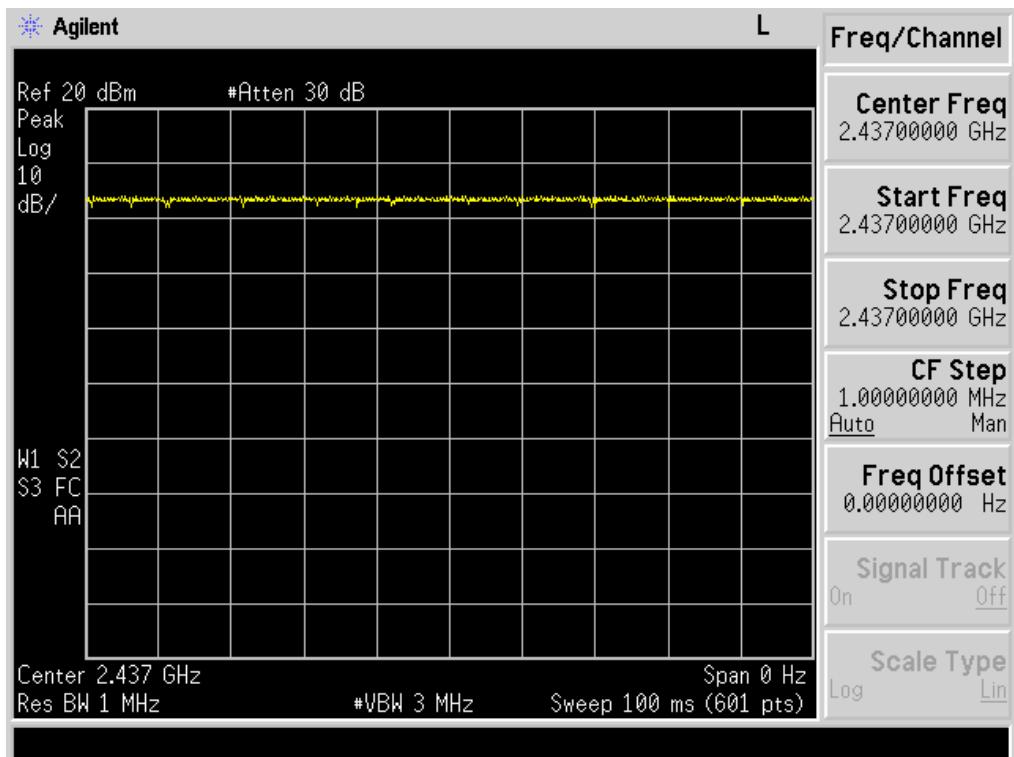

## Test plot of Duty Cycle for 802.11n(HT40)

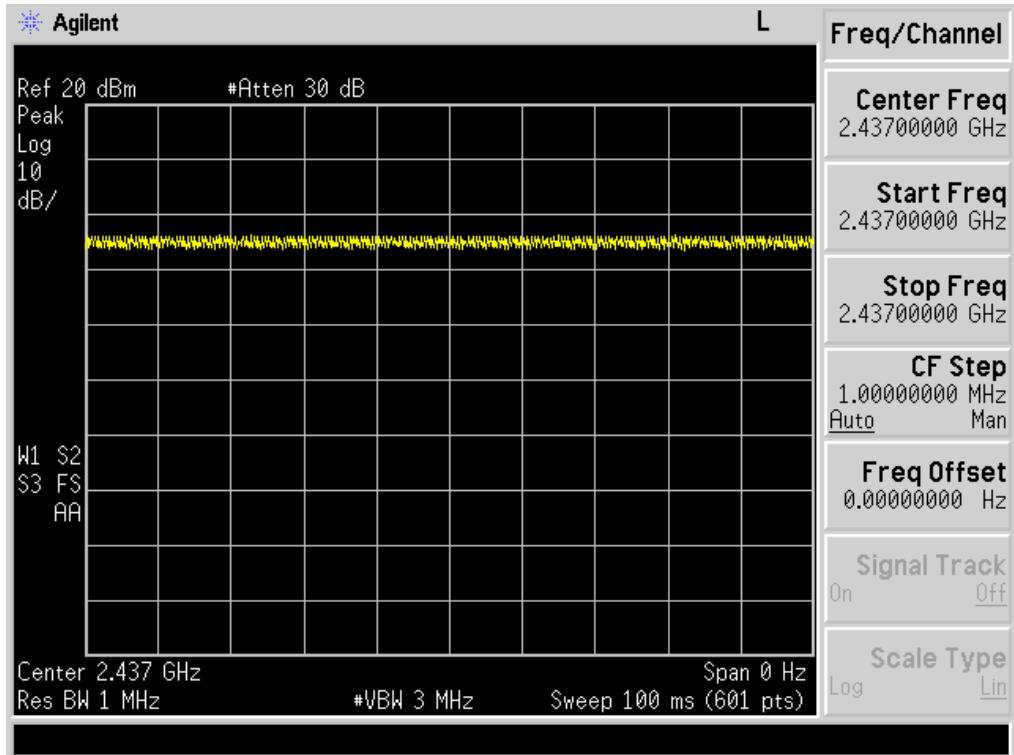

## 8. POWER SPECTRAL DENSITY TEST

### 8.1. Limits

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

### 8.2. Test setup


1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \text{ RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 8.3. Test result


	Channel Frequency (MHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Result
802.11b	2412	-8.65	8	Pass
	2437	-7.39	8	Pass
	2462	-10.34	8	Pass
802.11g	2412	-13.89	8	Pass
	2437	-13.24	8	Pass
	2462	-14.28	8	Pass
802.11n (HT20)	2412	-15.25	8	Pass
	2437	-14.08	8	Pass
	2462	-14.92	8	Pass
802.11n	2422	-18.87	8	Pass

(HT40)	2437	-16.67	8	Pass
	2452	-20.57	8	Pass


## 802.11b 2412MHz

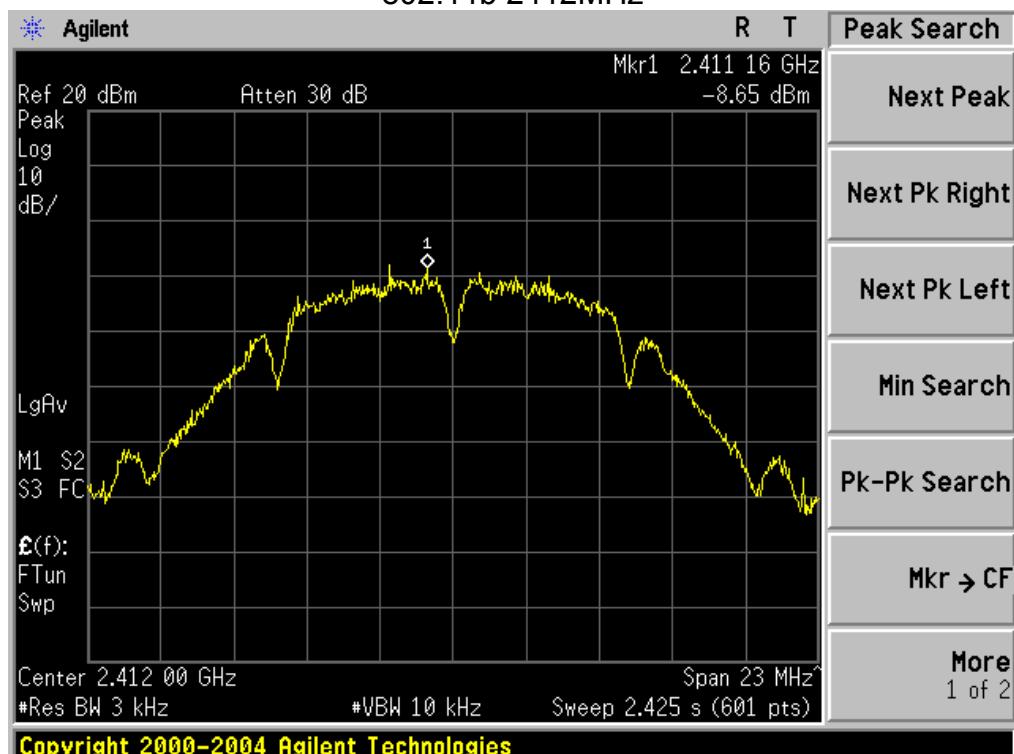


## 802.11b 2437MHz

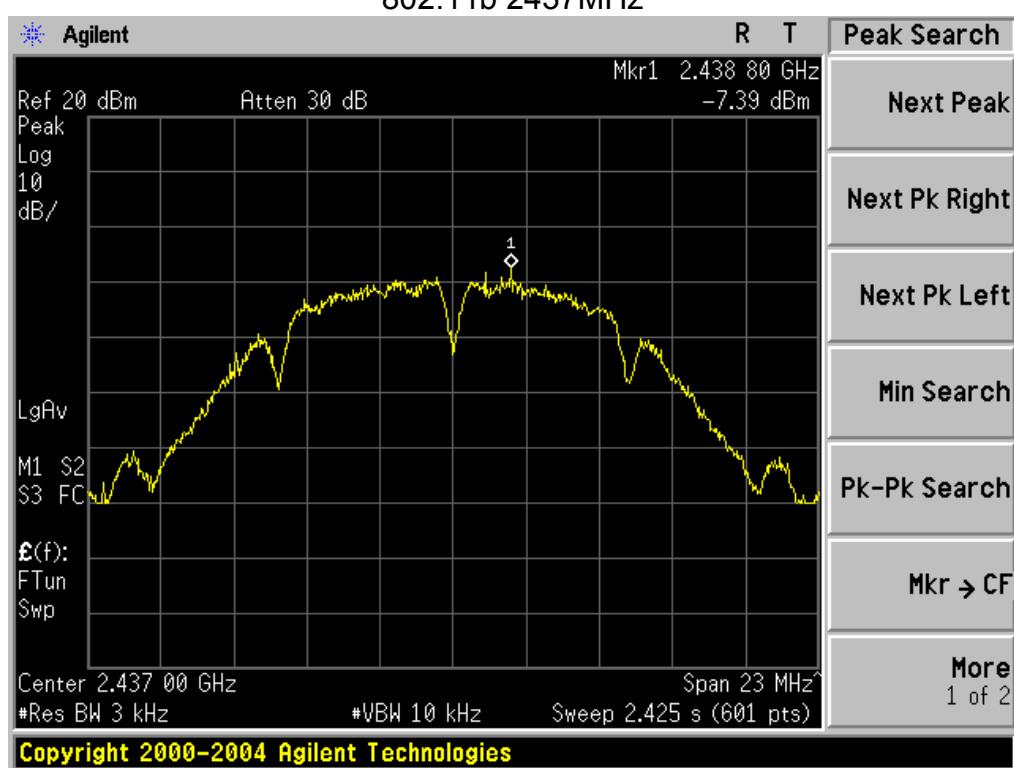


## 802.11b 2462MHz

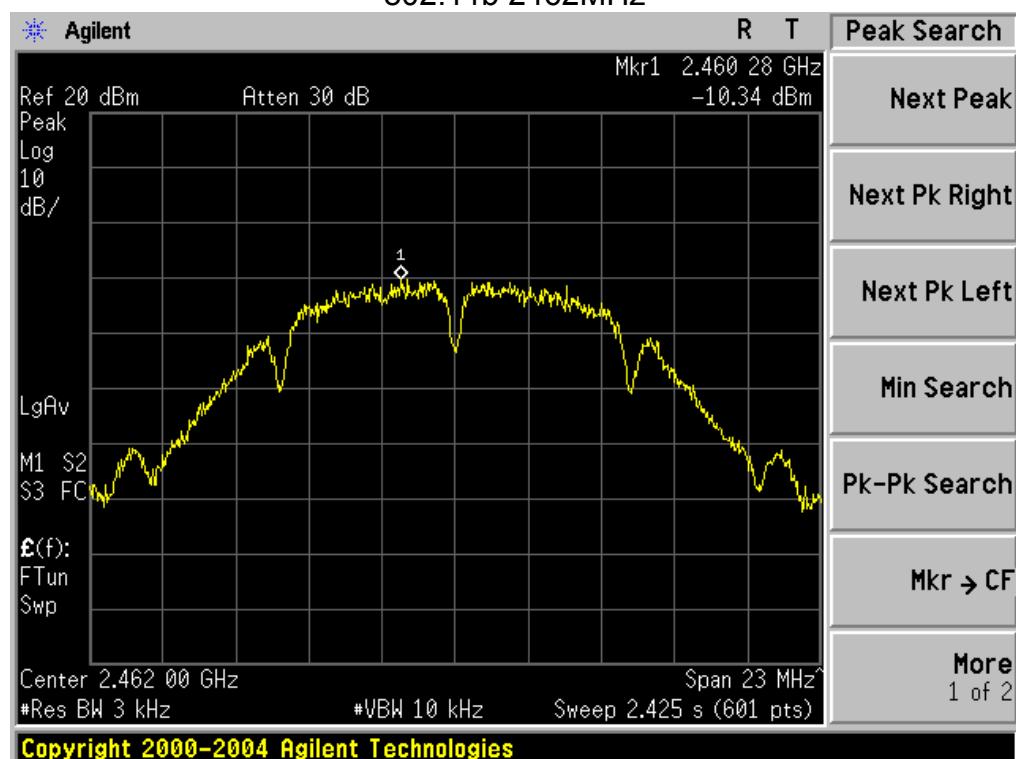


## 802.11g 2412MHz

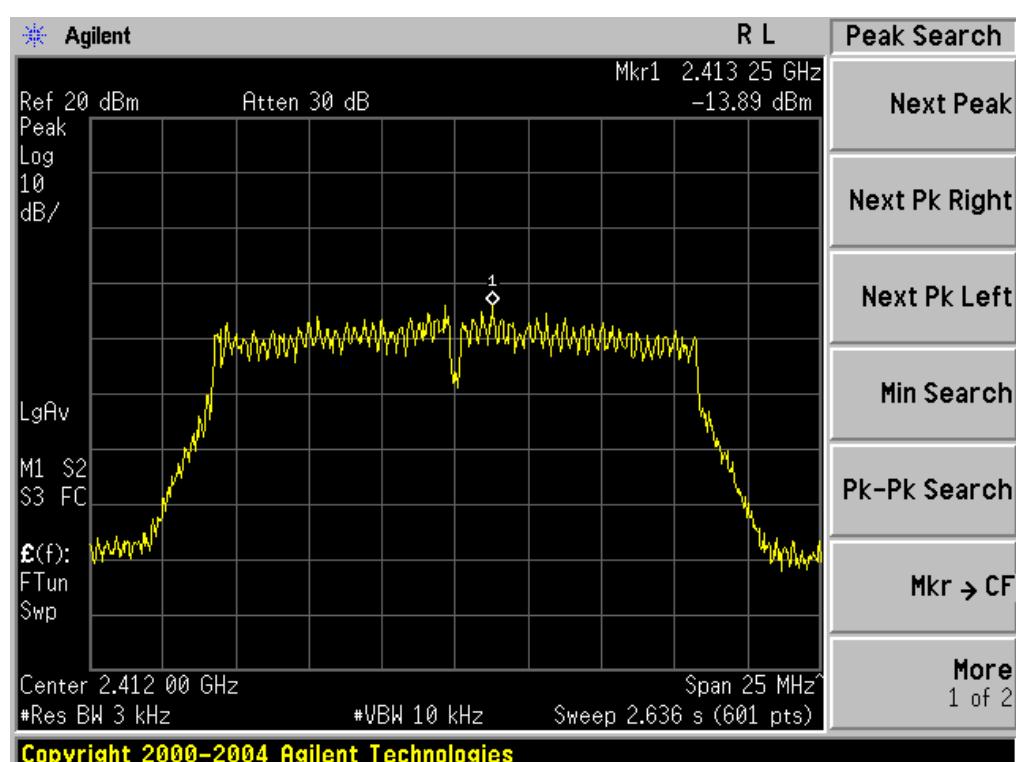


## 802.11g 2437MHz

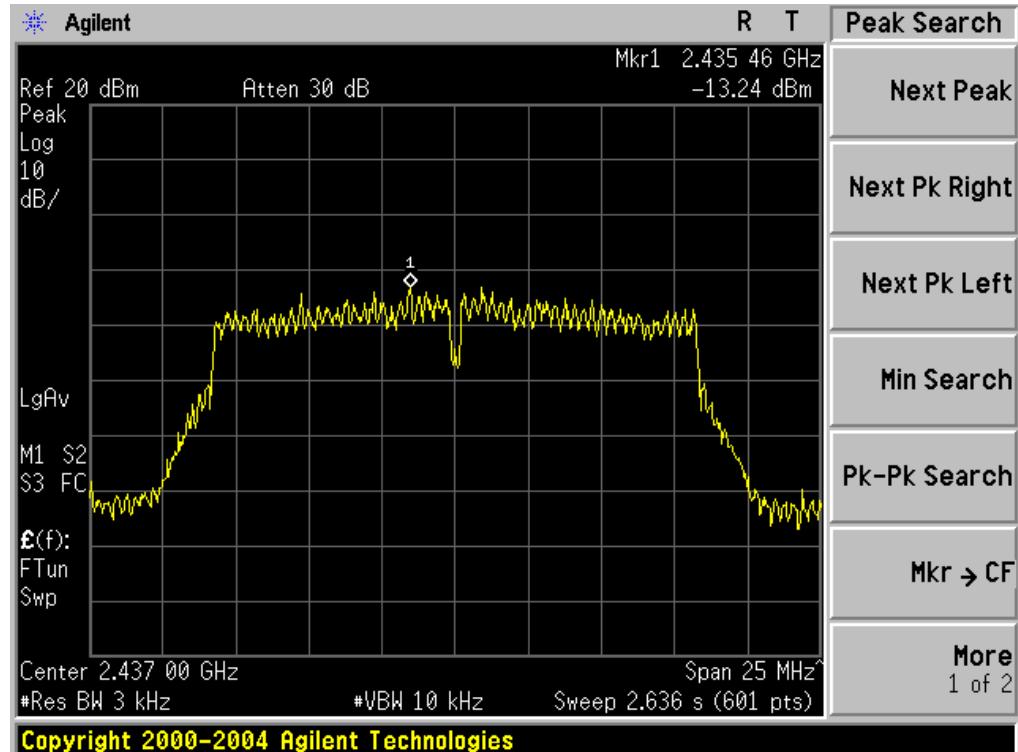


## 802.11g 2462MHz

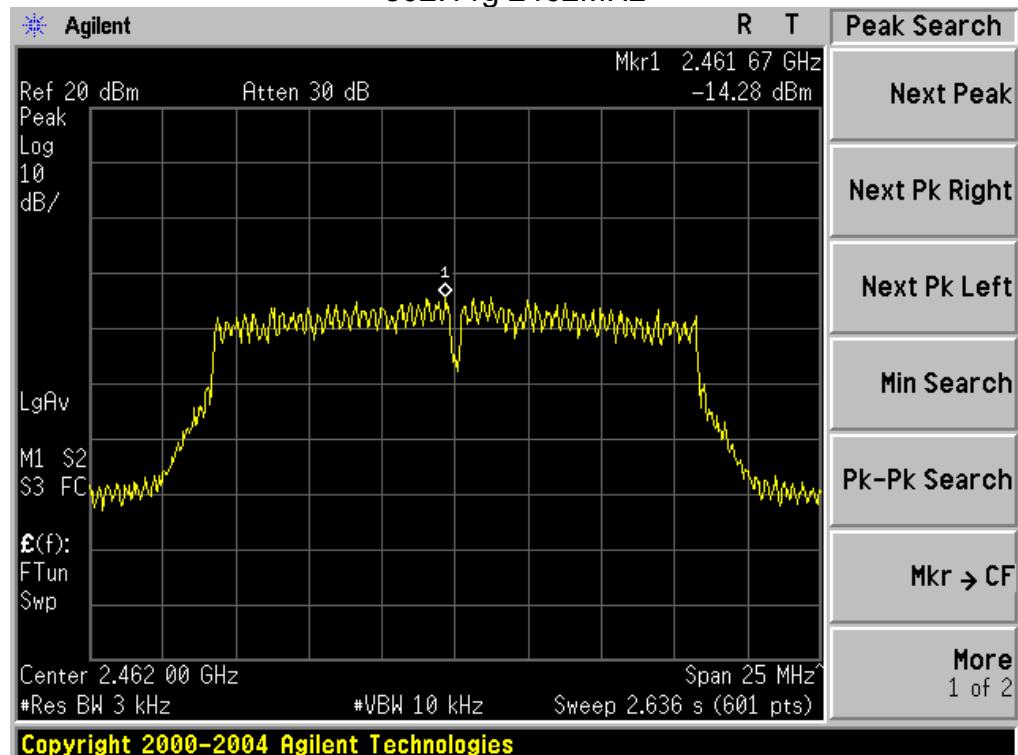


## 802.11n (HT20) 2412MHz

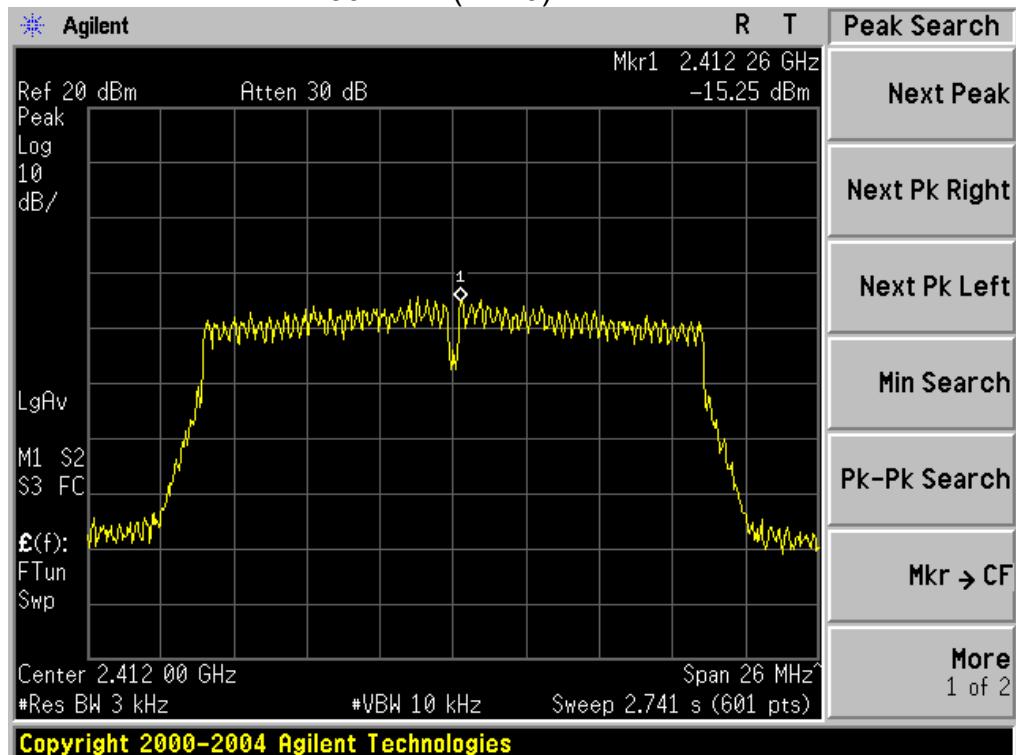


## 802.11n (HT20) 2437MHz

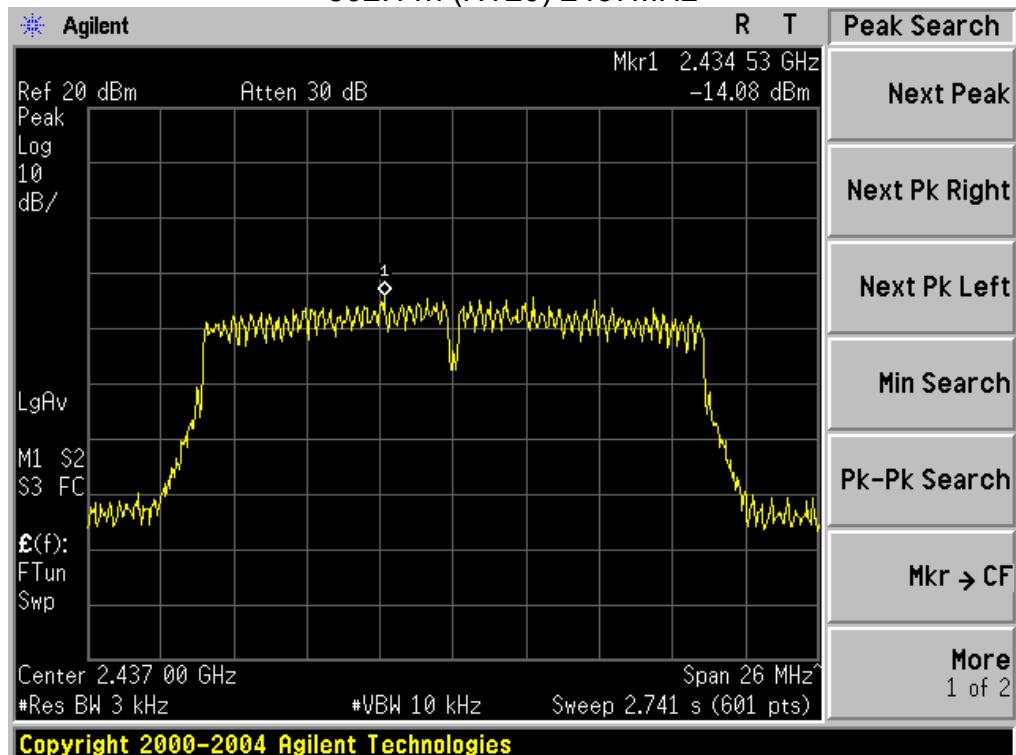



## 802.11n(HT20) 2462MHz

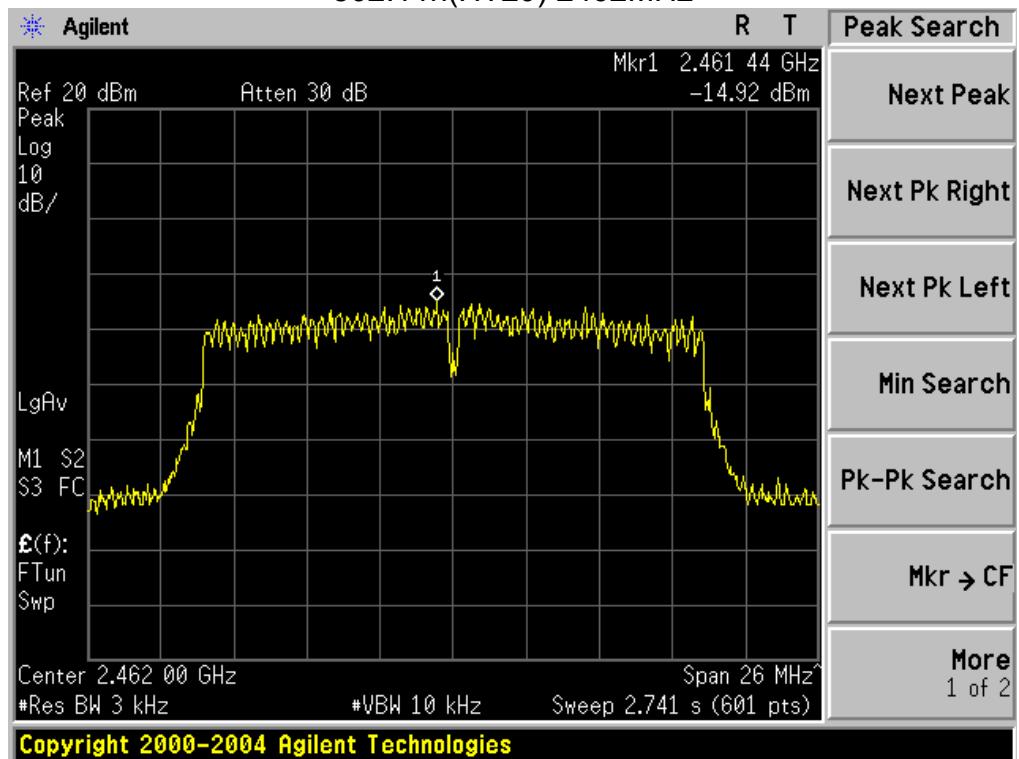

## 802.11 n (HT40) 2422MHz

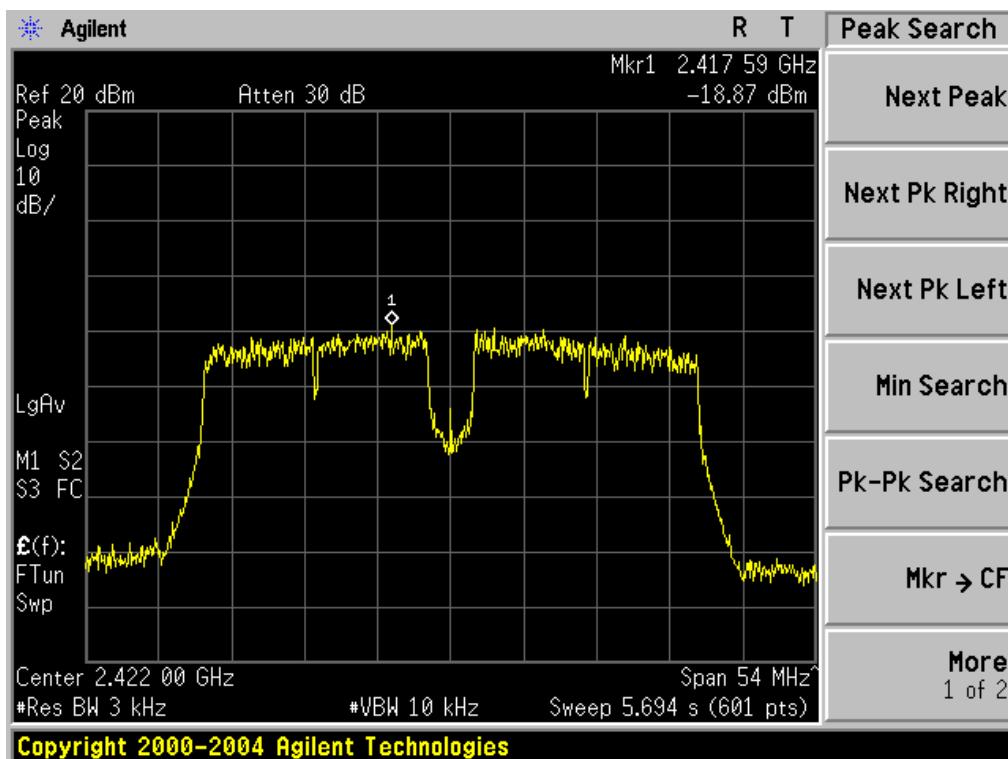

## 802.11 n (HT40) 2437MHz

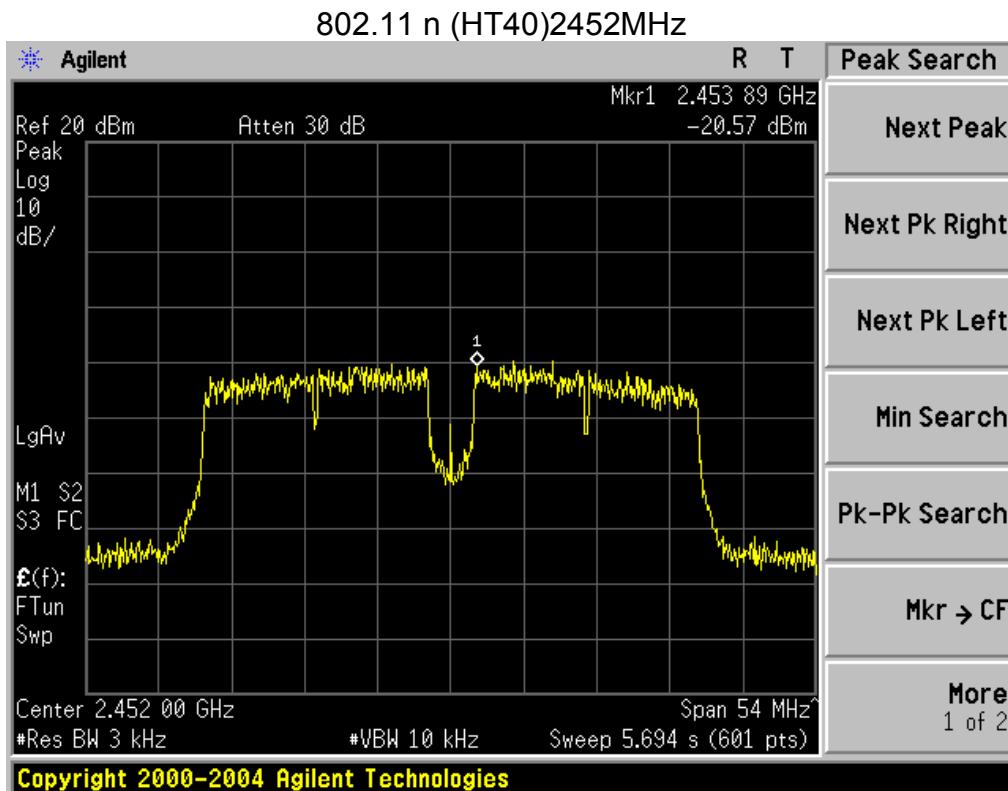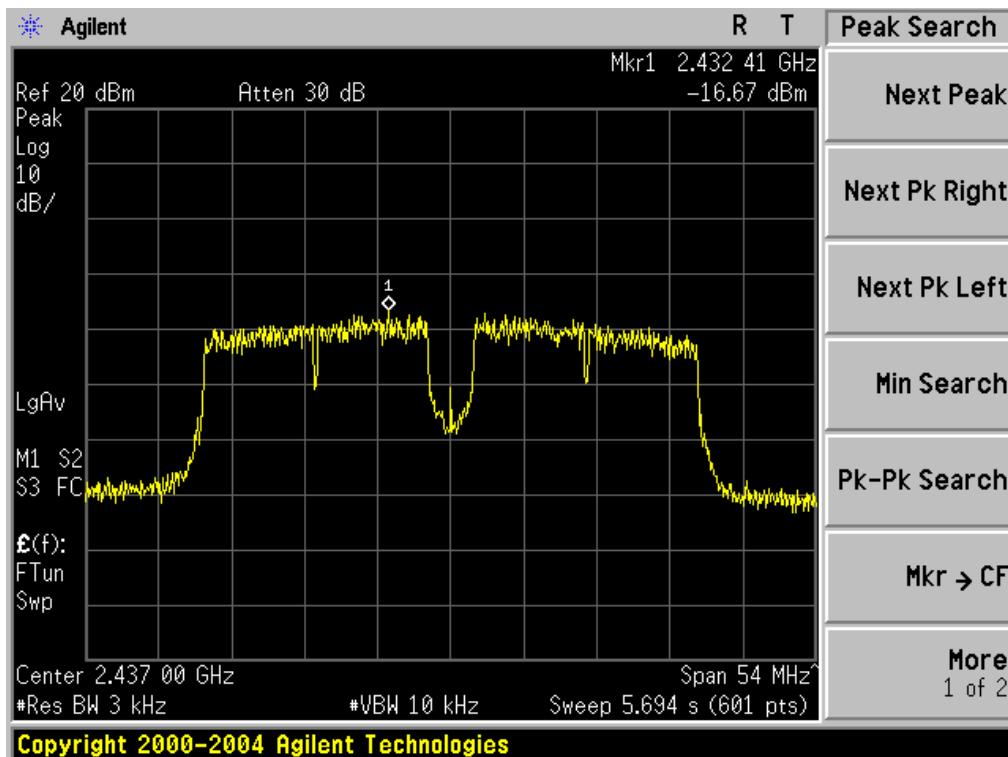

## 9. ANTENNA REQUIREMENTS

### 9.1. Limits

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### 9.2. Result

The antennas used for this product is Permanently fixed antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is 1.0dBi.

## 10. PHOTOGRAPHS OF TEST SET-UP

### Conducted Emission



### Radiated Emission Test






## 11. PHOTOGRAPHS OF THE EUT







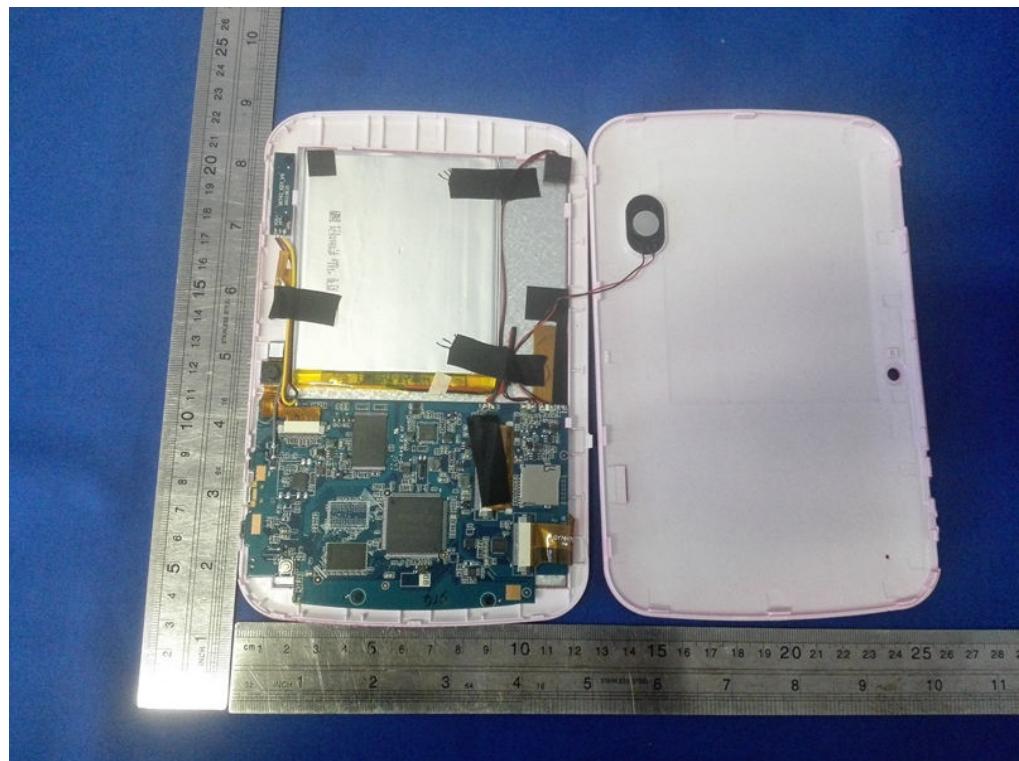

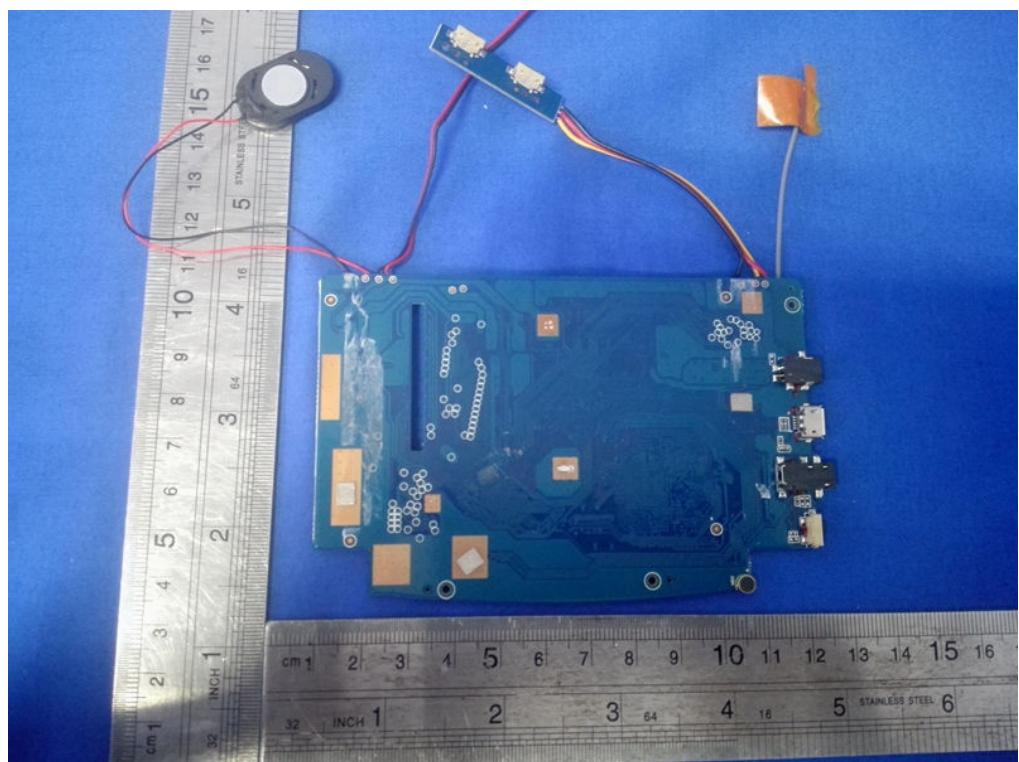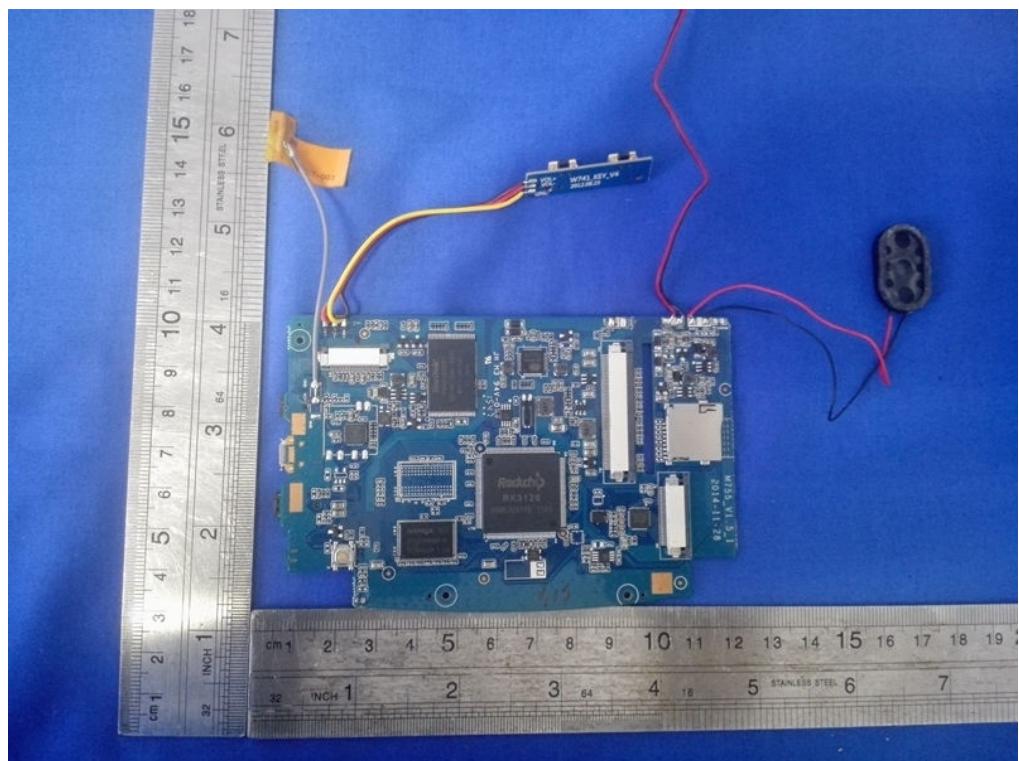





-----END-----