

Date of Test:	February 1, 2013	Temperature:	25°C
EUT:	MID	Humidity:	50%
Model No.:	VX-S7001	Power Supply:	AC 120V/60Hz
Test Mode:	802.11g Channel High 2462MHz	Test Engineer:	Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
56.0708	12.03	13.86	25.89	40.00	-14.11	Vertical
148.9175	13.36	11.52	24.88	43.50	-18.62	
192.4590	15.95	13.95	29.90	43.50	-13.60	
36.1406	12.20	15.43	27.63	40.00	-12.37	Horizontal
54.7086	16.65	14.10	30.75	40.00	-9.25	
151.5567	15.45	11.54	26.99	43.50	-16.51	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	<u>February 1, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>VX-S7001</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel Low 2412MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
55.4829	12.05	13.98	26.03	40.00	-13.97	Vertical
148.3951	15.41	11.51	26.92	43.50	-16.58	
189.7732	15.47	13.87	29.34	43.50	-14.16	
36.2678	11.31	15.40	26.71	40.00	-13.29	Horizontal
54.3255	15.74	14.12	29.86	40.00	-10.14	
153.1627	16.54	11.55	28.09	43.50	-15.41	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test:	<u>February 1, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>VX-S7001</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel Middle 2437MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dB μ V/m)	Factor(dB) Corr.	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr. (dB)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
55.2883	12.29	14.01	26.30	40.00	-13.70	Vertical
147.8747	16.54	11.51	28.05	43.50	-15.45	
190.4411	15.47	13.88	29.35	43.50	-14.15	Horizontal
36.2678	12.06	15.40	27.46	40.00	-12.54	
54.5167	16.74	14.10	30.84	40.00	-9.16	
152.0902	15.54	11.54	27.08	43.50	-16.42	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dB μ V/m)		Factor Corr. (dB)	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>February 1, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>VX-S7001</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel High 2462MHz</u>		
Test Mode:	<u>(20MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
55.8742	10.02	13.90	23.92	40.00	-16.08	Vertical
147.8747	16.63	11.51	28.14	43.50	-15.36	
193.1366	15.54	13.96	29.50	43.50	-14.00	
35.5112	11.54	15.57	27.11	40.00	-12.89	Horizontal
54.3255	16.43	14.12	30.55	40.00	-9.45	
152.0902	16.33	11.54	27.87	43.50	-15.63	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**2. *: Denotes restricted band of operation.****3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>February 1, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>VX-S7001</u>	Power Supply:	<u>AC 120V/60Hz</u>
Test Mode:	<u>802.11n Channel Low 2422MHz</u> <u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
55.8742	12.02	13.90	25.92	40.00	-14.08	Vertical
148.3951	16.57	11.51	28.08	43.50	-15.42	
190.4411	14.44	13.88	28.32	43.50	-15.18	
35.3867	13.33	15.60	28.93	40.00	-11.07	Horizontal
54.5167	18.21	14.10	32.31	40.00	-7.69	
152.6255	15.15	11.55	26.70	43.50	-16.80	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.

2. *: Denotes restricted band of operation.

3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.

Date of Test: February 1, 2013 Temperature: 25°C
 EUT: MID Humidity: 50%
 Model No.: VX-S7001 Power Supply: AC 120V/60Hz
 802.11n Channel Middle 2437MHz
 Test Mode: (40MHz) Test Engineer: Pei

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
56.0708	11.01	13.86	24.87	40.00	-15.13	Vertical
148.9175	16.32	11.52	27.84	43.50	-15.66	
191.1114	14.47	13.90	28.37	43.50	-15.13	
36.2678	12.51	15.40	27.91	40.00	-12.09	Horizontal
53.9451	16.32	14.15	30.47	40.00	-9.53	
153.1627	15.55	11.55	27.10	43.50	-16.40	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

- Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**
- 2. *: Denotes restricted band of operation.**
- 3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**

Date of Test:	<u>February 1, 2013</u>	Temperature:	<u>25°C</u>
EUT:	<u>MID</u>	Humidity:	<u>50%</u>
Model No.:	<u>VX-S7001</u>	Power Supply:	<u>AC 120V/60Hz</u>
	<u>802.11n Channel High 2452MHz</u>		
Test Mode:	<u>(40MHz)</u>	Test Engineer:	<u>Pei</u>

For Below 30MHz

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
-	-	-	-	-	-	X
-	-	-	-	-	-	Y
-	-	-	-	-	-	Z

For 30MHz-1000MHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading (dBμV/m)	Factor Corr. (dB)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
	QP		QP	QP	QP	
36.0139	12.22	15.46	27.68	40.00	-12.32	Vertical
54.1349	14.32	14.14	28.46	40.00	-11.54	
152.6255	15.47	11.55	27.02	43.50	-16.48	
55.6782	10.33	13.94	24.27	40.00	-15.73	Horizontal
147.8747	15.54	11.51	27.05	43.50	-16.45	
190.4411	15.21	13.88	29.09	43.50	-14.41	

For 1GHz-25GHz

Corrected Factor = Antenna Factor + Cable Loss – Amplifier Gain

Frequency (MHz)	Reading(dBμV/m)		Factor Corr. (dB)	Result(dBμV/m)		Limit(dBμV/m)		Margin(dBμV/m)		Polarization
	AV	PEAK		AV	PEAK	AV	PEAK	AV	PEAK	
-	-	-	-	-	-	-	-	-	-	Vertical
-	-	-	-	-	-	-	-	-	-	Horizontal

- Note: 1. Emissions attenuated more than 20 dB below the permissible value are not reported.**
- 2. *: Denotes restricted band of operation.**
- 3. The fundamental radiated emissions were reduced by Band Reject Filter in the attached plots.**



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4765
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 1(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:26:14
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

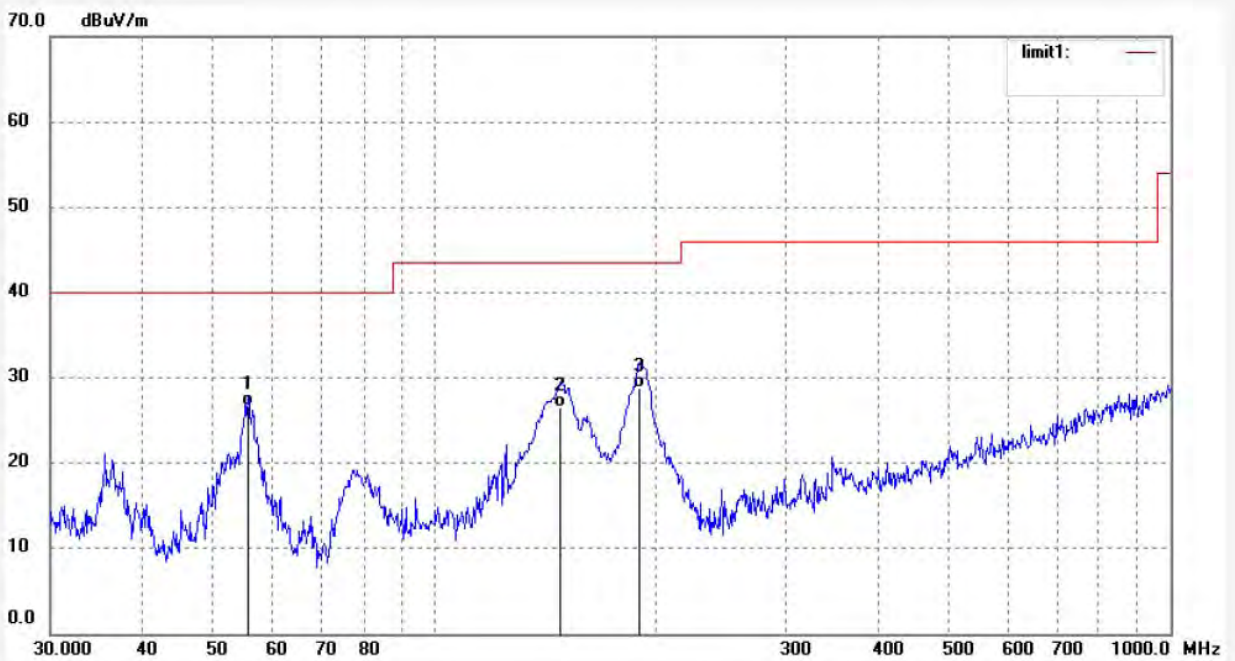

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.6782	12.83	13.94	26.77	40.00	-13.23	QP			
2	147.8747	14.98	11.51	26.49	43.50	-17.01	QP			
3	189.7732	14.94	13.87	28.81	43.50	-14.69	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4764
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 1(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:24:24
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

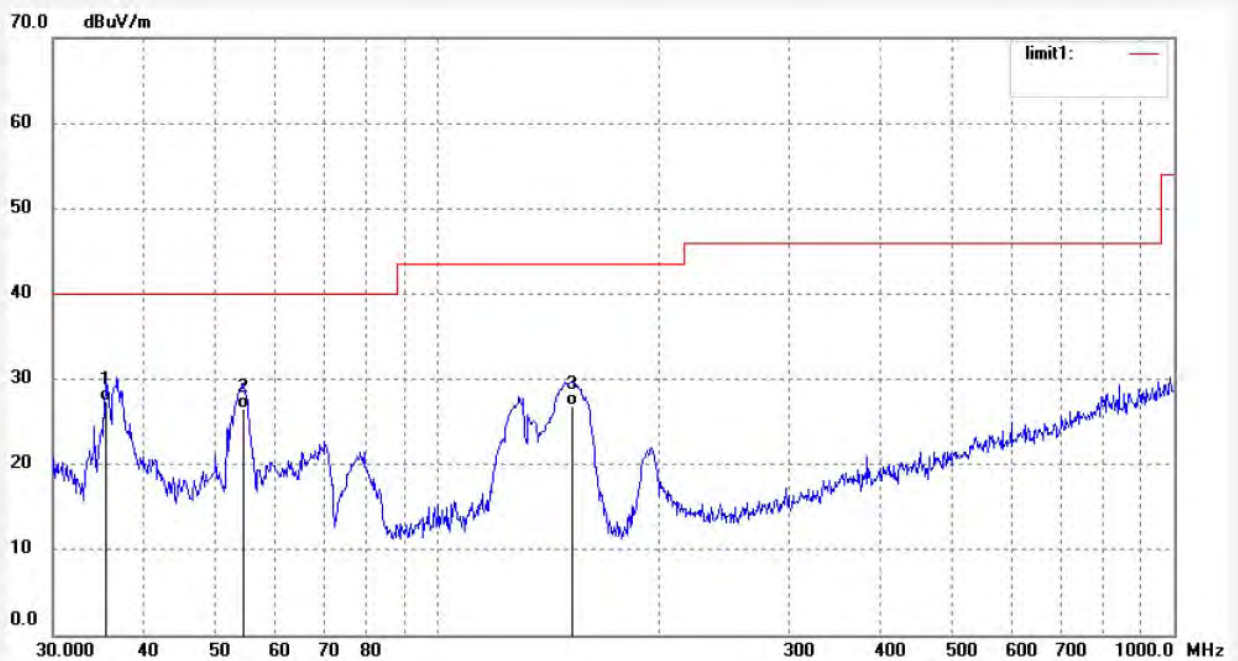

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.3867	11.85	15.60	27.45	40.00	-12.55	QP			
2	54.5167	12.45	14.10	26.55	40.00	-13.45	QP			
3	152.0902	15.29	11.54	26.83	43.50	-16.67	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4740
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 1(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/02/01
Time: 9/33/21
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

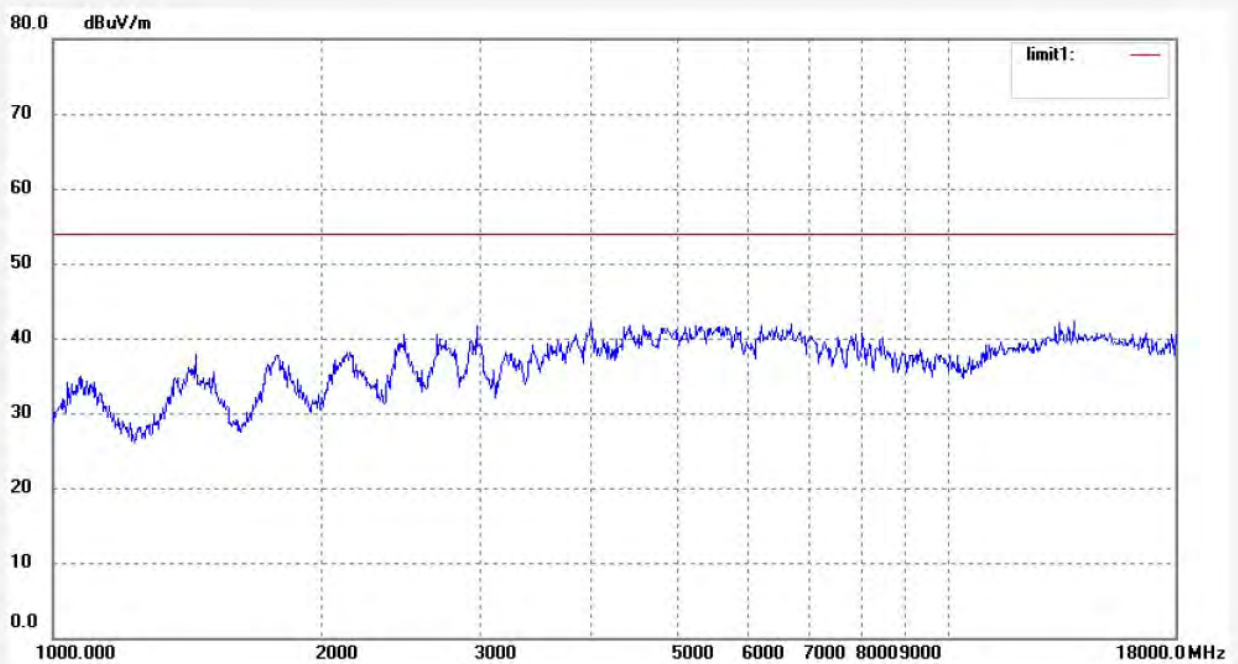

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4741	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/35/12
EUT: MID	Engineer Signature:
Mode: Channel 1(802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

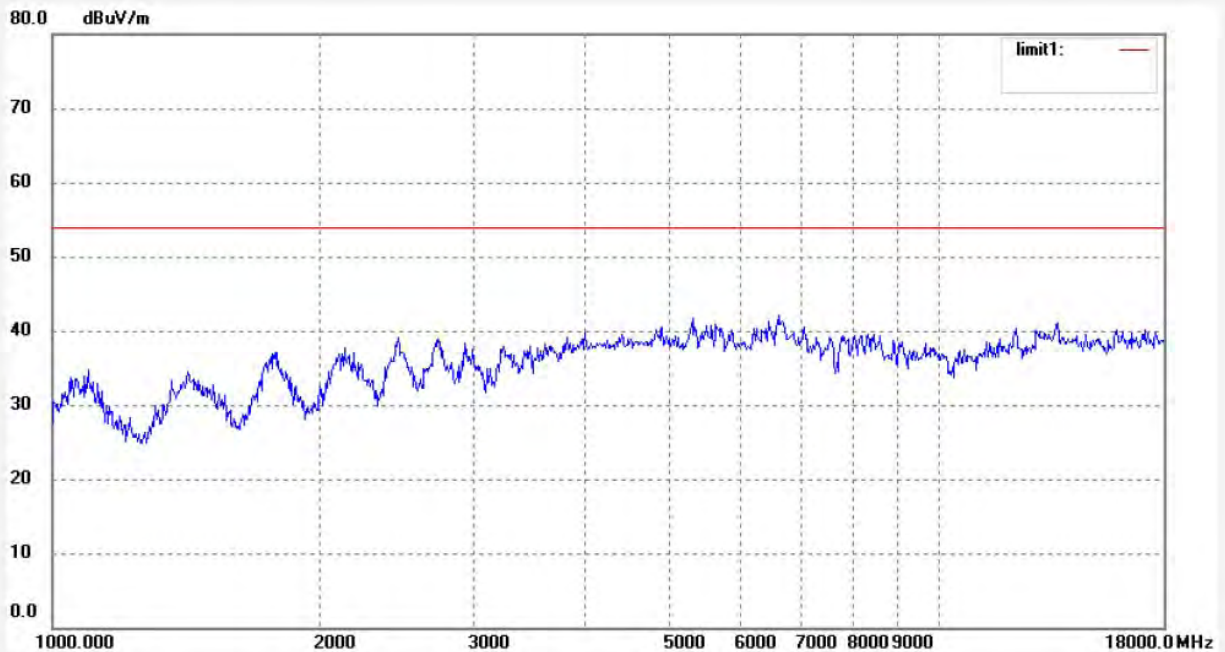

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1601
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: MID
Mode: TX Channel 1 (802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/02/2/
Time: 10:05:15
Engineer Signature: Bob
Distance: 3m

Note: Report No.:ATE20130172

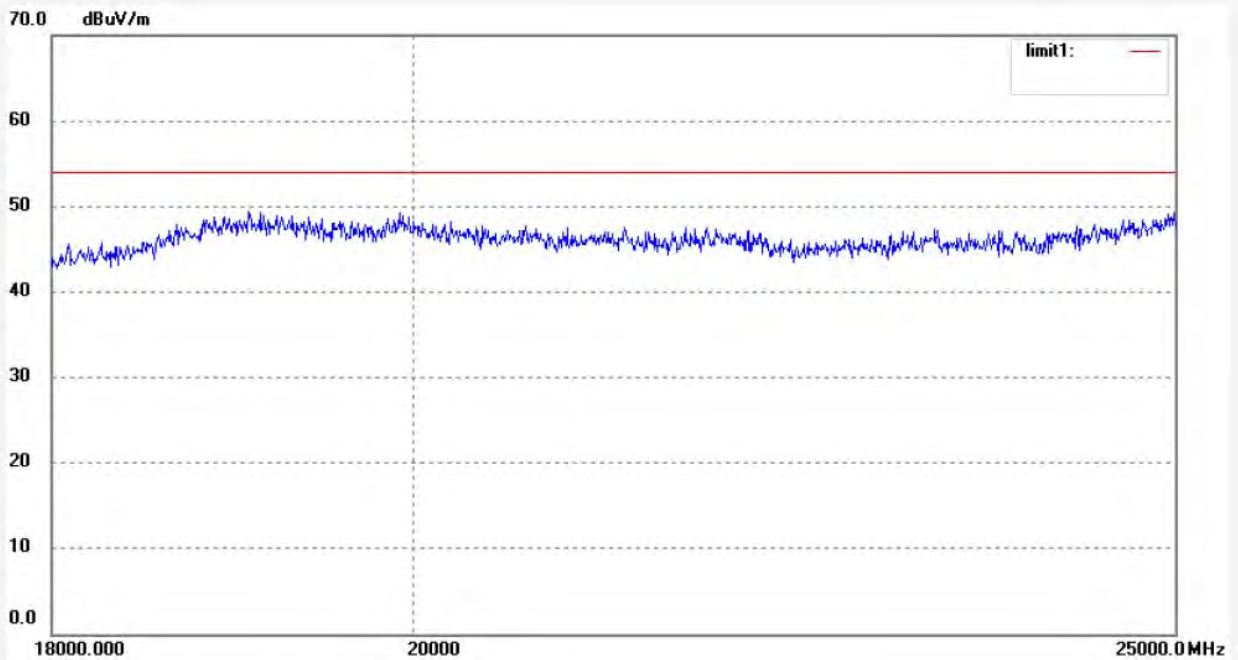

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1602	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:09:22
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

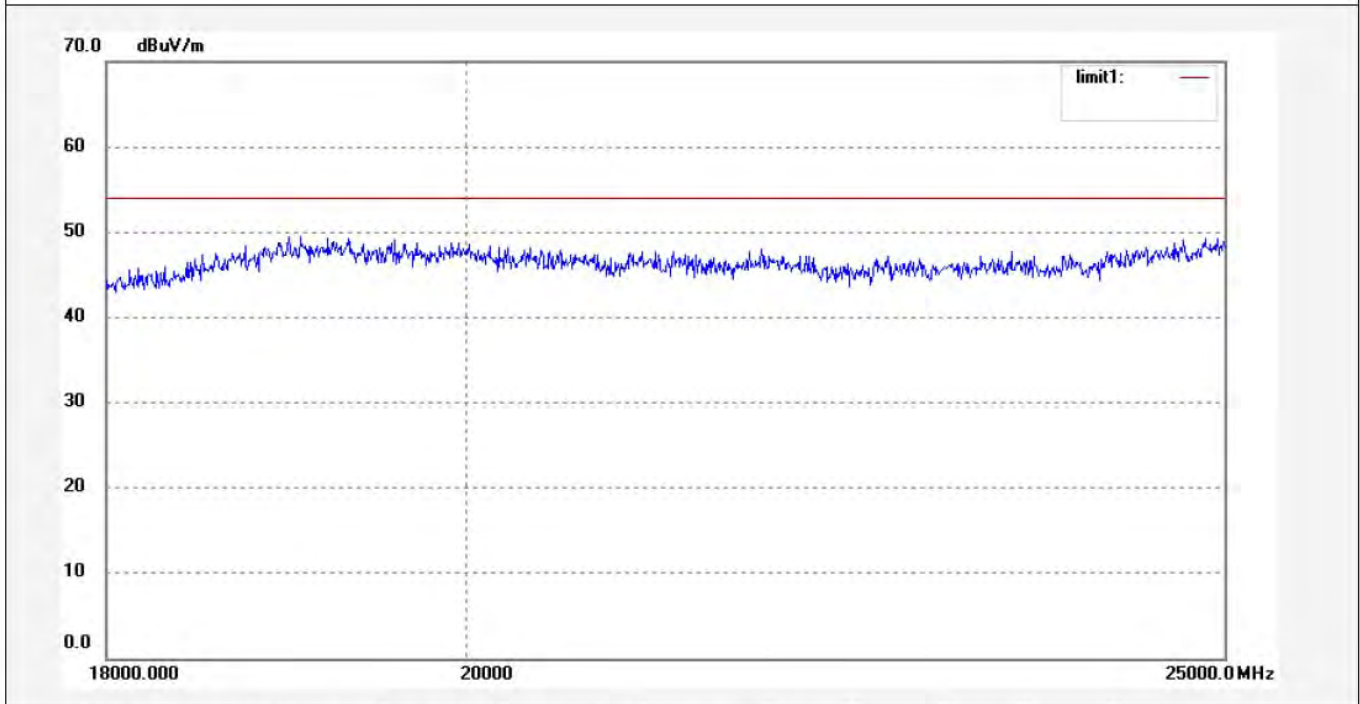

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4766
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 6(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:28:54
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

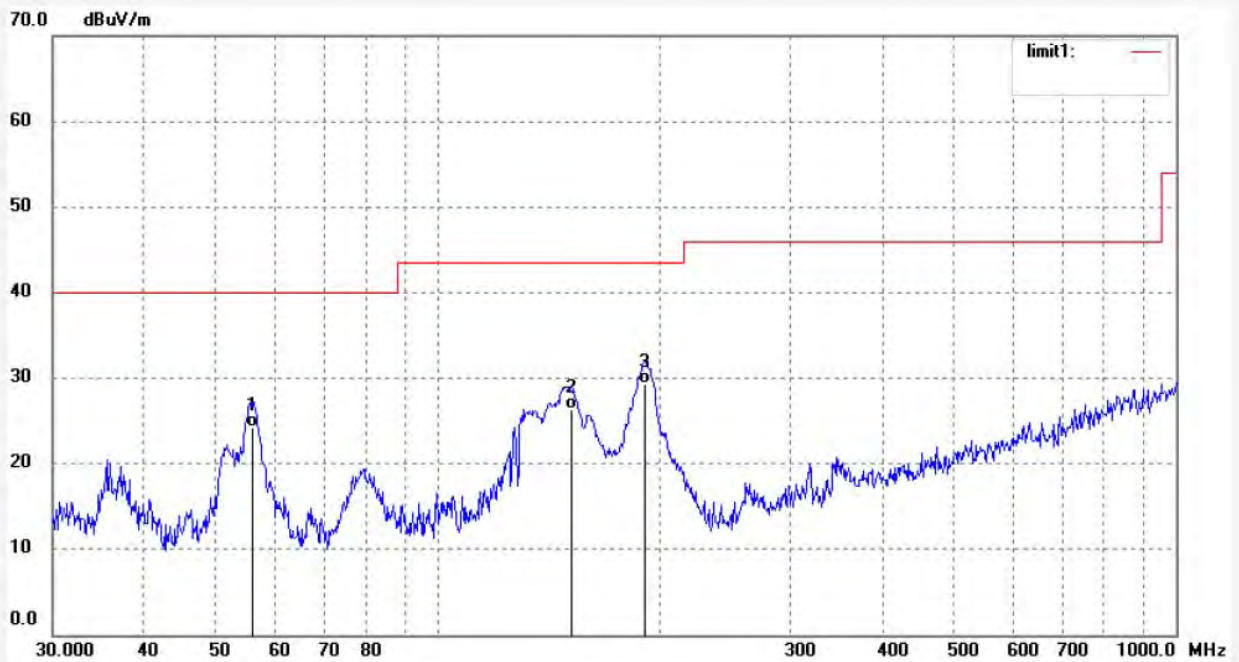

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.8742	10.32	13.90	24.22	40.00	-15.78	QP			
2	151.5567	14.87	11.54	26.41	43.50	-17.09	QP			
3	190.4411	15.47	13.88	29.35	43.50	-14.15	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4767
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 6(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:30:11
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

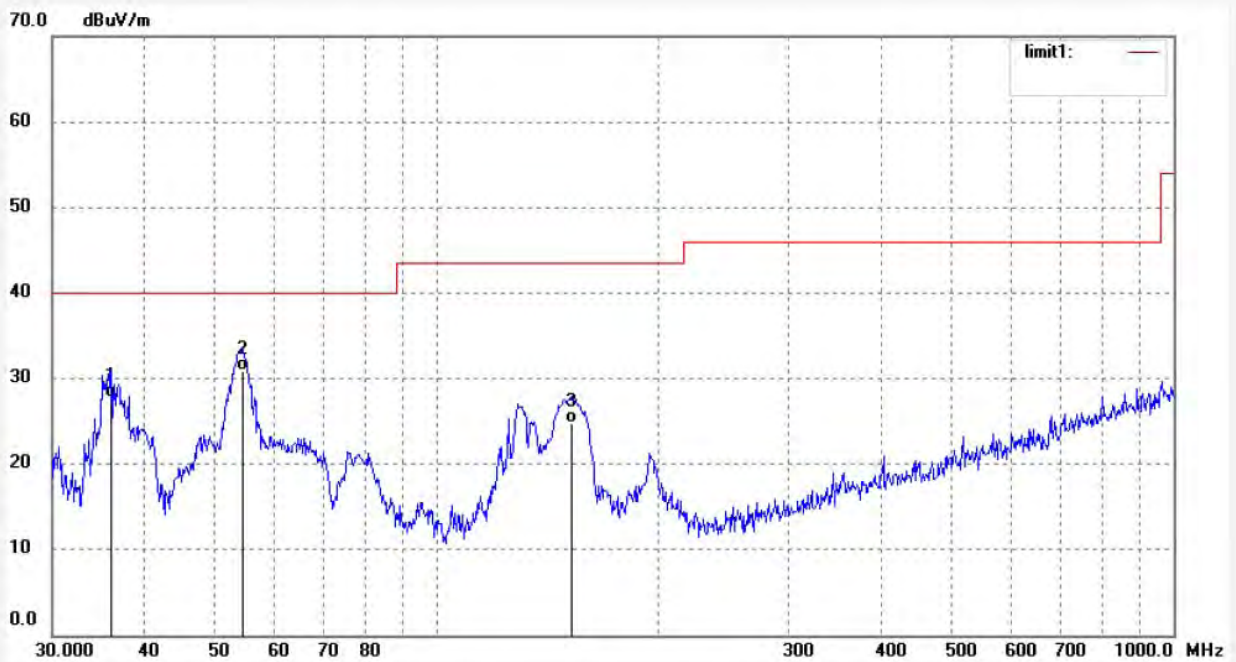

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.1406	12.24	15.43	27.67	40.00	-12.33	QP			
2	54.5167	16.77	14.10	30.87	40.00	-9.13	QP			
3	152.0902	13.31	11.54	24.85	43.50	-18.65	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4743
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 6(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/02/01
Time: 9/39/51
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

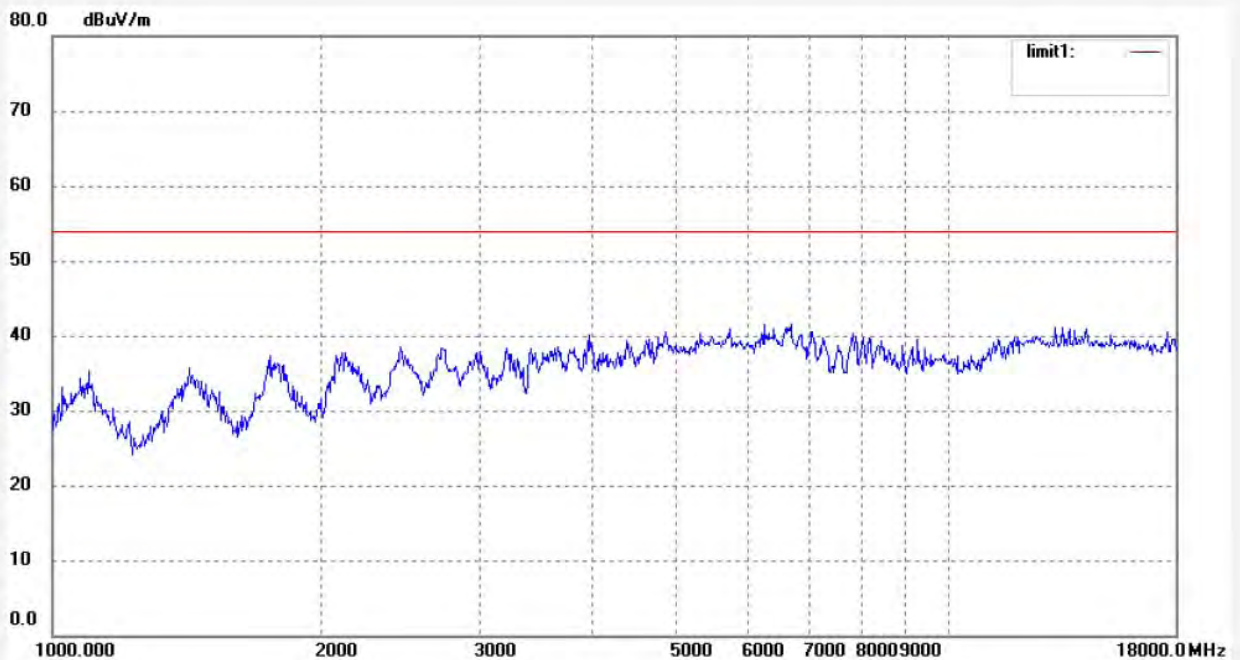

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4742	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/37/34
EUT: MID	Engineer Signature:
Mode: Channel 6(802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

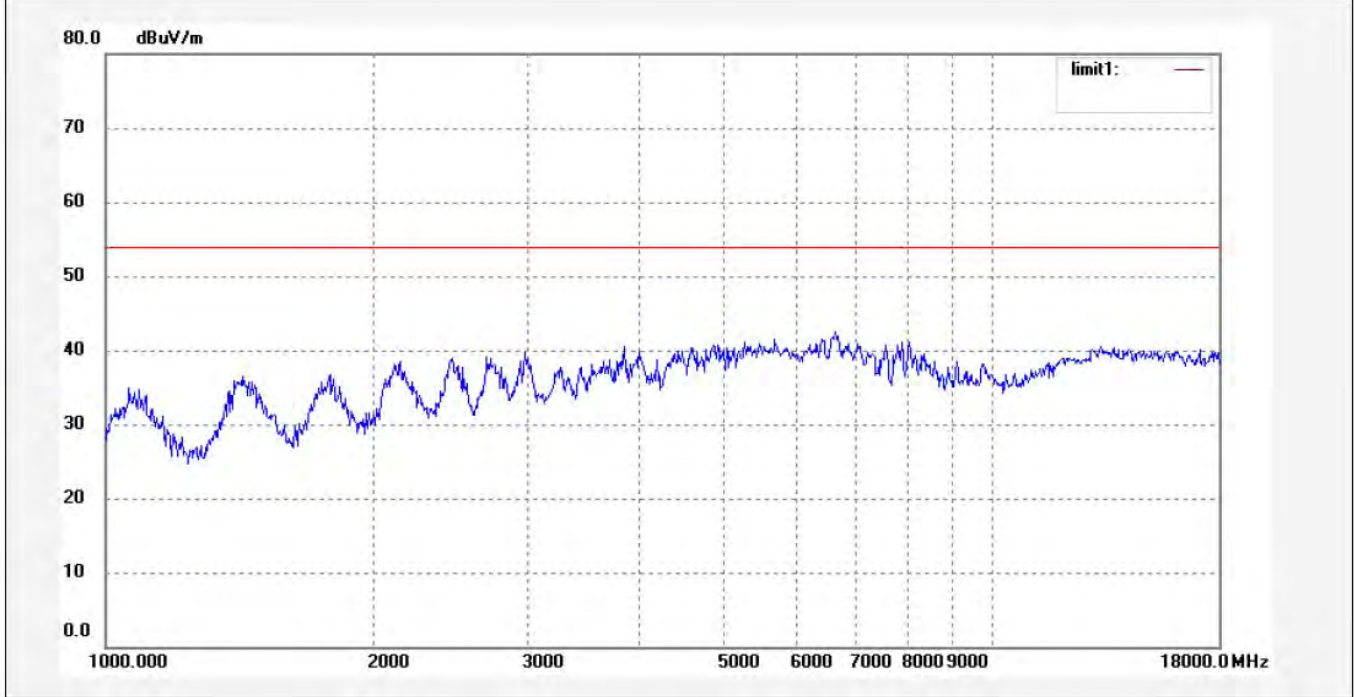

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1604	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:18:36
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

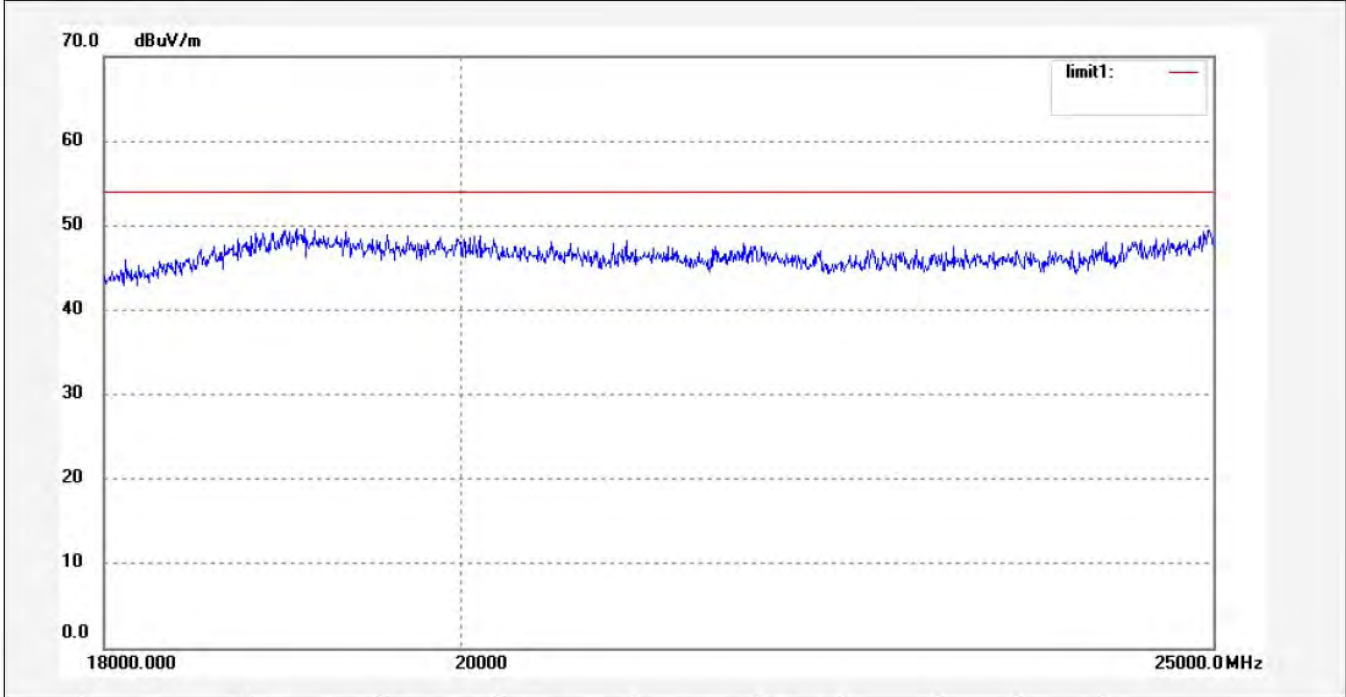

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1603	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:14:45
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

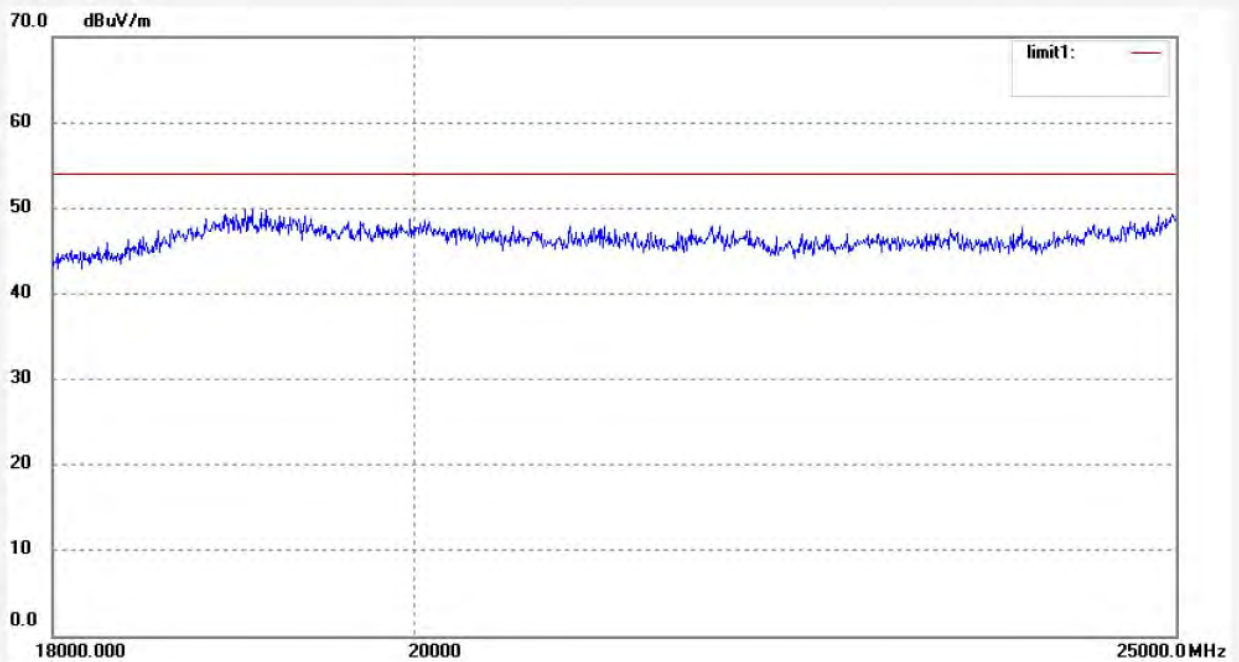

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4769
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 11(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:34:17
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

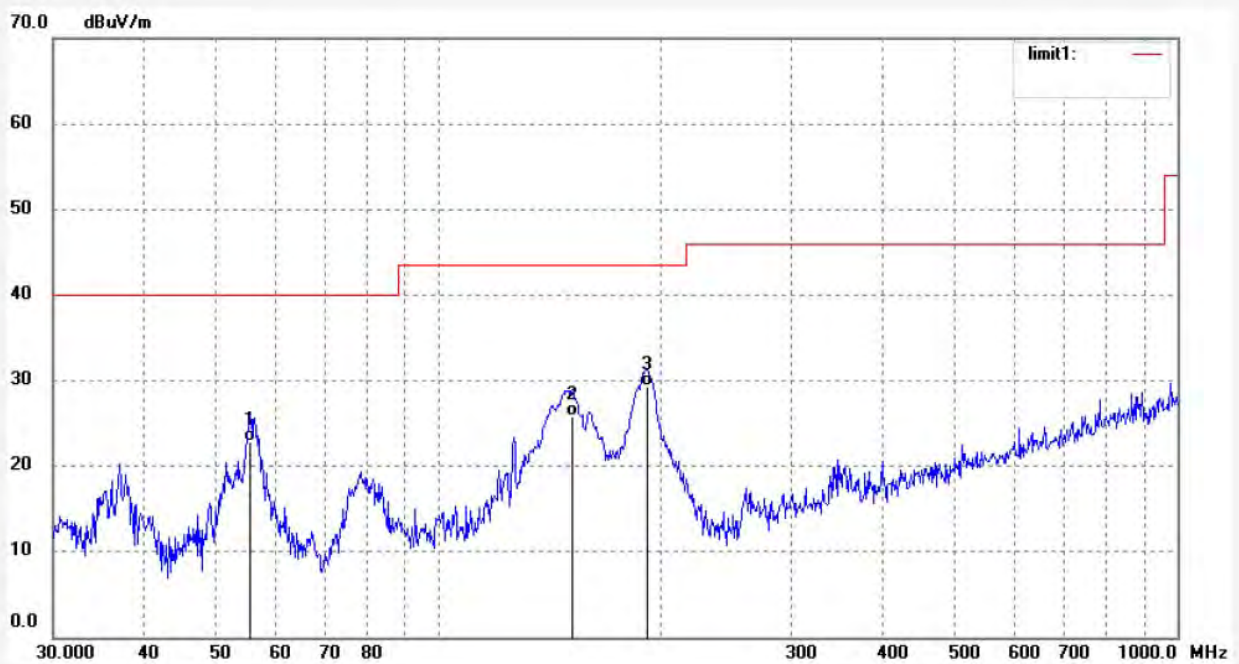

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4829	8.88	13.98	22.86	40.00	-17.14	QP			
2	151.5567	14.36	11.54	25.90	43.50	-17.60	QP			
3	191.7841	15.41	13.93	29.34	43.50	-14.16	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4768
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 11(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:32:22
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

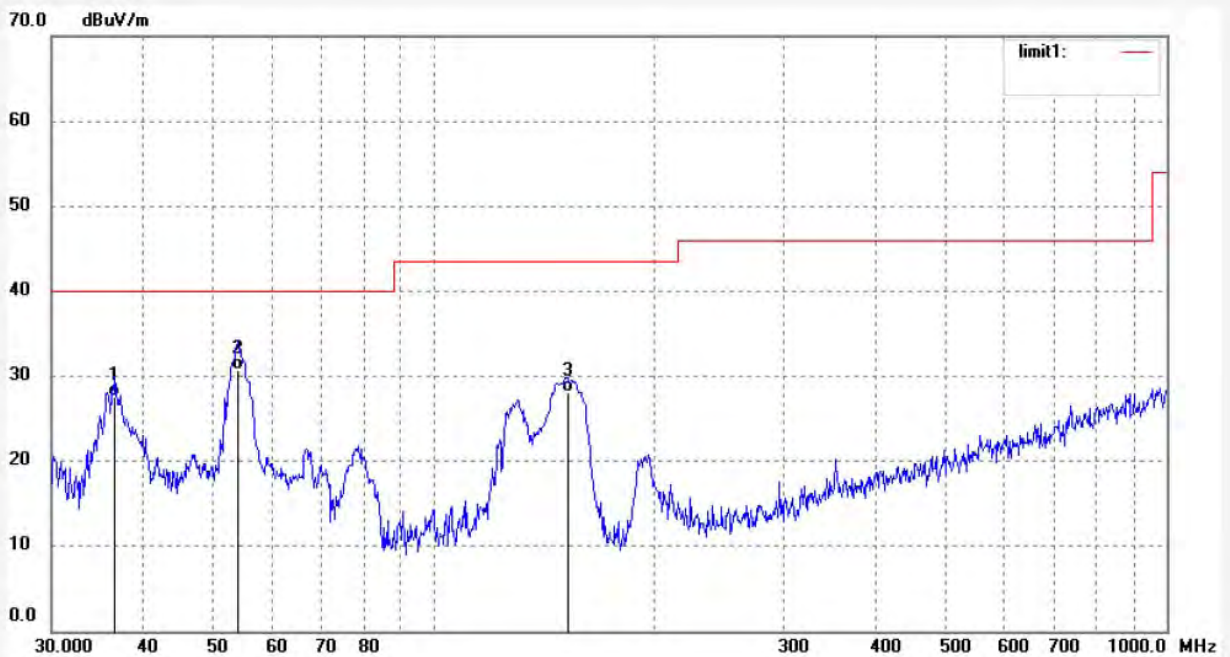

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.6521	12.22	15.31	27.53	40.00	-12.47	QP			
2	53.9451	16.61	14.15	30.76	40.00	-9.24	QP			
3	152.6255	16.54	11.55	28.09	43.50	-15.41	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4744	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/41/33
EUT: MID	Engineer Signature:
Mode: Channel 11(802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

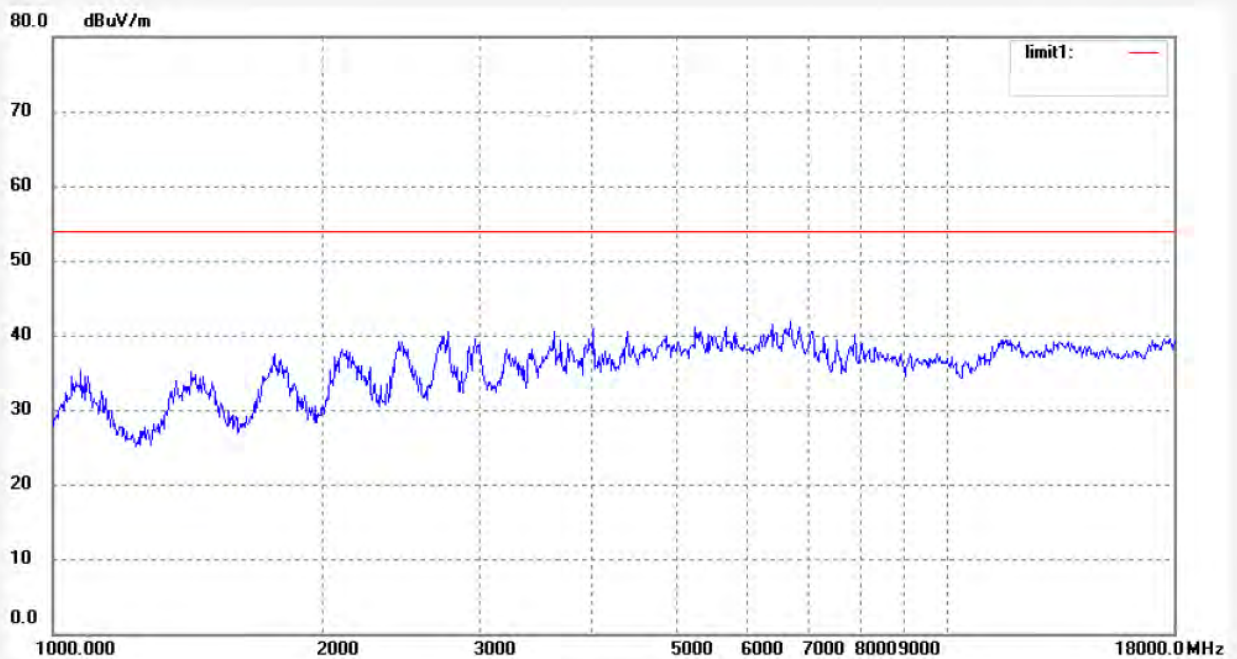

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4745
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 11(802.11b)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/02/01
Time: 9/43/42
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

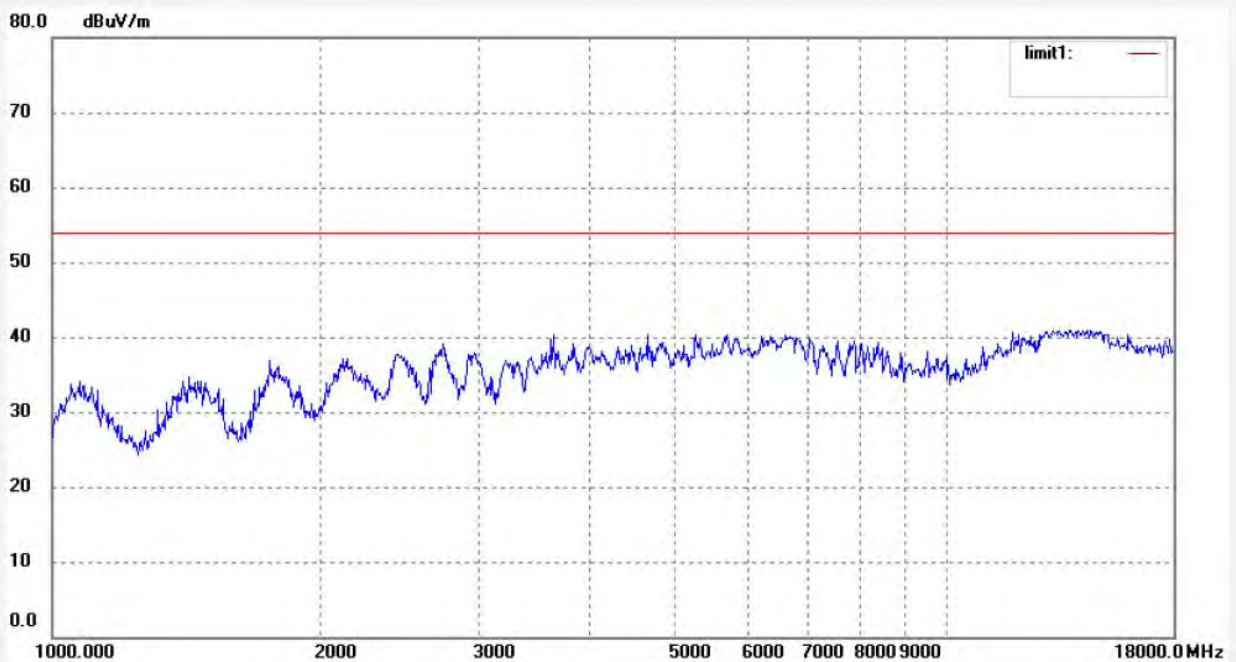

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1605	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:23:55
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

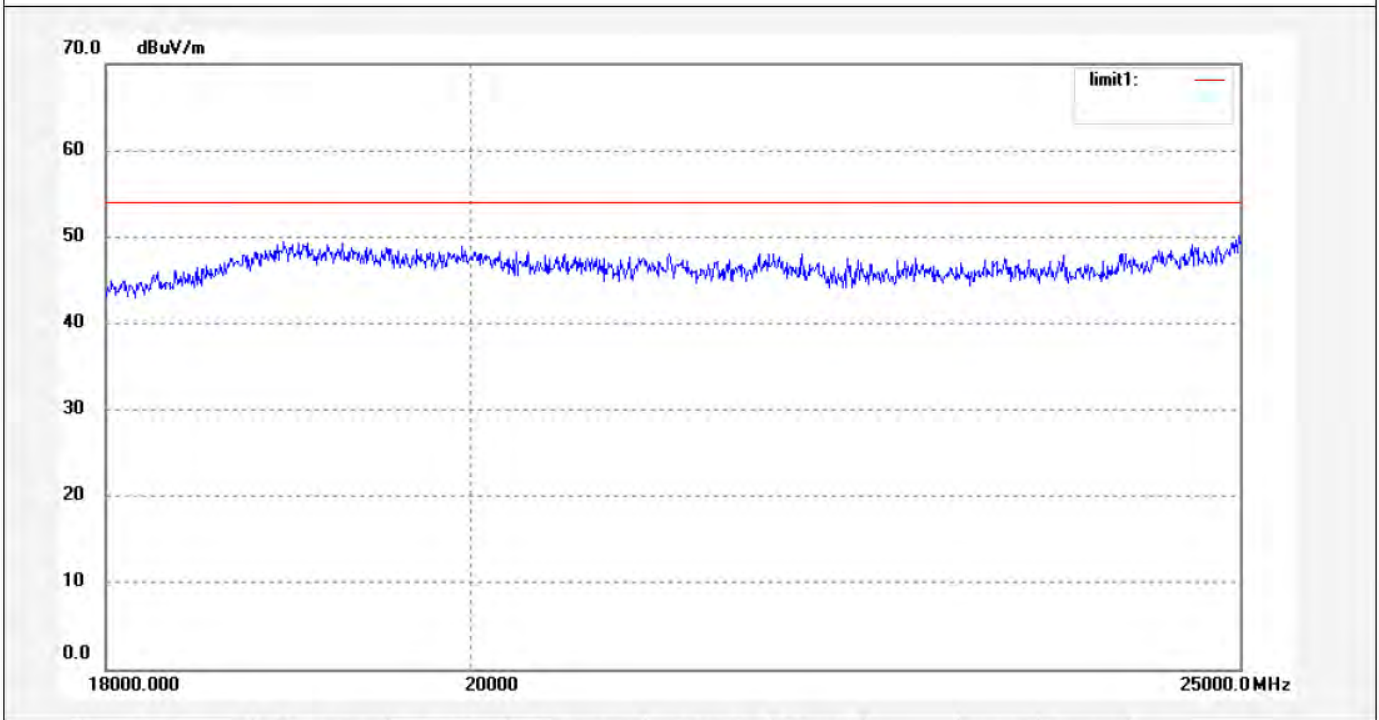

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1606	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:27:11
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11b)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

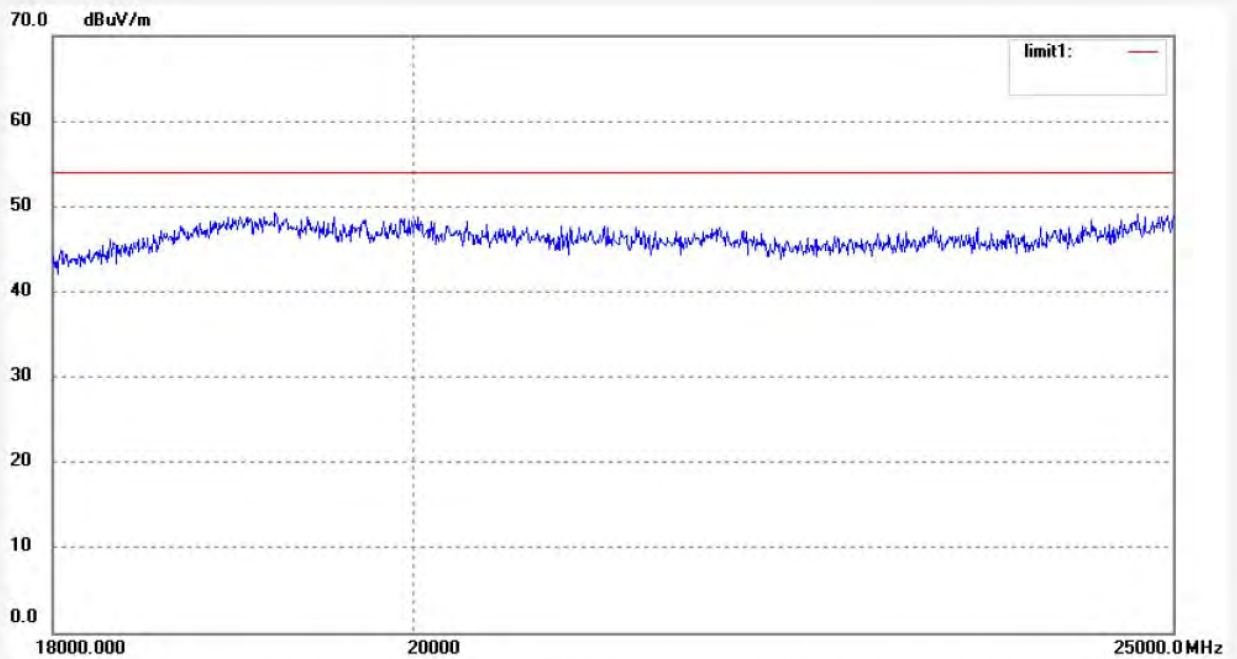

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4770
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 1(802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:36:14
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

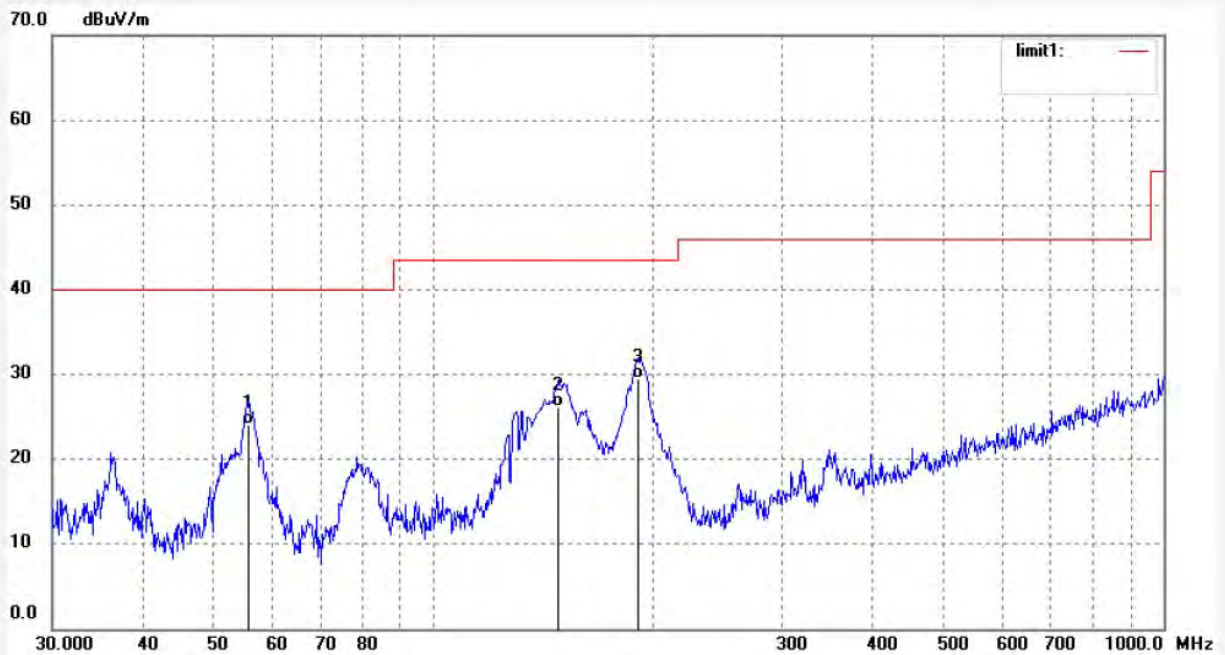

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.6782	10.13	13.94	24.07	40.00	-15.93	QP			
2	148.3951	14.66	11.51	26.17	43.50	-17.33	QP			
3	190.4411	15.55	13.88	29.43	43.50	-14.07	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4771	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10:38:12
EUT: MID	Engineer Signature:
Mode: Channel 1(802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

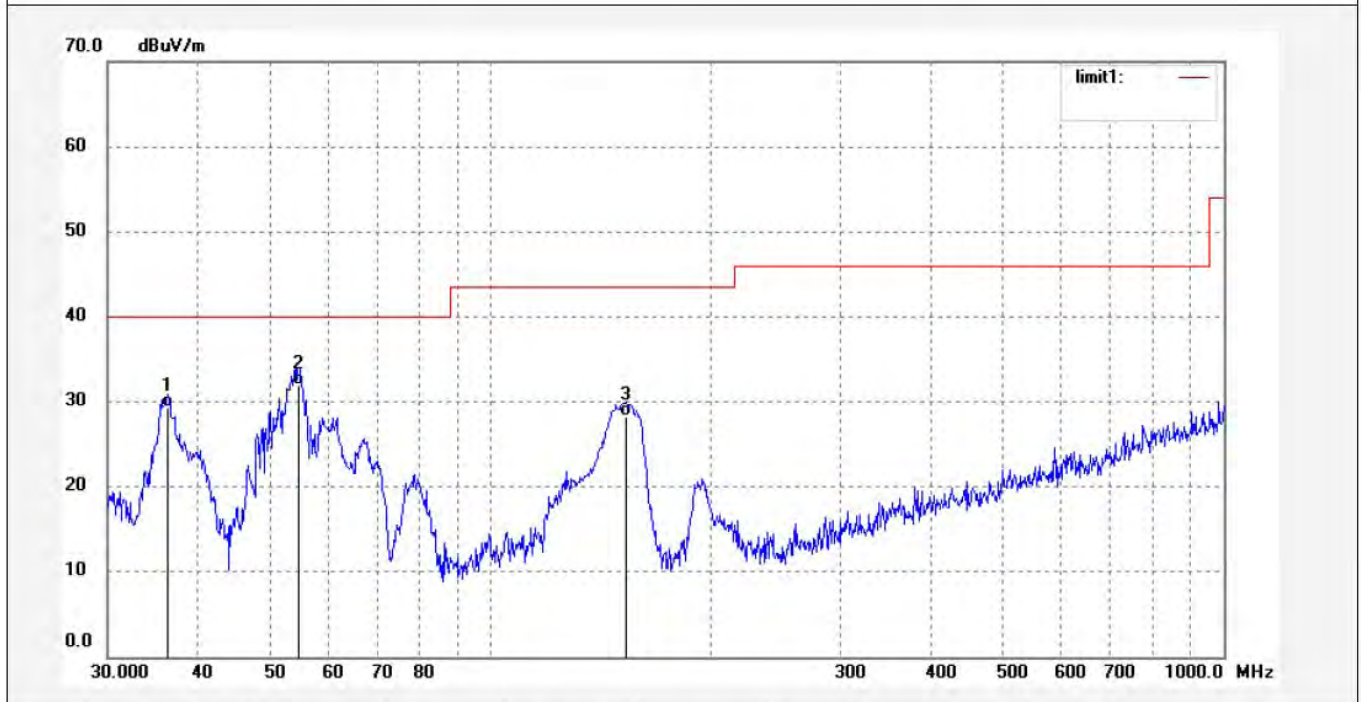

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.2678	13.95	15.40	29.35	40.00	-10.65	QP			
2	54.7086	17.78	14.10	31.88	40.00	-8.12	QP			
3	153.1627	16.66	11.55	28.21	43.50	-15.29	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4747	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/47/11
EUT: MID	Engineer Signature:
Mode: Channel 1(802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

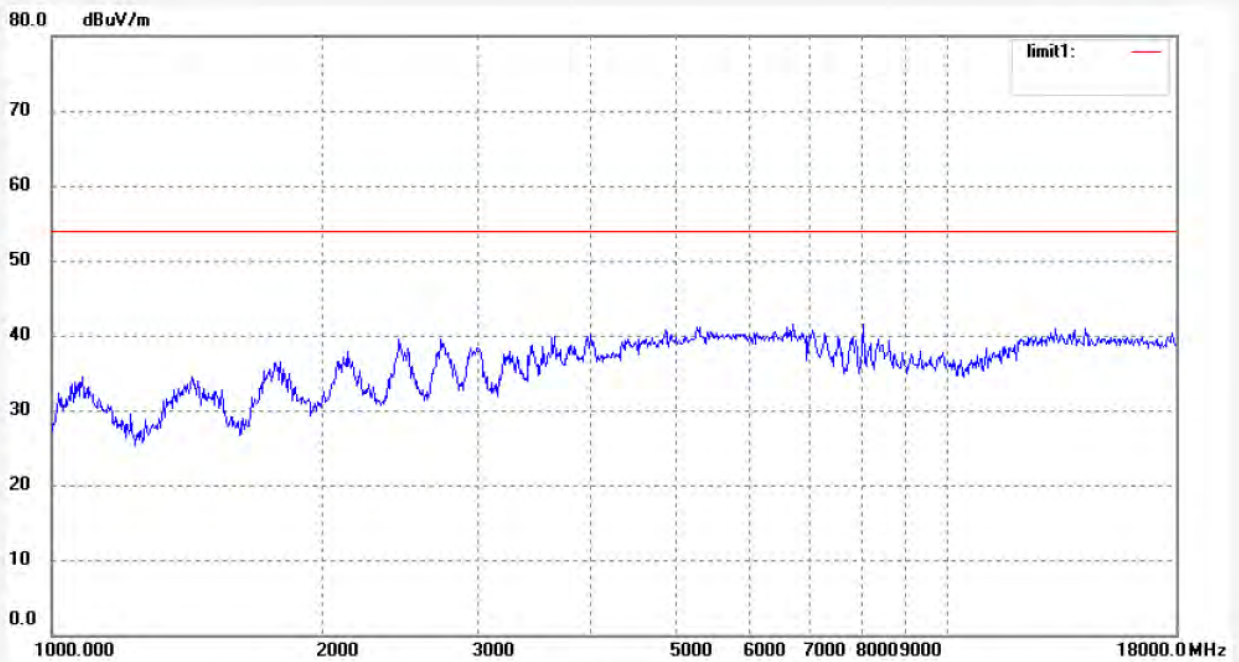

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4746	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/45/37
EUT: MID	Engineer Signature:
Mode: Channel 1(802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

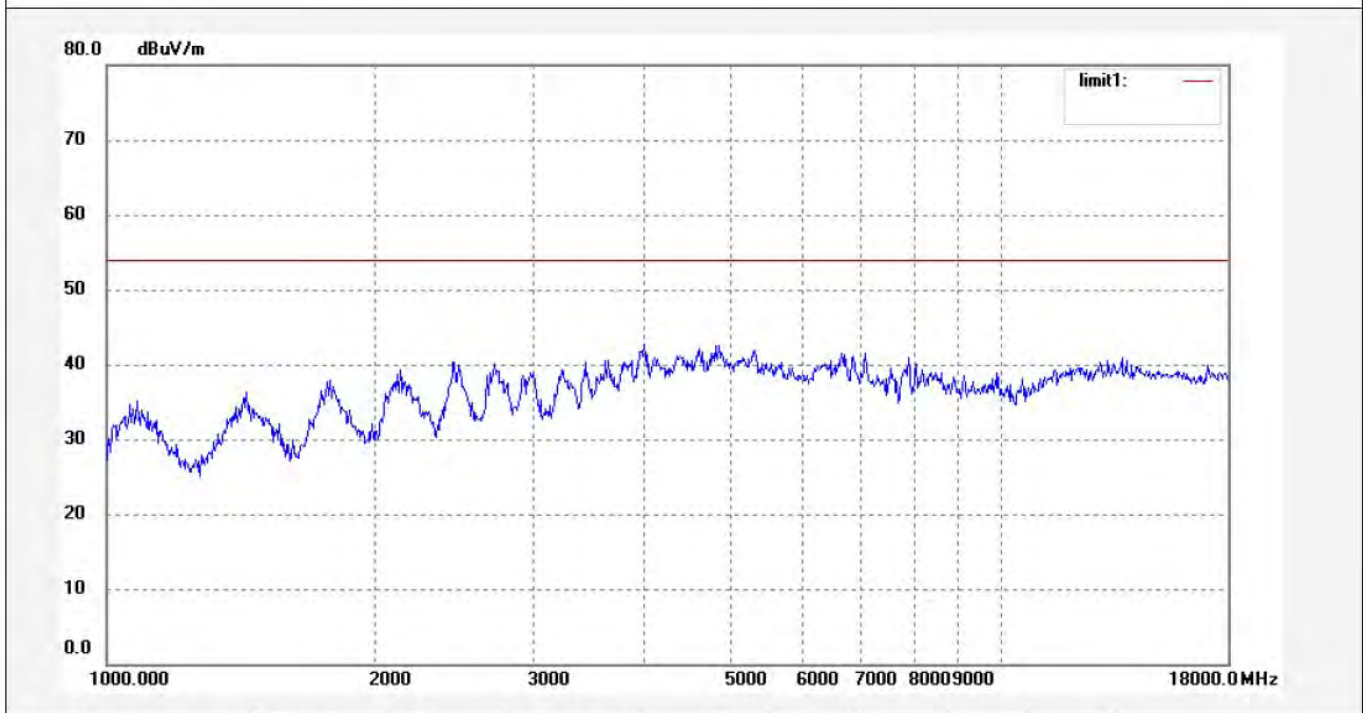

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1608	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:35:56
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

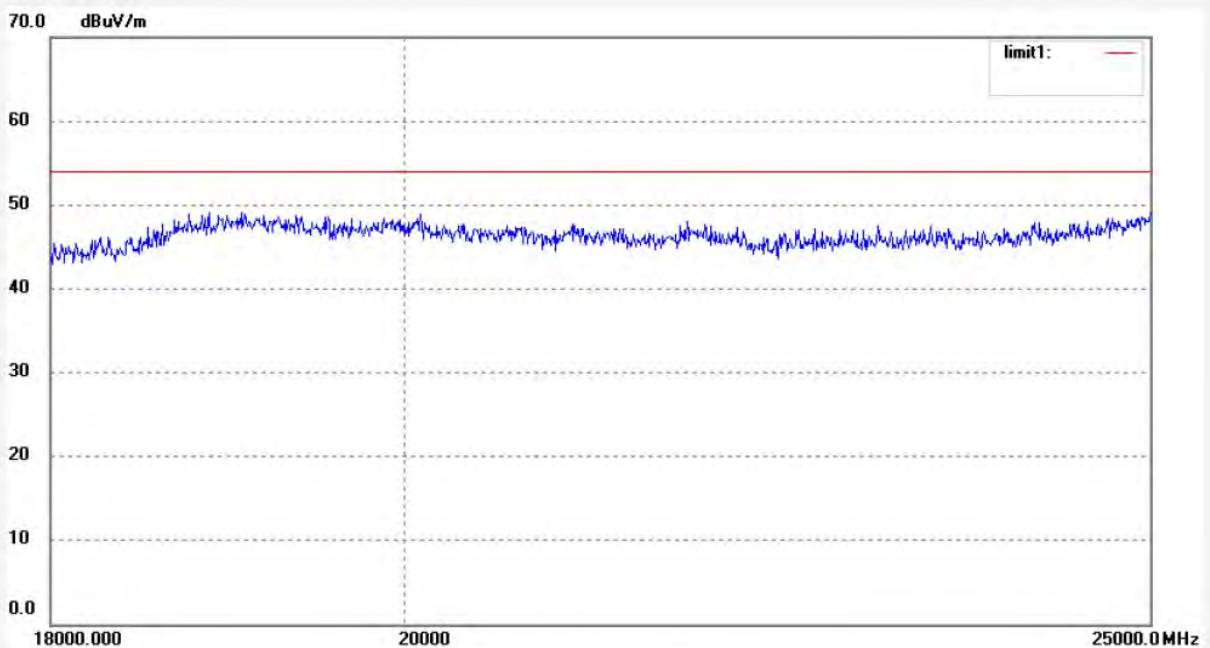

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1607
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: MID
Mode: TX Channel 1 (802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/02/2/
Time: 10:32:05
Engineer Signature: Bob
Distance: 3m

Note: Report No.:ATE20130172

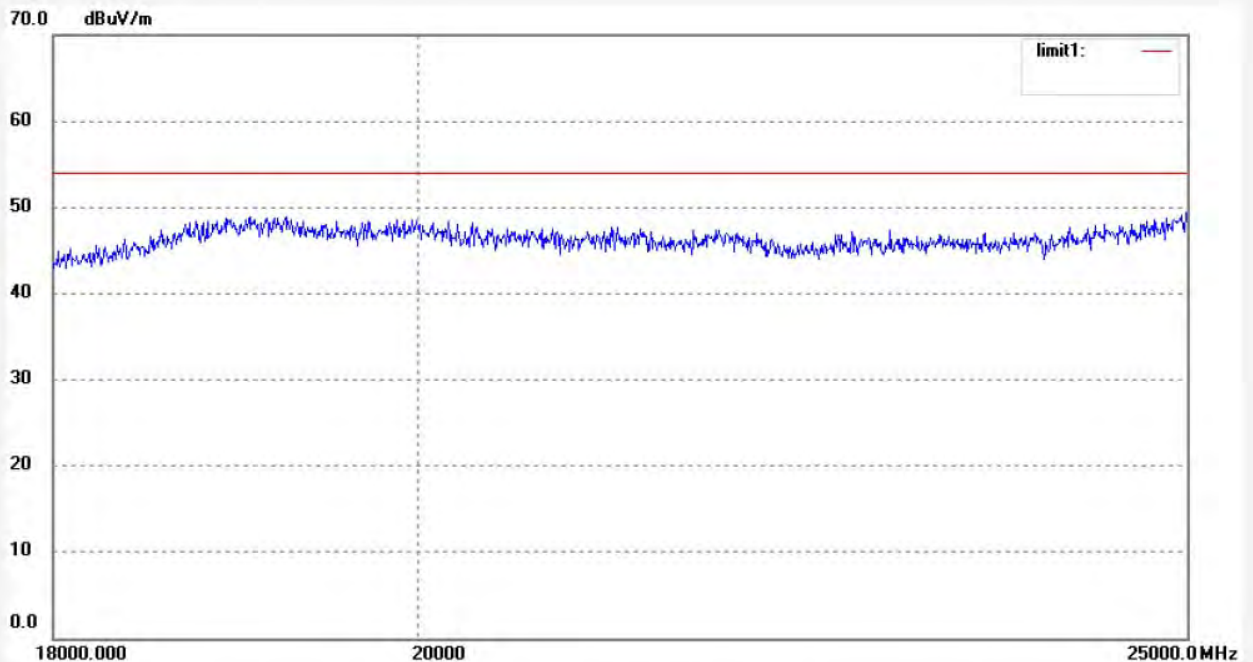

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4773
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 6(802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:41:25
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

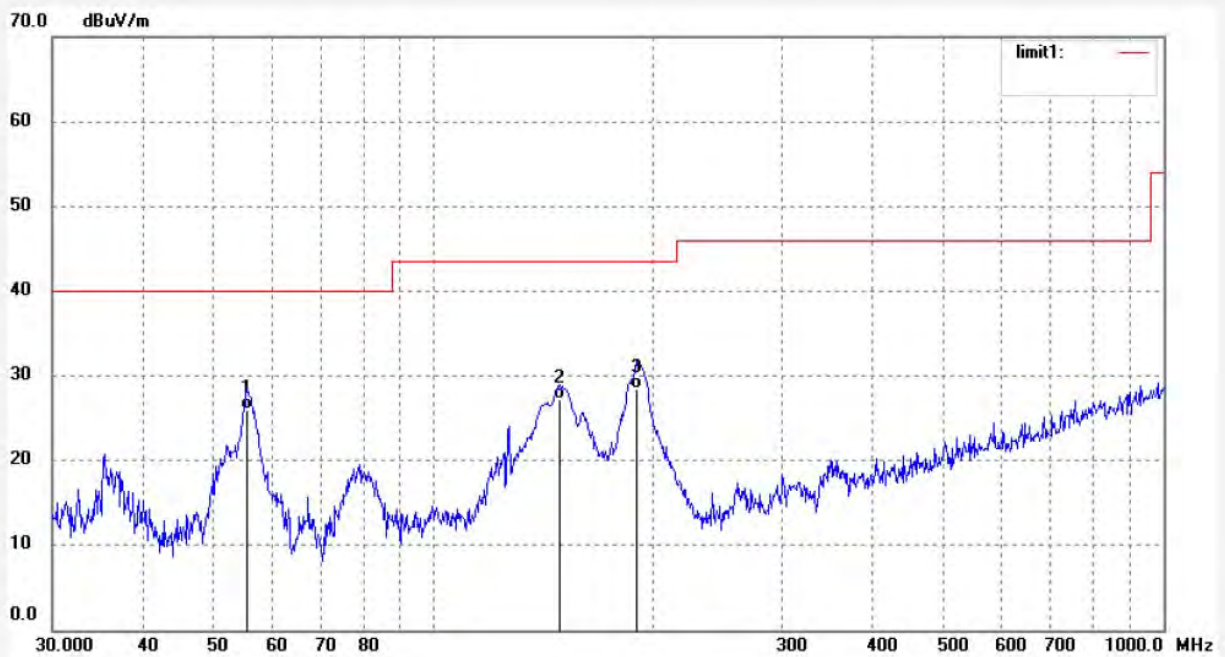

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4829	12.04	13.98	26.02	40.00	-13.98	QP			
2	148.9175	15.74	11.52	27.26	43.50	-16.24	QP			
3	189.7732	14.65	13.87	28.52	43.50	-14.98	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4772	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 10:40:51
EUT: MID	Engineer Signature:
Mode: Channel 6(802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

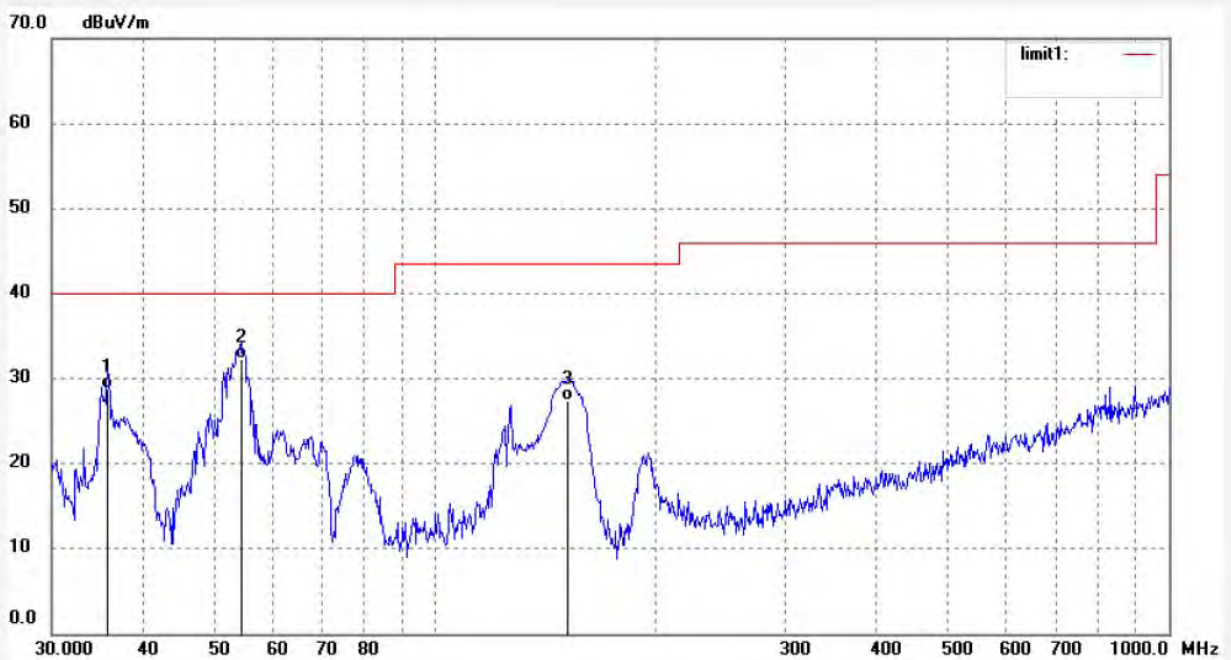

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	35.7617	13.21	15.51	28.72	40.00	-11.28	QP			
2	54.3255	18.21	14.12	32.33	40.00	-7.67	QP			
3	151.5567	15.84	11.54	27.38	43.50	-16.12	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4748
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 6(802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 13/02/01
Time: 9/49/56
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

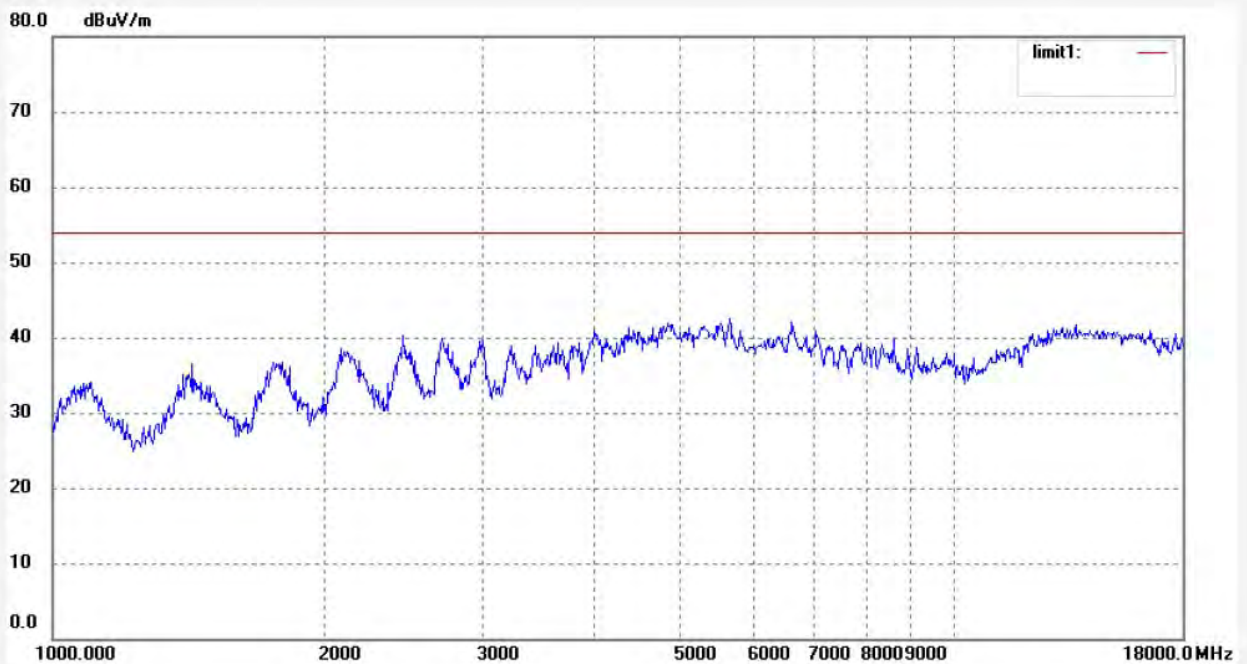

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4749
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 6(802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/02/01
Time: 9/51/59
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

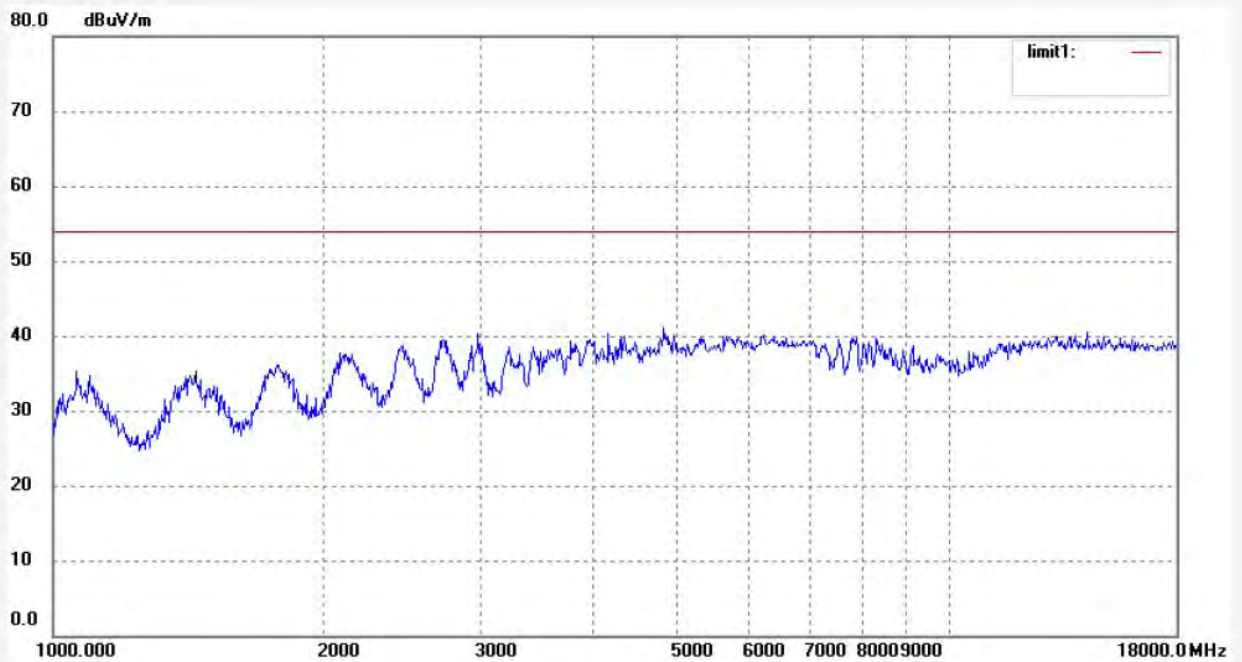

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1609	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:38:38
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 6 (802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

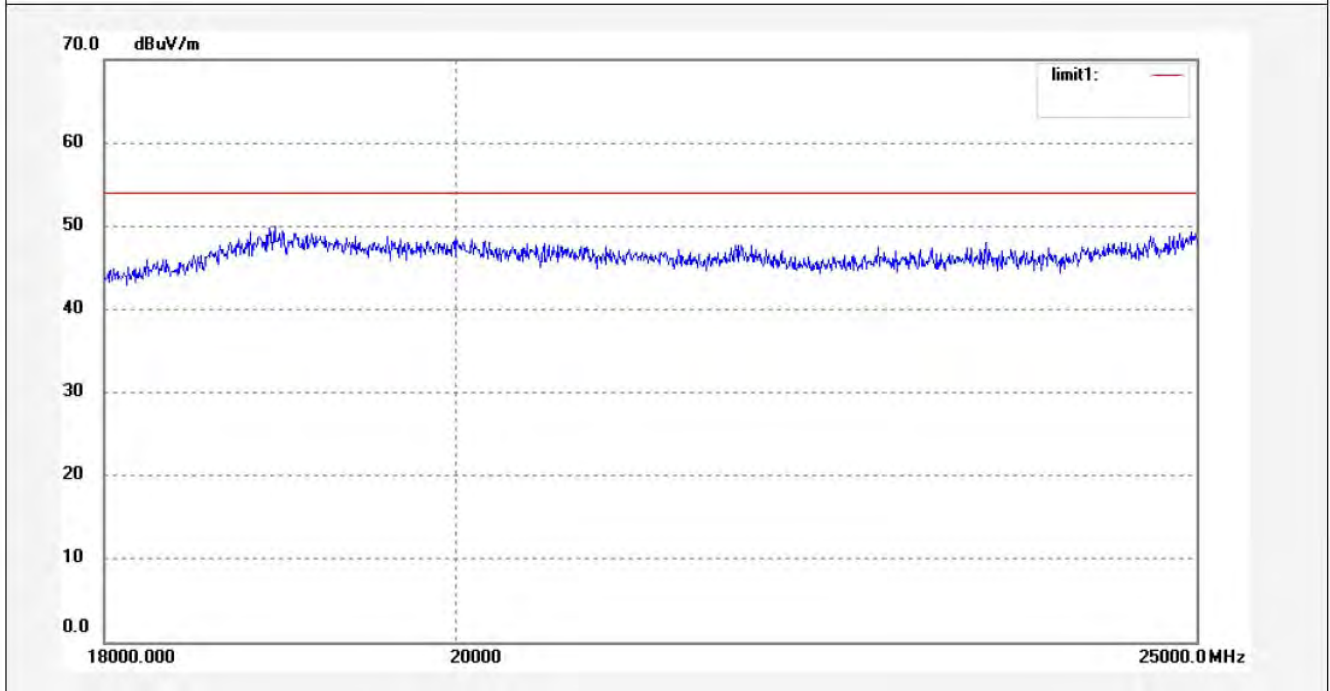

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1610
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 25 C / 50 %
EUT: MID
Mode: TX Channel 6 (802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/02/2/
Time: 10:43:17
Engineer Signature: Bob
Distance: 3m

Note: Report No.:ATE20130172

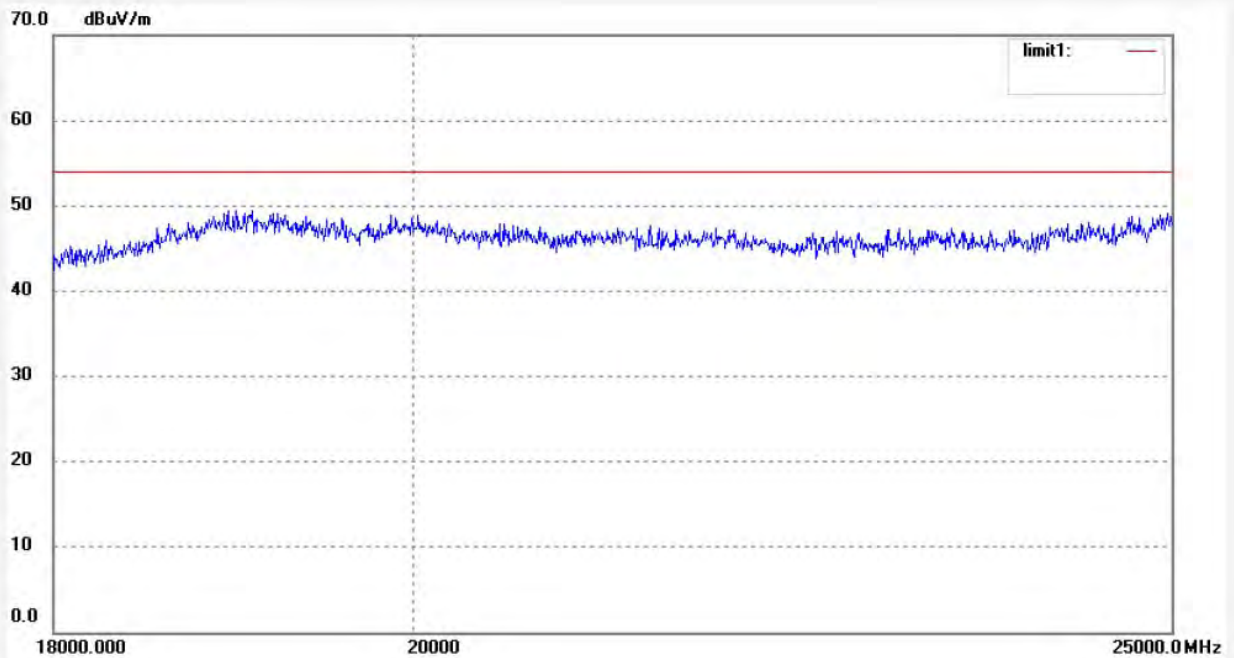

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg.A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4774
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 11(802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:43:51
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

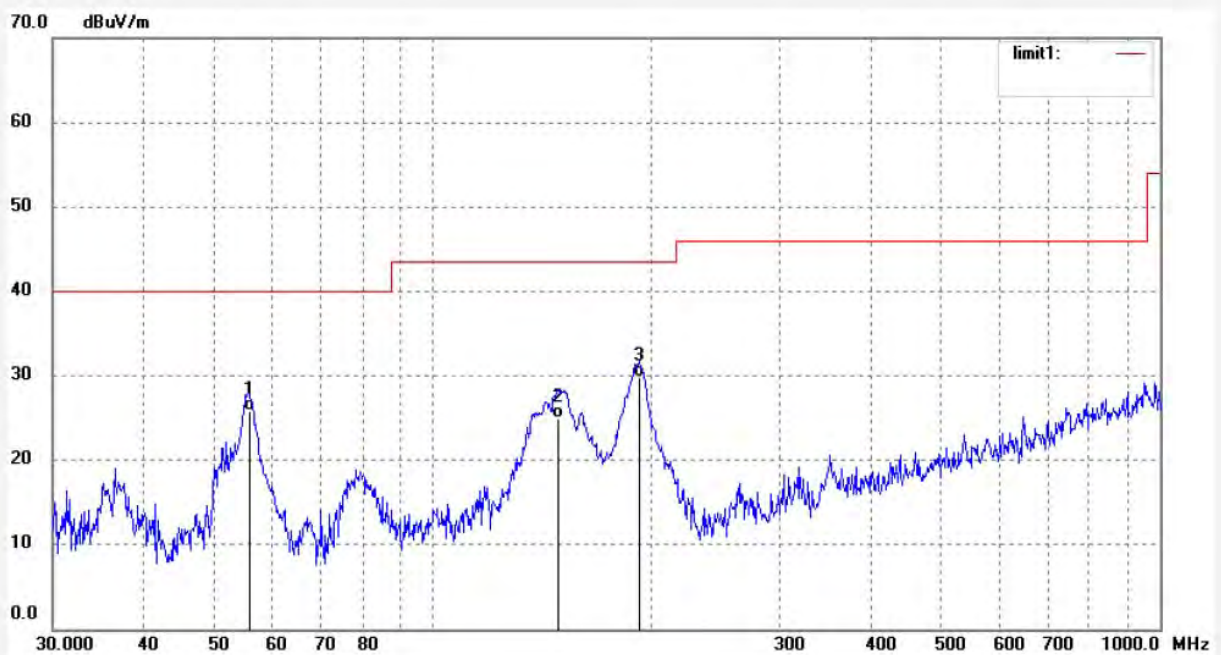

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	56.0708	12.03	13.86	25.89	40.00	-14.11	QP			
2	148.9175	13.36	11.52	24.88	43.50	-18.62	QP			
3	192.4590	15.95	13.95	29.90	43.50	-13.60	QP			



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4775
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 11(802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:45:31
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

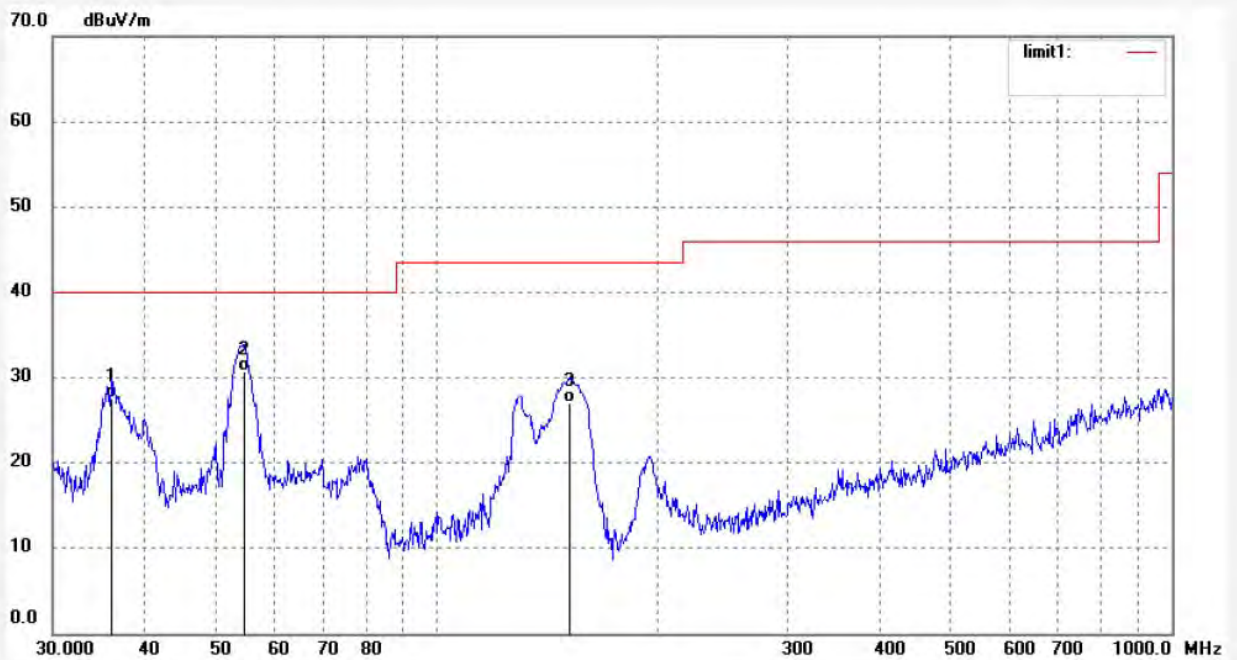

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.1406	12.20	15.43	27.63	40.00	-12.37	QP			
2	54.7086	16.65	14.10	30.75	40.00	-9.25	QP			
3	151.5567	15.45	11.54	26.99	43.50	-16.51	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4751	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/55/04
EUT: MID	Engineer Signature:
Mode: Channel 11(802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

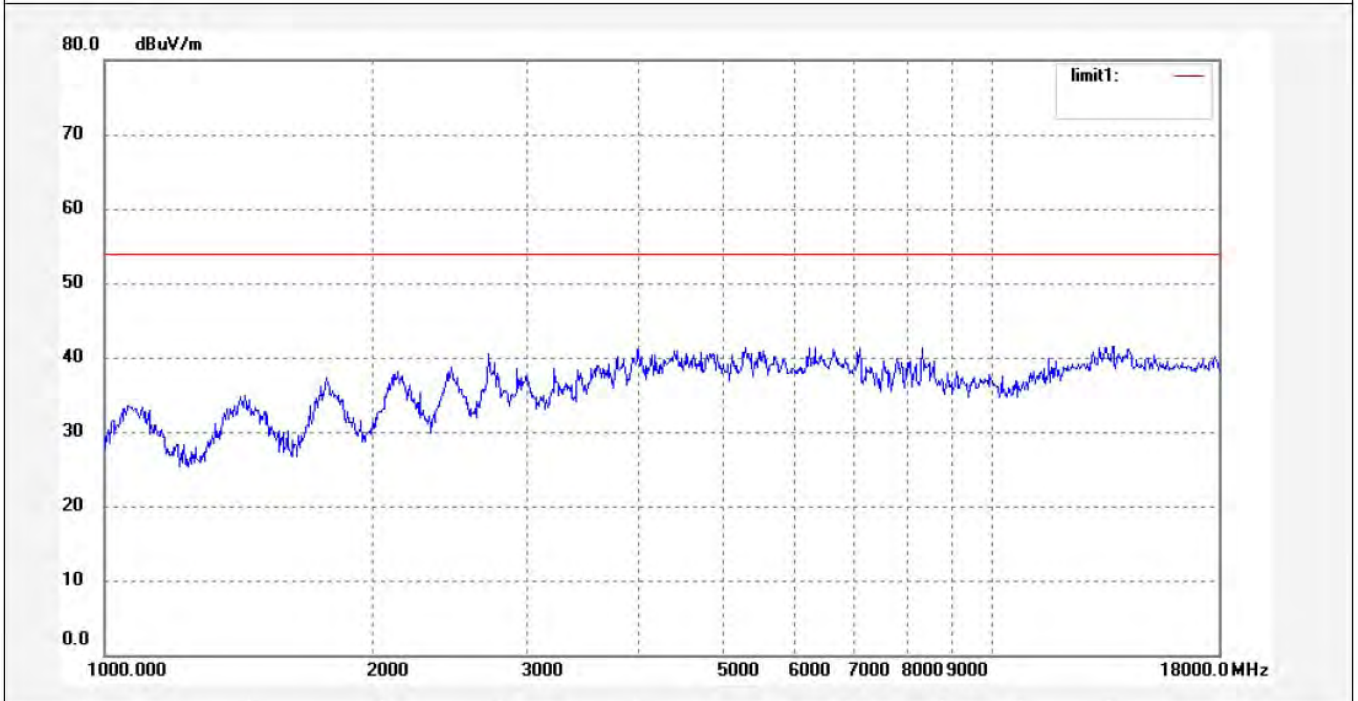

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4750
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 11(802.11g)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/02/01
Time: 9/53/21
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

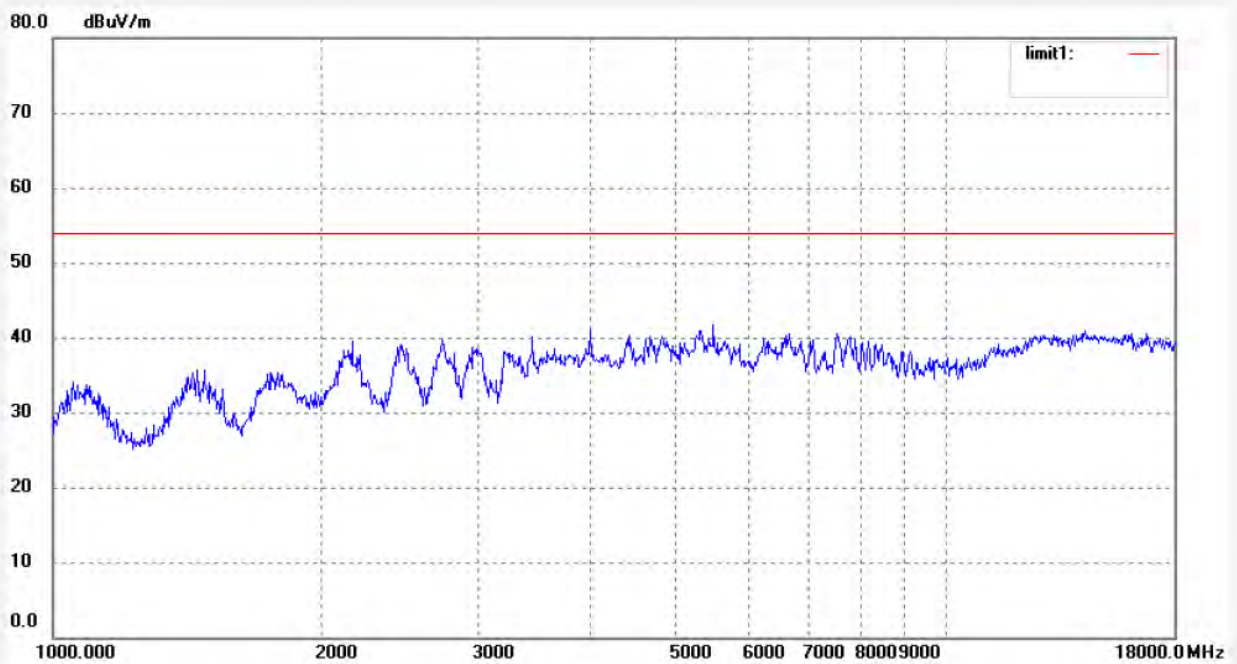

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1612	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:50:47
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

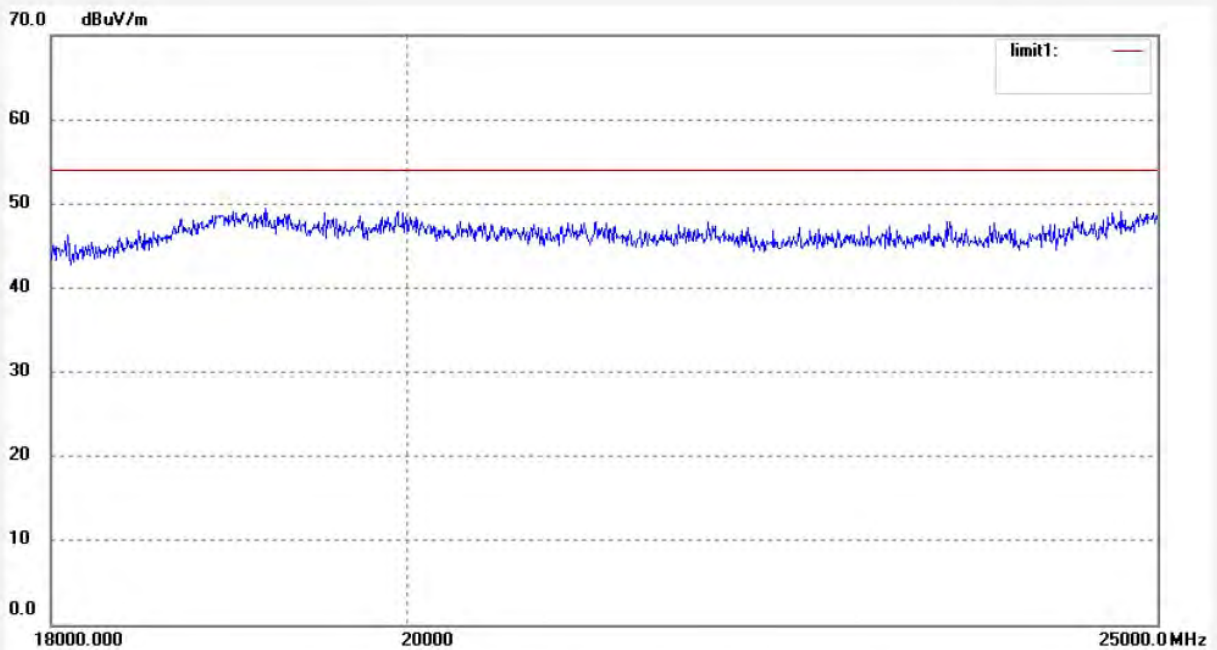

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1611	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 25 C / 50 %	Time: 10:47:55
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 11 (802.11g)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

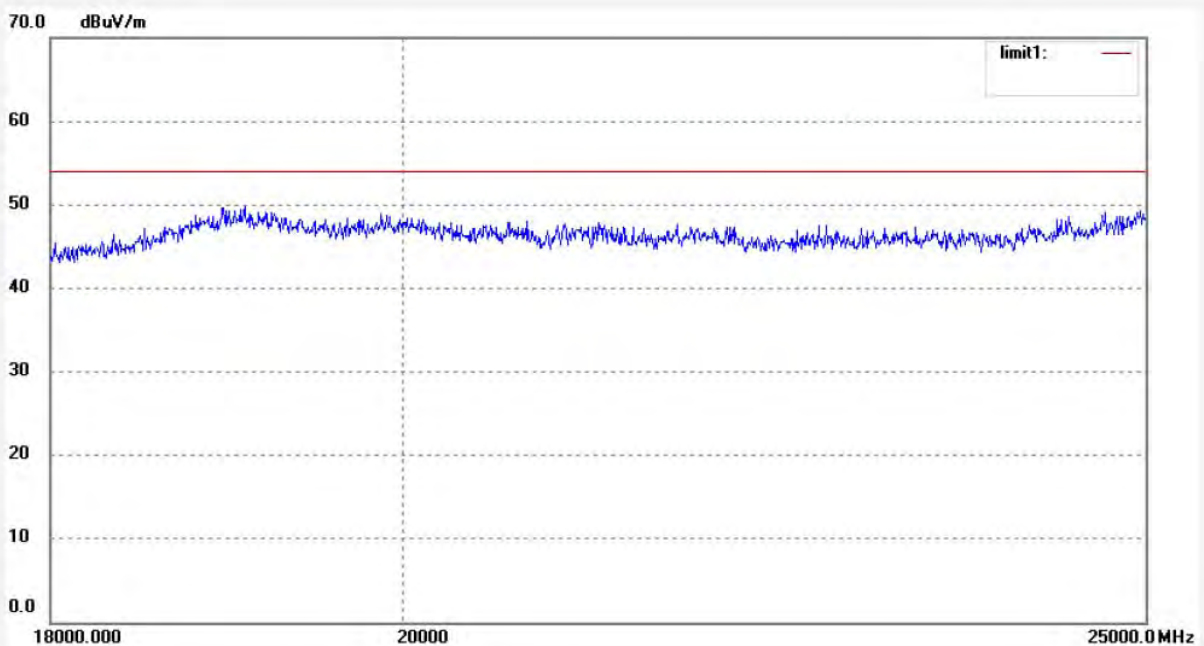

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4777
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 1(802.11n)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:50:11
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

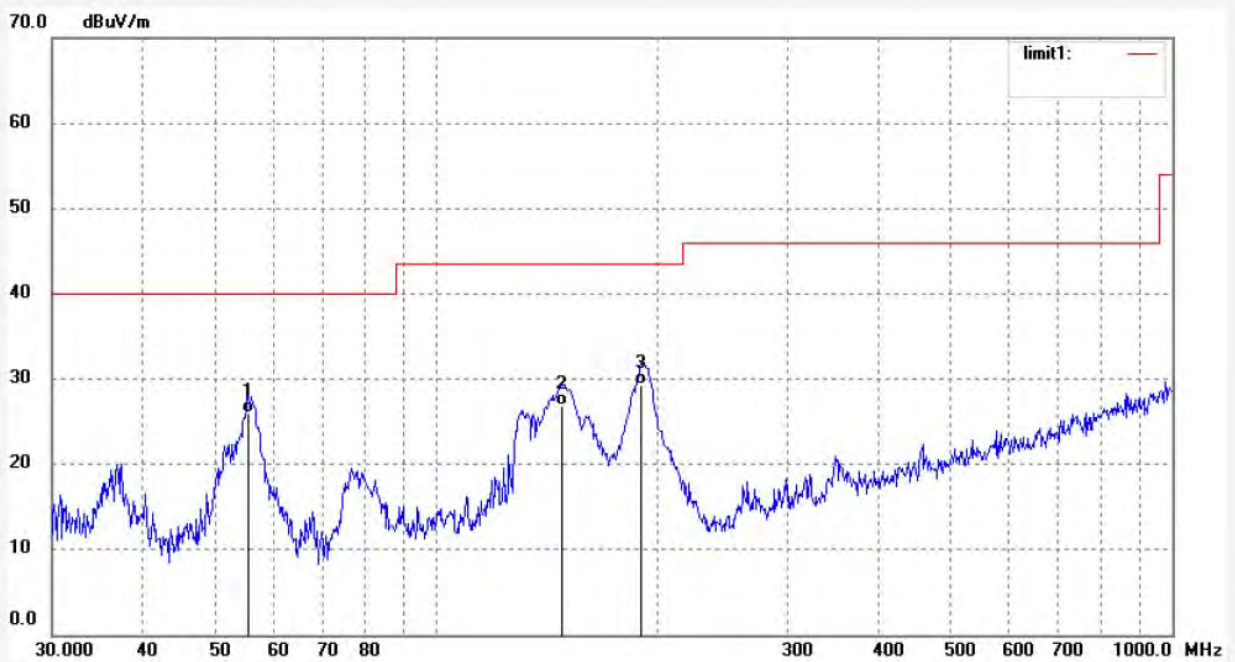

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.4829	12.05	13.98	26.03	40.00	-13.97	QP			
2	148.3951	15.41	11.51	26.92	43.50	-16.58	QP			
3	189.7732	15.47	13.87	29.34	43.50	-14.16	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4776	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 2013/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 11:48:02
EUT: MID	Engineer Signature:
Mode: Channel 1(802.11n)	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

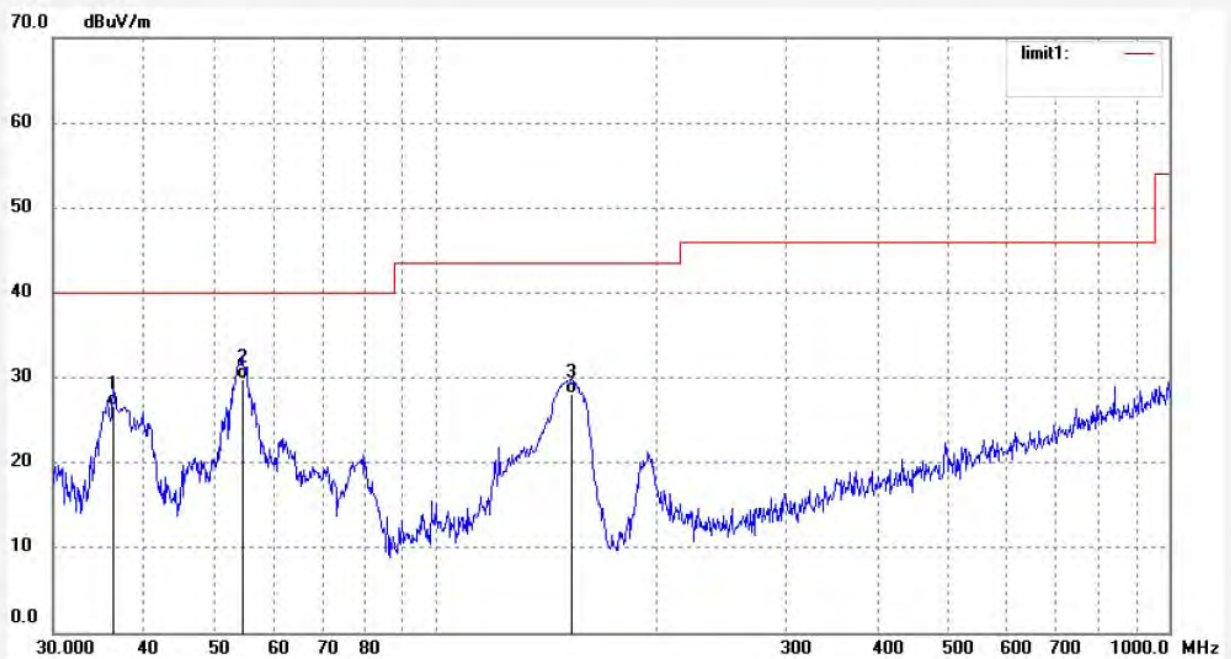

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	36.2678	11.31	15.40	26.71	40.00	-13.29	QP			
2	54.3255	15.74	14.12	29.86	40.00	-10.14	QP			
3	153.1627	16.54	11.55	28.09	43.50	-15.41	QP			




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4752	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/57/31
EUT: MID	Engineer Signature:
Mode: Channel 1(802.11n)20MHz	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

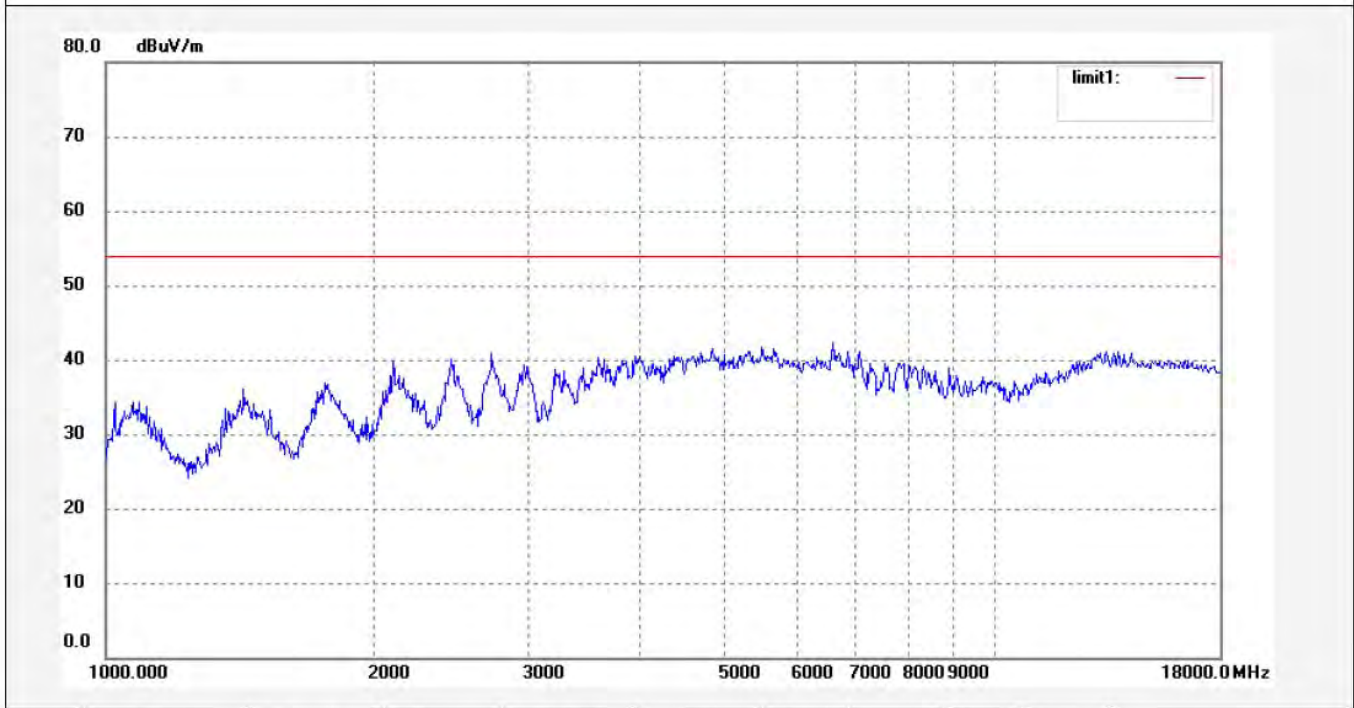

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4753	Polarization: Vertical
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/01
Temp.(C)/Hum.(%) 26 C / 55 %	Time: 9/59/03
EUT: MID	Engineer Signature:
Mode: Channel 1(802.11n)20MHz	Distance: 3m
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

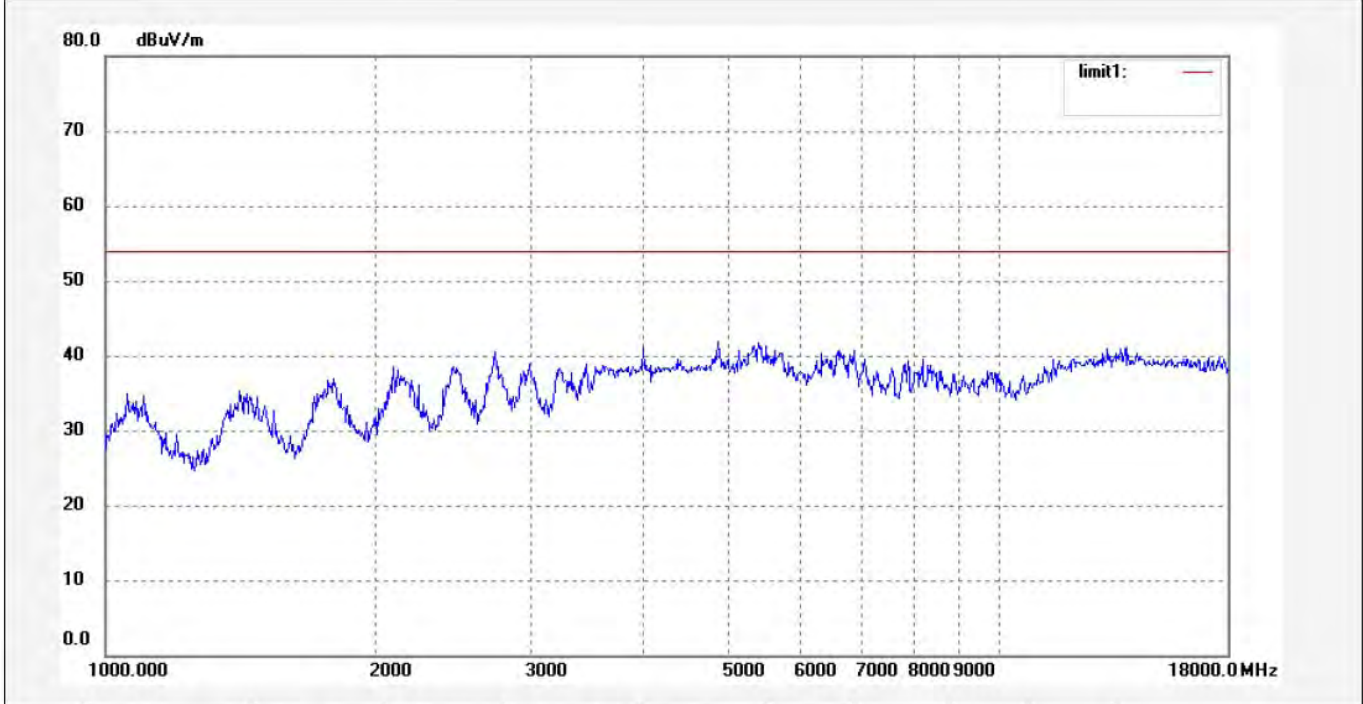

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------




ACCURATE TECHNOLOGY CO., LTD.

F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1617	Polarization: Horizontal
Standard: FCC Class B 3M Radiated	Power Source: AC 120V/60Hz
Test item: Radiation Test	Date: 13/02/2/
Temp.(C)/Hum.(%) 24 C / 48 %	Time: 11:09:37
EUT: MID	Engineer Signature: Bob
Mode: TX Channel 1 (802.11n)	Distance:
Model: VX-S7001	
Manufacturer: Sungworld	

Note: Report No.:ATE20130172

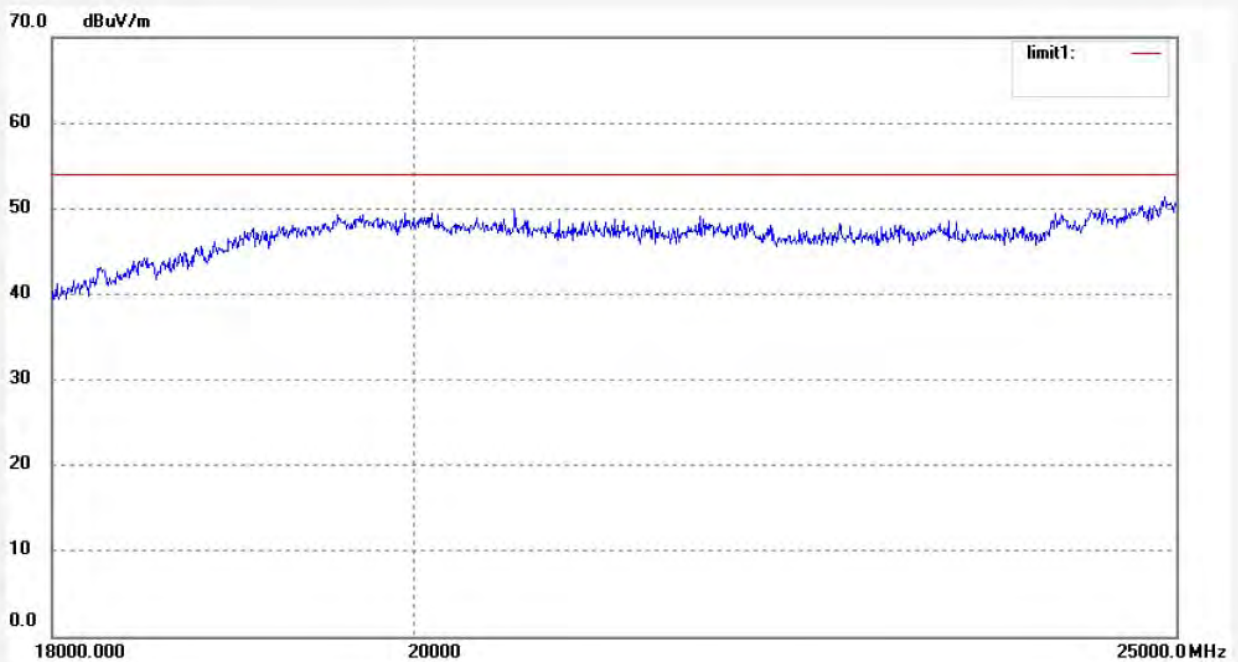

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 966 chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #1618
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 24 C / 48 %
EUT: MID
Mode: TX Channel 1 (802.11n)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Vertical
Power Source: AC 120V/60Hz
Date: 13/02/2/
Time: 11:14:41
Engineer Signature: Bob
Distance:

Note: Report No.:ATE20130172

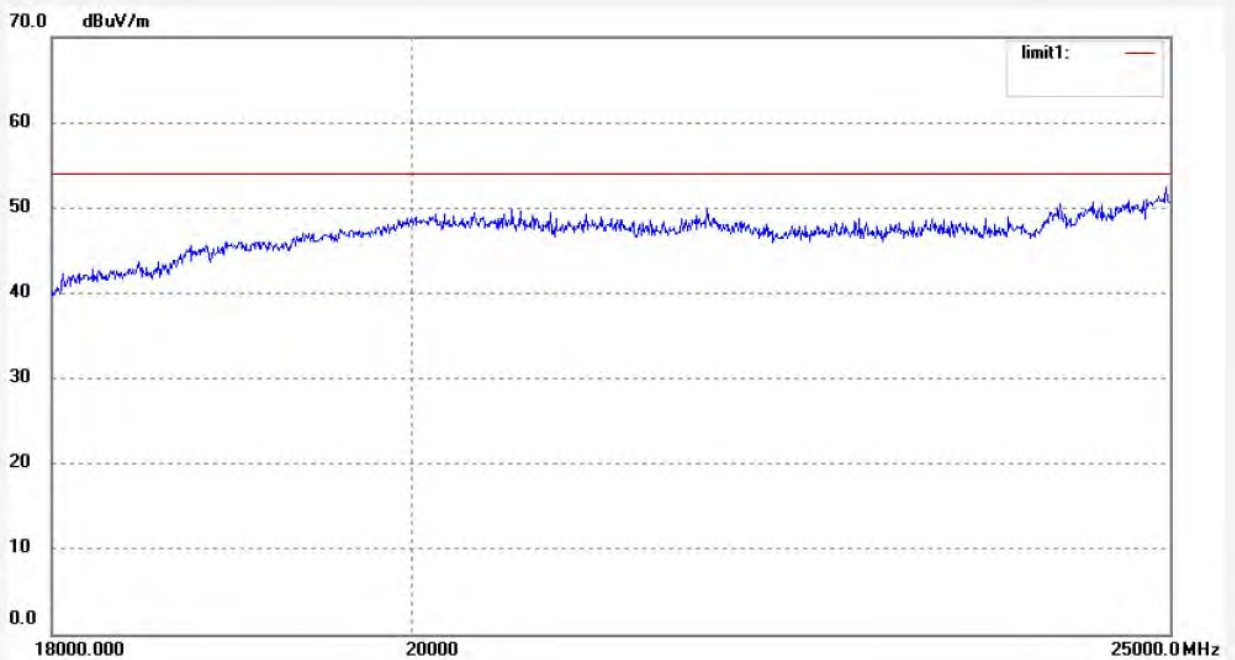

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
-----	-------------	------------------	-------------	-----------------	----------------	-------------	----------	-------------	---------------	--------



ACCURATE TECHNOLOGY CO., LTD.


F1,Bldg,A,Changyuan New Material Port Keyuan Rd,
Science & Industry Park,Nanshan Shenzhen,P.R.China

Site: 2# Chamber
Tel:+86-0755-26503290
Fax:+86-0755-26503396

Job No.: Bob #4778
Standard: FCC Class B 3M Radiated
Test item: Radiation Test
Temp.(C)/Hum.(%) 26 C / 55 %
EUT: MID
Mode: Channel 6(802.11n)
Model: VX-S7001
Manufacturer: Sungworld

Polarization: Horizontal
Power Source: AC 120V/60Hz
Date: 2013/02/01
Time: 10:52:30
Engineer Signature:
Distance: 3m

Note: Report No.:ATE20130172

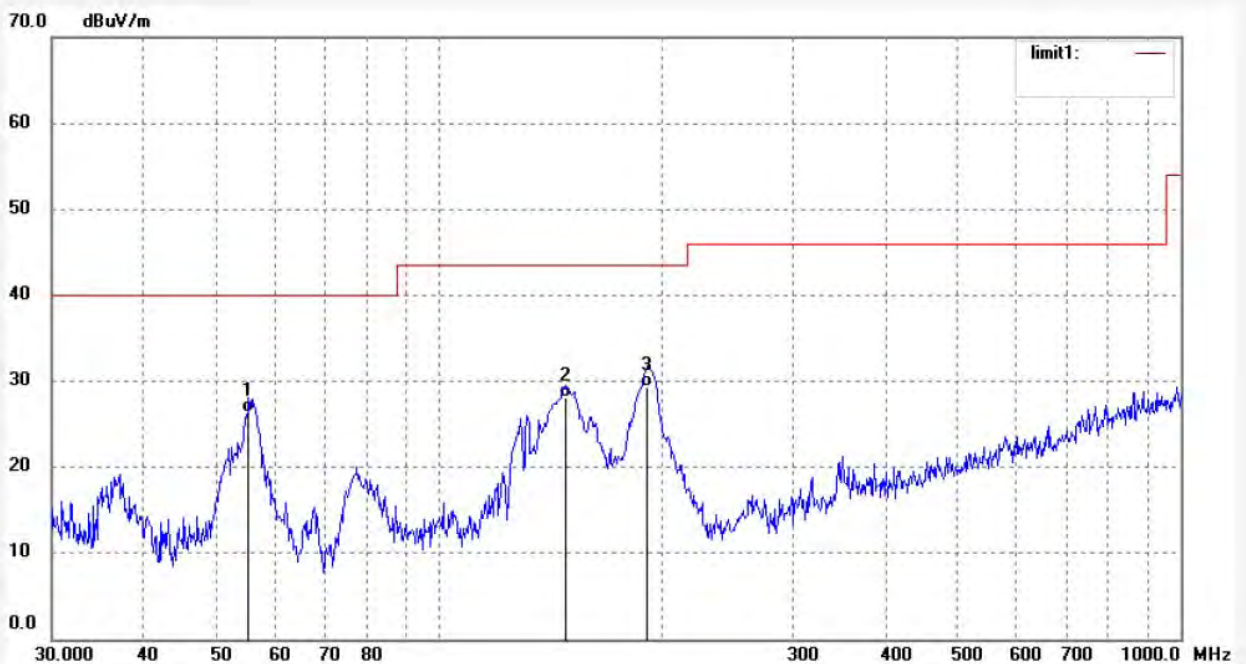

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Degree (deg.)	Remark
1	55.2883	12.29	14.01	26.30	40.00	-13.70	QP			
2	147.8747	16.54	11.51	28.05	43.50	-15.45	QP			
3	190.4411	15.47	13.88	29.35	43.50	-14.15	QP			