

Partial FCC Test Report (Part 24)

Report No.: RFBBGM-WTW-P22010900-1

FCC ID: WIYLE910C1NF

Test Model: LE910C1-NF

Received Date: Feb. 06, 2022

Test Date: Feb. 21 ~ Apr. 08, 2022

Issued Date: Apr. 21, 2022

Applicant: CASTLES TECHNOLOGY CO., LTD.

Address: 6F, NO. 207-5, SEC. 3, BEIXIN RD., XINDIAN DISTRICT, NEW TAIPEI CITY
23143, TAIWAN (R. O. C.)

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location (1): No.19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, Taiwan

Test Location(2): No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan

FCC Registration /

Designation Number(1): 788550 / TW0003

FCC Registration /

Designation Number(2): 281270 / TW0032



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty.....	5
2.2 Test Site and Instruments.....	6
3 General Information	7
3.1 General Description of EUT.....	7
3.2 Configuration of System under Test.....	9
3.2.1 Description of Support Units.....	9
3.3 Test Mode Applicability and Tested Channel Detail.....	10
3.4 EUT Operating Conditions.....	11
3.5 General Description of Applied Standards and References.....	11
4 Test Types and Results	12
4.1 Output Power Measurement.....	12
4.1.1 Limits of Output Power Measurement.....	12
4.1.2 Test Procedures.....	12
4.1.3 Test Setup.....	12
4.1.4 Test Results.....	13
4.2 Radiated Emission Measurement.....	19
4.2.1 Limits of Radiated Emission Measurement.....	19
4.2.2 Test Procedure.....	19
4.2.3 Deviation from Test Standard.....	19
4.2.4 Test Setup.....	20
4.2.5 Test Results.....	21
5 Pictures of Test Arrangements	27
Appendix – Information of the Testing Laboratories	28

Release Control Record

Issue No.	Description	Date Issued
RFBBGM-WTW-P22010900-1	Original release	Apr. 21, 2022

1 Certificate of Conformity

Product: WCDMA and LTE cellular wireless module

Brand:  **CASTLES
TECHNOLOGY**

Test Model: LE910C1-NF

Sample Status: Identical Prototype


Applicant: CASTLES TECHNOLOGY CO., LTD.

Test Date: Feb. 21 ~ Apr. 08, 2022

Standards: FCC Part 24, Subpart E

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : , **Date:** Apr. 21, 2022
Polly Chien / Specialist

Approved by : , **Date:** Apr. 21, 2022
Jeremy Lin / Project Engineer

2 Summary of Test Results

Applied Standard: FCC Part 24 & Part 2			
FCC Clause	Test Item	Result	Remarks
2.1046 24.232	Equivalent isotropically radiated power	Pass	Meet the requirement of limit.
24.232(d)	Peak To Average Ratio	N/A	Refer to Note 1
2.1047	Modulation Characteristics	N/A	Refer to Note 1
2.1055 24.235	Frequency Stability	N/A	Refer to Note 1
2.1049	Occupied Bandwidth	N/A	Refer to Note 1
24.238(b)	Band Edge Measurements	N/A	Refer to Note 1
2.1051 24.238	Conducted Spurious Emissions	N/A	Refer to Note 1
2.1053 24.238	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -32.96dB at 298.51MHz.

Note:

1. This report is a partial report. Therefore, only test item of Equivalent Isotropic Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to DEKRA report no.: 1980255R-HPUSP17V00-B & 1980255R-HPUSP17V00-C (LTE Module, Brand: Telit, Model: LE910C4-NF, FCC ID: RI7LE910CXNF).
2. Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~ 1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

2.2 Test Site and Instruments


Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver Rohde & Schwarz	ESR3	102782	Dec. 10, 2021	Dec. 09, 2022
Spectrum Analyzer Rohde & Schwarz	FSW43	460230	Jan. 07, 2022	Jan. 06, 2023
BILOG Antenna SCHWARZBECK	VULB9168	9168-1213	Oct. 27, 2021	Oct. 26, 2022
HORN Antenna RF SPIN	DRH18-E	210103A18E	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-1048	Nov. 14, 2021	Nov. 13, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC330N	980782	Jan. 17, 2022	Jan. 16, 2023
Preamplifier EMCI	EMC118A45SE	980808	Dec. 30, 2021	Dec. 29, 2022
Preamplifier EMCI	EMC184045SE	980788	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC104-SM-SM-(9 000+2000+1000)	201243+ 201231+ 210102	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMCCFD400-NM-N M-(9000+300+500)	201236+ 201235+ 201233	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC101G-KM-KM- (5000+3000+2000)	201260+201257+201254	Jan. 17, 2022	Jan. 16, 2023
Software BV ADT	ADT_Radiated_V7. 6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Max-Full	MF-7802BS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA
Spectrum Analyzer ROHDE & SCHWARZ	FSV40	100979	Mar. 29, 2021	Mar. 28, 2022
Radio Communication Analyzer Anritsu	MT8820C	6201010284	Dec. 24, 2021	Dec. 23, 2022

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in WM Chamber 8.

3 General Information

3.1 General Description of EUT

Product	WCDMA and LTE cellular wireless module		
Brand			
Test Model	LE910C1-NF		
Sample Status	Identical Prototype		
Power Supply Rating	3.8 Vdc		
Modulation Type	WCDMA: QPSK HSDPA: BPSK HSUPA: QPSK LTE: QPSK, 16QAM		
Operating Frequency	WCDMA Band 2	1852.4~1907.6MHz	
	LTE Band 2 (Channel Bandwidth 1.4MHz)	1850.7~1909.3MHz	
	LTE Band 2 (Channel Bandwidth 3MHz)	1851.5~1908.5MHz	
	LTE Band 2 (Channel Bandwidth 5MHz)	1852.5~1907.5MHz	
	LTE Band 2 (Channel Bandwidth 10MHz)	1855.0~1905.0MHz	
	LTE Band 2 (Channel Bandwidth 15MHz)	1857.5~1902.5MHz	
	LTE Band 2 (Channel Bandwidth 20MHz)	1860.0~1900.0MHz	
Max. EIRP Power	WCDMA Band 2	325.087mW(25.12dBm)	
		QPSK	16QAM
	LTE Band 2 (Channel Bandwidth 1.4MHz)	224.388mW (23.51dBm)	181.552mW (22.59dBm)
	LTE Band 2 (Channel Bandwidth 3MHz)	226.464mW (23.55dBm)	184.502mW (22.66dBm)
	LTE Band 2 (Channel Bandwidth 5MHz)	224.905mW (23.52dBm)	184.077mW (22.65dBm)
	LTE Band 2 (Channel Bandwidth 10MHz)	226.464mW (23.55dBm)	184.077mW (22.65dBm)
	LTE Band 2 (Channel Bandwidth 15MHz)	224.905mW (23.52dBm)	181.134mW (22.58dBm)
	LTE Band 2 (Channel Bandwidth 20MHz)	232.274mW (23.66dBm)	177.419mW (22.49dBm)
Antenna Type	Refer to Note		
Antenna Connector	Refer to Note		
Accessory Device	NA		
Cable Supplied	NA		

Note:


1. This report is a partial report. Therefore, only test item of Equivalent Isotropic Radiated Power and Radiated Spurious Emissions tests were performed for this report. Other testing data please refer to DEKRA report no.: 1980255R-HPUSP17V00-B & 1980255R-HPUSP17V00-C (LTE Module, Brand: Telit, Model: LE910C4-NF, FCC ID: RI7LE910CXNF). For radiated spurious emission test, the worst mode according to the maximum conducted power reported by the original module.

2. The antenna information of POS Terminal is listed as below.

Antenna Type	Dipole	Brand	Aristotle
Antenna Connector	SMA R/A PLUG	Model	RFA-US-T1000G-2M-A5
Antenna Gain (dBi)	WCDMA Band 2	0.7	
	LTE Band 2	0.7	


*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3. The EUT was installed in a specific End-product.


Product	Brand	Model
POS Terminal	 CASTLES TECHNOLOGY	UPT1000B

4. The EUT support Category 1 only. Above bandwidth 10MHz of 16QAM modulation supports only 25RB.

3.2 Configuration of System under Test

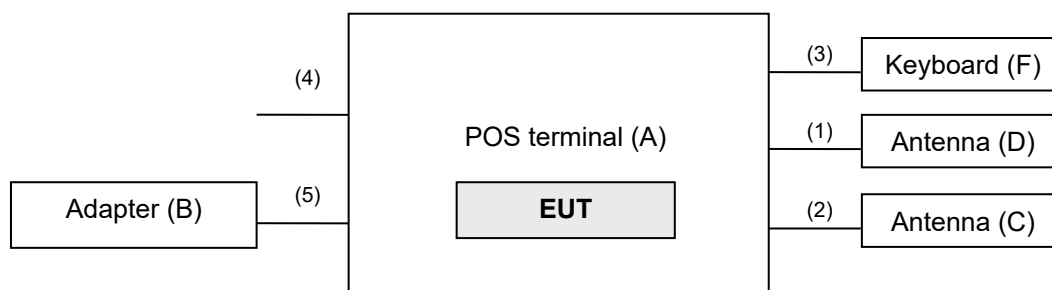



Remote site



3.2.1 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	POS Terminal	 CASTLES TECHNOLOGY	UPT1000B	NA	WIYUPT1000-BV	Provided by client.
B.	Adapter	 CASTLES TECHNOLOGY	PW04-945A	NA	NA	Provided by client.
C.	Antenna	Aristotle	RFA-US-T1000G-2M-A5	NA	NA	Provided by client.
D.	Antenna	Aristotle	RFA-25-T100-41-3M-A2	NA	NA	Provided by client.
E.	Radio Communication Analyzer	Anritsu	MT8820C	6201010284	NA	-
F.	Keyboard	DELL	SK-8115	CN-OJ4635-716 16-53-OCAE	FCC DoC Approved	-

Note:

1. All power cords of the above support units are non-shielded (1.8m).
2. Item E acted as a communication partner to transfer data.

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	ANT cable	1	2	Y	0	Provided by client.
2.	ANT cable	1	3	Y	0	Provided by client.
3.	USB cable	1	1.8	Y	0	-
4.	LAN cable	1	1	N	0	Cat.5e, RJ45
5.	Power cable	1	1.5	-	0	Provided by client.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on Y-plane. Following channel(s) was (were) selected for the final test as listed below:

WCDMA Band 2

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
-	EIRP	9262 to 9538	9262 (1852.4MHz), 9400 (1880.0MHz), 9538 (1907.6MHz)	WCDMA
-	Radiated Emission Below 1GHz	9262 to 9538	9400 (1880.0MHz)	WCDMA
-	Radiated Emission Above 1GHz	9262 to 9538	9400 (1880.0MHz)	WCDMA

LTE Band 2

EUT Configure Mode	Test item	Available channel	Tested Channel	Channel Bandwidth	Modulation	Mode
-	EIRP	18607 to 19193	18607 (1850.70MHz), 18900 (1880.00MHz), 19193 (1909.30MHz)	1.4MHz	QPSK	1 Half Full
		18615 to 19185	18615 (1851.50MHz), 18900 (1880.00MHz), 19185 (1908.50MHz)	3MHz	QPSK	1 Half Full
		18625 to 19175	18625 (1852.50MHz), 18900 (1880.00MHz), 19175 (1907.50MHz)	5MHz	QPSK	1 Half Full
		18650 to 19150	18650 (1855.00MHz), 18900 (1880.00MHz), 19150 (1905.00MHz)	10MHz	QPSK	1 Half Full
		18675 to 19125	18675 (1857.50MHz), 18900 (1880.00MHz), 19125 (1902.50MHz)	15MHz	QPSK	1 Half Full
		18700 to 19100	18700 (1860.00MHz), 18900 (1880.00MHz), 19100 (1900.00MHz)	20MHz	QPSK	1 Half Full
-	Radiated Emission Below 1GHz	18615 to 19185	18900 (1880.00MHz)	3MHz	QPSK	1
-	Radiated Emission Above 1GHz	18615 to 19185	18900 (1880.00MHz)	3MHz	QPSK	1

Test Condition:

Test Item	Environmental Conditions	Input Power (System)	Tested By
EIRP	23deg. C, 66%RH	120Vac, 60Hz	Adair Peng
Radiated Emission	23deg. C, 66%RH 23deg. C, 69%RH	120Vac, 60Hz	Randy Wu, Edison Lee

3.4 EUT Operating Conditions

The EUT makes a call to the communication simulator. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency

3.5 General Description of Applied Standards and References

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and References:

Test Standard:

FCC 47 CFR Part 2
FCC 47 CFR Part 24
ANSI/TIA/EIA-603-E 2016
ANSI 63.26-2015

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 971168 D01 Power Meas License Digital Systems v03r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Output Power Measurement

4.1.1 Limits of Output Power Measurement

Mobile / Portable station are limited to 2 watts EIRP.

4.1.2 Test Procedures

Conducted Power Measurement:

The EUT was set up for the maximum power with WCDMA and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

EIRP / ERP Measurement:

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_{\text{T}}$$

$$\text{ERP} = P_{\text{Meas}} + G_{\text{T}} - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively
(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_{T} gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

4.1.3 Test Setup

Conducted Power Measurement:



4.1.4 Test Results

Conducted Output Power (dBm)

Band	WCDMA Band 2		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1888	1907.6
RMC 12.2K	24.36	24.42	24.33

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	22.88	22.72	22.03
		1	50	22.96	22.85	22.12
		1	99	22.72	22.51	21.41
		50	0	21.73	21.68	20.62
		50	25	21.61	21.56	20.60
		50	50	21.50	21.44	20.58
		100	0	21.48	21.76	20.36
20M	16QAM	1	0	21.69	21.50	20.84
		1	50	21.79	21.59	20.93
		1	99	21.53	21.02	20.12

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	22.75	22.53	21.88
		1	37	22.82	22.62	21.96
		1	74	22.33	22.03	21.45
		36	0	21.26	21.26	20.42
		36	19	21.21	21.14	20.40
		36	39	21.18	21.11	20.33
		75	0	21.13	21.09	20.31
15M	16QAM	1	0	21.79	21.66	20.75
		1	37	21.88	21.72	20.82
		1	74	21.66	21.26	20.28

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	22.72	22.71	22.41
		1	24	22.85	22.82	22.54
		1	49	22.43	22.45	21.90
		25	0	21.51	21.61	21.05
		25	12	21.49	21.56	21.01
		25	25	21.41	21.46	20.63
		50	0	21.39	21.38	20.55
10M	16QAM	1	0	21.23	21.85	21.38
		1	24	21.29	21.95	21.45
		1	49	21.15	21.56	21.15
		25	0	20.23	20.71	20.11
		25	12	20.21	20.68	20.02
		25	25	20.14	20.51	19.95

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	22.75	22.31	21.55
		1	12	22.82	22.45	22.66
		1	24	22.47	22.33	21.39
		12	0	21.57	21.21	20.26
		12	6	21.48	21.18	20.24
		12	13	21.42	21.13	20.17
		25	0	21.37	21.09	20.13
5M	16QAM	1	0	21.79	21.13	20.72
		1	12	21.95	21.24	21.88
		1	24	21.48	21.01	20.29
		12	0	20.46	20.22	19.29
		12	6	20.39	20.15	19.22
		12	13	20.37	20.08	19.19
		25	0	20.33	20.03	19.15

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	22.77	22.33	21.74
		1	7	22.85	22.45	21.83
		1	14	22.68	22.23	21.59
		8	0	21.62	21.31	20.36
		8	3	21.56	21.29	20.27
		8	7	21.51	21.25	20.22
		15	0	21.49	21.22	20.19
3M	16QAM	1	0	21.83	21.53	20.74
		1	7	21.96	21.67	20.82
		1	14	21.65	21.37	20.46
		8	0	20.47	20.41	19.55
		8	3	20.44	20.33	19.51
		8	7	20.40	20.25	19.45
		15	0	20.33	20.11	19.41

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	22.75	22.62	21.64
		1	2	22.81	22.69	21.75
		1	5	22.65	22.48	21.53
		3	0	22.63	22.41	21.49
		3	1	22.56	22.34	21.42
		3	3	22.51	22.32	21.31
		6	0	21.65	21.45	20.51
1.4M	16QAM	1	0	21.83	21.54	20.54
		1	2	21.89	21.62	20.68
		1	5	21.69	21.42	20.42
		3	0	21.61	21.37	20.35
		3	1	21.55	21.29	20.29
		3	3	21.47	21.19	20.18
		6	0	20.58	20.09	19.12

EIRP Power (dBm)

Band	WCDMA Band 2		
Channel	9262	9400	9538
Frequency (MHz)	1852.4	1888	1907.6
RMC 12.2K	25.06	25.12	25.03

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18700	18900	19100
		Frequency (MHz)		1860	1880	1900
20M	QPSK	1	0	23.58	23.42	22.73
		1	50	23.66	23.55	22.82
		1	99	23.42	23.21	22.11
		50	0	22.43	22.38	21.32
		50	25	22.31	22.26	21.30
		50	50	22.20	22.14	21.28
		100	0	22.18	22.46	21.06
20M	16QAM	1	0	22.39	22.20	21.54
		1	50	22.49	22.29	21.63
		1	99	22.23	21.72	20.82

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18675	18900	19125
		Frequency (MHz)		1857.5	1880	1902.5
15M	QPSK	1	0	23.45	23.23	22.58
		1	37	23.52	23.32	22.66
		1	74	23.03	22.73	22.15
		36	0	21.96	21.96	21.12
		36	19	21.91	21.84	21.10
		36	39	21.88	21.81	21.03
		75	0	21.83	21.79	21.01
15M	16QAM	1	0	22.49	22.36	21.45
		1	37	22.58	22.42	21.52
		1	74	22.36	21.96	20.98

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18650	18900	19150
		Frequency (MHz)		1855	1880	1905
10M	QPSK	1	0	23.42	23.41	23.11
		1	24	23.55	23.52	23.24
		1	49	23.13	23.15	22.60
		25	0	22.21	22.31	21.75
		25	12	22.19	22.26	21.71
		25	25	22.11	22.16	21.33
		50	0	22.09	22.08	21.25
10M	16QAM	1	0	21.93	22.55	22.08
		1	24	21.99	22.65	22.15
		1	49	21.85	22.26	21.85
		25	0	20.93	21.41	20.81
		25	12	20.91	21.38	20.72
		25	25	20.84	21.21	20.65

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18625	18900	19175
		Frequency (MHz)		1852.5	1880	1907.5
5M	QPSK	1	0	23.45	23.01	22.25
		1	12	23.52	23.15	23.36
		1	24	23.17	23.03	22.09
		12	0	22.27	21.91	20.96
		12	6	22.18	21.88	20.94
		12	13	22.12	21.83	20.87
		25	0	22.07	21.79	20.83
5M	16QAM	1	0	22.49	21.83	21.42
		1	12	22.65	21.94	22.58
		1	24	22.18	21.71	20.99
		12	0	21.16	20.92	19.99
		12	6	21.09	20.85	19.92
		12	13	21.07	20.78	19.89
		25	0	21.03	20.73	19.85

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18615	18900	19185
		Frequency (MHz)		1851.5	1880	1908.5
3M	QPSK	1	0	23.47	23.03	22.44
		1	7	23.55	23.15	22.53
		1	14	23.38	22.93	22.29
		8	0	22.32	22.01	21.06
		8	3	22.26	21.99	20.97
		8	7	22.21	21.95	20.92
		15	0	22.19	21.92	20.89
3M	16QAM	1	0	22.53	22.23	21.44
		1	7	22.66	22.37	21.52
		1	14	22.35	22.07	21.16
		8	0	21.17	21.11	20.25
		8	3	21.14	21.03	20.21
		8	7	21.10	20.95	20.15
		15	0	21.03	20.81	20.11

LTE Band 2						
BW	MCS Index	RB Size	RB Offset	Low	Mid	High
		Channel		18607	18900	19193
		Frequency (MHz)		1850.7	1880	1909.3
1.4M	QPSK	1	0	23.45	23.32	22.34
		1	2	23.51	23.39	22.45
		1	5	23.35	23.18	22.23
		3	0	23.33	23.11	22.19
		3	1	23.26	23.04	22.12
		3	3	23.21	23.02	22.01
		6	0	22.35	22.15	21.21
1.4M	16QAM	1	0	22.53	22.24	21.24
		1	2	22.59	22.32	21.38
		1	5	22.39	22.12	21.12
		3	0	22.31	22.07	21.05
		3	1	22.25	21.99	20.99
		3	3	22.17	21.89	20.88
		6	0	21.28	20.79	19.82

4.2 Radiated Emission Measurement

4.2.1 Limits of Radiated Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.2.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7.
 - $\text{EIRP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 - $\text{ERP (dBm)} = E (\text{dB}\mu\text{V/m}) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.2.3 Deviation from Test Standard


No deviation.

4.2.4 Test Setup

For radiated emission 30MHz to 1GHz

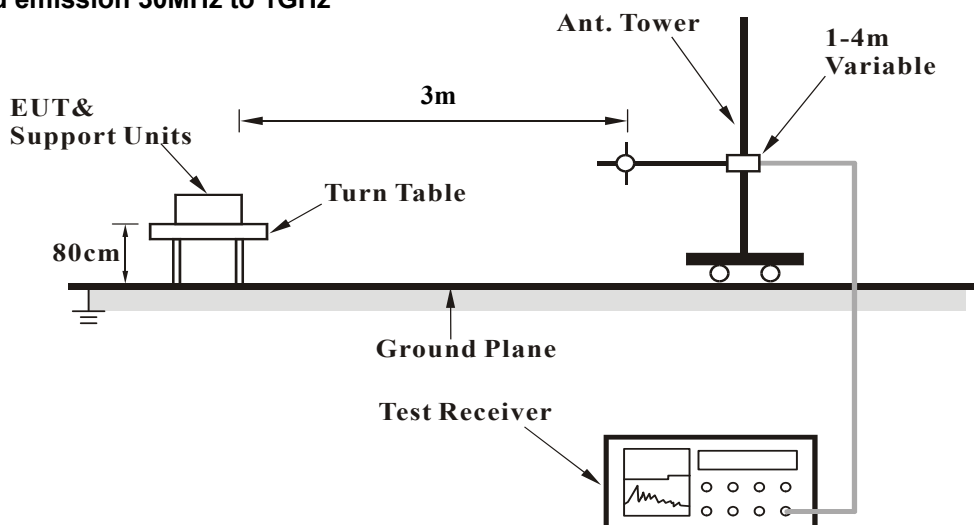

For radiated emission above 1GHz

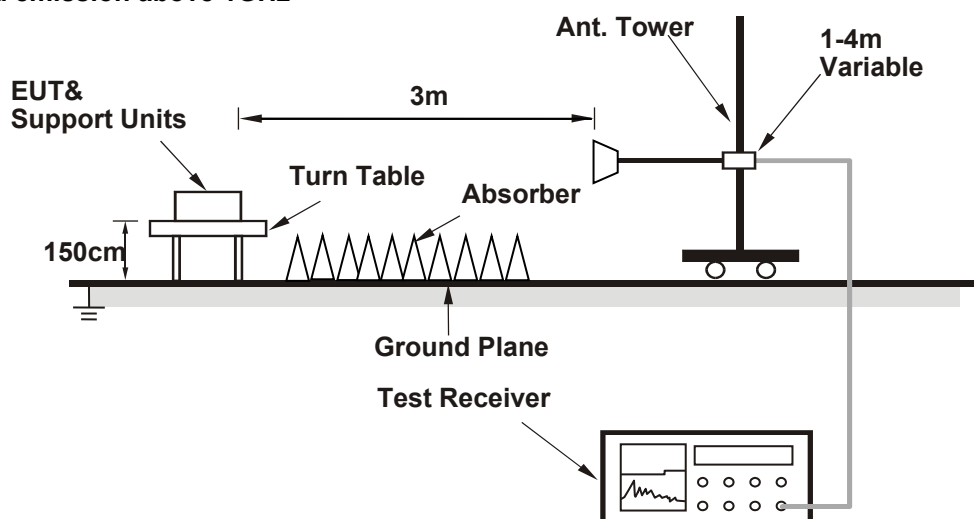

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.5 Test Results


Below 1GHz
WCDMA Band 2

Mode	TX channel 9400 (1880.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Randy Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	110.13	-51.86	-13.00	-38.86	2.00 H	262	64.73	-116.59
2	215.57	-54.30	-13.00	-41.30	1.51 H	281	62.63	-116.93
3	322.41	-46.45	-13.00	-33.45	1.01 H	198	65.73	-112.18
4	505.16	-49.91	-13.00	-36.91	1.51 H	212	58.10	-108.01
5	630.28	-56.66	-13.00	-43.66	1.51 H	144	48.50	-105.16
6	770.86	-62.02	-13.00	-49.02	1.51 H	2	40.94	-102.96

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

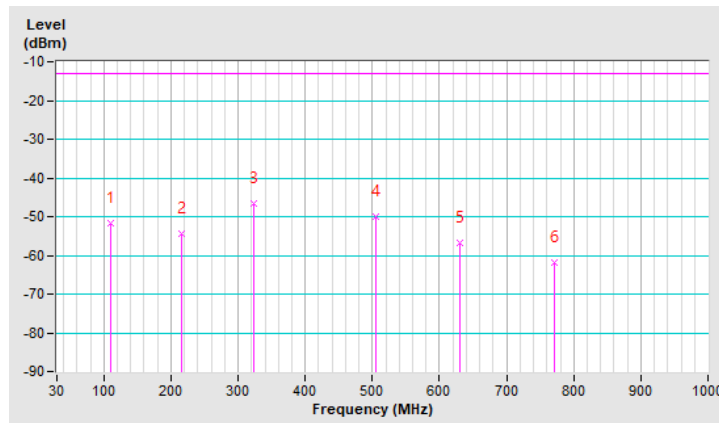


Mode	TX channel 9400 (1880.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Randy Wu		

Antenna Polarity & Test Distance: Vertical at 3 M								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	121.38	-54.68	-13.00	-41.68	1.49 V	238	60.87	-115.55
2	298.51	-45.96	-13.00	-32.96	1.00 V	177	66.97	-112.93
3	382.86	-53.02	-13.00	-40.02	1.49 V	80	57.79	-110.81
4	547.33	-46.74	-13.00	-33.74	1.00 V	17	60.53	-107.27
5	665.42	-56.86	-13.00	-43.86	1.99 V	2	47.99	-104.85
6	839.74	-63.62	-13.00	-50.62	1.99 V	13	38.47	-102.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

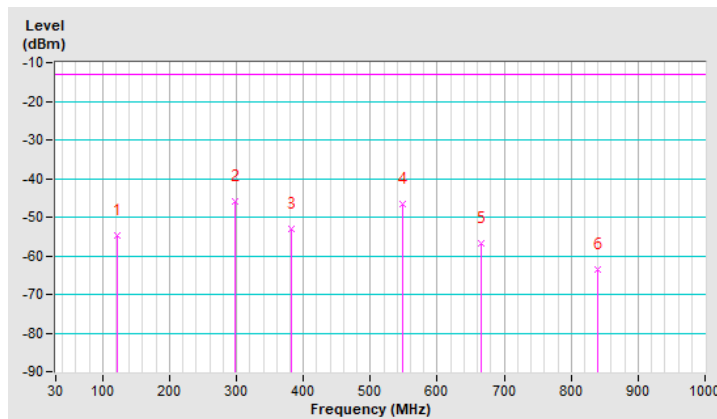


LTE Band 2, Channel Bandwidth: 5MHz

Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.10	-64.66	-13.00	-51.66	1.50 H	15	49.17	-113.83
2	121.18	-58.92	-13.00	-45.92	1.00 H	227	56.62	-115.54
3	181.32	-59.79	-13.00	-46.79	2.00 H	74	55.31	-115.10
4	242.43	-57.95	-13.00	-44.95	1.50 H	12	56.95	-114.90
5	456.80	-54.27	-13.00	-41.27	1.00 H	133	54.42	-108.69
6	603.27	-53.16	-13.00	-40.16	2.00 H	209	52.30	-105.46

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

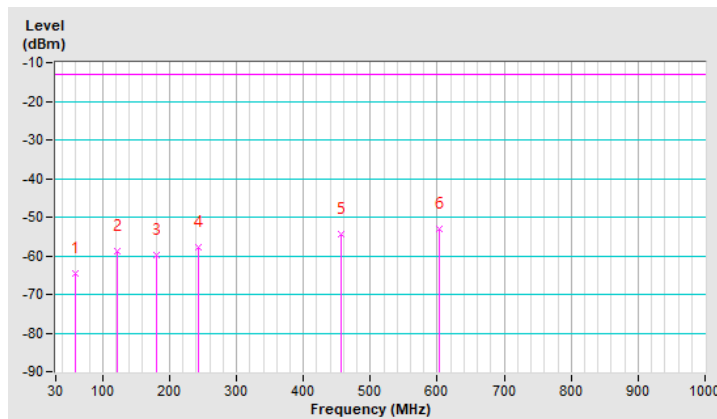


Mode	TX channel 18625 (1852.50MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	23deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance: Vertical at 3 M								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	60.07	-54.53	-13.00	-41.53	1.00 V	244	59.67	-114.20
2	122.15	-60.19	-13.00	-47.19	1.00 V	59	55.35	-115.54
3	221.09	-58.79	-13.00	-45.79	2.00 V	200	58.06	-116.85
4	325.85	-50.28	-13.00	-37.28	1.50 V	293	61.77	-112.05
5	393.75	-50.18	-13.00	-37.18	1.50 V	157	60.39	-110.57
6	551.86	-49.36	-13.00	-36.36	1.00 V	123	57.82	-107.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

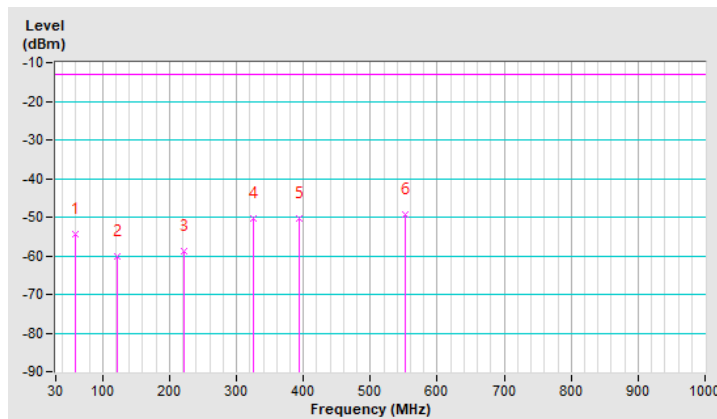

Above 1GHz
WCDMA Band 2

Mode	TX channel 9400 (1880.0MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 66%RH	Input Power	120Vac, 60Hz
Tested By	Randy Wu		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-50.20	-13.00	-37.20	1.67 H	222	45.29	-95.49
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3460.00	-51.22	-13.00	-38.22	1.22 V	182	45.55	-96.77

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 2, Channel Bandwidth 3MHz

Mode	TX channel 18900 (1880.00MHz)	Frequency Range	1GHz ~ 20GHz
Environmental Conditions	23deg. C, 69%RH	Input Power	120Vac, 60Hz
Tested By	Edison Lee		

Antenna Polarity & Test Distance: Horizontal at 3 M								
No.	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-50.29	-13.00	-37.29	1.68 H	337	45.20	-95.49
Antenna Polarity & Test Distance: Vertical at 3 M								
No.	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3760.00	-52.09	-13.00	-39.09	1.21 V	127	43.40	-95.49

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV/m) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---