

Date: 2024-09-16

01_LTE Band 12_10M_QPSK_1RB_0Offset_Front_10mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 41.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.73, 9.93, 9.54); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.265 W/kg; SAR (10g) = 0.180 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.268 W/kg; SAR (10g) = 0.185 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 85.1 %

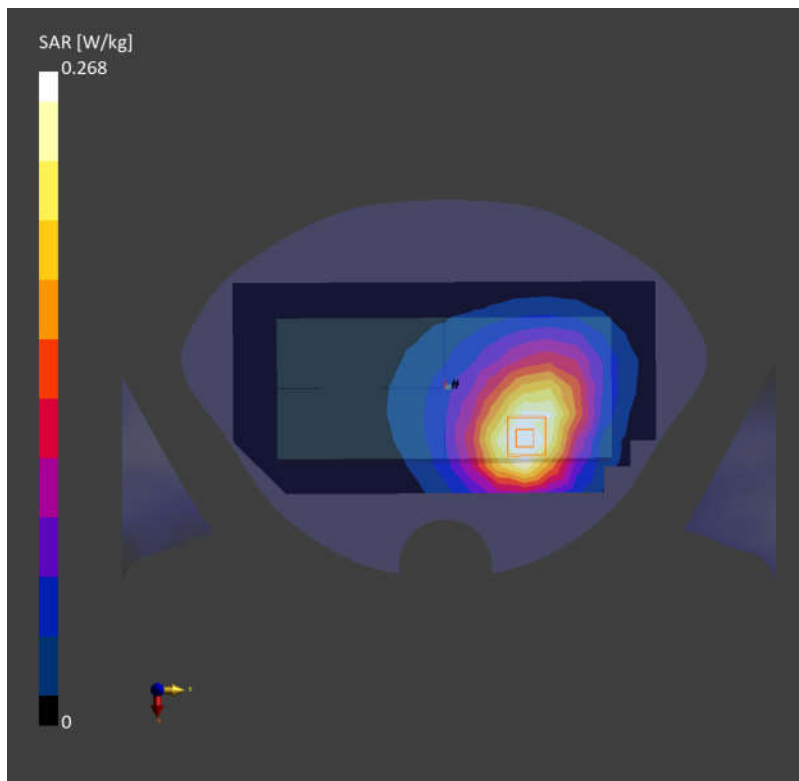

Date: 2024-09-16

02_LTE Band 13_10M_QPSK_25RB_0Offset_Front_10mm_Ch23230


Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.1$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.73, 9.93, 9.54); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.309 W/kg; SAR (10g) = 0.209 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.313 W/kg; SAR (10g) = 0.215 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 84.6 %

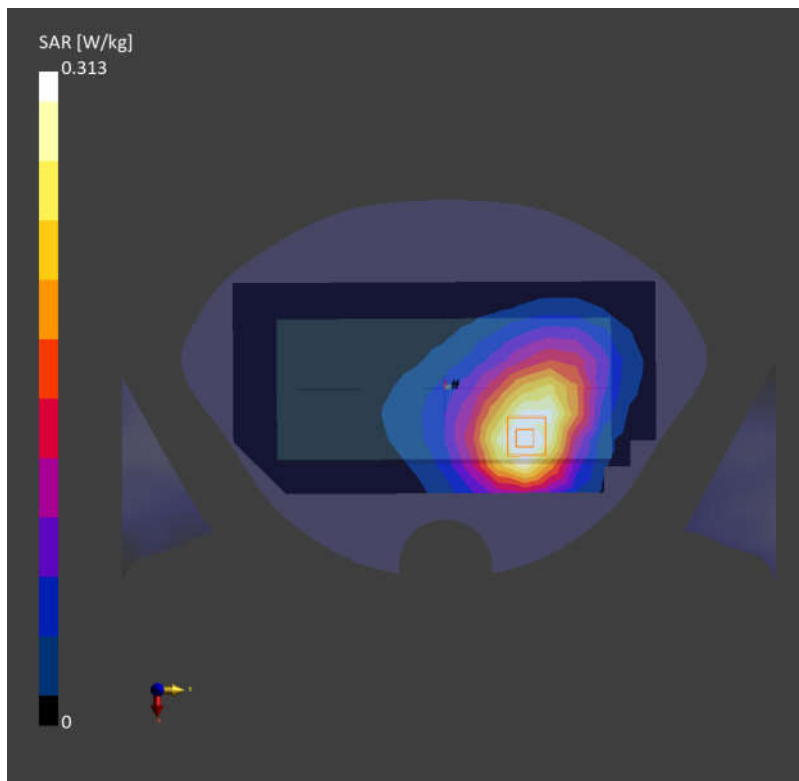

Date: 2024-09-16

03_LTE Band 14_10M_QPSK_1RB_0Offset_Front_10mm_Ch23330


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.73, 9.93, 9.54); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.265 W/kg; SAR (10g) = 0.179 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.273 W/kg; SAR (10g) = 0.187 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 84.1 %

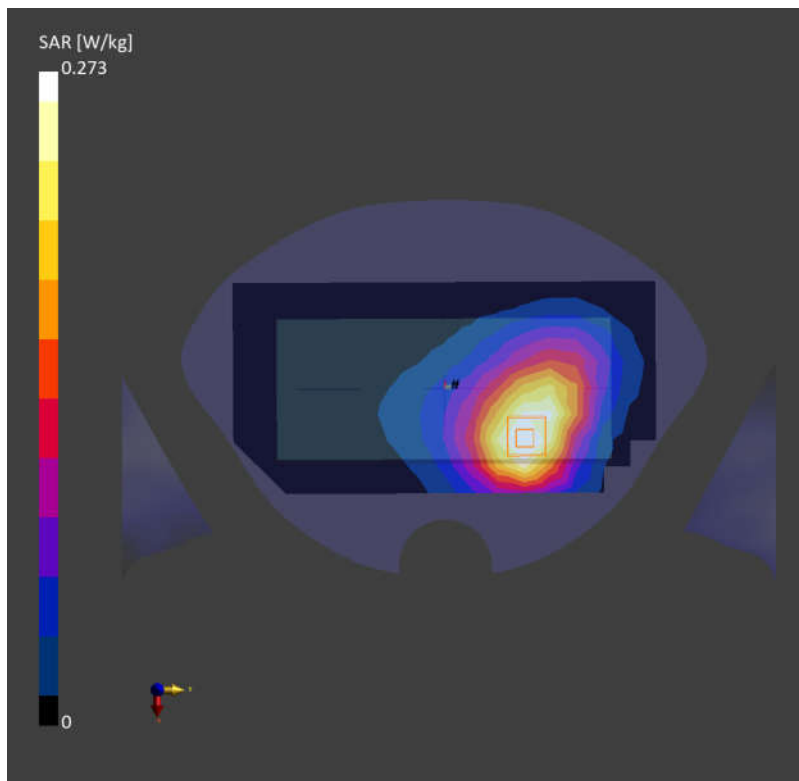

Date: 2024-09-17

04_WCDMA V_RMC 12.2Kbps_Front_10mm_Ch4182


Communication System: UMTS-FDD (DC-HSDPA); Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.7$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.18, 9.37, 9.0); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10457-AAB

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.311 W/kg; SAR (10g) = 0.213 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.15 dB
SAR (1g) = 0.320 W/kg; SAR (10g) = 0.226 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 89.8 %

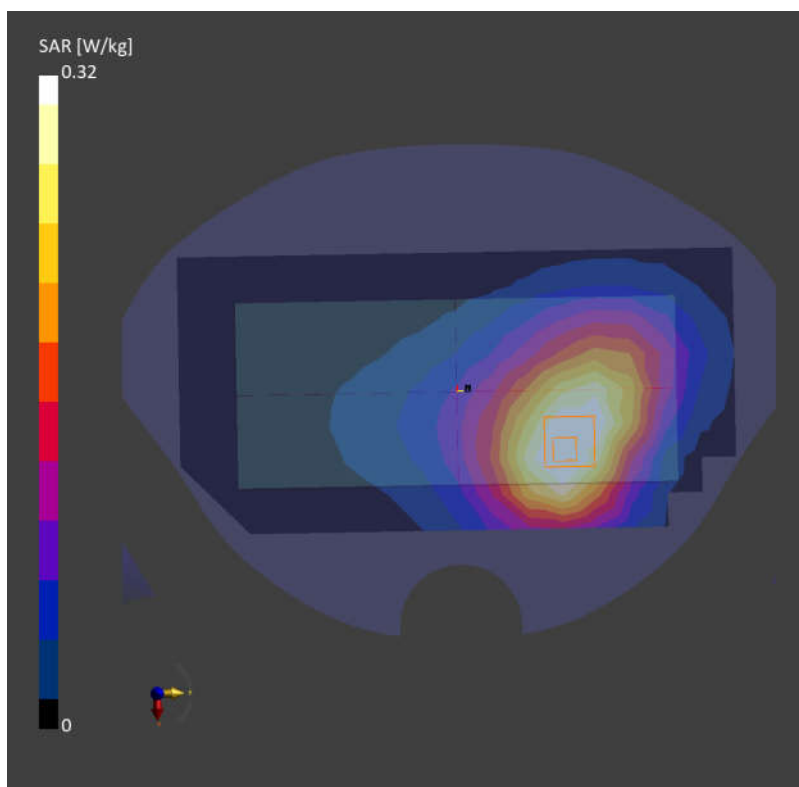

Date: 2024-09-17

05_LTE Band 26_15M_QPSK_1RB_0Offset_Front_10mm_Ch26865


Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.18, 9.37, 9.0); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.382 W/kg; SAR (10g) = 0.258 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.401 W/kg; SAR (10g) = 0.276 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 84.9 %

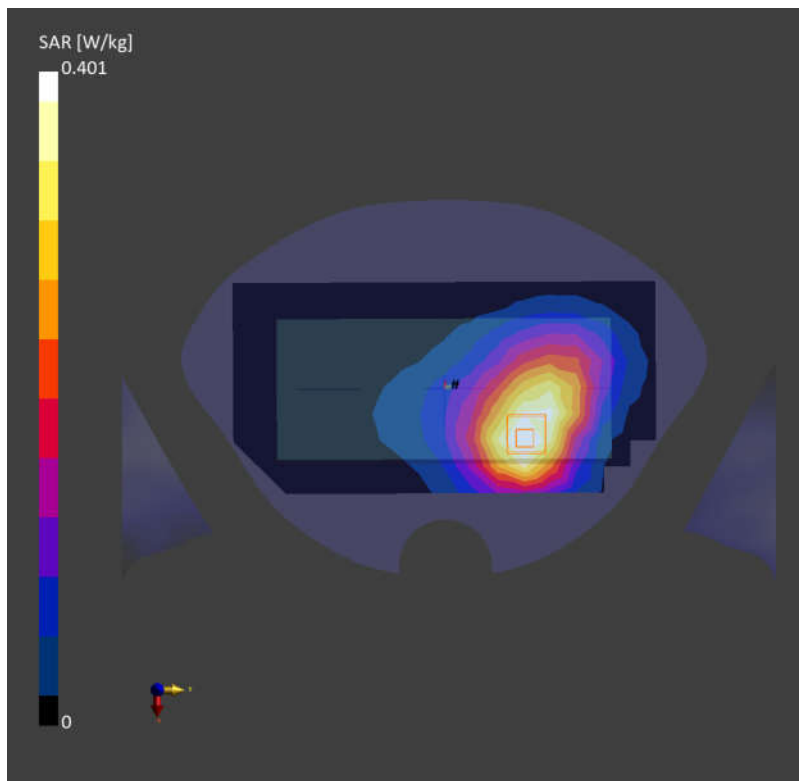

Date: 2024-09-18

06_WCDMA IV_RMC 12.2Kbps_Back_10mm_Ch1413


Communication System: UMTS-FDD (DC-HSDPA); Frequency: 1732.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.06, 8.23, 7.9); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10457-AAB

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.269 W/kg; SAR (10g) = 0.168 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.271 W/kg; SAR (10g) = 0.175 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 87.7 %

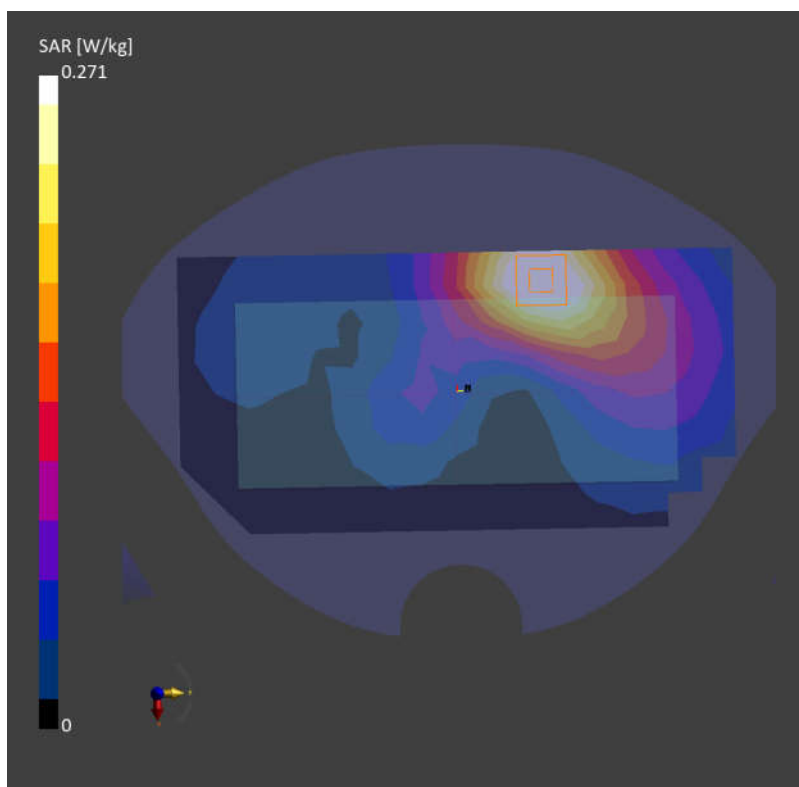

Date: 2024-09-18

07_LTE Band 66_20M_QPSK_1RB_0Offset_Back_10mm_Ch132322


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f=1745.000$ MHz; $\sigma=1.406$ S/m; $\epsilon_r=40.7$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.06, 8.23, 7.9); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.227 W/kg; SAR (10g) = 0.140 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.234 W/kg; SAR (10g) = 0.149 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.9 %

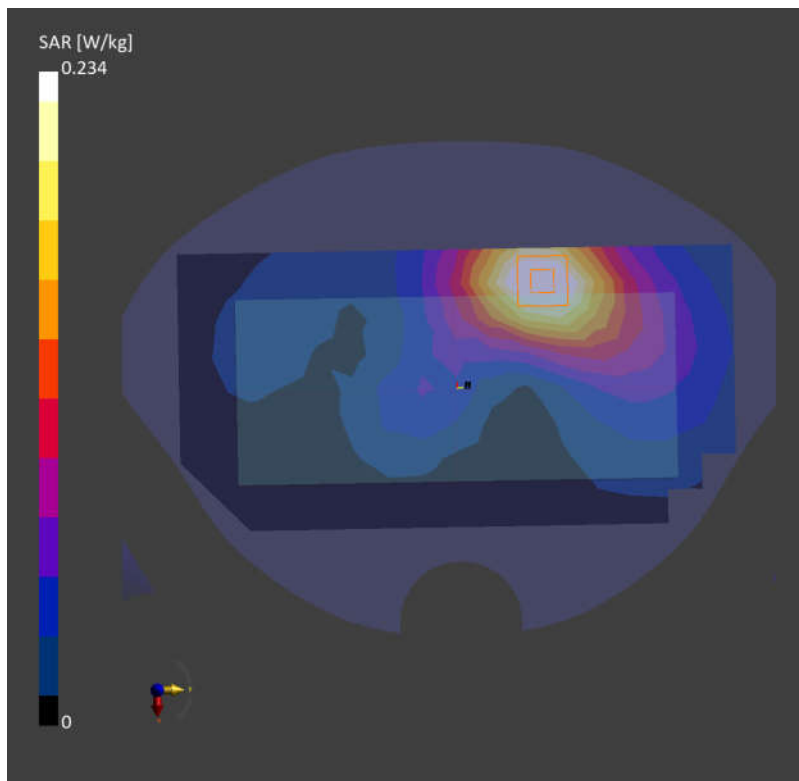

Date: 2024-09-19

08_WCDMA II_RMC 12.2Kbps_Back_10mm_Ch9400


Communication System: UMTS-FDD (DC-HSDPA); Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.82, 7.98, 7.67); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10457-AAB

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.303 W/kg; SAR (10g) = 0.187 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.06 dB
SAR (1g) = 0.309 W/kg; SAR (10g) = 0.197 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 86.8 %

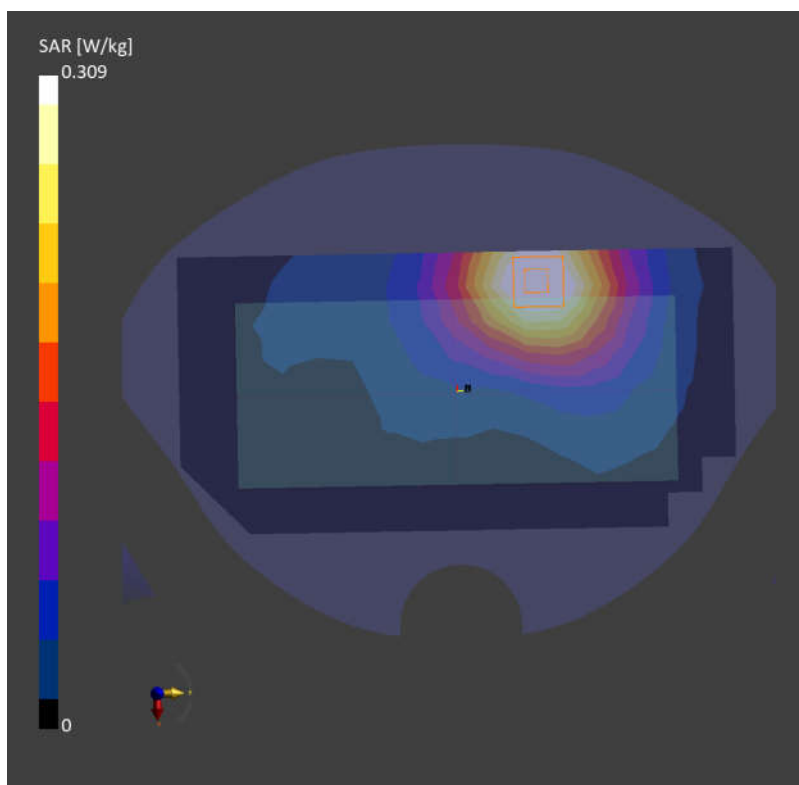

Date: 2024-09-19

09_LTE Band 25_20M_QPSK_1RB_0Offset_Back_10mm_Ch26340


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 41.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.82, 7.98, 7.67); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.381 W/kg; SAR (10g) = 0.232 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.381 W/kg; SAR (10g) = 0.241 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 85.5 %

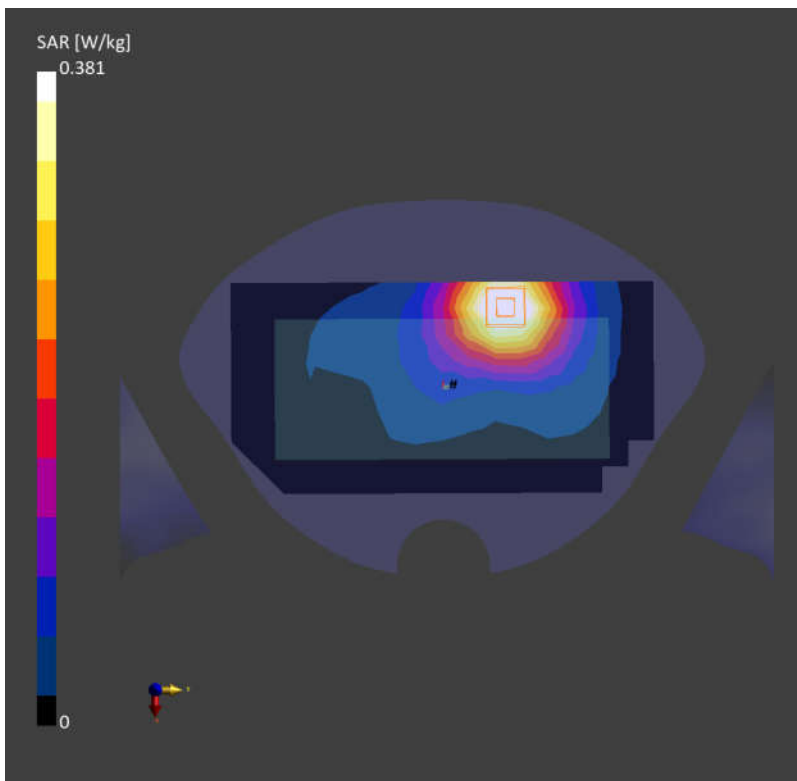

Date: 2024-10-11

10_LTE Band 7_20M_QPSK_1RB_0Offset_Back_10mm_Ch21100


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.6$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.37, 7.52, 7.22); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.290 W/kg; SAR (10g) = 0.166 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.301 W/kg; SAR (10g) = 0.177 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 81.9 %

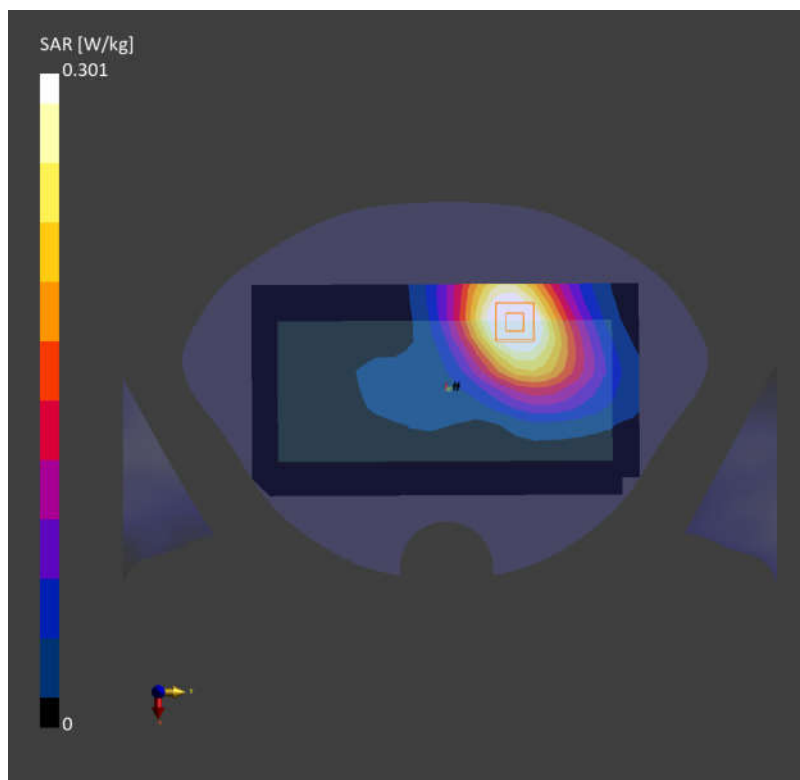

Date: 2024-10-11

11_LTE Band 41_20M_QPSK_1RB_0Offset_Back_10mm_Ch40620


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 2593.000 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.37, 7.52, 7.22); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.208 W/kg; SAR (10g) = 0.120 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.212 W/kg; SAR (10g) = 0.123 W/kg
Smallest distance from peaks to all points 3 dB below = > 15.0 mm
Ratio of SAR at M2 to SAR at M1 = 80.8 %

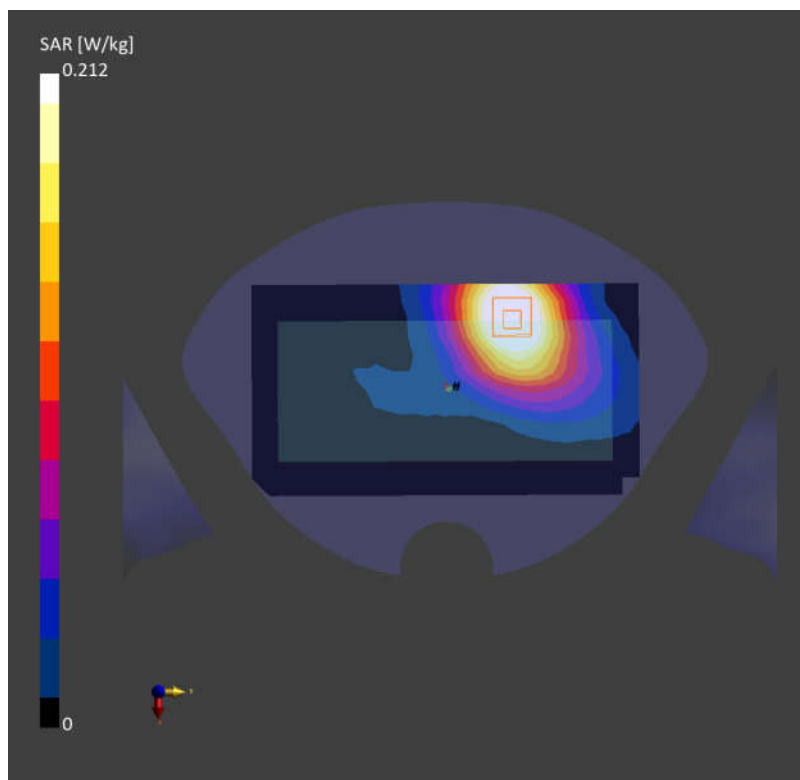

Date: 2024-10-19

12_WLAN2.4GHz_802.11b 1Mbps_Back_10mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437.000 MHz;
Duty Cycle: 1:1.014

Medium: HSL Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.48, 7.18); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.105 W/kg; SAR (10g) = 0.061 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.109 W/kg; SAR (10g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

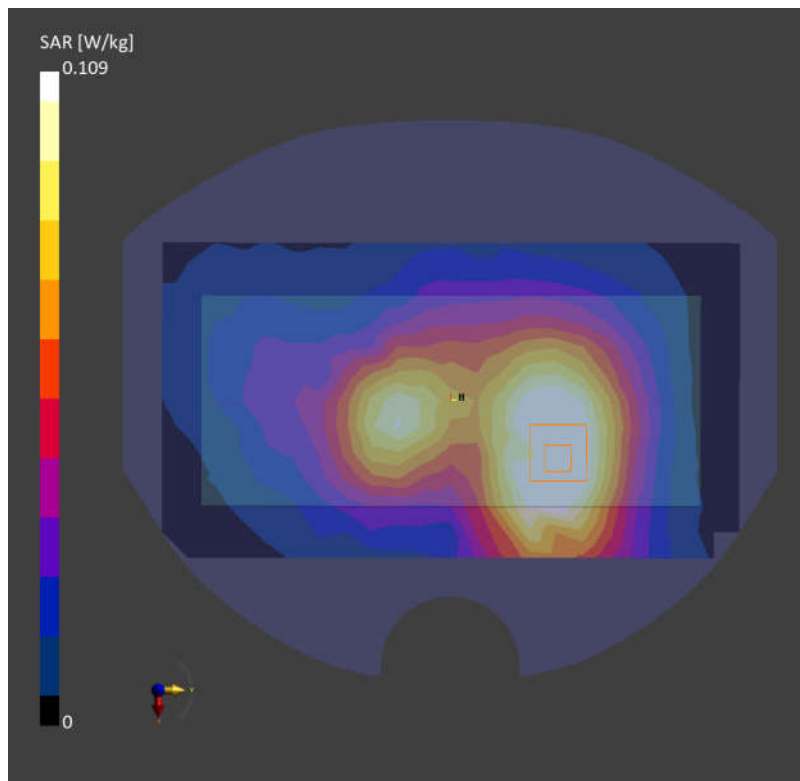

Date: 2024-10-19

13_Bluetooth_1Mbps_Back_10mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.000 MHz; Duty Cycle: 1:1.305

Medium: HSL Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.48, 7.18); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.013 W/kg; SAR (10g) = 0.007 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.012 W/kg; SAR (10g) = 0.007 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 87.3 %

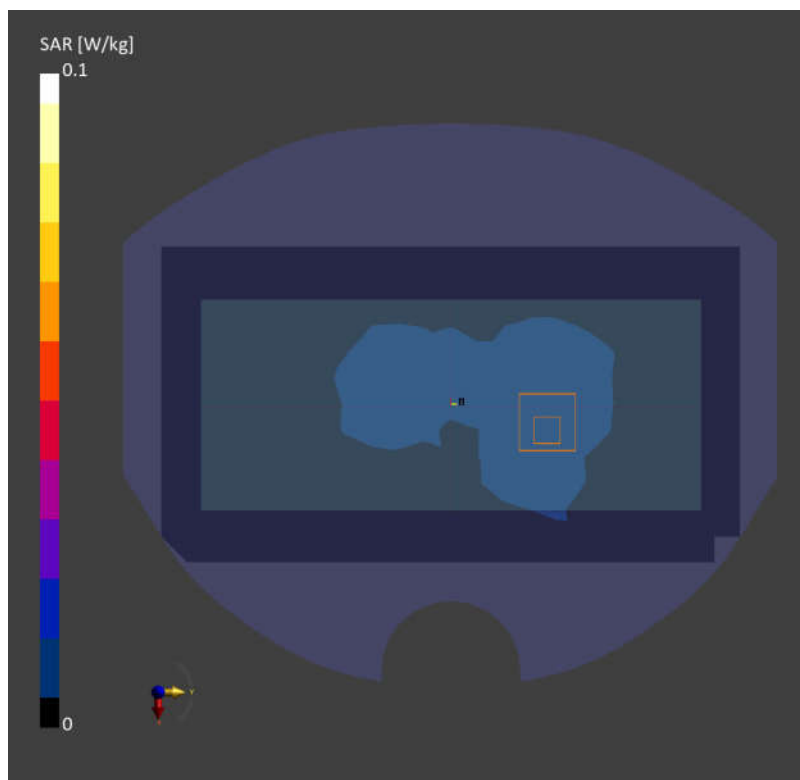

Date: 2024-10-20

14_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch48

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5240.000 MHz; Duty Cycle: 1:1.018

Medium: HSL Medium parameters used: $f = 5240.000$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.05, 6.18, 5.93); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.037 W/kg; SAR (10g) = 0.014 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.036 W/kg; SAR (10g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.6 %

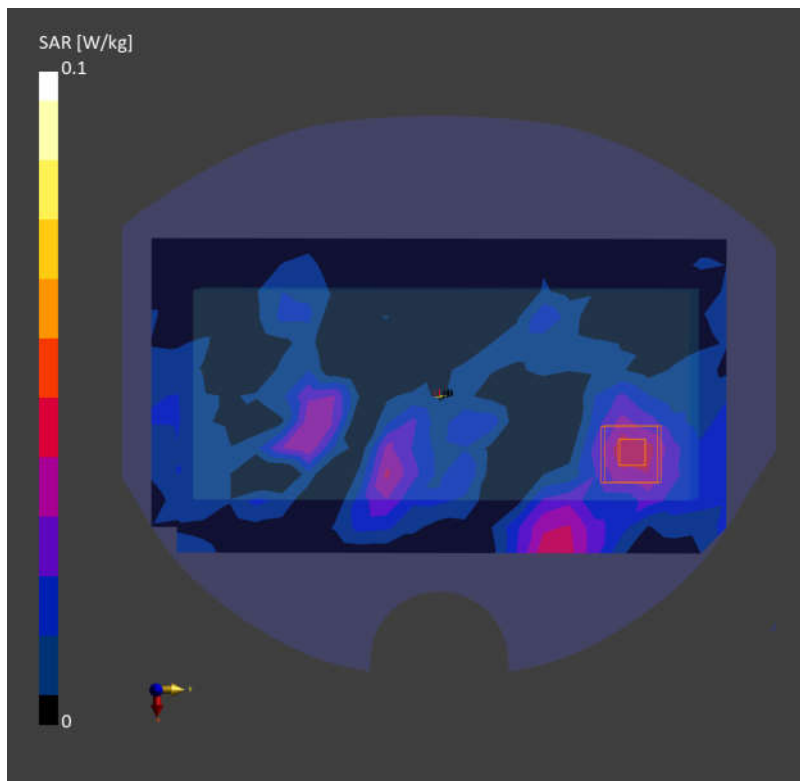

Date: 2024-10-20

15_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch52

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5260.000 MHz; Duty Cycle: 1:1.018

Medium: HSL Medium parameters used: $f = 5260.000$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.05, 6.18, 5.93); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.031 W/kg; SAR (10g) = 0.011 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.027 W/kg; SAR (10g) = 0.006 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 69.8 %

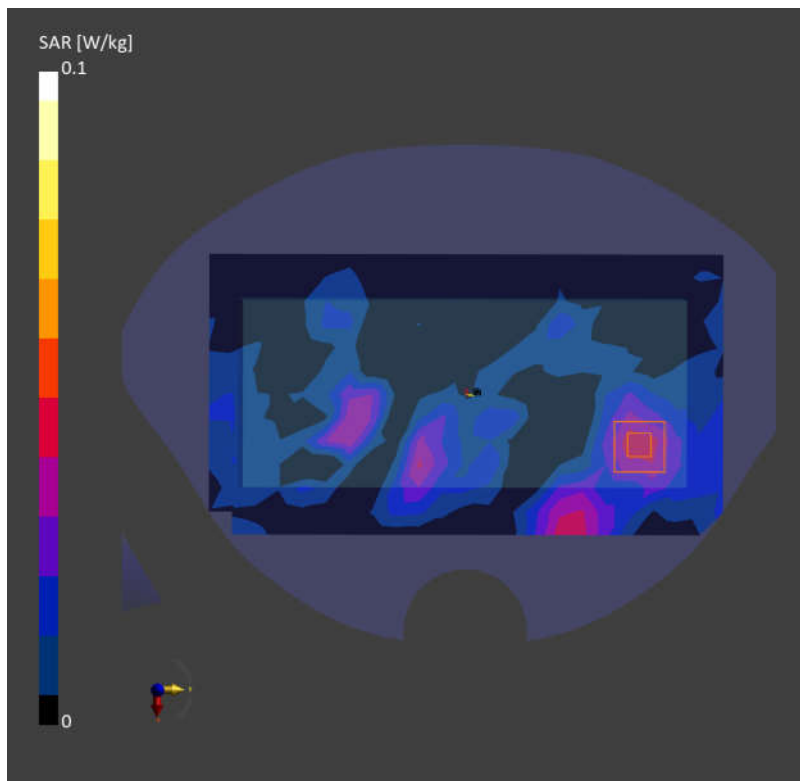

Date: 2024-10-20

16_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch140

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5700.000 MHz; Duty Cycle: 1:1.018

Medium: HSL Medium parameters used: $f = 5700.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(5.55, 5.67, 5.44); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.039 W/kg; SAR (10g) = 0.016 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.032 W/kg; SAR (10g) = 0.011 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 62.3 %

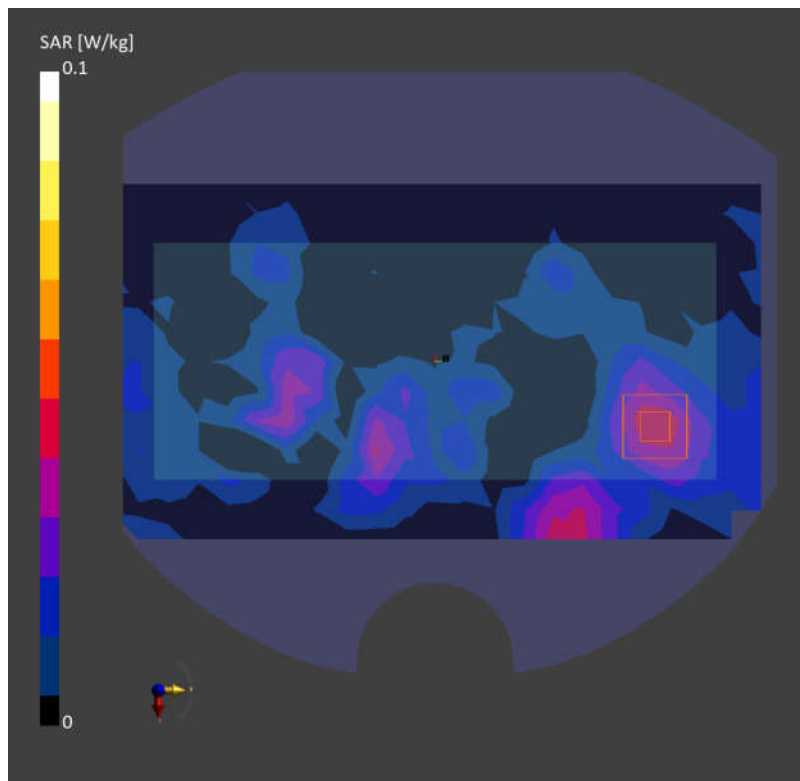

Date: 2024-10-20

17_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch149

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5745.000 MHz; Duty Cycle: 1:1.018

Medium: HSL Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(5.55, 5.67, 5.44); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.057 W/kg; SAR (10g) = 0.023 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.052 W/kg; SAR (10g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 60.9 %

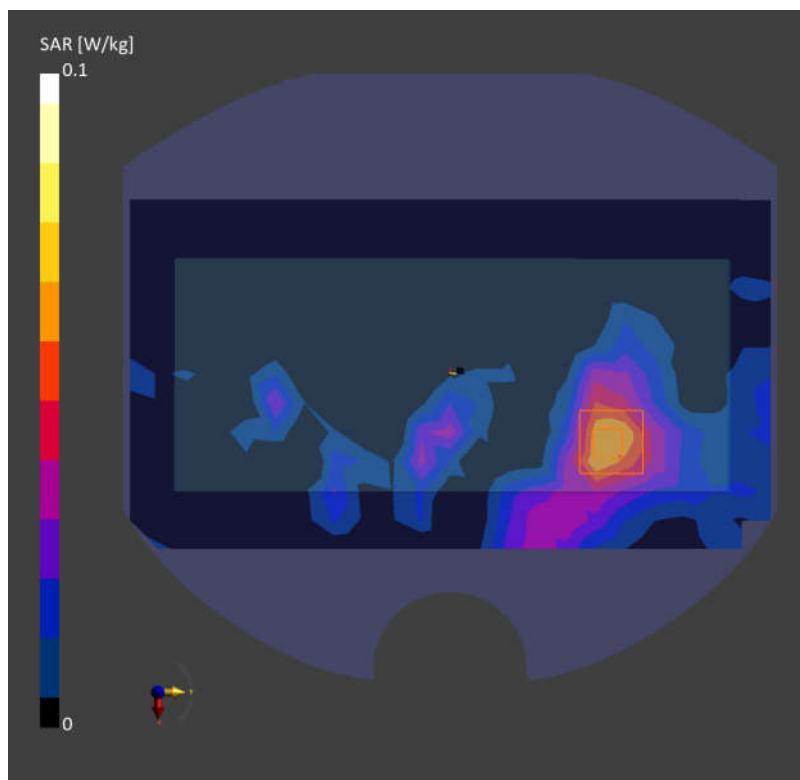

Date: 2024-09-16

18_LTE Band 12_10M_QPSK_1RB_0Offset_Front_0mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 41.3$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.73, 9.93, 9.54); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.931 W/kg; SAR (10g) = 0.583 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.885 W/kg; SAR (10g) = 0.501 W/kg
Smallest distance from peaks to all points 3 dB below = 13.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.2 %

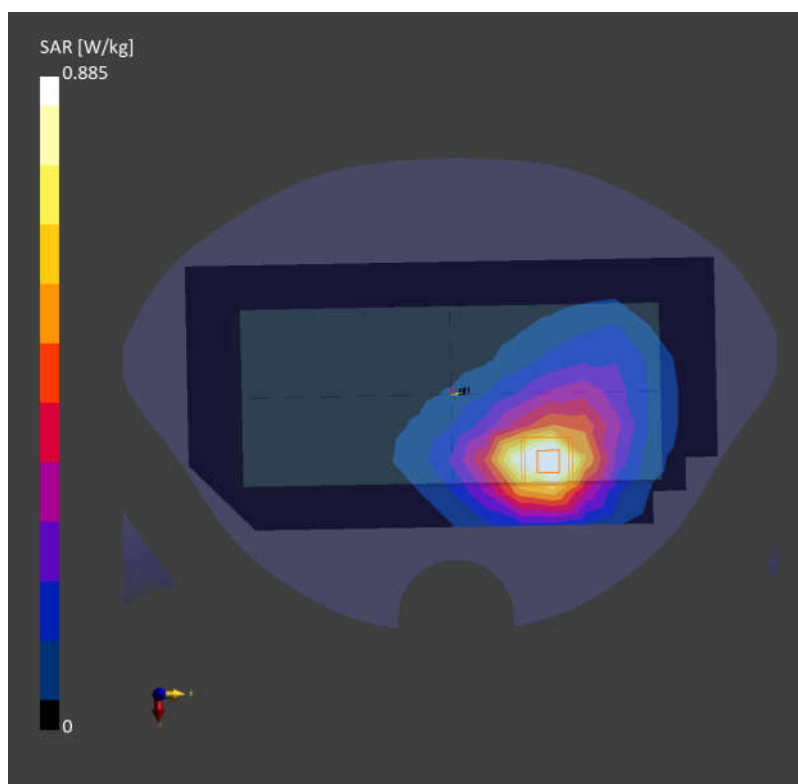

Date: 2024-09-16

19_LTE Band 13_10M_QPSK_25RB_0Offset_Front_0mm_Ch23230

Communication System: LTE-FDD (SC-FDMA, 50% RB, 10 MHz, QPSK) RBPosition:Mid

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.73, 9.93, 9.54); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10154-CAH

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.946 W/kg; SAR (10g) = 0.586 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.914 W/kg; SAR (10g) = 0.514 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

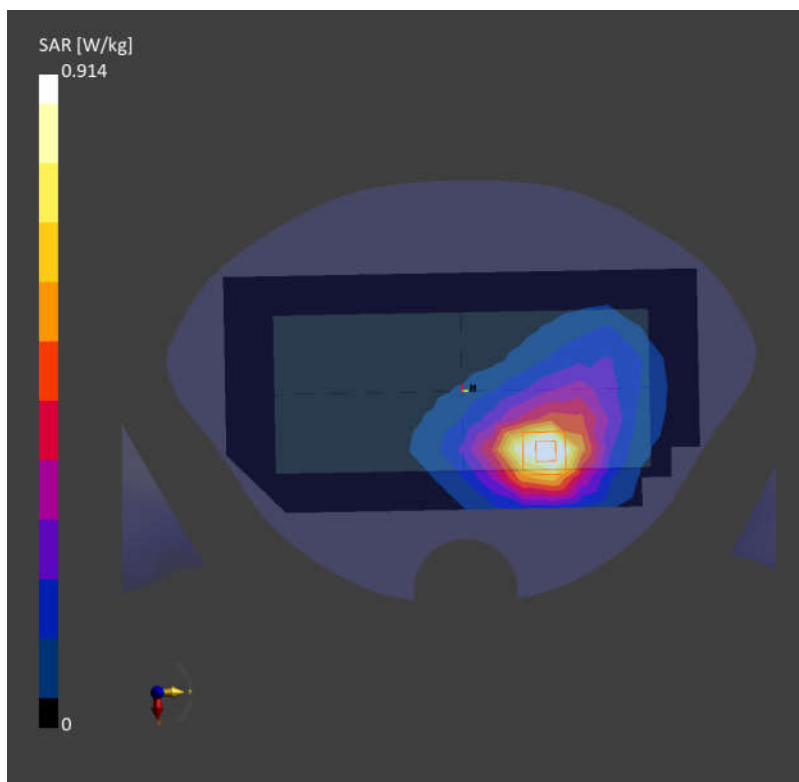

Date: 2024-09-16

20_LTE Band 14_10M_QPSK_1RB_0Offset_Front_0mm_Ch23330


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 41.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.73, 9.93, 9.54); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.814 W/kg; SAR (10g) = 0.517 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.814 W/kg; SAR (10g) = 0.453 W/kg
Smallest distance from peaks to all points 3 dB below = 11.9 mm
Ratio of SAR at M2 to SAR at M1 = 80.5 %

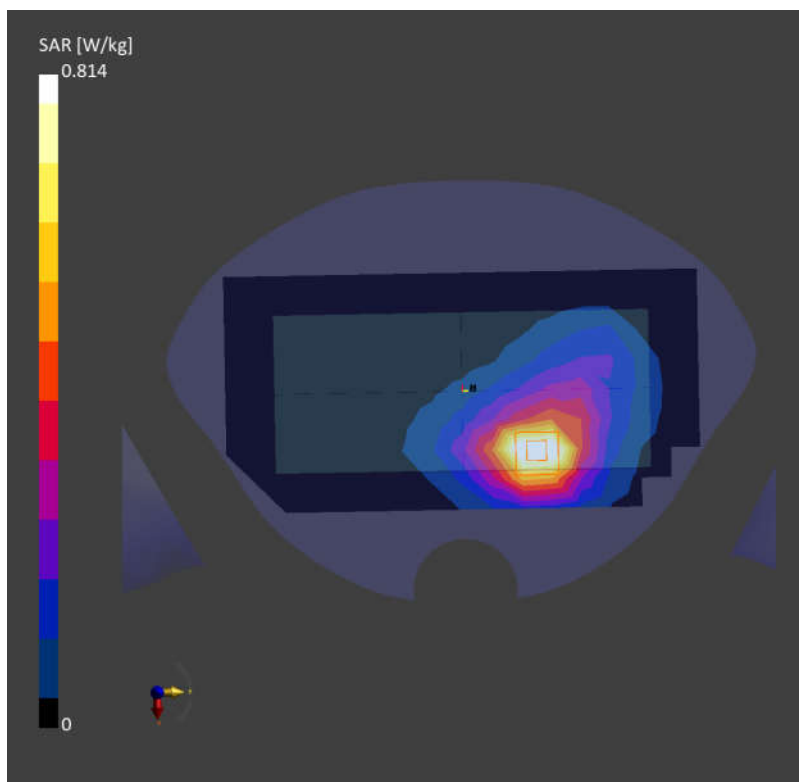

Date: 2024-09-17

21_WCDMA V_RMC 12.2Kbps_Front_0mm_Ch4182

Communication System: UMTS-FDD (DC-HSDPA); Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.18, 9.37, 9.0); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10457-AAB

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.681 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.620 W/kg

Smallest distance from peaks to all points 3 dB below = 14.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

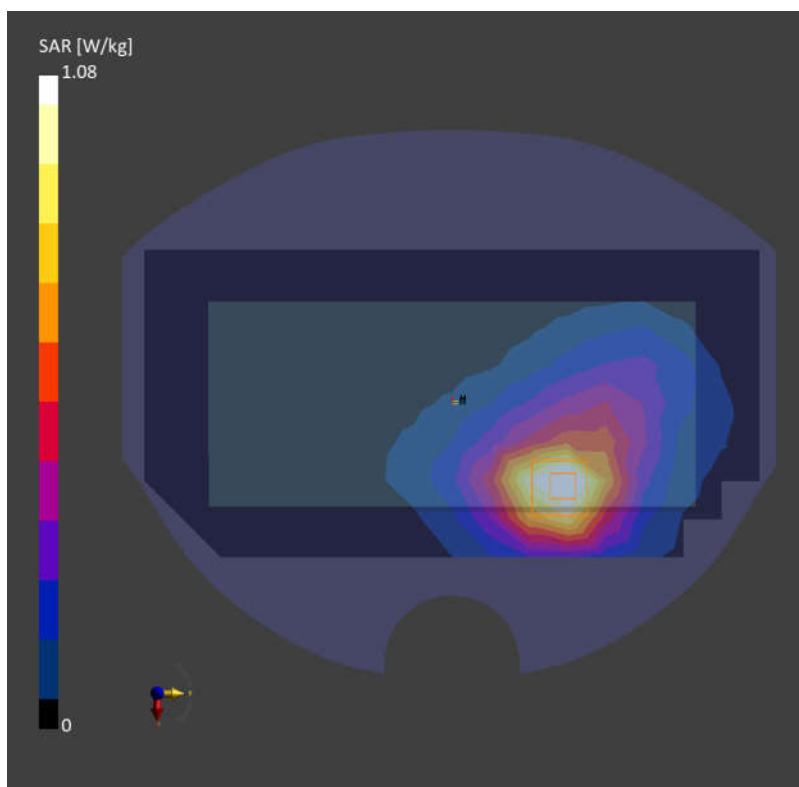

Date: 2024-09-17

22_LTE Band 26_15M_QPSK_1RB_0Offset_Front_0mm_Ch26865


Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.928$ S/m; $\epsilon_r = 40.9$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.18, 9.37, 9.0); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.779 W/kg; SAR (10g) = 0.491 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.814 W/kg; SAR (10g) = 0.451 W/kg
Smallest distance from peaks to all points 3 dB below = 13.0 mm
Ratio of SAR at M2 to SAR at M1 = 79.7 %

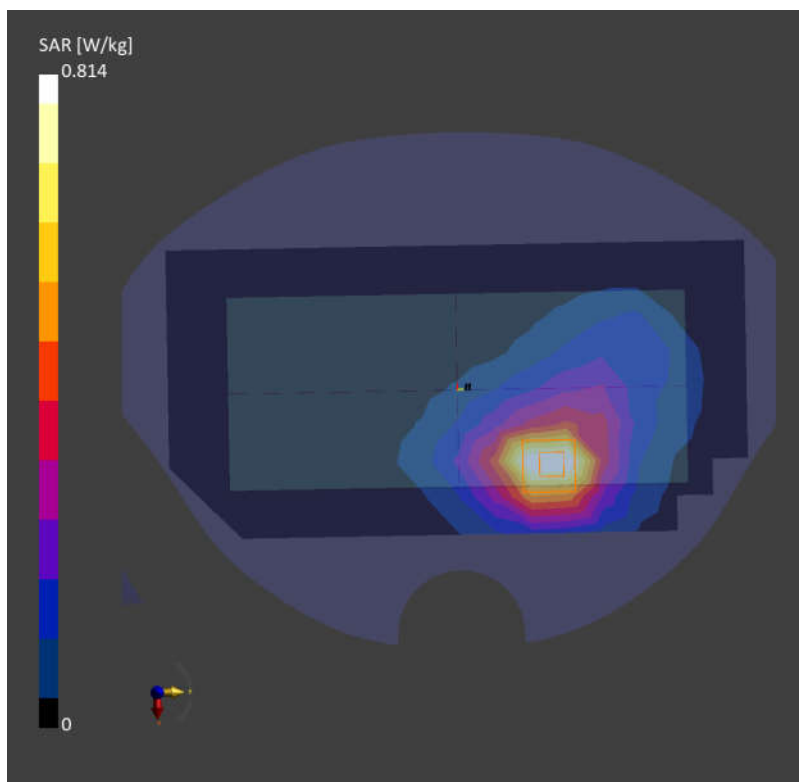

Date: 2024-09-18

23_WCDMA IV_RMC 12.2Kbps_Right Side_0mm_Ch1312

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.400 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.06, 8.23, 7.9); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.82 W/kg; SAR (10g) = 2.45 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 4.66 W/kg; SAR (10g) = 2.06 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 74.5 %

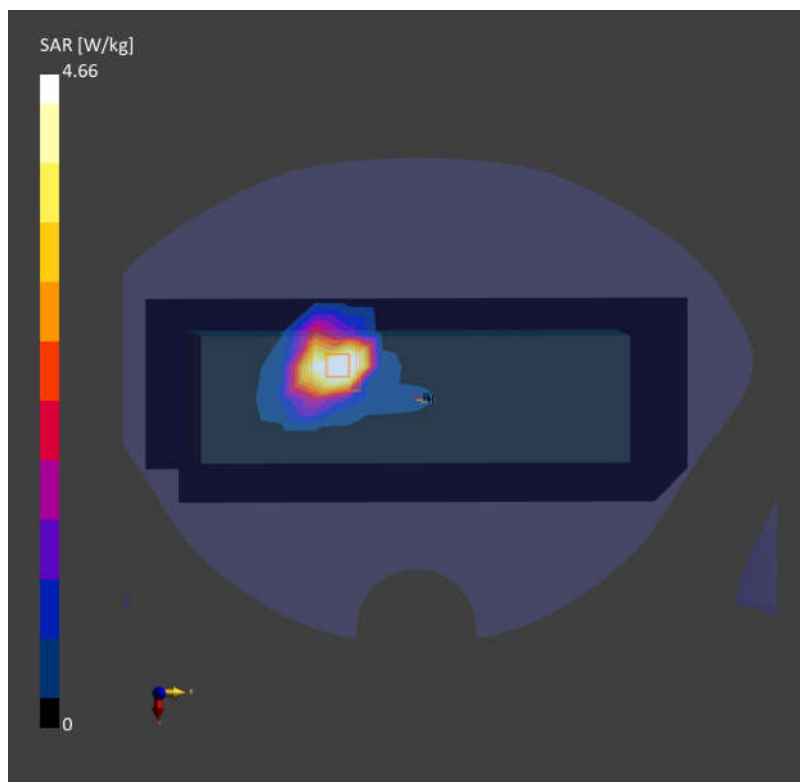

Date: 2024-09-18

24_LTE Band 66_20M_QPSK_1RB_0Offset_Right Side_0mm_Ch132322

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.406$ S/m; $\epsilon_r = 40.7$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.06, 8.23, 7.9); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.28 W/kg; SAR (10g) = 1.77 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 5.37 W/kg; SAR (10g) = 2.26 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 75.1 %

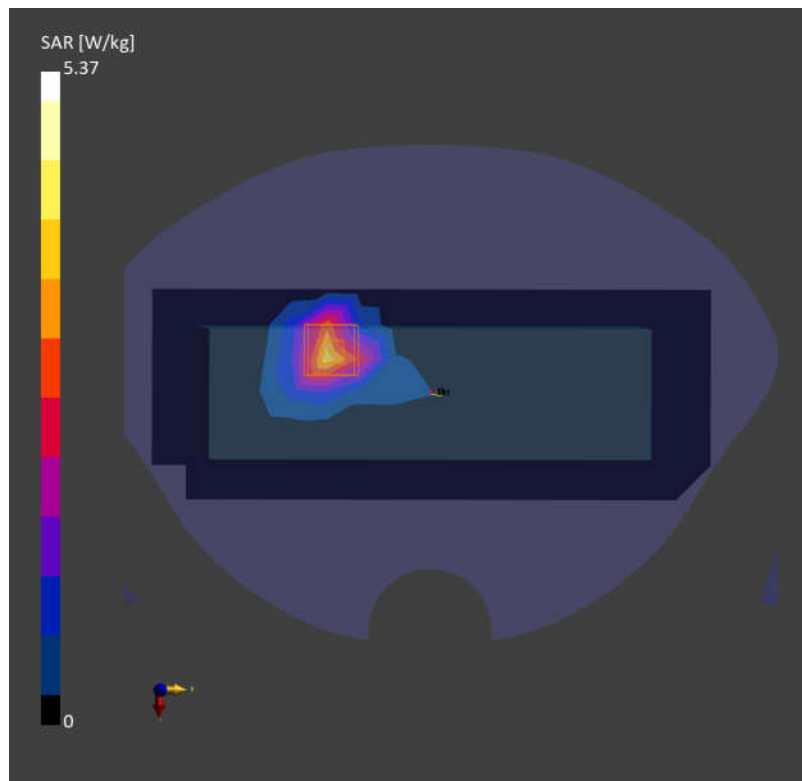

Date: 2024-09-19

25_WCDMA II_RMC 12.2Kbps_Right Side_0mm_Ch9262

Communication System: UMTS-FDD (WCDMA); Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.82, 7.98, 7.67); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.48 W/kg; SAR (10g) = 1.95 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 4.72 W/kg; SAR (10g) = 2.06 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

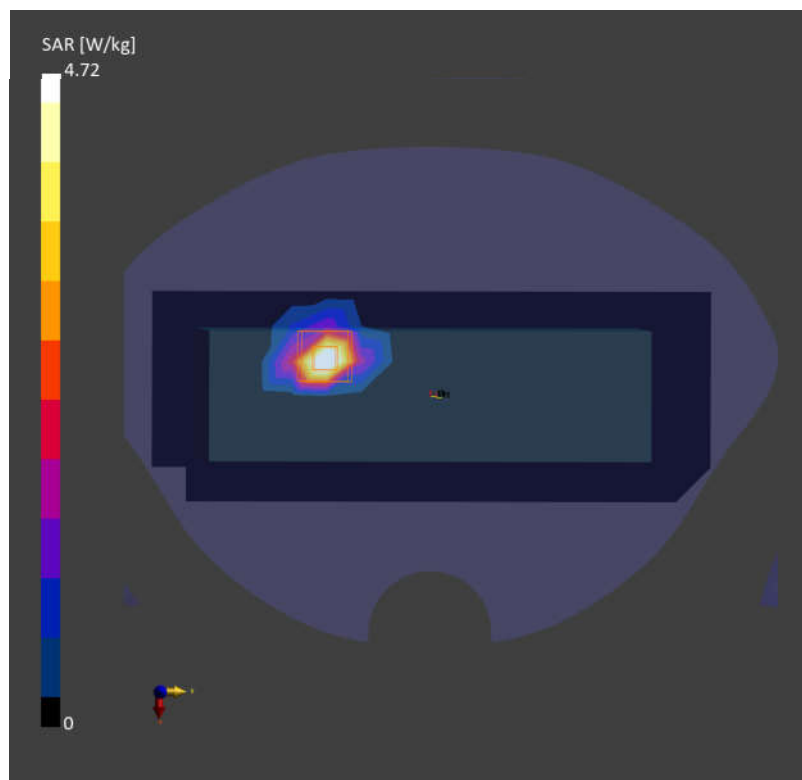

Date: 2024-09-19

26_LTE Band 25_20M_QPSK_1RB_0Offset_Right Side_0mm_Ch26140

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1
 Medium: Head Simulating Liquid Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 38.0$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.82, 7.98, 7.67); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 240.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.36 W/kg; SAR (10g) = 2.16 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 5.49 W/kg; SAR (10g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

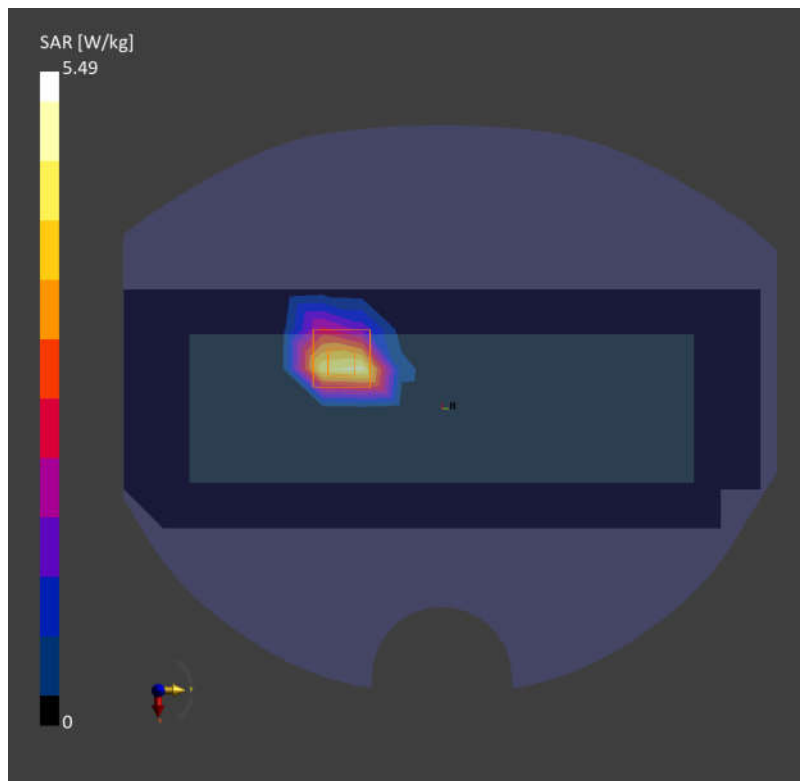

Date: 2024-10-11

27_LTE Band 7_20M_QPSK_1RB_0Offset_Right Side_0mm_Ch21350


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1
Medium: Head Simulating Liquid Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 38.5$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.37, 7.52, 7.22); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 5.81 W/kg; SAR (10g) = 2.38 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.01 dB
SAR (1g) = 6.06 W/kg; SAR (10g) = 2.28 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 81.0 %

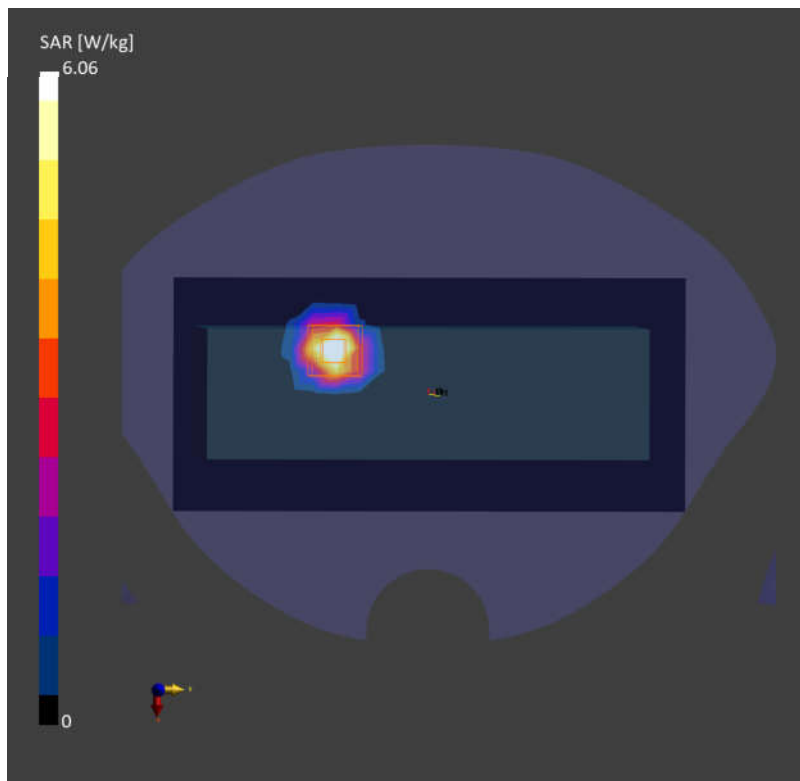

Date: 2024-10-11

28_LTE Band 41_20M_QPSK_1RB_0Offset_Right Side_0mm_Ch41490

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK) RBPosition:Mid

AntennaCfg:SISO; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59

Medium: Head Simulating Liquid Medium parameters used: $f = 2645.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.37, 7.52, 7.22); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.40 W/kg; SAR (10g) = 2.03 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 6.06 W/kg; SAR (10g) = 2.22 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

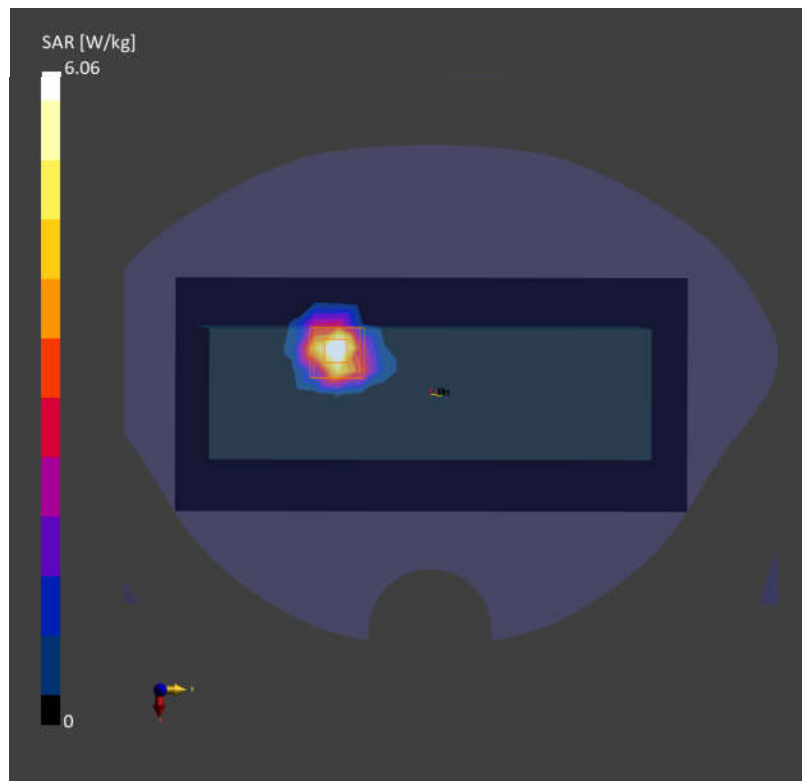

Date: 2024-10-19

29_WLAN2.4GHz_802.11b 1Mbps_Left Side_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437.000 MHz;
Duty Cycle: 1:1.014

Medium: Head Simulating Liquid Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.48, 7.18); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.85 W/kg; SAR (10g) = 2.29 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.19 dB

SAR (1g) = 5.89 W/kg; SAR (10g) = 2.12 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.5 %

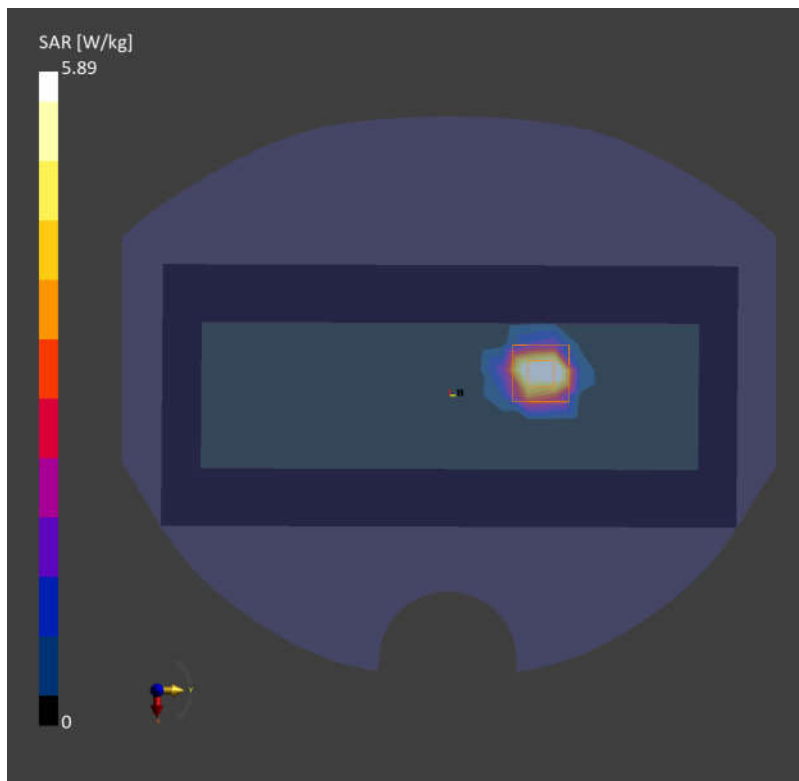

Date: 2024-10-19

30_Bluetooth_1Mbps_Left Side_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.000 MHz; Duty Cycle: 1:1.305

Medium: Head Simulating Liquid Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.48, 7.18); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.517 W/kg; SAR (10g) = 0.217 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 0.592 W/kg; SAR (10g) = 0.224 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

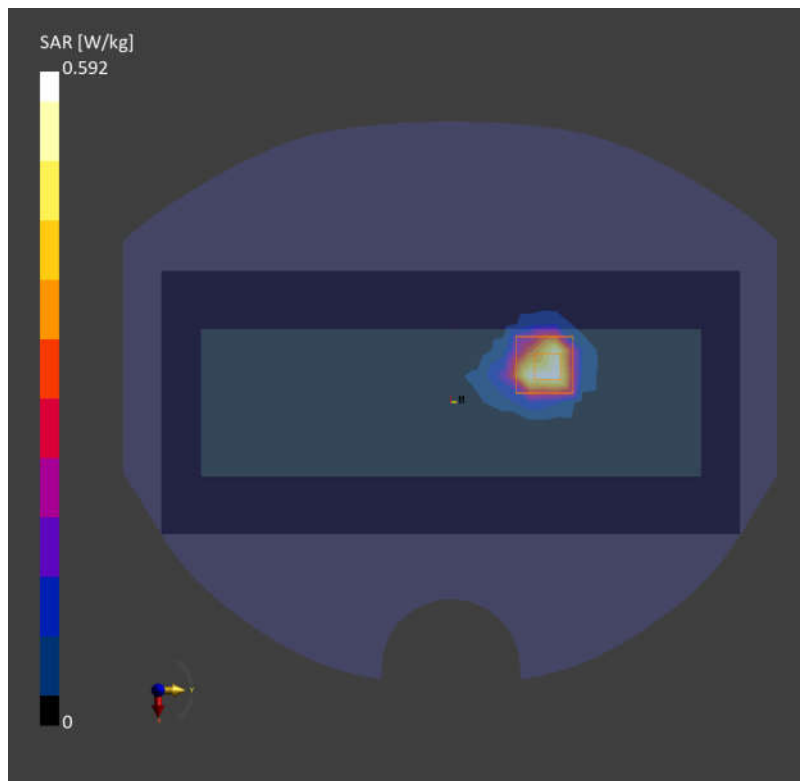

Date: 2024-10-20

31_WLAN5GHz_802.11a 6Mbps_Left Side_0mm_Ch48

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5240.000 MHz; Duty Cycle: 1:1.018

Medium: Head Simulating Liquid Medium parameters used: $f = 5240.000$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.05, 6.18, 5.93); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.49 W/kg; SAR (10g) = 0.471 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 1.86 W/kg; SAR (10g) = 0.526 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

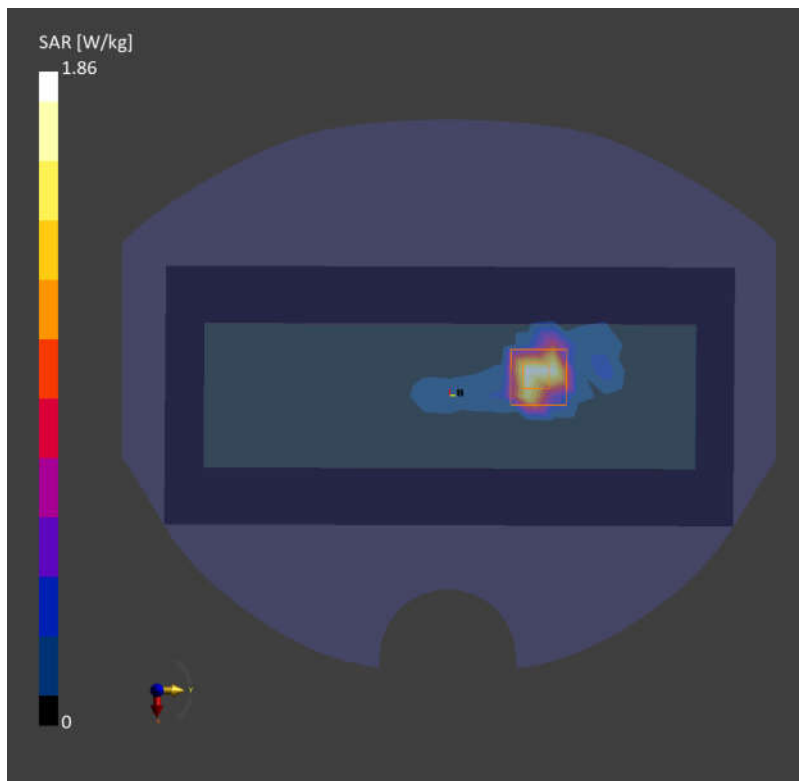

Date: 2024-10-20

32_WLAN5GHz_802.11a 6Mbps_Left Side_0mm_Ch52

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5260.000 MHz; Duty Cycle: 1:1.018

Medium: Head Simulating Liquid Medium parameters used: $f = 5260.000$ MHz; $\sigma = 4.59$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.05, 6.18, 5.93); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.80 W/kg; SAR (10g) = 0.520 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 1.80 W/kg; SAR (10g) = 0.526 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.6 %

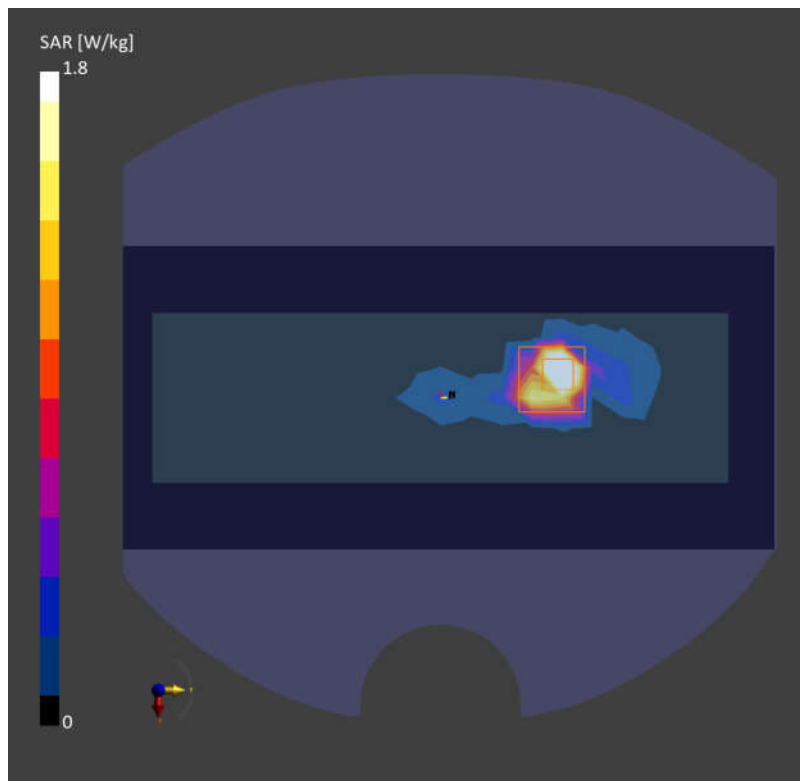

Date: 2024-10-20

33_WLAN5GHz_802.11a 6Mbps_Left Side_0mm_Ch140

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5700.000 MHz; Duty Cycle: 1:1.018

Medium: Head Simulating Liquid Medium parameters used: $f = 5700.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(5.55, 5.67, 5.44); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.39 W/kg; SAR (10g) = 0.429 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.07 dB

SAR (1g) = 1.57 W/kg; SAR (10g) = 0.497 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.9 %

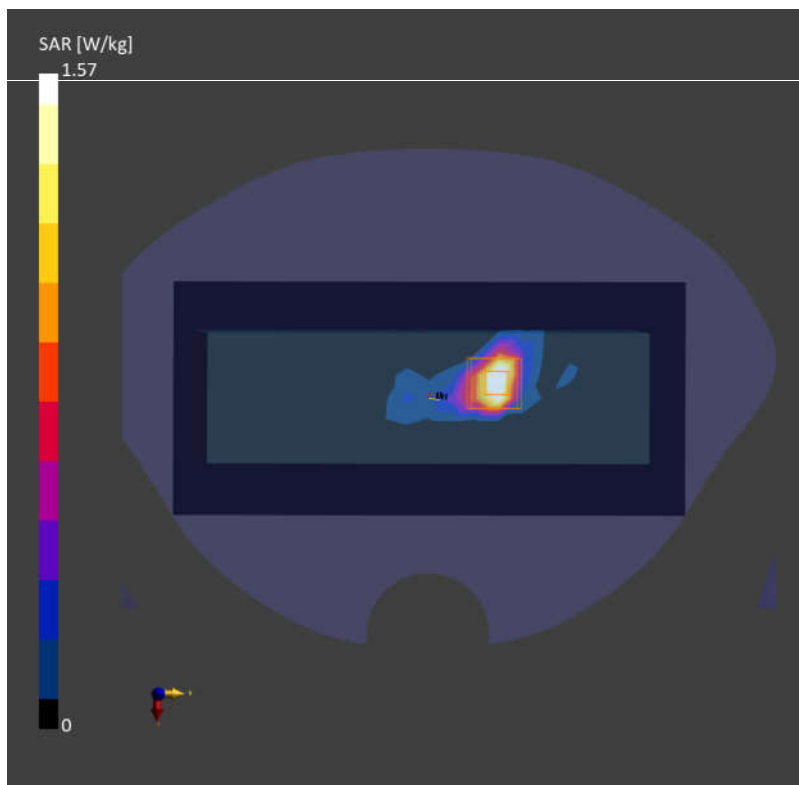

Date: 2024-10-20

34_WLAN5GHz_802.11a 6Mbps_Left Side_0mm_Ch149

Communication System: IEEE 802.11a/h WiFi 5 GHz (OFDM, 6 Mbps); Frequency: 5745.000 MHz; Duty Cycle: 1:1.018

Medium: Head Simulating Liquid Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 34.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(5.55, 5.67, 5.44); Calibrated: 2024-08-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2024-05-23
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2074; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10062-CAE

Area Scan (100.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.38 W/kg; SAR (10g) = 0.420 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 1.60 W/kg; SAR (10g) = 0.492 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.6 %

