
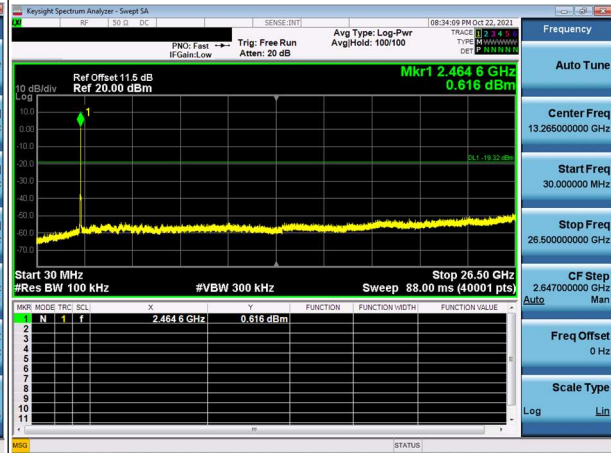



**WLAN 802.11n HT20 (2462MHz)**

**Reference Level**

**Spurious Emission**

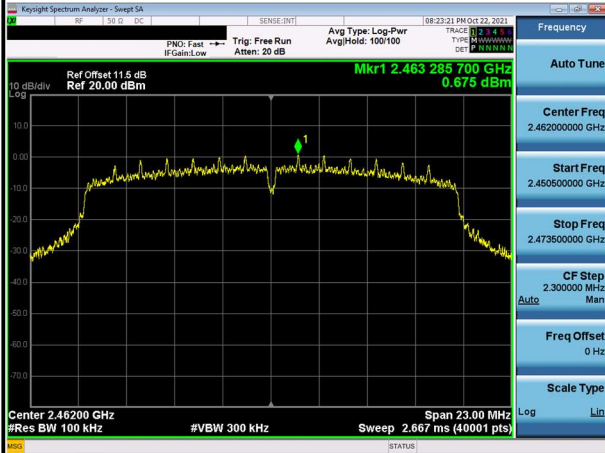

**Band Edge**

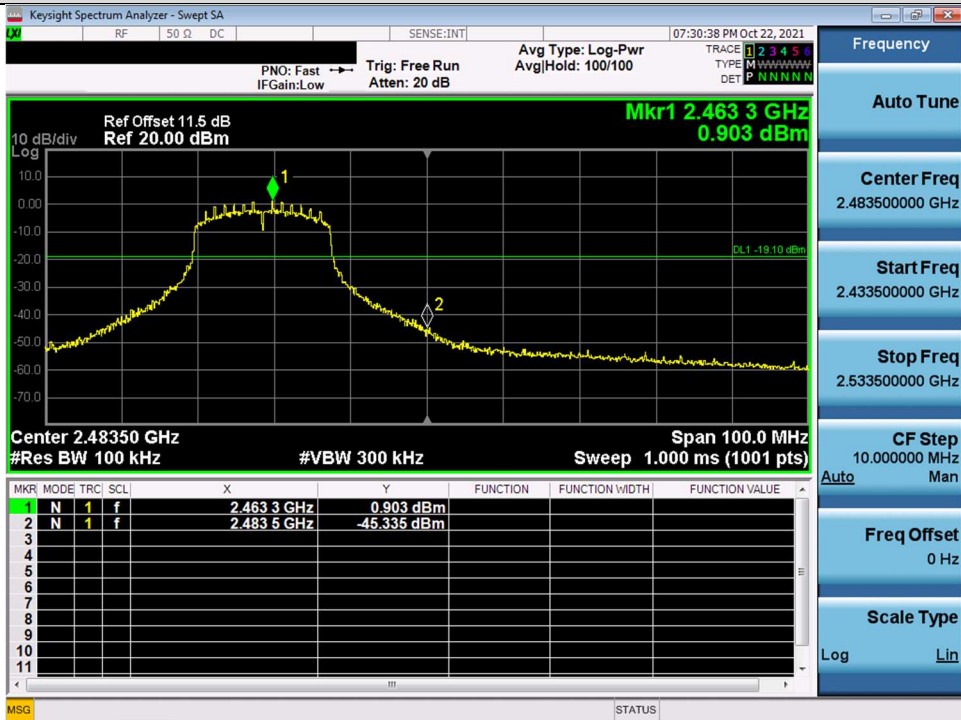

## 2.6 Radiated Band Edges and Spurious Emission Measurement

### 2.6.1 Limit


Frequency (MHz)	Field Strength ( $\mu\text{V/m}$ )	Measurement Distance (m)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Remarks:


1. RF Voltage (dBuV) =  $20 \log$  RF Voltage(uV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

## 2.6.2 Test Setup


### Below 30MHz

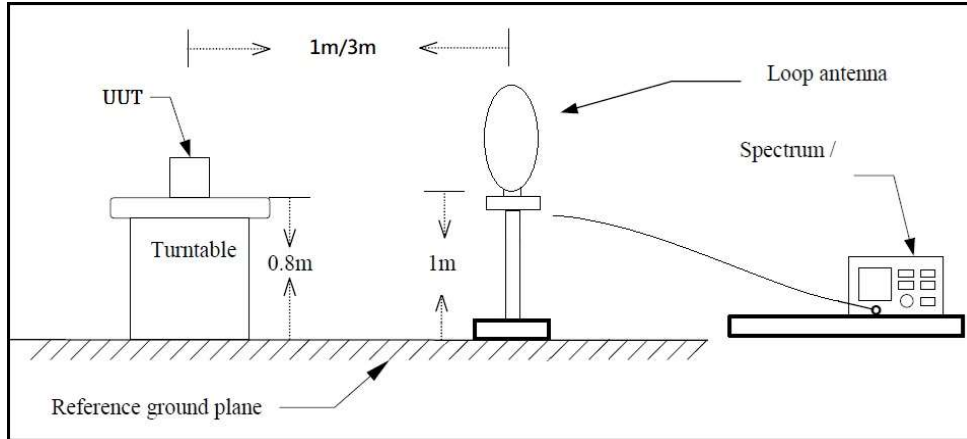

### 30MHz~1GHz

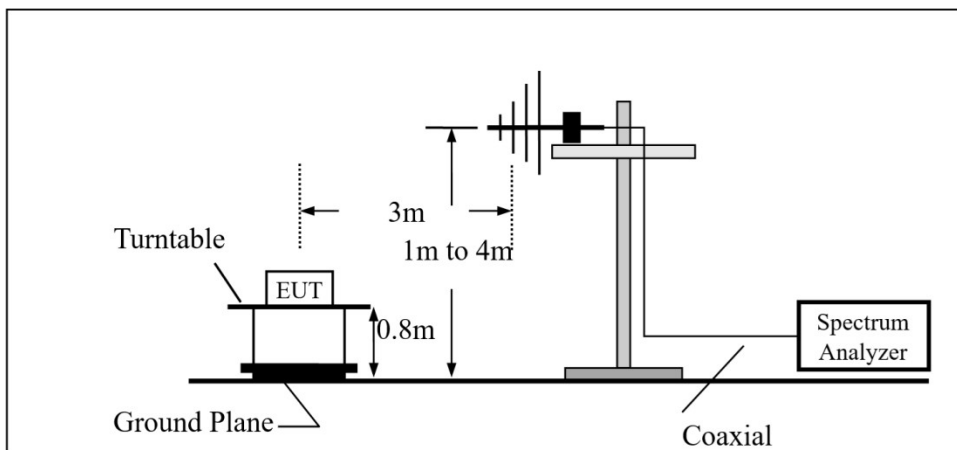

### Above 1GHz

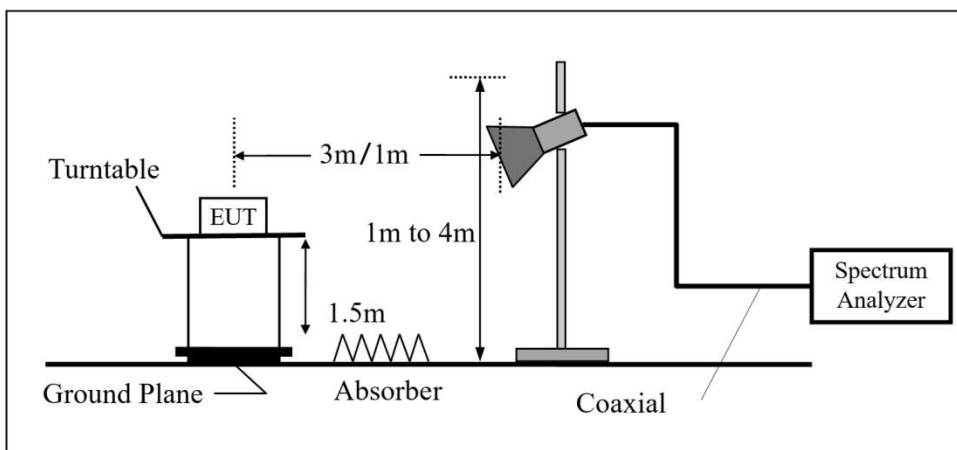

### 2.6.3 Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested according test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements.

#### **For Radiated emission below 30MHz**

- (1) The EUT was placed on the top of a rotating table 0.8 meters above the ground in a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### **For Radiated emission Above 30MHz**

- (1) The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for the test. The table was rotated 360 degrees to determine the position of the highest radiation.
- (2) The EUT was set 3 meters away from the interference-receiving antenna, the height of the antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength.
- (3) Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- (4) For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- (5) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- (6) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets the average limit, measurement with the average detector is unnecessary.

### 2.6.4 Duty Cycle


Mode	Frequency (MHz)	on time (ms)	on+off time (ms)	Duty cycle	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11b	2412	3.710	3.710	1.000	0.000	0.010
802.11g	2412	1.440	1.455	0.990	0.045	0.010
802.11n HT20	2412	1.350	1.370	0.985	0.064	0.010

### 2.6.5 Test Result of Radiated Band Edge Measurement

The following tables for radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X axis) were recorded in this report.

Test Frequency	
RF	802.11b / 802.11g / 802.11n HT20
Tx	CH01 (2412MHz) CH11 (2462MHz)

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

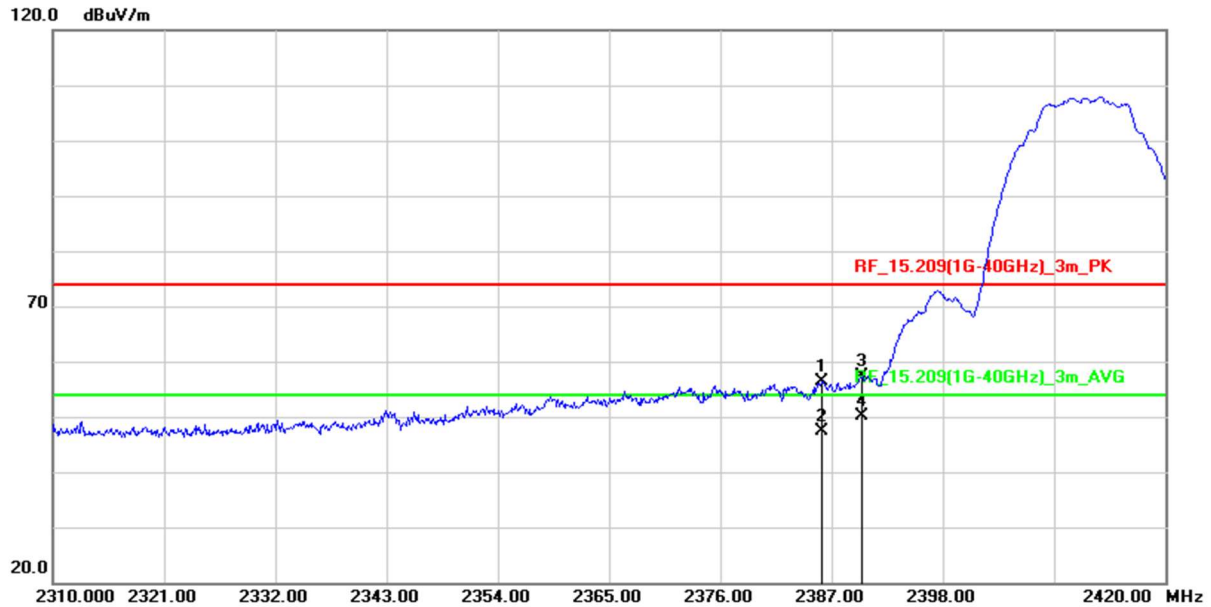


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.010	63.16	-6.70	56.46	74.00	-17.54	peak
2	2386.010	54.11	-6.70	47.41	54.00	-6.59	AVG
3	2390.000	64.17	-6.69	57.48	74.00	-16.52	peak
4 *	2390.000	56.84	-6.69	50.15	54.00	-3.85	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

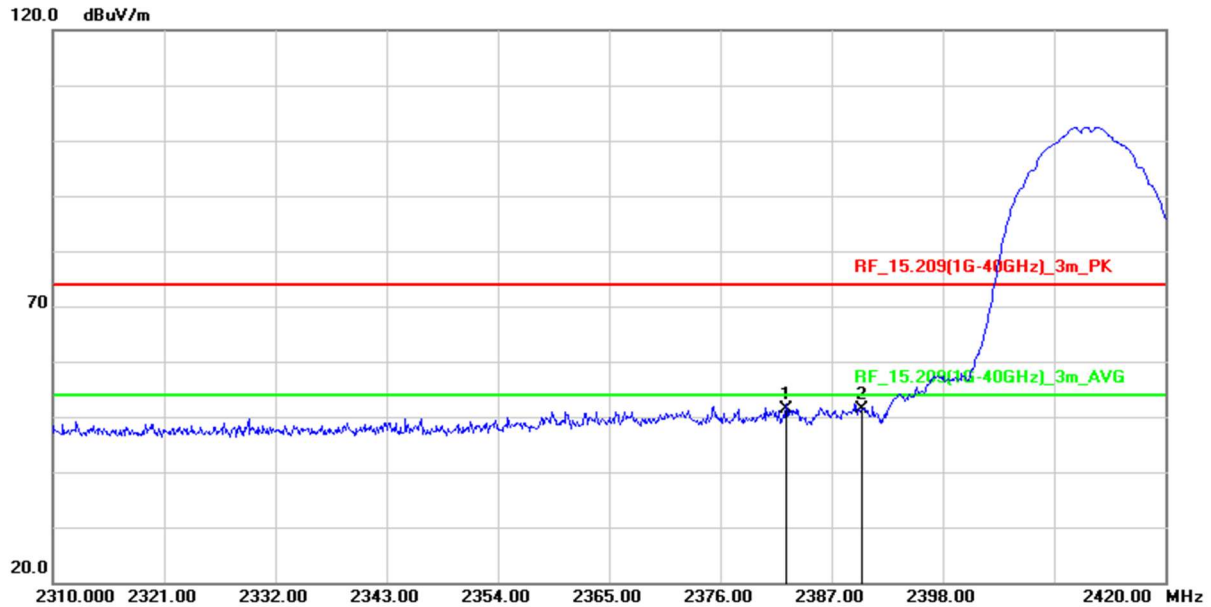


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1 *	2382.490	58.17	-6.70	51.47	74.00	-22.53	peak
2	2390.000	58.00	-6.69	51.31	74.00	-22.69	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

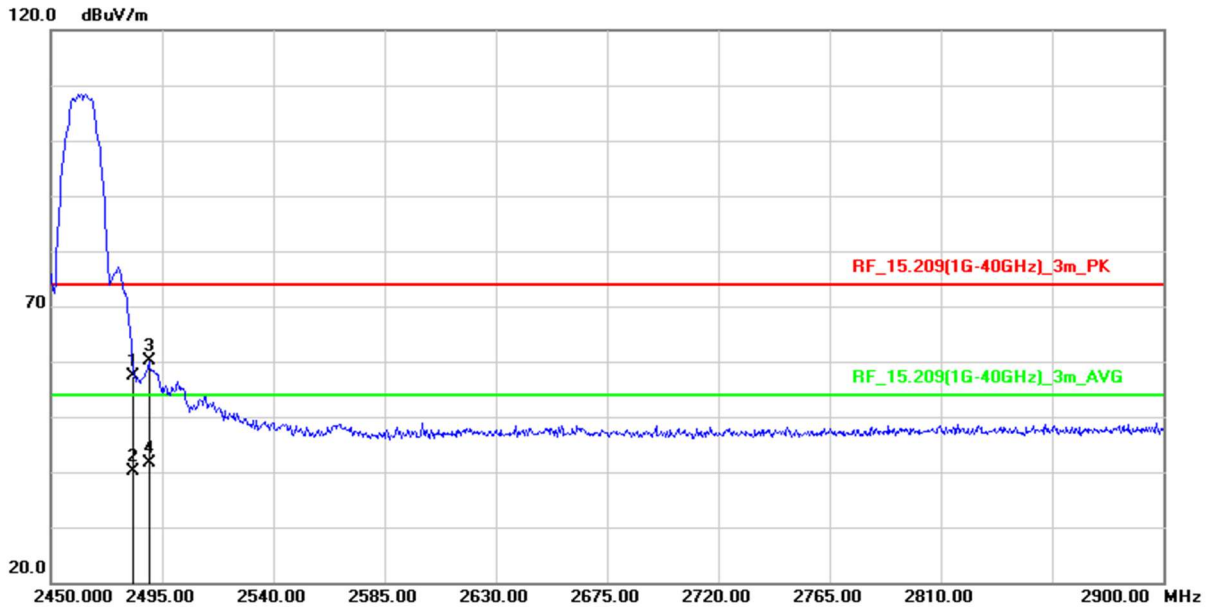


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.96	-6.61	57.35	74.00	-16.65	peak
2	2483.500	46.65	-6.61	40.04	54.00	-13.96	AVG
3	2489.600	66.78	-6.60	60.18	74.00	-13.82	peak
4 *	2489.600	48.29	-6.60	41.69	54.00	-12.31	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit



<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

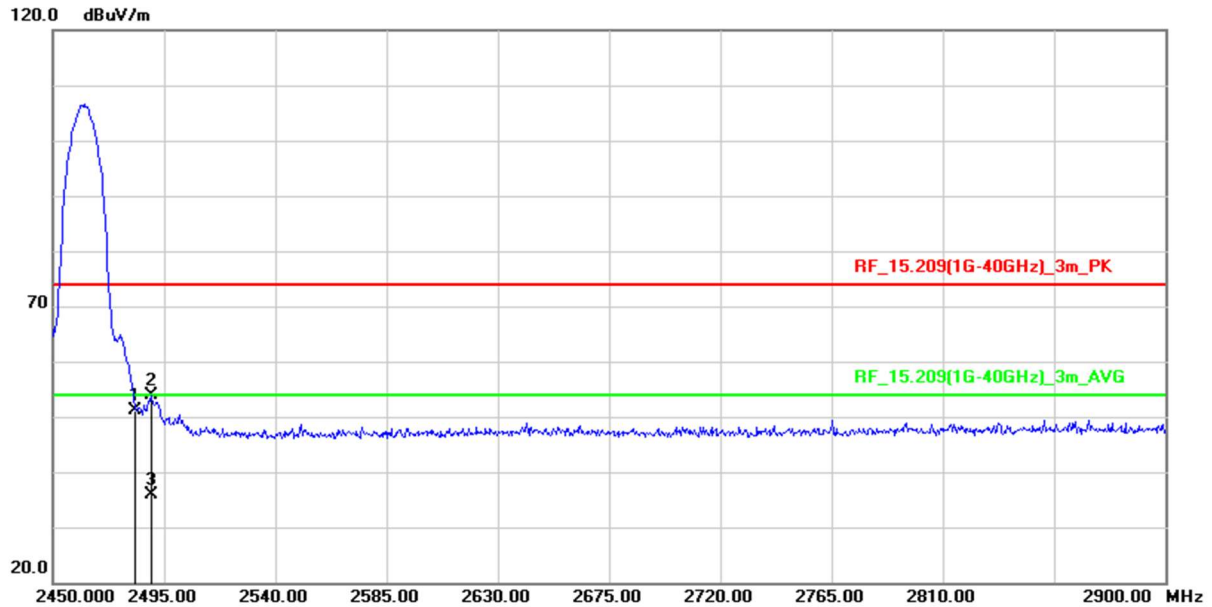


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	57.82	-6.61	51.21	74.00	-22.79	peak
2	2489.600	60.38	-6.60	53.78	74.00	-20.22	peak
3 *	2489.600	42.38	-6.60	35.78	54.00	-18.22	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

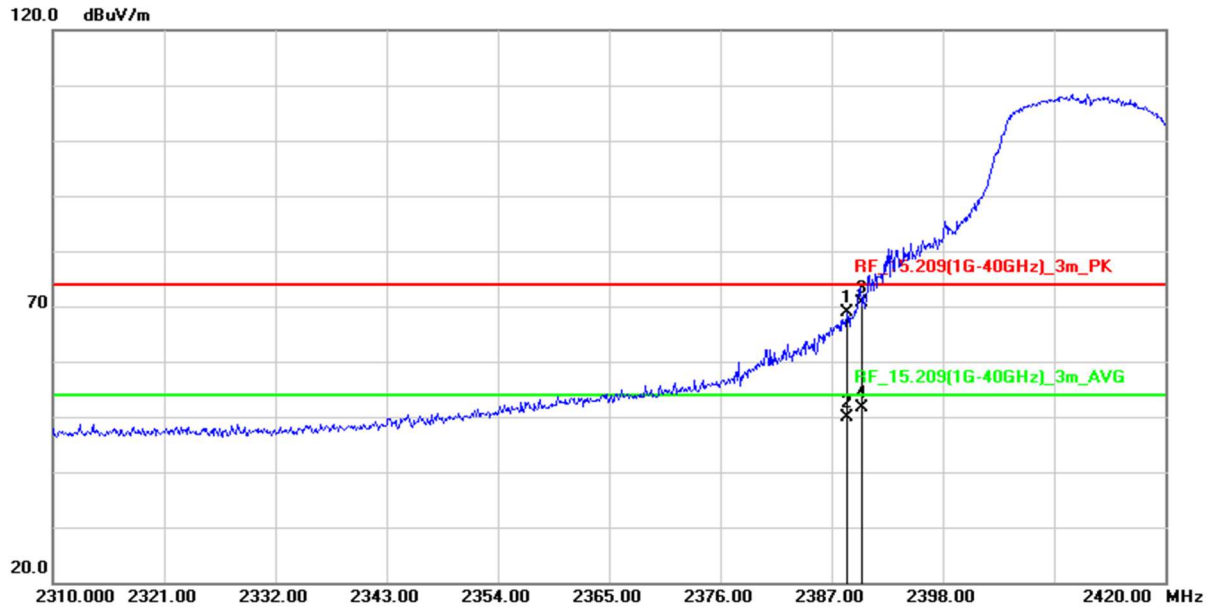


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.540	75.51	-6.70	68.81	74.00	-5.19	peak
2	2388.540	56.68	-6.70	49.98	54.00	-4.02	AVG
3	2390.000	77.24	-6.69	70.55	74.00	-3.45	peak
4 *	2390.000	58.25	-6.69	51.56	54.00	-2.44	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

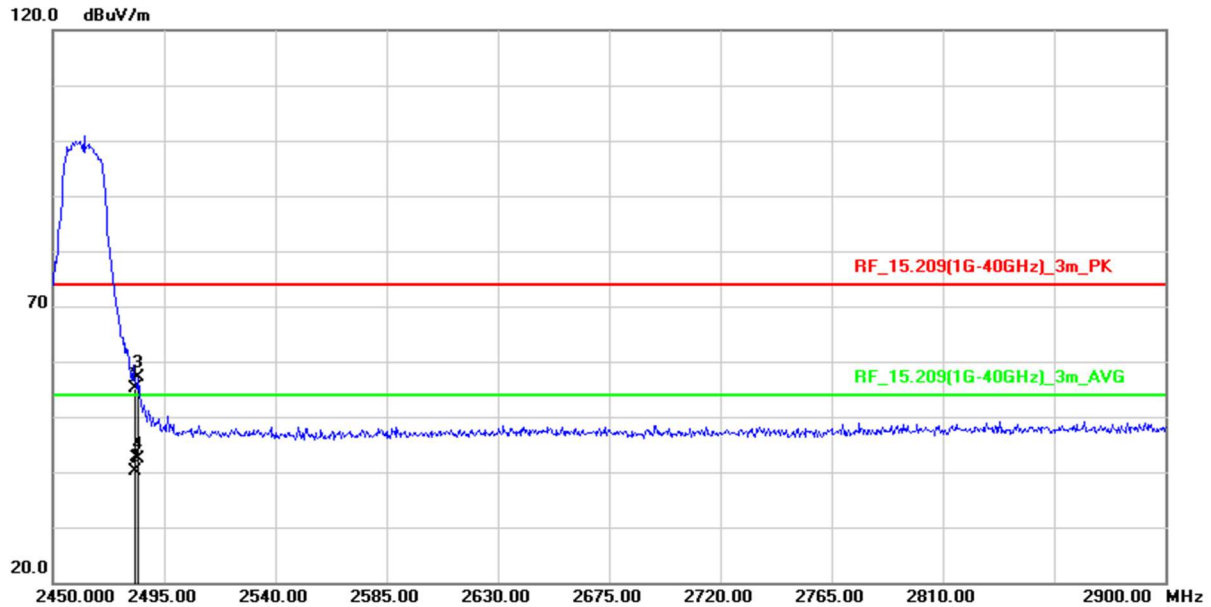


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.69	-6.61	55.08	74.00	-18.92	peak
2	2483.500	46.82	-6.61	40.21	54.00	-13.79	AVG
3	2484.650	63.71	-6.61	57.10	74.00	-16.90	peak
4 *	2484.650	48.94	-6.61	42.33	54.00	-11.67	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

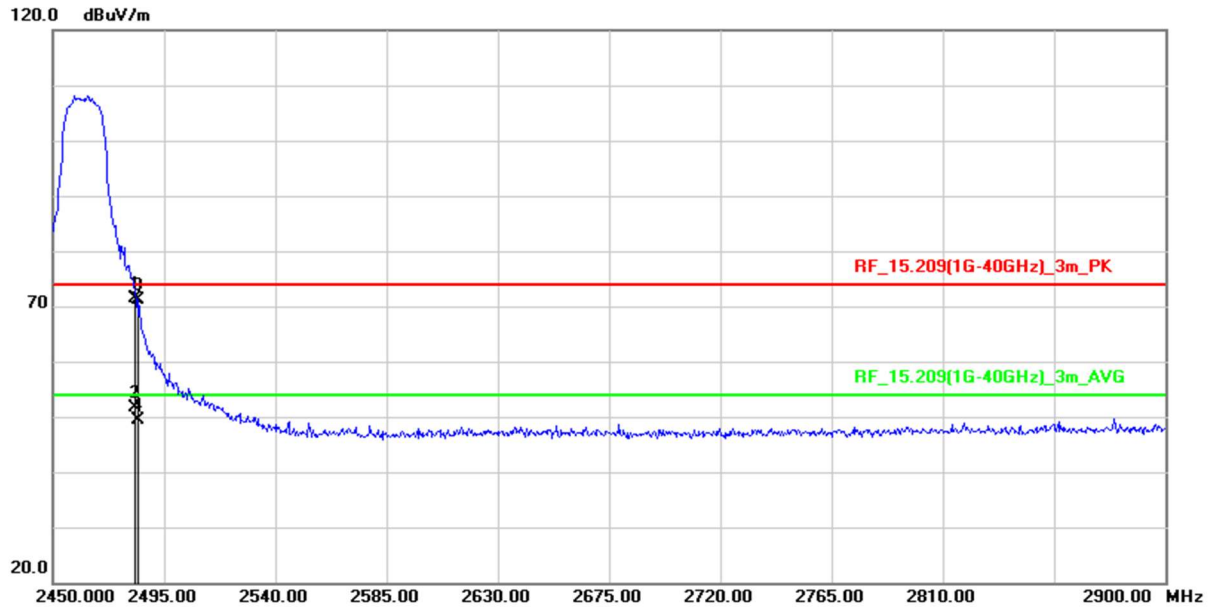


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	78.00	-6.61	71.39	74.00	-2.61	peak
2 *	2483.500	58.34	-6.61	51.73	54.00	-2.27	AVG
3	2484.650	77.64	-6.61	71.03	74.00	-2.97	peak
4	2484.650	55.94	-6.61	49.33	54.00	-4.67	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

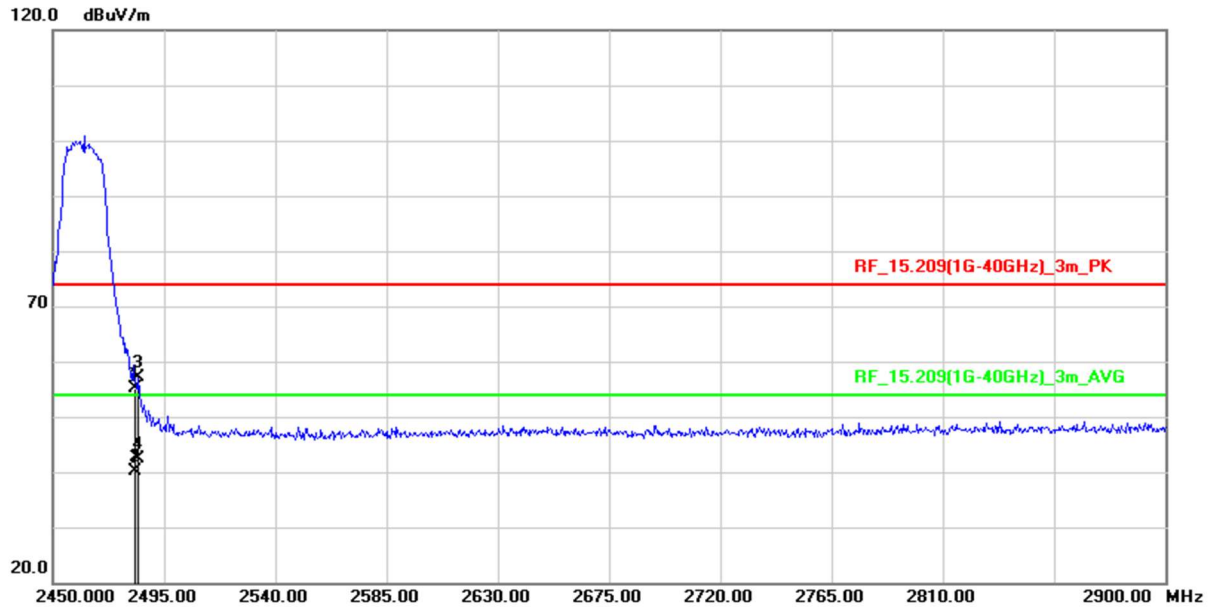


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.69	-6.61	55.08	74.00	-18.92	peak
2	2483.500	46.82	-6.61	40.21	54.00	-13.79	AVG
3	2484.650	63.71	-6.61	57.10	74.00	-16.90	peak
4 *	2484.650	48.94	-6.61	42.33	54.00	-11.67	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

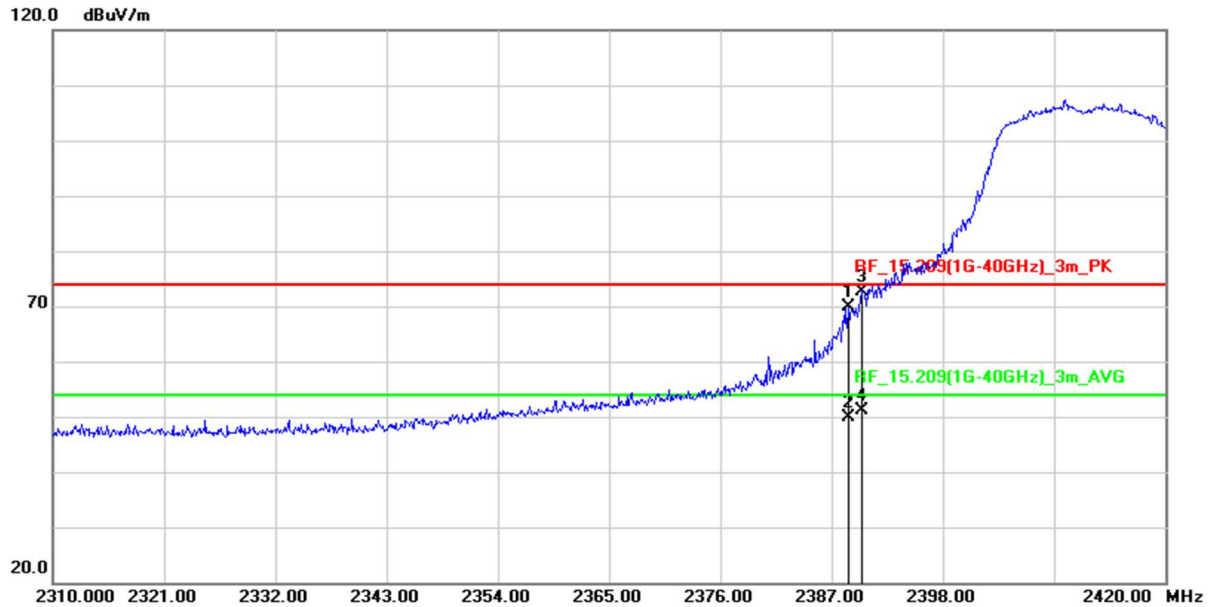


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.650	76.57	-6.70	69.87	74.00	-4.13	peak
2	2388.650	56.68	-6.70	49.98	54.00	-4.02	AVG
3 *	2390.000	79.31	-6.69	72.62	74.00	-1.38	peak
4	2390.000	57.94	-6.69	51.25	54.00	-2.75	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

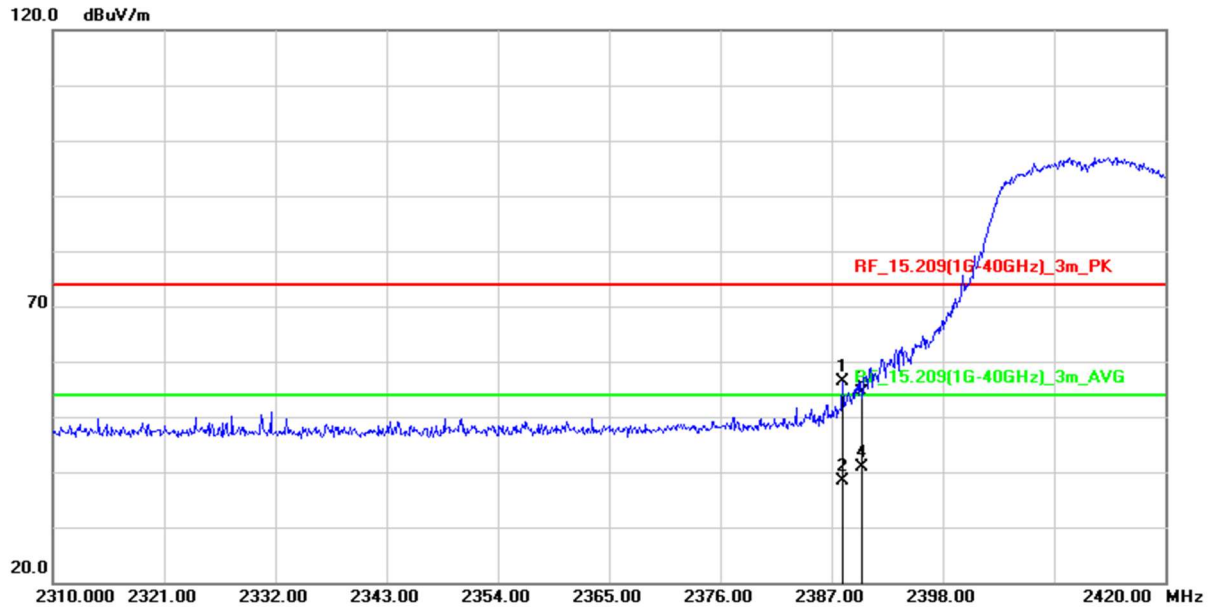


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.100	63.01	-6.70	56.31	74.00	-17.69	peak
2	2388.100	44.97	-6.70	38.27	54.00	-15.73	AVG
3	2390.000	61.17	-6.69	54.48	74.00	-19.52	peak
4 *	2390.000	47.67	-6.69	40.98	54.00	-13.02	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

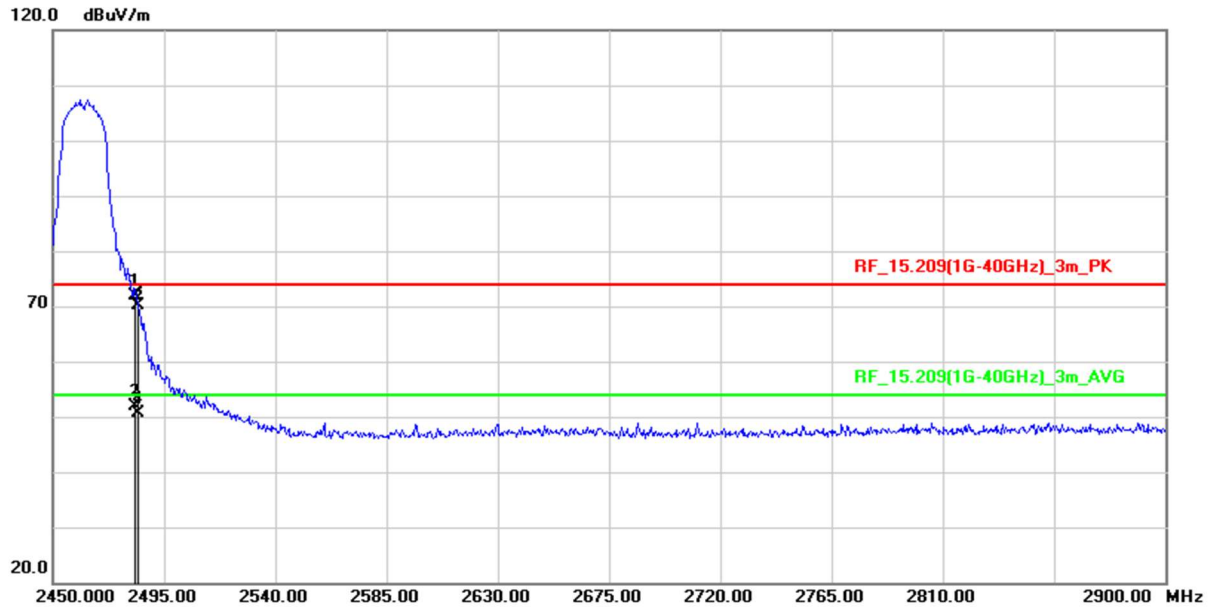


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1 *	2483.500	78.49	-6.61	71.88	74.00	-2.12	peak
2	2483.500	58.48	-6.61	51.87	54.00	-2.13	AVG
3	2484.200	76.73	-6.61	70.12	74.00	-3.88	peak
4	2484.200	57.18	-6.61	50.57	54.00	-3.43	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit



<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/21
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

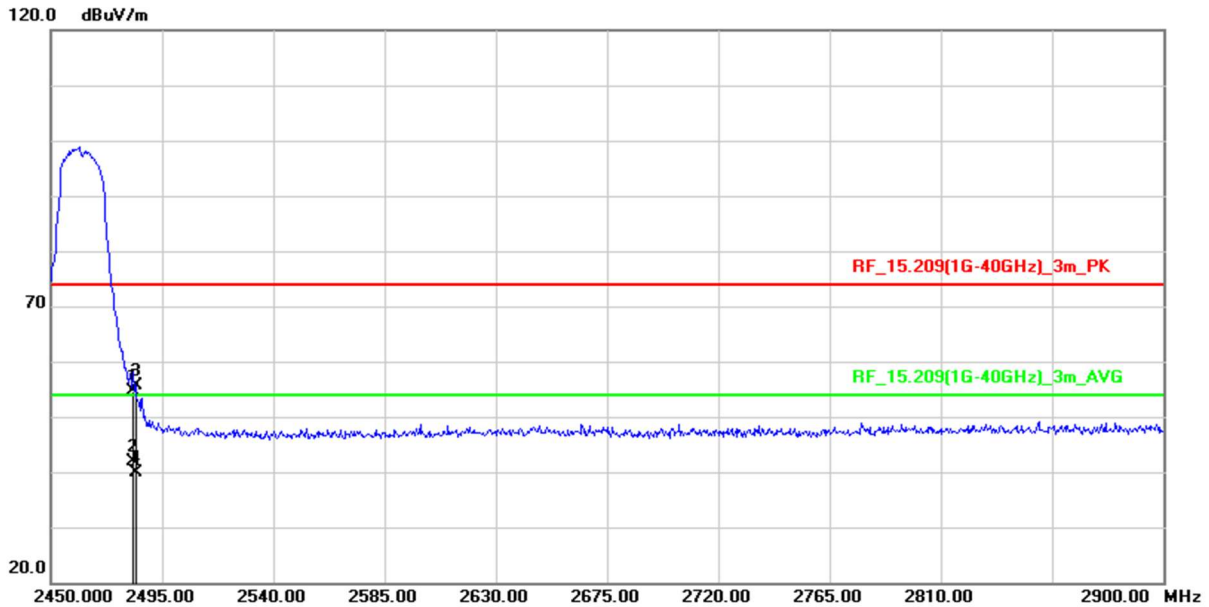

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	61.33	-6.61	54.72	74.00	-19.28	peak
2 *	2483.500	48.55	-6.61	41.94	54.00	-12.06	AVG
3	2484.200	62.19	-6.61	55.58	74.00	-18.42	peak
4	2484.200	46.58	-6.61	39.97	54.00	-14.03	AVG

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


### 2.6.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency	
<b>RF</b>	<b>802.11b / 802.11g / 802.11n HT20</b>
<b>Tx</b>	CH01 (2412MHz) CH06 (2437MHz) CH11 (2462MHz)

### Above 1GHz Data

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

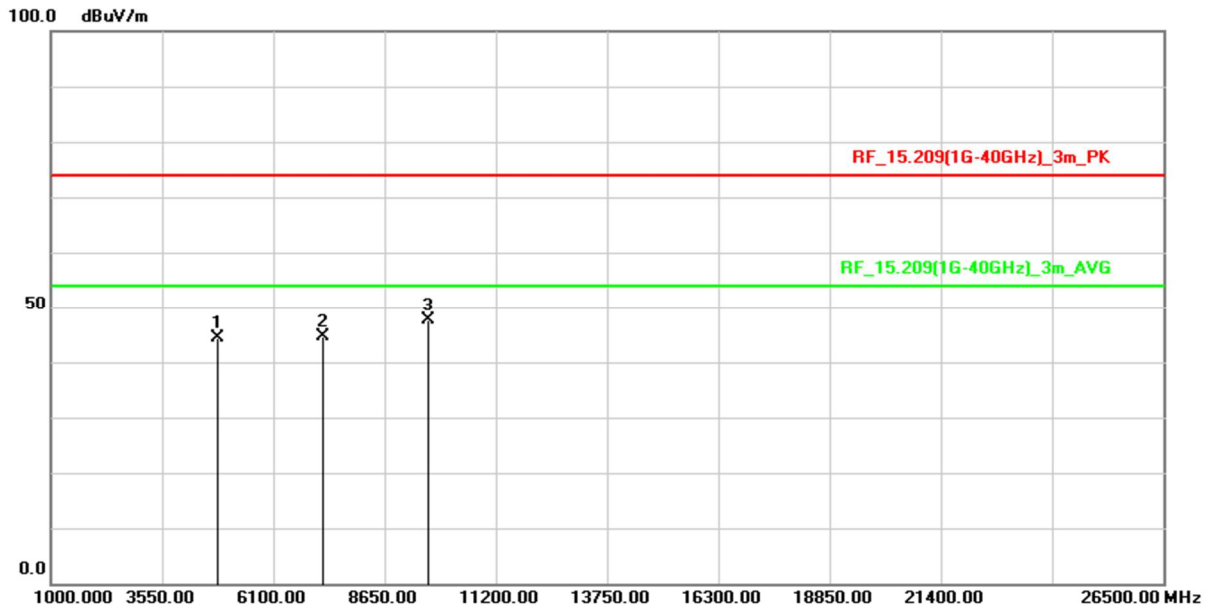


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	65.05	-20.64	44.41	74.00	-29.59	peak
2	7236.000	59.47	-14.88	44.59	74.00	-29.41	peak
3	9648.000	58.48	-10.91	47.57	74.00	-26.43	peak

#### Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

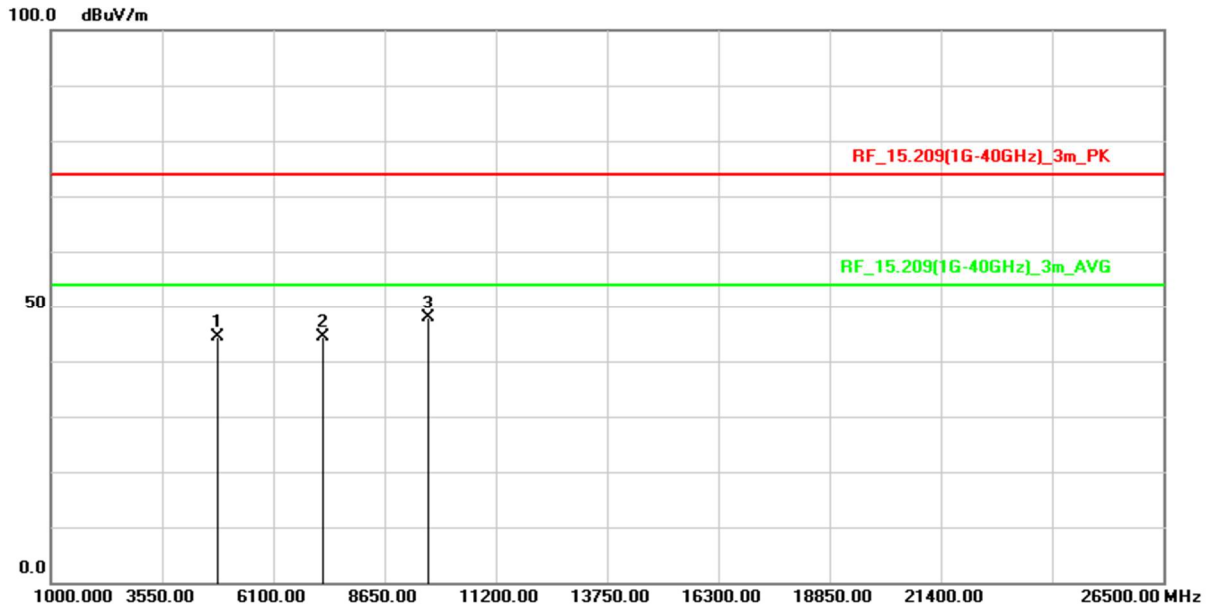


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	65.06	-20.64	44.42	74.00	-29.58	peak
2	7236.000	59.16	-14.88	44.28	74.00	-29.72	peak
3	9648.000	58.78	-10.91	47.87	74.00	-26.13	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

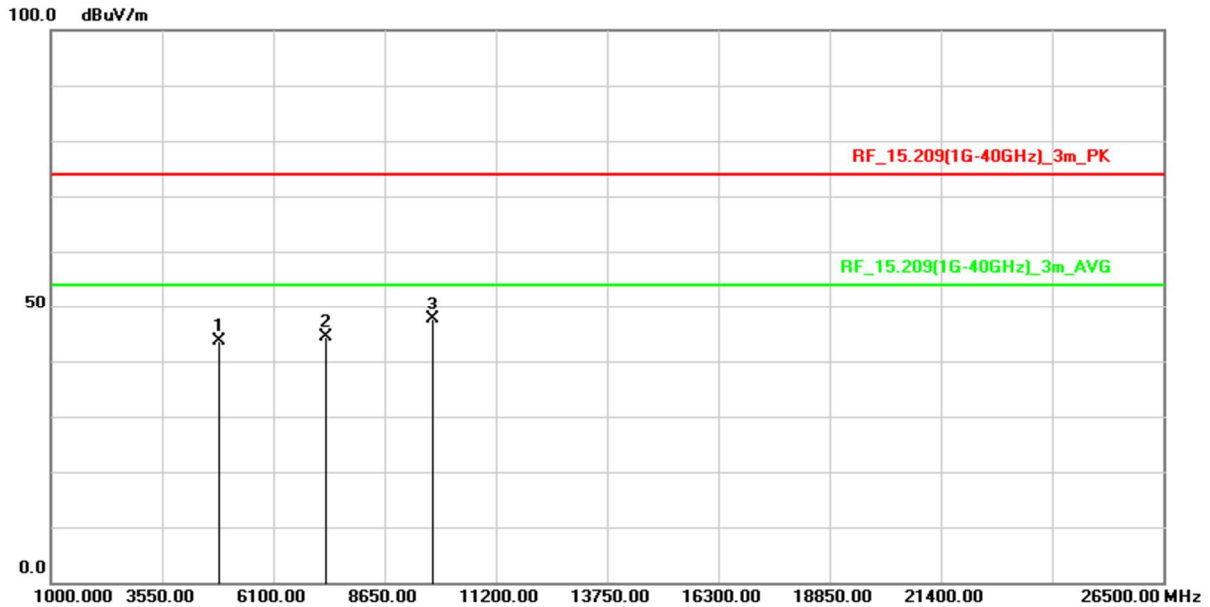


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	64.26	-20.72	43.54	74.00	-30.46	peak
2	7311.000	59.27	-15.01	44.26	74.00	-29.74	peak
3	9748.000	58.36	-10.73	47.63	74.00	-26.37	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

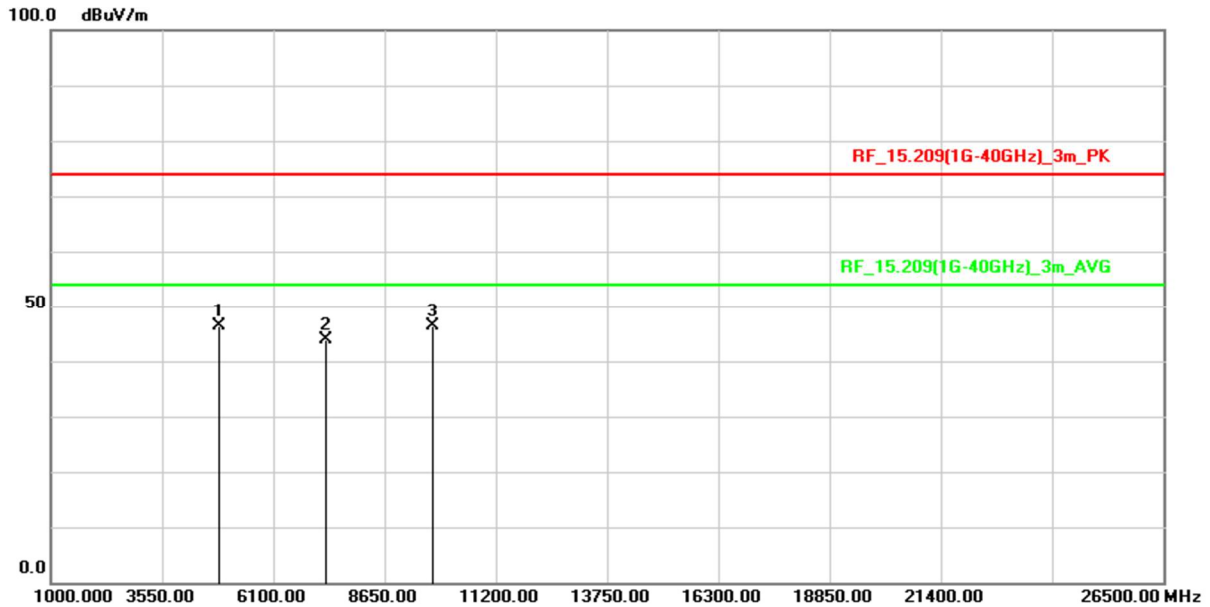


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	67.16	-20.72	46.44	74.00	-27.56	peak
2	7311.000	58.77	-15.01	43.76	74.00	-30.24	peak
3	9748.000	57.23	-10.73	46.50	74.00	-27.50	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

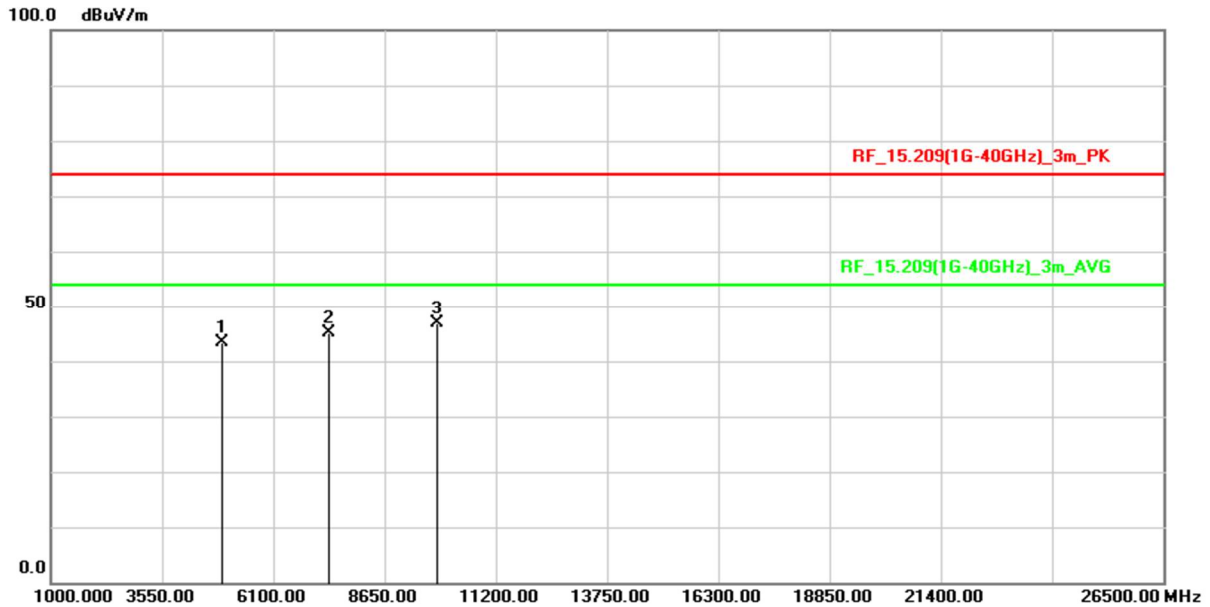


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	64.19	-20.74	43.45	74.00	-30.55	peak
2	7386.000	59.89	-14.70	45.19	74.00	-28.81	peak
3	9848.000	57.53	-10.63	46.90	74.00	-27.10	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11b)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

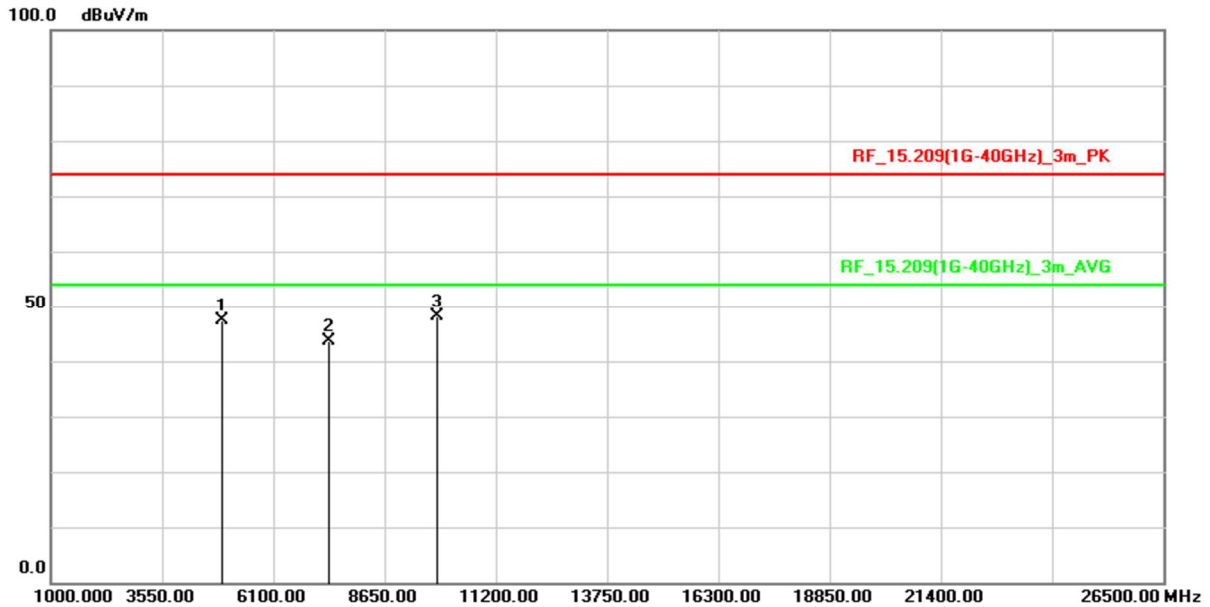


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	68.21	-20.74	47.47	74.00	-26.53	peak
2	7386.000	58.41	-14.70	43.71	74.00	-30.29	peak
3	9848.000	58.65	-10.63	48.02	74.00	-25.98	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit



<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

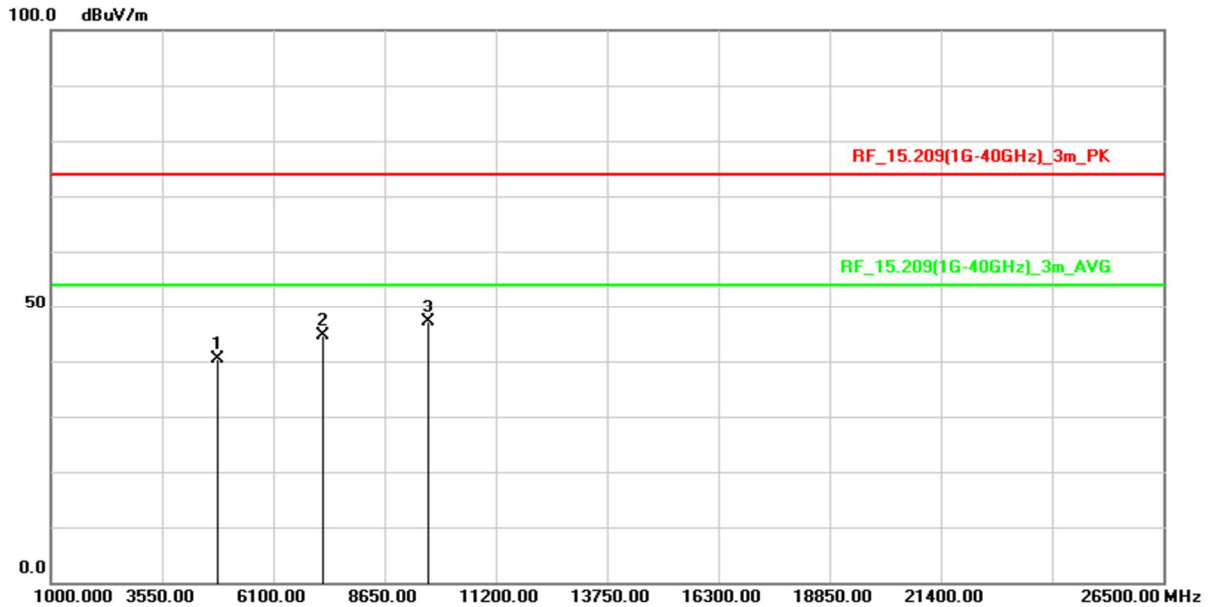


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	60.93	-20.64	40.29	74.00	-33.71	peak
2	7236.000	59.43	-14.88	44.55	74.00	-29.45	peak
3	9648.000	58.15	-10.91	47.24	74.00	-26.76	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

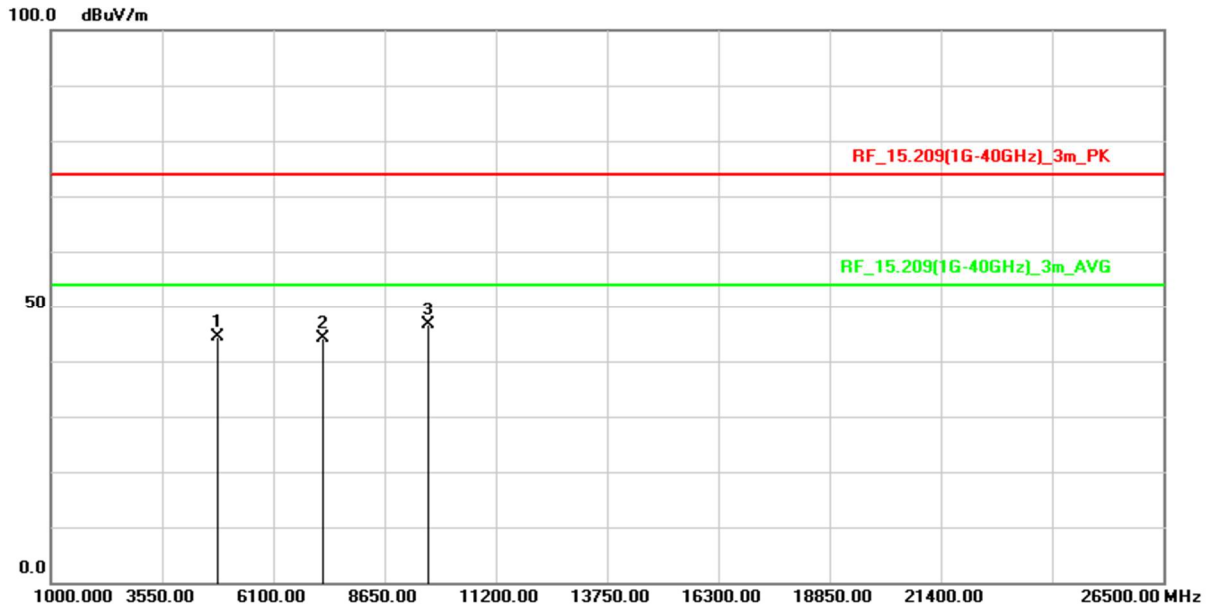


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	65.06	-20.64	44.42	74.00	-29.58	peak
2	7236.000	59.04	-14.88	44.16	74.00	-29.84	peak
3	9648.000	57.64	-10.91	46.73	74.00	-27.27	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

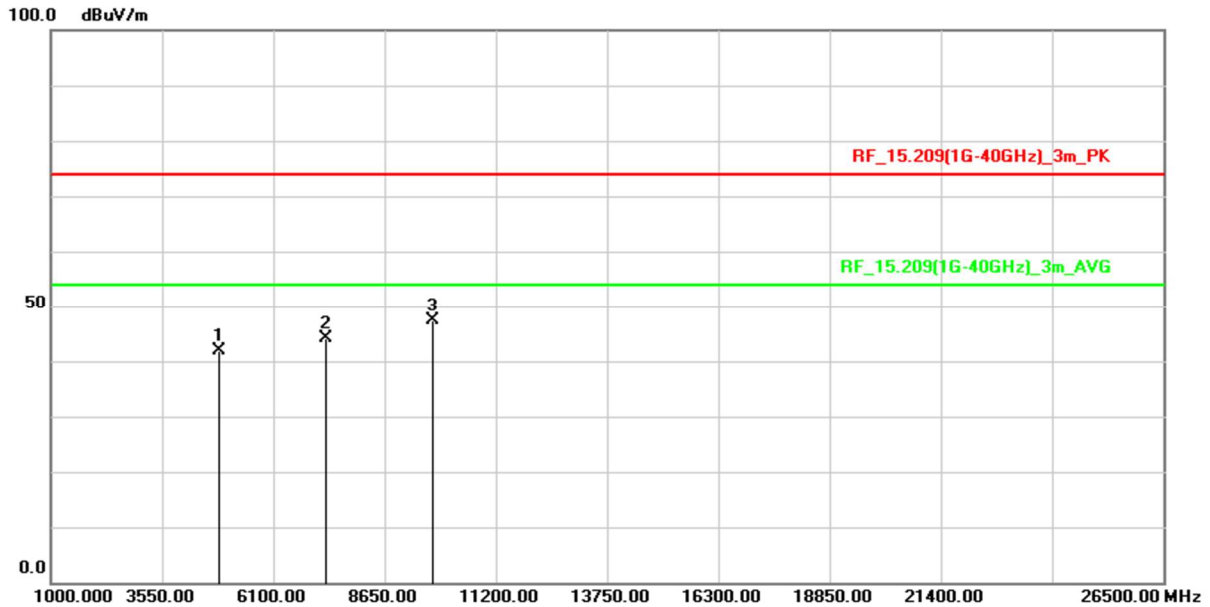


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	62.53	-20.72	41.81	74.00	-32.19	peak
2	7311.000	59.10	-15.01	44.09	74.00	-29.91	peak
3	9748.000	58.13	-10.73	47.40	74.00	-26.60	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

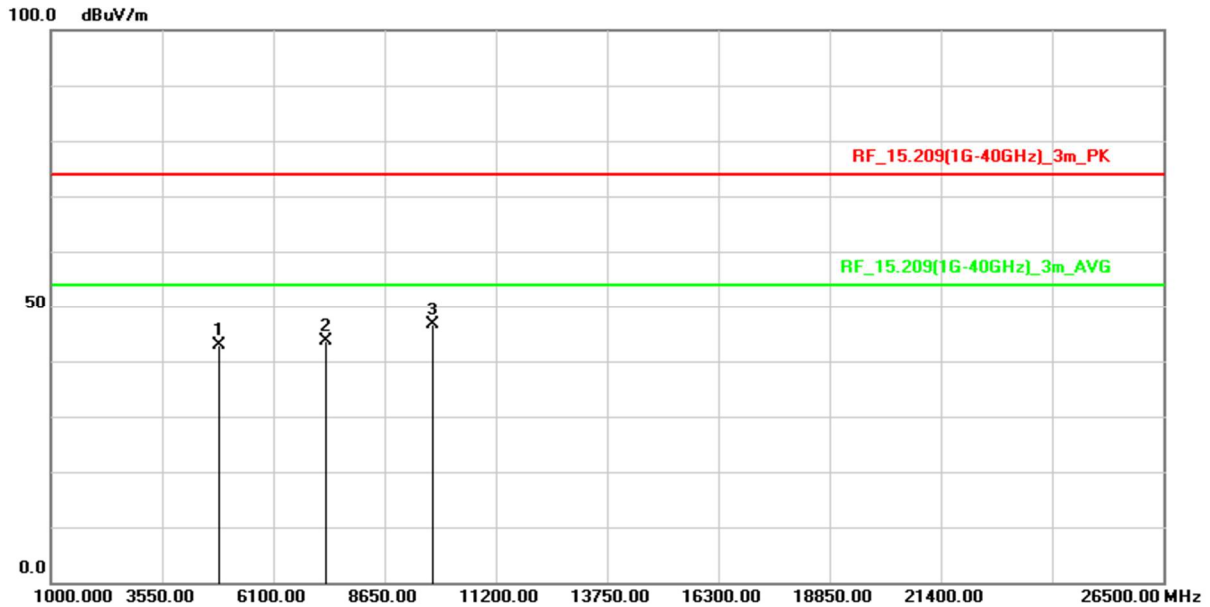


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	63.70	-20.72	42.98	74.00	-31.02	peak
2	7311.000	58.74	-15.01	43.73	74.00	-30.27	peak
3	9748.000	57.29	-10.73	46.56	74.00	-27.44	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

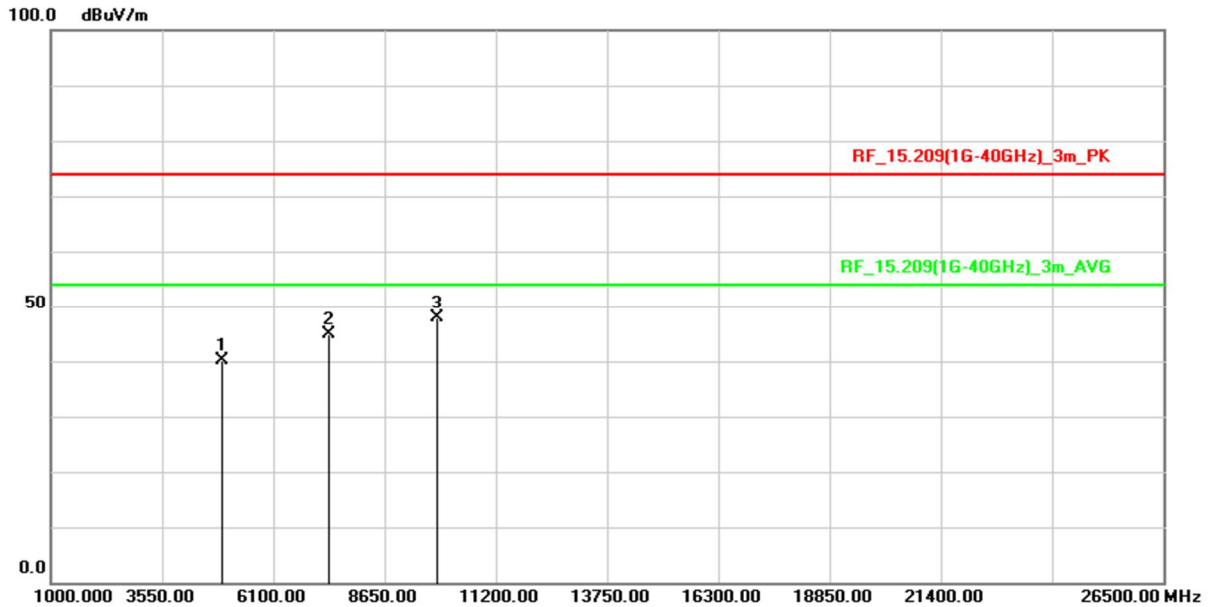


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	60.83	-20.74	40.09	74.00	-33.91	peak
2	7386.000	59.56	-14.70	44.86	74.00	-29.14	peak
3	9848.000	58.43	-10.63	47.80	74.00	-26.20	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

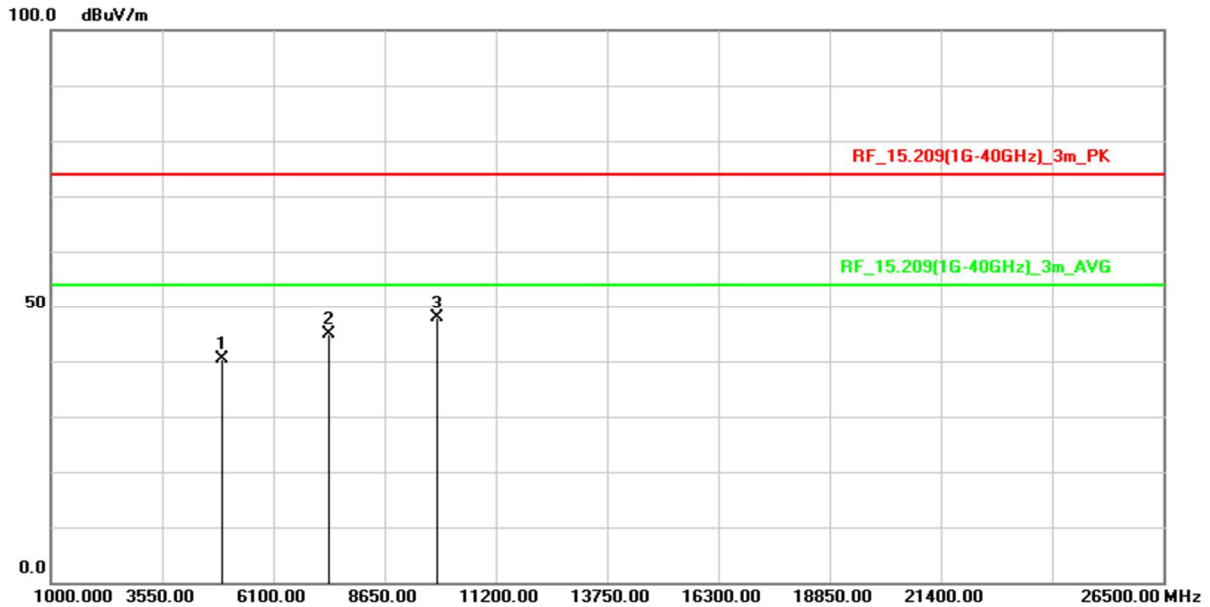


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	61.01	-20.74	40.27	74.00	-33.73	peak
2	7386.000	59.61	-14.70	44.91	74.00	-29.09	peak
3	9848.000	58.55	-10.63	47.92	74.00	-26.08	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

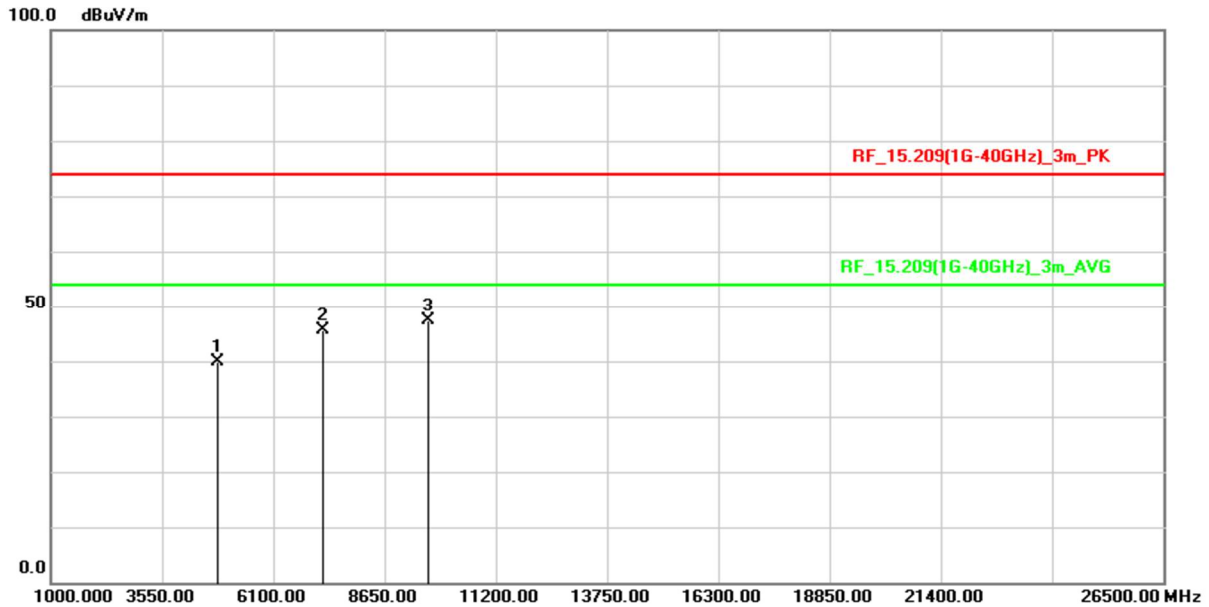


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	60.63	-20.64	39.99	74.00	-34.01	peak
2	7236.000	60.43	-14.88	45.55	74.00	-28.45	peak
3	9648.000	58.21	-10.91	47.30	74.00	-26.70	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH01(2412MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

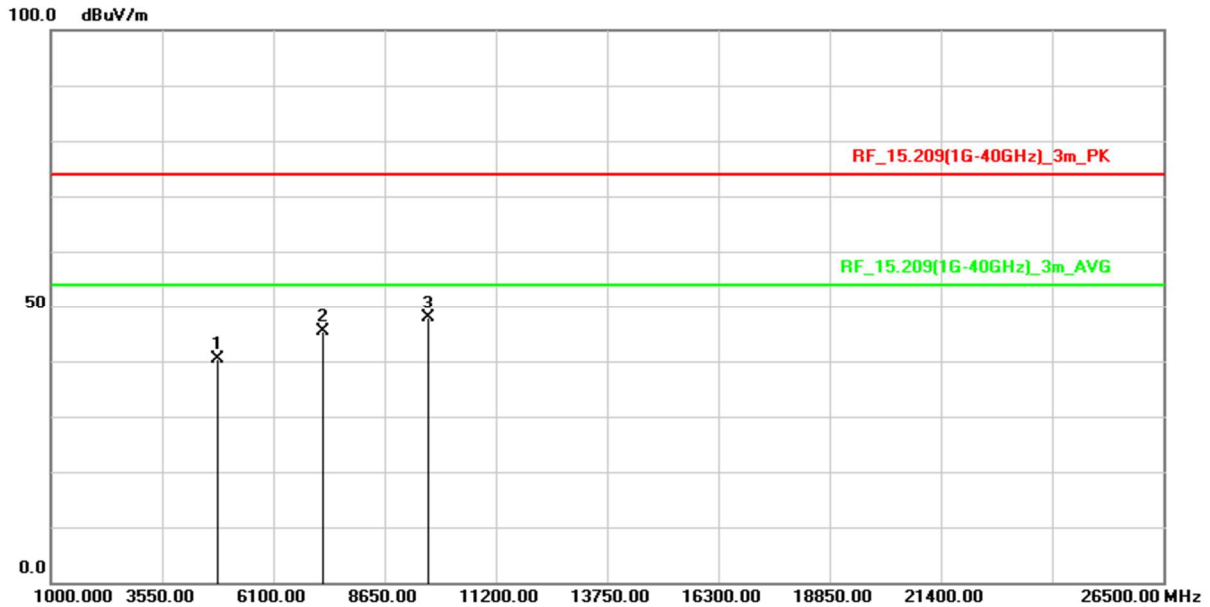


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	61.06	-20.64	40.42	74.00	-33.58	peak
2	7236.000	60.35	-14.88	45.47	74.00	-28.53	peak
3	9648.000	58.82	-10.91	47.91	74.00	-26.09	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit



<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

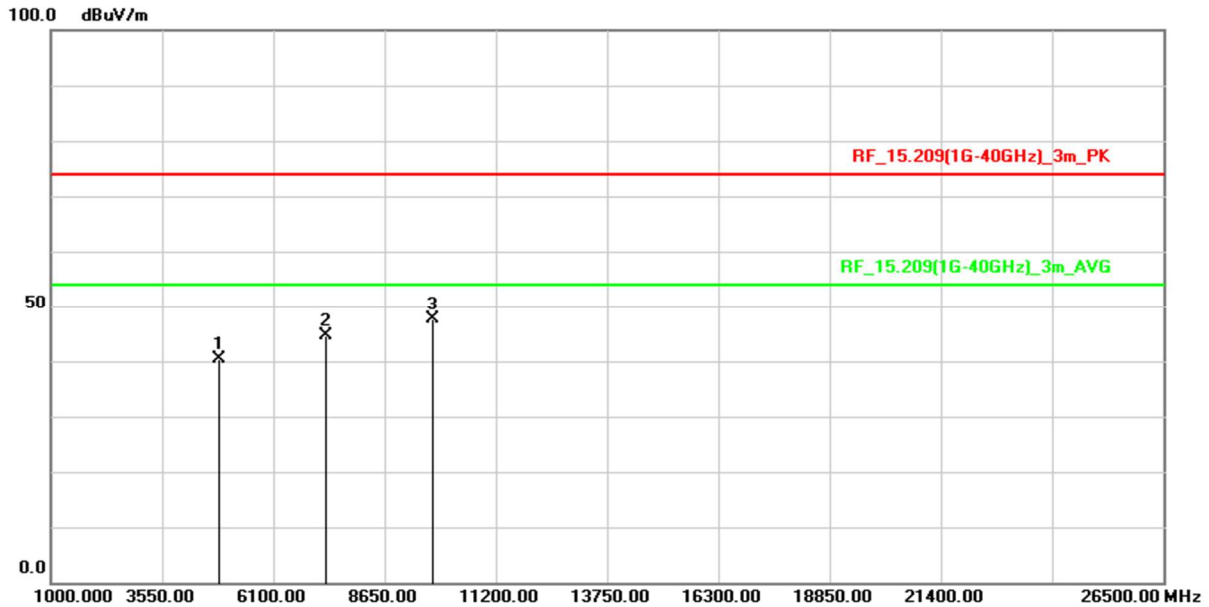


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	61.14	-20.72	40.42	74.00	-33.58	peak
2	7311.000	59.57	-15.01	44.56	74.00	-29.44	peak
3	9748.000	58.37	-10.73	47.64	74.00	-26.36	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

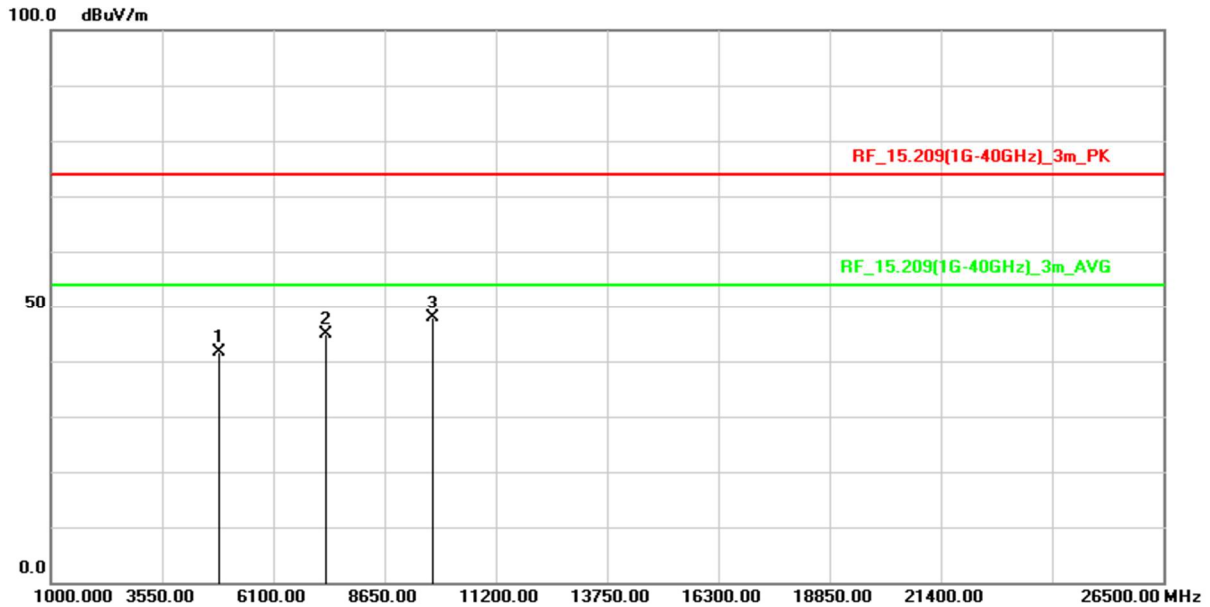


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	62.27	-20.72	41.55	74.00	-32.45	peak
2	7311.000	59.89	-15.01	44.88	74.00	-29.12	peak
3	9748.000	58.64	-10.73	47.91	74.00	-26.09	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

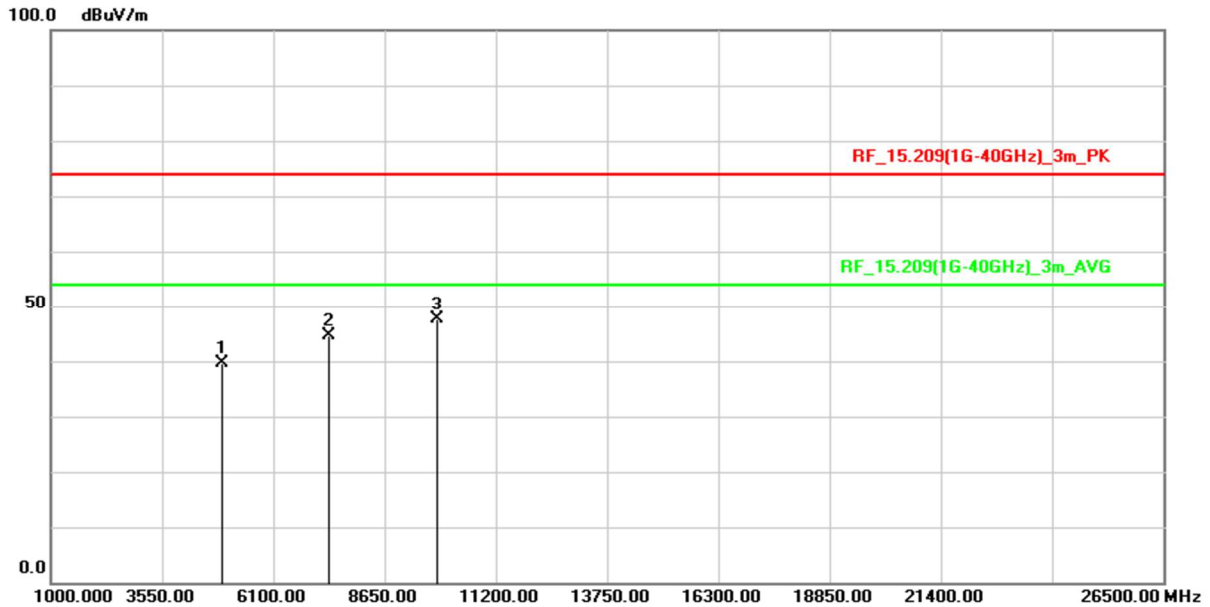


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	60.47	-20.74	39.73	74.00	-34.27	peak
2	7386.000	59.22	-14.70	44.52	74.00	-29.48	peak
3	9848.000	58.24	-10.63	47.61	74.00	-26.39	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11n HT20)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH11(2462MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

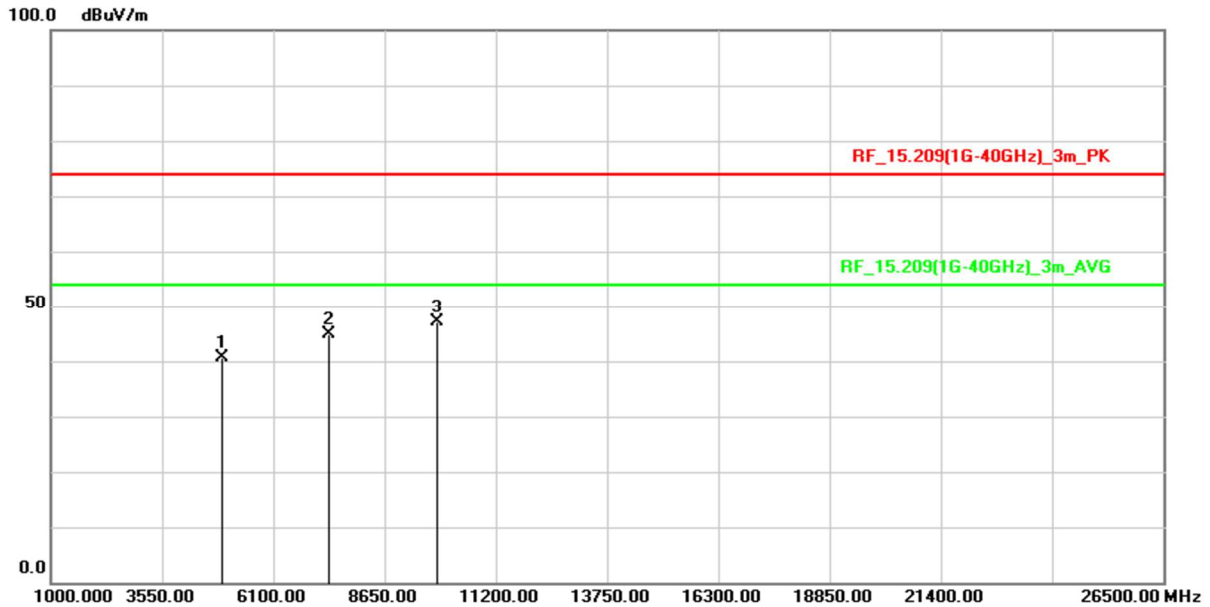


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	61.27	-20.74	40.53	74.00	-33.47	peak
2	7386.000	59.58	-14.70	44.88	74.00	-29.12	peak
3	9848.000	57.83	-10.63	47.20	74.00	-26.80	peak

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

**Below 1GHz Data**

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Horizontal	<b>Relative Humidity :</b>	40 %

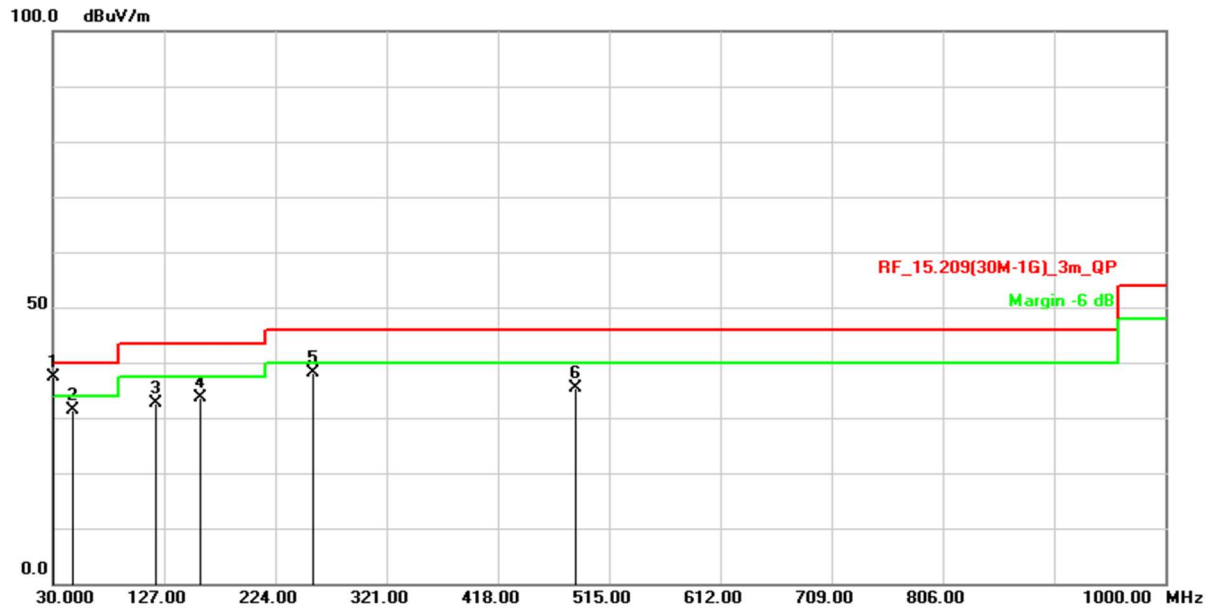


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.0000	50.27	-12.79	37.48	40.00	-2.52	QP
2	47.4600	42.59	-11.28	31.31	40.00	-8.69	QP
3	120.2100	46.18	-13.52	32.66	43.50	-10.84	QP
4	158.0400	44.82	-11.23	33.59	43.50	-9.91	QP
5	256.9800	50.34	-12.16	38.18	46.00	-7.82	QP
6	485.9000	40.86	-5.57	35.29	46.00	-10.71	QP

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

<b>Test Mode :</b>	Transmit(802.11g)	<b>Test Date :</b>	2021/10/19
<b>Test Channel :</b>	CH06(2437MHz)	<b>Temperature :</b>	25.2 °C
<b>Polarization :</b>	Vertical	<b>Relative Humidity :</b>	40 %

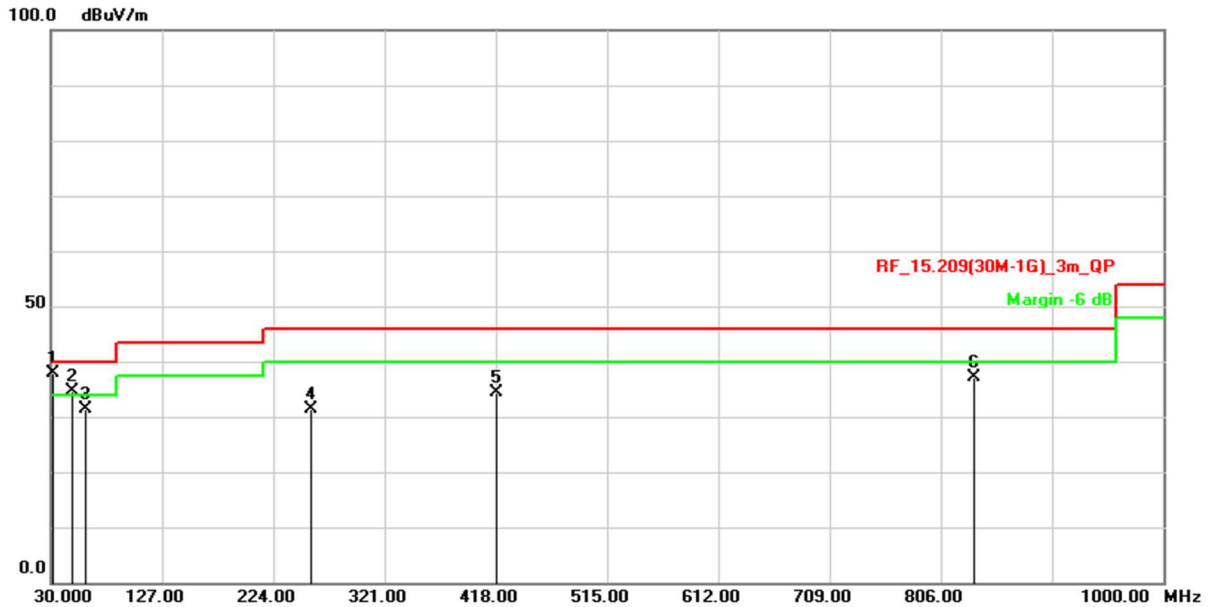

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	31.9400	50.54	-12.78	37.76	40.00	-2.24	QP
2	48.4300	45.91	-11.38	34.53	40.00	-5.47	QP
3	60.0700	43.14	-11.83	31.31	40.00	-8.69	QP
4	256.9800	43.58	-12.16	31.42	46.00	-14.58	QP
5	418.0000	41.54	-7.24	34.30	46.00	-11.70	QP
6	835.1000	35.81	1.20	37.01	46.00	-8.99	QP

**Remark :**

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


## 2.7 AC Conducted Emissions Measurement

### 2.7.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB $\mu$ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

\*Decreases with the logarithm of the frequency

### 2.7.2 Test Setup

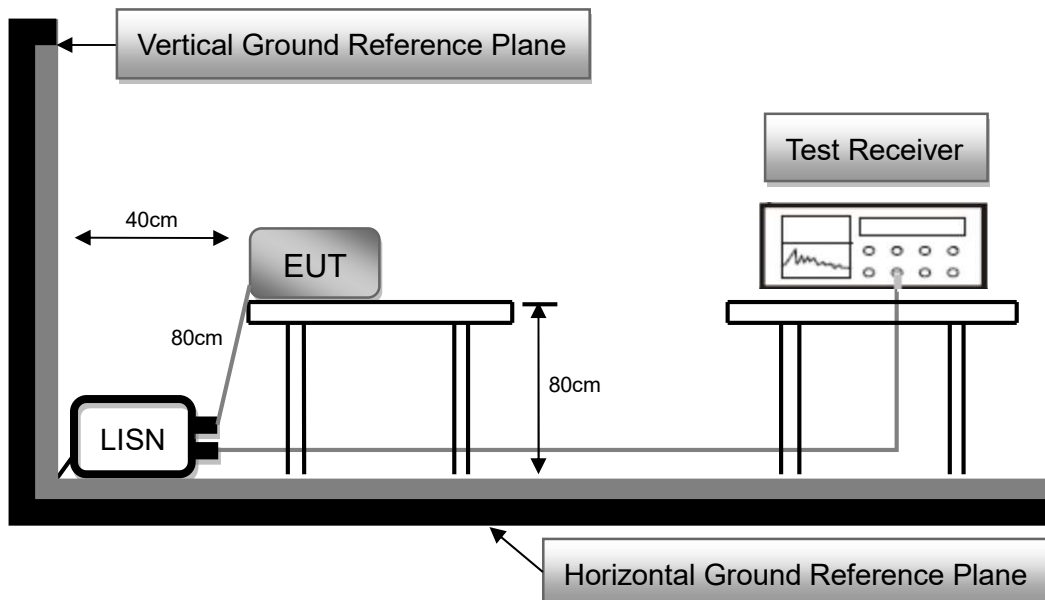


### 2.7.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.



### 2.7.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2021/10/18	Phase :	L
Temperature :	26°C	Humidity :	38 %

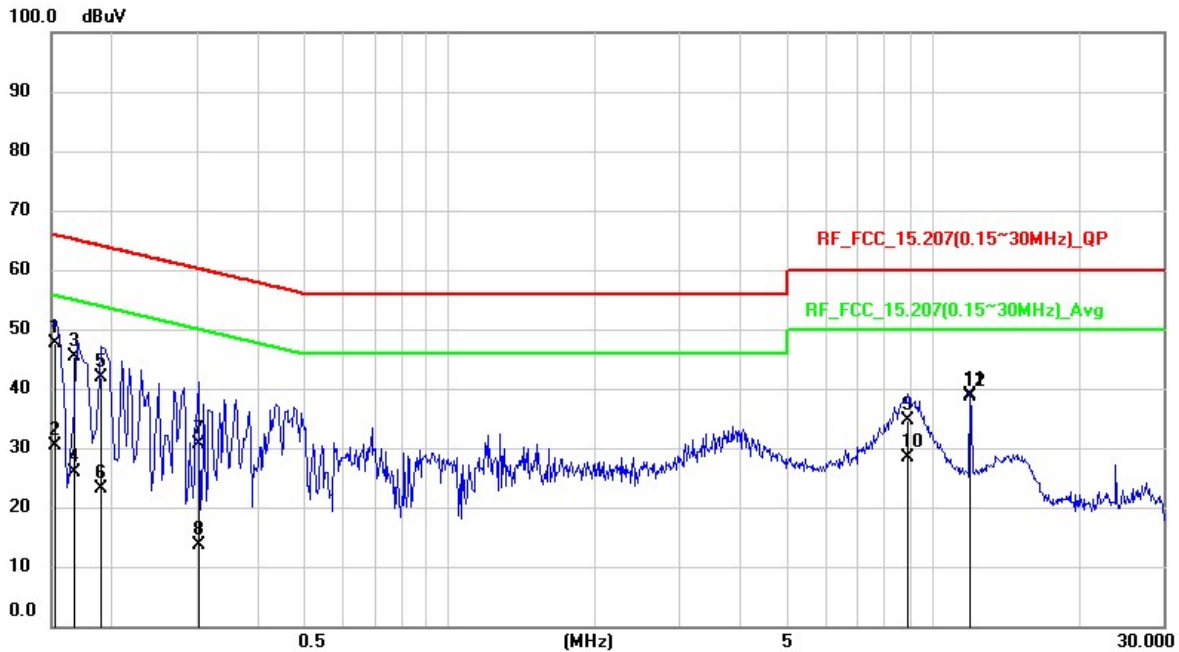


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1524	37.92	9.82	47.74	65.87	-18.13	QP
2	0.1524	20.48	9.82	30.3	55.87	-25.57	AVG
3	0.1661	35.5	9.82	45.32	65.15	-19.83	QP
4	0.1661	16.07	9.82	25.89	55.15	-29.26	AVG
5	0.1908	32.16	9.81	41.97	64	-22.03	QP
6	0.1908	13.44	9.81	23.25	54	-30.75	AVG
7	0.3006	20.85	9.81	30.66	60.23	-29.57	QP
8	0.3006	3.94	9.81	13.75	50.23	-36.48	AVG
9	8.8546	24.61	10.03	34.64	60	-25.36	QP
10	8.8546	18.24	10.03	28.27	50	-21.73	AVG
11	11.9937	28.76	10.09	38.85	60	-21.15	QP
12	11.9937	28.43	10.09	38.52	50	-11.48	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2021/10/18	Phase :	N
Temperature :	26°C	Humidity :	38 %

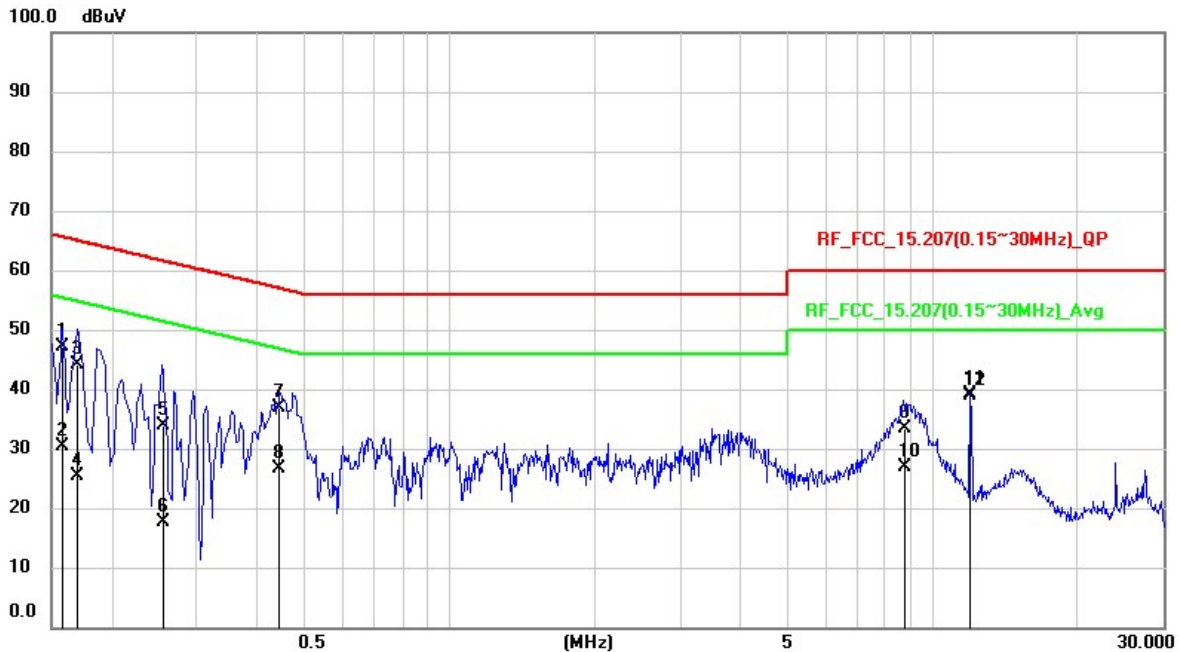

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1584	37.38	9.83	47.21	65.55	-18.34	QP
2	0.1584	20.47	9.83	30.3	55.55	-25.25	AVG
3	0.1702	34.33	9.83	44.16	64.95	-20.79	QP
4	0.1702	15.5	9.83	25.33	54.95	-29.62	AVG
5	0.2561	24.16	9.83	33.99	61.56	-27.57	QP
6	0.2561	7.74	9.83	17.57	51.56	-33.99	AVG
7	0.446	27.14	9.81	36.95	56.95	-20	QP
8	0.446	16.78	9.81	26.59	46.95	-20.36	AVG
9	8.7843	23.23	10.03	33.26	60	-26.74	QP
10	8.7843	16.86	10.03	26.89	50	-23.11	AVG
11	11.9937	29	10.09	39.09	60	-20.91	QP
12	11.9937	28.91	10.09	39	50	-11	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

--- END ---