

## FCC Test Report (Co-Located)

**Report No.:** RFBBGM-WTW-P21116011-7

**FCC ID:** WIYUPT1000-LTE

**Test Model:** UPT1000F

**Received Date:** Dec. 01, 2021

**Test Date:** Jan. 24, 2022

**Issued Date:** Jan. 26, 2022

**Applicant:** CASTLES TECHNOLOGY CO., LTD.

**Address:** 6F, NO. 207-5, SEC. 3, BEIXIN RD., XINDIAN DISTRICT, NEW TAIPEI CITY 23143, TAIWAN (R. O. C.)

**Issued By:** Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch  
Lin Kou Laboratories

**Lab Address:** No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

**Test Location:** No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)

**FCC Registration /  
Designation Number:** 281270 / TW0032



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

## Table of Contents

<b>Release Control Record</b> .....	<b>3</b>
<b>1 Certificate of Conformity</b> .....	<b>4</b>
<b>2 Summary of Test Results</b> .....	<b>5</b>
2.1 Measurement Uncertainty.....	5
2.2 Modification Record.....	5
<b>3 General Information</b> .....	<b>6</b>
3.1 General Description of EUT.....	6
3.1.1 Test Mode Applicability and Tested Channel Detail.....	8
3.2 Description of Support Units.....	9
3.2.1 Configuration of System under Test.....	9
3.3 General Description of Applied Standards.....	10
<b>4 Test Types and Results</b> .....	<b>11</b>
4.1 Radiated Emission and Bandedge Measurement.....	11
4.1.1 Limits of Radiated Emission and Bandedge Measurement.....	11
4.1.2 Test Instruments.....	12
4.1.3 Test Procedures.....	13
4.1.4 Deviation from Test Standard.....	14
4.1.5 Test Setup.....	15
4.1.6 EUT Operating Conditions.....	16
4.1.7 Test Results.....	17
<b>5 Pictures of Test Arrangements</b> .....	<b>25</b>
<b>Annex A- Band Edge Measurement</b> .....	<b>26</b>
<b>Appendix – Information of the Testing Laboratories</b> .....	<b>27</b>

### Release Control Record

Issue No.	Description	Date Issued
RFBBGM-WTW-P21116011-7	Original release.	Jan. 26, 2022

## 1 Certificate of Conformity

**Product:** POS Terminal

**Brand:**  **CASTLES  
TECHNOLOGY**

**Test Model:** UPT1000F

**Sample Status:** Identical Prototype

**Applicant:** CASTLES TECHNOLOGY CO., LTD.

**Test Date:** Jan. 24, 2022

**Standards:** 47 CFR FCC Part 15, Subpart C (Section 15.247)  
47 CFR FCC Part 15, Subpart C (Section 15.225)  
47 CFR FCC Part 15, Subpart C (Section 15.215)  
ANSI C63.10:2013  
FCC Part 22, Subpart H  
FCC Part 24, Subpart E  
FCC Part 27, Subpart C, D, F, H, L  
FCC Part 90, Subpart R

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

**Prepared by :** Pettie Chen , **Date:** Jan. 26, 2022  
Pettie Chen / Senior Specialist

**Approved by :** Jeremy Lin , **Date:** Jan. 26, 2022  
Jeremy Lin / Project Engineer

## 2 Summary of Test Results

Applied Standard	47 CFR FCC Part 15, Subpart C (Section 15.247) ANSI C63.10:2013 FCC Part 27, Subpart C, F		
FCC Clause	Test Item	Result	Remarks
15.205 / 15.209 / 15.247(d)	Radiated Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.06dB at 355.92 MHz.
2.1053 27.53(c)(f)	Radiated Spurious Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -3.86dB at 1564.00MHz.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

### 2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:


Measurement	Frequency	Expanded Uncertainty (k=2) ( $\pm$ )
Radiated Emissions up to 1 GHz	9 kHz ~ 30 MHz	3.00 dB
	30MHz ~ 200MHz	2.91 dB
	200MHz ~1000MHz	2.93 dB
Radiated Emissions above 1 GHz	1GHz ~ 18GHz	1.76 dB
	18GHz ~ 40GHz	1.77 dB

### 2.2 Modification Record

There were no modifications required for compliance.

### 3 General Information

#### 3.1 General Description of EUT


Product	POS Terminal	
Brand		
Test Model	UPT1000F	
Sample Status	Identical Prototype	
Power Supply rating	9 Vdc (Adapter)	
Modulation Type	BT EDR	GFSK, $\pi/4$ -DQPSK, 8DPSK
	NFC	ASK
Transfer Rate	BT EDR	1/2/3 Mbps
	NFC	Type A: 106 kbit/s
Operating Frequency	BT EDR	2402 ~ 2480 MHz
	NFC	13.56 MHz
Number of Channel	BT EDR	79
	NFC	1
Output Power	BT EDR	2.183 mW
Field Strength (Maximum)	NFC	36.9 dBuV/m (3m)
Antenna Type	BT	Fixed External antenna with 2 dBi gain
	NFC	Loop Antenna
Antenna Connector	BT	SMA Male Reverse
	NFC	NA
Accessory Device	Refer to Note as below	
Data Cable Supplied	N/A	

Note:

1. The EUT uses following accessory devices. (No. 4, 5 are the new antennas)

No	Product	Brand	Model	Description
1	WWAN Antenna	Aristotle	RFA-LTE-T100-41-2M	-
2	WLAN/BT Antenna	Aristotle	RFA-25-C2M2-U-M70	-
3	NFC Antenna	Sporton	SGR-0.7x90.16x3-S	-
4	WLAN/BT Antenna	Aristotle	RFA-25-T100-41-3M-A2	BT gain: -0.1dBi, Connector: RP SMA PLUG
5	WWAN Antenna	Aristotle	RFA-US-T1000G-2M-A5	-


2. The EUT contains following accessory devices. (Support unit)


Product	Brand	Model	Description
Adapter		FSP040-DRAN2	I/P: 100-240 Vac, 50-60 Hz, 1.4 A O/P: 9.0 Vdc, 4.44 A MAX Power Line: 1.45 m cable w/o core

3. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

4. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or User's Manual.

WWAN Description for module:

(The module was installed in POS Terminal (Brand:  CASTLES TECHNOLOGY, Model: UPT1000F))

Product	WCDMA and LTE cellular wireless module		
Brand			
Test Model	LE910C1-NF		
Modulation Type	WCDMA: BPSK, QPSK HSDPA: BPSK HSUPA: QPSK LTE: QPSK, 16QAM		
Operating Frequency	WCDMA Band 2	1852.4MHz ~ 1907.6MHz	
	WCDMA Band 4	1712.4MHz ~ 1752.6MHz	
	WCDMA Band 5	826.4MHz ~ 846.6MHz	
	LTE Band 2	Channel Bandwidth 1.4MHz	1850.7MHz ~ 1909.3MHz
		Channel Bandwidth 3MHz	1851.5MHz ~ 1908.5MHz
		Channel Bandwidth 5MHz	1852.5MHz ~ 1907.5MHz
		Channel Bandwidth 10MHz	1855.0MHz ~ 1905.0MHz
		Channel Bandwidth 15MHz	1857.5MHz ~ 1902.5MHz
		Channel Bandwidth 20MHz	1860.0MHz ~ 1900.0MHz
	LTE Band 4	Channel Bandwidth 1.4MHz	1710.7MHz ~ 1754.3MHz
		Channel Bandwidth 3MHz	1711.5MHz ~ 1753.5MHz
		Channel Bandwidth 5MHz	1712.5MHz ~ 1752.5MHz
		Channel Bandwidth 10MHz	1715.0MHz ~ 1750.0MHz
		Channel Bandwidth 15MHz	1717.5MHz ~ 1747.5MHz
	LTE Band 5	Channel Bandwidth 1.4MHz	824.7MHz ~ 848.3MHz
		Channel Bandwidth 3MHz	825.5MHz ~ 847.5MHz
		Channel Bandwidth 5MHz	826.5MHz ~ 846.5MHz
		Channel Bandwidth 10MHz	829.0MHz ~ 844.0MHz
	LTE Band 12	Channel Bandwidth 1.4MHz	699.7MHz ~ 715.3MHz
		Channel Bandwidth 3MHz	700.5MHz ~ 714.5MHz
		Channel Bandwidth 5MHz	701.5MHz ~ 713.5MHz
		Channel Bandwidth 10MHz	704.0MHz ~ 711.0MHz
	LTE Band 13	Channel Bandwidth 5MHz	779.5MHz ~ 784.5MHz
		Channel Bandwidth 10MHz	782.0MHz
	LTE Band 14	Channel Bandwidth 5MHz	790.5MHz ~ 795.5MHz
		Channel Bandwidth 10MHz	793MHz
LTE Band 66	Channel Bandwidth 1.4MHz	1710.7MHz ~ 1779.3MHz	
	Channel Bandwidth 3MHz	1711.5MHz ~ 1778.5MHz	
	Channel Bandwidth 5MHz	1712.5MHz ~ 1777.5MHz	
	Channel Bandwidth 10MHz	1715.0MHz ~ 1775.0MHz	
	Channel Bandwidth 15MHz	1717.5MHz ~ 1772.5MHz	
	Channel Bandwidth 20MHz	1720.0MHz ~ 1770.0MHz	

### 3.1.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable to		Description
	RE $\geq$ 1G	RE<1G	
-	√	√	-

Where RE $\geq$ 1G: Radiated Emission above 1GHz & Bandedge Measurement RE<1G: Radiated Emission below 1GHz

Note:

- The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on Z-plane.

#### Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Tested Channel	Remark
-	BT EDR	0	-
	LTE Band 13	23230	Bandwidth: 10MHz, QPSK

#### Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Mode	Tested Channel	Remark
-	BT EDR	0	-
	LTE Band 13	23230	Bandwidth: 10MHz, QPSK

#### Test Condition:

Applicable to	Environmental Conditions	Input Power	Tested by
RE $\geq$ 1G	23 deg. C, 68% RH	120Vac, 60Hz	Adair Peng
	23 deg. C, 67% RH		
RE<1G	23 deg. C, 68% RH	120Vac, 60Hz	Adair Peng




### 3.2 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
A	Adapter	CASTLES	FSP040-DRAN2	N/A	N/A
B	BT Antenna	Aristotle	RFA-25-T100-41-3M-A2	N/A	N/A
C	WWAN Antenna	Aristotle	RFA-US-T1000G-2M-A5	N/A	N/A

No.	Signal Cable Description Of The Above Support Units
1.	LAN Cable*2: 1.5m
2.	Power Line: 1.45 m

#### 3.2.1 Configuration of System under Test

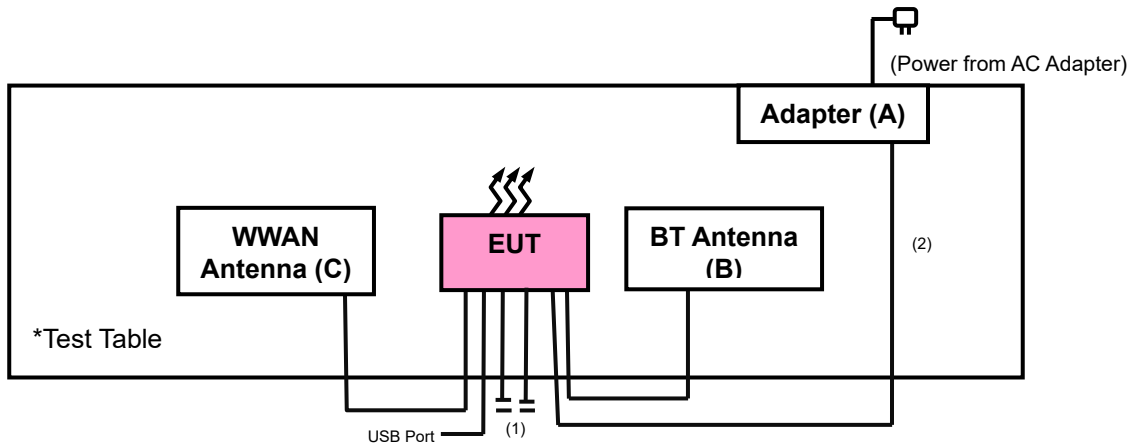

### **3.3 General Description of Applied Standards**

The EUT is a RF Product. According to the specification of the EUT declared by the manufacturer, it must comply with the requirements of the following standards and References:

**47 CFR FCC Part 15, Subpart C (Section 15.247)**

**47 CFR FCC Part 15, Subpart C (Section 15.225)**

**47 CFR FCC Part 15, Subpart C (Section 15.215)**

**ANSI C63.10:2013**

**FCC Part 22, Subpart H**

**FCC Part 24, Subpart E**

**FCC Part 27, Subpart C, D, F, H, L**

**FCC Part 90, Subpart R**

All test items have been performed and recorded as per the above standards.

#### **References Test Guidance:**

**KDB 558074 D01 15.247 Meas Guidance v05r02**

**KDB 971168 D01 Power Meas License Digital Systems v03r01**

**KDB 414788 D01 Radiated Test Site v01r01**

**ANSI/TIA/EIA-603-E 2016**

**ANSI 63.26-2015**

All test items have been performed as a reference to the above KDB test guidance.

## 4 Test Types and Results

### 4.1 Radiated Emission and Bandedge Measurement

#### 4.1.1 Limits of Radiated Emission and Bandedge Measurement

**For BT:**

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

**Note:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

**For LTE Band 13:**

According to FCC 27.53(c)(2) for on any frequency outside the 776-788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least 43 + 10 log (P) dB.

#### 4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver Rohde & Schwarz	N9038A	MY55420137	Apr. 09, 2021	Apr. 08, 2022
Spectrum Analyzer KEYSIGHT	N9020B	MY60110440	Dec. 09, 2021	Dec. 08, 2022
BILOG Antenna SCHWARZBECK	VULB9168	9168-1213	Oct. 27, 2021	Oct. 26, 2022
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-563	Nov. 14, 2021	Nov. 13, 2022
HORN Antenna SCHWARZBECK	BBHA 9170	9170-995	Nov. 14, 2021	Nov. 13, 2022
Loop Antenna EMCI	EM-6879	269	Sep. 16, 2021	Sep. 15, 2022
Loop Antenna TESEQ	HLA 6121	45745	Jul. 21, 2021	Jul. 20, 2022
Preamplifier EMCI	EMC330N	980782	Jan. 17, 2022	Jan. 16, 2023
Preamplifier EMCI	EMC118A45SE	980808	Dec. 30, 2021	Dec. 29, 2022
Preamplifier EMCI	EMC184045SE	980788	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC104-SM-SM-(9 000+2000+1000)	201243+ 201231+ 210102	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMCCFD400-NM-N M-(9000+300+500)	201236+ 201235+ 201233	Jan. 17, 2022	Jan. 16, 2023
RF signal cable EMCI	EMC101G-KM-KM- (5000+3000+2000)	201260+201257+ 201254	Jan. 17, 2022	Jan. 16, 2023
Software BV ADT	ADT_Radiated_V7. 6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFT-151SS-0.5T	NA	NA	NA
Turn Table Max-Full	MF-7802BS	NA	NA	NA
Turn Table Controller Max-Full	MF-7802BS	MF780208674	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in WM Chamber 8.

### 4.1.3 Test Procedures

#### For BT:

#### For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

#### For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

#### Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 10Hz (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### For LTE Band 13:

- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m(below or equal 1GHz) and/or 1.5m(above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
  - $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$ ; where D is the measurement distance (in the far field region) in m.
  - $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$ ; where D is the measurement distance (in the far field region) in m.


NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

#### 4.1.4 Deviation from Test Standard


No deviation.

#### 4.1.5 Test Setup


##### For Radiated emission below 30MHz

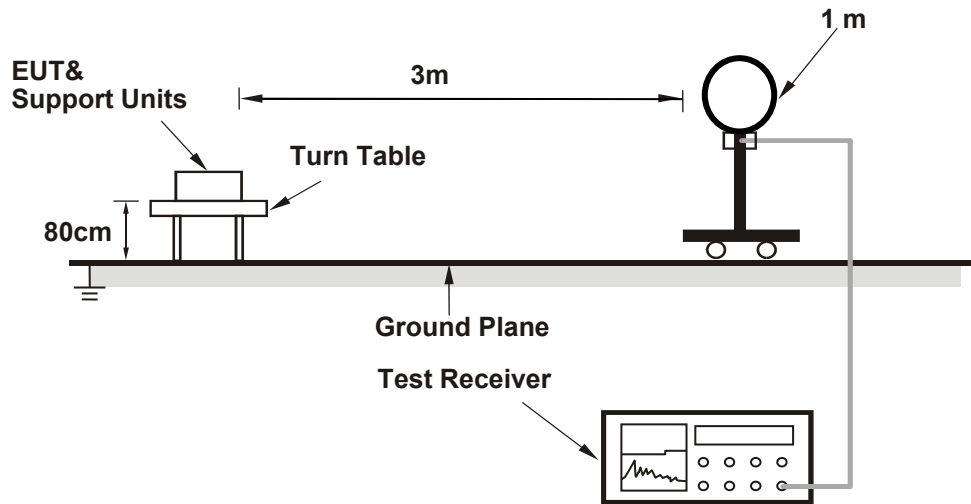

##### For Radiated emission 30MHz to 1GHz

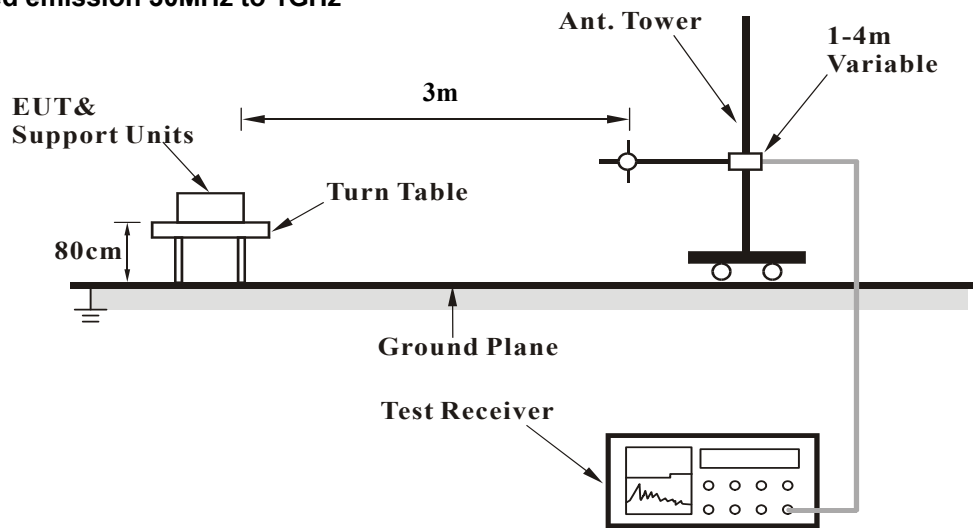

**For Radiated emission above 1GHz**

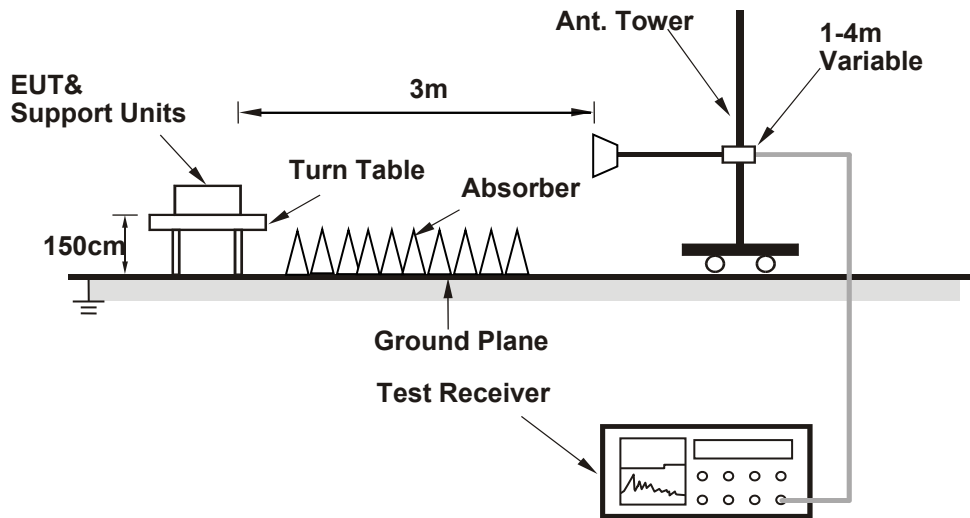

For the actual test configuration, please refer to the attached file (Test Setup Photo).

**4.1.6 EUT Operating Conditions**

Set the EUT under transmission condition continuously at specific channel frequency.



#### 4.1.7 Test Results

Above 1GHz data:

**BT\_Ch 0+LTE Band 13\_Ch 23230**


BT EDR GFSK\_Ch 0

Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)
-----------------	--------------	-------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.08 PK	74.00	-15.92	2.75 H	332	26.10	31.98
2	2390.00	45.88 AV	54.00	-8.12	2.75 H	332	13.90	31.98
3	*2402.00	92.33 PK			2.75 H	332	60.37	31.96
4	*2402.00	61.72 AV			2.75 H	332	29.76	31.96
5	4804.00	48.80 PK	74.00	-25.20	2.06 H	228	45.84	2.96
6	4804.00	18.19 AV	54.00	-35.81	2.06 H	228	15.23	2.96

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

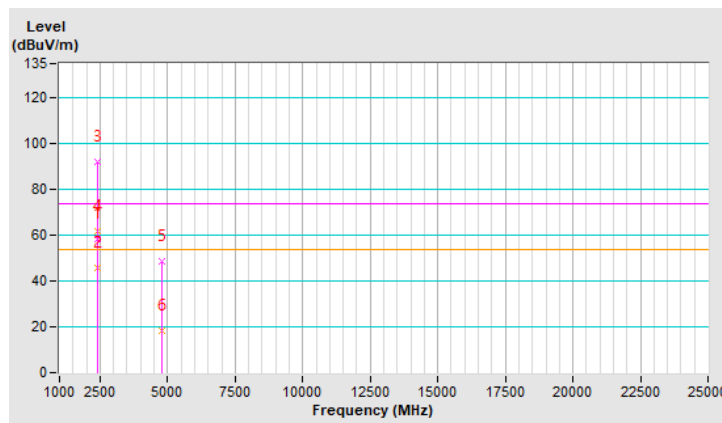


Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)
-----------------	--------------	-------------------	---------------------------

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.28 PK	74.00	-16.72	2.85 V	352	25.30	31.98
2	2390.00	45.68 AV	54.00	-8.32	2.85 V	352	13.70	31.98
3	*2402.00	99.72 PK			2.85 V	352	67.76	31.96
4	*2402.00	69.11 AV			2.85 V	352	37.15	31.96
5	4804.00	48.10 PK	74.00	-25.90	1.75 V	109	45.14	2.96
6	4804.00	17.49 AV	54.00	-36.51	1.75 V	109	14.53	2.96

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

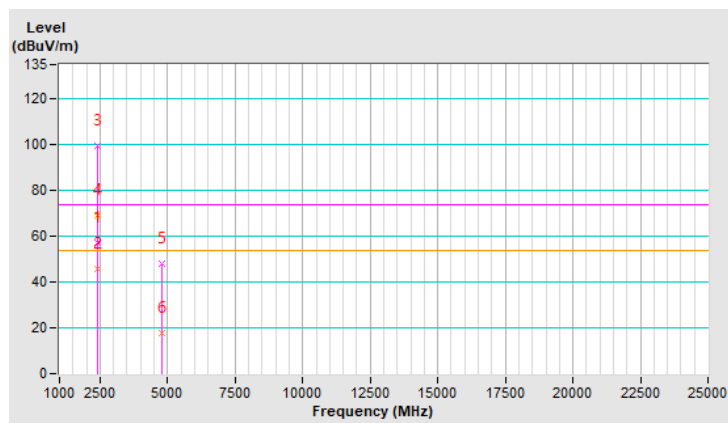


LTE Band 13\_Ch 23230

Mode	TX channel 23230 (782.0MHz)	Frequency Range	1GHz ~ 27GHz
------	--------------------------------	-----------------	--------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1564.00	-43.86	-40.00	-3.86	3.09 H	249	58.22	-102.08

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

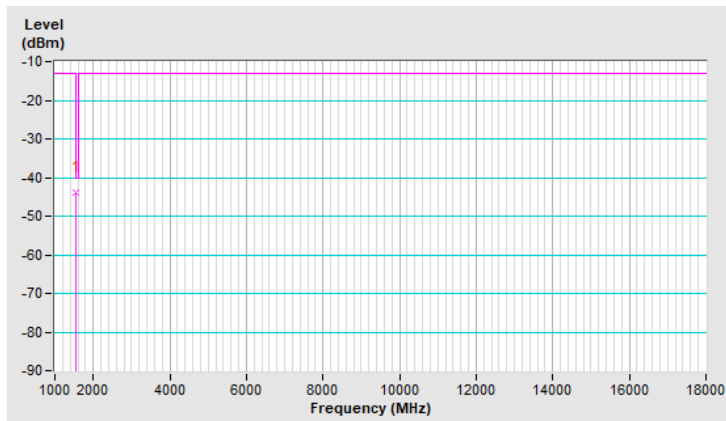


Mode	TX channel 23230 (782.0MHz)	Frequency Range	1GHz ~ 27GHz
------	--------------------------------	-----------------	--------------

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1564.00	-45.56	-40.00	-5.56	1.57 V	202	56.52	-102.08

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

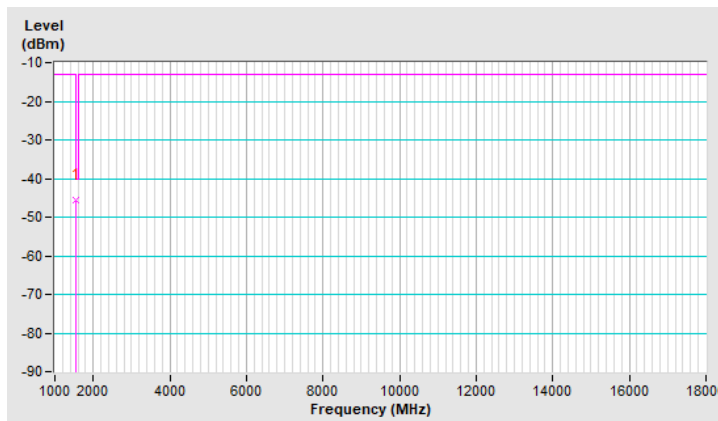

Below 1GHz Data:

**BT\_Ch 0+LTE Band 13\_Ch 23230**


BT EDR GFSK\_Ch 0

Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	148.34	30.85 QP	43.50	-12.65	1.50 H	228	48.99	-18.14
2	173.56	31.13 QP	43.50	-12.37	2.00 H	177	49.96	-18.83
3	258.92	36.12 QP	46.00	-9.88	1.00 H	118	55.26	-19.14
4	284.14	41.27 QP	46.00	-4.73	1.00 H	237	59.19	-17.92
<b>5</b>	<b>355.92</b>	<b>42.94 QP</b>	<b>46.00</b>	<b>-3.06</b>	<b>1.50 H</b>	<b>22</b>	<b>59.34</b>	<b>-16.40</b>
6	420.91	36.27 QP	46.00	-9.73	1.00 H	344	50.89	-14.62

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

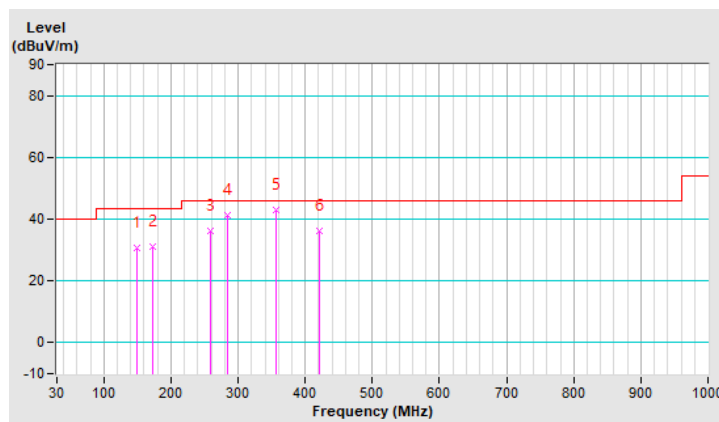


Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)
-----------------	-------------	-------------------	-----------------

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	39.70	17.97 QP	40.00	-22.03	2.00 V	2	36.63	-18.66
2	76.56	16.71 QP	40.00	-23.29	1.00 V	210	39.02	-22.31
3	167.74	25.23 QP	43.50	-18.27	2.00 V	2	43.56	-18.33
4	309.36	37.51 QP	46.00	-8.49	1.00 V	198	54.89	-17.38
5	405.39	38.69 QP	46.00	-7.31	1.50 V	194	53.73	-15.04
6	452.92	37.00 QP	46.00	-9.00	1.00 V	198	50.51	-13.51

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20dB below the permissible value to be report.

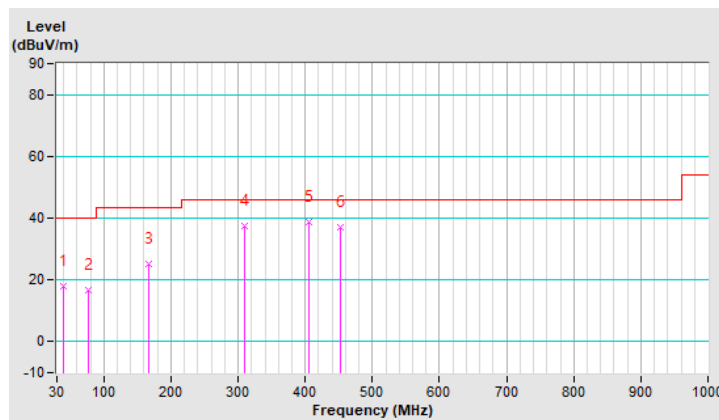

LTE Band 13\_Ch 23230


LTE Band 13, Channel Bandwidth 10MHz

Mode	TX channel 23230 (782.0MHz)	Frequency Range	Below 1000 MHz
------	--------------------------------	-----------------	----------------

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	76.39	-57.41	-13.00	-44.41	1.50 H	129	62.26	-119.67
2	229.62	-59.48	-13.00	-46.48	1.00 H	303	58.64	-118.12
3	344.90	-53.67	-13.00	-40.67	1.00 H	35	60.33	-114.00
4	420.81	-50.44	-13.00	-37.44	1.50 H	148	61.59	-112.03
5	658.39	-51.26	-13.00	-38.26	2.00 H	324	55.81	-107.07
6	787.72	-46.43	-13.00	-33.43	1.00 H	35	58.54	-104.97

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

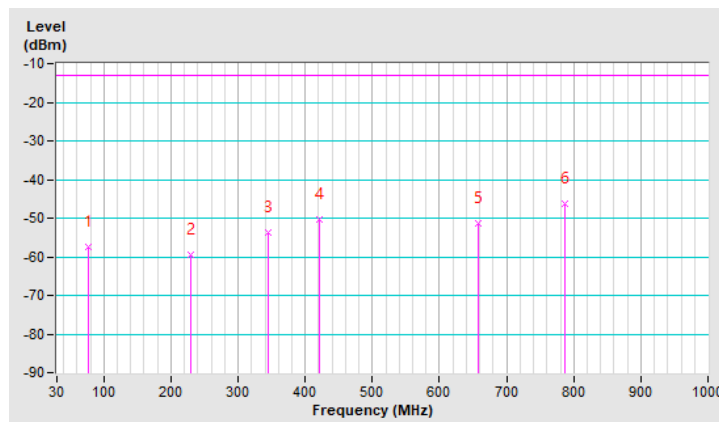


Mode	TX channel 23230 (782.0MHz)	Frequency Range	Below 1000 MHz
------	--------------------------------	-----------------	----------------

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	110.99	-41.50	-13.00	-28.50	1.50 V	333	77.23	-118.73
2	277.42	-61.88	-13.00	-48.88	2.00 V	52	53.67	-115.55
3	358.96	-60.89	-13.00	-47.89	1.50 V	238	52.85	-113.74
4	449.33	-54.81	-13.00	-41.81	1.00 V	299	56.23	-111.04
5	488.28	-39.48	-13.00	-26.48	1.50 V	322	70.99	-110.47
6	531.11	-38.71	-13.00	-25.71	1.00 V	277	70.98	-109.69

Remarks:

1.  $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2.  $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3.  $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

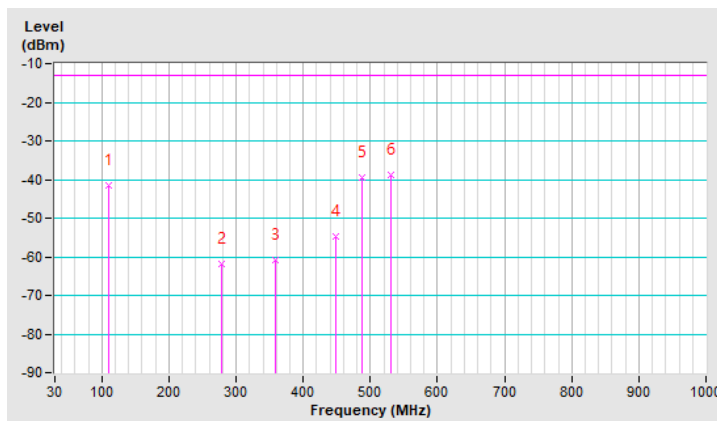




## 5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

## Annex A- Band Edge Measurement

GFSK

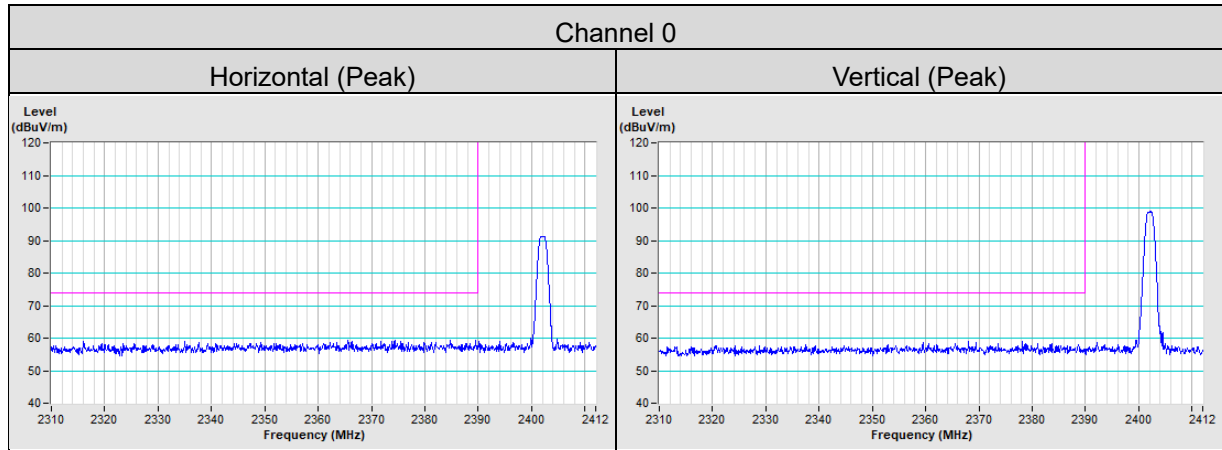

## Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

### Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

### Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

### Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.

--- END ---