

FCC PART 15.247

MEASUREMENT AND TEST REPORT

For

Avantronics Limited

Unit 1903, Shenhua Commercial Building, No. 2018 Jiabin Rd,
Luohu District, Shenzhen, Guangdong, China

FCC ID: WJ5-BTSP-200

Report Type: Original Report	Product Type: Avantalk Multimedia Wireless Speakerphone
Test Engineer: Alvin Huang	<i>Alvin Huang</i>
Report Number: RSZ08121005	
Report Date: 2009-02-10	
Reviewed By: Green Xu	<i>Green Xu</i>
EMC Engineer	
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Shenzhen). This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "*" doc.2

TABLE OF CONTENTS

GENERAL INFORMATION.....4

- PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)4
- OBJECTIVE4
- RELATED SUBMITTAL(S)/GRANT(S).....4
- TEST METHODOLOGY4
- TEST FACILITY5

SYSTEM TEST CONFIGURATION.....6

- DESCRIPTION OF TEST CONFIGURATION6
- EUT EXERCISE SOFTWARE6
- EQUIPMENT MODIFICATIONS6
- EXTERNAL I/O CABLE.....6
- CONFIGURATION OF TEST SETUP7
- BLOCK DIAGRAM OF TEST SETUP7

SUMMARY OF TEST RESULTS9

CFR47 §15.247 (i), §1.1307 (b) - MAXIMUM PERMISSIBLE EXPOSURE (MPE).....10

- TEST DATA10

CFR47 §15.203 - ANTENNA REQUIREMENT.....12

- STANDARD APPLICABLE12
- ANTENNA CONNECTOR CONSTRUCTION12

CFR47 §15.207 (a) - CONDUCTED EMISSIONS13

- APPLICABLE STANDARD13
- MEASUREMENT UNCERTAINTY13
- EUT SETUP13
- EMI TEST RECEIVER SETUP.....14
- TEST EQUIPMENT LIST AND DETAILS.....14
- TEST PROCEDURE14
- TEST RESULTS SUMMARY.....14
- TEST DATA15
- PLOT(S) OF TEST DATA15

CFR47 §15.205, §15.209, §15.247 - RADIATED EMISSIONS.....18

- APPLICABLE STANDARD18
- MEASUREMENT UNCERTAINTY18
- EUT SETUP18
- EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP19
- TEST EQUIPMENT LIST AND DETAILS.....19
- TEST PROCEDURE19
- CORRECTED AMPLITUDE & MARGIN CALCULATION19
- TEST RESULTS SUMMARY.....20
- TEST DATA20

CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST28

- APPLICABLE STANDARD28
- TEST EQUIPMENT LIST AND DETAILS.....28

TEST PROCEDURE28
TEST DATA28

CFR47 §15.247(a) (1) – 20dB BANDWIDTH TESTING.....33
APPLICABLE STANDARD33
TEST EQUIPMENT LIST AND DETAILS.....33
TEST PROCEDURE33
TEST DATA33

CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST38
APPLICABLE STANDARD38
TEST EQUIPMENT LIST AND DETAILS.....38
TEST PROCEDURE38
TEST DATA38

CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....41
APPLICABLE STANDARD41
TEST EQUIPMENT LIST AND DETAILS.....41
TEST PROCEDURE41
TEST DATA41

CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT54
APPLICABLE STANDARD54
TEST EQUIPMENT LIST AND DETAILS.....54
TEST PROCEDURE54
TEST DATA54

CFR47 §15.247(d) - BAND EDGES TESTING59
APPLICABLE STANDARD59
TEST EQUIPMENT LIST AND DETAILS.....59
TEST PROCEDURE59
TEST DATA60

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Avantronics Limited*'s product, model number: *Avantalk BTSP200* or the "EUT" as referred to in this report is a *Avantalk Multimedia Wireless Speakerphone*, which measures approximately: 20.6 cm L x 8.8 cm W x 4.2 cm H, rated input voltage: DC 6 V power supply or 4AA Alkaline battery .

Adapter Information:

POWER ADAPTOR

MODEL: JT-H060100

INPUT: AC 100-240V 50/60Hz

OUTPUT: DC 6.0V 1000mA

** All measurement and test data in this report was gathered from production sample serial number: 0812034 (Assigned by BAACL, Shenzhen). The EUT was received on 2008-12-05.*

Objective

This Type approval report is prepared on behalf of *Avantronics Limited*. in accordance with Part 2, Subpart J, Part 15, Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 04, 2004. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



NVLAP LAB CODE 200707-0

The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

EUT Exercise Software

Blue test 3.

Equipment Modifications


No modification was made to the unit tested.

External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded Undetachable DC Cable	1.6	Adapter	EUT

Configuration of Test Setup

For adapter power supply:

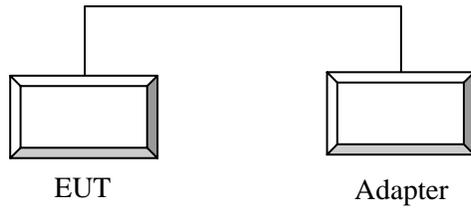


For battery power supply:




Block Diagram of Test Setup

For adapter power supply:

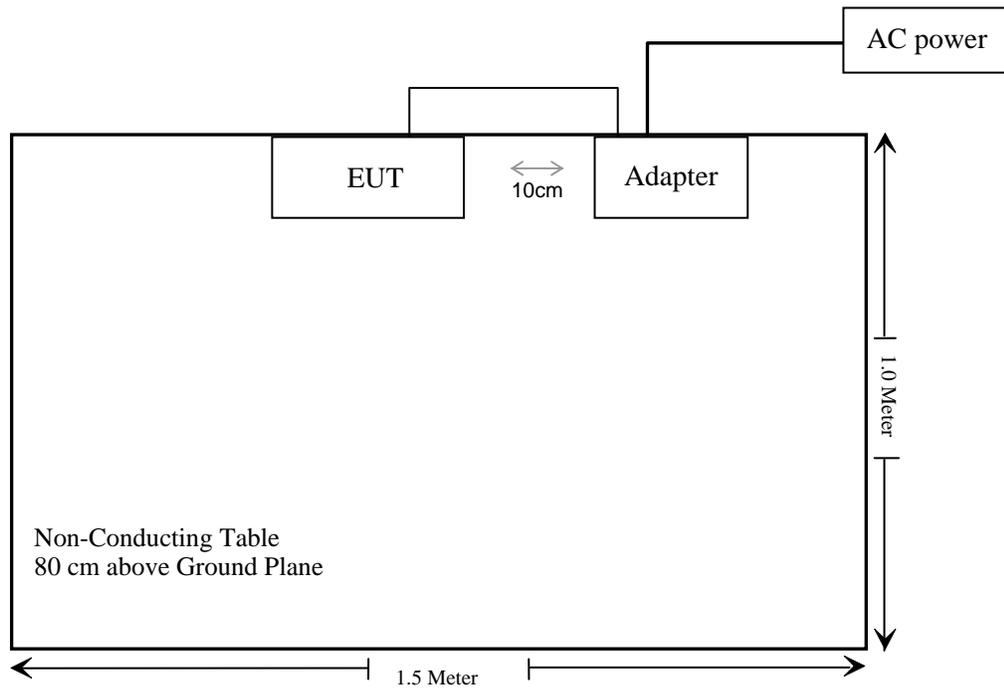

For battery power supply:

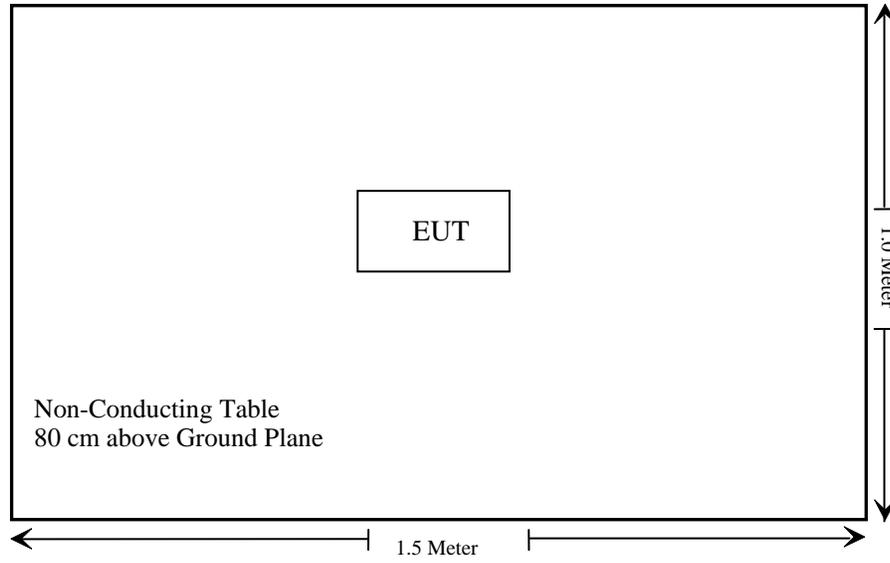

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b), §1.1310	Maximum Permissible exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	Conducted Emissions	Compliant
§15.205, §15.209, §15.247(d)	Radiated Emission	Compliant
§15.247 (a)(1)	20 dB Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band Edges	Compliant

CFR47 §15.247 (i), §1.1307 (b) - MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Standard Applicable

According to §1.1307(b), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310, §1.1307(b) RF exposure is calculated.

Limits for General Population/Uncontrolled Exposure

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

Test Data

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For BDR Mode

Maximum peak output power at antenna input terminal: 1.53 (dBm)

Maximum peak output power at antenna input terminal: 1.42 (mW)

Prediction distance: 20 (cm)

Predication frequency: 2441 (MHz)

Antenna Gain (typical): -2.0 (dBi)

Antenna Gain (typical): 0.63 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.0002 (mW/cm²)

MPE limit for **General Population/Uncontrolled** exposure at prediction frequency: 1.0 (mW/cm²)

0.0002(mW/cm²) < 1.0 (mW/cm²)

Result: EUT complies at 20 cm distance.

For EDR Mode

Maximum peak output power at antenna input terminal: -0.76 (dBm)

Maximum peak output power at antenna input terminal: 0.84(mW)

Prediction distance: 20 (cm)

Predication frequency: 2441 (MHz)

Antenna Gain (typical): -2.0 (dBi)

Antenna Gain (typical):0.63 (numeric)

The worst case is power density at predication frequency at 20 cm: 0.0001 (mW/cm²)

MPE limit for **General Population/Uncontrolled** exposure at prediction frequency: 1.0 (mW/cm²)

$0.0001(\text{mW}/\text{cm}^2) < 1.0 (\text{mW}/\text{cm}^2)$

Result: EUT complies at 20 cm distance.

CFR47 §15.203 - ANTENNA REQUIREMENT

Standard Applicable

According to CFR47 § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has a printed antenna on PCB. The maximum gain is -2 dBi; please refer to the internal photos.

Result: Compliance.

CFR47 §15.207 (a) - CONDUCTED EMISSIONS

Applicable Standard


CFR47 §15.207

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

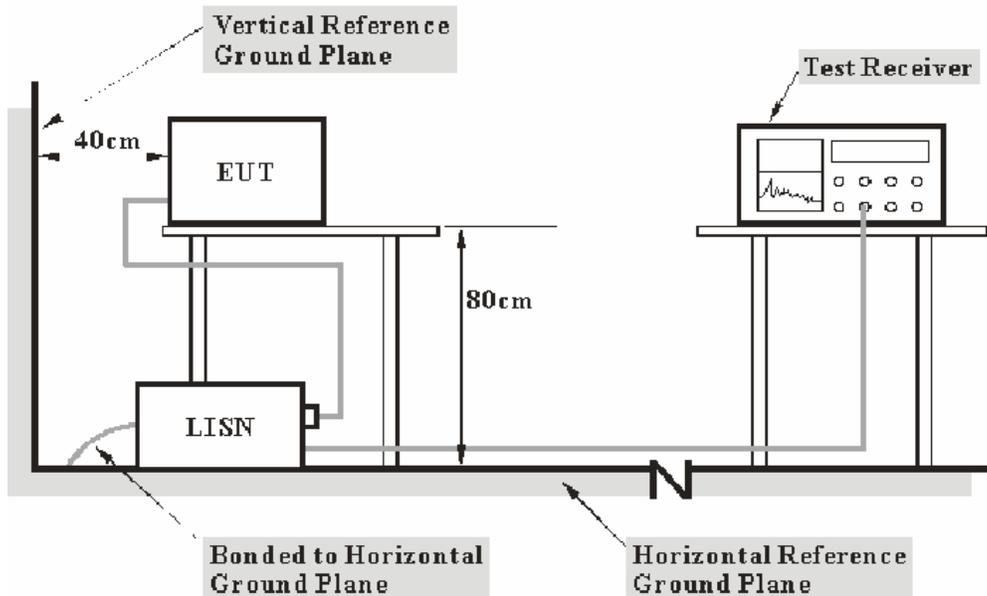

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<i>Frequency Range</i>	<i>IF B/W</i>
150 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	DE25330	2008-03-25	2009-03-25
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2008-03-25	2009-03-25

* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the AC power supply.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

1.10 dB at 0.9250 MHz in the **Neutral** conductor mode

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	52 %
ATM Pressure:	100.0 kPa

* The testing was performed by Alvin Huang on 2009-02-10.

Test Mode: Communication

Line Conducted Emissions				FCC Part 15.207	
Frequency (MHz)	Amplitude (dB μ V)	Detector (QP/AV)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.9250	44.90	AV	Neutral	46.00	1.10*
2.1600	43.00	AV	Neutral	46.00	3.00
1.5450	40.90	AV	Neutral	46.00	5.10
2.7800	40.80	AV	Neutral	46.00	5.20
0.3100	44.50	AV	Neutral	49.97	5.47
2.7800	50.40	QP	Neutral	56.00	5.60
1.5450	50.30	QP	Neutral	56.00	5.70
4.0150	40.30	AV	Line	46.00	5.70
0.9250	50.10	QP	Neutral	56.00	5.90
0.9250	49.80	QP	Line	56.00	6.20
2.1600	49.60	QP	Line	56.00	6.40
1.5400	49.40	QP	Line	56.00	6.60
2.7750	49.40	QP	Line	56.00	6.60
2.1600	49.20	QP	Neutral	56.00	6.80
4.0150	48.70	QP	Line	56.00	7.30
4.0150	48.40	QP	Neutral	56.00	7.60
0.9250	38.20	AV	Line	46.00	7.80
1.5400	36.60	AV	Line	46.00	9.40
0.3100	50.50	QP	Neutral	59.97	9.47
4.0150	36.50	AV	Neutral	46.00	9.50
2.1600	36.50	AV	Line	46.00	9.50
2.7750	36.40	AV	Line	46.00	9.60
0.3100	50.20	QP	Line	59.97	9.77
0.3100	39.60	AV	Line	49.97	10.37


* Within measurement uncertainty.

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.


Conducted Emission FCC Part 15

EUT: Avantalk Multimedia Wireless
Manuf: Avantronics
Op Cond: Communication
Operator: Alvin Huang
Test Spec: AC 120V 60Hz Line
Comment: Temp: 25 Hum: 56%
BADL

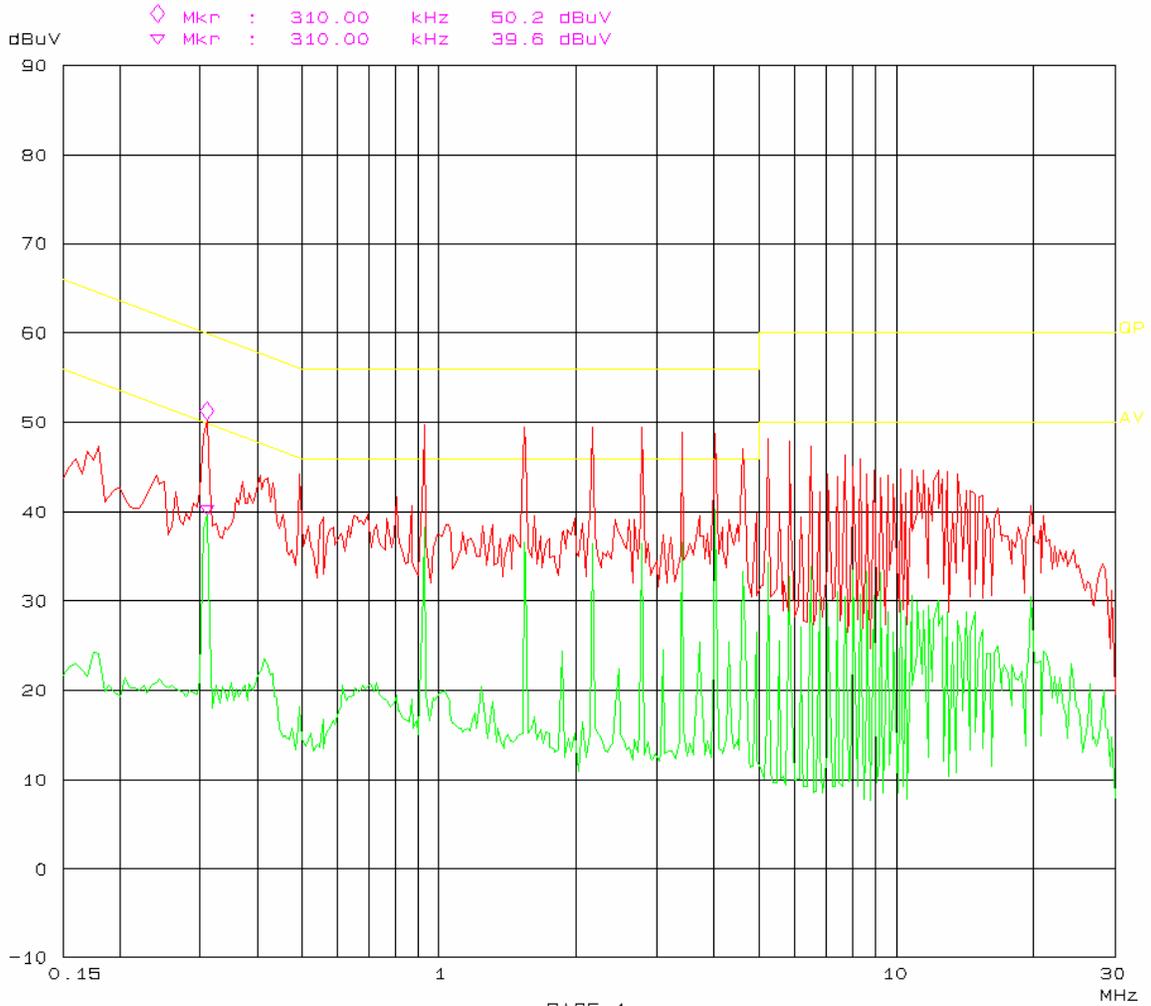

Conducted Emission FCC Part 15

EUT: Avantalk Multimedia Wireless
Manuf: Avantronics
Op Cond: Communication
Operator: Alvin Huang
Test Spec: AC 120V 60Hz Neutral
Comment: Temp: 25 Hum: 56%
BACL

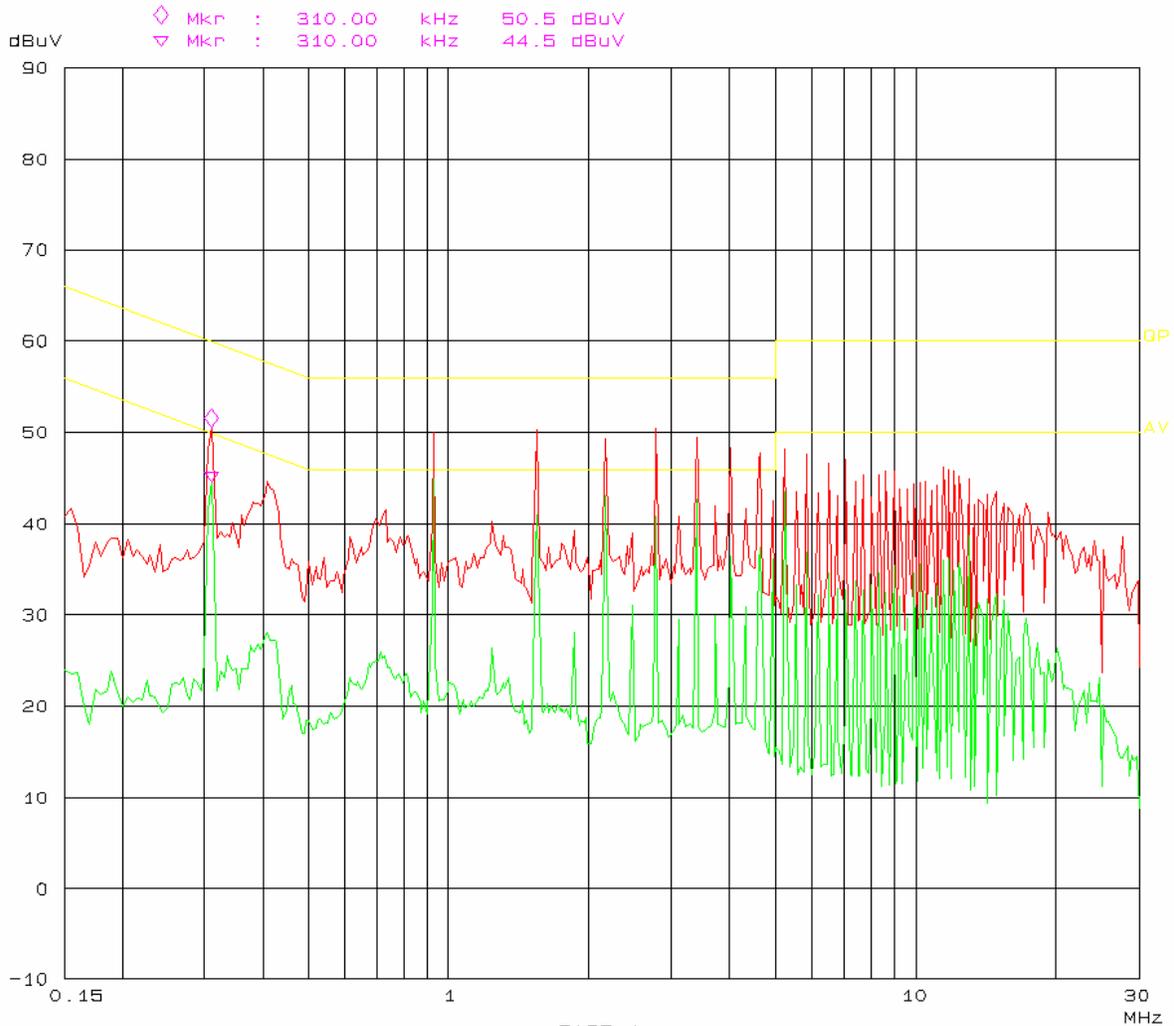

CFR47 §15.205, §15.209, §15.247 - RADIATED EMISSIONS

Applicable Standard


CFR47 §15.205; §15.209; §15.247 (d).

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 4.0 dB.

EUT Setup

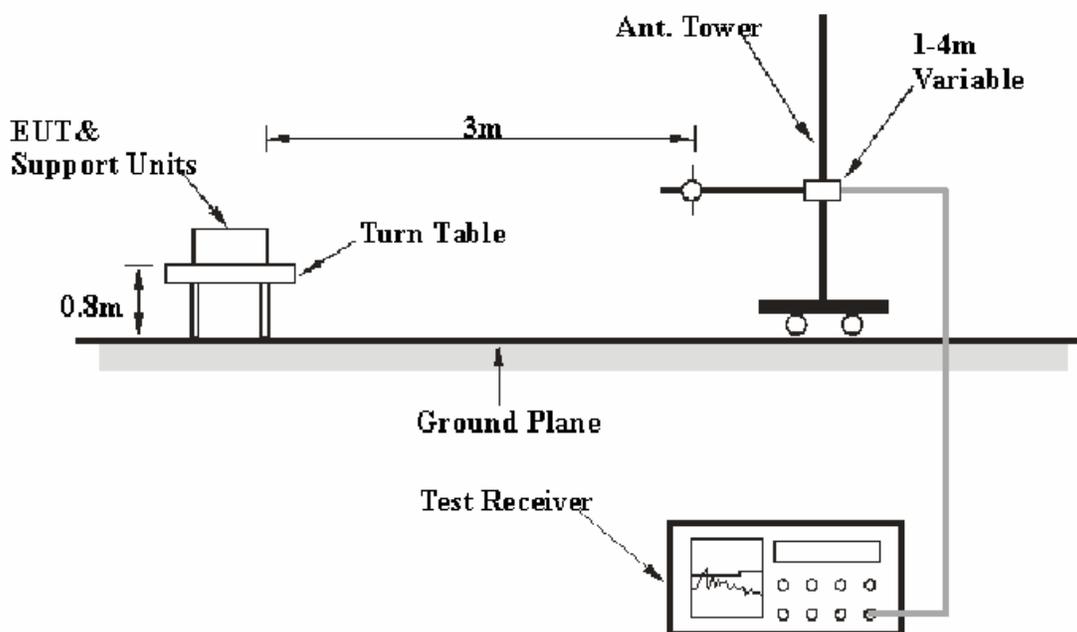

The radiated emission tests were performed in the 3 meters chamber B test site, using the setup accordance with the ANSI C63.4-2003. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

The adapter was connected to a 120 VAC/60 Hz power source.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>
30MHz – 1000 MHz	100 kHz	300 kHz
1000 MHz – 25 GHz	1 MHz	3 MHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	HP8447D	2944A09795	2008-08-02	2009-08-02
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2008-03-11	2009-03-11
HP	Amplifier	8449B	3008A00277	2008-09-12	2009-09-11
Sunol Sciences	Horn Antenna	DRH-118	A052604	2008-09-25	2009-09-25
Rohde & Schwarz	Spectrum Analyzer	FSEM30	849720/019	2008-08-28	2009-08-27

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

For the radiated emissions test, the adapter was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz and peak and Average detection modes for frequencies above 1GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209, and 15.247, with the worst margin reading of:

Transmitting BDR adapter power mode (Below 1GHz):

5.9 dB at 255.970550 MHz in the **Horizontal** polarization

Transmitting EDR adapter power mode (Below 1GHz):

6.7 dB at 271.991700 MHz in the **Horizontal** polarization

Transmitting BDR battery power mode (Below 1GHz):

6.6 dB at 255.960750 MHz in the **Horizontal** polarization

Transmitting EDR battery power mode (Below 1GHz):

6.2 dB at 256.049850 MHz in the **Horizontal** polarization

Transmitting BDR mode (Above 1 GHz):

0.93 dB at 1602.06 MHz in the **Vertical** polarization (**Low Channel**)
0.90 dB at 4882 MHz in the **Horizontal** polarization (**Middle Channel**)
0.90 dB at 4960 MHz in the **Vertical** polarization (**High Channel**)

Transmitting EDR mode (Above 1 GHz):

1.31 dB at 1602.06 MHz in the **Vertical** polarization (**Low Channel**)
1.54 dB at 1626.69 MHz in the **Vertical** polarization (**Middle Channel**)
1.90 dB at 4960.00 MHz in the **Horizontal** polarization (**High Channel**)


Test Data

Environmental Conditions

Temperature:	24 ° C
Relative Humidity:	52 %
ATM Pressure:	100.0 kPa


** The testing was performed by Alvin Huang on 2009-02-03*

Test Mode: Transmitting (adapter power-BDR-Below 1GHz)

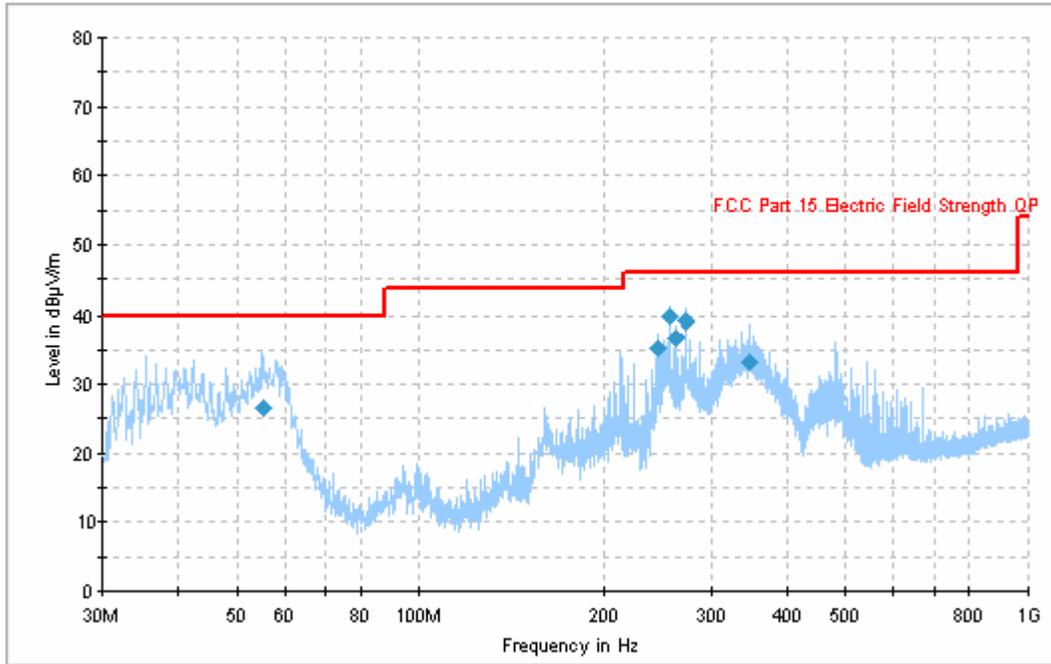


Frequency (MHz)	Corrected Amp. (dBµV/m)	Antenna Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
255.970550	40.1	102.0	H	357.0	-15.7	46.0	5.9
271.823000	39.8	136.0	H	181.0	-14.7	46.0	6.2
261.850775	37.0	153.0	H	190.0	-15.4	46.0	9.0
245.326725	35.3	127.0	H	345.0	-16.0	46.0	10.7
346.294550	33.2	163.0	H	174.0	-13.3	46.0	12.8
55.187400	26.6	141.0	V	23.0	-21.4	40.0	13.4

Test Mode: Transmitting (adapter power-EDR-Below 1GHz)

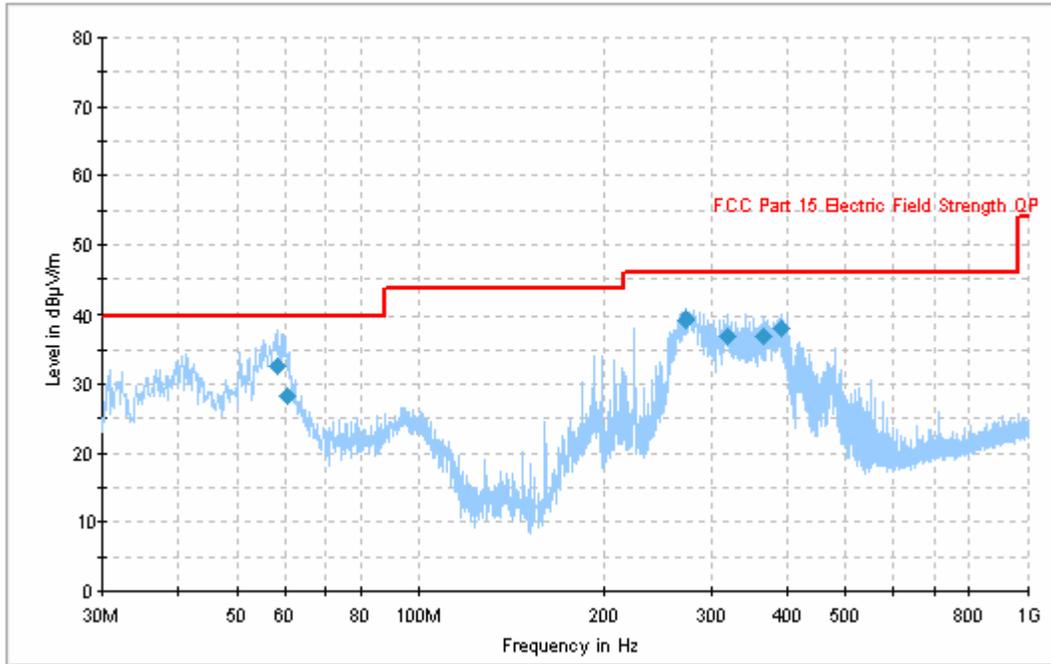


Frequency (MHz)	Corrected Amp. (dBµV/m)	Antenna Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
271.991700	39.3	153.0	H	13.0	-14.7	46.0	6.7
58.159750	32.7	102.0	V	78.0	-21.5	40.0	7.3
393.183950	38.1	103.0	H	280.0	-3.6	46.0	7.9
320.079575	37.0	135.0	H	176.0	-13.8	46.0	9.0
365.211075	36.8	104.0	H	51.0	-12.9	46.0	9.2
60.649050	28.4	106.0	V	114.0	-21.7	40.0	11.6

Test Mode: Transmitting (battery power-BDR-Below 1GHz)

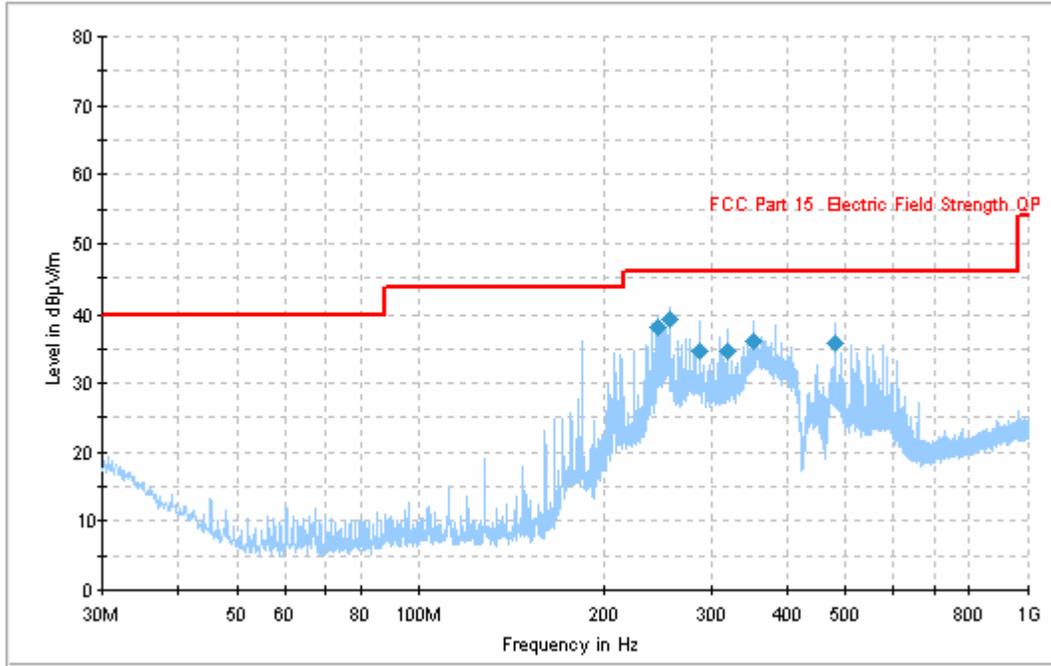

Frequency (MHz)	Corrected Amp. (dBµV/m)	Antenna Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
255.960750	39.4	140.0	H	186.0	-15.7	46.0	6.6
245.330925	38.2	164.0	H	0.0	-16.0	46.0	7.8
351.942825	36.1	124.0	H	13.0	-13.1	46.0	9.9
480.022050	35.9	113.0	H	86.0	-10.5	46.0	10.1
288.103875	34.6	133.0	H	9.0	-14.7	46.0	11.4
320.070275	34.6	108.0	H	191.0	-13.8	46.0	11.4

Test Mode: Transmitting (battery power-EDR-Below 1GHz)

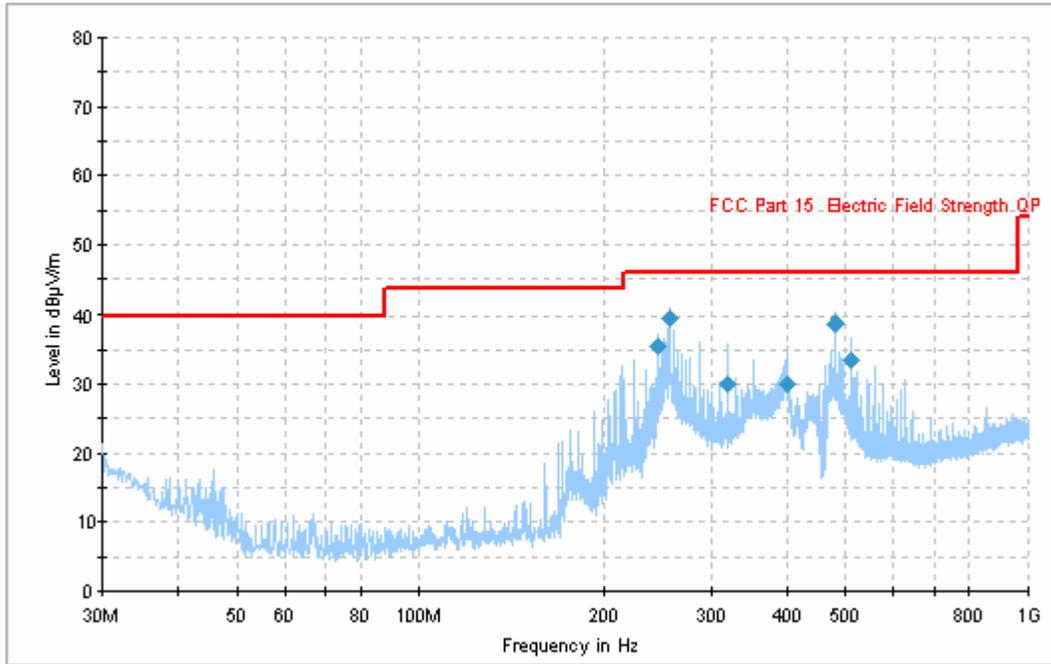

Frequency (MHz)	Corrected Amp. (dBµV/m)	Antenna Height (cm)	Ant. Polarity (H/V)	Turntable Position (deg)	Correction Factor (dB)	Limit (dBµV/m)	Margin (dB)
256.049850	39.8	143.0	H	100.0	-15.7	46.0	6.2
480.052725	38.8	103.0	H	357.0	-10.5	46.0	7.2
245.369800	35.4	147.0	H	285.0	-16.0	46.0	10.6
511.991025	33.6	195.0	H	0.0	-10.5	46.0	12.4
319.957550	30.1	118.0	H	111.0	-13.8	46.0	15.9
399.846375	30.0	104.0	H	6.0	-12.4	46.0	16.0

Test Mode: Transmitting (BDR) (Above 1GHz)

Freq. (MHz)	Reading (dBµV)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Amplifier (dB)	Correction Amplitude (dBµV/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB)				Limit (dBµV/m)	Margin (dB)	Remarks
Low Channel (2402 MHz)												
1602.06	54.05	AV	78	1.20	V	27.80	5.62	34.40	53.07	54	0.93	spurious
4804	42.58	AV	240	1.80	H	36.30	7.56	33.70	52.74	54	1.26	harmonic
4804	43.63	AV	265	1.20	V	35.00	7.56	33.70	52.49	54	1.51	harmonic
1602.06	52.20	AV	79	1.40	H	27.50	5.62	34.40	50.92	54	3.08	spurious
7206	33.02	AV	136	1.50	H	39.20	9.12	33.60	47.74	54	6.26	harmonic
7206	31.55	AV	180	1.30	V	38.00	9.12	33.60	45.07	54	8.93	harmonic
4804	55.31	PK	265	1.20	V	35.00	7.56	33.70	64.17	74	9.83	harmonic
4804	53.28	PK	240	1.80	H	36.30	7.56	33.70	63.44	74	10.56	harmonic
7206	45.23	PK	136	1.50	H	39.20	9.12	33.60	59.95	74	14.05	harmonic
7206	45.56	PK	180	1.30	V	38.00	9.12	33.60	59.08	74	14.92	harmonic
1602.06	56.04	PK	78	1.30	V	27.80	5.62	34.40	55.06	74	18.94	spurious
1602.06	55.65	PK	79	1.30	H	27.50	5.62	34.40	54.37	74	19.63	spurious
Middle Channel (2441 MHz)												
4882	42.94	AV	360	1.50	H	36.30	7.56	33.70	53.10	54	0.90	harmonic
1626.69	54.00	AV	175	1.10	V	27.80	5.62	34.40	53.02	54	0.98	spurious
4882	43.72	AV	0	1.20	V	35.00	7.56	33.70	52.58	54	1.42	harmonic
1626.69	51.26	AV	60	1.60	H	27.50	5.62	34.40	49.98	54	4.02	spurious
7323	32.26	AV	360	1.50	H	39.30	9.14	33.60	47.10	54	6.90	harmonic
7323	31.25	AV	90	1.30	V	38.05	9.14	33.60	44.84	54	9.16	harmonic
4882	55.97	PK	0	1.20	V	35.00	7.56	33.70	64.83	74	9.17	harmonic
4882	54.39	PK	360	1.50	H	36.30	7.56	33.70	64.55	74	9.45	harmonic
7323	44.62	PK	360	1.50	H	39.30	9.14	33.60	59.46	74	14.54	harmonic
7323	45.27	PK	90	1.30	V	38.05	9.14	33.60	58.86	74	15.14	harmonic
1626.69	56.24	PK	175	1.10	V	27.80	5.62	34.40	55.26	74	18.74	spurious
1626.69	54.34	PK	60	1.60	H	27.50	5.62	34.40	53.06	74	20.94	spurious
High Channel (2480 MHz)												
4960	43.90	AV	180	1.20	V	35.20	7.70	33.70	53.10	54	0.90	harmonic
4960	42.60	AV	50	1.70	H	36.40	7.70	33.70	53.00	54	1.00	harmonic
1652.68	53.46	AV	130	1.10	V	27.80	5.62	34.40	52.48	54	1.52	spurious
1652.68	49.55	AV	64	2.00	H	27.50	5.62	34.40	48.27	54	5.73	spurious
7440	33.02	AV	90	1.60	H	39.40	9.17	33.60	47.99	54	6.01	harmonic
7440	33.16	AV	168	1.20	V	38.20	9.17	33.60	46.93	54	7.07	harmonic
4960	55.32	PK	180	1.20	V	35.20	7.70	33.70	64.52	74	9.48	harmonic
4960	53.40	PK	50	1.70	H	36.40	7.70	33.70	63.80	74	10.20	harmonic
7440	45.32	PK	90	1.60	H	39.40	9.17	33.60	60.29	74	13.71	harmonic
7440	46.03	PK	168	1.20	V	38.20	9.17	33.60	59.80	74	14.20	harmonic
1652.68	55.84	PK	130	1.10	V	27.80	5.62	34.40	54.86	74	19.14	spurious
1652.68	52.77	PK	64	2.00	H	27.50	5.62	34.40	51.49	74	22.51	spurious

Test Mode: Transmitting (EDR) (Above 1GHz)

Freq. (MHz)	Reading (dB μ V)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Amplifier (dB)	Correction Amplitude (dB μ V/m)	FCC Part 15.247/209		
				Height (m)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)	Remarks
Low Channel (2402 MHz)												
1602.06	53.67	AV	172.00	1.20	V	27.80	5.62	34.40	52.69	54.00	1.31	spurious
4804.00	41.92	AV	180.00	1.70	H	36.30	7.56	33.70	52.08	54.00	1.92	harmonic
4804.00	43.05	AV	360.00	1.20	V	35.00	7.56	33.70	51.91	54.00	2.09	harmonic
1602.06	52.53	AV	90.00	1.40	H	27.50	5.62	34.40	51.25	54.00	2.75	spurious
7206.00	32.78	AV	160.00	1.50	H	39.20	9.12	33.60	47.50	54.00	6.50	harmonic
7206.00	31.67	AV	180.00	1.30	V	38.00	9.12	33.60	45.19	54.00	8.81	harmonic
4804.00	54.76	PK	360.00	1.20	V	35.00	7.56	33.70	63.62	74.00	10.38	harmonic
4804.00	52.54	PK	180.00	1.70	H	36.30	7.56	33.70	62.70	74.00	11.30	harmonic
7206.00	44.01	PK	160.00	1.50	H	39.20	9.12	33.60	58.73	74.00	15.27	harmonic
7206.00	44.77	PK	180.00	1.30	V	38.00	9.12	33.60	58.29	74.00	15.71	harmonic
1602.06	55.53	PK	172.00	1.20	V	27.80	5.62	34.40	54.55	74.00	19.45	spurious
1602.06	55.79	PK	90.00	1.40	H	27.50	5.62	34.40	54.51	74.00	19.49	spurious
Middle Channel (2441 MHz)												
1626.69	53.44	AV	196.00	1.20	V	27.80	5.62	34.40	52.46	54.00	1.54	spurious
4882.00	41.76	AV	152.00	1.60	H	36.30	7.56	33.70	51.92	54.00	2.08	harmonic
1626.69	53.03	AV	325.00	1.70	H	27.50	5.62	34.40	51.75	54.00	2.25	spurious
4882.00	42.88	AV	90.00	1.20	V	35.00	7.56	33.70	51.74	54.00	2.26	harmonic
7323.00	32.01	AV	360.00	1.60	H	39.30	9.14	33.60	46.85	54.00	7.15	harmonic
7323.00	31.15	AV	178.00	1.20	V	38.05	9.14	33.60	44.74	54.00	9.26	harmonic
4882.00	52.98	PK	152.00	1.60	H	36.30	7.56	33.70	63.14	74.00	10.86	harmonic
4882.00	53.94	PK	90.00	1.20	V	35.00	7.56	33.70	62.80	74.00	11.20	harmonic
7323.00	43.12	PK	360.00	1.60	H	39.30	9.14	33.60	57.96	74.00	16.04	harmonic
7323.00	43.88	PK	178.00	1.20	V	38.05	9.14	33.60	57.47	74.00	16.53	harmonic
1626.69	55.79	PK	325.00	1.70	H	27.50	5.62	34.40	54.51	74.00	19.49	spurious
1626.69	55.13	PK	196.00	1.20	V	27.80	5.62	34.40	54.15	74.00	19.85	spurious
High Channel (2480 MHz)												
4960.00	41.70	AV	180.00	1.60	H	36.40	7.70	33.70	52.10	54.00	1.90	harmonic
1652.68	52.86	AV	98.00	1.10	V	27.80	5.62	34.40	51.88	54.00	2.12	spurious
4960.00	42.45	AV	180.00	1.10	V	35.20	7.70	33.70	51.65	54.00	2.35	harmonic
1652.68	52.13	AV	96.00	1.70	H	27.50	5.62	34.40	50.85	54.00	3.15	spurious
7440.00	31.75	AV	180.00	1.50	H	39.40	9.17	33.60	46.72	54.00	7.28	harmonic
7440.00	31.79	AV	360.00	1.20	V	38.20	9.17	33.60	45.56	54.00	8.44	harmonic
4960.00	53.61	PK	180.00	1.10	V	35.20	7.70	33.70	62.81	74.00	11.19	harmonic
4960.00	51.92	PK	180.00	1.60	H	36.40	7.70	33.70	62.32	74.00	11.68	harmonic
7440.00	43.76	PK	180.00	1.50	H	39.40	9.17	33.60	58.73	74.00	15.27	harmonic
7440.00	44.11	PK	360.00	1.20	V	38.20	9.17	33.60	57.88	74.00	16.12	harmonic
1652.68	55.18	PK	98.00	1.10	V	27.80	5.62	34.40	54.20	74.00	19.80	spurious
1652.68	55.23	PK	96.00	1.70	H	27.50	5.62	34.40	53.95	74.00	20.05	spurious

Spurious Emission in Restricted Band (BDR):

Freq. (MHz)	Reading (dB μ V)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Amplifier (dB)	Correction Amplitude (dB μ V/m)	FCC Part 15.247/205		
				Height (m)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)	Remarks
Out of left side band (2310 – 2390 MHz)												
2378.9	33.46	AV	75	1.6	H	30.9	7.6	33.9	38.06	54	15.94	Spurious
2368.4	33.39	AV	179	1.1	V	30.3	7.6	33.9	37.39	54	16.61	Spurious
2378.9	46.52	PK	75	1.6	H	30.9	7.6	33.9	51.12	74	22.88	Spurious
2368.4	46.14	PK	179	1.1	V	30.3	7.6	33.9	50.14	74	23.86	Spurious
Out of left side band (2483.5 – 2500 MHz)												
2483.5	38.83	AV	108	1.2	V	30.3	8	33.9	43.23	54	10.77	Spurious
2483.5	37.86	AV	0	1.9	H	30.9	8	33.9	42.86	54	11.14	Spurious
2483.5	52.15	PK	108	1.2	V	30.3	8	33.9	56.55	74	17.45	Spurious
2483.5	51.51	PK	0	1.9	H	30.9	8	33.9	56.51	74	17.49	Spurious

Spurious Emission in Restricted Band (EDR):

Freq. (MHz)	Reading (dB μ V)	Detector PK/QP/AV	Direction Degree	Antenna			Cable Loss (dB)	Amplifier (dB)	Correction Amplitude (dB μ V/m)	FCC Part 15.247/205		
				Height (m)	Polar (H/V)	Factor (dB)				Limit (dB μ V/m)	Margin (dB)	Remarks
Out of left side band (2310 – 2390 MHz)												
2378.90	33.02	AV	180.00	1.70	H	30.90	7.60	33.90	37.62	54.00	16.38	Spurious
2368.90	33.12	AV	180.00	1.20	V	30.30	7.60	33.90	37.12	54.00	16.88	Spurious
2368.90	45.54	PK	180.00	1.20	V	30.30	7.60	33.90	49.54	74.00	24.46	Spurious
2378.90	44.78	PK	180.00	1.70	H	30.90	7.60	33.90	49.38	74.00	24.62	Spurious
Out of left side band (2483.5 – 2500 MHz)												
2483.50	35.56	AV	90.00	1.20	V	30.30	8.00	33.90	39.96	54.00	14.04	Spurious
2483.50	34.36	AV	180.00	1.90	H	30.90	8.00	33.90	39.36	54.00	14.64	Spurious
2483.50	48.01	PK	90.00	1.20	V	30.30	8.00	33.90	52.41	74.00	21.59	Spurious
2483.50	47.33	PK	180.00	1.90	H	30.90	8.00	33.90	52.33	74.00	21.67	Spurious

CFR47 §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 100 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another truce
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	27 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Alvin Huang on 2009-01-19 to 2009-01-20.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting (BDR)


Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.004	0.531	Pass
Adjacent Channel	2403			
Mid Channel	2440	1.000	0.539	Pass
Adjacent Channel	2441			
High Channel	2480	1.000	0.573	Pass
Adjacent Channel	2479			

Low Channel

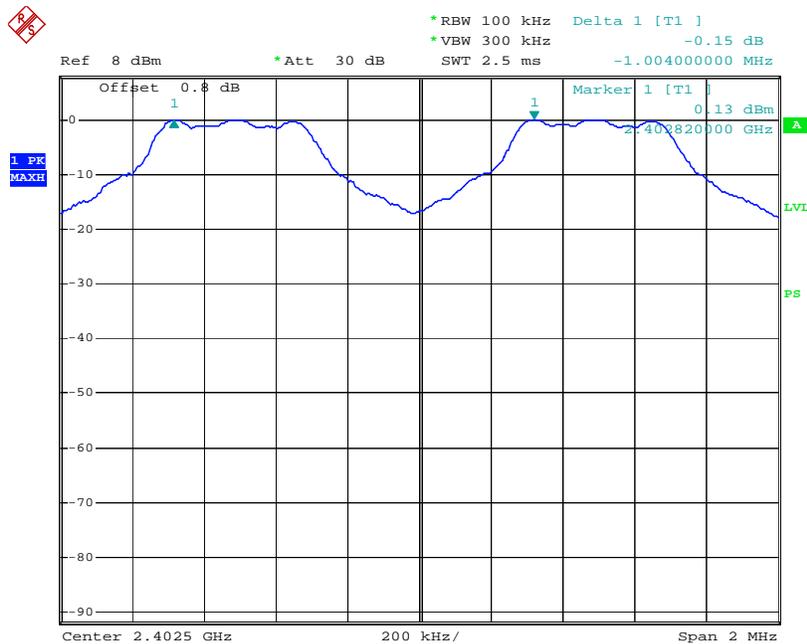

channel separation-low channel
 Date: 19.JAN.2009 20:30:31


Middle Channel

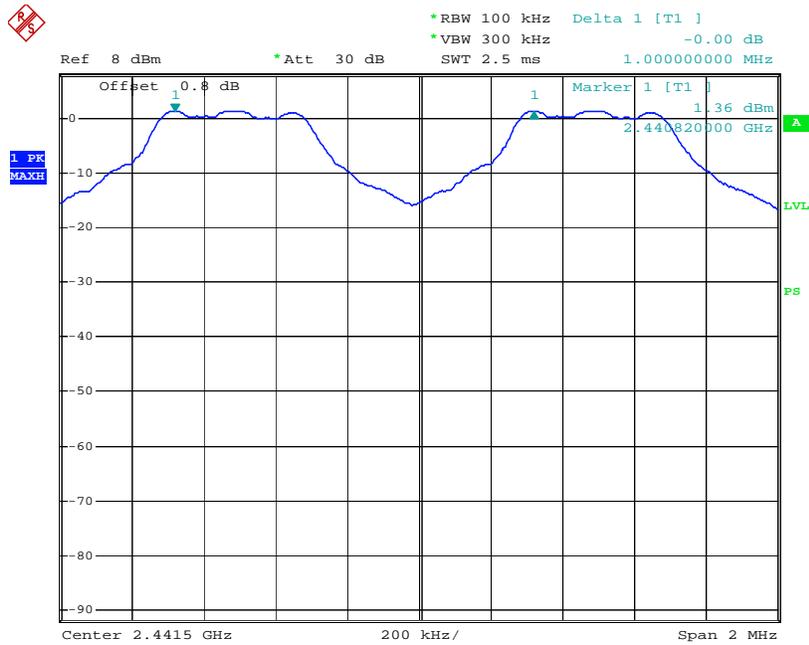

channel separation-middle channel

Date: 19.JAN.2009 20:31:59

High Channel

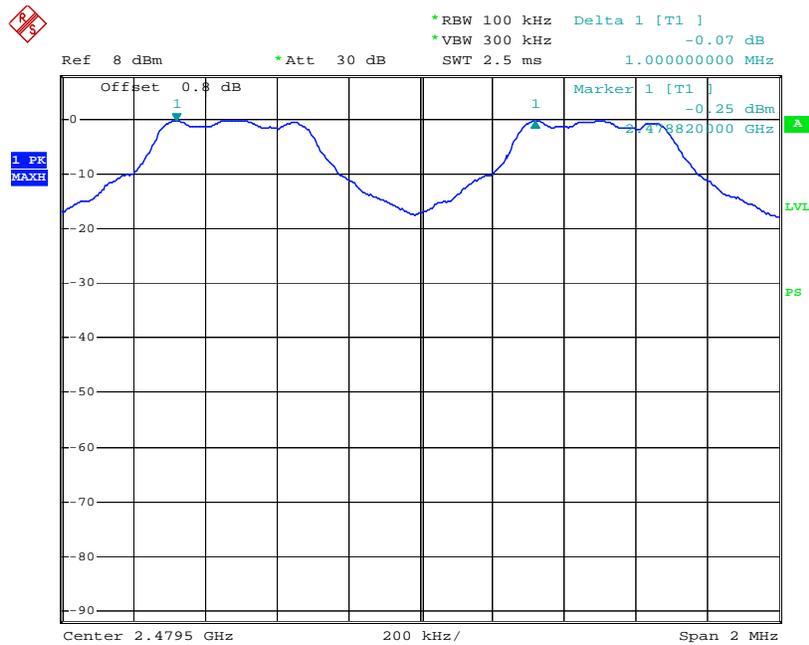


channel separation-high channel

Date: 19.JAN.2009 20:33:21

Test Mode: Transmitting (EDR)


Channel	Channel Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
Low Channel	2402	1.008	0.803	Pass
Adjacent Channel	2403			
Mid Channel	2440	1.000	0.816	Pass
Adjacent Channel	2441			
High Channel	2480	1.000	0.816	Pass
Adjacent Channel	2479			

Low Channel

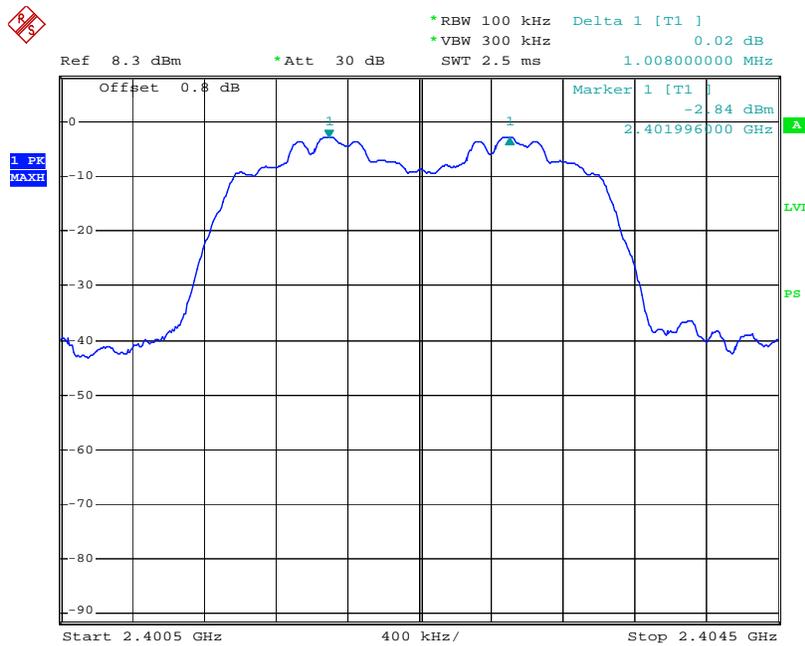

channel separation-low channel
 Date: 20.JAN.2009 17:14:01


Middle Channel

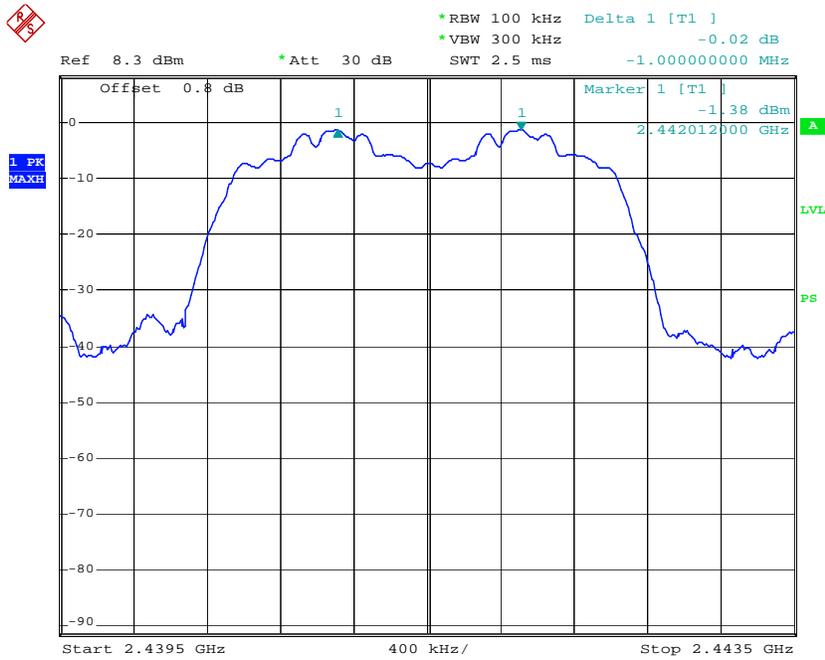

channel separation-middle channel

Date: 20.JAN.2009 17:15:55

High Channel

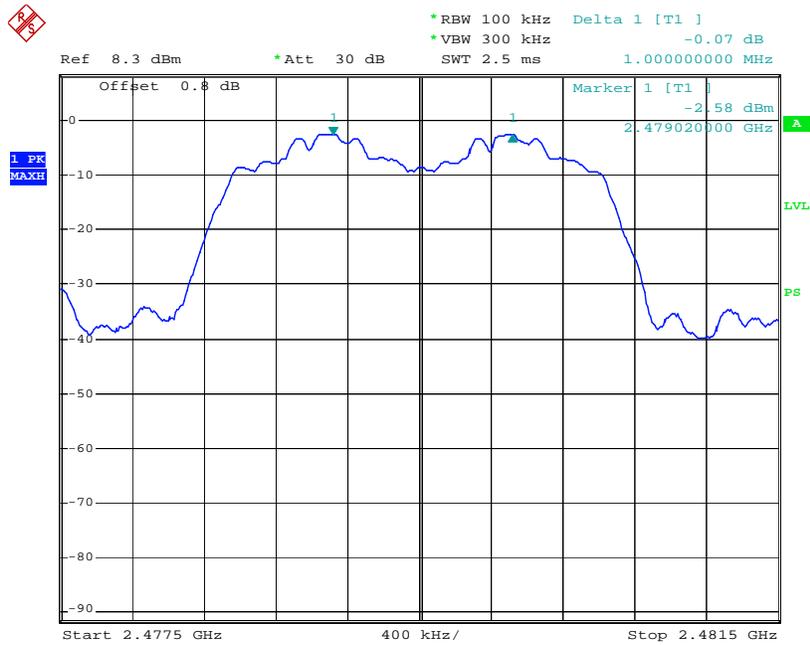

channel separation-high channel

Date: 20.JAN.2009 17:17:53

CFR47 §15.247(a) (1) – 20dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Alvin Huang on 2009-01-20.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting (BDR)

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	0.796
Middle	2441	0.808
High	2480	0.860


Low Channel

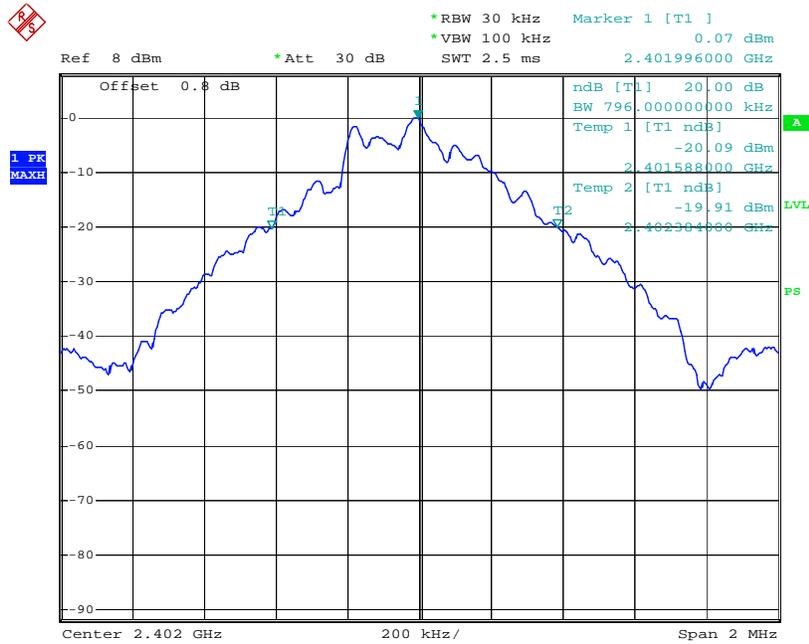

20db -low channel

Date: 19.JAN.2009 20:17:15

Middle Channel

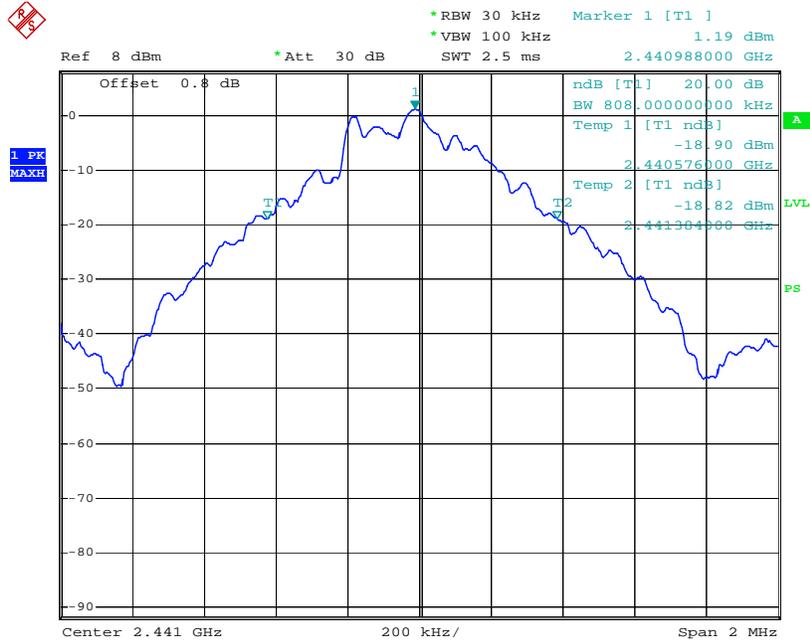

20db -middle channel
 Date: 19.JAN.2009 20:16:24

High Channel




20db -high channel
 Date: 19.JAN.2009 20:15:10

Test Mode: Transmitting (EDR)

Channel	Channel Frequency (MHz)	20dB Bandwidth (MHz)
Low	2402	1.204
Middle	2441	1.224
High	2480	1.224


Low Channel

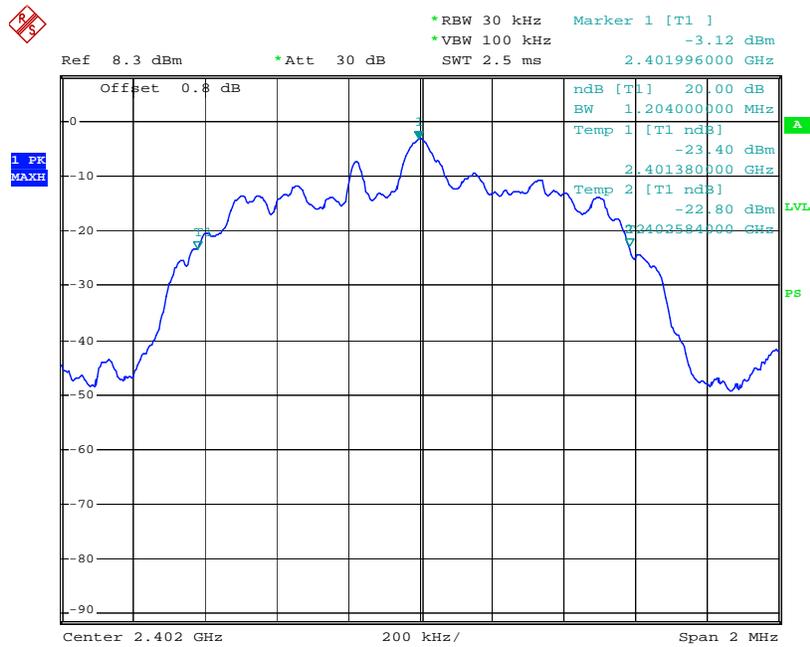

20db down-low channel

Date: 20.JAN.2009 17:21:36


Middle Channel

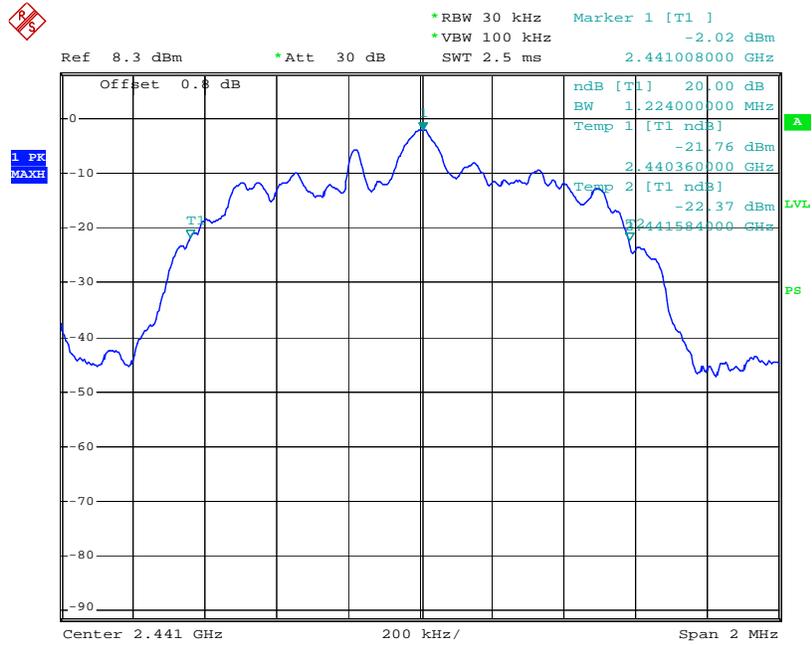

20db down-middle channel

Date: 20.JAN.2009 17:20:42

High Channel

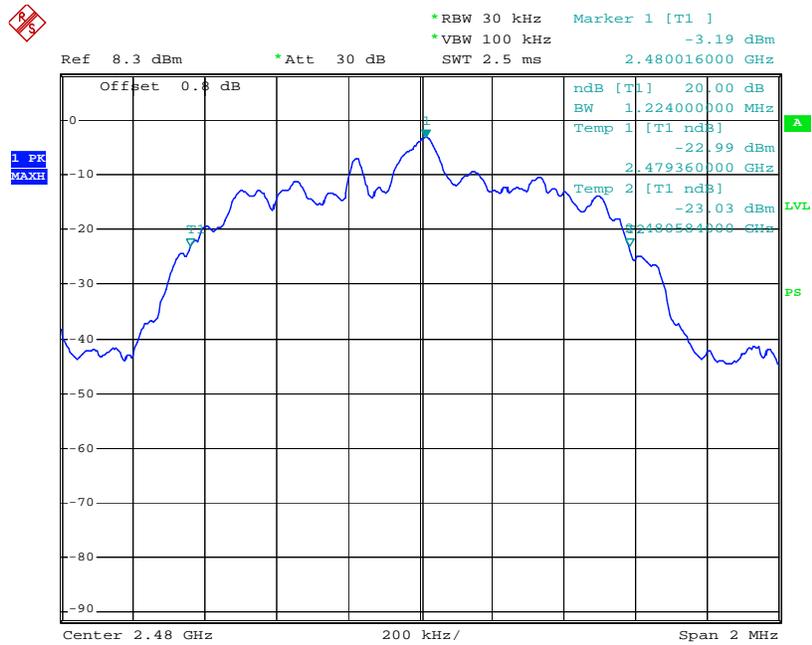

20db down-high channel

Date: 20.JAN.2009 17:19:47

CFR47 §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds divided by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in transmitting mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

The testing was performed by Alvin Huang on 2009-01-19 to 2009-01-20.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting (BDR)

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

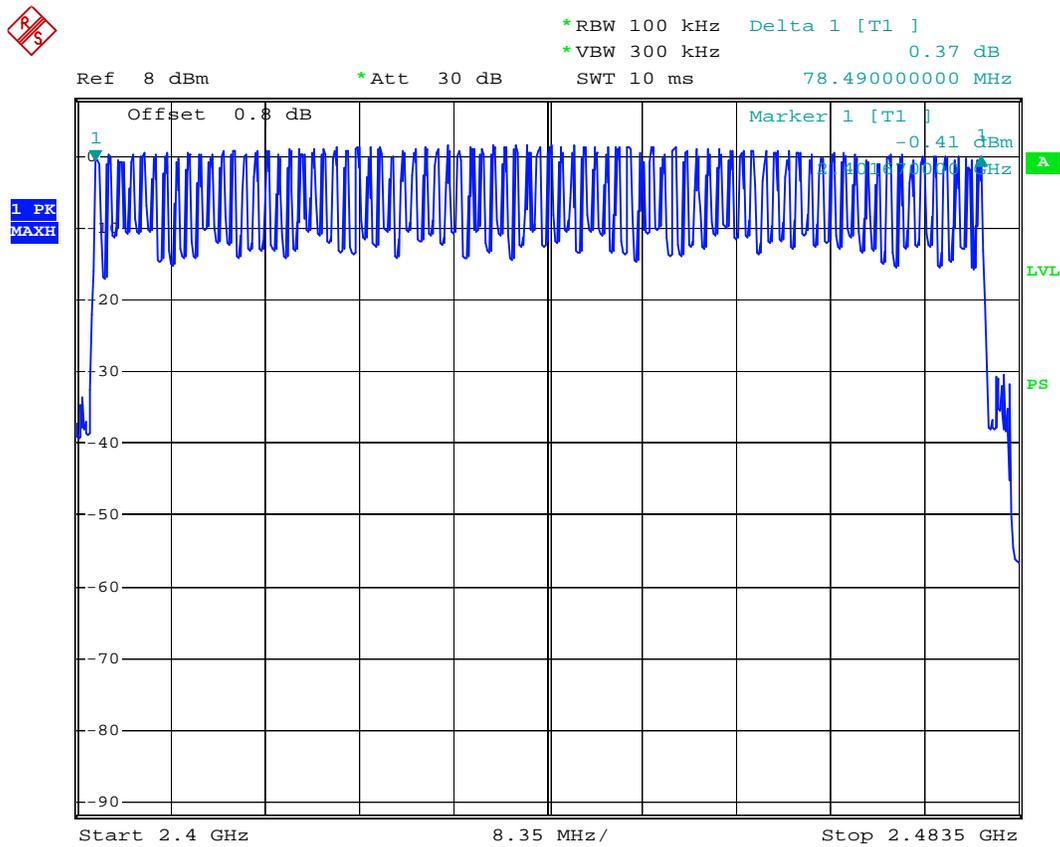


hopping channels

Date: 19.JAN.2009 20:28:25

Test Mode: Transmitting (EDR)

Frequency Range (MHz)	Number of Hopping Channel	Limit
2400-2483.5	79	≥15

Number of Hopping Channels

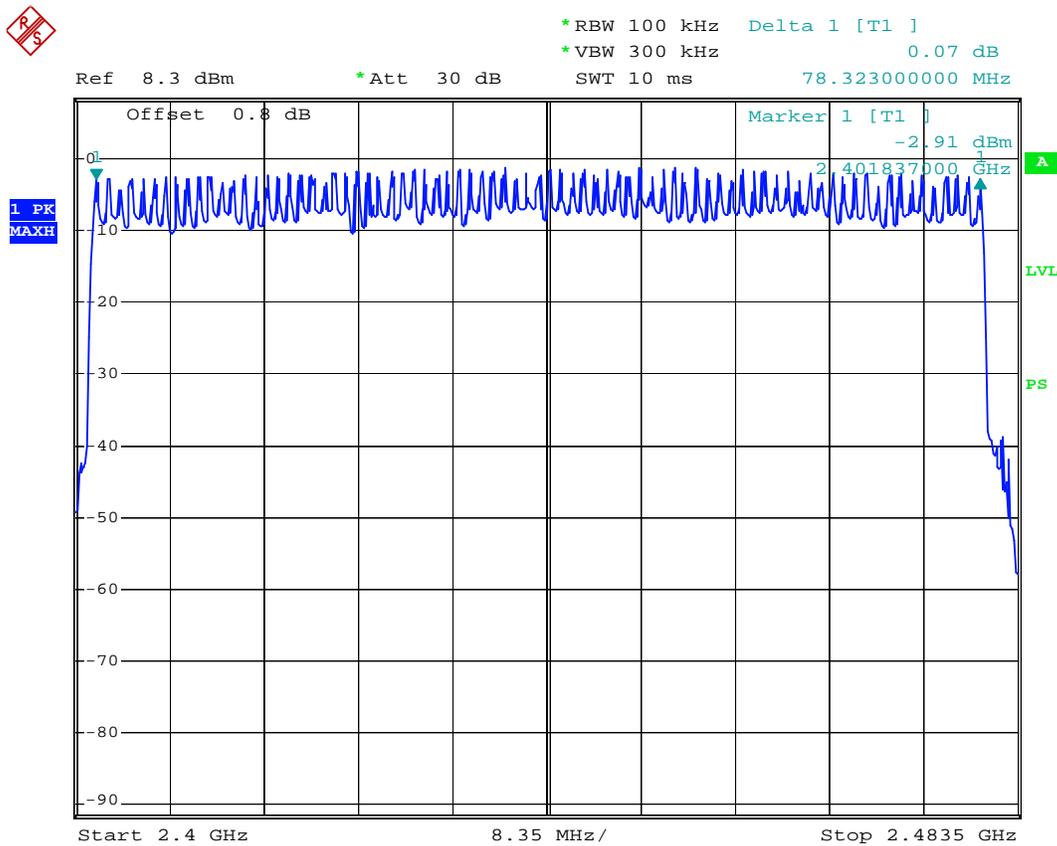

hopping channels

Date: 20.JAN.2009 17:41:37

CFR47 §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell Time= time slot length * hope rate/ number of hopping channels * 31.6s

Hop rate=1600/s

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Alvin Huang on 2009-01-19 to 2009-01-20.

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting (BDR)

DH 1

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	0.540	0.173	0.4	Pass
Middle	0.540	0.173	0.4	Pass
High	0.540	0.173	0.4	Pass

Note: Dwell time=Pulse width (ms) * (1600 / 2 / 79) *31.6 Second

DH 3

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	1.810	0.290	0.4	Pass
Middle	1.810	0.290	0.4	Pass
High	1.810	0.290	0.4	Pass


Note: Dwell time=Pulse width (ms) * (1600 / 4 / 79) *31.6 Second

DH 5

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	3.090	0.330	0.4	Pass
Middle	3.070	0.328	0.4	Pass
High	3.070	0.328	0.4	Pass

Note: Dwell time=Pulse width (ms) * (1600 / 6 / 79) *31.6 Second


Low Channel for DH1

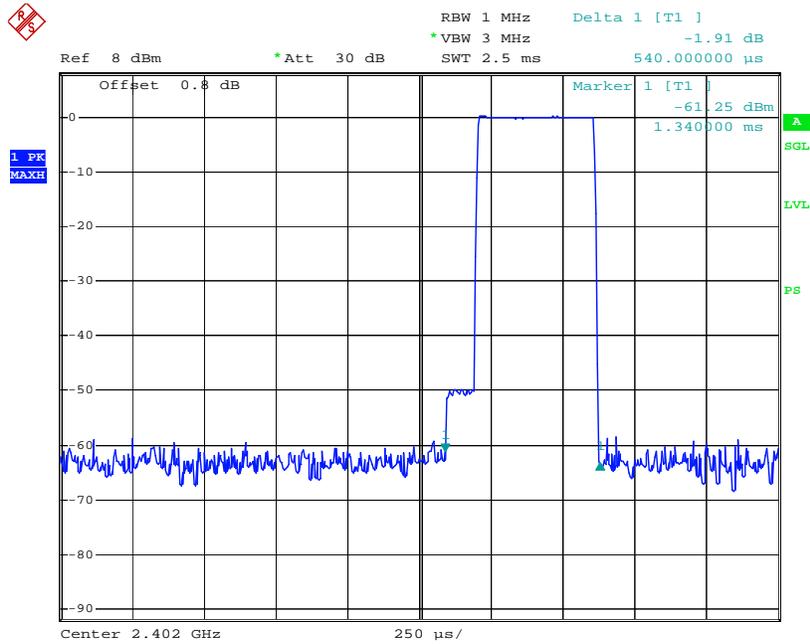

DH1-Low channel

Date: 19.JAN.2009 21:01:12


Middle Channel for DH1

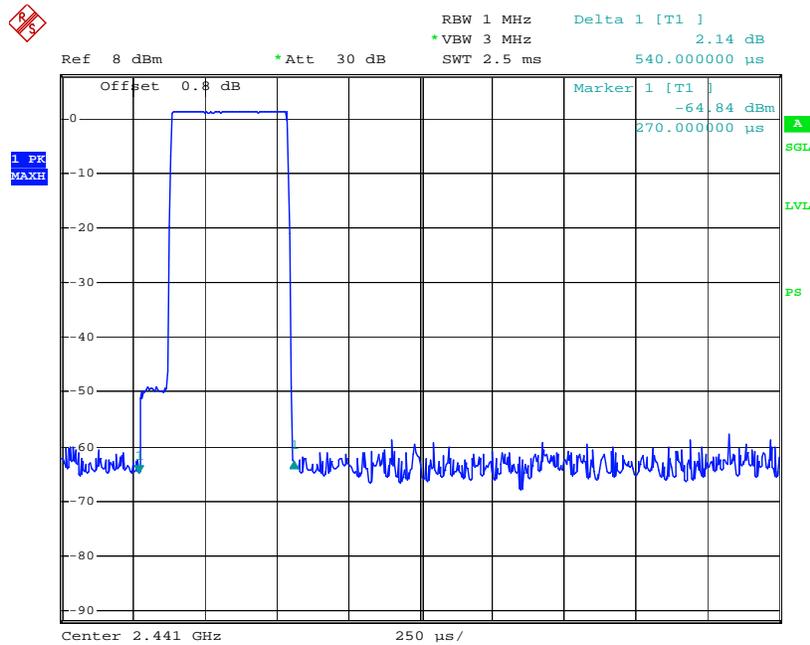

DH1-middle channel

Date: 19.JAN.2009 21:02:38


High Channel for DH1

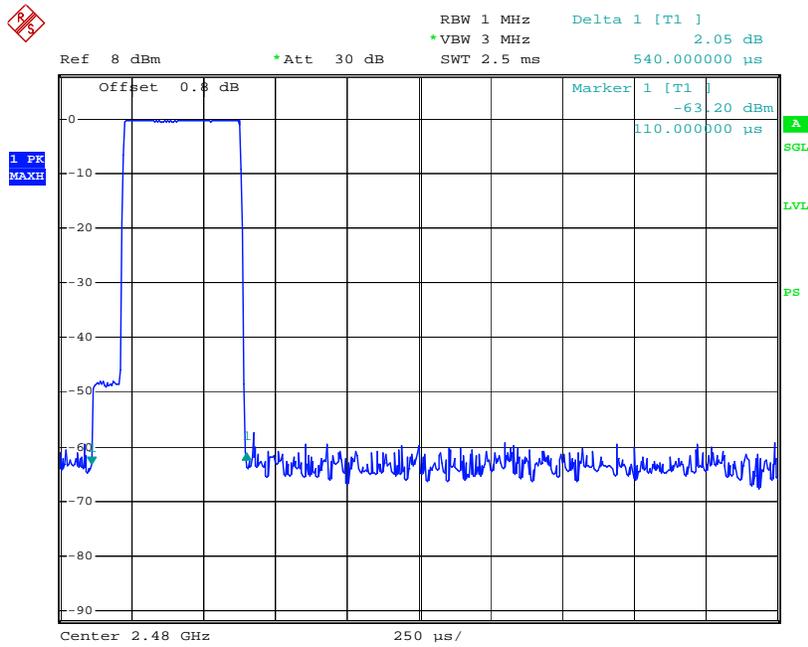

DH1-high channel

Date: 19.JAN.2009 21:04:10


Low Channel for DH3

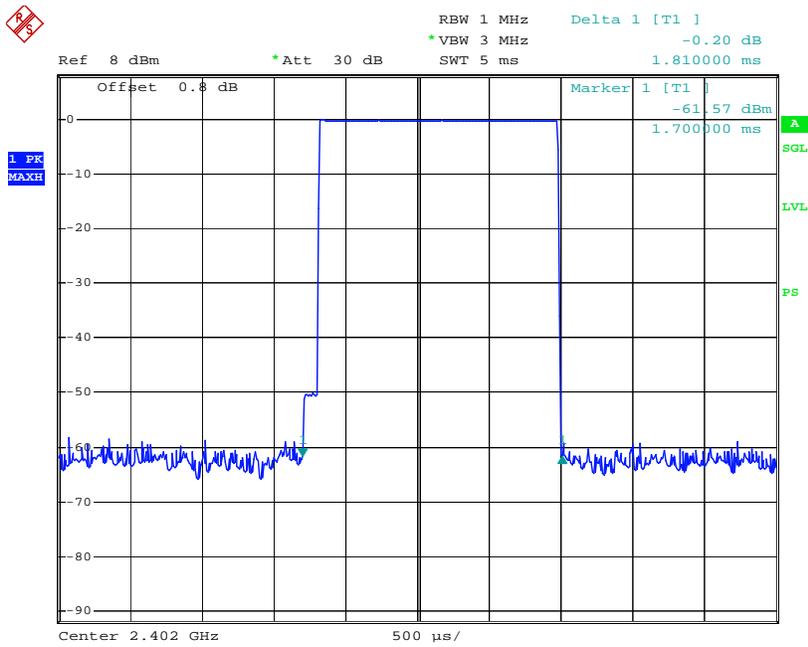

DH3-low channel


Date: 19.JAN.2009 21:07:01

Middle Channel for DH3

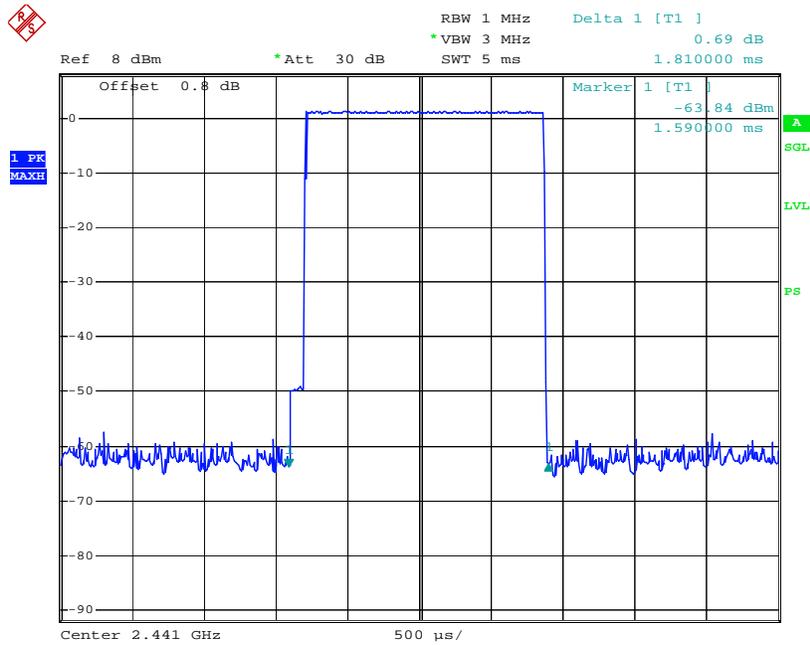


DH3-middle channel
Date: 19.JAN.2009 21:06:07

High Channel for DH3

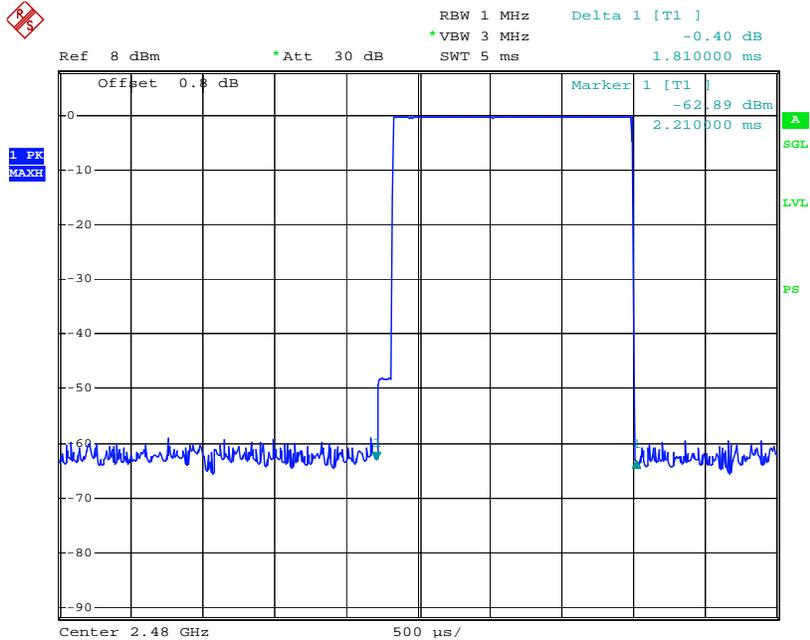

DH3-high channel
Date: 19.JAN.2009 21:05:32


Low Channel for DH5

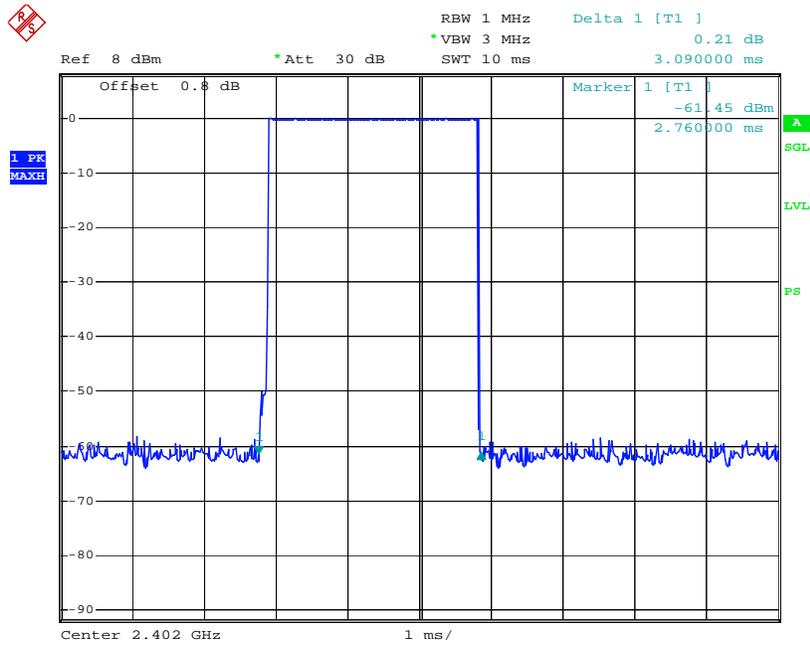

DH5-low channel

Date: 19.JAN.2009 21:08:24


Middle Channel for DH5

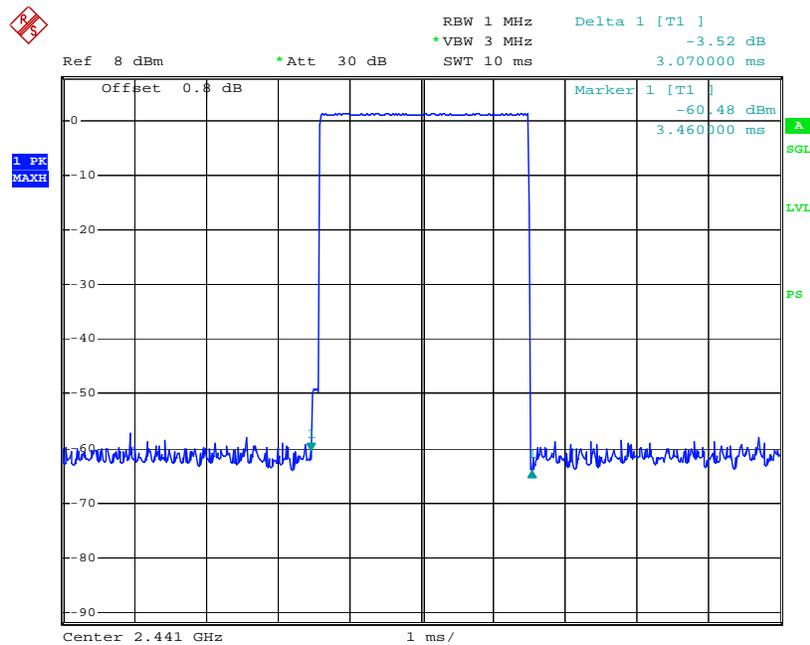

DH5-middle channel

Date: 19.JAN.2009 21:11:50

High Channel for DH5

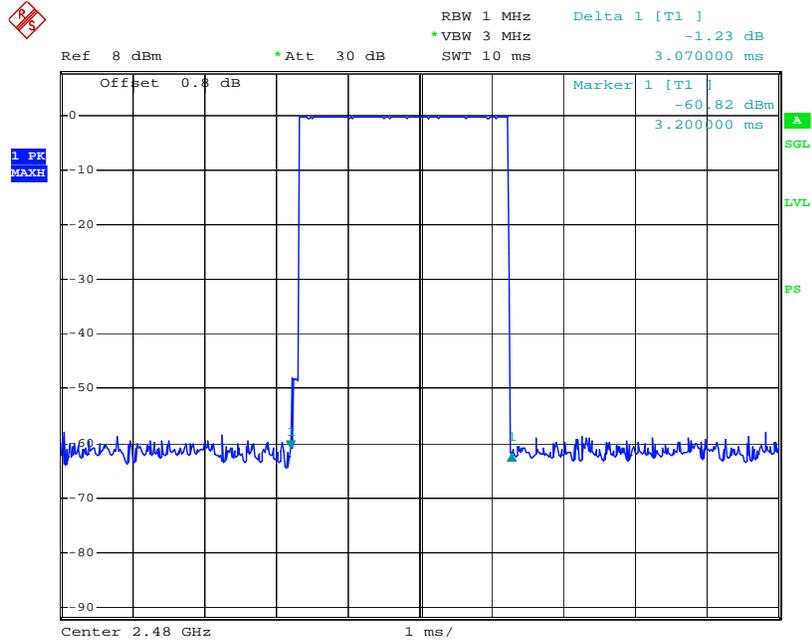

DH5-high channel

Date: 19.JAN.2009 21:12:47

Test Mode: Transmitting (EDR)

DH 1

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	0.550	0.176	0.4	Pass
Middle	0.555	0.178	0.4	Pass
High	0.555	0.178	0.4	Pass

Note: Dwell time=Pulse width (ms) * (1600 / 2 / 79) *31.6 Second

DH 3

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	1.325	0.212	0.4	Pass
Middle	1.325	0.212	0.4	Pass
High	1.325	0.212	0.4	Pass


Note: Dwell time=Pulse width (ms) * (1600 / 4 / 79) *31.6 Second

DH 5

Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
Low	3.085	0.329	0.4	Pass
Middle	3.105	0.331	0.4	Pass
High	3.105	0.331	0.4	Pass


Note: Dwell time=Pulse width (ms) * (1600 / 6 / 79) *31.6 Second

Low Channel for DH1

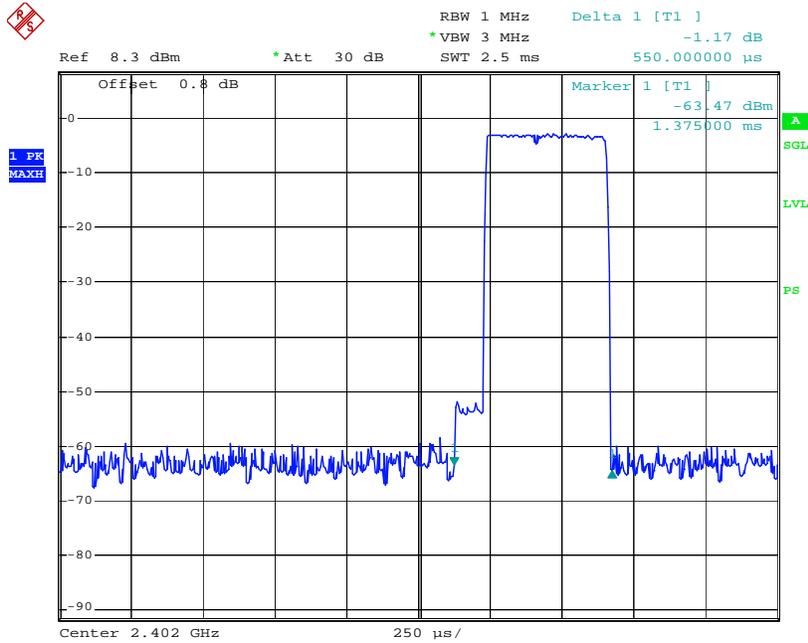


DH1-Low channel
Date: 20.JAN.2009 17:45:35

Middle Channel for DH1

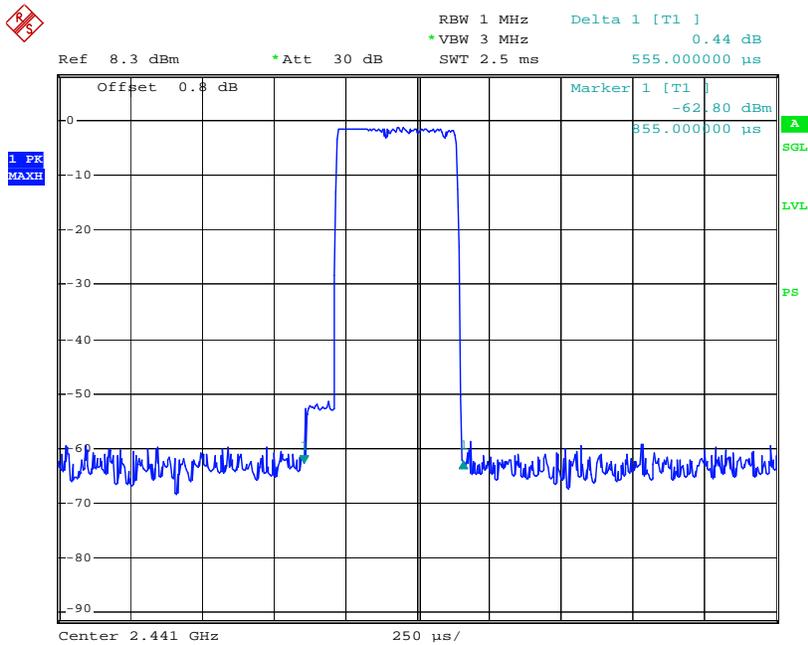

DH1-middle channel
Date: 20.JAN.2009 17:46:39


High Channel for DH1

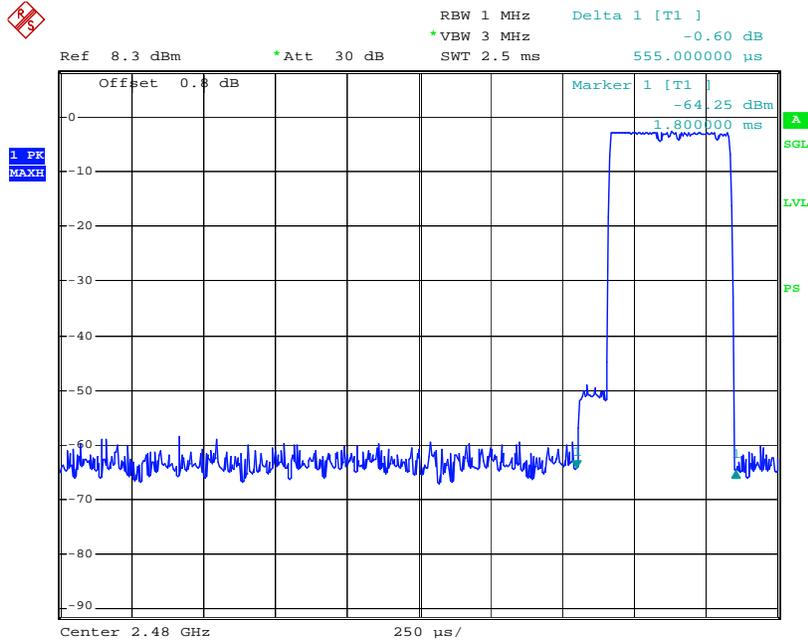

DH1-high channel

Date: 20.JAN.2009 17:47:23


Low Channel for DH3

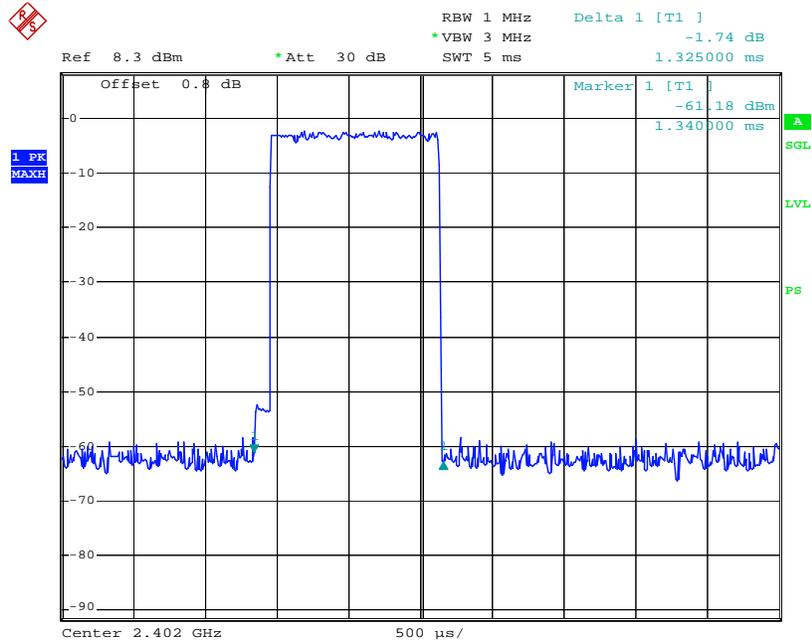

DH3-low channel

Date: 20.JAN.2009 17:53:04


Middle Channel for DH3

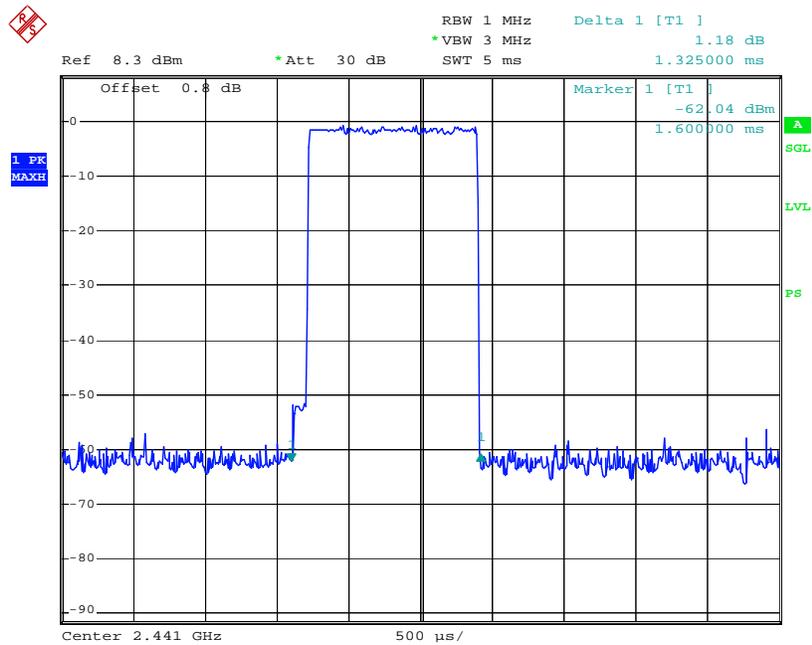

DH3-middle channel

Date: 20.JAN.2009 17:49:41


High Channel for DH3

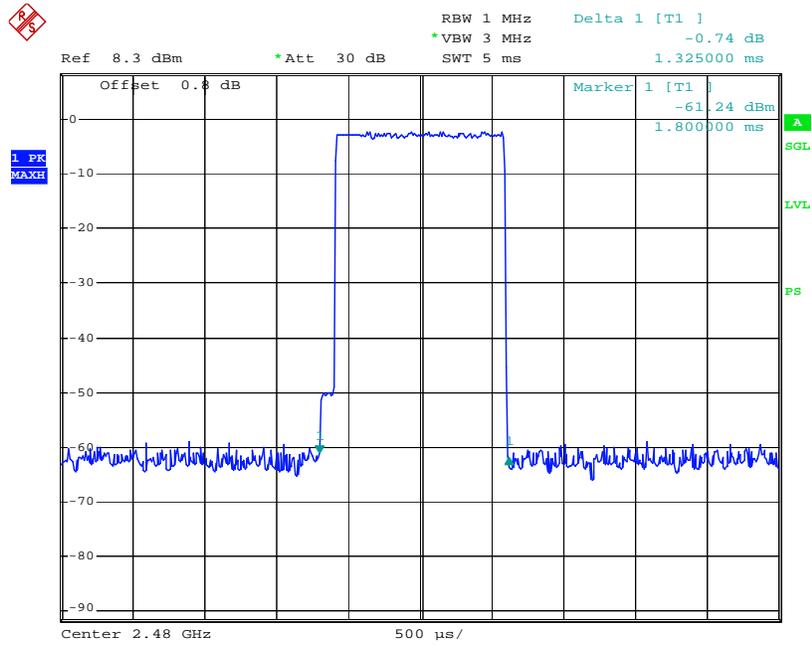

DH3-high channel

Date: 20.JAN.2009 17:48:57


Low Channel for DH5

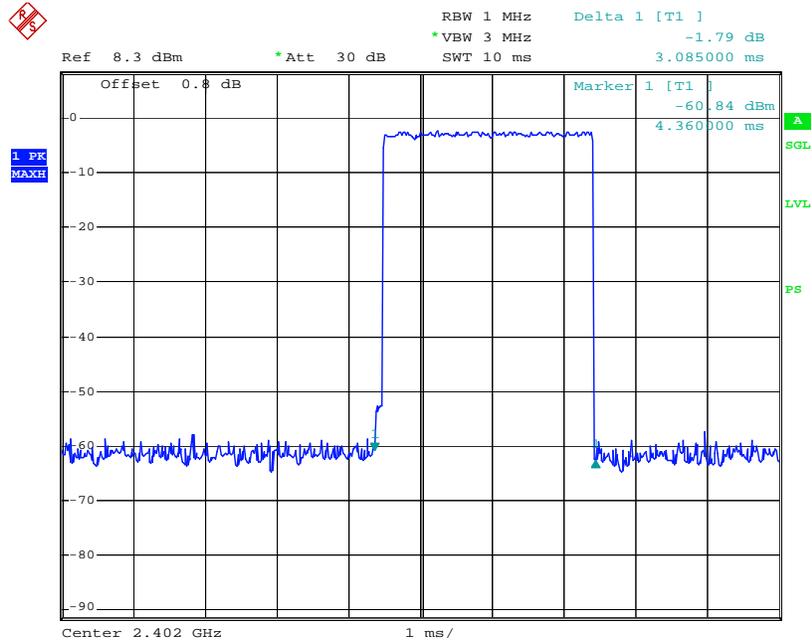

DH5-low channel

Date: 20.JAN.2009 17:54:13


Middle Channel for DH5

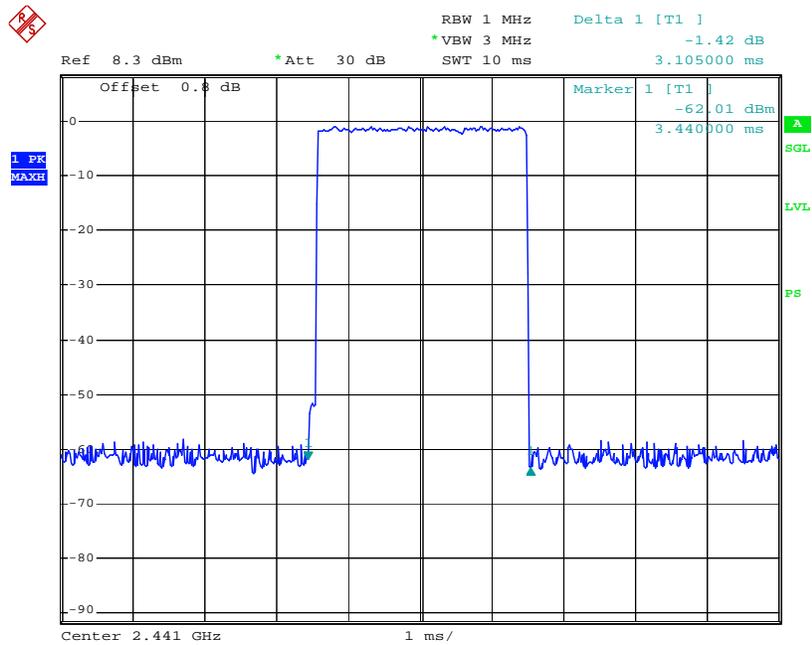

DH5-middle channel

Date: 20.JAN.2009 17:56:08

High Channel for DH5

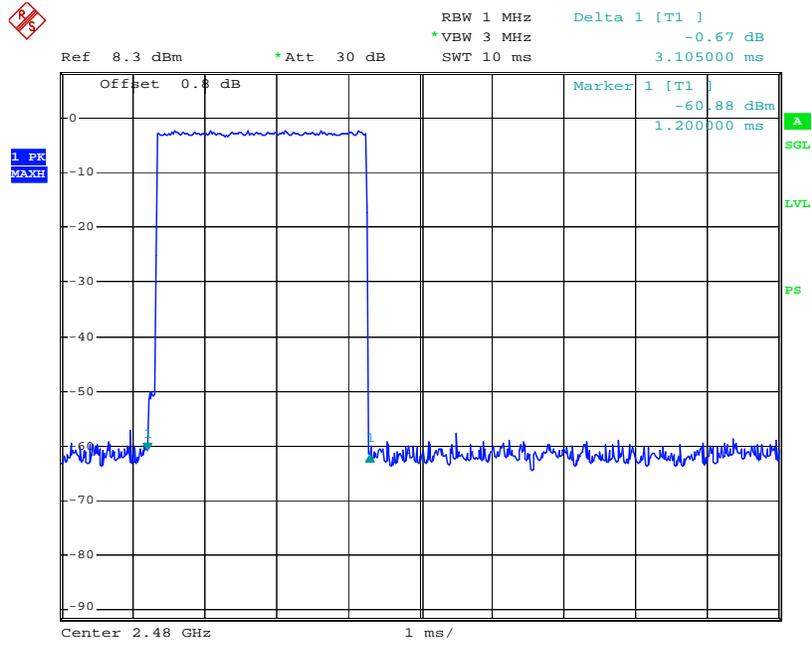

DH5-high channel
Date: 20.JAN.2009 17:56:53

CFR47 §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Place the EUT in a constant temperature case and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI Test Receiver.
3. Add a correction factor to the display.



Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

* The testing was performed by Alvin Huang on 2009-01-19 to 2009-02-09.


Test Result: Compliance.

Please refer to following table and plots

Test Mode: Transmitting (BDR)


Channel	Frequency (MHz)	Output Peak Power (dBm)	Output Peak Power (mW)	Limit (mW)
Low	2402	0.39	1.09	125
Middle	2441	1.53	1.42	125
High	2480	-0.20	0.95	125

Low Channel

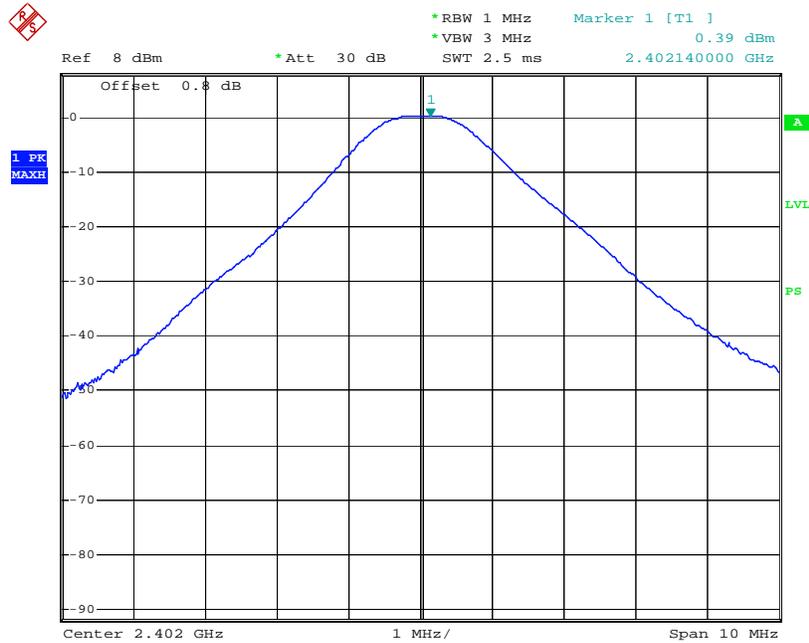

output power-low channel
 Date: 19.JAN.2009 20:43:17


Middle Channel

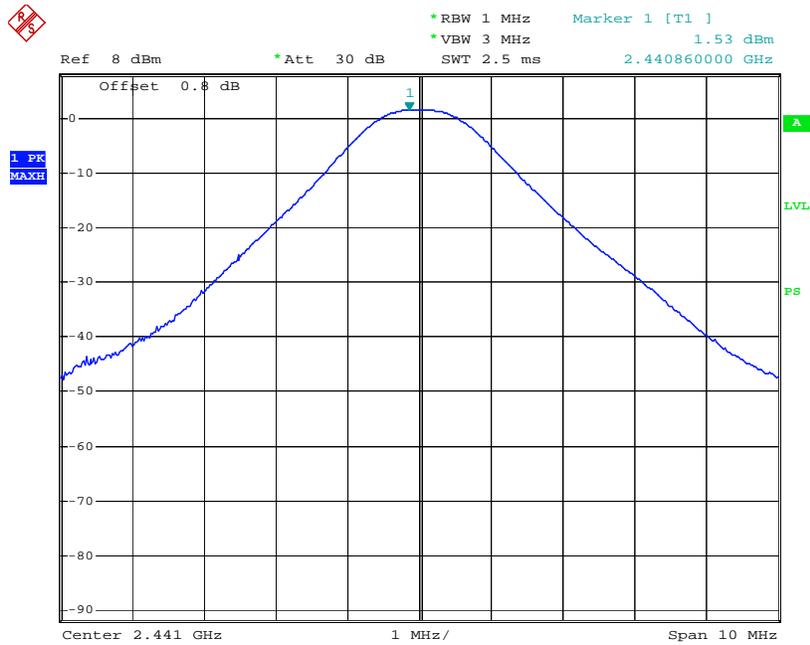

output power-middle channel

Date: 19.JAN.2009 20:44:05

High Channel

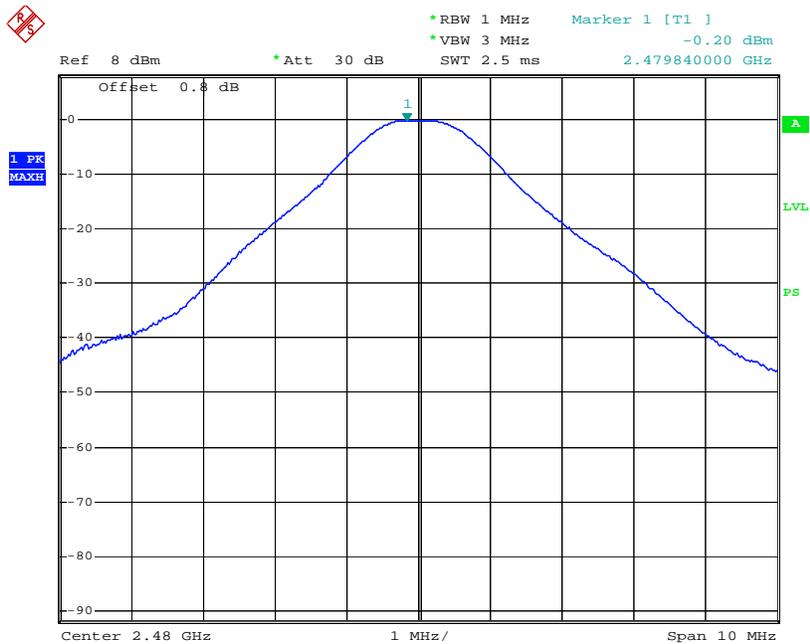


output power-high channel

Date: 19.JAN.2009 20:44:53

Test Mode: Transmitting (EDR)


Channel	Frequency (MHz)	Output Peak Power (dBm)	Output Peak Power (mW)	Limit (mW)
Low	2402	-2.10	0.62	125
Middle	2441	-0.76	0.84	125
High	2480	-2.19	0.60	125

Low Channel

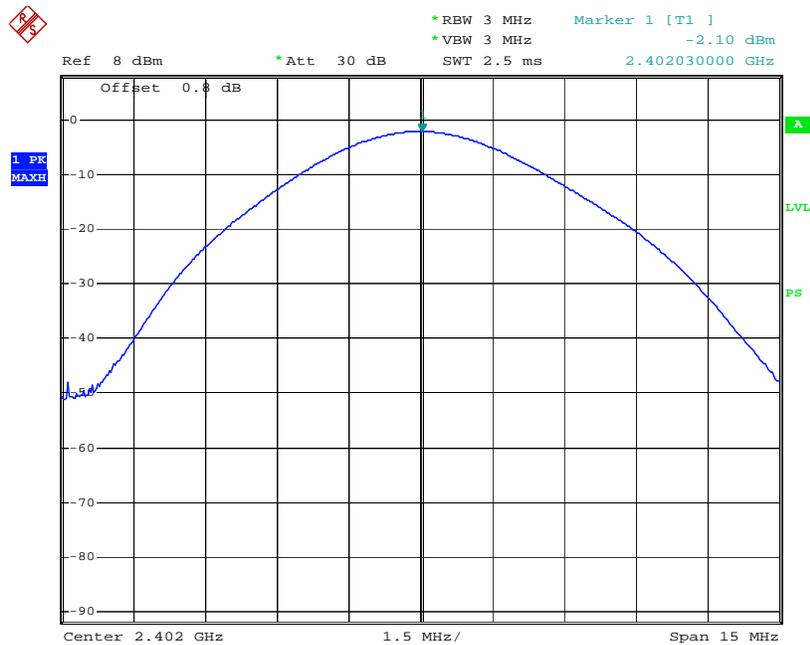

Power low
 Date: 9.FEB.2009 21:22:38


Middle Channel

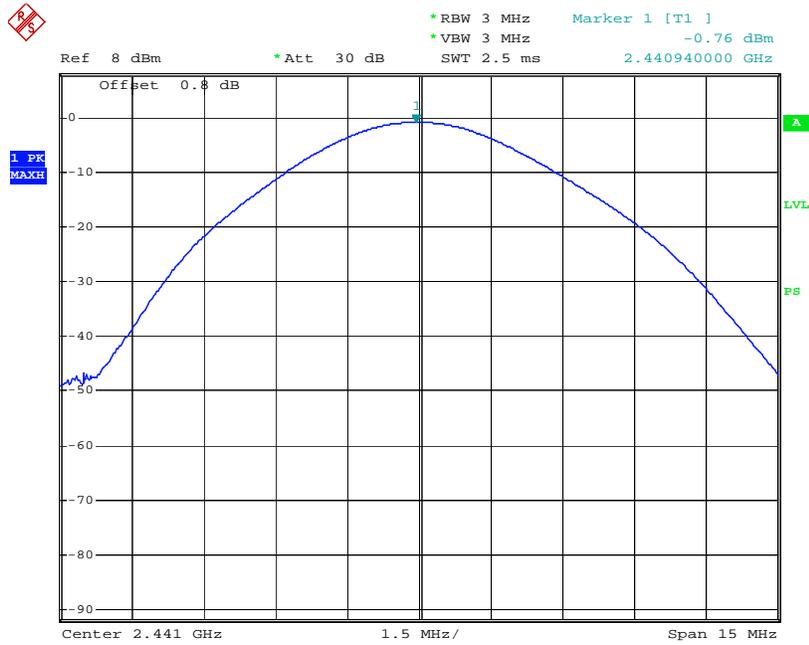

Power middle

Date: 9.FEB.2009 21:26:16

High Channel

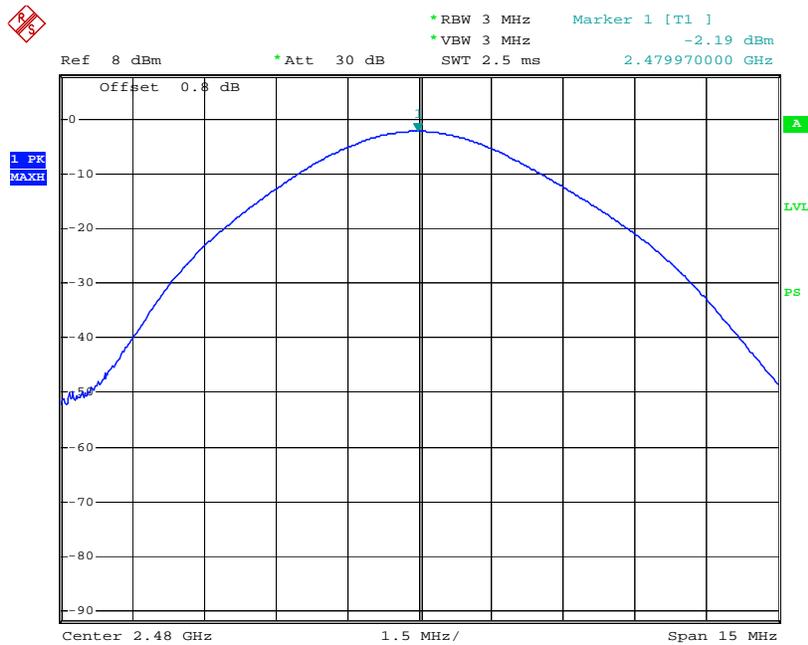

Power high

Date: 9.FEB.2009 21:29:06

CFR47 §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	100035	2008-11-07	2009-11-06

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. For conducted measurements the transmitter shall be connected to the measuring equipment.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data**Environmental Conditions**

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	100.9 kPa

**The testing was performed by Alvin Huang on 2009-01-19 to 2009-01-20.*

Test Result: Compliance.


Please refer to the following table and plots.

Test Mode: Transmitting (BDR)

Frequency (MHz)	Delta Peak to Band Emission (dB)	Limit (dB)
2399.9	37.70	20
2483.6	55.12	20

Note: The point fall into the stricted band was tested in FCC 15.209


Band Edge Left Side

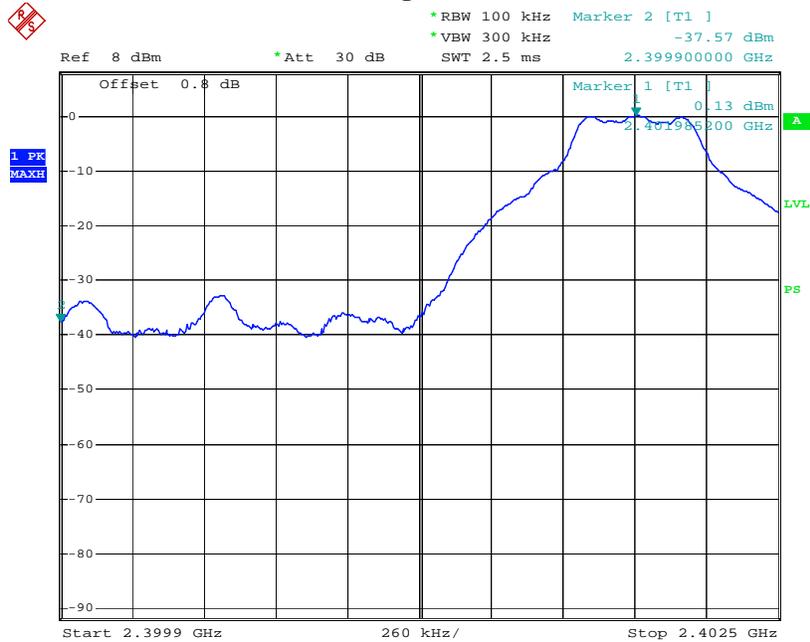

bandedge-left

Date: 19.JAN.2009 20:40:43

Band Edge Right Side

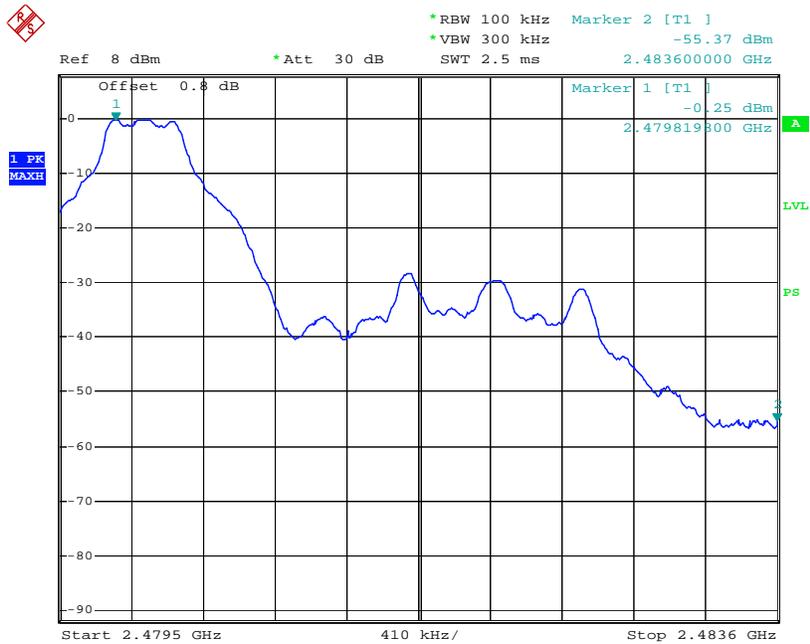

bandedge-right


Date: 19.JAN.2009 20:38:19

Test Mode: Transmitting (EDR)

Frequency (MHz)	Delta Peak to Band Emission (dB)	Limit (dB)
2399.9	45.79	20
2483.6	55.34	20

Note: The point fall into the stricted band was tested in FCC 15.209


Band Edge Left Side

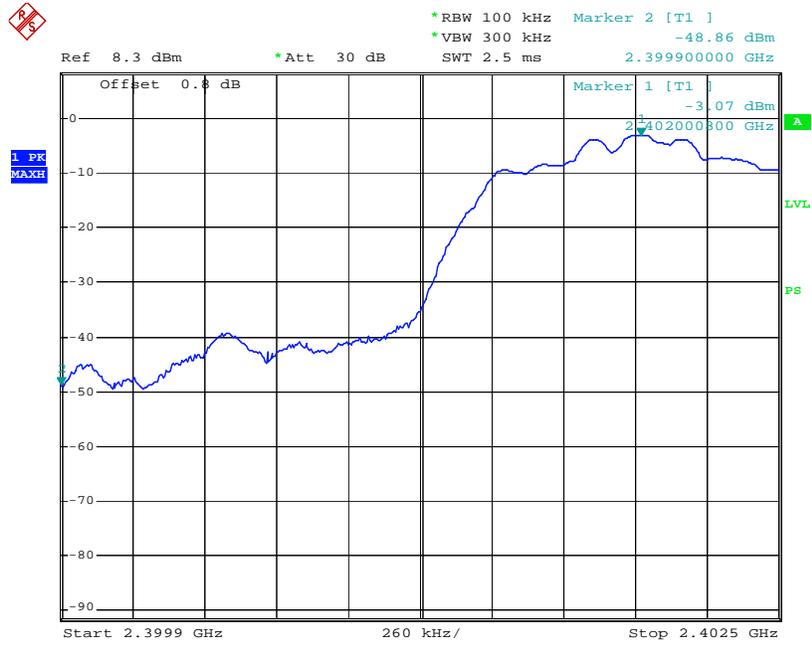

bandedge-left

Date: 20.JAN.2009 17:36:14

Band Edge Right Side

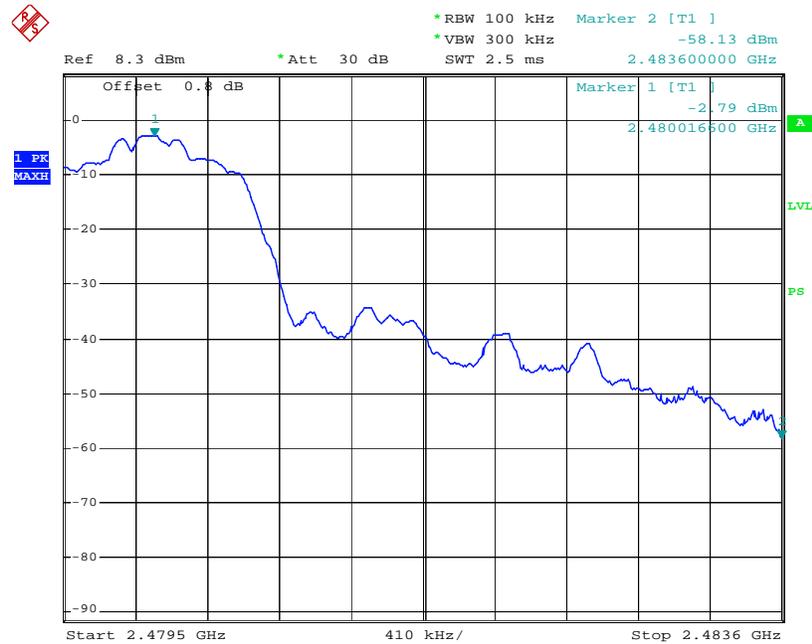

bandedge-right

Date: 20.JAN.2009 17:37:54

***** END OF REPORT *****