

FCC PART 15.247  
TEST REPORT

For

**Avantronics Limited**

The 4th Floor, Yuepeng Building, No.1019 Jiabin Rd, Luohu District, Shenzhen, China

**FCC ID: WJ5-TR401**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Hybrid Bluetooth Speaker
<b>Test Engineer:</b> Gardon Zhang	<i>Gardon Zhang</i>
<b>Report Number:</b> RSZ120803002-00B	
<b>Report Date:</b> 2012-08-31	
<b>Reviewed By:</b> Alvin Huang RF Leader	<i>Alvin Huang</i>
<b>Test Laboratory:</b> Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>	

**Note:** This test report is prepared for the customer shown above and for the equipment described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP\*, or any agency of the Federal Government.

\* This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "★"

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....4**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....4

    OBJECTIVE .....4

    RELATED SUBMITTAL(S)/GRANT(S).....4

    TEST METHODOLOGY .....4

    TEST FACILITY .....5

**SYSTEM TEST CONFIGURATION.....6**

    DESCRIPTION OF TEST CONFIGURATION .....6

    EUT EXERCISE SOFTWARE .....6

    EQUIPMENT MODIFICATIONS .....6

    SUPPORT EQUIPMENT LIST AND DETAILS .....6

    EXTERNAL I/O CABLE.....6

    CONFIGURATION OF TEST SETUP .....7

    BLOCK DIAGRAM OF TEST SETUP .....7

**SUMMARY OF TEST RESULTS .....8**

**FCC §15.247 (i) & §2.1093 – RF EXPOSURE EVALUATION .....9**

    STANDARD APPLICABLE .....9

**FCC §15.203 – ANTENNA REQUIREMENT .....10**

    APPLICABLE STANDARD .....10

    ANTENNA CONNECTOR CONSTRUCTION .....10

**FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....11**

    APPLICABLE STANDARD .....11

    MEASUREMENT UNCERTAINTY .....11

    EUT SETUP .....11

    EMI TEST RECEIVER SETUP .....12

    TEST EQUIPMENT LIST AND DETAILS .....12

    TEST PROCEDURE .....12

    TEST RESULTS SUMMARY .....13

    TEST DATA .....13

**FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS .....16**

    APPLICABLE STANDARD .....16

    MEASUREMENT UNCERTAINTY .....16

    EUT SETUP .....16

    EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....17

    TEST PROCEDURE .....17

    CORRECTED AMPLITUDE & MARGIN CALCULATION .....17

    TEST EQUIPMENT LIST AND DETAILS .....18

    TEST RESULTS SUMMARY .....18

    TEST DATA .....18

**FCC §15.247(a) (1)-CHANNEL SEPARATION TEST .....21**

    APPLICABLE STANDARD .....21

    TEST PROCEDURE .....21

    TEST EQUIPMENT LIST AND DETAILS .....21

    TEST DATA .....21

**FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING .....28**

APPLICABLE STANDARD .....28  
TEST PROCEDURE .....28  
TEST EQUIPMENT LIST AND DETAILS.....28  
TEST DATA .....28

**FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST .....34**  
APPLICABLE STANDARD .....34  
TEST PROCEDURE .....34  
TEST EQUIPMENT LIST AND DETAILS.....34  
TEST DATA .....34

**FCC §15.247(a) (1) (iii) -TIME OF OCCUPANCY (DWELL TIME).....37**  
APPLICABLE STANDARD .....37  
TEST PROCEDURE .....37  
TEST EQUIPMENT LIST AND DETAILS.....37  
TEST DATA .....37

**FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT .....53**  
APPLICABLE STANDARD .....53  
TEST PROCEDURE .....53  
TEST EQUIPMENT LIST AND DETAILS.....53  
TEST DATA .....53

**FCC §15.247(d) - BAND EDGES TESTING .....59**  
APPLICABLE STANDARD .....59  
TEST PROCEDURE .....59  
TEST EQUIPMENT LIST AND DETAILS.....59  
TEST DATA .....60

---

## GENERAL INFORMATION

---

### Product Description for Equipment under Test (EUT)

The *Avantronics Limited's* product, model number: *BTSP-TR401* (FCC ID: *WJ5-TR401*) or the "EUT" in this report was a *Hybrid Bluetooth Speaker*, which was measured approximately: 4.5 cm (L) x 4.5 cm (W) x 5.3 cm (H), rated input voltage: DC 5 V from USB Port.

*\* All measurement and test data in this report was gathered from production sample serial number: 1208010 (Assigned by Shenzhen BACL). The EUT was received on 2012-08-03.*

### Objective

This test report is prepared on behalf of *Avantronics Limited* in accordance with Part 2-Subpart J, Part 15-Subparts A, B and C of the Federal Communication Commissions rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

No related submission(s)

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2009, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F, the 3<sup>rd</sup> Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on December 06, 2010. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2009.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is an ISO/IEC 17025 accredited laboratory, and is accredited by National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at <http://ts.nist.gov/Standards/scopes/2007070.htm>

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a testing mode.

### EUT Exercise Software

Broadcom Bluetooth Version 1.4.4.9

### Equipment Modifications

No modification was made to the EUT tested.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
DELL	Host PC	DCSCSF	127BP2X
DELL	LCD monitor	D600	85RF831
DELL	Mouse	MOC5UO	G1B0096D
DELL	Keyboard	L100	CNORH656658907BL04TY
SAST	Modem	AEM-2100	0293


### External I/O Cable

Cable Description	Length (m)	From/Port	To
Shielded Detachable USB Keyboard Cable	1.5	Keyboard Port/Host	Keyboard
Shielded Detachable USB Cable	1.5	Mouse Port/Host	Mouse
Shielded Detachable Serial Cable	1.5	Serial Port/Host	Modem
Shielded Detachable VGA Cable	1.5	VGA Port/Host	LCD Monitor
Shielded Detachable USB Cable	1.0	EUT	Host PC

### Configuration of Test Setup

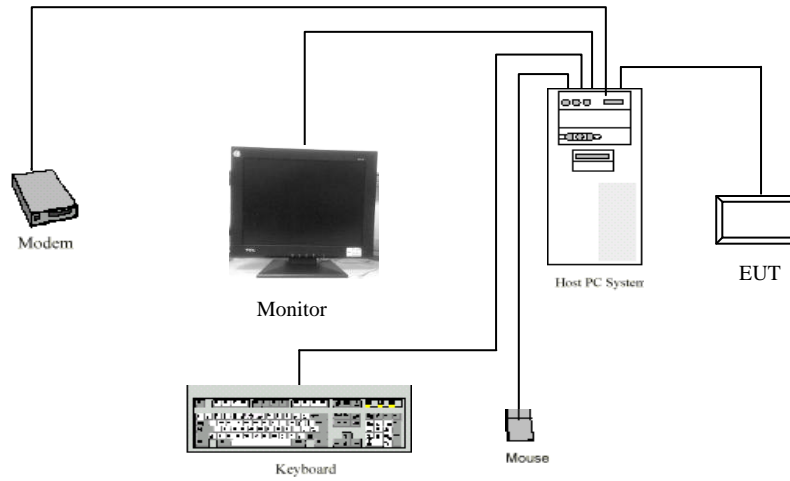

### Block Diagram of Test Setup

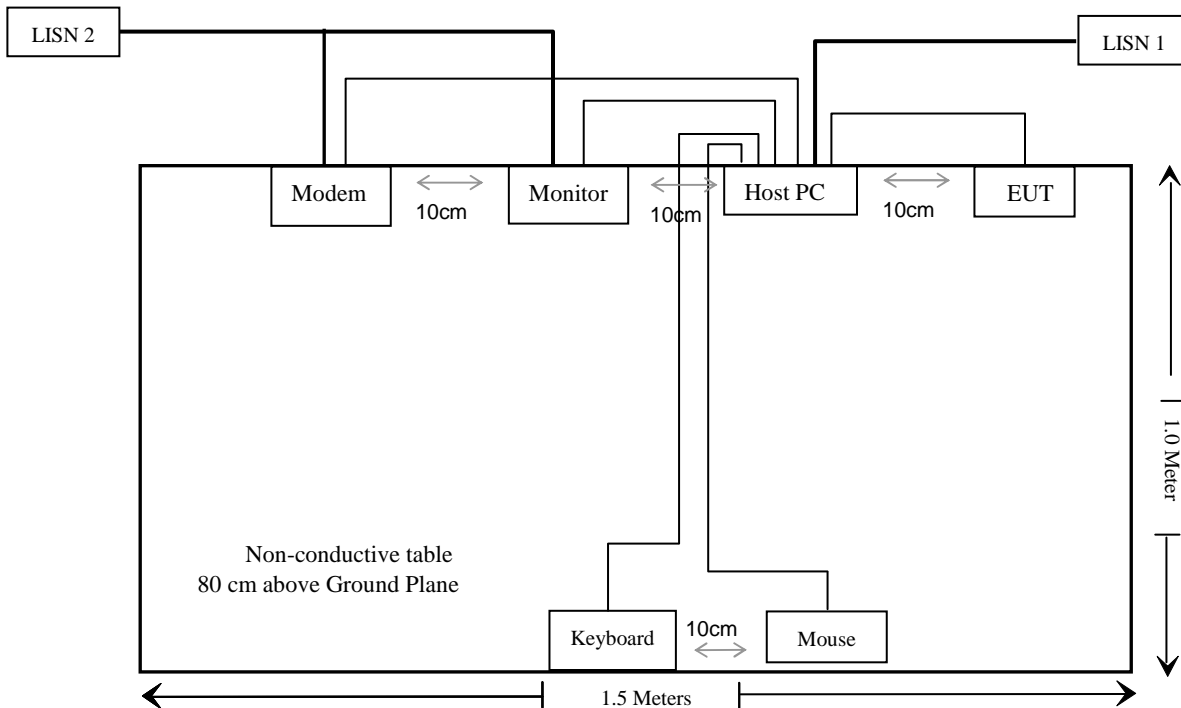

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Result</b>
§15.247 (i), §2.1093	RF Exposure Info	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliance
§15.247(a)(1)	20 dB Emission Bandwidth	Compliance
§15.247(a)(1)	Channel Separation Test	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliance
§15.247(b)(1)	Peak Output Power Measurement	Compliance
§15.247(d)	Band edges	Compliance



---

**FCC §15.247 (i) & §2.1093 – RF EXPOSURE EVALUATION**

---

**Standard Applicable**

FCC §15.247 (i) and §2.1093.

According to KDB 447498 1) c), portable device with output power  $>60/f_{\text{GHz}}$  mW shall include SAR data for equipment approval.

**Evaluation Result**

Peak Conducted Output Power: -1.68 dBm (0.68mw);

Antenna Gain: 0 dBi;

E.I.R.P: -1.68dBm (0.68mw)

SAR threshold:  $60/f_{\text{GHz}} = 60/2.402 = 24.98$  mW

The EUT is a portable device; the maximum output power is less than FCC SAR threshold. SAR evaluation is not required.

---

## **FCC §15.203 – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### **Antenna Connector Construction**

The EUT used one fixed PCB antenna, which in accordance to section 15.203, the maximum gain is 0 dBi; please refer to the internal photos

**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard


FCC §15.207

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratory Corp. (Shenzhen) is 2.4 dB (k=2, 95% level of confidence).

### EUT Setup

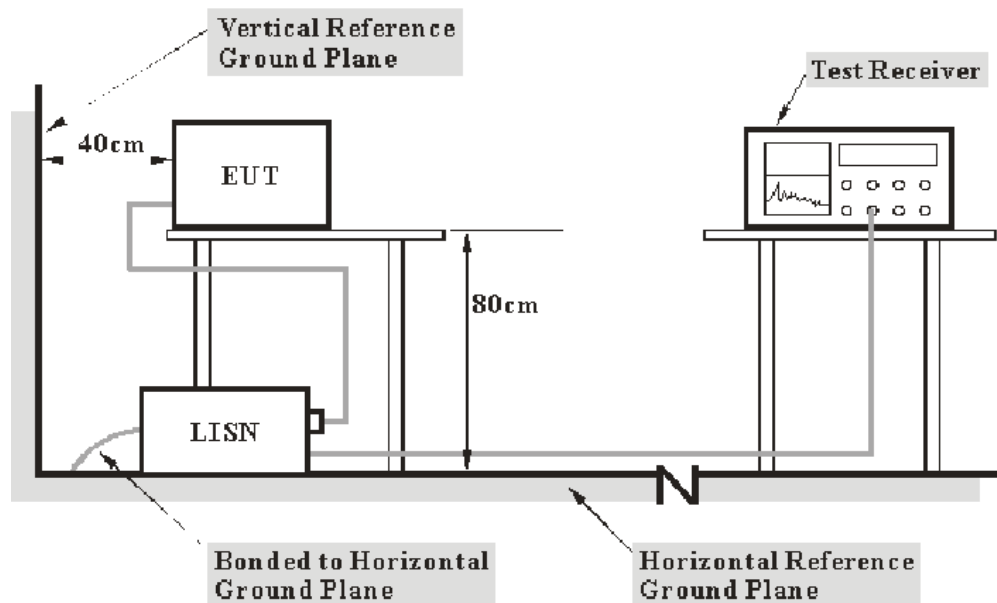

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2009 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm

The host PC was connected to a 120 VAC/60 Hz power source.

## EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u><i>Frequency Range</i></u>	<u><i>IF B/W</i></u>
150 kHz – 30 MHz	9 kHz

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2011-11-24	2012-11-23
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2011-11-17	2012-11-16
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3Z2	DE25985	2012-07-08	2013-07-07
BACL	CE Test software	BACL-CE	V1.0	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratory Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

## Test Procedure

During the conducted emission test, the host PC was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Pulse Limiter Attenuation. The basic equation is as follows:

Correction Factor = LISN VDF + Cable Loss + Pulse Limiter Attenuation

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207, with the worst margin reading of:

**10.84 dB at 0.600 MHz** in the **Line** conducted mode

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100.0 kPa

*The testing was performed by Gardon Zhang on 2012-08-07.*

Test Mode: Charging & Transmitting

AC 120 V, 60 Hz, Line:

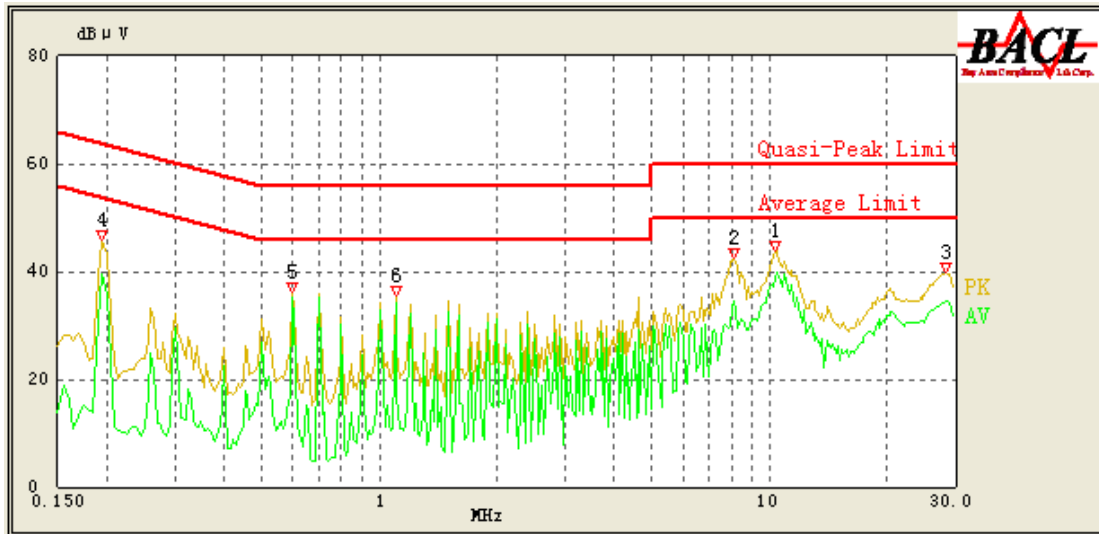

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.600	35.16	10.24	46.00	10.84	Ave.
10.315	38.63	10.54	50.00	11.37	Ave.
1.100	34.30	10.17	46.00	11.70	Ave.
0.195	39.55	10.27	54.71	15.16	Ave.
8.115	34.66	10.42	50.00	15.34	Ave.
28.350	34.52	11.69	50.00	15.48	Ave.
10.320	41.16	10.54	60.00	18.84	QP
0.600	36.12	10.24	56.00	19.88	QP
0.195	44.04	10.27	64.71	20.67	QP
1.100	34.35	10.17	56.00	21.65	QP
8.090	36.55	10.42	60.00	23.45	QP
28.445	36.34	11.68	60.00	23.66	QP

**AC 120V, 60 Hz, Neutral:**



Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.700	32.58	10.21	46.00	13.42	Ave.
1.100	31.43	10.17	46.00	14.57	Ave.
0.195	39.68	10.24	54.71	15.03	Ave.
10.270	34.32	10.53	50.00	15.68	Ave.
28.345	34.15	11.33	50.00	15.85	Ave.
0.195	44.67	10.24	64.71	20.04	QP
8.015	29.43	10.41	50.00	20.57	Ave.
10.320	37.35	10.54	60.00	22.65	QP
0.700	33.13	10.21	56.00	22.87	QP
28.345	36.38	11.33	60.00	23.62	QP
1.105	31.48	10.17	56.00	24.52	QP
8.005	34.83	10.41	60.00	25.17	QP

Note:

- 1) Corrected Amplitude = Reading + Correction Factor
- 2) Correction Factor = LISN VDF + Cable Loss + Pulse Limiter Attenuation  
The corrected factor has been input into the transducer of the test software.
- 3) Margin = Limit – Corrected Amplitude

## FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

### Applicable Standard

FCC §15.205; §15.209; §15.247(d)


### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on CISPR 16-4-4, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is 4.0 dB. (k=2, 95% level of confidence).

### EUT Setup

#### Below 1 GHz:

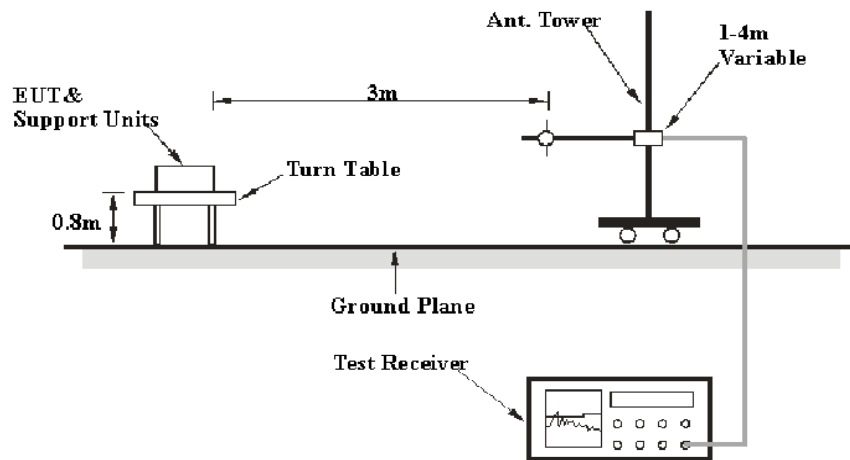

#### Above 1 GHz:

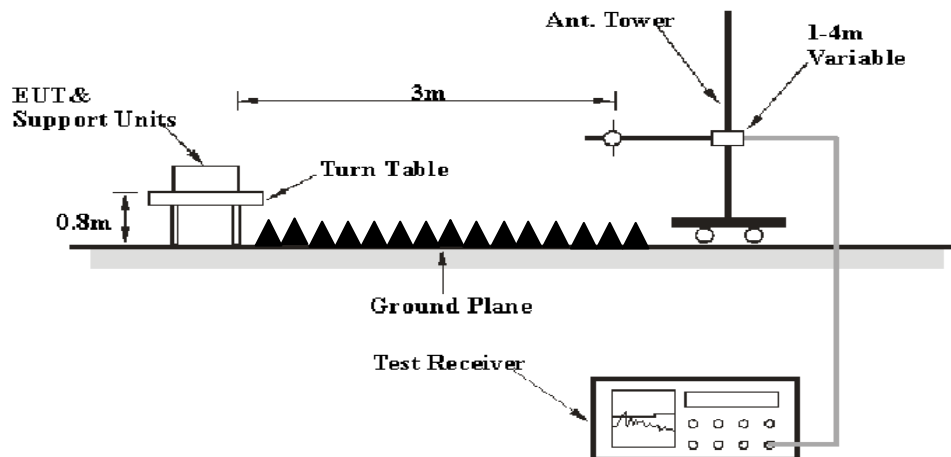



The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.4-2009. The specification used was the FCC 15.209 and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

### EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

<i>Frequency Range</i>	<i>RBW</i>	<i>Video B/W</i>	<i>Detector</i>
30 MHz – 1000 MHz	120 kHz	300 kHz	QP
1000 MHz – 25 GHz	1 MHz	3 MHz	PK
1000 MHz – 25 GHz	1 MHz	10 Hz	Ave.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
HP	Amplifier	8447E	1937A01057	2011-11-24	2012-11-23
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2011-11-28	2012-11-27
Mini-Circuits	Amplifier	ZVA-213+	N/A	2011-11-24	2012-11-23
Sunol Sciences	Horn Antenna	DRH-118	A052304	2011-12-01	2012-11-30
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2011-11-24	2012-11-23
Agilent	Spectrum Analyzer	8564E	3943A01781	2012-05-17	2013-05-16
the electro-Mechanics Co.	Horn Antenna	3116	9510-2270	2011-10-14	2012-10-13
R&S	Auto test Software	EMC32	V6.30	N/A	N/A

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

## Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247, with the worst margin reading of:

**1.64 dB at 4960.0 MHz in the Vertical polarization**

## Test Data

### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa

*The testing was performed by Gardon Zhang on 2012-08-20.*

Test mode: Transmitting (Scan with GFSK,  $\pi/4$ -DQPSK, 8-DPSK, the worst case is BDR Mode (GFSK))

**30 MHz ~25 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC PART 15.247	
	Reading (dB $\mu$ V/m)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
Low Channel(2402 MHz)									
2402.0	88.96	PK	43	1.2	H	6.13	95.09	/	/
2402.0	68.37	Ave.	43	1.2	H	6.13	74.50	/	/
2402.0	81.37	PK	74	1.2	V	6.13	87.50	/	/
2402.0	61.46	Ave.	74	1.2	V	6.13	67.59	/	/
4804.0	37.14	Ave.	83	1.3	V	12.40	49.54	54	4.46
4804.0	56.52	PK	83	1.3	V	12.40	68.92	74	5.08
9608.0	17.58	Ave.	11	1.2	H	19.28	36.86	54	17.14
7206.0	17.26	Ave.	43	1.1	V	17.06	34.32	54	19.68
9608.0	33.91	PK	11	1.2	H	19.28	53.19	74	20.81
368.7	35.84	QP	43	1.2	H	-10.72	25.12	46	20.88
7206.0	33.64	PK	43	1.1	V	17.06	50.70	74	23.30
2484.7	23.61	Ave.	38	1.2	V	6.81	30.42	54	23.58
2362.5	20.69	Ave.	13	1.2	V	5.48	26.17	54	27.83
2331.3	20.33	Ave.	112	1.1	H	5.48	25.81	54	28.19
2484.7	38.74	PK	38	1.2	V	6.81	45.55	74	28.45
2362.5	33.67	PK	13	1.2	V	5.48	39.15	74	34.85
2331.3	32.79	PK	112	1.1	H	5.48	38.27	74	35.73
Middle Channel(2441 MHz)									
2441.0	87.69	PK	123	1.2	H	7.21	94.90	/	/
2441.0	67.55	Ave.	123	1.2	H	7.21	74.76	/	/
2441.0	80.28	PK	242	1.3	V	6.81	87.09	/	/
2441.0	60.37	Ave.	242	1.3	V	6.81	67.18	/	/
4882.0	37.62	Ave.	13	1.3	V	12.46	50.08	54	3.92*
4882.0	57.22	PK	13	1.3	V	12.46	69.68	74	4.32
9764.0	17.06	Ave.	81	1.2	H	19.40	36.46	54	17.54
712.6	30.78	QP	78	1.1	H	-2.93	27.85	46	18.15
7323.0	17.16	Ave.	37	1.2	V	16.49	33.65	54	20.35
9764.0	33.67	PK	81	1.2	H	19.40	53.07	74	20.93
2485.6	24.18	Ave.	63	1.2	V	6.81	30.99	54	23.01
7323.0	33.28	PK	37	1.2	V	16.49	49.77	74	24.23
2337.1	21.08	Ave.	37	1.3	H	5.48	26.56	54	27.44
2367.5	20.88	Ave.	41	1.2	V	5.48	26.36	54	27.64
2485.6	38.97	PK	63	1.2	V	6.81	45.78	74	28.22
2367.5	34.29	PK	41	1.2	V	5.48	39.77	74	34.23
2337.1	33.96	PK	37	1.3	H	5.48	39.44	74	34.56

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB)	Corrected Amplitude (dBuV/m)	FCC PART 15.247	
	Reading (dBμV/m)	Detector (PK/QP/Ave.)		Height (m)	Polar (H/V)			Limit (dBuV/m)	Margin (dB)
High Channel(2480 MHz)									
2480.0	87.77	PK	37	1.1	H	7.21	94.98	/	/
2480.0	67.65	Ave.	37	1.1	H	7.21	74.86	/	/
2480.0	81.23	PK	224	1.2	V	6.81	88.04	/	/
2480.0	61.19	Ave.	224	1.2	V	6.81	68.00	/	/
4960.0	59.86	PK	142	1.2	V	12.50	72.36	74	1.64*
4960.0	39.71	Ave.	142	1.2	V	12.50	52.21	54	1.79*
9920.0	18.07	Ave.	37	1.3	H	19.38	37.45	54	16.55
794.2	30.06	QP	223	1.2	H	-1.92	28.14	46	17.86
7440.0	18.22	Ave.	103	1.1	V	15.90	34.12	54	19.88
9920.0	33.91	PK	37	1.3	H	19.38	53.29	74	20.71
7440.0	33.69	PK	103	1.1	V	15.90	49.59	74	24.41
2487.1	22.67	Ave.	35	1.2	V	6.81	29.48	54	24.52
2332.7	21.06	Ave.	74	1.1	H	5.48	26.54	54	27.46
2366.6	20.99	Ave.	66	1.2	V	5.48	26.47	54	27.53
2487.1	37.25	PK	35	1.2	V	6.81	44.06	74	29.94
2332.7	33.38	PK	74	1.1	H	5.48	38.86	74	35.14
2366.6	33.28	PK	66	1.2	V	5.48	38.76	74	35.24

## Note:

- 1) Corrected Amplitude = Corrected Factor + Reading
- 2) Corrected Factor=Antenna factor (RX) + cable loss – amplifier factor
- 3) Margin = Limit - Corrected Amplitude
- 4) \*Within measurement uncertainty!

## FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

### Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Set the EUT in transmitting mode, RBW of spectrum was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace
3. Measure the channel separation.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa

\* The testing was performed by Gardon Zhang on 2012-08-21.


*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	≥Limit (MHz)	Result
<b>BDR (GFSK)</b>	Low	2402	1.000	0.675	Pass
	Adjacent	2403			
	Middle	2441	1.000	0.675	Pass
	Adjacent	2440			
	High	2480	1.000	0.675	Pass
	Adjacent	2479			
<b>EDR (π/4-DQPSK)</b>	Low	2402	1.002	0.851	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.851	Pass
	Adjacent	2440			
	High	2480	1.002	0.851	Pass
	Adjacent	2479			
<b>EDR (8DPSK)</b>	Low	2402	1.002	0.837	Pass
	Adjacent	2403			
	Middle	2441	1.002	0.837	Pass
	Adjacent	2440			
	High	2480	1.002	0.837	Pass
	Adjacent	2479			

Note: Limit = 20 dB bandwidth \*2/3


### BDR (GFSK): Low Channel

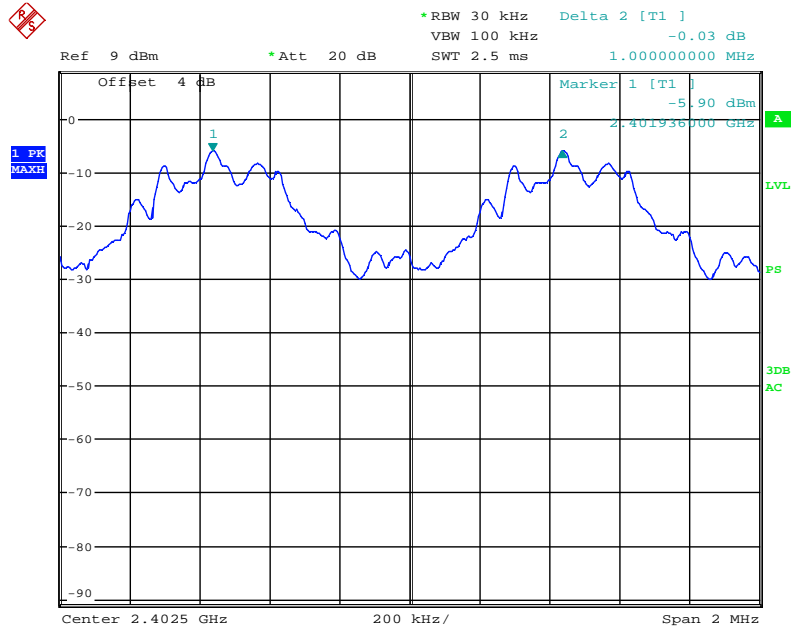


### BDR (GFSK): Middle Channel

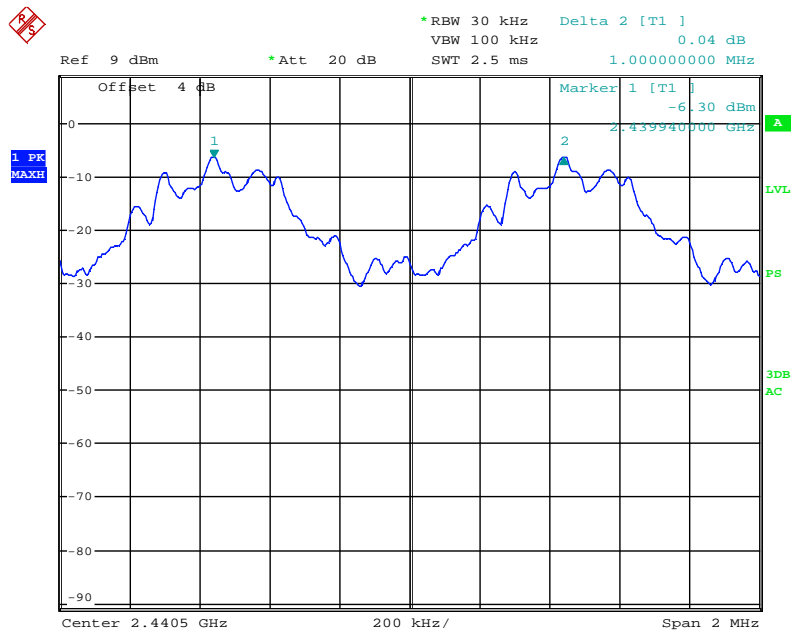

### BDR (GFSK): High Channel

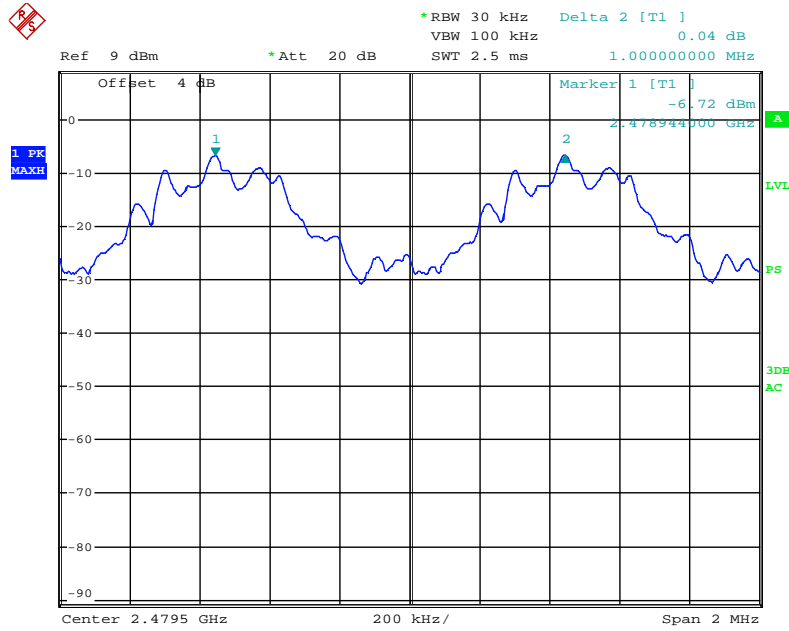


### EDR ( $\pi/4$ -DQPSK): Low Channel

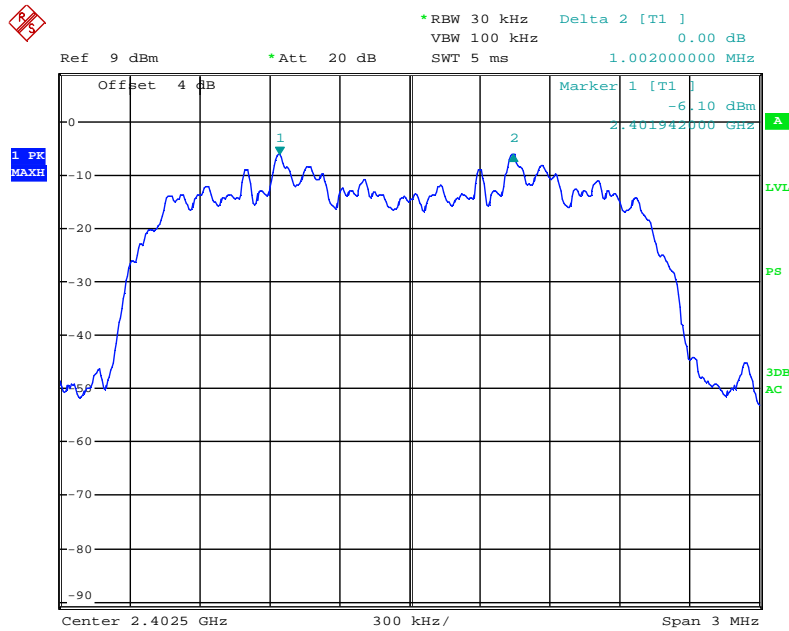





### EDR ( $\pi/4$ -DQPSK): Middle Channel

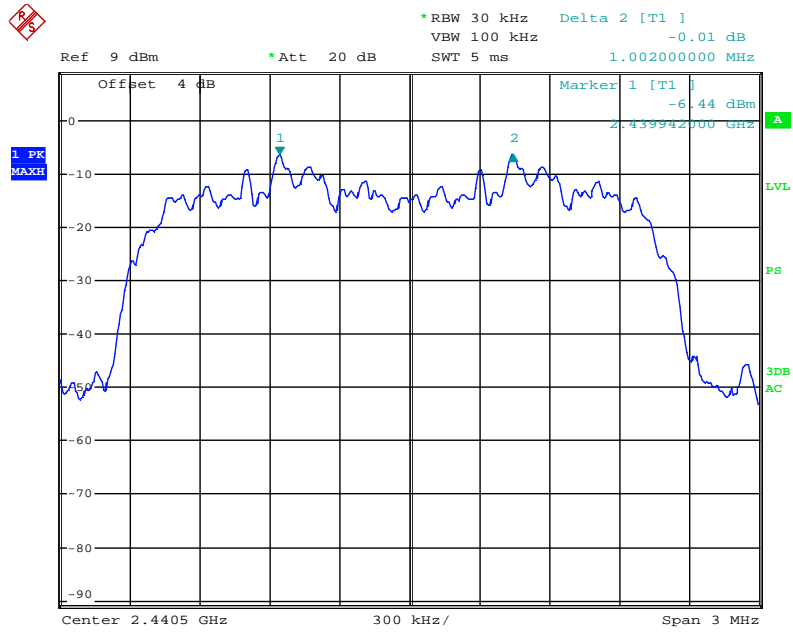


### EDR ( $\pi/4$ -DQPSK): High Channel

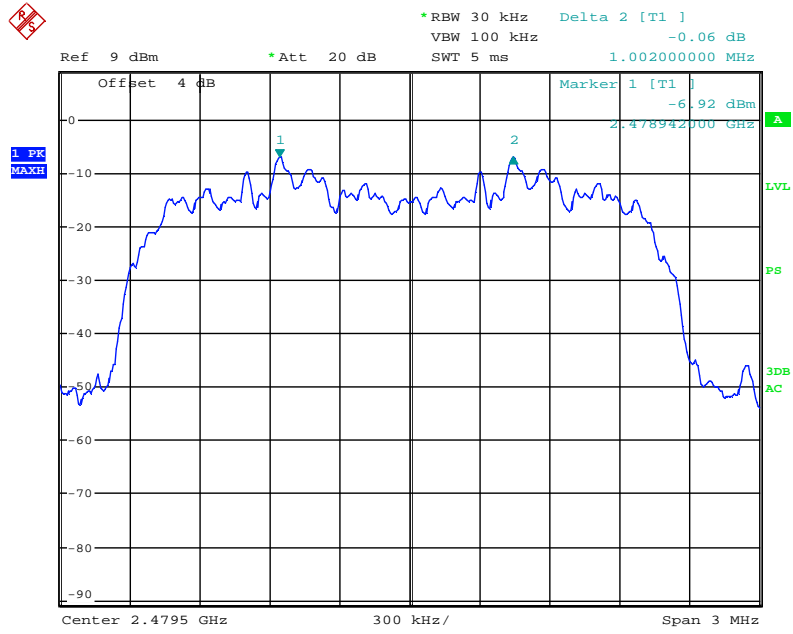


### EDR (8DPSK): Low Channel

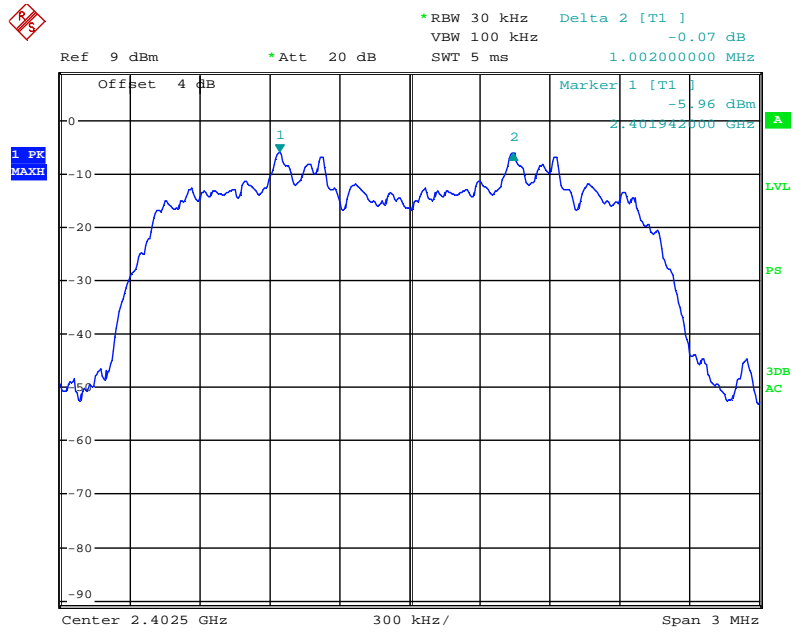

### EDR (8DPSK): Middle Channel

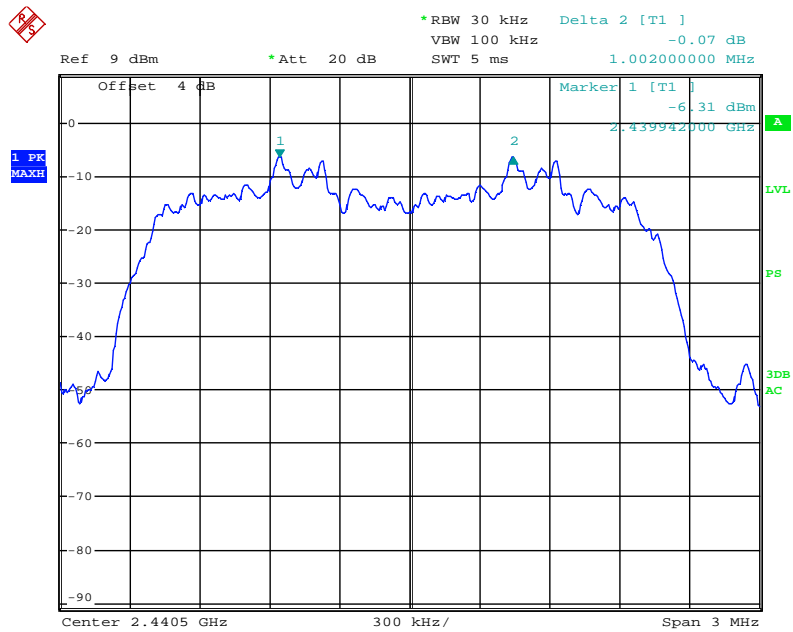

### EDR (8DPSK): High Channel

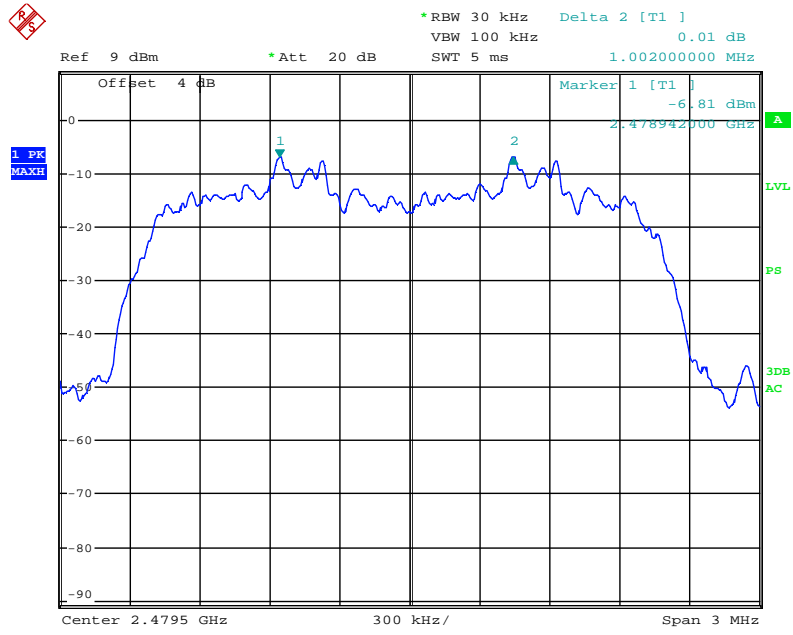

## FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH TESTING

### Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa


\* *The testing was performed by Gardon Zhang on 2012-08-21.*

*Test Mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
<b>BDR (GFSK)</b>	Low	2402	1.012
	Middle	2441	1.012
	High	2480	1.012
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Low	2402	1.276
	Middle	2441	1.276
	High	2480	1.276
<b>EDR (8DPSK)</b>	Low	2402	1.256
	Middle	2441	1.256
	High	2480	1.256


**BDR (GFSK): Low Channel**

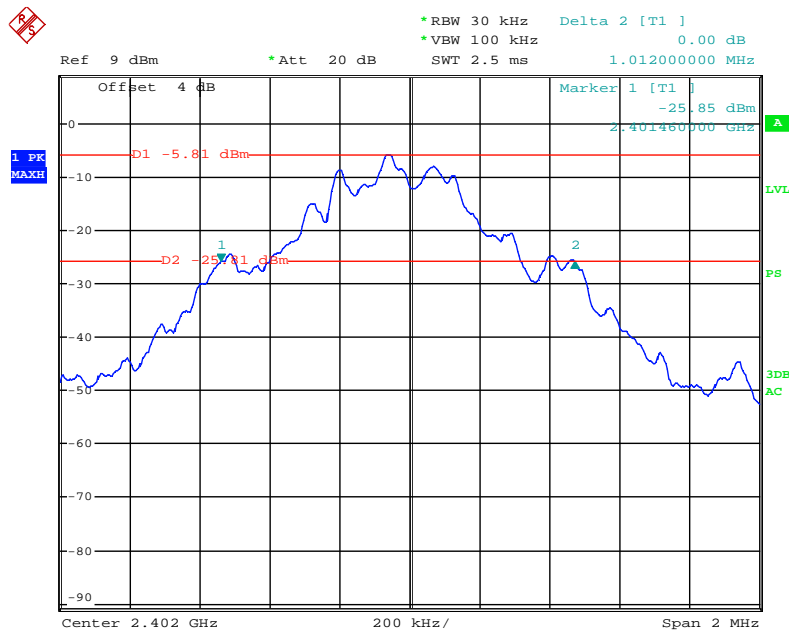


### BDR (GFSK): Middle Channel

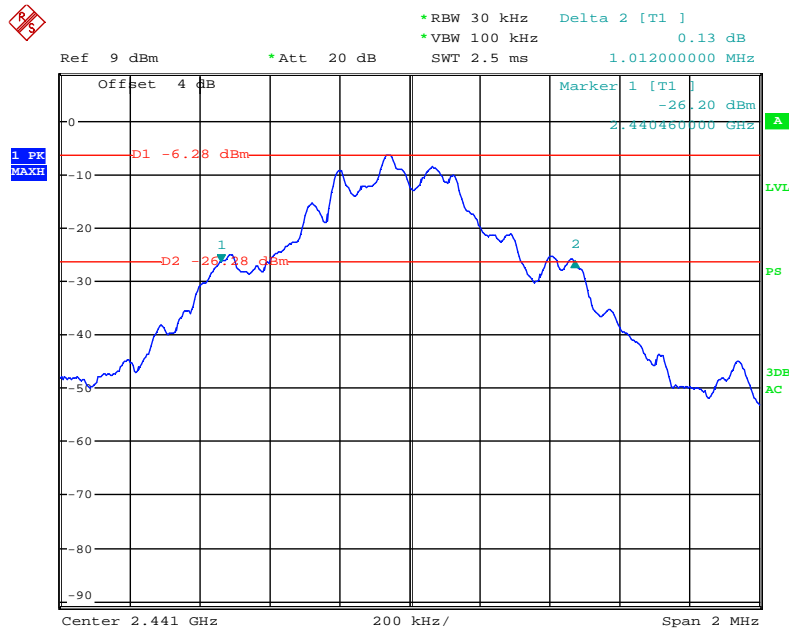


### BDR (GFSK): High Channel

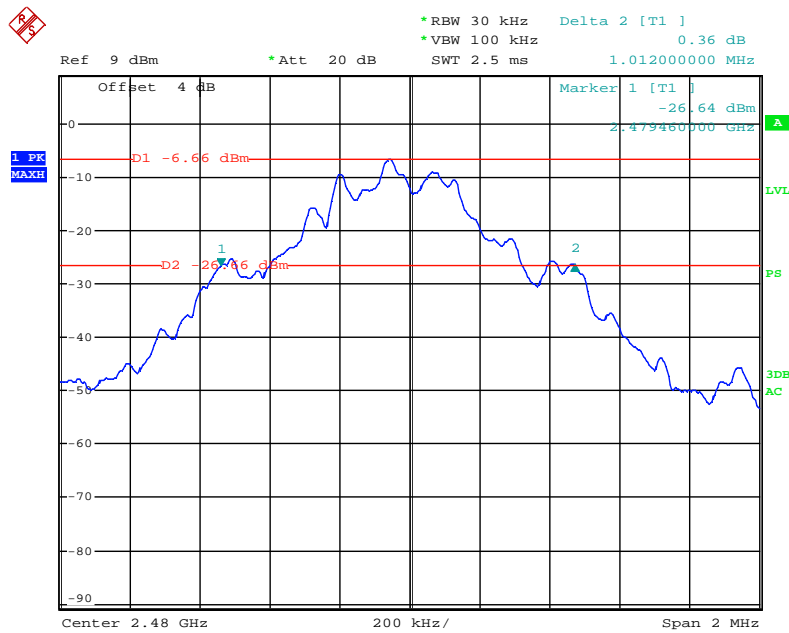


### EDR ( $\pi/4$ -DQPSK): Low Channel

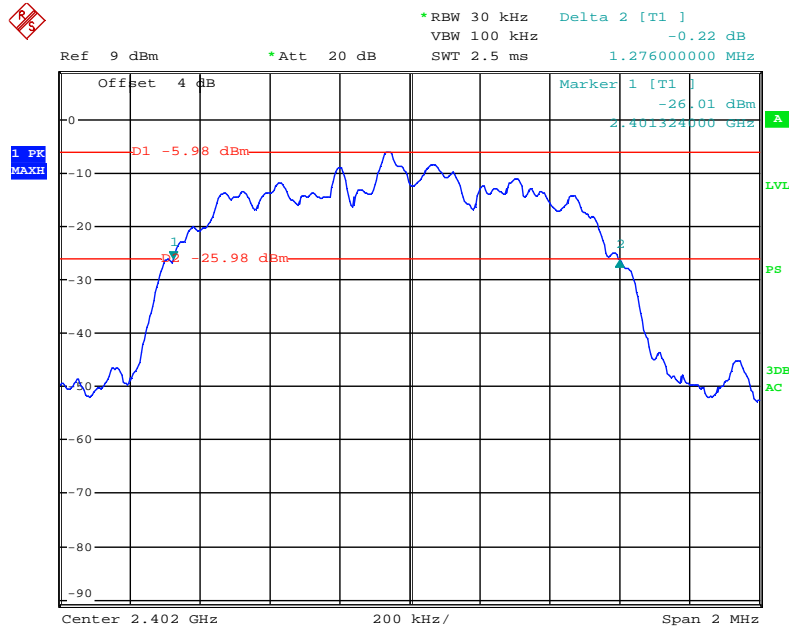


### EDR ( $\pi/4$ -DQPSK): Middle Channel

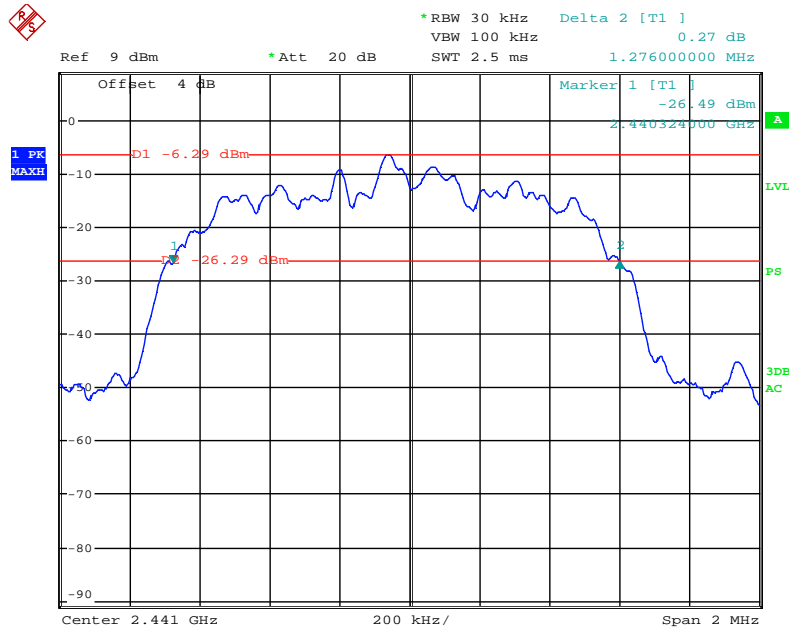

### EDR ( $\pi/4$ -DQPSK): High Channel

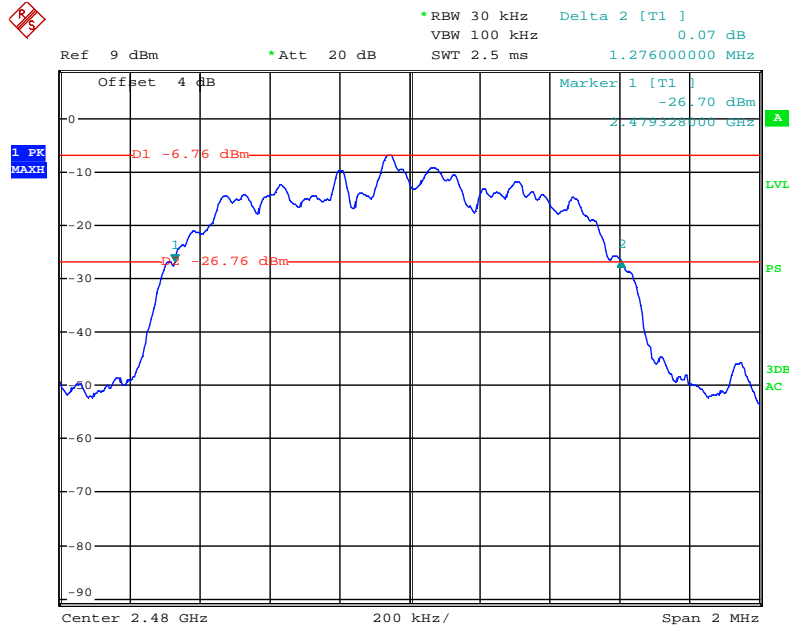


### EDR (8DPSK): Low Channel

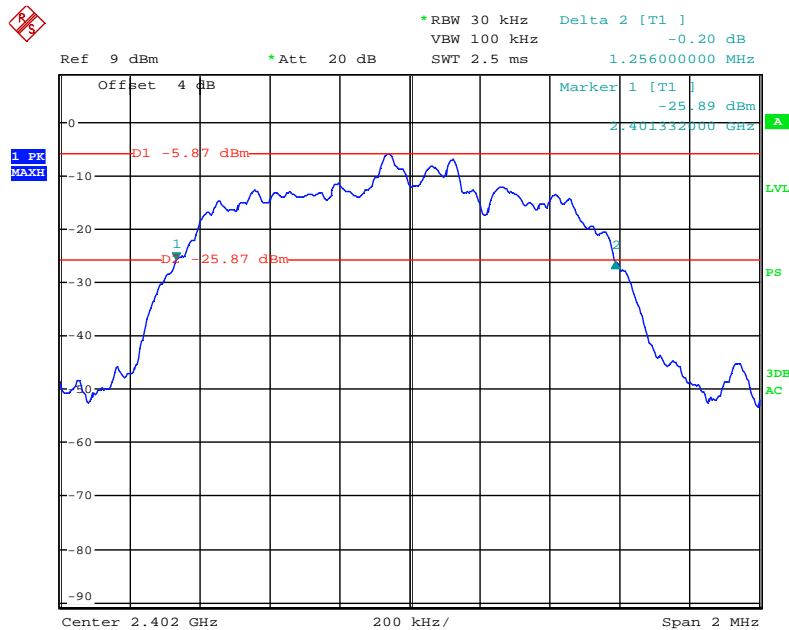




### EDR (8DPSK): Middle Channel

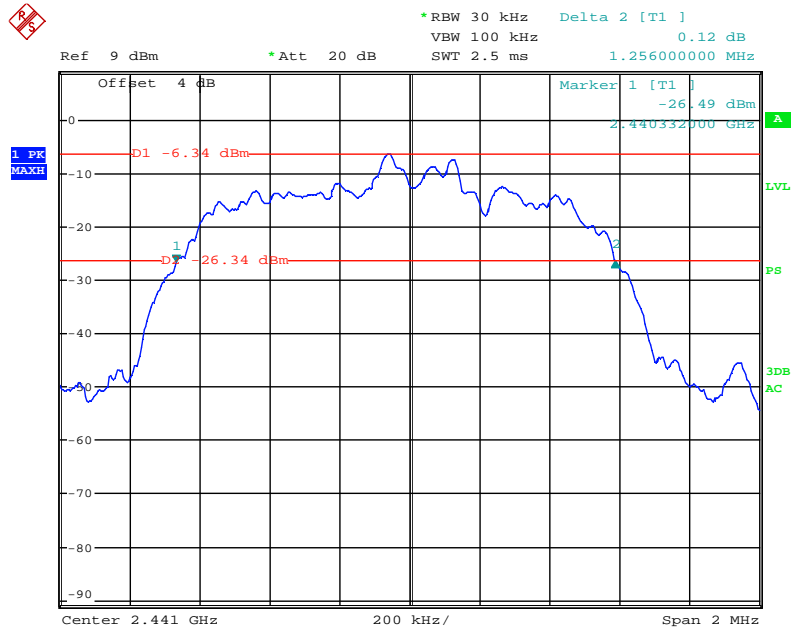

### EDR (8DPSK): High Channel

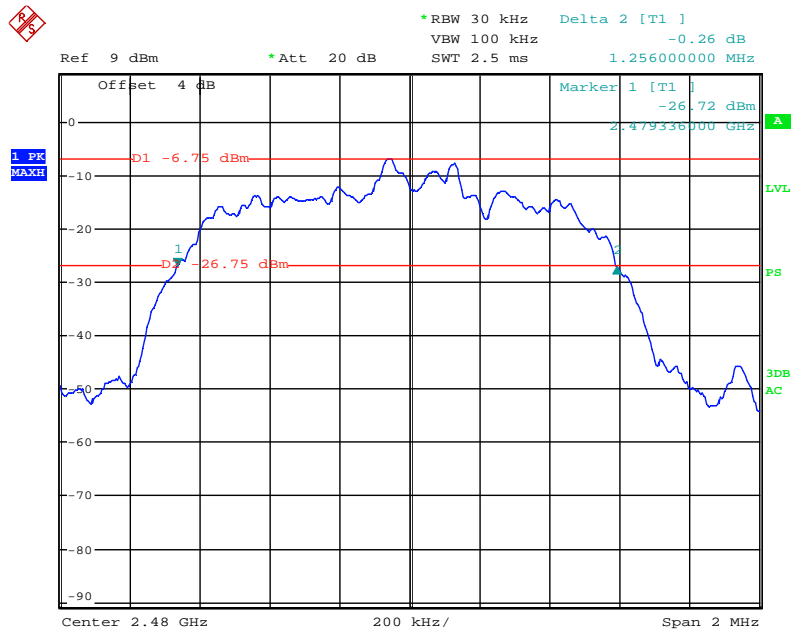

## FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

### Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa


*The testing was performed by Gardon Zhang on 2012-08-21.*

*Test Mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2402-2480	79	≥15
EDR (π/4-DQPSK)	2402-2480	79	≥15
EDR (8DPSK)	2402-2480	79	≥15


**BDR (GFSK): Number of Hopping Channels**

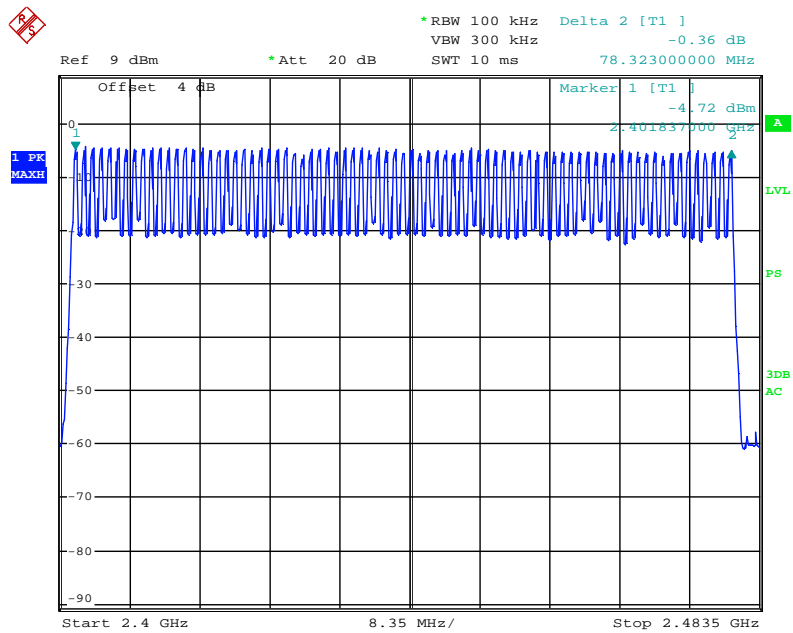

### EDR ( $\pi/4$ -DQPSK): Number of Hopping Channels

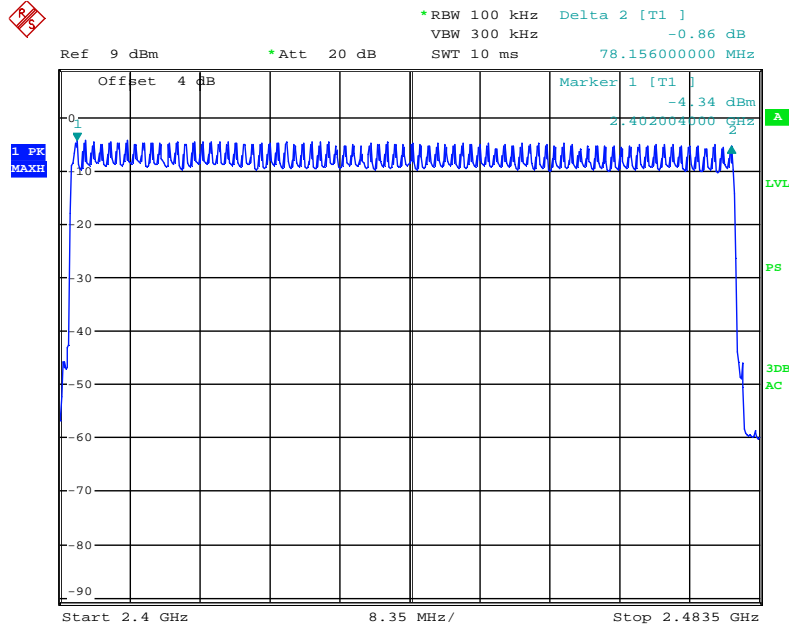

### (8DPSK): Number of Hopping Channels

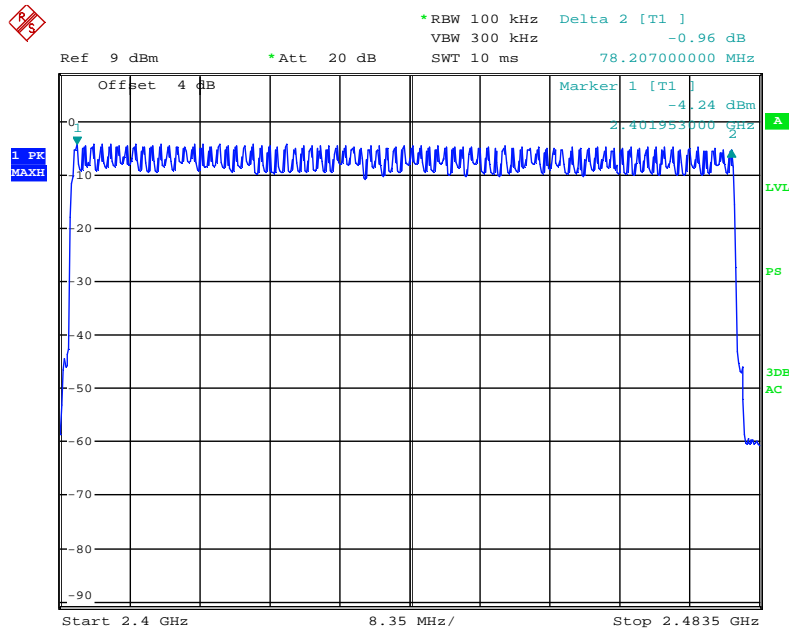

## **FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**

### **Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

### **Test Procedure**

The EUT was worked in channel hopping; Spectrum SPAN was set as 0. Sweep was set as 0.4 X channel no. (s), the quantity of pulse was get from single sweep. In addition, the time of single pulses was tested.

Dwell time = Pulse time\*hop rate/number of hopping channels\*31.6S  
Hop rate=1600/S

### **Test Equipment List and Details**

<b>Manufacturer</b>	<b>Description</b>	<b>Model</b>	<b>Serial Number</b>	<b>Calibration Date</b>	<b>Calibration Due Date</b>
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa

*The testing was performed by Gardon Zhang on 2012-08-10 and 2012-08-21.*


*Test Mode: Transmitting*

*Test Result: Compliance. Please refer to following tables and plots*


Mode		Channel	Pulse Width (ms)	Dwell Time (S)	Limit (S)	Result
<b>BDR (GFSK)</b>	<b>DH 1</b>	Low	0.4078	0.1305	0.4	Pass
		Middle	0.4078	0.1305	0.4	Pass
		High	0.4078	0.1305	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	<b>DH 3</b>	Low	1.6881	0.2701	0.4	Pass
		Middle	1.6881	0.2701	0.4	Pass
		High	1.6881	0.2701	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	<b>DH 5</b>	Low	2.9301	0.3125	0.4	Pass
		Middle	2.9301	0.3125	0.4	Pass
		High	2.9301	0.3125	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
	<b>EDR (π/4-DQPSK)</b>	<b>DH 1</b>	Low	0.4147	0.1327	0.4
Middle			0.4147	0.1327	0.4	Pass
High			0.4147	0.1327	0.4	Pass
Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S						
<b>DH 3</b>		Low	1.6859	0.2697	0.4	Pass
		Middle	1.6859	0.2697	0.4	Pass
		High	1.6859	0.2697	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
<b>DH 5</b>		Low	2.9430	0.3139	0.4	Pass
		Middle	2.9430	0.3139	0.4	Pass
		High	2.9430	0.3139	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
<b>EDR (8DPSK)</b>		<b>DH 1</b>	Low	0.4158	0.1331	0.4
	Middle		0.4158	0.1331	0.4	Pass
	High		0.4158	0.1331	0.4	Pass
	Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S					
	<b>DH 3</b>	Low	1.6870	0.2699	0.4	Pass
		Middle	1.6870	0.2699	0.4	Pass
		High	1.6870	0.2699	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	<b>DH 5</b>	Low	2.9380	0.3134	0.4	Pass
		Middle	2.9380	0.3134	0.4	Pass
		High	2.9380	0.3134	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				

**BDR (GFSK):**


**Pulse time, Low Channel, DH1**

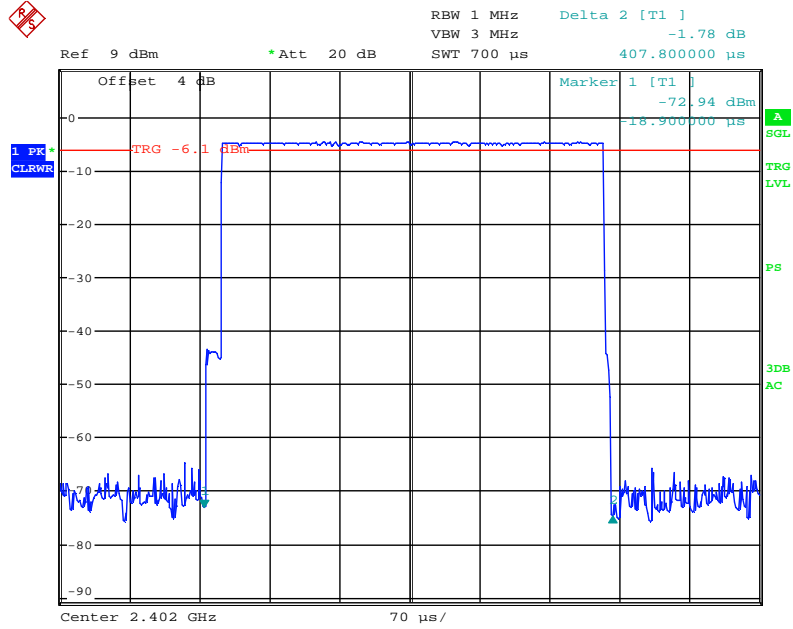


**Pulse time, Middle Channel, DH1**

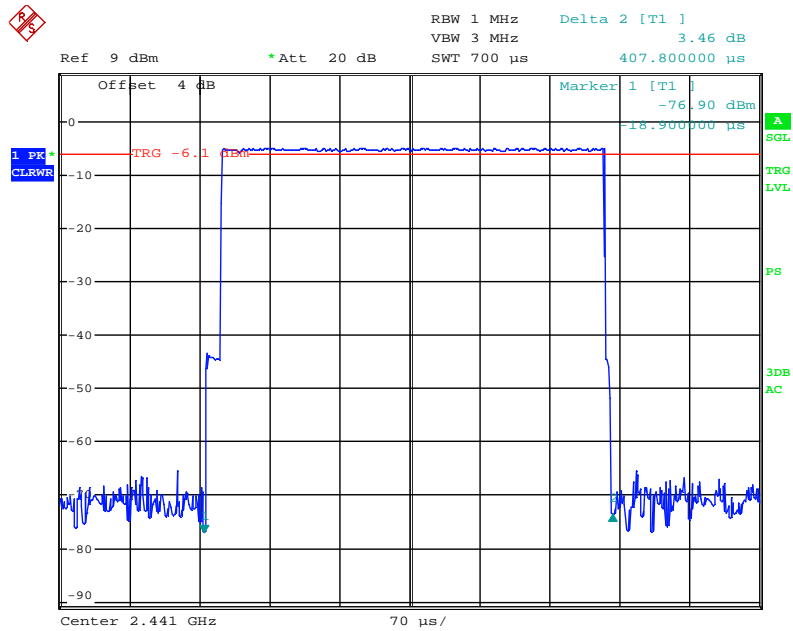

### Pulse time, High Channel, DH1

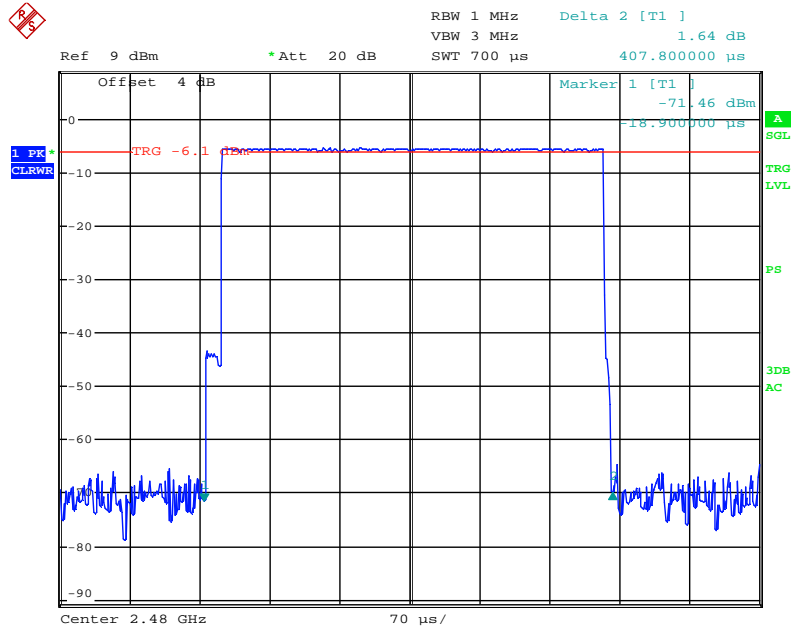


### Pulse time, Low Channel, DH3

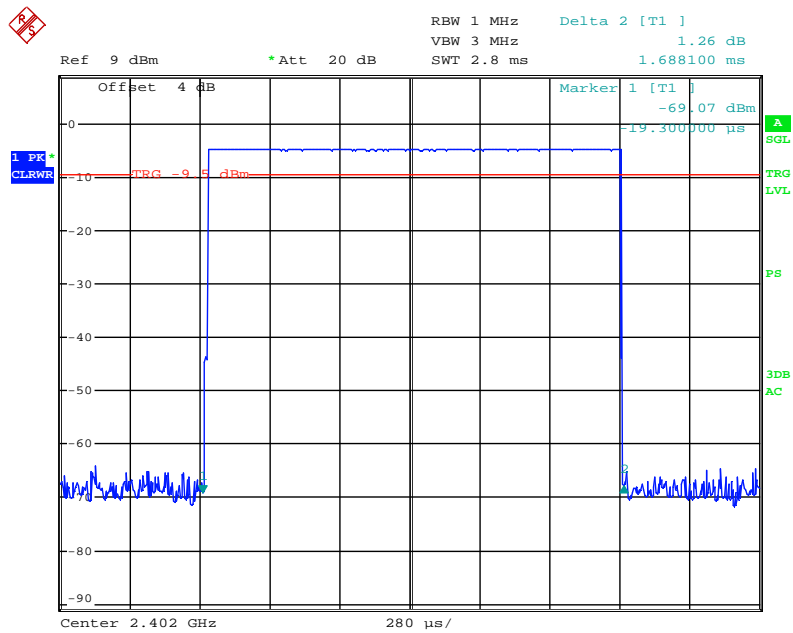





### Pulse time, Middle Channel, DH3

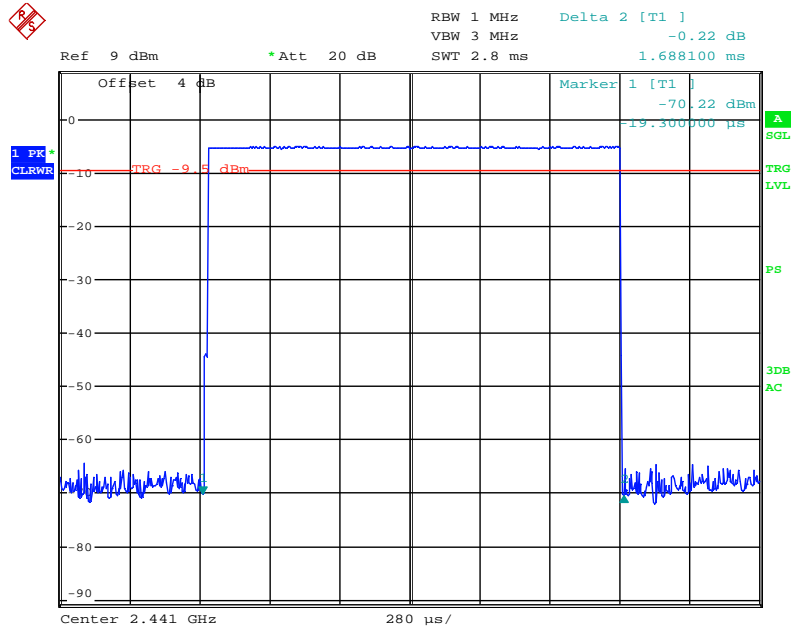


### Pulse time, High Channel, DH3

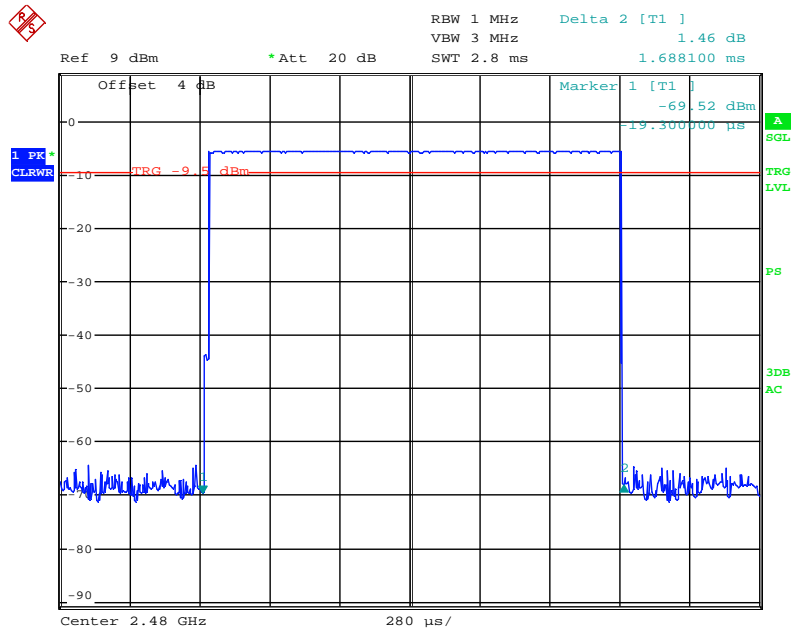


### Pulse time, Low Channel, DH5

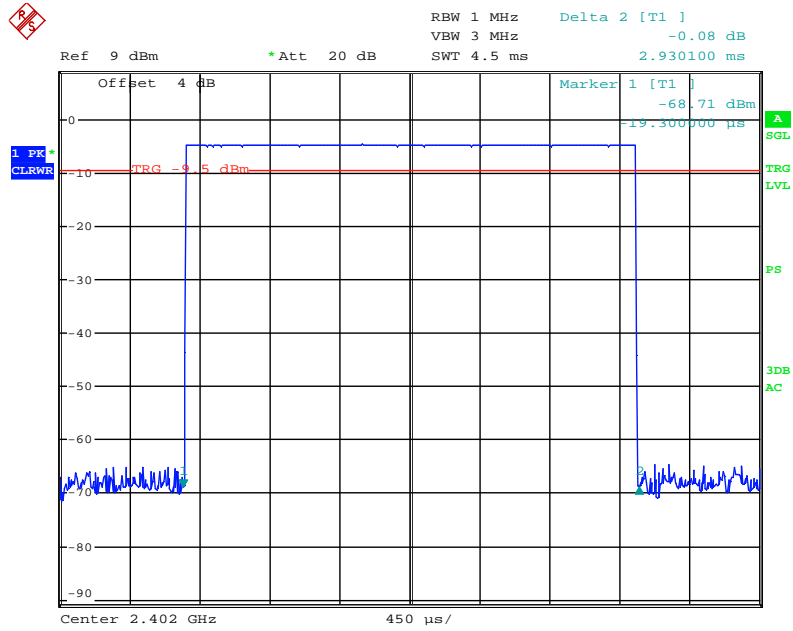

### Pulse time, Middle Channel, DH5

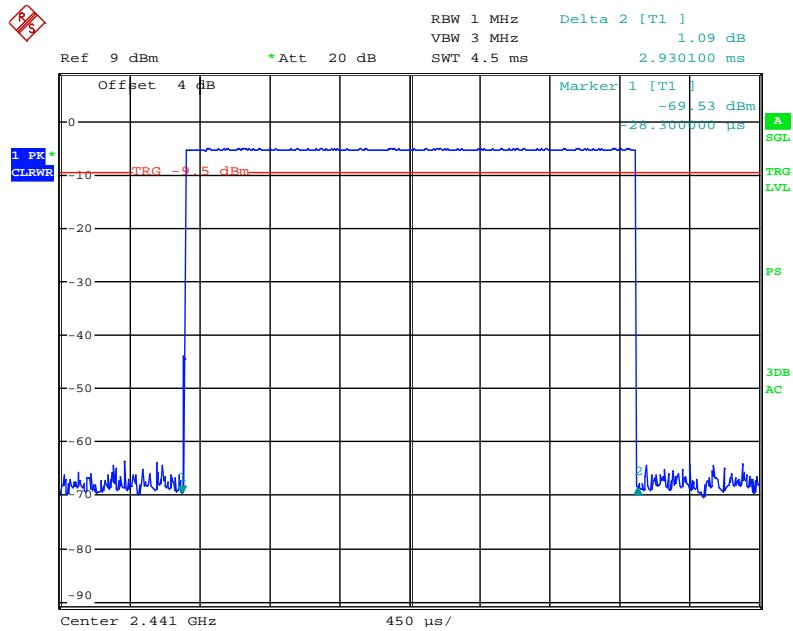


### Pulse time, High Channel, DH5

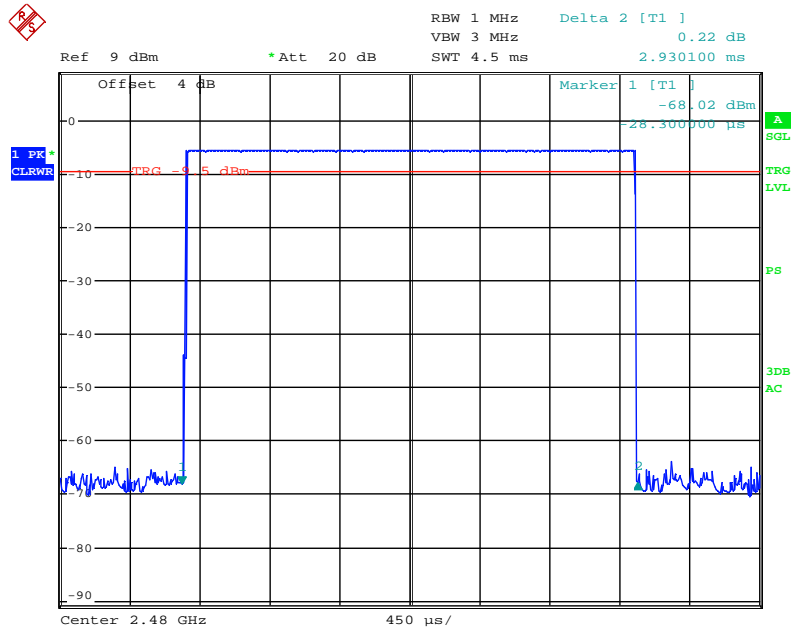


### EDR ( $\pi/4$ -DQPSK):


### Pulse time, Low Channel, DH1

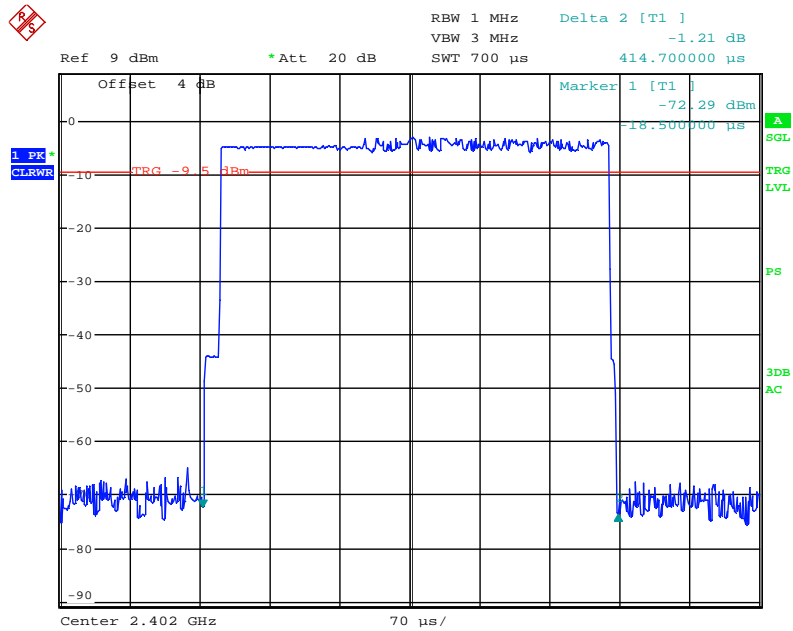


### Pulse time, Middle Channel, DH1

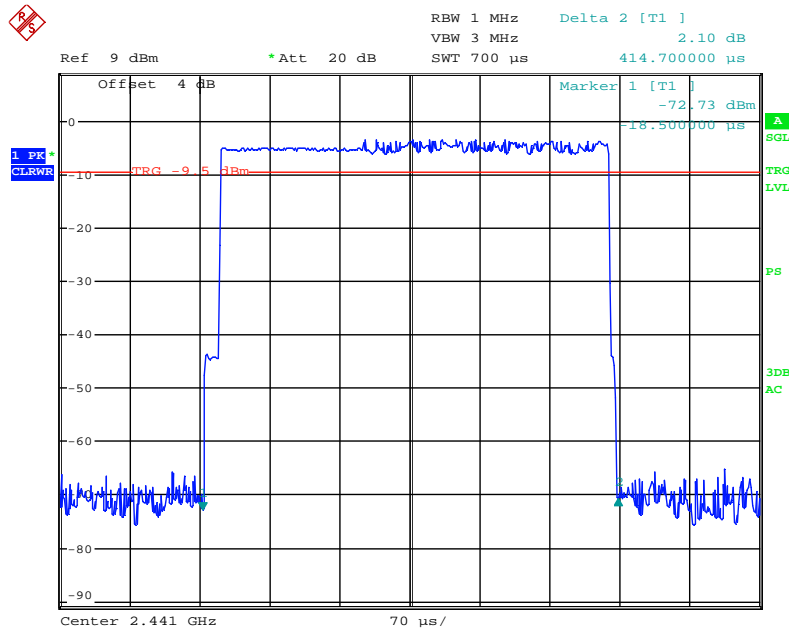


### Pulse time, High Channel, DH1

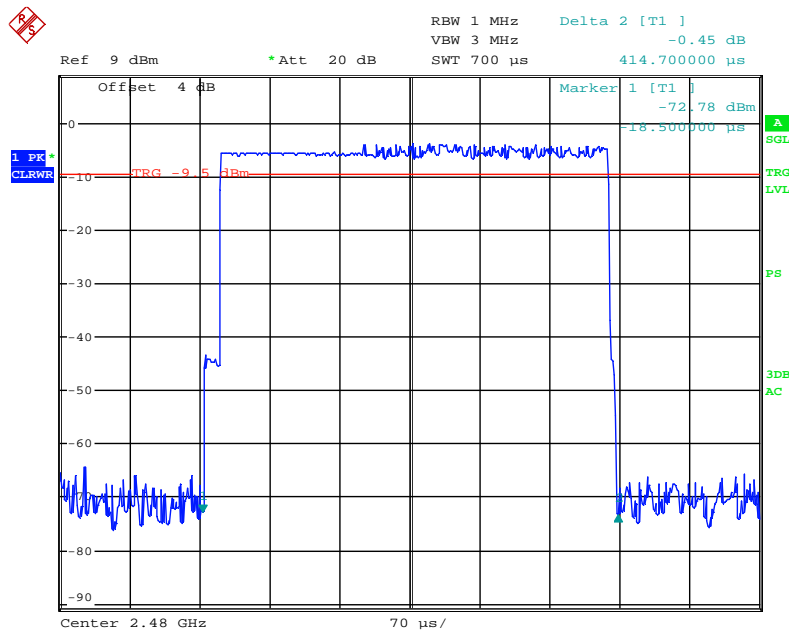


### Pulse time, Low Channel, DH3

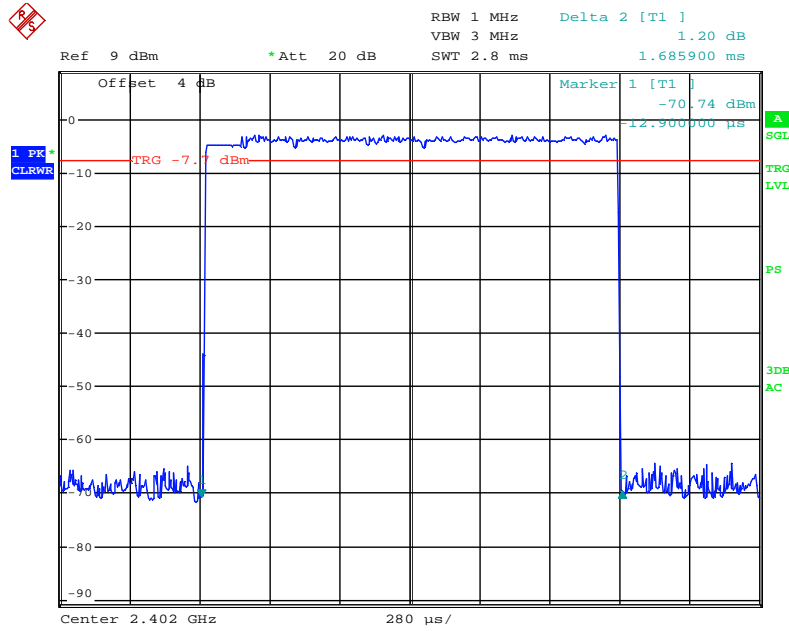


### Pulse time, Middle Channel, DH3

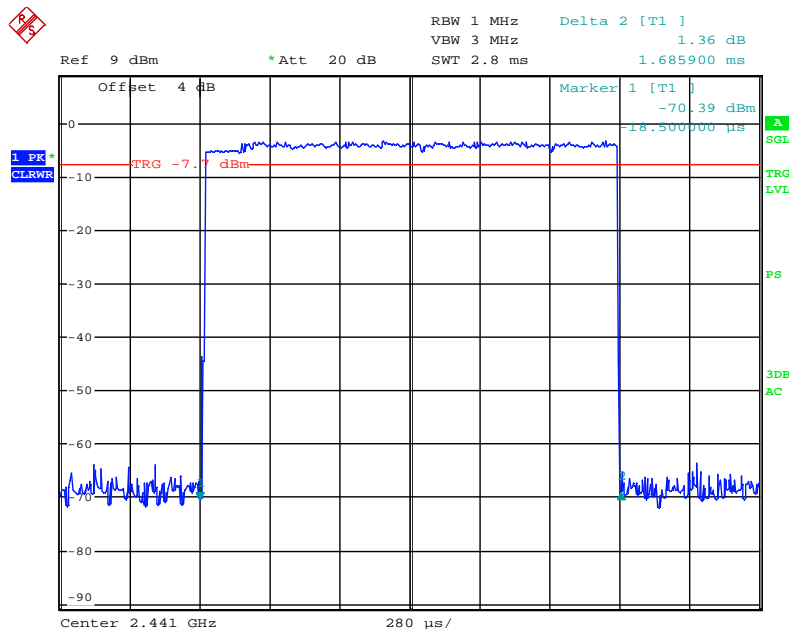


### Pulse time, High Channel, DH3

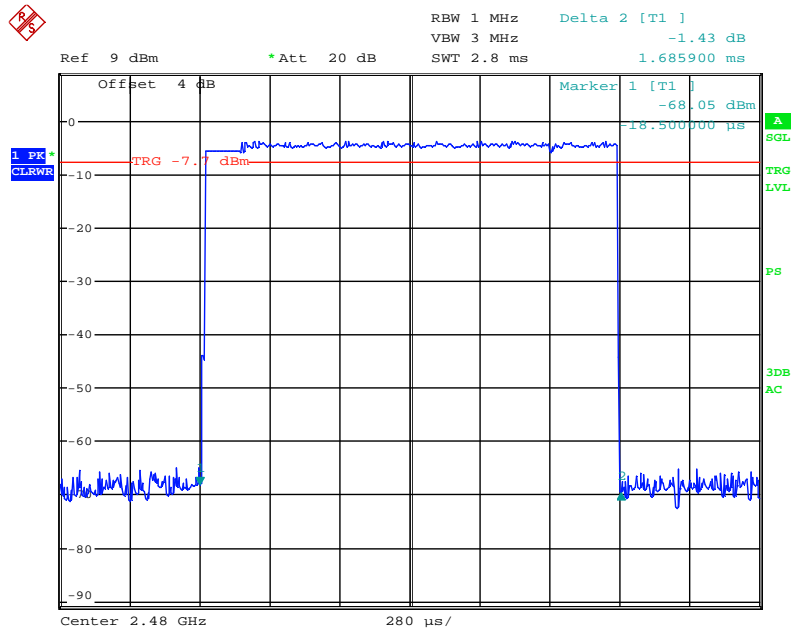


### Pulse time, Low Channel, DH5

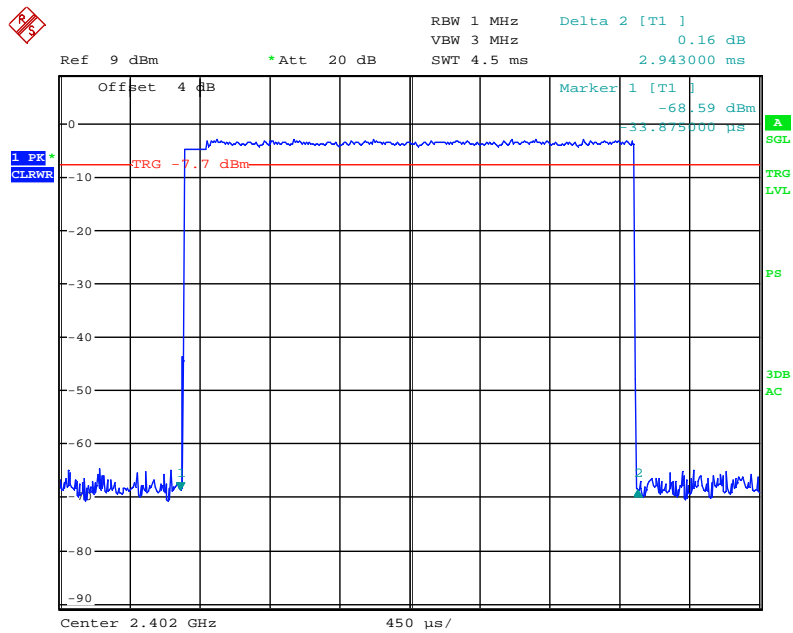

### Pulse time, Middle Channel, DH5

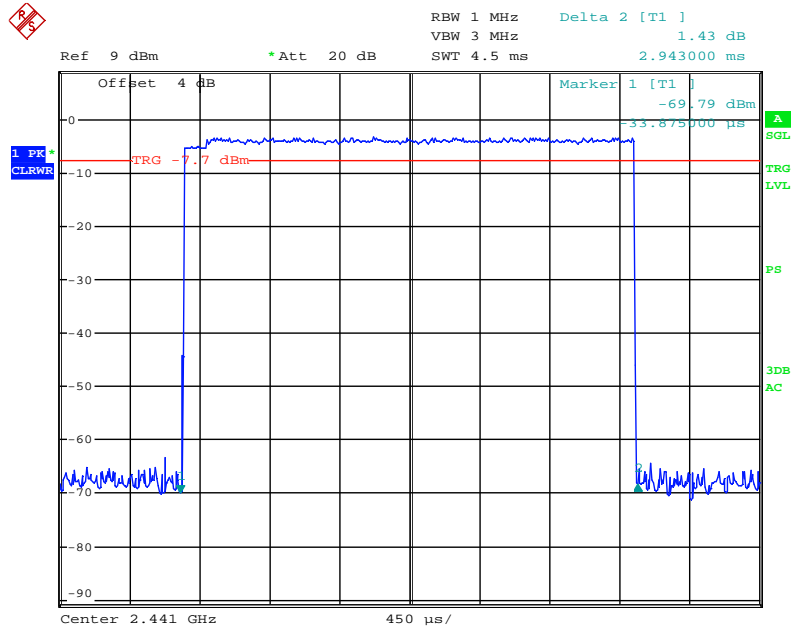


### Pulse time, High Channel, DH5

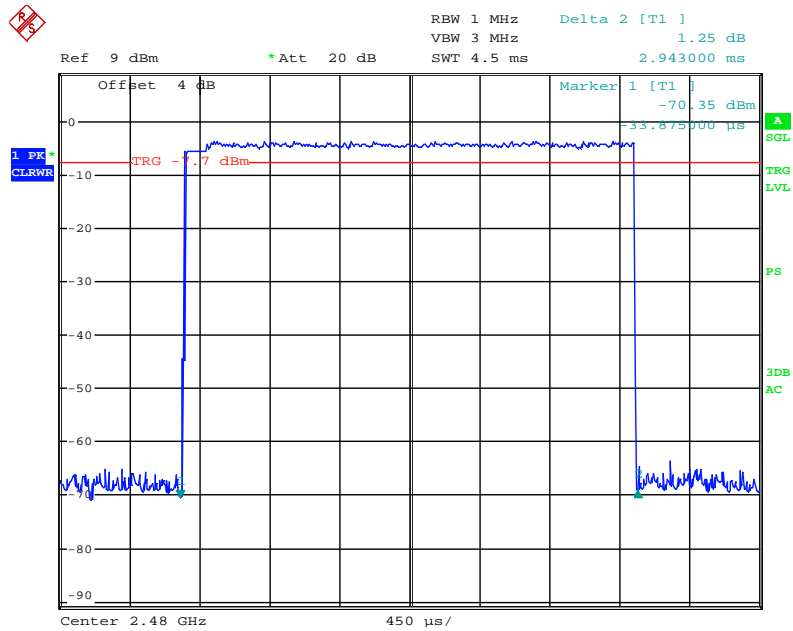


**EDR (8DPSK):**

**Pulse time, Low Channel, DH1**

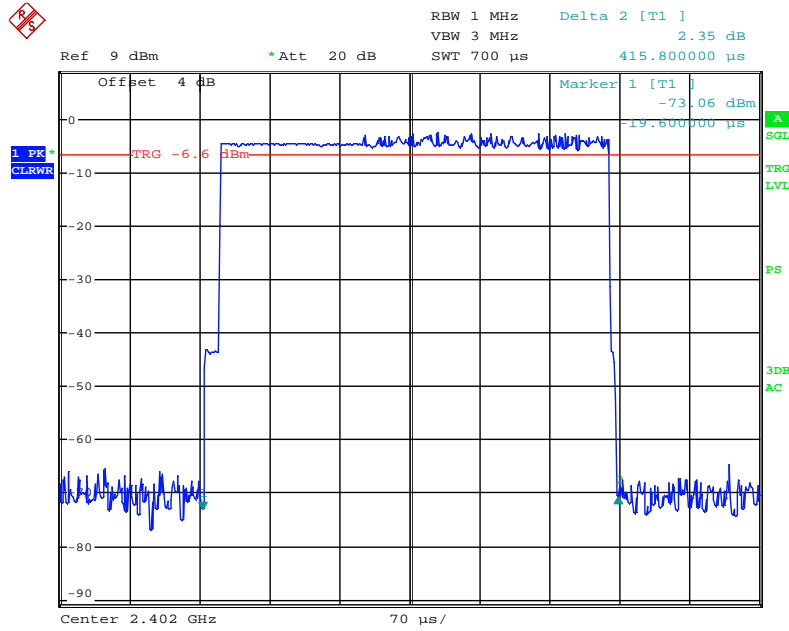


**Pulse time, Middle Channel, DH1**

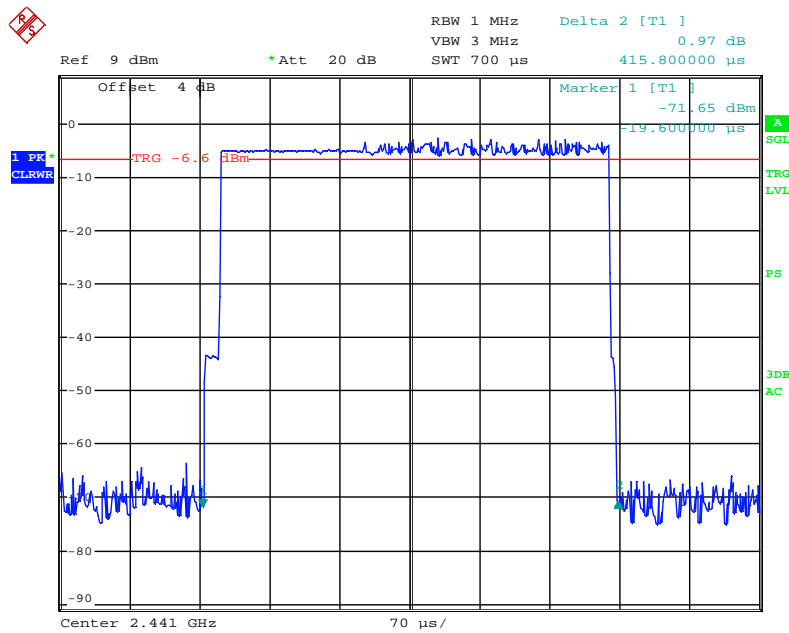





### Pulse time, High Channel, DH1

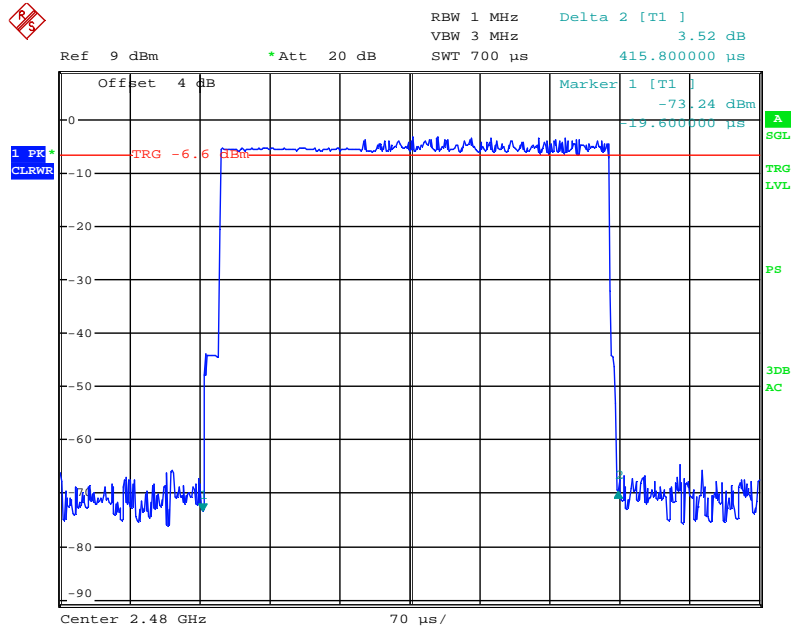


### Pulse time, Low Channel, DH3

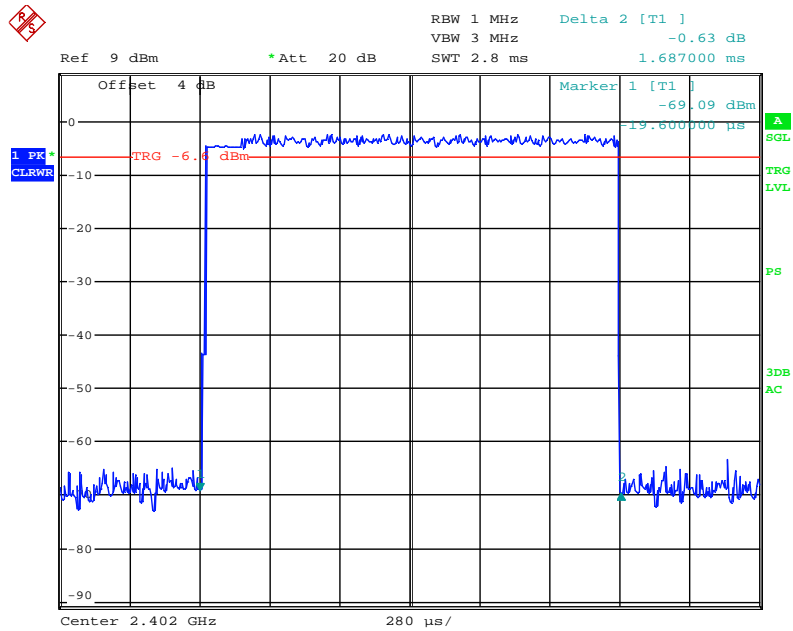


### Pulse time, Middle Channel, DH3

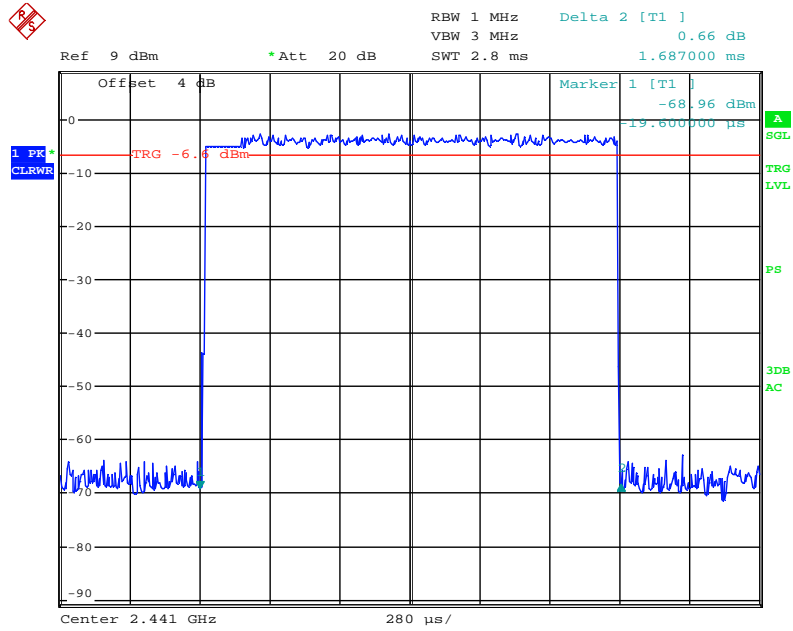


### Pulse time, High Channel, DH3

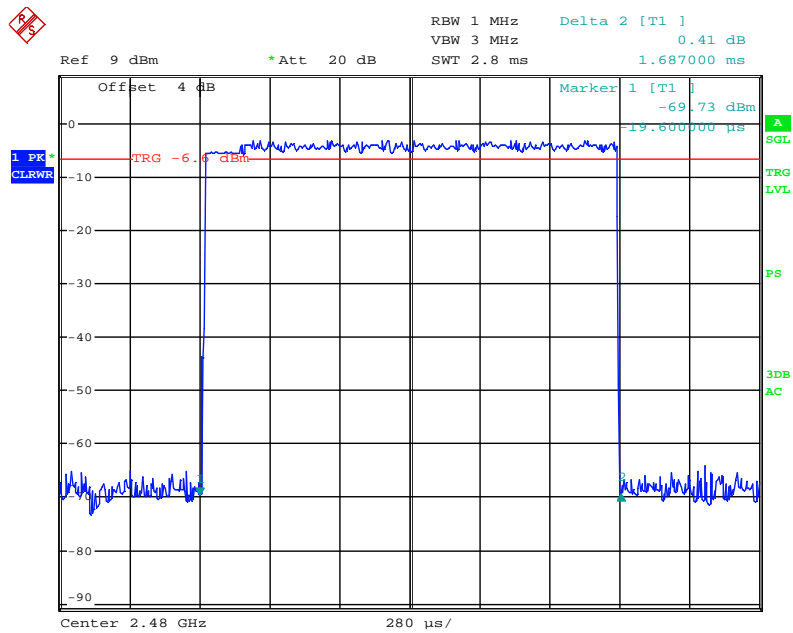


### Pulse time, Low Channel, DH5

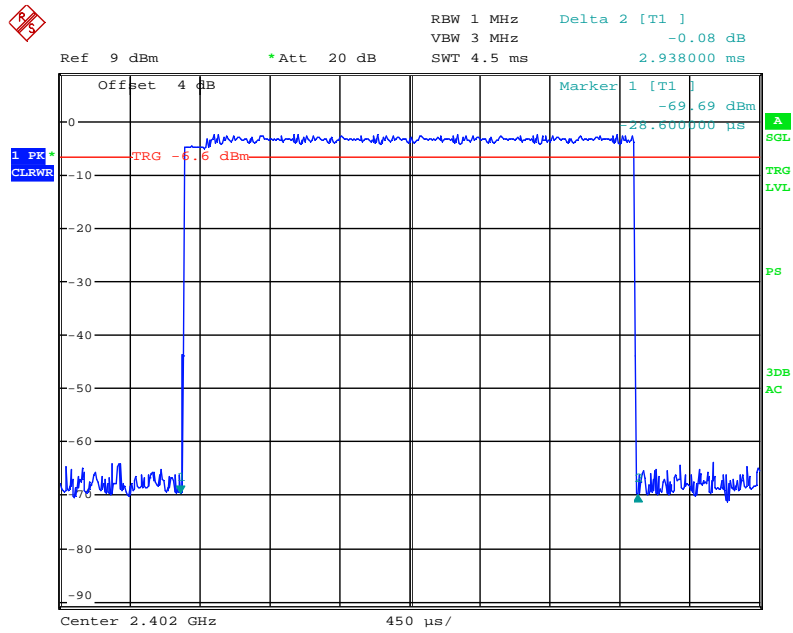

### Pulse time, Middle Channel, DH5

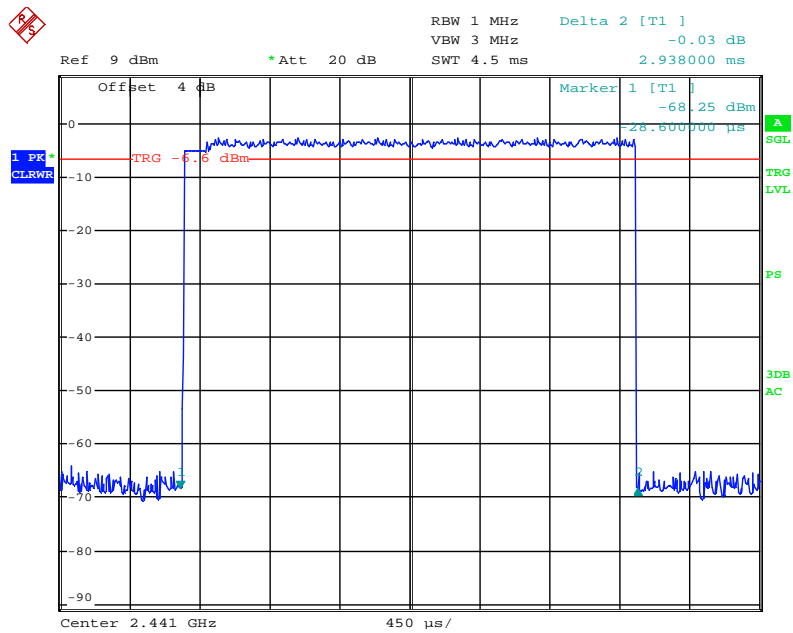

### Pulse time, High Channel, DH5

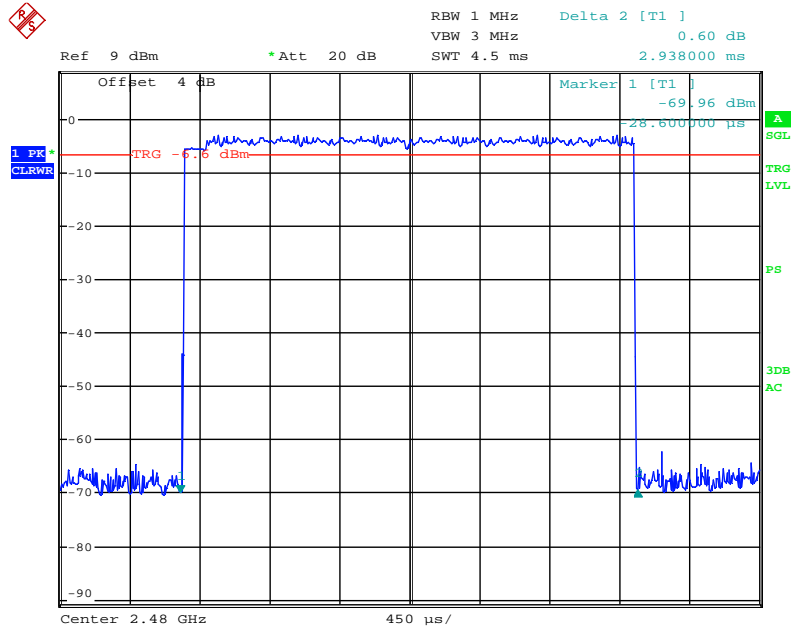

## FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

### Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

### Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to an EMI test receiver.
3. Add a correction factor to the display.



### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa


*The testing was performed by Gardon Zhang on 2012-08-21.*

*Test Mode: Transmitting*


*Test Result: Compliance. Please refer to following tables and plots*

Mode	Channel	Frequency (MHz)	Conducted Output Power		Limit (mW)
			(dBm)	(mW)	
BDR (GFSK)	Low	2402	-4.34	0.368	1000
	Middle	2441	-4.73	0.337	1000
	High	2480	-5.21	0.301	1000
EDR ( $\pi/4$ -DQPSK)	Low	2402	-2.36	0.581	1000
	Middle	2441	-2.72	0.535	1000
	High	2480	-3.14	0.485	1000
EDR (8DPSK)	Low	2402	-1.68	0.679	1000
	Middle	2441	-2.14	0.611	1000
	High	2480	-2.60	0.550	1000


**BDR (GFSK): Low Channel**

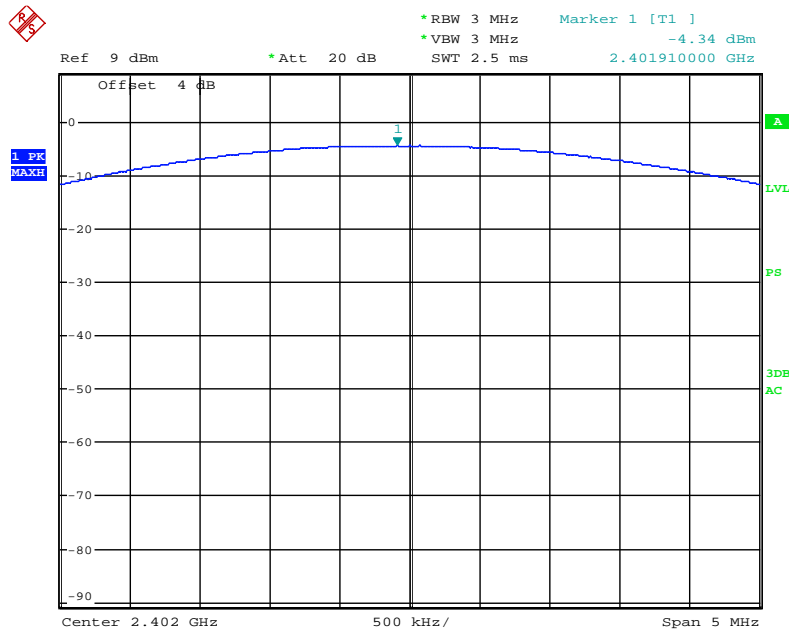


### BDR (GFSK): Middle Channel

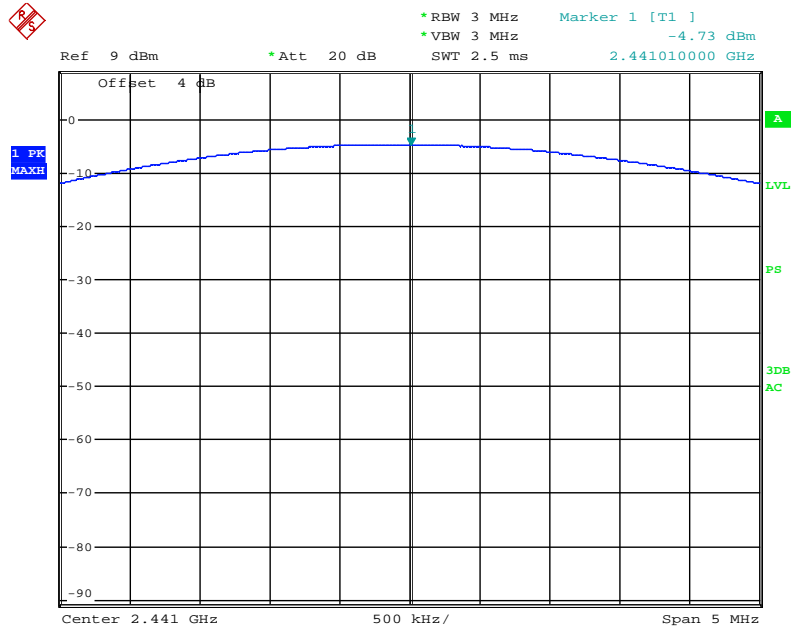


### BDR (GFSK): High Chanel

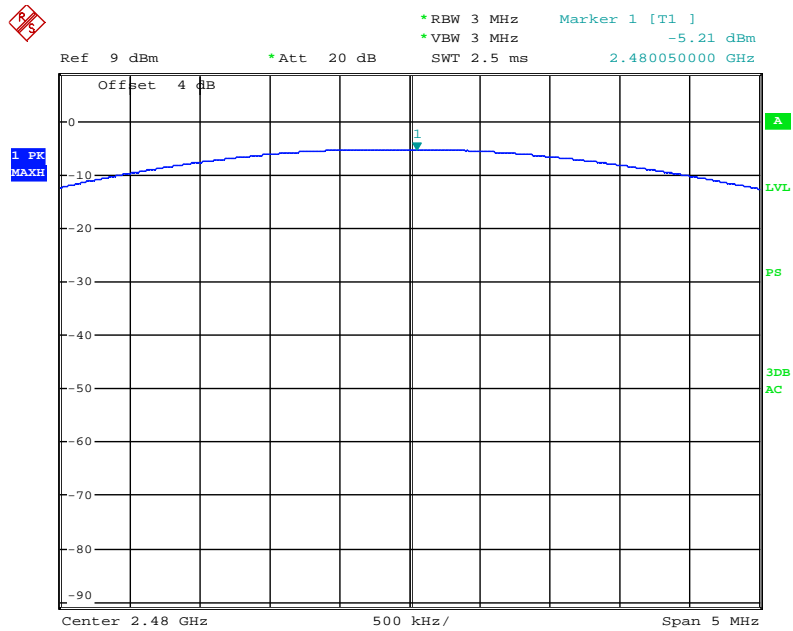

### EDR( $\pi/4$ -DQPSK): Low Channel

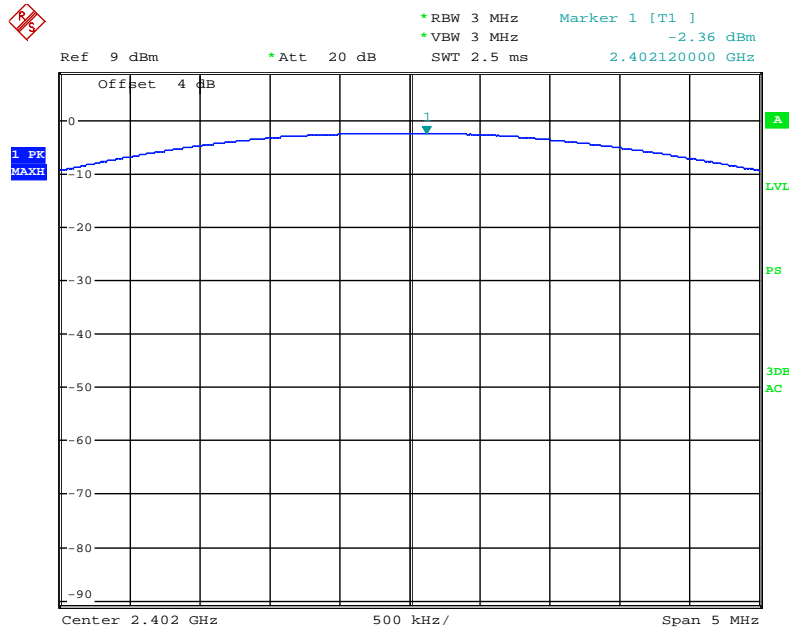


### EDR( $\pi/4$ -DQPSK): Middle Channel

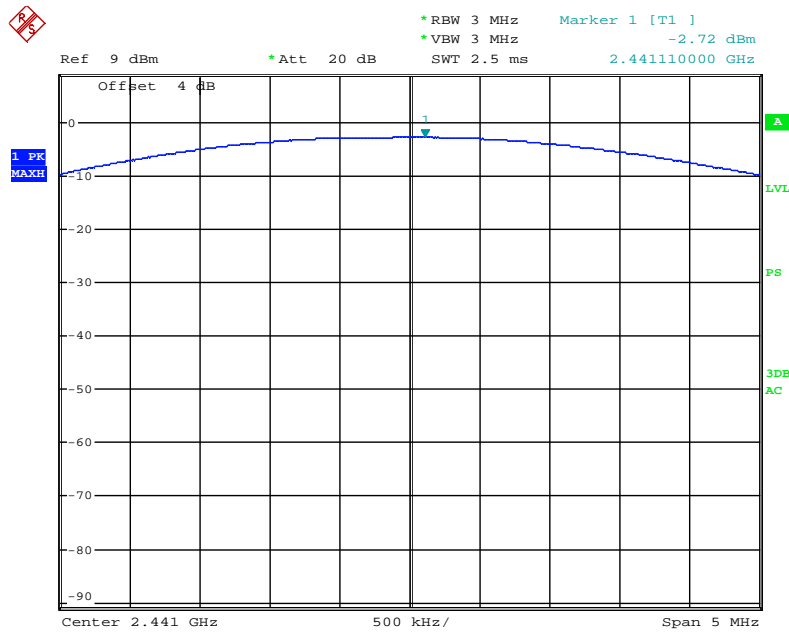





### EDR( $\pi/4$ -DQPSK): High Chanel

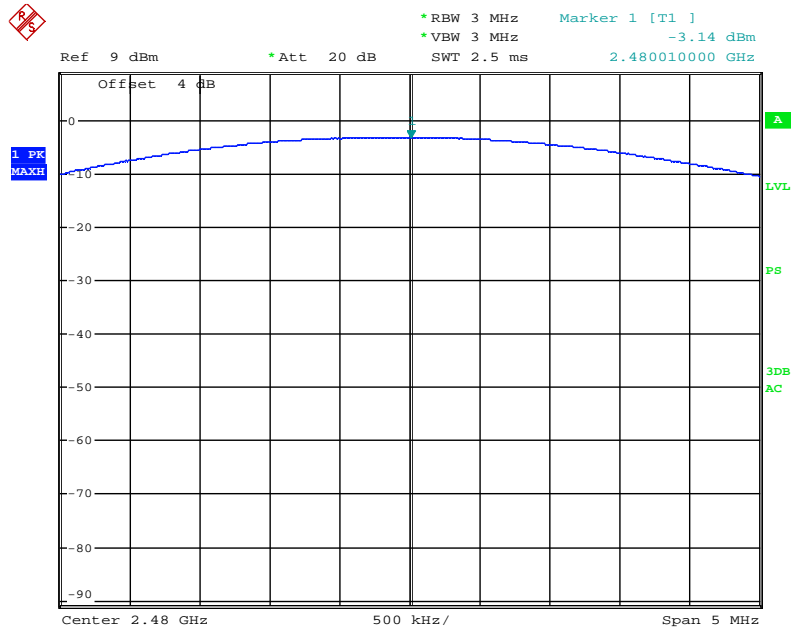


### EDR(8DPSK): Low Channel

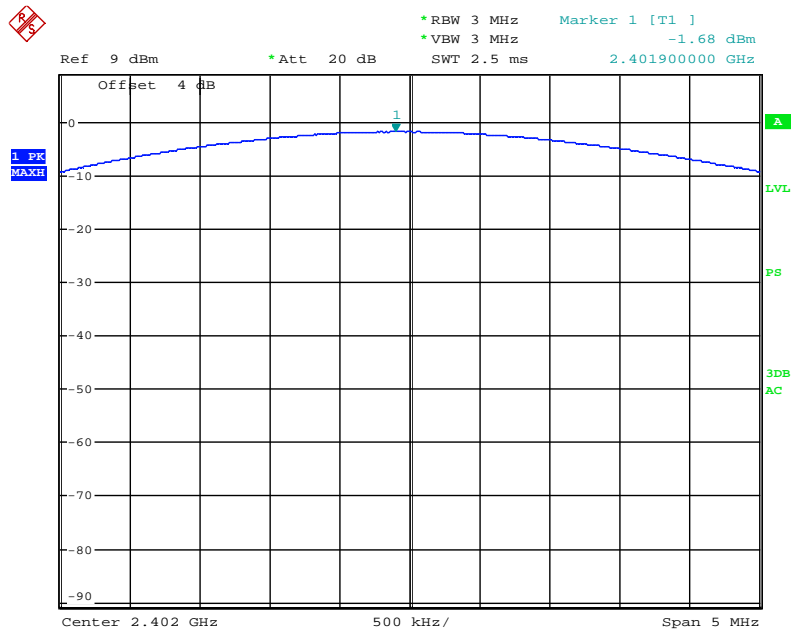

### EDR(8DPSK): Middle Channel

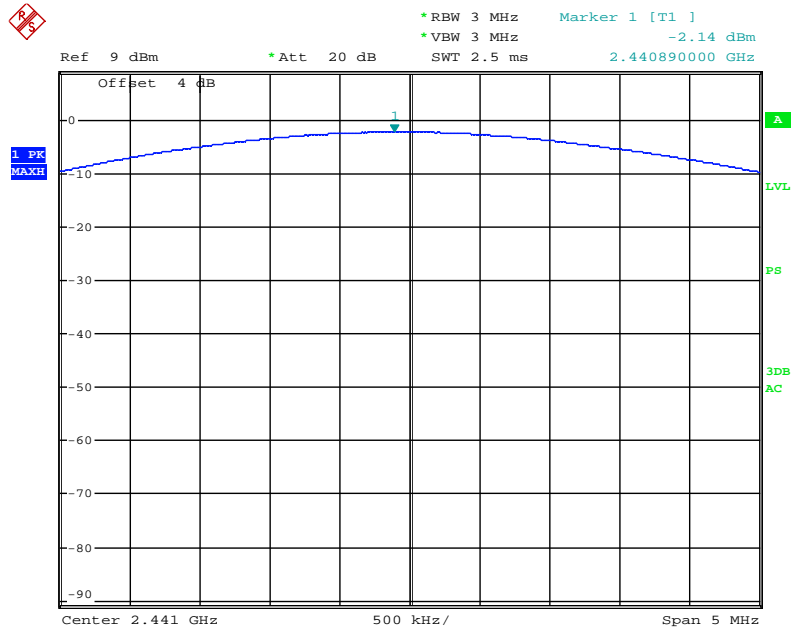

### EDR(8DPSK): High Chanel

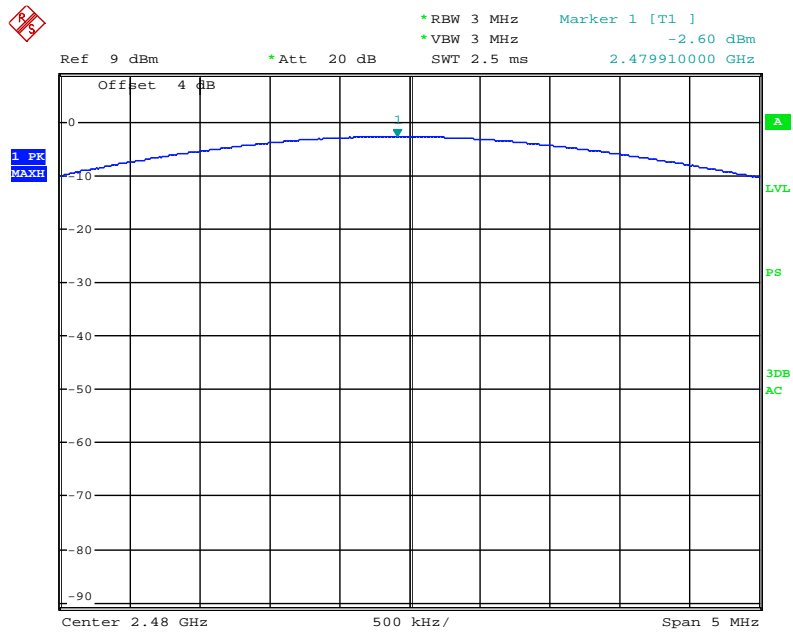

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 1 MHz with a convenient frequency span including 100 kHz bandwidth from band edge, for Radiated emissions restricted band RBW=100 kHz, VBW=300 kHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test Receiver	ESCI	101122	2011-11-17	2012-11-16

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

**Test Data****Environmental Conditions**

<b>Temperature:</b>	25°C
<b>Relative Humidity:</b>	56 %
<b>ATM Pressure:</b>	100 kPa


The testing was performed by Gardon Zhang on 2012-08-21.

Test Mode: Transmitting


Test Result: Compliance. Please refer to following table and plots

Mode	Band	Delta Peak to Band Emission (dBc)	Limit (dBc)
<b>BDR (GFSK)</b>	Left band	53.38	>20
	Right band	53.84	>20
<b>EDR (<math>\pi/4</math>-DQPSK)</b>	Left band	51.72	>20
	Right band	52.97	>20
<b>EDR (8DPSK)</b>	Left band	51.52	>20
	Right band	52.51	>20


### BDR (GFSK): Band Edge-Left Side

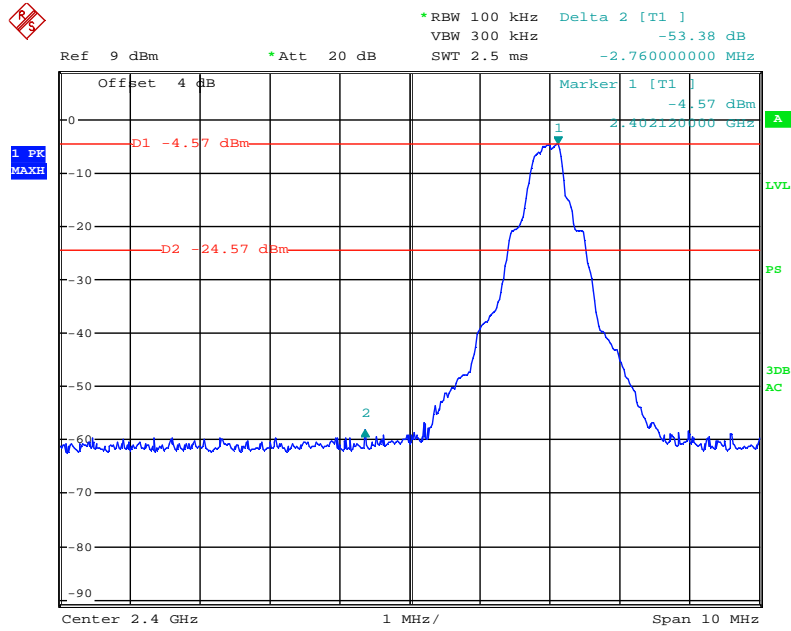


### BDR (GFSK): Band Edge-Right Side

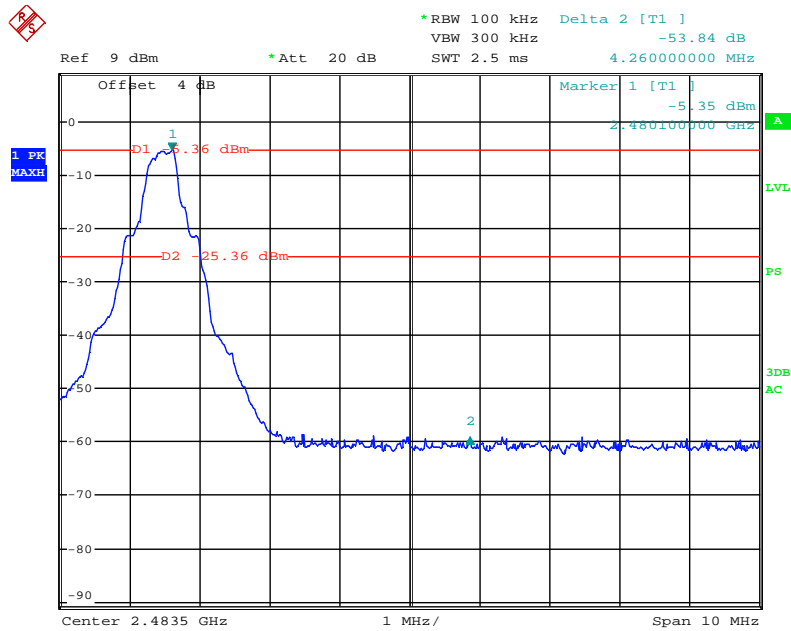


### EDR ( $\pi/4$ -DQPSK): Band Edge-Left Side

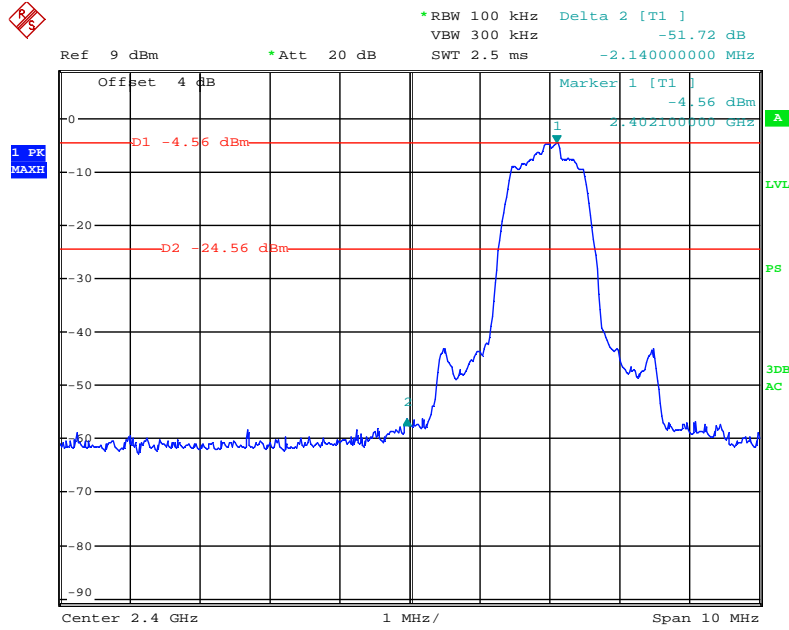


### EDR ( $\pi/4$ -DQPSK): Band Edge-Right Side

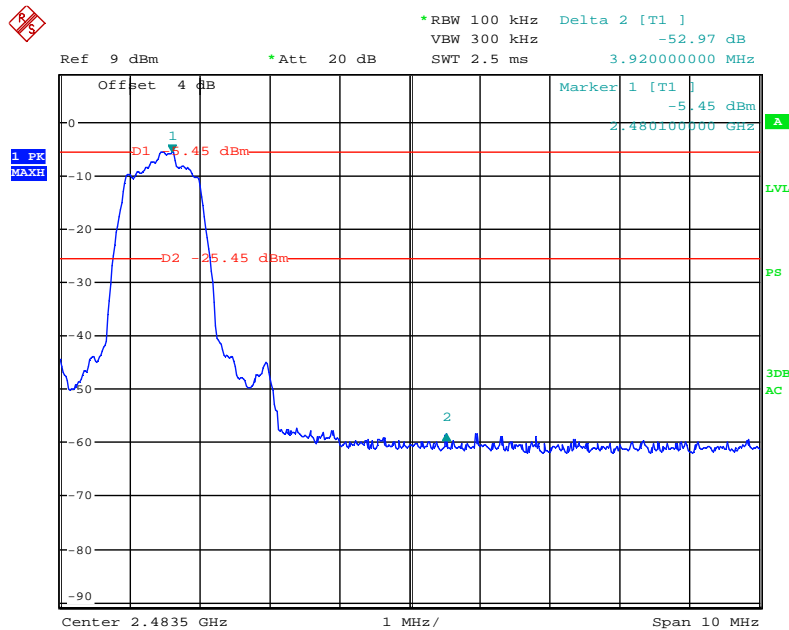

### EDR (8DPSK): Band Edge-Left Side

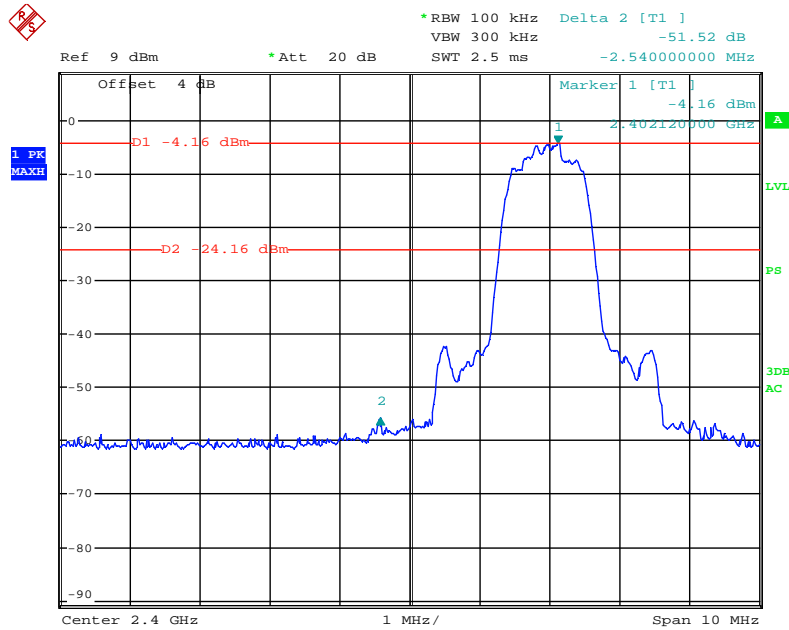

### EDR (8DPSK): Band Edge-Right Side

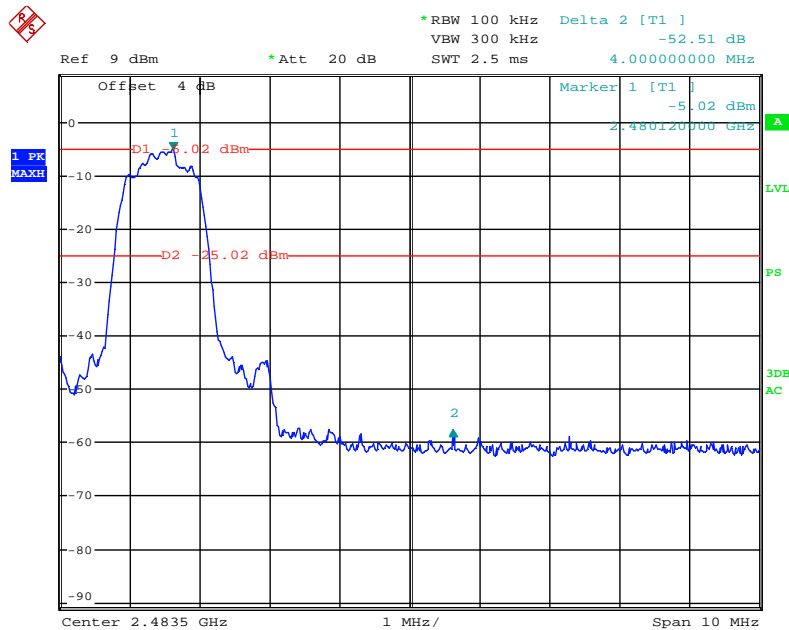

\*\*\*\*\* END OF REPORT \*\*\*\*\*