

FCC ID: WJ9-RRU4ELCU6

EMI - TEST REPORT

- FCC Part 15.247 -

Test Report No. :	T38208-00-00HU	21. August 2014 Date of issue
--------------------------	-----------------------	----------------------------------

Type / Model Name : RRU4-ELC-U6Product Description : RRU4 RFID UHF Reader-System**Applicant** : KATHREIN Sachsen GmbHAddress : Lindenstrasse 6
D – 09241 Mühlau**Manufacturer** : KATHREIN Sachsen GmbHAddress : Lindenstrasse 6
D – 09241 Mühlau**Licence holder** : KATHREIN Sachsen GmbHAddress : Lindenstrasse 6
D – 09241 Mühlau

Test Result according to the standards listed in clause 1 test standards:	POSITIVE
--	-----------------



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1	<u>TEST STANDARDS</u>	3
2	<u>SUMMARY</u>	4
3	<u>EQUIPMENT UNDER TEST</u>	6
3.1	Photo documentation of the EUT – Detailed photos see Attachment A	6
3.2	Test setup	6
3.3	Power supply system utilised	6
3.4	Short description of the EUT	6
4	<u>TEST ENVIRONMENT</u>	8
4.1	Address of the test laboratory	8
4.2	Statement regarding the usage of logos in test reports	8
4.3	Environmental conditions	8
4.4	Statement of the measurement uncertainty	8
4.5	Measurement Protocol for FCC, VCCI and AUSTEL	9
5	<u>TEST CONDITIONS AND RESULTS</u>	10
5.1	Conducted emissions	10
5.2	20 dB bandwidth	20
5.3	Maximum peak conducted output power	25
5.4	Spurious RF conducted emissions	28
5.5	Spurious radiated emissions	34
5.6	Hopping sequence	39
5.7	Equal hopping frequency use	40
5.8	Receiver input bandwidth	40
5.9	Dwell time	41
5.10	Channel separation	44
5.11	Quantity of hopping channels	46
5.12	Antenna application	49
5.13	Maximum permissible exposure (MPE) – See Attachment B	50
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	51

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (October, 2013)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart B - Unintentional Radiators (October, 2013)

Part 15, Subpart B, Section 15.107	AC Line conducted emissions,
Part 15, Subpart B, Section 15.109	Radiated emissions, general requirements

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (October, 2013)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

FCC Rules and Regulations Part 1, Subpart I - Procedures Implementing the National Environmental Policy Act of 1969

Part 1, Subpart I, Section 1.1310	Radiofrequency radiation exposure limits
Part 1, Subpart 2, Section 2.1093	Radiofrequency radiation exposure evaluation: portable device

OET Bulletin 65, 65A, 65B, 65C Edition 97-01, August 1997 – Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.

ANSI C63.10: 2009	Testing Unlicensed Wireless Devices
ANSI C95.1:1992	IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz
CISPR 16-4-2: 2003	Uncertainty in EMC measurement
CISPR 22: 2005 EN 55022: 2006	Information technology equipment

2 SUMMARY

GENERAL REMARKS:

The frequency range was scanned from 9 kHz to 10 GHz.

All emissions not reported in this test report were more than 10 dB below the specified limit.

The EuT is a frequency hopping system using 52 channels in the frequency band from 902 to 928 MHz.

All radiated tests were performed with following antenna type and power supply:

- Antenna: WiRa-70-KRAI-FCC
- Power supply: MEAN WELL, GS90A24

This equipment was provided by the manufacturer for testing.

Following antennas could be connected on the UHF RFID Reader:

Type	Order-No.	Shortened designation
WiRa 30° FCC	52010087	Wide Range-Antenna FCC, 902-928 MHz, 30° circular (10.5 dBic)
WiRa 70° FCC	52010079	Wide Range Antenna FCC, 902-928 MHz, 70° circular (8.3 dBic)
WiRa-70°-KRAI-FCC	52010194	Wide Range KRAI Antenna FCC, 902-928 MHz (7.5 dBic)
MiRa FCC	52010083	Mid Range Antenna FCC, 902-928 MHz, 100° circular (2.5 dBic)
S-MiRa ETSI/FCC	52010172	Short-Mid Range Antenna ETSI/FCC, 865-928 MHz, 100° circular (-10.0 dBic)
U-LoRa ETSI/FCC	52010092	Ultra Low Range Antenna ETSI/FCC, 865-928 MHz (-30.0 dBi)
LoRa FCC	52010085	Low Range Antenna FCC, 902-928 MHz (-15.0 dBi)
SMSH-30-30-KRAI-Slave	52010197	Smart Shelf Antenna, 865-928 MHz (-7.0 dBic)

For detailed information about the UHF RFID Reader and the antennas please refer to the user manual.


The EuT is declared as Class B digital device.

It is not possible to set the EuT only in receiving mode.

FCC ID: WJ9-RRU4ELCU6

Screenshot of the supported test software:

Tag reading mode:

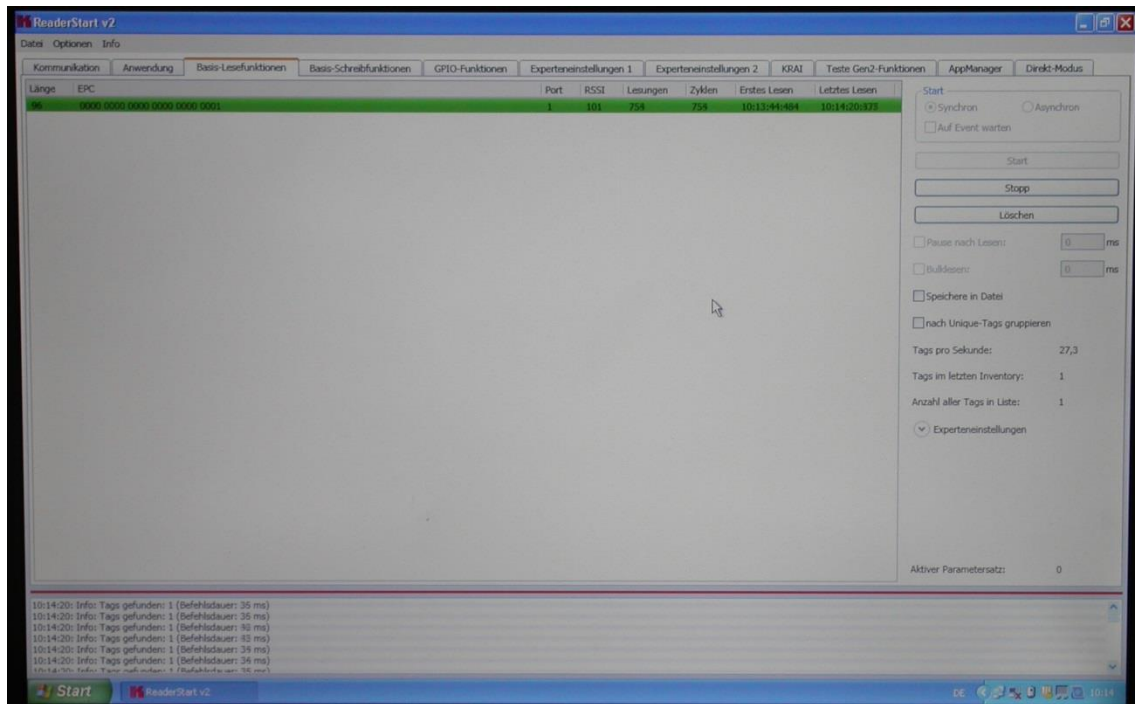

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 16. June 2014

Testing concluded on : 18. June 2014

Checked by:

Tested by:


Klaus Gegenfurtner
Teamleader Radio

Markus Huber

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT – Detailed photos see Attachment A

3.2 Test setup

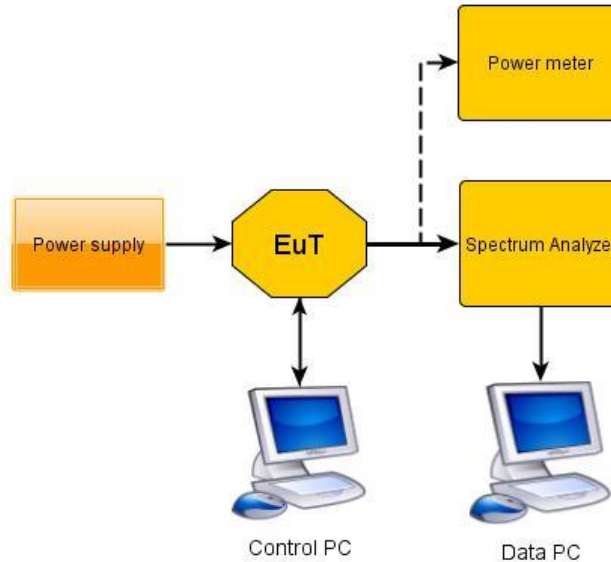

3.3 Power supply system utilised

Power supply voltage: : 100-240 V / 50-60 Hz / 1 ϕ , 24 V DC

3.4 Short description of the EUT

The EuT's are UHF RFID reader systems. They can read active and passive Tags in the frequency range from 902 to 928 MHz.

Number of tested samples: 1
Serial number: Prototype

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TAG reading mode supplying 30.0 dBm

- TAG reading mode supplying 28.5 dBm

- Standby mode

-

FCC ID: WJ9-RRU4ELCU6**EUT configuration:**

The following peripheral devices and interface cables were connected during the measurements:

- Test software Model : Supplied by manufacturer
- Lap Top Model : Supplied by CSA Group Bayern GmbH
- Antenna Model : WiRa-70°-KRAI-FCC
- Power supply Model : MEAN WELL, GS90A24, EB34864231
- _____ Model : _____
- _____ Model : _____
- _____ Model : _____
- _____ Model : _____
- customer specific cables

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Statement regarding the usage of logos in test reports

The accreditation and notification body logos displayed in this test report are only valid for standards listed in the accreditation or notification scope of CSA Group Bayern GmbH.

4.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.4 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

FCC ID: WJ9-RRU4ELCU6

4.5 Measurement Protocol for FCC, VCCI and AUSTEL

4.5.1 GENERAL INFORMATION

4.5.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.10: 2009, Testing Unlicensed Wireless Devices."

In compliance with 47 CFR Part 15 Subpart A, Section 15.38 testing for FCC compliance may be achieved by following the procedures set out in ANSI C63.4 and applying the CISPR 22 limits.

4.5.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.5.1.3 Determination of worst case measurement conditions

All radiated tests were performed with following antenna type and power supply:

- Antenna: WiRa-70°-KRAI-FCC (7.5 dBi)
- Power Setting: 28.5 dBm
- Power supply: MEAN WELL, GS90A24

To show compliance with the FCC rules the frequencies which are falling in a restricted band were measured with following antenna types:

- Antenna: WiRa 30° FCC (10.5 dBi)
 - o Power Setting: 25.5 dBm
 - o Power supply: MEAN WELL, GS90A24
- Antenna: WiRa 70° FCC (8.3 dBi)
 - o Power Setting: 27.7 dBm
 - o Power supply: MEAN WELL, GS90A24
- Antenna: WiRa-70°-KRAI-FCC (7.5 dBi)
 - o Power Setting: 28.5 dBm
 - o Power supply: MEAN WELL, GS90A24

The photo documentation of this report shows only the test setup with the WiRa-70° antenna type and the RRU4-ELC-U6 UHF Reader with the MEAN WELL power supply unit.

All conducted test were performed with the same power supply and an external 20 dB/50 W attenuator (02-02/50-10-001).

FCC ID: WJ9-RRU4ELCU6

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up



FCC ID: WJ9-RRU4ELCU6

5.1.3 Applicable standard

According to FCC Part 15C, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

5.1.4 Description of Measurement

The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a line impedance stabilization network (LISN) with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20 \log \mu\text{V}$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

5.1.5 Test result

Frequency range: 0.15 MHz - 30 MHz
 Min. limit margin 4.8 dB at 0.3855 MHz

The requirements are **FULFILLED**.


Remarks: For detailed test result please refer to following test protocols.

FCC ID: WJ9-RRU4ELCU6

5.1.6 Test protocol

Test point: L1
 Operation mode: Tag reading mode supplying 30.0 dBm
 Remarks:

Result: Passed

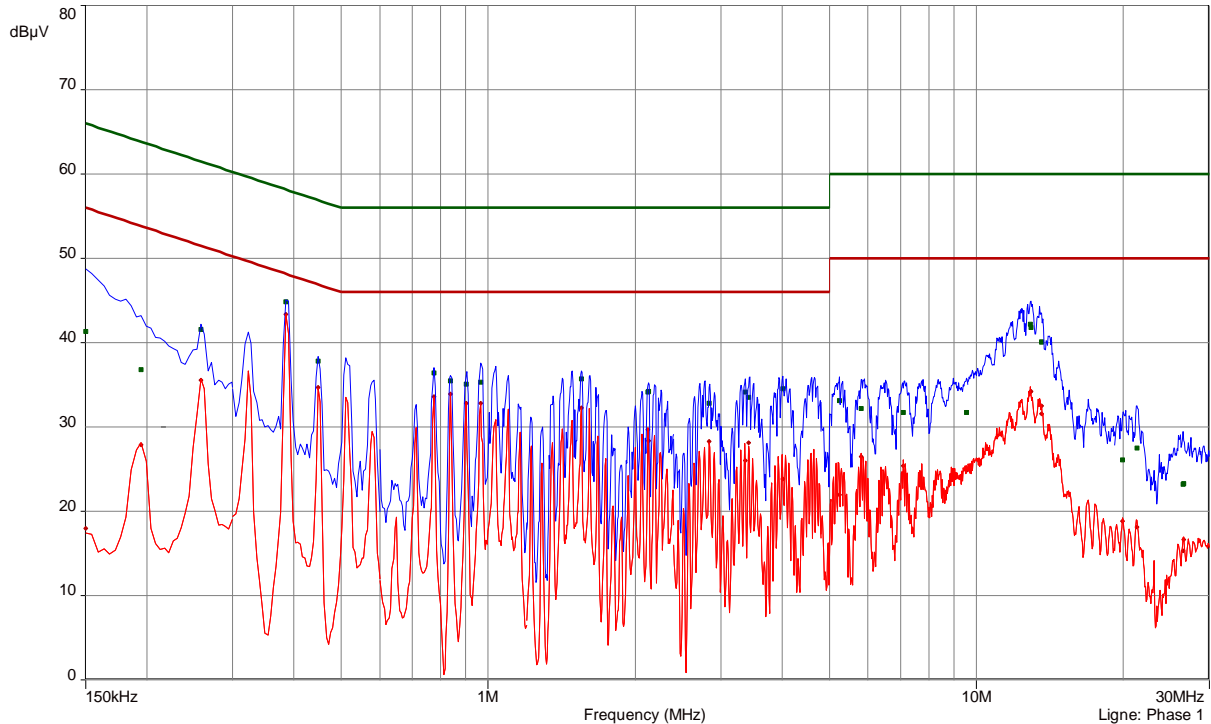

freq	SR	QP	margin	limit	AV	margin	limit	line
MHz		dB(µV)	dB	dB	dB(µV)	dB	dB	
0.15	1	41.35	24.65	66	17.99	38.01	56	Phase 1
0.195	1	36.84	26.98	63.82	27.87	25.95	53.82	Phase 1
0.258	1	41.57	19.92	61.5	35.52	15.97	51.5	Phase 1
0.3855	2	44.87	13.29	58.16	43.36	4.8	48.16	Phase 1
0.4485	2	37.83	19.07	56.9	34.7	12.2	46.9	Phase 1
0.7755	3	36.37	19.63	56	33.59	12.41	46	Phase 1
0.8385	3	35.47	20.53	56	33.88	12.12	46	Phase 1
0.9015	3	35.06	20.94	56	32.84	13.16	46	Phase 1
0.9645	3	35.35	20.65	56	32.82	13.18	46	Phase 1
1.551	4	35.72	20.28	56	32.3	13.7	46	Phase 1
2.127	4	34.17	21.83	56	29.73	16.27	46	Phase 1
2.1315	4	34.19	21.81	56	28.4	17.6	46	Phase 1
2.8365	5	32.86	23.14	56	28.3	17.7	46	Phase 1
3.363	5	34.16	21.84	56	26.01	19.99	46	Phase 1
3.417	5	33.54	22.46	56	28.14	17.86	46	Phase 1
4.0155	5	34.52	21.48	56	23.85	22.15	46	Phase 1
5.2455	6	33.12	26.88	60	21.98	28.02	50	Phase 1
5.8035	6	32.16	27.84	60	26.52	23.48	50	Phase 1

FCC ID: WJ9-RRU4ELCU6

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
7.095	6	31.69	28.31	60	25.36	24.64	50	Phase 1
9.543	6	31.72	28.28	60	24.82	25.18	50	Phase 1
12.885	7	42.21	17.79	60	34.14	15.86	50	Phase 1
12.948	7	41.82	18.18	60	34.2	15.8	50	Phase 1
13.587	7	40.06	19.94	60	32.52	17.48	50	Phase 1
13.596	7	40.08	19.92	60	31.57	18.43	50	Phase 1
19.938	8	26.08	33.92	60	18.83	31.17	50	Phase 1
21.3375	8	27.52	32.48	60	18.09	31.91	50	Phase 1
26.5395	8	23.18	36.82	60	15.31	34.69	50	Phase 1
26.607	8	23.27	36.73	60	16.65	33.35	50	Phase 1

FCC ID: WJ9-RRU4ELCU6

Test point


N

Result: Passed

Operation mode:

Tag reading mode supplying 30.0 dBm

Remarks:

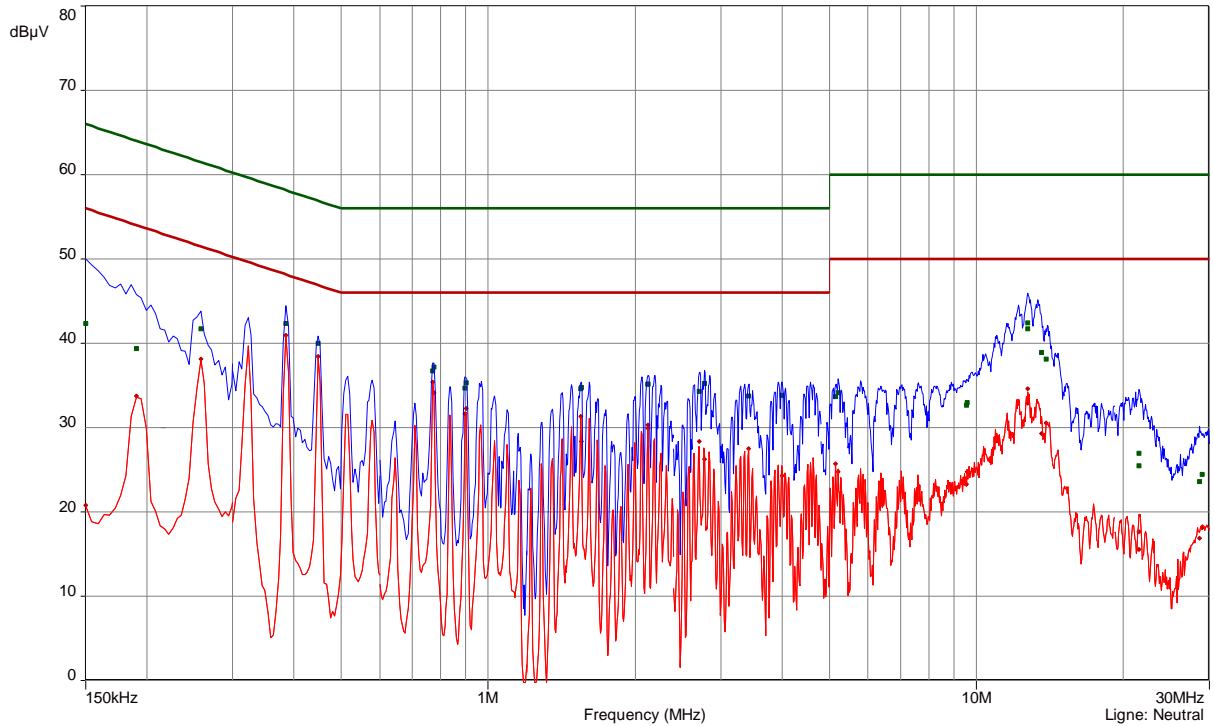

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
0.15	9	42.37	23.63	66	20.8	35.2	56	Neutral
0.1905	9	39.36	24.65	64.01	33.76	20.25	54.01	Neutral
0.258	9	41.71	19.78	61.5	38.15	13.34	51.5	Neutral
0.3855	10	42.37	15.79	58.16	40.92	7.24	48.16	Neutral
0.4485	10	40.01	16.89	56.9	38.45	8.45	46.9	Neutral
0.771	11	36.74	19.26	56	35.43	10.57	46	Neutral
0.7755	11	37.2	18.8	56	34.14	11.86	46	Neutral
0.897	11	34.69	21.31	56	31.65	14.35	46	Neutral
0.9015	11	35.28	20.72	56	32.29	13.71	46	Neutral
1.5465	12	34.58	21.42	56	31.33	14.67	46	Neutral
1.551	12	34.8	21.2	56	28.33	17.67	46	Neutral
2.1225	12	35.17	20.83	56	30.31	15.69	46	Neutral
2.127	12	35.13	20.87	56	29.93	16.07	46	Neutral
2.706	13	34.29	21.71	56	28.33	17.67	46	Neutral
2.778	13	35.24	20.76	56	26.24	19.76	46	Neutral
3.4125	13	33.78	22.22	56	27.49	18.51	46	Neutral
4.002	13	33.82	22.18	56	24.33	21.67	46	Neutral
5.151	14	33.71	26.29	60	25.73	24.27	50	Neutral
5.2185	14	34.15	25.85	60	24.75	25.25	50	Neutral
9.534	14	32.68	27.32	60	23.3	26.7	50	Neutral
9.588	14	32.94	27.06	60	24.78	25.22	50	Neutral

FCC ID: WJ9-RRU4ELCU6


freq MHz	SR	QP dB(μ V)	margin dB	limit dB	AV dB(μ V)	margin dB	limit dB	line
12.7365	15	42.45	17.55	60	34.63	15.37	50	Neutral
12.75	15	41.71	18.29	60	32.87	17.13	50	Neutral
13.5915	15	38.88	21.12	60	29.32	20.68	50	Neutral
13.8975	15	38.15	21.85	60	30.52	19.48	50	Neutral
21.4905	16	25.44	34.56	60	15.57	34.43	50	Neutral
21.5355	16	26.99	33.01	60	17.64	32.36	50	Neutral
28.65	16	23.62	36.38	60	16.91	33.09	50	Neutral
28.974	16	24.48	35.52	60	18.1	31.9	50	Neutral

FCC ID: WJ9-RRU4ELCU6

Test point
Operation mode:
Remarks:

L1
Standby mode

Result: Passed

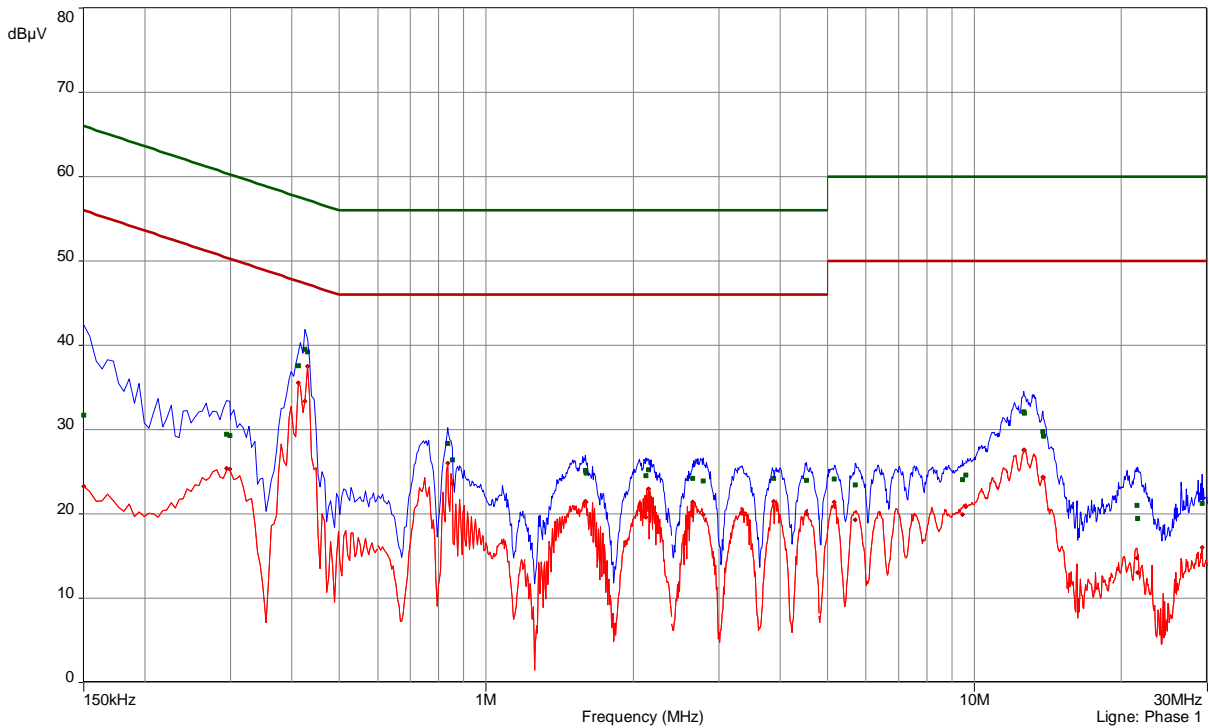

freq MHz	SR	QP dB(µV)	margin dB	limit dB	AV dB(µV)	margin dB	limit dB	line
0.15	1	31.73	34.27	66	23.28	32.72	56	Phase 1
0.294	1	29.44	30.97	60.41	25.42	24.99	50.41	Phase 1
0.2985	1	29.28	31	60.28	25.29	24.99	50.28	Phase 1
0.4125	2	37.57	20.03	57.6	35.59	12.01	47.6	Phase 1
0.426	2	39.53	17.8	57.33	33.39	13.94	47.33	Phase 1
0.4305	2	39.25	17.99	57.24	37.47	9.77	47.24	Phase 1
0.834	3	28.38	27.62	56	26	20	46	Phase 1
0.852	3	26.38	29.62	56	23.61	22.39	46	Phase 1
1.596	4	25.19	30.81	56	21.52	24.48	46	Phase 1
1.6005	4	24.87	31.13	56	21.4	24.6	46	Phase 1
2.127	4	24.54	31.46	56	19.59	26.41	46	Phase 1
2.1495	4	25.24	30.76	56	22.94	23.06	46	Phase 1
2.652	5	24.22	31.78	56	21.37	24.63	46	Phase 1
2.787	5	23.95	32.05	56	19.96	26.04	46	Phase 1
3.885	5	24.23	31.77	56	21.48	24.52	46	Phase 1
4.533	5	23.97	32.03	56	20.02	25.98	46	Phase 1
5.169	6	24.14	35.86	60	21.42	28.58	50	Phase 1
5.709	6	23.46	36.54	60	19.31	30.69	50	Phase 1


FCC ID: WJ9-RRU4ELCU6

freq MHz	SR	QP dB(μ V)	margin dB	limit dB	AV dB(μ V)	margin dB	limit dB	line
9.4665	6	24.06	35.94	60	19.96	30.04	50	Phase 1
9.5925	6	24.61	35.39	60	20.86	29.14	50	Phase 1
12.6285	7	32.12	27.88	60	27.57	22.43	50	Phase 1
12.6465	7	31.98	28.02	60	27.61	22.39	50	Phase 1
13.7895	7	29.74	30.26	60	24.35	25.65	50	Phase 1
13.857	7	29.25	30.75	60	24.33	25.67	50	Phase 1
21.522	8	20.99	39.01	60	14.78	35.22	50	Phase 1
21.6165	8	19.48	40.52	60	13.08	36.92	50	Phase 1
29.235	8	21.28	38.72	60	16.01	33.99	50	Phase 1

FCC ID: WJ9-RRU4ELCU6

Test point N
 Operation mode: Standby mode
 Remarks:

Result: Passed

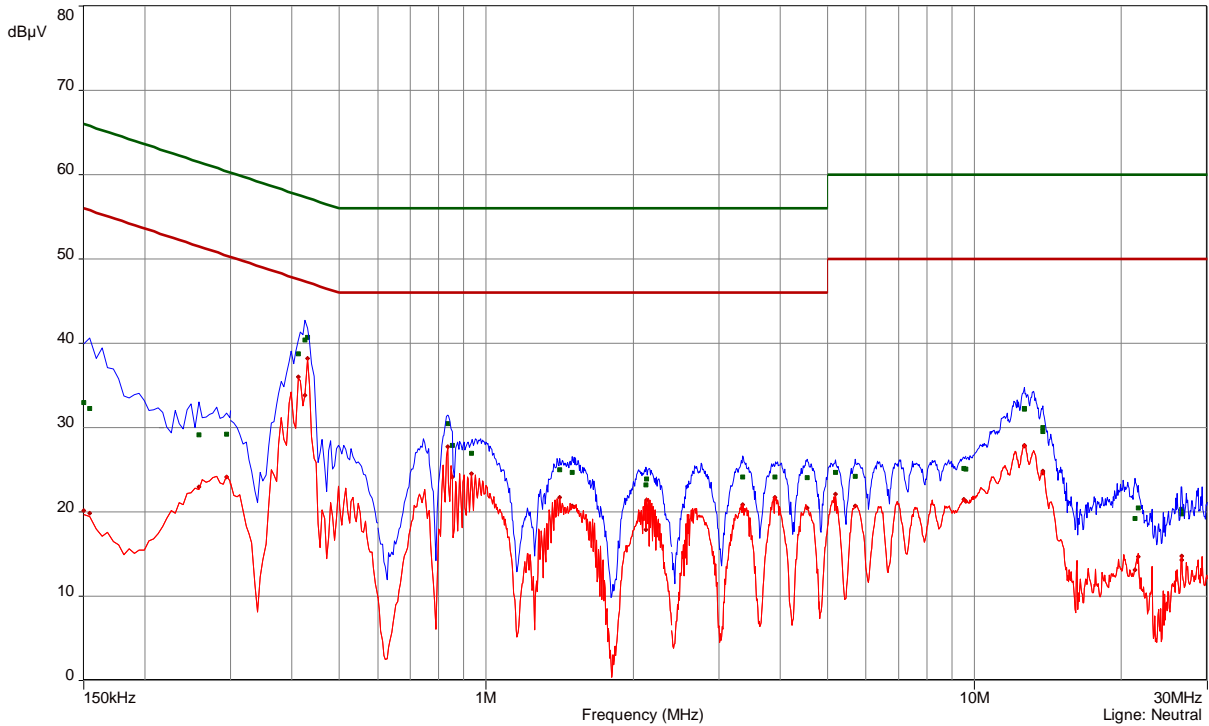

freq MHz	SR	QP dB(µV)	margin dB	limit dB	AV dB(µV)	margin dB	limit dB	line
0.15	9	32.99	33.01	66	20.16	35.84	56	Neutral
0.1545	9	32.29	33.46	65.75	19.87	35.88	55.75	Neutral
0.258	9	29.18	32.31	61.5	23	28.49	51.5	Neutral
0.294	9	29.24	31.17	60.41	24.15	26.26	50.41	Neutral
0.4125	10	38.73	18.87	57.6	36	11.6	47.6	Neutral
0.426	10	40.43	16.9	57.33	33.82	13.51	47.33	Neutral
0.4305	10	40.69	16.55	57.24	38.23	9.01	47.24	Neutral
0.834	11	30.46	25.54	56	27.73	18.27	46	Neutral
0.852	11	27.9	28.1	56	24.11	21.89	46	Neutral
0.933	11	26.98	29.02	56	24.54	21.46	46	Neutral
1.416	12	25.01	30.99	56	21.69	24.31	46	Neutral
1.5015	12	24.73	31.27	56	20.68	25.32	46	Neutral
2.127	12	23.24	32.76	56	17.88	28.12	46	Neutral
2.1315	12	23.9	32.1	56	21.44	24.56	46	Neutral
3.3495	13	24.13	31.87	56	20.84	25.16	46	Neutral
3.903	13	24.17	31.83	56	21.76	24.24	46	Neutral
4.542	13	24.09	31.91	56	20.45	25.55	46	Neutral
5.187	14	24.66	35.34	60	22.09	27.91	50	Neutral
5.7045	14	24.2	35.8	60	20.74	29.26	50	Neutral

FCC ID: WJ9-RRU4ELCU6

freq MHz	SR	QP dB(μV)	margin dB	limit dB	AV dB(μV)	margin dB	limit dB	line
9.525	14	25.19	34.81	60	21.48	28.52	50	Neutral
9.5925	14	25.09	34.91	60	21.29	28.71	50	Neutral
12.642	15	32.3	27.7	60	27.9	22.1	50	Neutral
12.6465	15	32.2	27.8	60	27.82	22.18	50	Neutral
13.7895	15	29.52	30.48	60	24.6	25.4	50	Neutral
13.794	15	30.04	29.96	60	24.83	25.17	50	Neutral
21.306	16	19.2	40.8	60	13.12	36.88	50	Neutral
21.6615	16	20.44	39.56	60	14.66	35.34	50	Neutral
26.607	16	20.32	39.68	60	14.79	35.21	50	Neutral
26.6115	16	19.78	40.22	60	14.29	35.71	50	Neutral

FCC ID: WJ9-RRU4ELCU6


5.2 20 dB bandwidth

For test instruments and accessories used see section 6 Part MB.

5.2.1 Description of the test location

Test location: Shielded room S5

5.2.2 Photo documentation of the test set-up

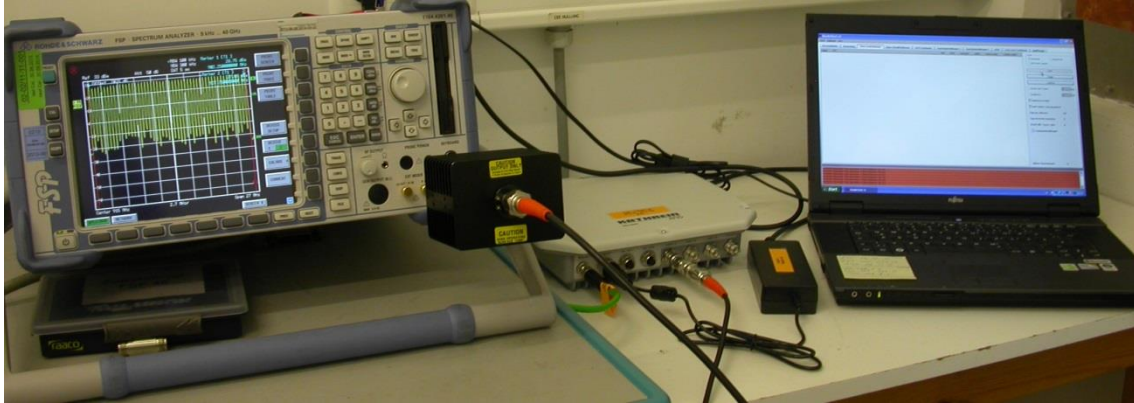

5.2.1 Applicable standard

According to FCC Part 15C, Section 15.247(a):

Frequency hopping systems shall have hopping carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.2.2 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -20 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

FCC ID: WJ9-RRU4ELCU6

5.2.3 Test result

Power setting 30.0 dBm:

Channel No.	-20 dB Bandwidth below peak (kHz)
CH 1 (902.25 MHz)	46.80
CH 26 (914.75 MHz)	44.40
CH 52 (927.75 MHz)	45.00

Bandwidth limit according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	Limit -20 db bandwidth (kHz)
902-928	≥ 50	< 250

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: WJ9-RRU4ELCU6


5.2.4 Test protocol

Channel 1
902.25 MHz



*RBW 1 kHz Marker 1 [T1]
 VBW 3 kHz 7.83 dBm
 Ref 33 dBm Att 50 dB SWT 300 ms 902.22840000 MHz

1 PK
VIEW

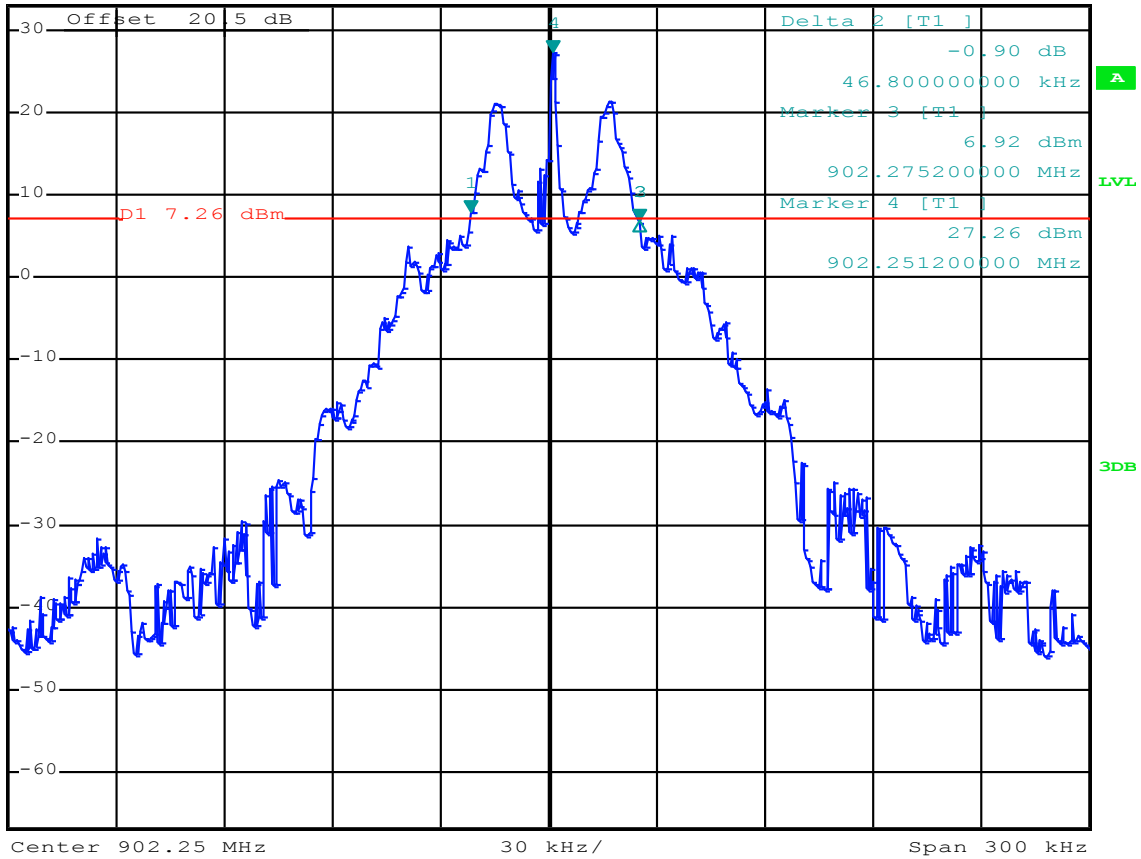


FCC ID: WJ9-RRU4ELCU6

Channel 26
914.75 MHz



*RBW 1 kHz Marker 1 [T1]
VBW 3 kHz 4.39 dBm
Ref 33 dBm Att 50 dB SWT 300 ms 914.729000000 MHz

1 PK
VIEW

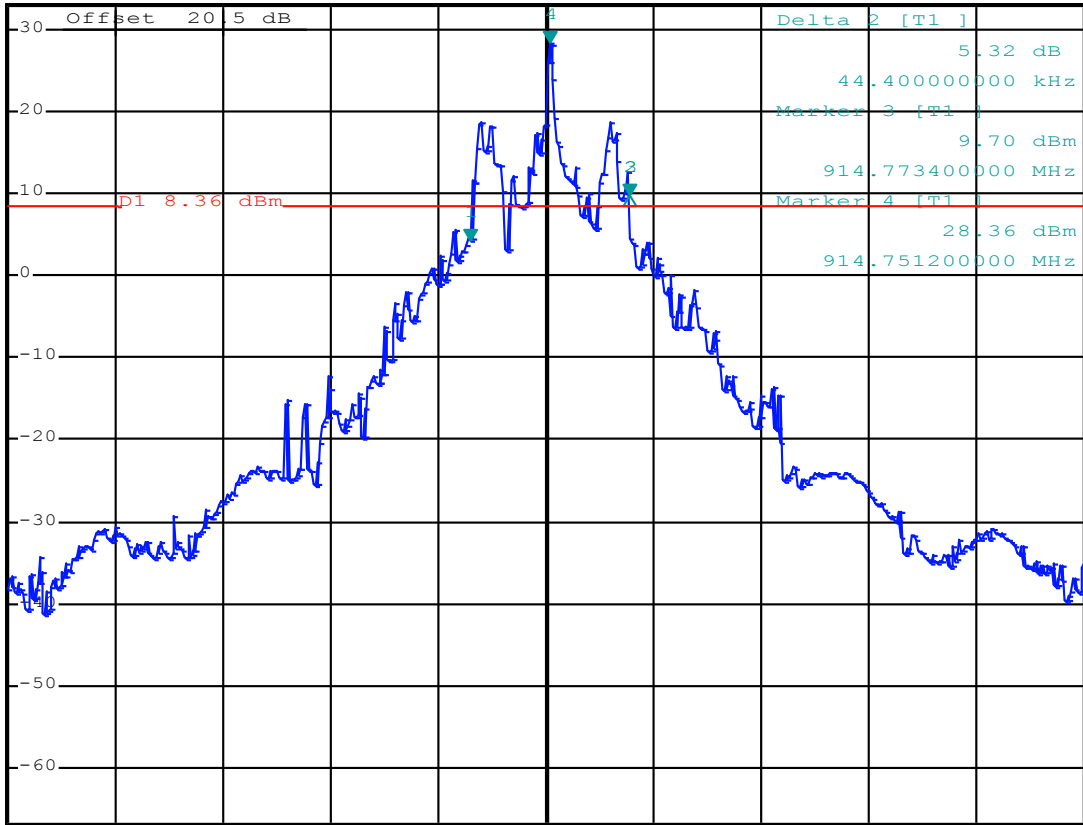

Center 914.75 MHz 30 kHz/ Span 300 kHz


FCC ID: WJ9-RRU4ELCU6

Channel 52
927.75 MHz



*RBW 1 kHz Marker 1 [T1]
 VBW 3 kHz 7.50 dBm
 Ref 33 dBm Att 50 dB SWT 300 ms 927.729000000 MHz

1 PK
VIEW

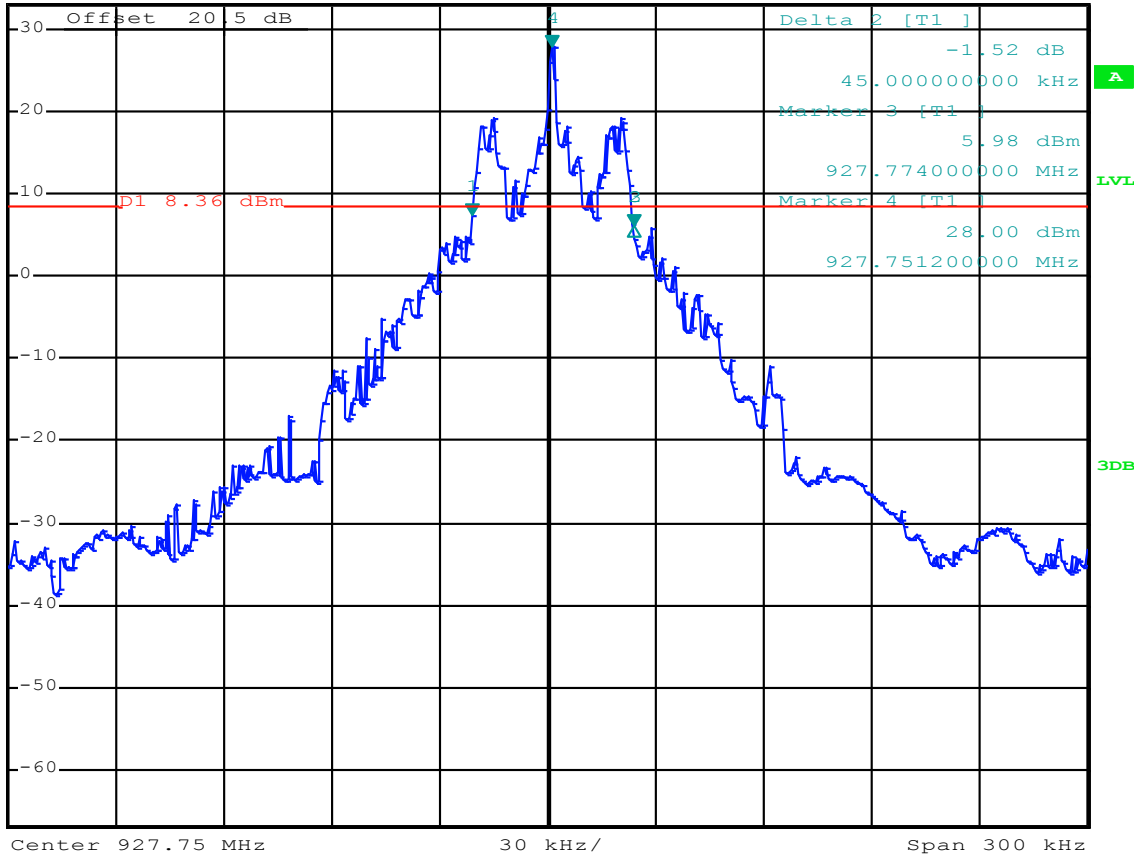

FCC ID: WJ9-RRU4ELCU6


5.3 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part CPC 2.

5.3.1 Description of the test location

Test location: Shielded room S5

5.3.2 Photo documentation of the test set-up

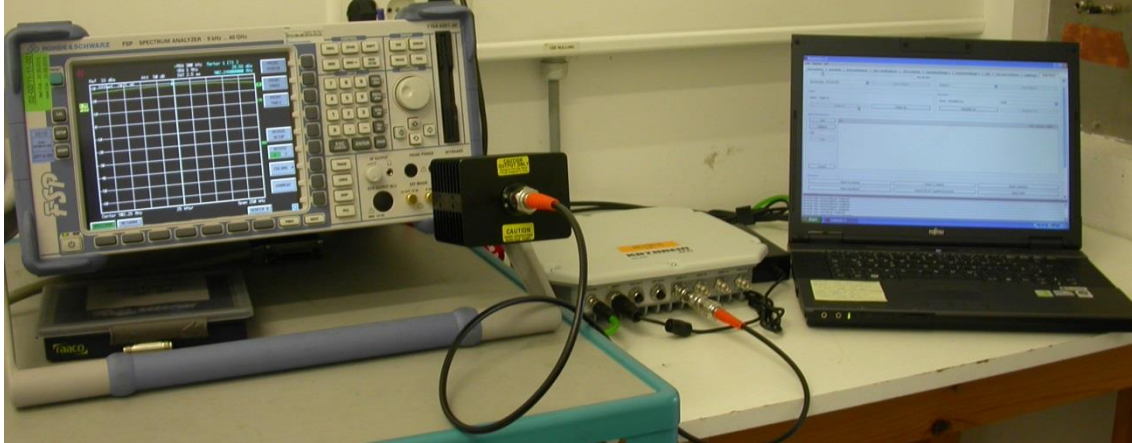

5.3.3 Applicable standard

According to FCC Part 15C, Section 15.247(b)(2):

For frequency hopping systems operating in the 902-928 MHz band the maximum peak conducted output power shall not exceed the limit of 1 watt for systems employing at least 50 hopping channels.

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.3.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode using the assigned frequency.

Spectrum analyser settings:

RBW	300 kHz	Sweep time	5 ms (Auto)
VBW	1 MHz	Power Mode	Max. hold
Detector	Peak	Span	25 0 kHz

FCC ID: WJ9-RRU4ELCU6

5.3.5 Test result

- a.) Power setting 30.0 dBm
= Antenna gain: < 6.0 dBi

Type	Order-No.	Shortened designation
MiRa FCC	52010083	Mid Range Antenna FCC, 902-928 MHz, 100° circular (2.5 dBic)
S-MiRa ETSI/FCC	52010172	Short-Mid Range Antenna ETSI/FCC, 865-928 MHz, 100° circular (-10.0 dBic)
U-LoRa ETSI/FCC	52010092	Ultra Low Range Antenna ETSI/FCC, 865-928 MHz (-30.0 dBi)
LoRa FCC	52010085	Low Range Antenna FCC, 902-928 MHz (-15.0 dBi)
SMSH-30-30-KRAI-Slave	52010197	Smart Shelf Antenna, 865-928 MHz (-7.0 dBic)

To show the compliance with the standard the antenna gain from the **MiRa FCC (2.5 dBic, Order No. 52010083)** was used for measurement. Antenna gain of the used antenna is < 6.0 dBi. So the power setting is 30.0 dBm.

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Delta (dB)
1	902.25	29.74	30.0	- 0.26
26	914.75	29.82	30.0	- 0.18
52	927.25	29.41	30.0	- 0.59

Note: Test cable loss and fixed attenuation of 20 dB are included in the analyzer reading (Transducer factor).

- b.) Power setting 25.5 dBm
= Antenna gain: > 6.0 dBi

Type	Order-No.	Shortened designation
WiRa 30° FCC	52010087	Wide Range-Antenna FCC, 902-928 MHz, 30° circular (10.5 dBic)
WiRa 70° FCC	52010079	Wide Range Antenna FCC, 902-928 MHz, 70° circular (8.3 dBic)
WiRa-70°-KRAI-FCC	52010194	Wide Range KRAI Antenna FCC, 902-928 MHz (7.5 dBi)

To show the compliance with the standard the antenna gain from the **WiRa 30° FCC (10.5 dBic, Order No. 52010087)** was used for measurement. Antenna gain of the used antenna is > 6.0 dBi. So the power setting should be reduced at 4.5 dB.

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Delta (dB)
1	902.25	25.18	30.0	-10.82
26	914.75	25.35	30.0	-10.65
52	927.25	24.90	30.0	-11.10

Note: Test cable loss and fixed attenuation of 20 dB are included in the analyzer reading (Transducer factor).

FCC ID: WJ9-RRU4ELCU6

Peak Power Limit according to FCC Part 15C, Section 15.247(b)(2):

Frequency (MHz)	Hopping channels	Hop. CH carrier frequ. separation	Peak Power Limit	
			(dBm)	(W)
902-928	≥ 50		30	1.0

The requirements are **FULFILLED**.

Remarks: The conducted output power has been reduced by the amount in dB that the directional gain of
the antenna exceeds 6 dBi. Refer to 5.3.5 b.) above.

FCC ID: WJ9-RRU4ELCU6

5.4 Spurious RF conducted emissions

For test instruments and accessories used see section 6 Part SEC1, SEC2 and SEC3.

5.4.1 Description of the test location

Test location: Shielded room S5

5.4.2 Photo documentation of the test set-up



5.4.3 Applicable standard

According to FCC Part 15C, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency band 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.4.4 Description of Measurement

A spectrum analyzer is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode at the assigned frequency.

Spectrum analyzer settings:

RBW	100 kHz
VBW	300 kHz
Detector	Max. peak
Trace:	Max. hold
Sweep time	auto

FCC ID: WJ9-RRU4ELCU6

5.4.5 Test result

Power setting 30.0 dBm

Hopping frequency from 902.25 to 927.75 MHz, max. level 29.28 dBm			
Frequency (MHz)	Peak power * (dBm)	Limit (-20 dB) (dBm)	Delta (dB)
108.30	-52.37	9.28	-61.65
163.92	-54.97	9.28	-64.25
2710.00	-24.88	9.28	-34.19
2752.00	-37.50	9.28	-46.78

* Fixed attenuation of 20 dB is included in the Peak power.

The requirements are **FULFILLED**.

Remarks:

All spurious emissions falling in restricted bands have been measured radiated.

For detailed results please refer to following test protocols.



In the frequency range from 9 kHz to 30 MHz no emissions could be measured.

Test was performed in frequency hopping mode from 902.25 to 927.75 MHz.

This mode represents the worst case mode of the EuT.


FCC ID: WJ9-RRU4ELCU6

Conducted RF emission from 9 kHz to 30 MHz

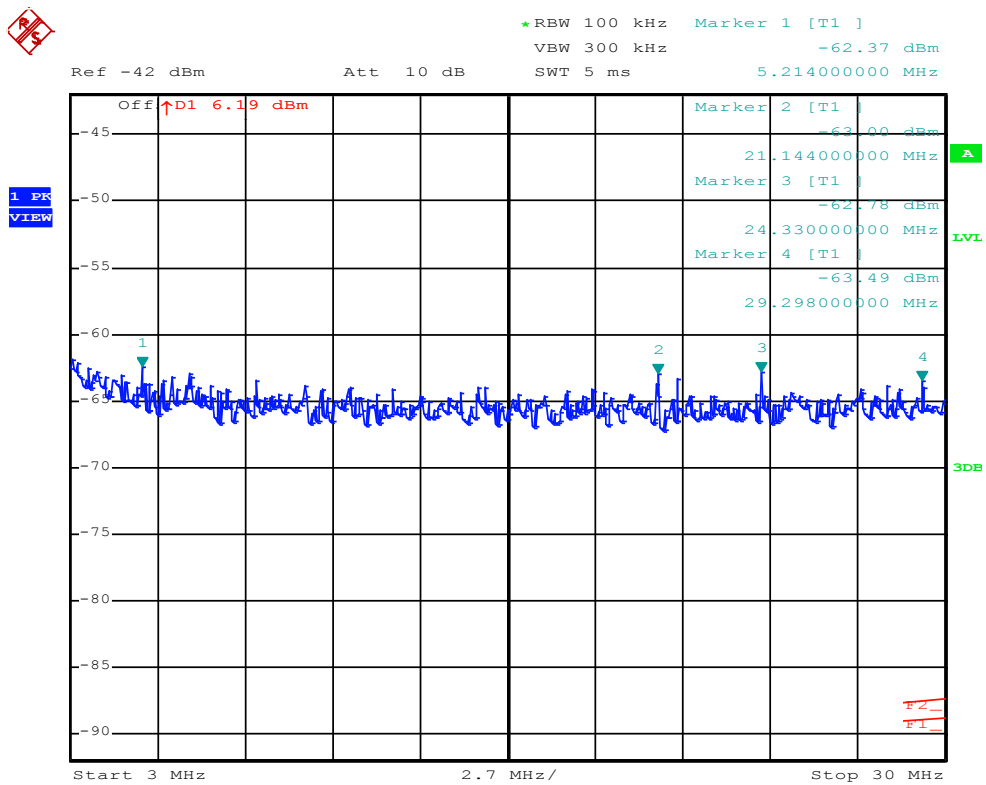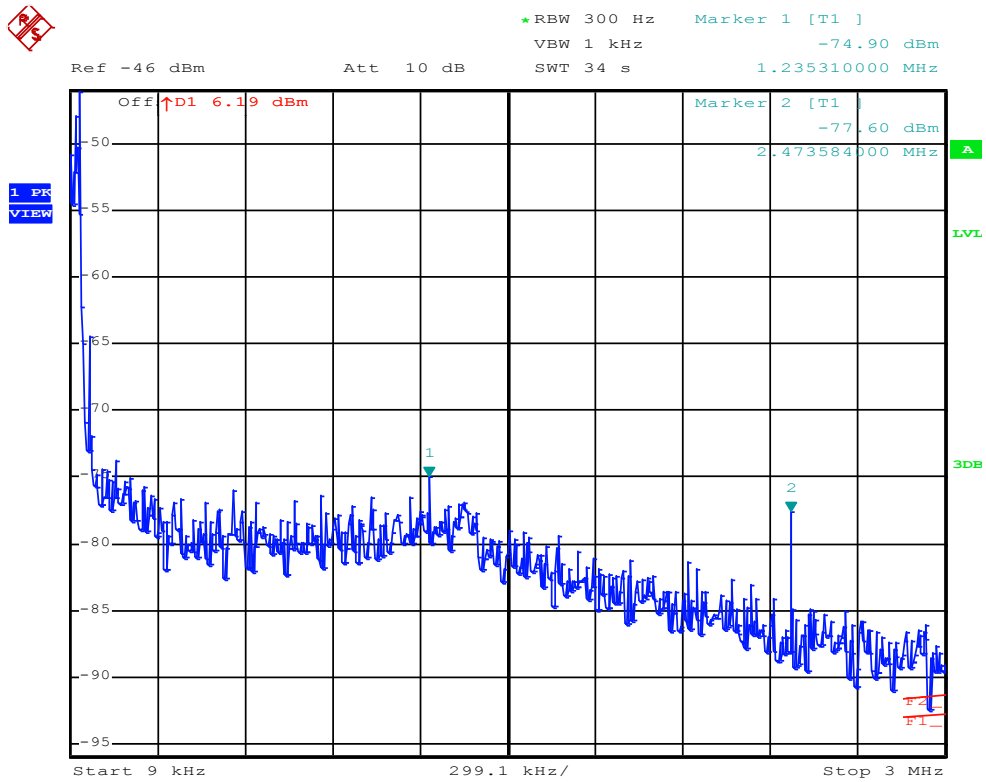


FCC ID: WJ9-RRU4ELCU6

Conducted RF emission from 30 to 1000 MHz

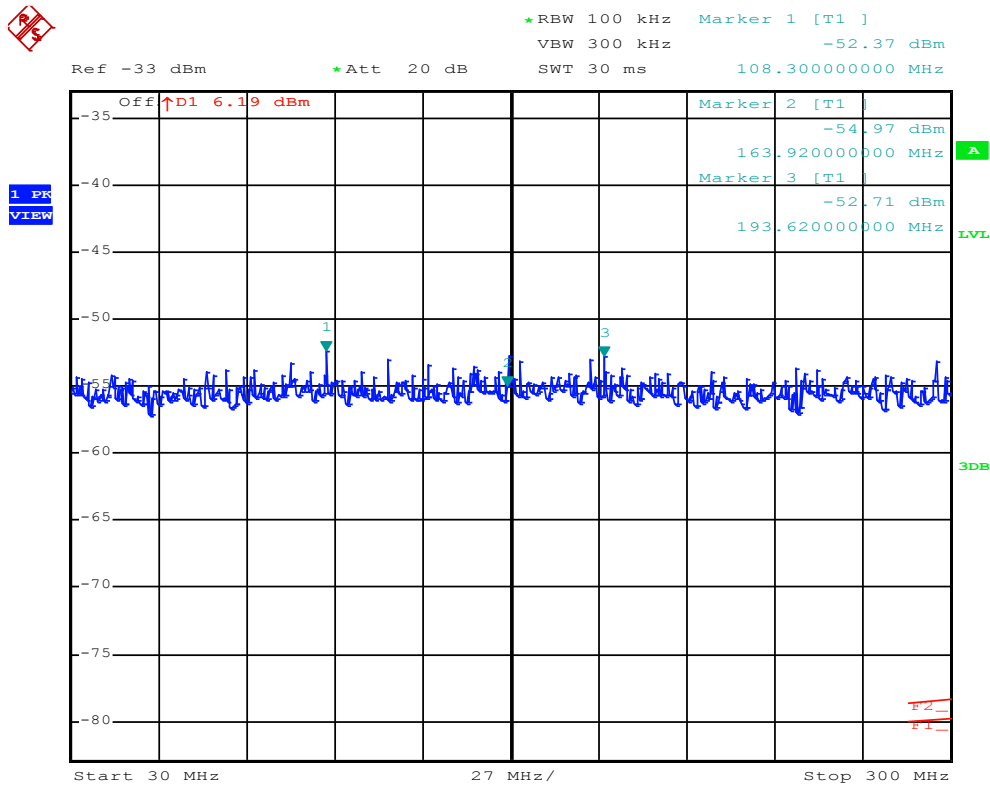

Note: Signal level No.1 and No.2 are located in restricted band.

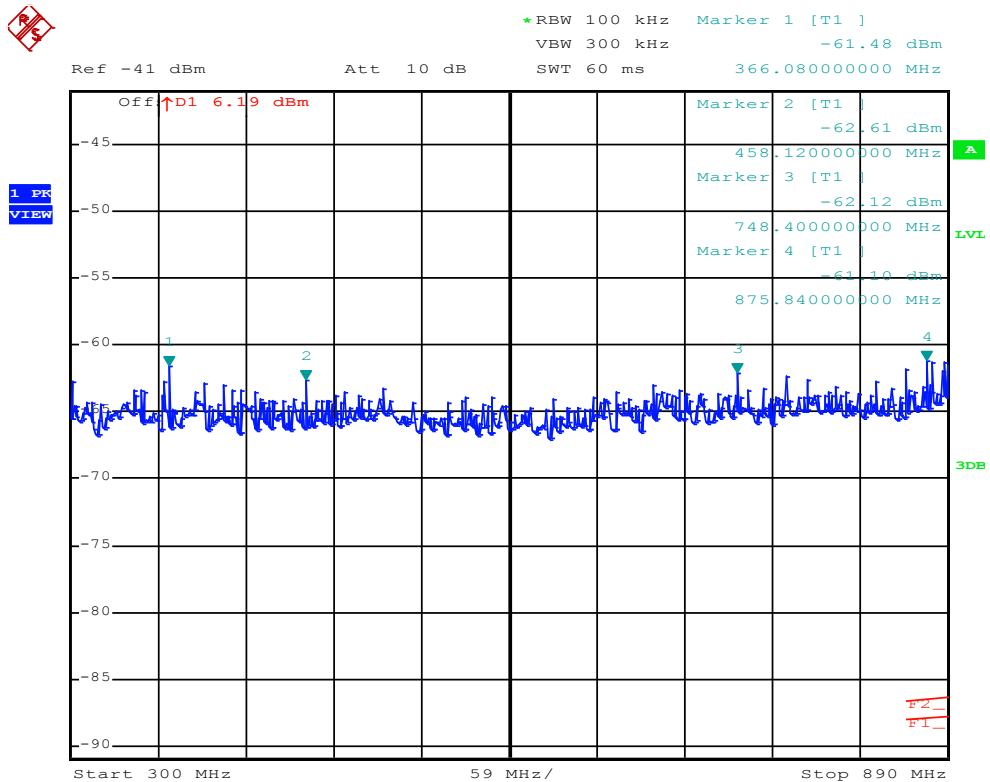


FCC ID: WJ9-RRU4ELCU6
 Conducted RF emission from 30 to 1000 MHz
 (Band edge)



*RBW 100 kHz Marker 1 [T1]
 VBW 300 kHz 29.28 dBm


Ref 33 dBm Att 50 dB SWT 5 ms 921.300000000 MHz

1 PK
 VIEW

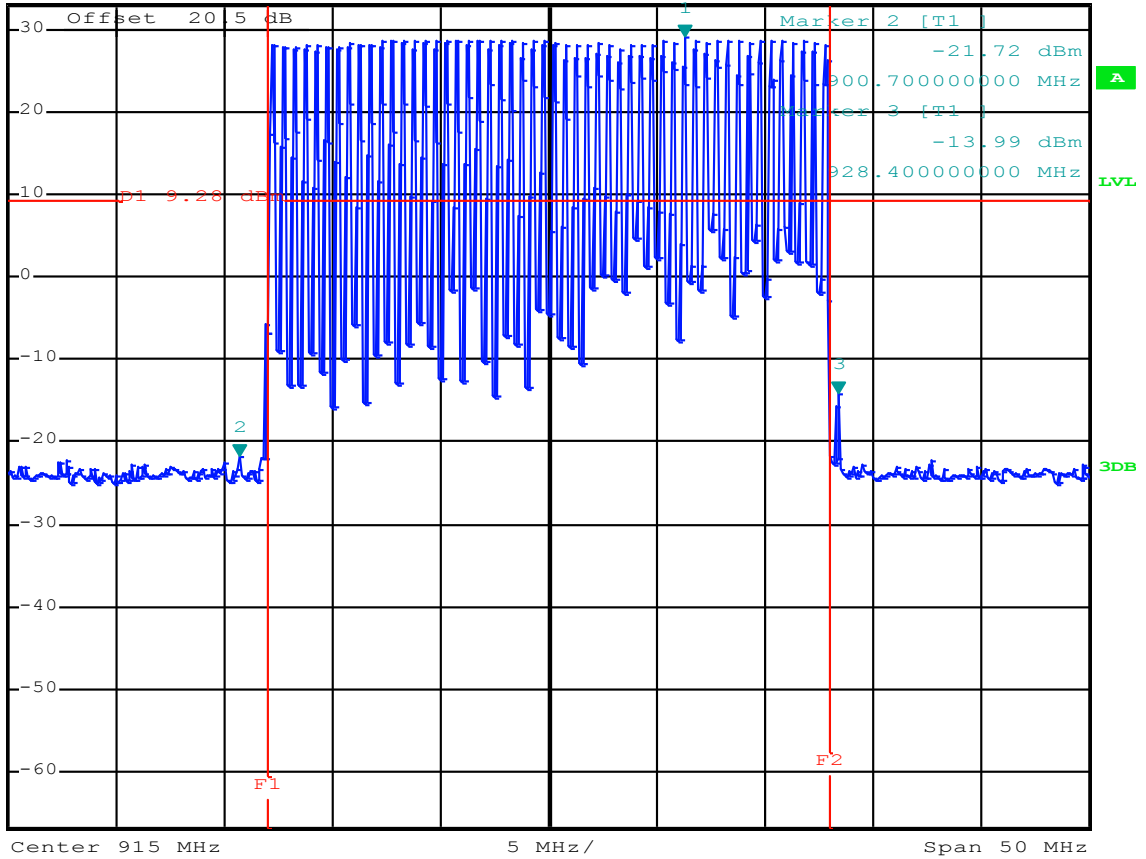


FCC ID: WJ9-RRU4ELCU6

Conducted RF emission from 1 to 10 GHz

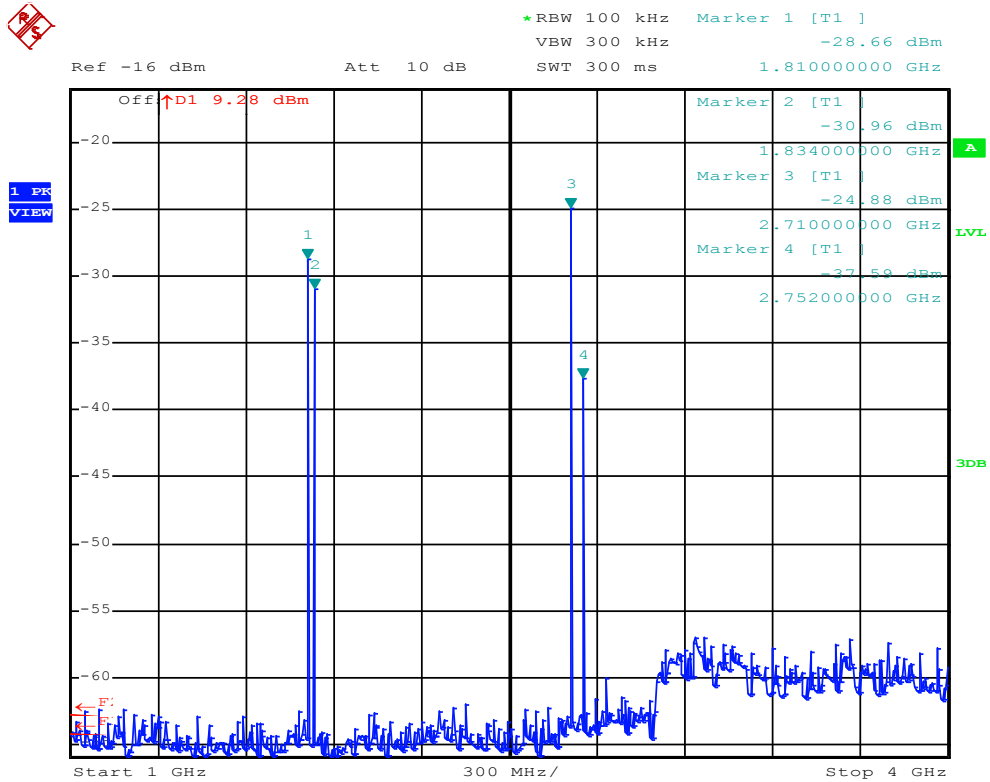

Note: Signal level No.3 and No.4 are located in restricted band.

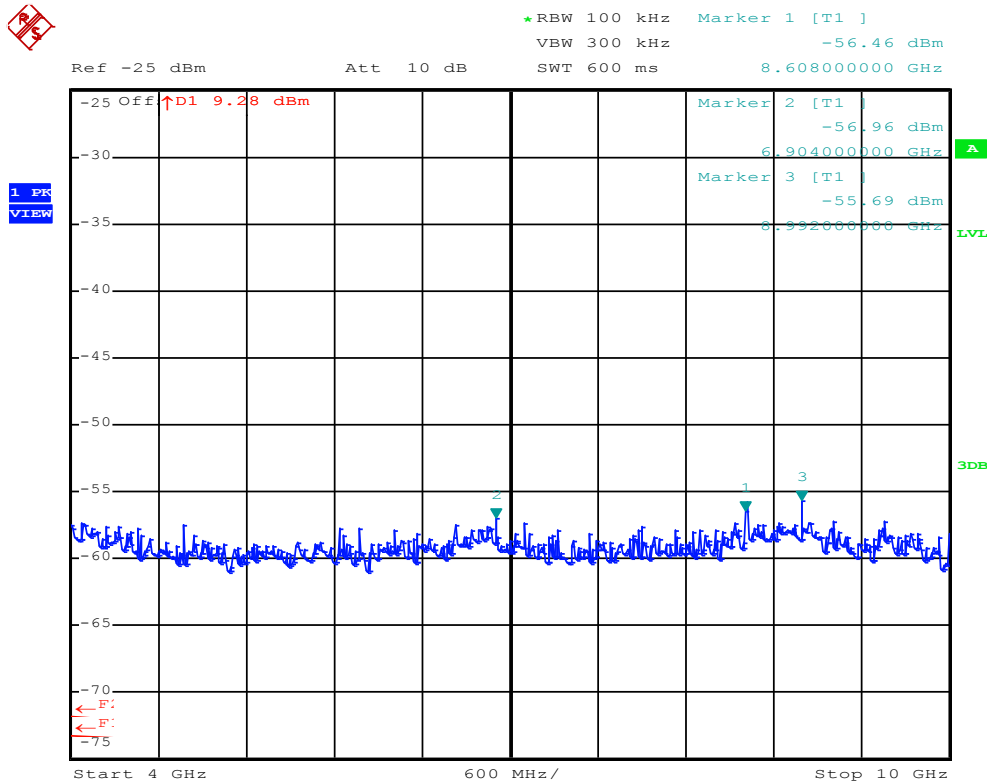

FCC ID: WJ9-RRU4ELCU6

5.5 Spurious radiated emissions


For test instruments and accessories used see section 6 Part SER 1, SER 2, SER 3.

5.5.1 Description of the test location


Test location: OATS1
Test distance: 3 metres

Test location: Anechoic Chamber A1
Test distance: 3 metres

5.5.2 Photo documentation of the test set-up

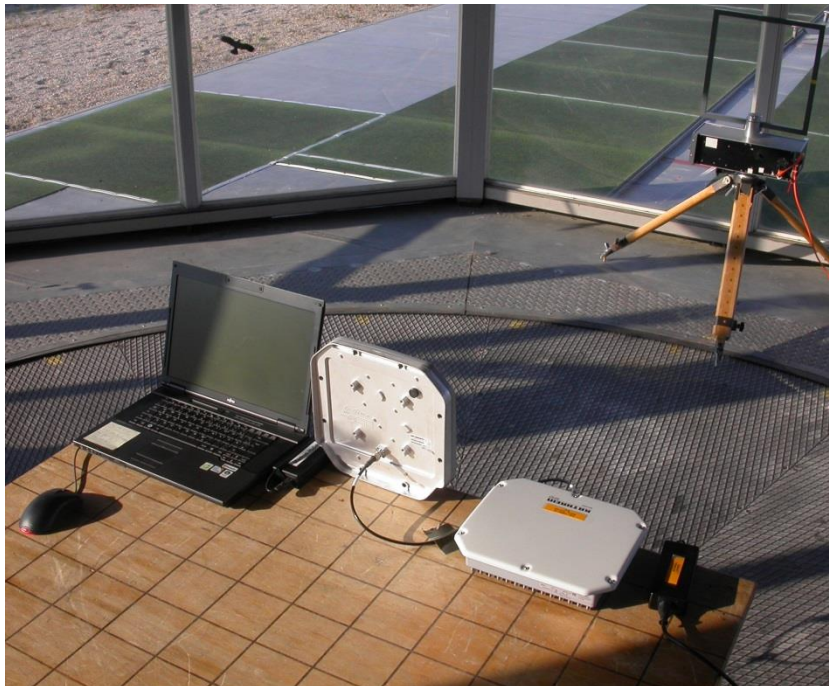

FCC ID: WJ9-RRU4ELCU6

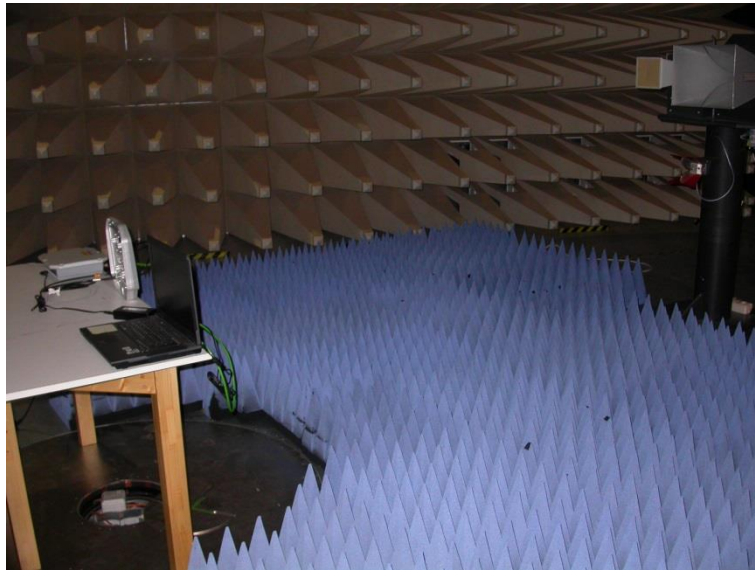

5.5.3 Applicable standard

According to FCC Part 15, Section 15.247(d):

In any 100 kHz bandwidth outside the frequency bands 902 to 928 MHz, the digitally modulated radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or an radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a) (see Section 15.205(c)).

5.5.4 Description of Measurement

Radiated spurious emissions from the EUT are measured in the frequency range of 9 kHz to 1000 MHz using a tuned receiver and appropriate broadband linear polarized antennas. The measurements are made with 120 kHz bandwidth and quasi-peak detection (200 Hz, 9 kHz up to 30 MHz). The EUT was placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the equipment under test will be in accordance to ANSI C63.4. The antenna was positioned 3 metres horizontally from the EUT. To locate maximum emissions from the EUT the antenna is shifted in height from 1 to 4 metres, after the EUT is rotated 360 degrees. The measurement scan is made in horizontal and vertical polarization of the antenna.

For the radiated measurement up from 1 GHz to maximum frequency as specified in Section 15.33, a spectrum analyzer and appropriate linear polarized antennas are used. The EUT is placed on a 1.0 X 1.5 metres non-conducting table 80 centimetres above the ground plane. The set up of the EUT will be in accordance to ANSI C63.4. The antenna was positioned 3 m horizontally from the EUT. To locate maximum emissions the EUT was rotated 360 degrees in the fully anechoic chamber. The measurement scan is made in horizontal and vertical polarization of the antenna. For testing above 1 GHz, if the emission level of the EUT in peak mode complies with the average limit is 20 dB lower, then testing will be stopped and peak values of the EUT will be reported, otherwise, the emission will be measured in average mode again and reported.

FCC ID: WJ9-RRU4ELCU6
5.5.5 Test result
5.5.5.1 Radiated emission test f < 1 GHz

Type	Order-No.	Shortened designation
WiRa 30° FCC	52010087	Wide Range-Antenna FCC, 902-928 MHz, 30° circular (10.5 dBic) – Power setting: 25.5 dBm
WiRa 70° FCC	52010079	Wide Range Antenna FCC, 902-928 MHz, 70° circular (8.3 dBic) – Power setting: 27.7 dBm
WiRa-70°-KRAI-FCC	52010194	Wide Range KRAI Antenna FCC, 902-928 MHz (7.5 dBi) – Power setting: 28.5 dBm

Frequency [kHz]	L: QP [dBµV]	L: AV [dBµV]	Bandwidth [kHz]	Correct. [dB]	L: QP [dBµV/m]	L: AV [dBµV/m]	Limit [dBµV/m]	Delta [dB]
536.8	24.1	19.7	9.0	20	44.1	39.7	73.0	-33.3
1073.6	23.4	18.0	9.0	20	43.4	38.0	67.0	-29.0
1342.0	21.6	15.9	9.0	20	41.6	35.9	65.0	-29.1

Frequency [MHz]	L: QP [dBµV]	Correct. [dB]	L: QP [dBµV/m]	Limit [dBµV/m]	Delta [dB]
33.78	3.7	13.4	17.1	40.0	-22.9
118.54	9.3	12.9	22.2	43.5	-21.3
517.43	4.8	21.9	26.7	46.0	-19.3

Note: No unwanted emissions from the EuT could be measured in the relevant frequency ranges and each antenna with the different power setting. Only ambient noises could be detected!

5.5.5.2 Radiated emission test f > 1GHz

- Power setting 25.5 dBm
- Antenna: WiRa-30° FCC (10.5 dBic)

Frequency (GHz)	L: PK (dBµV)	L: AV (dBµV)	Bandwidth (kHz)	Correct. (dB)	L: PK dB(µV/m)	L: AV dB(µV/m)	Limit AV dB(µV/m)	Delta (dB)
2.710	47.5	42.9	1000	3.7	51.2	46.6	54.0	-7.4
2.752	46.8	39.7	1000	3.4	50.2	43.1	54.0	-10.9
3.613	42.8	37.5	1000	2.5	45.3	40.0	54.0	-14.0

- Power setting 25.5 dBm
- Antenna: WiRa-70° FCC (8.3 dBic)

Frequency (GHz)	L: PK (dBµV)	L: AV (dBµV)	Bandwidth (kHz)	Correct. (dB)	L: PK dB(µV/m)	L: AV dB(µV/m)	Limit AV dB(µV/m)	Delta (dB)
2.710	47.0	42.5	1000	3.7	50.7	46.2	54.0	-7.8
2.752	45.9	39.7	1000	3.4	49.3	43.1	54.0	-10.9
3.613	44.0	38.2	1000	2.5	46.5	40.7	54.0	-13.3

FCC ID: WJ9-RRU4ELCU6

- Power setting 28.5 dBm
- Antenna: WiRa-70°-KRAI-FCC (7.5 dBic)

Frequency (GHz)	L: PK (dB μ V)	L: AV (dB μ V)	Bandwidth (kHz)	Correct. (dB)	L: PK dB(μ V/m)	L: AV dB(μ V/m)	Limit AV dB(μ V/m)	Delta (dB)
2.710	47.7	43.1	1000	3.7	51.4	46.1	54.0	-7.9
2.752	46.4	40.2	1000	3.4	49.8	43.6	54.0	-10.4
3.613	43.2	37.7	1000	2.5	40.2	40.2	54.0	-13.8

*) Average values were measured with spectrum analyzer by the following settings

RBW: 1 MHz
VBW: 10 Hz
Sweep: Auto

Radiated limits according to FCC Part 15C, Section 15.209(a) for spurious emissions:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	(μ V/m)	dB(μ V/m)	
0.009 - 0.490	2400/F(kHz)		300
0.490 - 1.705	24000/F(kHz)		30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

FCC ID: WJ9-RRU4ELCU6
Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209: (Refer to section 5.5.5.1)

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

The requirements are **FULFILLED**.

Remarks: During the test the EUT was set into TX continuous mode with normal modulation.

The measurement was performed up to the 10th harmonic (10000 MHz).

Test was performed in frequency hopping mode from 902.25 to 927.75 MHz.

This mode represents the worst case mode of the EuT.

FCC ID: WJ9-RRU4ELCU6


5.6 Hopping sequence

Requirement according to FCC Part 15C, Section 15.247(a):

The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.

Remarks: The channel is represented by a pseudo-random hopping sequence hopping through the 52 RF-channels.
For detailed information about the hopping sequence, please refer to "Theory of Operation Manual".

5.6.1 Test protocol

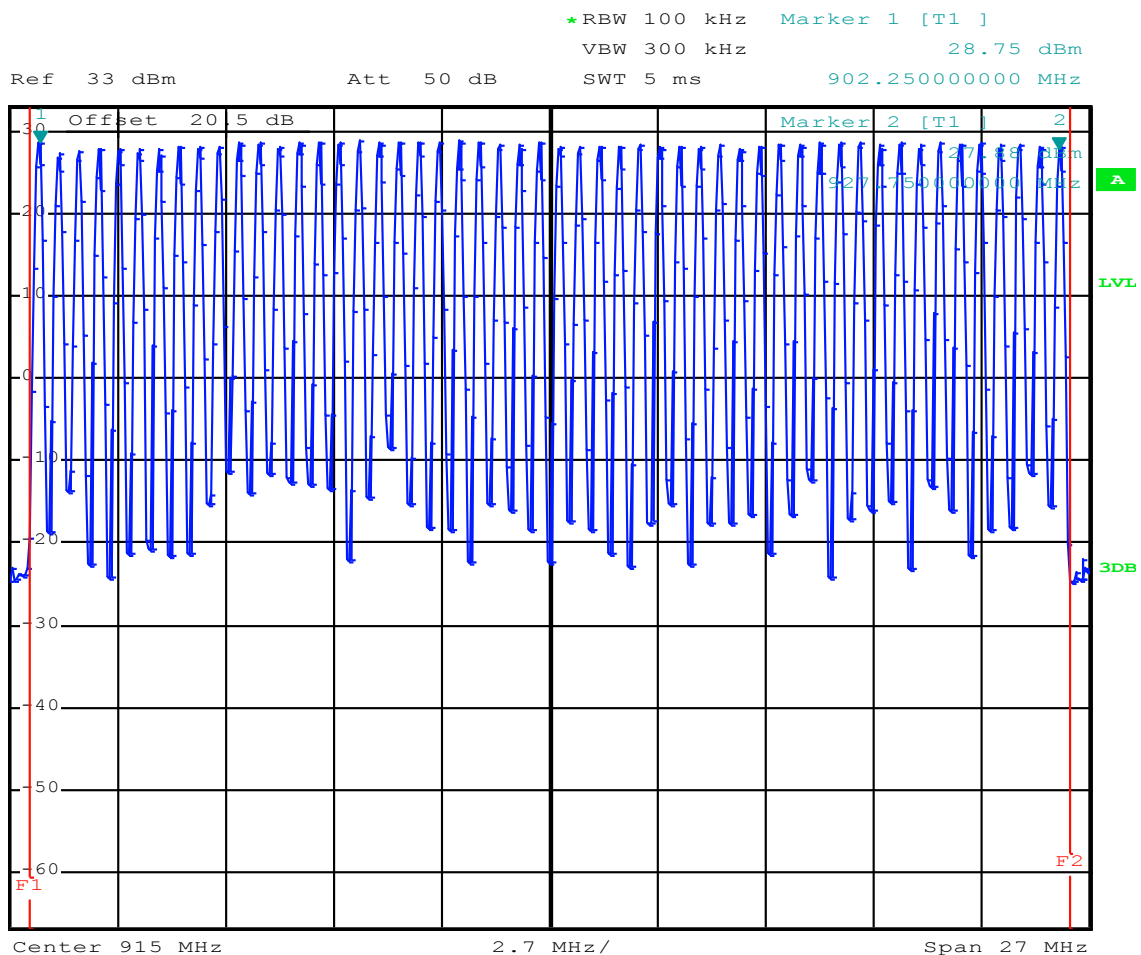

FCC ID: WJ9-RRU4ELCU6**5.7 Equal hopping frequency use**

Requirement according to FCC Part 15C, Section 15.247(a):
Each frequency must be used equally on the average by each transmitter.

Remarks: The device fulfills the requirement according to FCC Part 15C, Section 15.247(a).
The manufacturer declares in the system manual that this function is controlled via software.
For detailed information about the hopping sequence, please refer to
"Theory of Operation Manual".

5.8 Receiver input bandwidth

Requirement according to FCC Part 15C, Section 15.247(a):
The system receivers shall have input bandwidth that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signal.

Remarks: The receiver bandwidth is equal to the transmitter bandwidth in the 52 hopping channel mode.
(Declared by the manufacturer.)
For detailed information about the hopping sequence, please refer to
"Theory of Operation Manual".

FCC ID: WJ9-RRU4ELCU6


5.9 Dwell time

For test instruments and accessories used see section 6 Part DC.

5.9.1 Description of the test location

Test location: Shielded room S5

5.9.2 Photo documentation of the test set-up

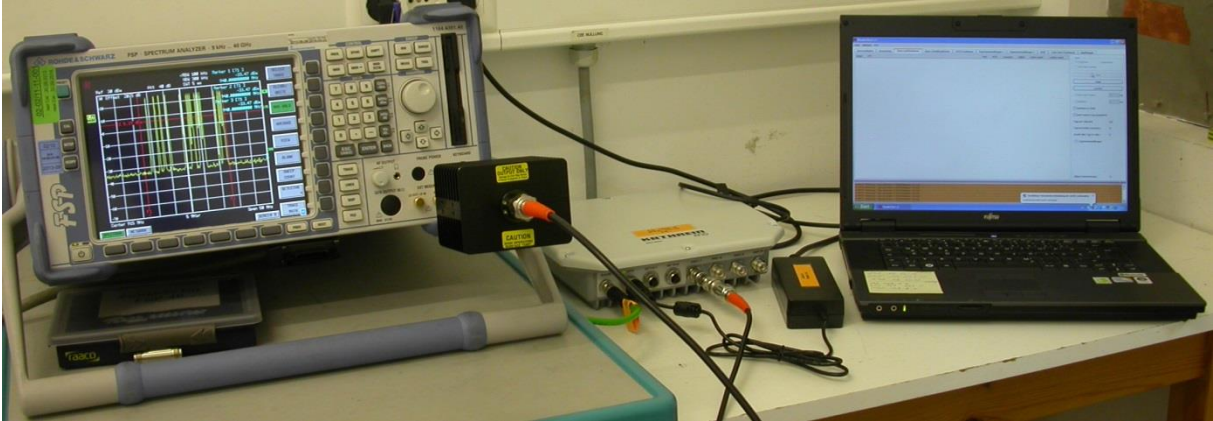

5.9.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(i):

Frequency hopping systems operating in the 902-928 MHz band: The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

5.9.4 Description of Measurement

The measurement was done using a spectrum analyser in time domain function and able to store the maximum time of a period. This time period has been stored and added up the appropriate time intervals the hopping system has applied this channel.

FCC ID: WJ9-RRU4ELCU6

5.9.5 Test result

Channel frequency (MHz)	Pulse Time (ms)	Number of Bursts (in 1 time period)	Dwell time (ms)
914.75	400	1	400

Requirement according to FCC Part15C, Section 15.247(a):

Frequency (MHz)	Hopping channels	time of one period (s)	Limit dwell time, AV (ms)
902-928	≥ 50	20	< 400


The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: WJ9-RRU4ELCU6

5.9.6 Test protocol

Time of occupancy (Dwell time)

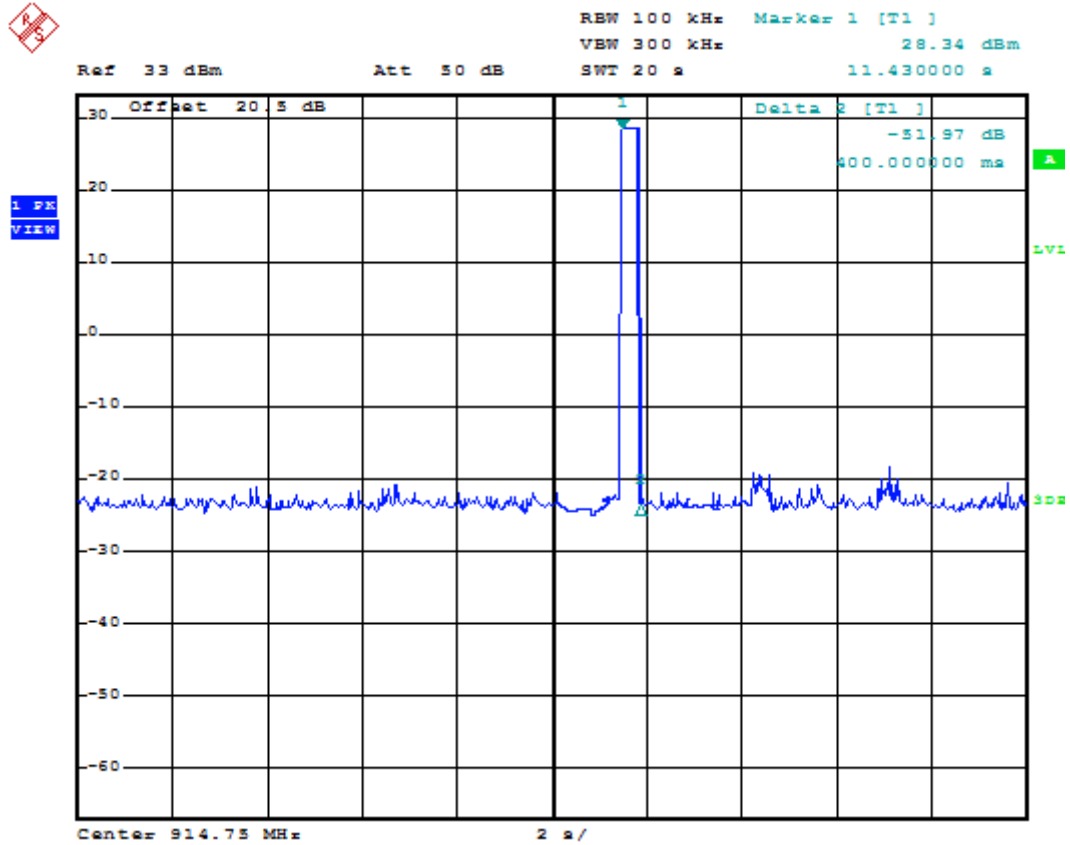

FCC ID: WJ9-RRU4ELCU6


5.10 Channel separation

For test instruments and accessories used see section 6 Part MB.

5.10.1 Description of the test location

Test location: Shielded room S5

5.10.2 Photo documentation of the test set-up

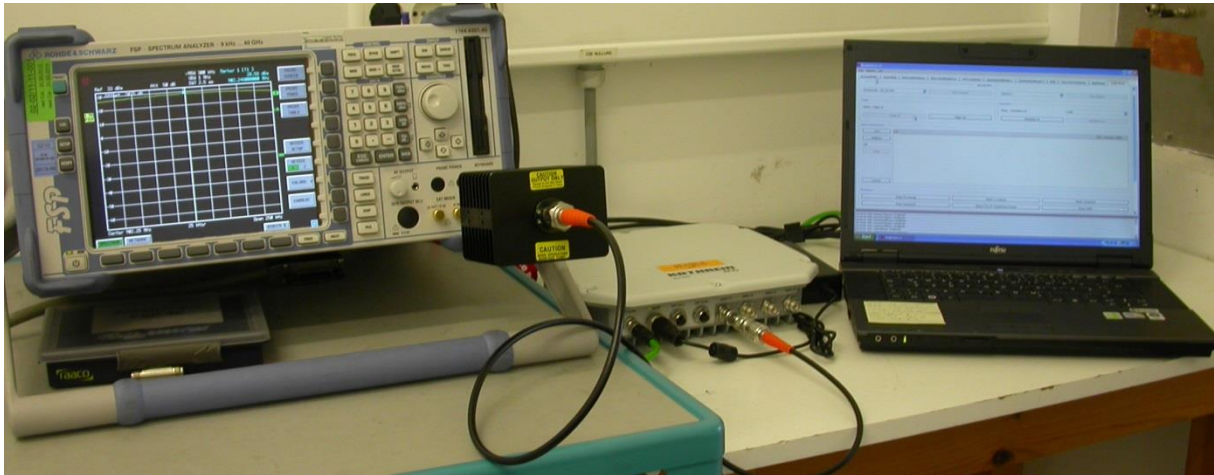

5.10.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1):

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

5.10.4 Description of Measurement

This measurement was done by using a spectrum analyser. The Span of the analyzer was set wide enough to capture 2 frequencies. The result of the channel separation was compared with the 20 dB bandwidth and recorded.

5.10.5 Test result

Channel 1 (MHz)	Channel 2 (MHz)	Channel separation (kHz)
902.25	902.75	500

FCC ID: WJ9-RRU4ELCU6

Limit according to FCC Part 15C, Section 15.247(a):


Frequency (MHz)	Hopping channels	Limit channel separation (kHz)
All systems		> 25 kHz or 20 dB bandwidth, which ever is greater
2400-2483.5	≥ 15	

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

5.10.6 Test protocol

Channel separation

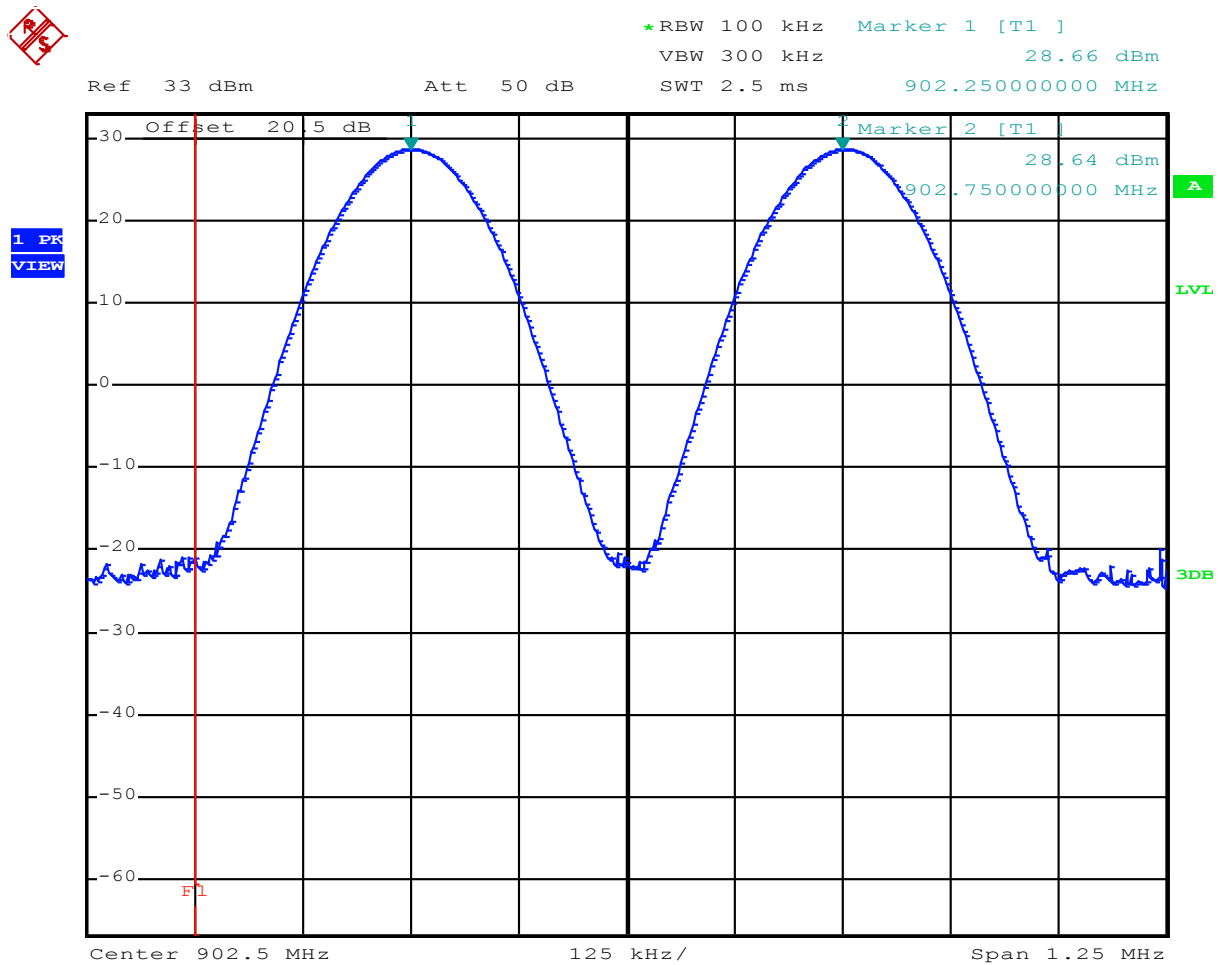

FCC ID: WJ9-RRU4ELCU6


5.11 Quantity of hopping channels

For test instruments and accessories used see section 6 Part MB.

5.11.1 Description of the test location

Test location: Shielded room S5

5.11.2 Photo documentation of the test set-up

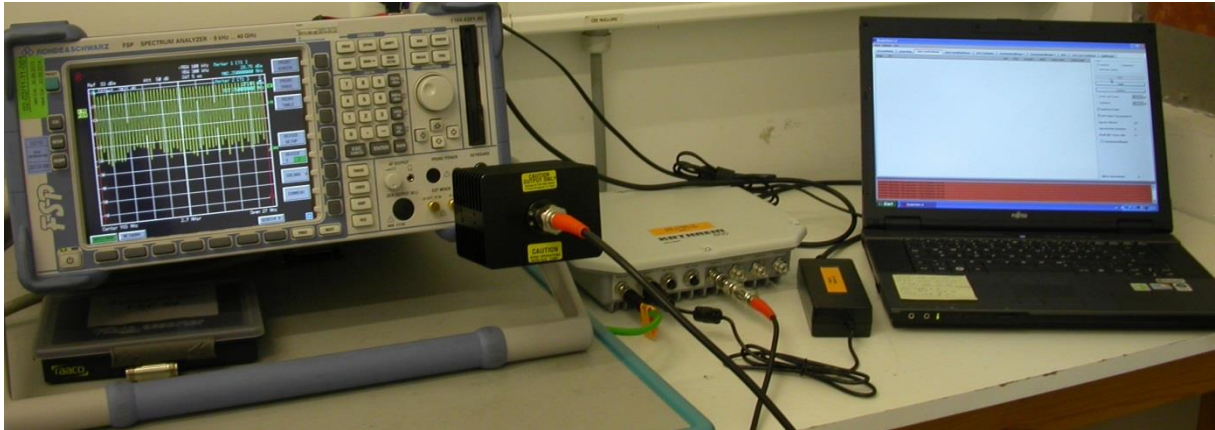

5.11.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(1)(i):

For frequency hopping systems operating in the 902-928 MHz band: If the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

5.11.4 Description of Measurement

This measurement was done by using a spectrum analyser. The EuT was transmitting at its maximum data rate. The Span of the analyzer was set wide enough to capture the frequency band from 902-928 MHz.

5.11.5 Test result

Hopping channel frequency range	Quantity of hopping channels value	Quantity of hopping channels minimum limit
902-928 MHz	52	50

FCC ID: WJ9-RRU4ELCU6

Limit according to FCC Part 15C, Section 15.247(1):

Frequency range (MHz)	LIMIT (Quantity of Hopping Channels)			
	20dB Bandwidth < 250kHz	20dB Bandwidth > 250kHz	20dB Bandwidth < 1 MHz	20dB Bandwidth > 1MHz
902 - 928	50	25	---	---

The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: WJ9-RRU4ELCU6


5.11.6 Test protocol

Quantity of hopping channel



*RBW 100 kHz Marker 1 [T1]
 VBW 300 kHz 28.75 dBm
 Ref 33 dBm Att 50 dB SWT 5 ms 902.250000000 MHz

1 PK
 VIEW

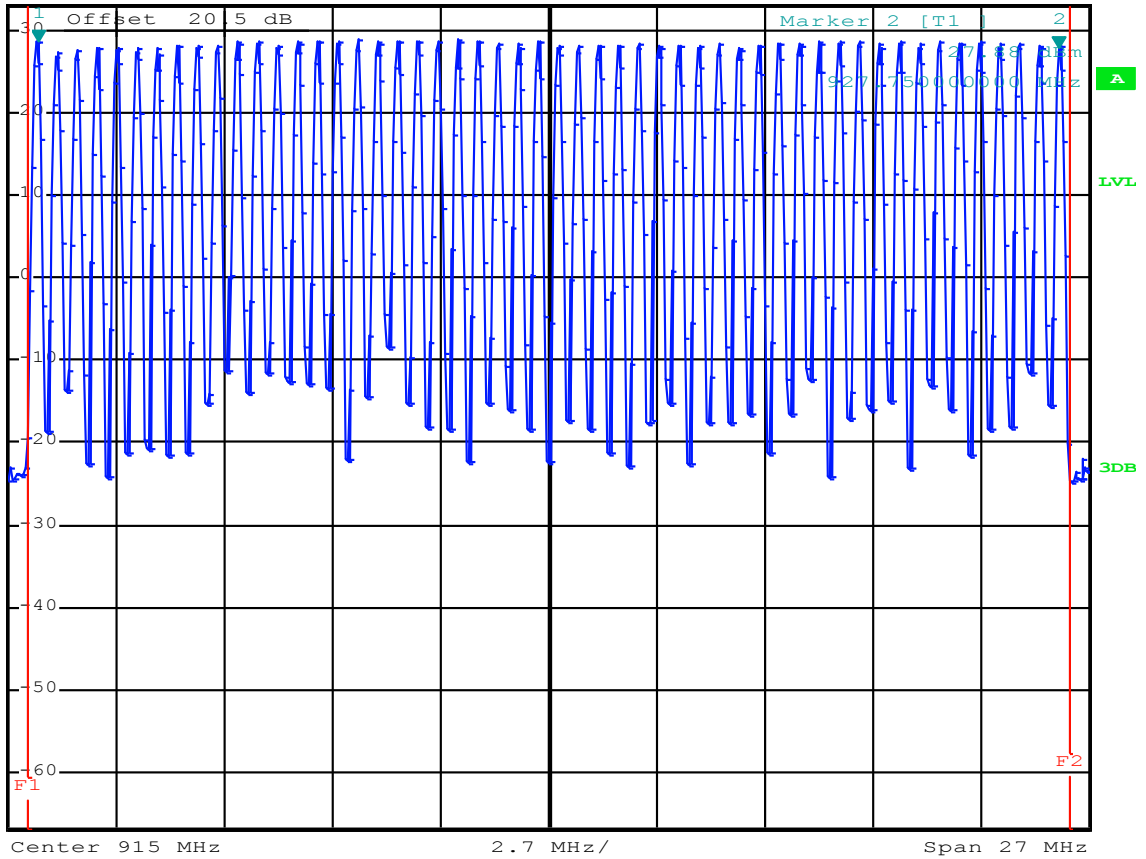

FCC ID: WJ9-RRU4ELCU6

5.12 Antenna application

5.12.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has reverse TNC plugs to connect the defined antennas supplied by the manufacturer.
All supplied antennas meet the requirements of part 15.203 and 15.204.

5.12.2 Antenna requirements

According to FCC Part 15C, Section 15.247 (b)(4):

The conducted output power limit specified in paragraph (b) of 15.247 is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from intentional radiator shall be reduced below the stated values in paragraph (b)(1), (b)(2) and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The necessary output power reduction depends on the used antenna type. The value of output power have to be reduced is controlled by firmware of the EUT and will be automatically set by selecting the antenna.

FCC ID: WJ9-RRU4ELCU6**5.13 Maximum permissible exposure (MPE) – See Attachment B**

For test instruments and accessories used see section 6 Part **CPC 2**.

5.13.1 Description of the test location

Test location: None

5.13.2 Applicable standard

According to FCC Part 15, Section 15.247(i):

Systems operating under the provisions of this section shall be operated in a manner that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

The test methods used comply with ANSI/IEEE C95.1, "IEEE Standard for Safety Levels with respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz".

This test report shows the compliance with the limits for Maximum Permissible Exposure (MPE) specified in FCC Part 1, Section 1.1310 and the criteria to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in FCC Part 1, Section 1.1307(b).

5.13.3 Description of Measurement

The maximum total power input to the antenna has been measured conducted as described in clause 5.3 of this document. Through the Friis transmission formula, the known maximum gain of the antenna and the maximum power, the MPE can be calculated in a defined distance away from the product.

Friis transmission formula:
$$P_d = \frac{P_{out} * G}{4 * \Pi * r^2}$$

where

P_d = power density (mW/cm²)

P_{out} = output power to antenna (mW)

G = gain of antenna (linear scale)

r = distance between antenna and observation point (cm)

Remarks: For detailed test result please refer Attachment B.

FCC ID: WJ9-RRU4ELCU6
6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	ESHS 30	02-02/03-05-002	16/07/2014	16/07/2013		
	ESH 2 - Z 5	02-02/20-05-004	18/10/2015	18/10/2013	28/08/2014	28/02/2014
	N-4000-BNC	02-02/50-05-138				
	N-1500-N	02-02/50-05-140				
	ESH 3 - Z 2	02-02/50-05-155			10/10/2014	10/04/2014
	SP 103 /3.5-60	02-02/50-05-182				
CPC 2	FSP 40	02-02/11-11-001	30/09/2014	30/09/2013		
	Inmet 18N50W-20 dB	02-02/50-10-001				
DC	FSP 40	02-02/11-11-001	30/09/2014	30/09/2013		
	Inmet 18N50W-20 dB	02-02/50-10-001				
MB	FSP 40	02-02/11-11-001	30/09/2014	30/09/2013		
	Inmet 18N50W-20 dB	02-02/50-10-001				
SEC 1-3	FSP 40	02-02/11-11-001	30/09/2014	30/09/2013		
	WHJS 1000-10EE	02-02/50-05-070				
	Inmet 18N50W-20 dB	02-02/50-10-001				
SER 1	FMZB 1516	01-02/24-01-018			13/02/2015	13/02/2014
	ESR 7	02-02/03-13-001	03/06/2015	03/06/2014		
	S10162-B	02-02/50-05-031				
	KK-EF393-21N-16	02-02/50-05-033				
	NW-2000-NB	02-02/50-05-113				
SER 2	ESVS 30	02-02/03-05-006	03/07/2015	03/07/2014		
	VULB 9168	02-02/24-05-005	08/04/2015	08/04/2014	08/10/2014	08/04/2014
	S10162-B	02-02/50-05-031				
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
SER 3	FSP 40	02-02/11-11-001	30/09/2014	30/09/2013		
	AFS5-12001800-18-10P-6	02-02/17-06-002				
	AFS4-01000400-10-10P-4	02-02/17-13-002				
	AMF-4F-04001200-15-10P	02-02/17-13-003				
	3117	02-02/24-05-009	07/05/2015	07/05/2014		
	Sucoflex N-1600-SMA	02-02/50-05-073				
	Sucoflex N-2000-SMA	02-02/50-05-075				
	SF104/11N/11N/1500MM	02-02/50-13-015				