	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 1 of 56



dB Technology
|----- (Cambridge Ltd.) -----|

EMC
Testing

EMC
Consultancy

EMC
Training

23, Headington Drive,
Cambridge.
CB1 9HE
Tel : 01954 251974 (test site)
or : 01223 241140 (accounts)
Fax : 01954 251907
web : www.dbtechnology.co.uk
email: mail@dbtechnology.co.uk

REPORT ON ELECTROMAGNETIC COMPATIBILITY TESTS

Performed at:
TWENTY PENCE TEST SITE

**Twenty Pence Road,
Cottenham,
Cambridge
U.K.
CB24 8PS**

on

AlertMe.com Ltd

REP800/REP130

(FCC Part 15.247 measurements only)

dated


19th May 2012

Document History

Issue	Date	Affected page(s)	Description of modifications	Revised by	Approved by
1	19/05/12		Initial release		
2	31/05/12	1 and 16	AC Power conducted emissions 9kHz RBW clarified.	PB	DB

Based on report template:
v090319

*This report shall not be reproduced except in full, without the written approval of:
dB Technology (Cambridge) Ltd.*

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 2 of 56

Equipment Under Test (EUT):

REP800/REP130

Test Commissioned by:

AlertMe.com Ltd
Compass House
80 Newmarket Road
Cambridge
CB5 8DZ

Representative:

Bruce Benson

Test Started:

28th April 2012

Test Completed:

17th May 2012

Test Engineer:

Dave Smith

Date of Report:

19th May 2012

Written by: Dave Smith

Checked by: Derek Barlow

Signature:

D. A. Smith

Signature:

D. Barlow

Date: 19th May 2012

Date: 21st May 2012


dB Technology can only report on the specific unit(s) tested at its site. The responsibility for extrapolating this data to a product line lies solely with the manufacturer.

Test Standards Applied

CFR 47


Code of Federal Regulations: Pt 15 Subpart C - Radio Frequency Devices - Intentional Radiators

In particular, the rules of part 15.247 were applied.

	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 3 of 56


Device operating in the 2400-2483.5 MHz band (part 15.247)

FCC Part	Parameter	
15.207	Conducted Emissions	PASS
15.209	Radiated Emissions	PASS (for frequencies in the Restricted Bands list of 15.205 only - all other parts of 15.209 are not applicable - 15.247 takes precedence.)
15.247(a)(2)	Minumum 6dB bandwidth (must be > 500kHz)	PASS
15.247(b)(3)	Peak power (must be < 1W)	PASS
15.247(b)(4)	Antenna gain (must be < 6dBi)	Manufacturer data states a gain of 1dBi. Only integral antenna.
15.247(b)(5)	Exposure to RF	See separate declaration based on calculation.
15.247(d)	Conducted Antenna Spurious (Must be at least 20dB below carrier in - 100kHz bw)	PASS
15.247(e)	Spectral Density (must not exceed 8dBm in any 3kHz band)	PASS


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 4 of 56

Contents

1 EUT Details	6
1.1 General	6
1.2 Modifications to EUT and Peripherals	7
1.3 EUT Operating Modes	7
1.4 Zigbee Duty Cycle	7
Figure 1 EUT and Peripherals	8
Figure 2 Manufacturer's trace showing Zigbee 2msec burst in 100msec period	9
Figure 3 Manufacturer's trace showing duration of Zigbee 2msec	9
Photograph 1 Conducted Emissions - Front	10
Photograph 2 Conducted Emissions - Back	10
Photograph 3 Radiated Emissions - Upright - Front	11
Photograph 4 Radiated Emissions - Flat - Back	11
Photograph 5 Conducted Antenna	12
2 Test Equipment	13
3 Test Methods	14
3.1 Conducted Emissions - ac power	14
3.2 Radiated Emissions	14
3.3 Conducted Antenna Emissions	15
4 Test Results	15
4.1 Conducted Emissions (Power) - Results	16
4.2 Zigbee Peak Power - 15.247(b)(3)	17
4.3 Zigbee Bandwidth - 15.247(a)(2)	18
4.4 Zigbee Power Spectral Density in 3kHz bw - 15.247(e)	19
4.5 Zigbee Antenna Conducted Spurious Emissions (100kHz bw) - 15.247(d)	20
4.6 Zigbee Radiated Emissions - Channel 11 - 15.209	21
4.7 Zigbee Radiated Emissions - Channel 18 - 15.209	22
4.8 Zigbee Radiated Emissions - Channel 25 - 15.209	23
4.9 Zigbee Radiated Emissions - Band Edges - 15.209	24
PLOT 1 Peak Power - Channel 11	25
PLOT 2 Peak Power - Channel 18	26
PLOT 3 Peak Power - Channel 25	27
PLOT 4 6dB Bandwidth - Channel 11	28
PLOT 5 6dB Bandwidth - Channel 18	29
PLOT 6 6dB Bandwidth - Channel 25	30
PLOT 7 Spectral Density - Channel 11	31
PLOT 8 Spectral Density - Channel 18	32
PLOT 9 Spectral Density - Channel 25	33
PLOT 10 Antenna Conducted Spurious - 9kHz to 1GHz	34
PLOT 11 Antenna Conducted Spurious - near band edges	35
PLOT 12 Antenna Conducted Spurious - 1GHz to 5GHz	36
PLOT 13 Antenna Conducted Spurious - 5GHz to 15GHz	37
PLOT 14 Antenna Conducted Spurious - 15GHz to 25GHz	38
PLOT 15 Radiated Emissions - Zigbee Tx - Ch 11 - Band Edge - Vertical	39
PLOT 16 Radiated Emissions - Zigbee Tx - Ch 11 - Band Edge - Horizontal	40
PLOT 17 Radiated Emissions - Zigbee Tx - Ch 25 - Band Edge - Vertical	41
PLOT 18 Radiated Emissions - Zigbee Tx - Ch 25 - Band Edge - Horizontal	42
PLOT 19 Radiated Emissions - Zigbee Tx - 25MHz to 275MHz	43
PLOT 20 Radiated Emissions - Zigbee Tx - 250MHz to 1GHz	44
PLOT 21 Radiated Emissions - Zigbee Tx - 1GHz to 2GHz	45
PLOT 22 Radiated Emissions - Zigbee Tx - 2GHz to 3GHz	46
PLOT 23 Radiated Emissions - Zigbee Tx - 2GHz to 3GHz - 10kHz VBW	47
PLOT 24 Radiated Emissions - Zigbee Tx - 2.75GHz to 6.75GHz	48
PLOT 25 Radiated Emissions - Zigbee Tx - 6GHz to 10GHz	49
PLOT 26 Radiated Emissions - Zigbee Tx - 9GHz to 13GHz	50

	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 5 of 56

PLOT 27	Radiated Emissions - Zigbee Tx - 12GHz to 16GHz	51
PLOT 28	Radiated Emissions - Zigbee Tx - 14GHz to 18GHz	52
PLOT 29	Radiated Emissions - Zigbee Tx - 18GHz to 22GHz	53
PLOT 30	Radiated Emissions - Zigbee Tx - 21GHz to 25GHz	54
PLOT 31	Conducted Emissions - Live Line - Z-wave & Zigbee Tx	55
PLOT 32	Conducted Emissions - Neutral Line - Z-wave & Zigbee Tx	56

	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 6 of 56

1 EUT Details

1.1 General

The EUT was an AlertMe Repeater. The device incorporates two intentional radiators:

- (a) Zigbee: operating in the 2.4GHz to 2.4835GHz band. Operates on 15 equally spaced channels starting at 2.405GHz (channel 11) and ending at 2.475GHz (channel 25). O-QPSK (digital) modulation. Integral antenna. Gain of the antenna declared to be 1dBi.
- (b) Z-wave: operating in the 902MHz to 928MHz band. The device operates on 908.42 MHz. GFSK modulation. Integral antenna.

This report only covers the operation of the device as an intentional radiator in the 2.4GHz to 2.4835GHz band.

For Zigbee transmit mode tests were performed on:

Ch 11: 2.405 GHz

Ch 18: 2.440 GHz


Ch 25: 2.475 GHz

The device is powered from ac mains or an internal battery.

Details of the EUT and associated peripherals used during the tests are listed below. Figure 1 shows the interconnections between the EUT and peripherals.

Item	Manufacturer	Model	Description	Serial No:	Notes
1	Alertme	REP800/REP130	Sample 1 with wired co-axial connection to Zigbee transmitter		
2	Alertme	REP800/REP130	Sample 2 with integral antennas. Z-wave transmitting constant unmodulated carrier. Zigbee programmable.		
3	Alertme	REP800/REP130	Sample 3 - with integral antennas. Z-wave constantly transmitting modulated signal		#1
4	Alertme	REP800/REP130	Sample 4 with integral antennas. Z-wave in receive mode. Zigbee programmable.		

Not used for the tests covered by this report.

	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 7 of 56

1.2 Modifications to EUT and Peripherals

Details of any modifications that were required to achieve compliance are listed below. The modification numbers are referred to in the results sections as appropriate.

Mod No:	Details	Implemented for
0	Original. No modifications were made during the course of testing.	

1.3 EUT Operating Modes


The EUT was tested in the following operating mode or modes. Generally, operating modes are chosen that will exercise the functions of the EUT as fully as possible and in a manner likely to produce maximum emission levels or susceptibility. Individual test result sheets reference the operating mode of the EUT.

Operating Mode	Details
1	Zigbee transmit. Continuously transmitting constant packet stream. The transmit channel was set to either Channel 11, 18 or 25. Individual test results show the actual operating channel. Output set to 0dBm and amplifier switched on.
2	As mode 1 but with Z-wave also continuously transmitting.

1.4 Zigbee Duty Cycle

All Zigbee transmit measurements were made with the device sending continuous packet streams. In the intended application transmissions only occur in short bursts. The manufacturer has stated that in any one 100msec period transmissions are limited to a burst of approximately 2 msec. This is backed up by the traces provided by the manufacturer (see Figure 2 and Figure 3).

This allows an additional duty cycle correction factor to be applied where average limits are specified. This duty cycle correction factor has been calculated as -20dB ($=20 \cdot \log 10/100$ - assuming a transmit time of no more than 10msec in a 100msec period). This additional correction factor has only been applied where necessary and it is clearly indicated in the results tables.

	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 8 of 56

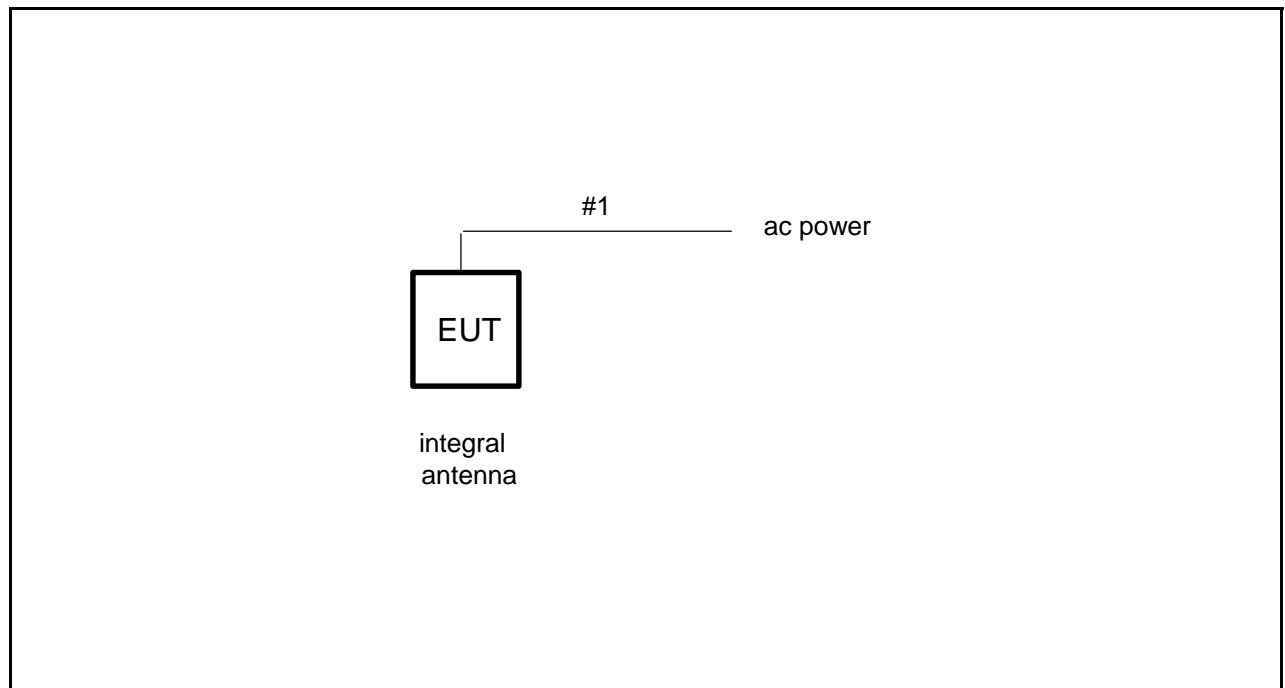


Figure 1 EUT and Peripherals

	Description	Type	Length	Notes
#1	Mains extension lead	Unscreened	1.5m	

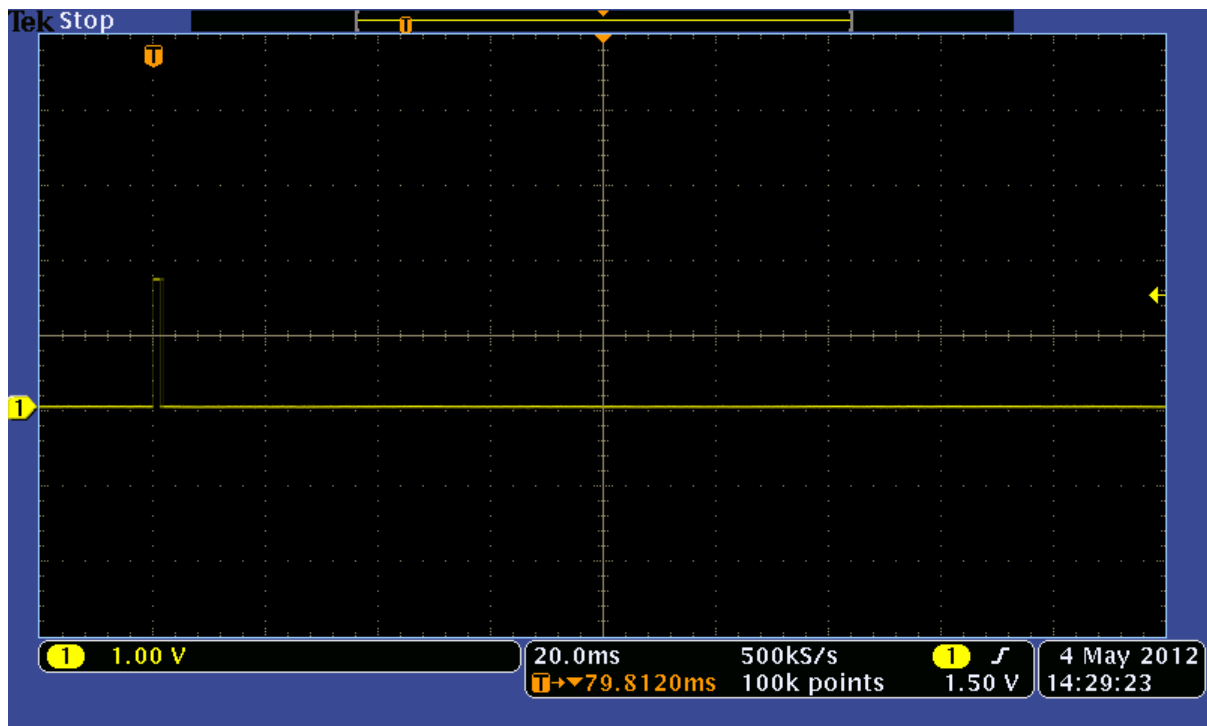


Figure 2 Manufacturer's trace showing Zigbee 2msec burst in 100msec period



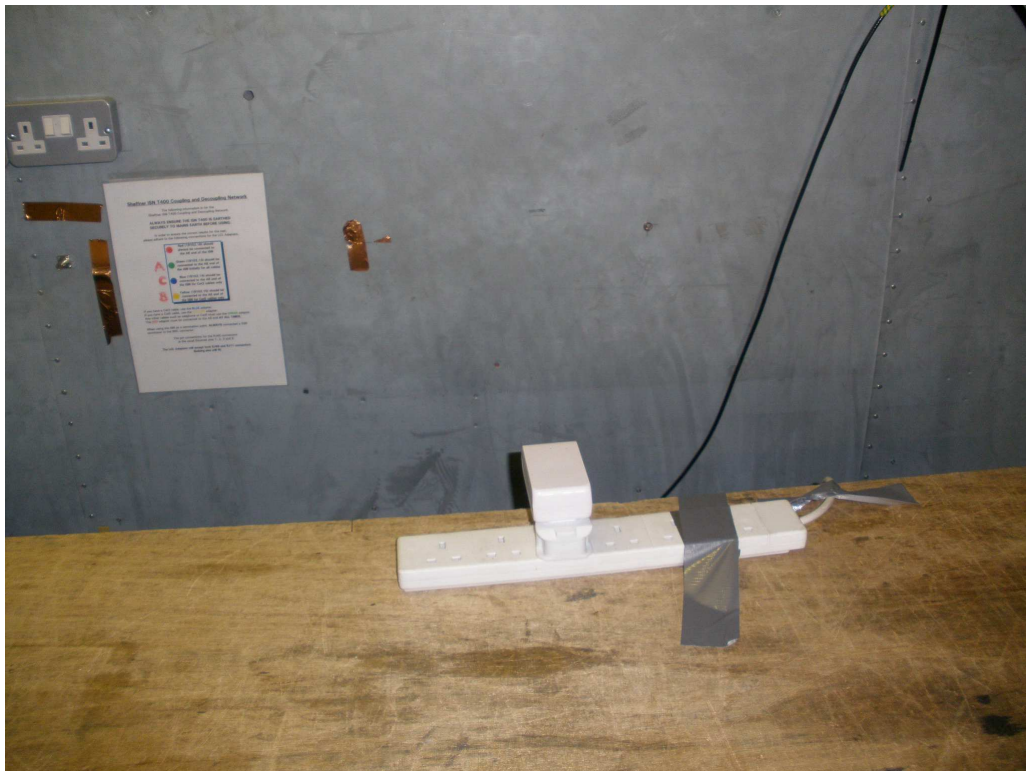


Figure 3 Manufacturer's trace showing duration of Zigbee 2msec


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 10 of 56



Photograph 1 Conducted Emissions - Front

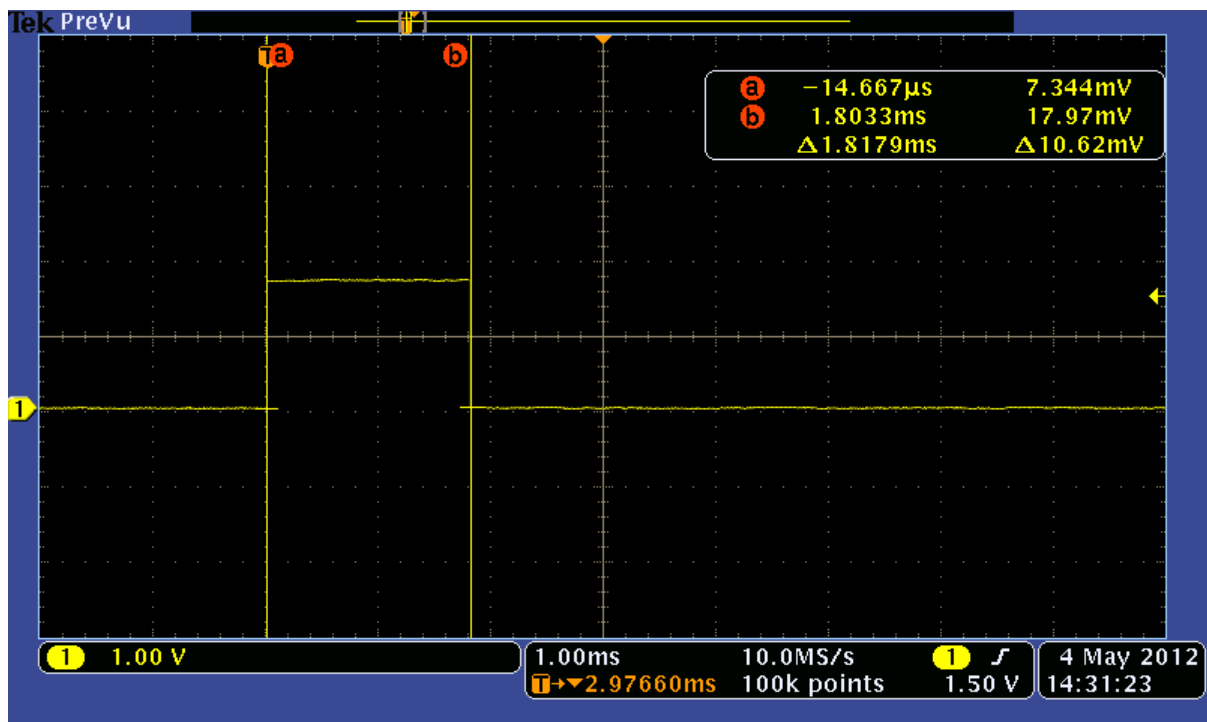

Photograph 2 Conducted Emissions - Back


	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 11 of 56



Photograph 3 Radiated Emissions - Upright - Front




Photograph 4 Radiated Emissions - Flat - Back

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 12 of 56



Photograph 5 Conducted Antenna


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 13 of 56

2 Test Equipment

The test equipment used during the tests was one or more of the items listed below. Individual test result sheets indicate which items were used.

Ref No:	Details	Serial Number	Cal Dat	Cal Interval
A15	Chase X-wing Bilog CBL6140 20MHz-2GHz	1047	18/11/2011	1 year
A20	Alpha 61932500 Horn Antenna (18-26GHz)	50	#1	1 year
A22	Alpha 61932400 Horn Antenna (12.4-18GHz)	55	#1	1 year
A23	EMCO 3115 DR Guide (1-18GHz)	4982	31/01/2012	1 year
A24	Chase X-wing Bilog CBL6144 26MHz-3GHz	27590	18/11/2011	1 year
A5	Chase Bilog CBL6111A	1760	31/01/2012	1 year
L1	EMCO 3825/2 LISN	1358	16/02/2012	1 year
PRE7	LUCIX 0.1GHz to 20GHz	24485	08/01/2012	1 year
PRE8	LUCIX 18GHz to 26.5GHz	24486	08/01/2012	1 year
R1	CHASE LHR 7000	1056	31/01/2012	1 year
R4	R&S ESVS10	421872	16/10/2011	1 year
R8	Agilent E7405A Spectrum Analyser	MY44212494	19/09/2011	1 year
R9	Agilent E7405A Spectrum Analyser	MY45110758	21/11/2011	1 year
RFF01	High Pass RF Filter 3GHz to 12.75GHz	1	08/02/2012	1 year
RFF04	Low Pass RF Filter 0MHz to 2GHz	4	08/02/2012	1 year
RFF15	Band Pass Filter 1GHz to 2GHz	15	08/02/2012	1 year
RFF22	High Pass Filter - 1.35GHz (to 10GHz) HPM13017	33	08/02/2012	1 year

#1 Standard Gain Horns - Factors derived by calculation from dimensions.

	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 14 of 56

3 Test Methods

3.1 Conducted Emissions - ac power

This section describes the general method of performing this test. The specific method used and any deviations from this general method are listed in the appropriate results section.

Bench top EUTs and peripheral equipment are normally placed on a 0.8m high non-conducting bench, positioned 0.4m from one of the metallic walls of a screened room. Floor standing EUTs are normally placed 0.1m above the metallic floor of the screened room. Mains leads are bundled so as not to exceed 1m.

The EUT is powered using a 50ohm/50uH Line Impedance Stabilisation Network (LISN). Peripherals are powered using a second a 50ohm/50uH LISN. These LISNs are bonded to the screened room floor.

With the correct supply voltage applied to the EUT scans are performed on both the live and neutral line outputs of the LISN using quasi-peak detection over the specified frequency range. The results of these scans are shown in the plots section at the end of the report.

Significant emissions identified by the scans are measured and the results tabulated. The table of results is shown in the conducted emissions results section.

Final Level (dBuV) = Receiver Reading (dBuV) + Combined Cable & Attenuator Correction Factor (dB)

Example: if at 191kHz the receiver level is 45.8 dBuV

@ 191kHz Final Level = 45.8 + 10.0 = 55.8 dBuV

3.2 Radiated Emissions

This section describes the general method of performing this test. The specific method used and any deviations from this general method are listed in the appropriate results section.

Initial scans are performed in a semi-anechoic screened room at a distance of up to 3m. Scans are performed over the frequency range specified in the test standard with the antenna both horizontally and vertically polarised. During these scans the EUT and peripherals are rotated through 360°. Bench top EUTs are placed on a non-conducting bench at a height of 0.8m above the ground plane. Floor standing EUTs are placed 0.1m above the ground plane. The results of the scans are shown in the plots included at the end of the report. Attempts are made to identify the layout of cables that give highest readings.

Significant emissions identified by the scans are measured on an open area test site at the appropriate test distance using the specified detector function. Maximised readings are obtained by rotating the EUT through 360° and adjusting the height of the antenna from 1 m to 4m. Measurements are made with the antenna both horizontally and vertically polarised and the results tabulated.

Tabulated results show levels based on the following calculation:


Field Strength (dBuV) = receiver reading (dBuV) + CF (dB/m)

CF is the correction factor for the antenna and cable.

For example:

if at 434.478MHz receiver reading was 57.8dBuV and combined correction factor = 20.4 (dB/m).

Total field strength = 57.8 + 20.4 = 78.2dBuV/m.

	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 15 of 56


3.3 Conducted Antenna Emissions

This section describes the general method of performing this test. The specific method used and any deviations from this general method are listed in the appropriate results section.

The antenna port of the EUT was connected directly to the input of a spectrum analyser. Sweeps were made over the required frequency ranges with the specified detectors applied.

4 Test Results

The following sections contain tabulated test results. Plots of various scans are included at the back of this section.


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 16 of 56

4.1 Conducted Emissions (Power) - Results

Factor Set 1: L1_11A AB002_CBL005_CBL039_11A - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R1 L1

Conducted Emissions (Power)

Company: AlertMe.com Ltd										Product: REP800/REP130			
Date: 04/05/12										Test Eng: Dave Smith			
Ports: ac power													
Test: ANSI C63.4:2003 using limits of FCC(B)													
Ports:													
Test: using limits of													
Plot	Op Mode	Mod State	Line (L/N)	Fact Set	Freq. MHz	Det qp/av	Rec. Level dBuV	Corr'n Factor dB	Total Level dBuV	Limit FCC dBuV	Margin FCC dB	Notes	
31	2	0	L	1	0.194	qp	27.1	10.0	37.1	63.9	26.8		
31	2	0	L	1	0.194	av	16.8	10.0	26.8	53.9	27.1		
31	2	0	L	1	0.263	qp	24.4	10.0	34.4	61.4	26.9		
31	2	0	L	1	0.263	av	14.3	10.0	24.3	51.4	27.0		
31	2	0	L	1	1.587	qp	24.1	10.0	34.1	56.0	21.9		
31	2	0	L	1	1.587	av	14.0	10.0	24.0	46.0	22.0		
32	2	0	N	1	0.200	qp	28.0	10.0	38.0	63.6	25.6		
32	2	0	N	1	0.200	av	8.0	10.0	18.0	53.6	35.6		
32	2	0	N	1	0.319	qp	22.8	10.0	32.8	59.7	26.9		
32	2	0	N	1	0.319	av	10.0	10.0	20.0	49.7	29.7		
32	2	0	N	1	1.587	qp	24.6	10.0	34.6	56.0	21.4		
32	2	0	N	1	1.587	av	12.0	10.0	22.0	46.0	24.0		
Results										Minimum Margin PASS/FAIL		21.4 dB PASS	
Notes	Comments and Observations												
<p>Results of scans shown in plots 31 and 32. Measurements made with both Z-wave and Zigbee transmitting which was considered to be the "worse case" mode (Sample 2).</p> <p>All AC power conducted emissions measurements were made using a 9kHz resolution bandwidth.</p> <p>Limits for 15.207 are shown.</p>													


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 17 of 56

4.2 Zigbee Peak Power - 15.247(b)(3)

Test Equipment: R8

Peak Power

Company: AlertMe.com Ltd		Product: REP800/REP130																	
Date: 17/05/2012		Test Eng: Dave Smith																	
Ports: Antenna																			
Test: 15.247(b)(3)																			
Ports:																			
Test:																			
Notes	Comments and Observations																		
	<p>This was performed as a conducted measurement on sample 1.</p> <p>Results of scans are shown in plots 1 to 3.</p> <p>The method of 558074 D01 DTS Meas Guidance v01 section 5.2.1.2 was applied. The spectrum analyser's "band power" measurement was used with a peak detector selected.</p> <p>Results were as follows:</p> <table><tr><td>Channel</td><td>Level (dBm)</td><td>Limit (dBm)</td><td></td></tr><tr><td>11</td><td>21.80</td><td>30</td><td>PASS</td></tr><tr><td>18</td><td>21.79</td><td>30</td><td>PASS</td></tr><tr><td>25</td><td>21.53</td><td>30</td><td>PASS</td></tr></table>			Channel	Level (dBm)	Limit (dBm)		11	21.80	30	PASS	18	21.79	30	PASS	25	21.53	30	PASS
Channel	Level (dBm)	Limit (dBm)																	
11	21.80	30	PASS																
18	21.79	30	PASS																
25	21.53	30	PASS																


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 18 of 56

4.3 Zigbee Bandwidth - 15.247(a)(2)

Test Equipment: R8

Bandwidth

Company: AlertMe.com Ltd		Product: REP800/REP130	
Date: 17/05/2012		Test Eng: Dave Smith	
Ports: Antenna			
Test: 15.247(a)(2)			
Ports:			
Test:			
Notes	Comments and Observations		
	This was performed as a conducted measurement on sample 1.		
	Results of scans shown in plots 4 to 6.		
	The method of 558074 D01 DTS Meas Guidance v01 section 5.1.1 was applied.		
	The results are as follows:		
	Channel	Measured Bandwidth (MHz)	Limit
	11	1.540	> 500kHz
	18	1.580	> 500kHz
	25	1.570	> 500kHz
	PASS		


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 19 of 56

4.4 Zigbee Power Spectral Density in 3kHz bw - 15.247(e)

Test Equipment: R8

Spectral Density

Company: AlertMe.com Ltd		Product: REP800/REP130	
Date: 17/05/2012		Test Eng: Dave Smith	
Ports: Antenna			
Test: 15.247(e)			
Ports:			
Test:			
Notes	Comments and Observations		
	<p>This was performed as a conducted measurement on sample 1.</p> <p>The method of 558074 D01 DTS Meas Guidance v01 section 5.3.1 was applied. As specified, measurements were made with a RBW of 100kHz and an additional CF of -15.2dB applied to convert to dBm/3kHz.</p> <p>Results of scans shown in plots 7 to 9.</p> <p>In all cases the spectral density is below 8dBm/3kHz.</p> <p>PASS</p>		


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 20 of 56

4.5 Zigbee Antenna Conducted Spurious Emissions (100kHz bw) - 15.247(d)

Test Equipment: R8

Conducted Emissions (Signal)

Company: AlertMe.com Ltd		Product: REP800/REP130				
Date: 03/05/2012		Test Eng: Dave Smith				
Ports: Antenna						
Test: 15.247(d)						
Ports:						
Test:						
Notes	Comments and Observations					
	This was performed as a conducted measurement on sample 1.					
	The method of 558074 D01 DTS Meas Guidance v01 section 5.4.1 was applied.					
	Results of scans shown in plots 10 to 14.					
	Frequency	Tx Ch	Level	Level w.r.t Fundamental	Limit	Margin
	MHz		dBm	dB	dB	dB
	2.4050	Ch 11	16.4			
	2.4000	Ch 11	-25.8	-42.2	-20	22.2
	4.8094	Ch 11	-37.3	-53.7	-20	33.7
						PASS
						N/A *
	2.4400	Ch 18	15.4			
	4.8794	Ch 18	-37.1	-52.5	-20	32.5
						N/A *
	2.4750	Ch 25	16.0			
	2.4835	Ch 25	-33.2	-33.2	-20	13.2
	4.9494	Ch 25	-37.4	-53.4	-20	33.4
						PASS
						N/A *
	* This emission falls within a restricted band and was therefore also measured as a radiated test using the limits of 15.209. Providing an emission meets the radiated limits of 15.209 there is no requirement to additionally meet -20dBc conducted limit.					
	PASS					


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 21 of 56

4.6 Zigbee Radiated Emissions - Channel 11 - 15.209

Factor Set 1: A23_3m_10A PRE7_CBL052_CBL093_11A RFF01_11A -
Factor Set 2: A20_3m_10B PRE8_CBL052_CBL092_11A - -
Factor Set 3: - - - -
Test Equipment: R8 A23 A15 PRE7 RFF01 A20 PRE8 A22 RFF04

Radiated Emissions

Company: AlertMe.com Ltd											Product: REP800/REP130		
Date: 01/05/2012											Test Eng: Dave Smith		
Ports:													
Test: ANSI C63.4:2003											using limits of 15.209		
Ports:													
Test:											using limits of		
Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Corr'n Factor dB	Total Level dBuV/m	Limit FCC dBuV/m	Margin FCC dB	Notes
	Channel 11												
25	1	0	3	1	4809.095	V	62.4	-5.3		57.1	74.0	16.9	Pk
25	1	0	3	1	4809.095	V	55.5	-5.3		50.1	54.0	3.9	Av
25	1	0	3	1	4809.095	H	58.4	-5.3		53.1	74.0	20.9	Pk
25	1	0	3	1	4809.095	H	50.9	-5.3		45.6	54.0	8.4	Av
27	1	0	3	1	12028.037	V	48.4	3.6		51.9	74.0	22.1	Pk
27	1	0	3	1	12028.037	V	38.2	3.6		41.8	54.0	12.2	Av
27	1	0	3	1	12028.037	H	44.8	3.6		48.4	74.0	25.6	Pk
27	1	0	3	1	12028.037	H	32.0	3.6		35.6	54.0	18.4	Av
30	1	0	3	2	19236.500	V	46.7	1.6		48.3	74.0	25.7	Pk
30	1	0	3	2	19236.500	V	37.5	1.6		39.1	54.0	14.9	Av
30	1	0	3	2	19236.500	H	46.1	1.6		47.8	74.0	26.2	Pk
30	1	0	3	2	19236.500	H	36.5	1.6		38.1	54.0	15.9	Av
Results											Minimum Margin		
											PASS/FAIL		
											3.9 dB		
											PASS		
Notes		Comments and Observations											
		Results of scans shown in plots 19 to 30.											
		All average measurements could be reduced by a further 20dB if the "Duty Cycle Correction" were applied.											
Key:		qp - quasi-peak, av - average, pk - peak											


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 22 of 56

4.7 Zigbee Radiated Emissions - Channel 18 - 15.209

Factor Set 1: A23_3m_10A PRE7_CBL052_CBL093_11A RFF01_11A -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R8 A23 A15 PRE7 RFF01 A20 PRE8 A22 RFF04

Radiated Emissions

Company: AlertMe.com Ltd						Product: REP800/REP130							
Date: 01/05/2012						Test Eng: Dave Smith							
Ports:													
Test: ANSI C63.4:2003						using limits of 15.209							
Ports:													
Test:						using limits of							
Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Corr'n Factor dB	Total Level dBuV/m	Limit FCC dBuV/m	Margin FCC dB	Notes
Channel 18													
25	1	0	3	1	4879.220	V	63.3	-5.0		58.3	74.0	15.7	Pk
25	1	0	3	1	4879.220	V	56.8	-5.0		51.7	54.0	2.3	Av
25	1	0	3	1	4879.220	H	60.4	-5.0		55.4	74.0	18.6	Pk
25	1	0	3	1	4879.220	H	53.3	-5.0		48.3	54.0	5.7	Av
26	1	0	3	1	7318.755	V	61.9	-0.7		61.2	74.0	12.8	Pk
26	1	0	3	1	7318.755	V	54.3	-0.7		53.6	54.0	0.4	Av
26	1	0	3	1	7318.755	H	60.5	-0.7		59.8	74.0	14.2	Pk
26	1	0	3	1	7318.755	H	52.8	-0.7		52.1	54.0	1.9	Av
27	1	0	3	1	12198.030	V	50.9	3.4		54.3	74.0	19.7	Pk
27	1	0	3	1	12198.030	V	41.4	3.4		44.7	54.0	9.3	Av
27	1	0	3	1	12198.030	H	48.9	3.4		52.3	74.0	21.7	Pk
27	1	0	3	1	12198.030	H	38.6	3.4		42.0	54.0	12.0	Av
Results											Minimum Margin		
											PASS/FAIL		
											0.4 dB		
											PASS		
Notes	Comments and Observations												
	Results of scans shown in plots 19 to 30.												
	All average measurements could be reduced by a further 20dB if the "Duty Cycle Correction" were applied.												
Key:	qp - quasi-peak, av - average, pk - peak												


	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 23 of 56

4.8 Zigbee Radiated Emissions - Channel 25 - 15.209

Factor Set 1: A23_3m_10A PRE7_CBL052_CBL093_11A RFF01_11A -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R8 A23 A15 PRE7 RFF01 A20 PRE8 A22 RFF04

Radiated Emissions

Company: AlertMe.com Ltd											Product: REP800/REP130			
Date: 01/05/2012											Test Eng: Dave Smith			
Ports:														
Test: ANSI C63.4:2003											using limits of 15.209			
Ports:														
Test:											using limits of			
Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Corr'n Factor dB	Total Level dBuV/m	Limit FCC dBuV/m	Margin FCC dB	Notes	
Channel 25														
25	1	0	3	1	4949.235	V	59.5	-5.0		54.5	74.0	19.5	Pk	
25	1	0	3	1	4949.235	V	52.1	-5.0		47.1	54.0	6.9	Av	
25	1	0	3	1	4949.235	H	58.3	-5.0		53.2	74.0	20.8	Pk	
25	1	0	3	1	4949.235	H	51.0	-5.0		46.0	54.0	8.0	Av	
26	1	0	3	1	7423.750	V	60.5	-0.1		60.4	74.0	13.6	Pk	
26	1	0	3	1	7423.750	V	52.9	-0.1		52.8	54.0	1.2	Av	
26	1	0	3	1	7423.750	H	57.7	-0.1		57.7	74.0	16.3	Pk	
26	1	0	3	1	7423.750	H	49.8	-0.1		49.8	54.0	4.2	Av	
27	1	0	3	1	12373.000	V	50.7	3.4		54.1	74.0	19.9	Pk	
27	1	0	3	1	12373.000	V	40.8	3.4		44.2	54.0	9.8	Av	
27	1	0	3	1	12373.000	H	50.5	3.4		53.9	74.0	20.1	Pk	
27	1	0	3	1	12373.000	H	40.4	3.4		43.8	54.0	10.2	Av	
Results											Minimum Margin		1.2 dB	PASS
											PASS/FAIL			
Notes		Comments and Observations												
Results of scans shown in plots 19 to 30.														
All average measurements could be reduced by a further 20dB if the "Duty Cycle Correction" were applied.														
Key: qp - quasi-peak, av - average, pk - peak														


	Report No: R3094A Issue No: 2	FCC ID: WJHRP11	
	Test No: T4335	Test Report	Page: 24 of 56


4.9 Zigbee Radiated Emissions - Band Edges - 15.209

Factor Set 1: A23_3m_10A CBL049_11A - -
Factor Set 2: - - - -
Factor Set 3: - - - -
Test Equipment: R8 A23

Radiated Emissions

Company: AlertMe.com Ltd						Product: REP800/REP130							
Date: 28/04/2012						Test Eng: Dave Smith							
Ports:													
Test: ANSI C63.4:2003						using limits of 15.209							
Ports:													
Test:						using limits of							
Plot	Op Mode	Mod State	Dist m	Fact Set	Freq. MHz	Ant Pol	Rec. Level dBuV	Corr'n Factor dB/m	Corr'n Factor dB	Total Level dBuV/m	Limit FCC_B dBuV/m	Margin FCC_B dB	Notes
Channel 11													
15	1	0	3	1	2390.000	V	22.1	29.7		51.8	74.0	22.2	Pk
15	1	0	3	1	2390.000	V	11.6	29.7	-20.0	21.3	54.0	32.7	Av
16	1	0	3	1	2390.000	H	21.9	29.7		51.6	74.0	22.4	Pk
16	1	0	3	1	2390.000	H	11.6	29.7	-20.0	21.3	54.0	32.7	Av
Channel 25													
17	1	0	3	1	2483.500	V	31.6	29.9		61.5	74.0	12.5	Pk
17	1	0	3	1	2483.500	V	23.8	29.9	-20.0	33.7	54.0	20.3	Av
18	1	0	3	1	2483.500	H	31.8	29.9		61.7	74.0	12.3	Pk
18	1	0	3	1	2483.500	H	23.7	29.9	-20.0	33.6	54.0	20.4	Av
17	1	0	3	1	2486.750	V	31.5	29.9		61.4	74.0	12.6	Pk
17	1	0	3	1	2486.750	V	14.6	29.9	-20.0	24.6	54.0	29.4	Av
18	1	0	3	1	2486.750	H	31.4	29.9		61.3	74.0	12.7	Pk
18	1	0	3	1	2486.750	H	15.7	29.9	-20.0	25.6	54.0	28.4	Av
Results											Minimum Margin		
											PASS/FAIL		
											12.3 dB		
											PASS		
Notes		Comments and Observations											
		Results of scans shown in plots 15 to 18.											
		Measurements were made with a continuous data stream transmission. As described in the "Duty Cycle" section of this report, average measurements can be reduced by an additional 20dB because transmissions occur for no more than 10msec in any 100msec period. This -20dB factor is included in the above table as the "second" correction factor.											
Key:		qp - quasi-peak, av - average, pk - peak											

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 25 of 56

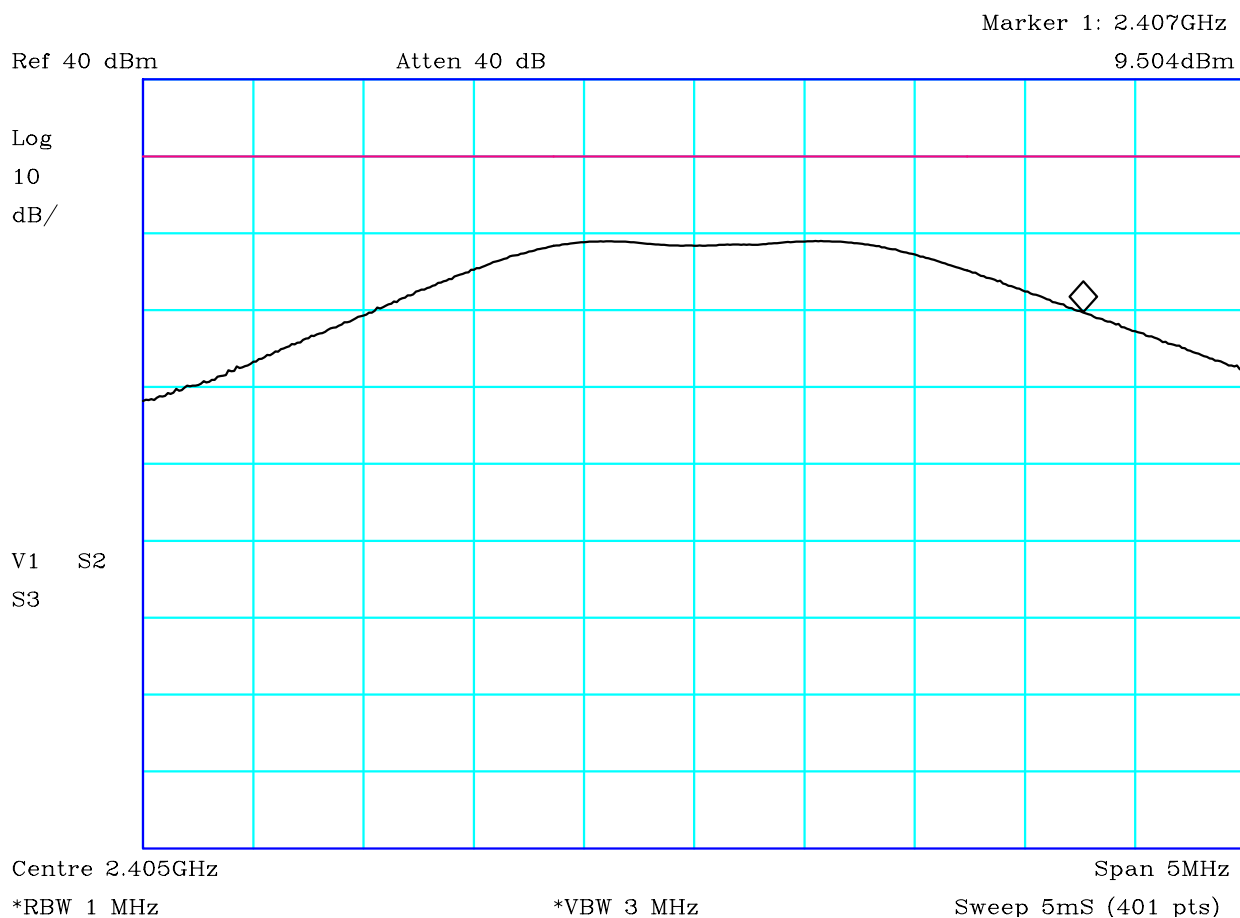


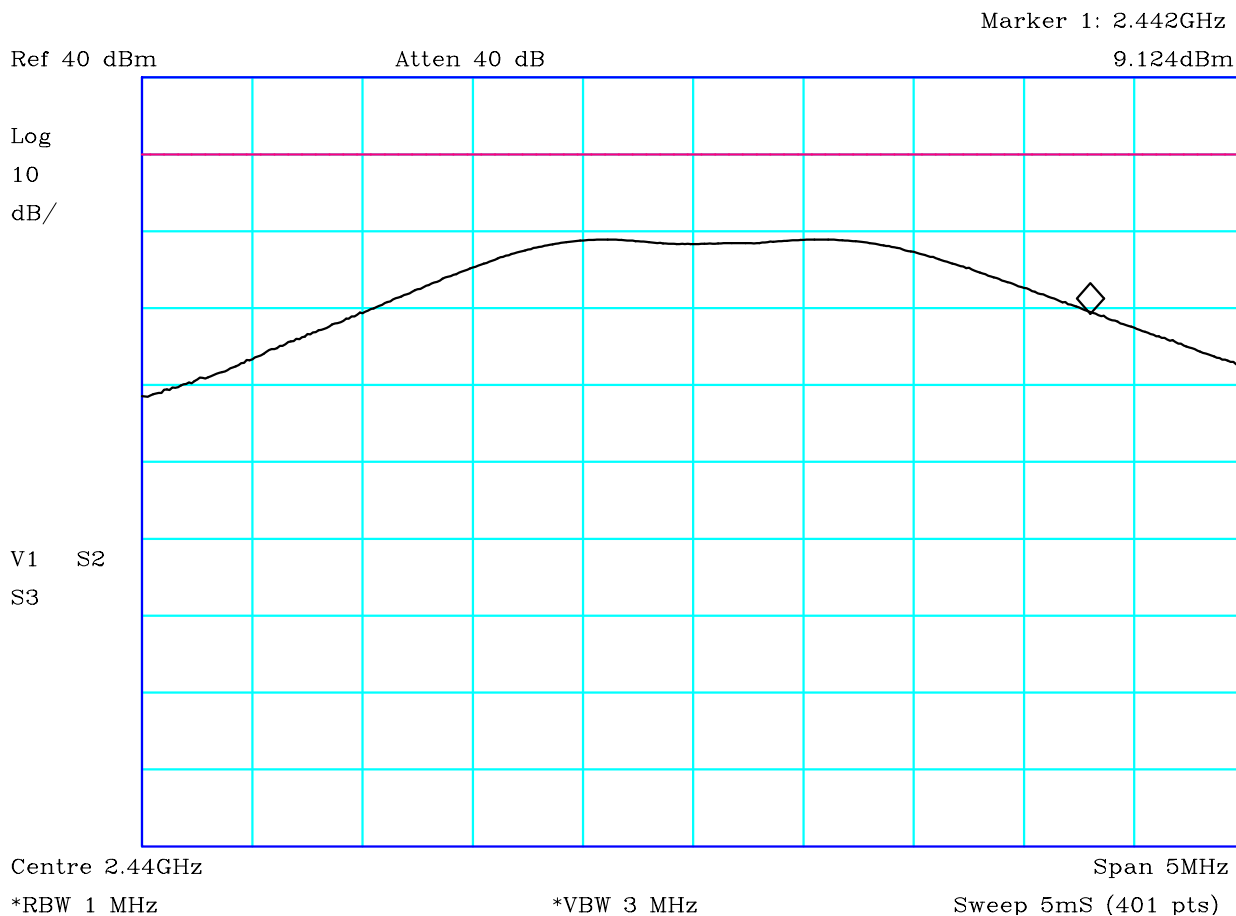
PLOT 1 Peak Power - Channel 11

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	30dBm	Limit2:	
Limit3:		Limit4:	

Channel 11
Band power measured over EBW (-26dB points) using peak detector.
Level = 21.8 dBm which therefore complies with the upper limit of
Part 15.247(b)(3) of 30dBm (1W).

Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H241743B		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 26 of 56




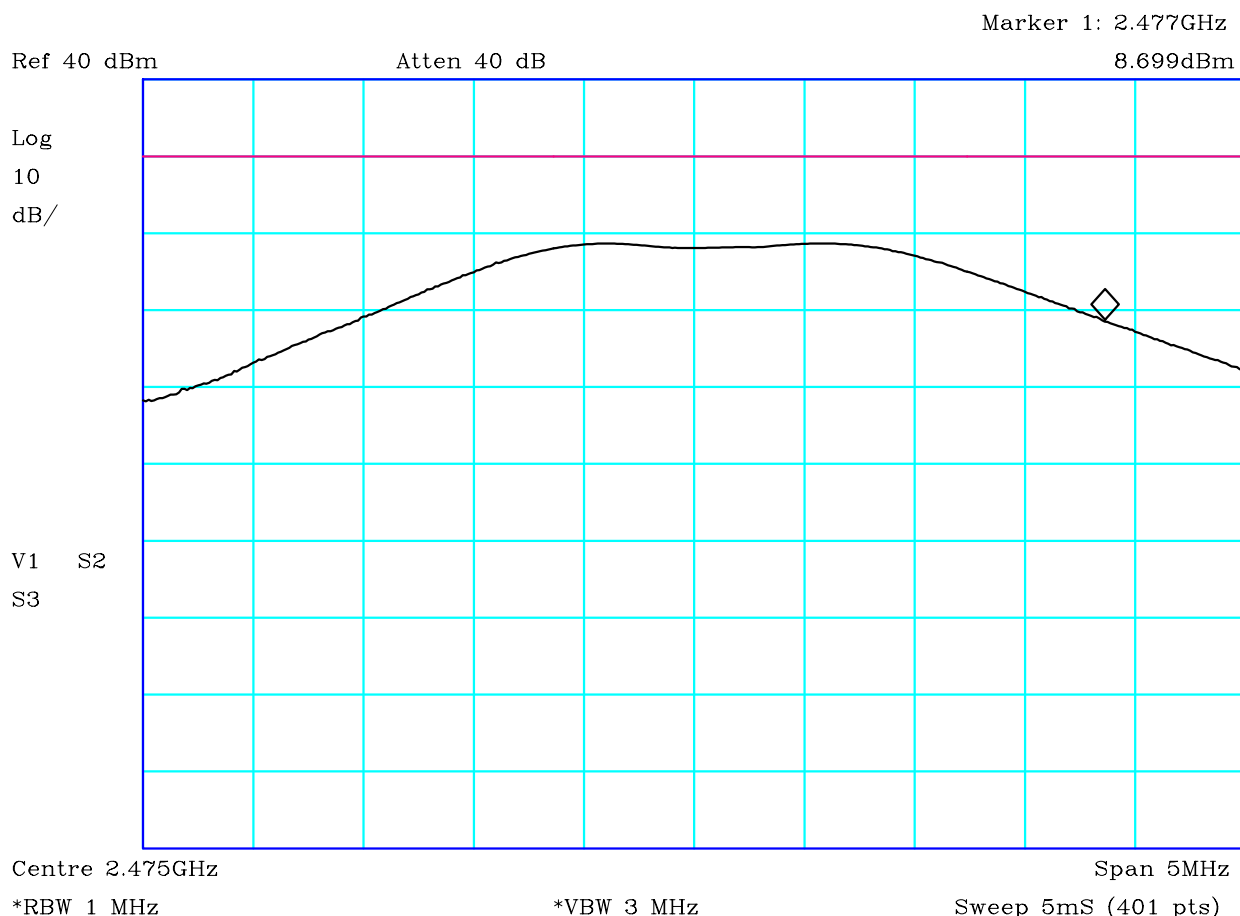
PLOT 2 Peak Power - Channel 18

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	30dBm	Limit2:	
Limit3:		Limit4:	

Channel 18
Band power measured over EBW (-26dB points) using peak detector.
Level = 21.79 dBm which therefore complies with the upper limit of Part 15.247(b)(3) of 30dBm (1W).

Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H241743F		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 27 of 56




PLOT 3 Peak Power - Channel 25

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	30dBm	Limit2:	
Limit3:		Limit4:	


Channel 25
Band power measured over EBW (-26dB points) using peak detector.
Level = 21.53 dBm which therefore complies with the upper limit of Part 15.247(b)(3) of 30dBm (1W).


Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H2417437		

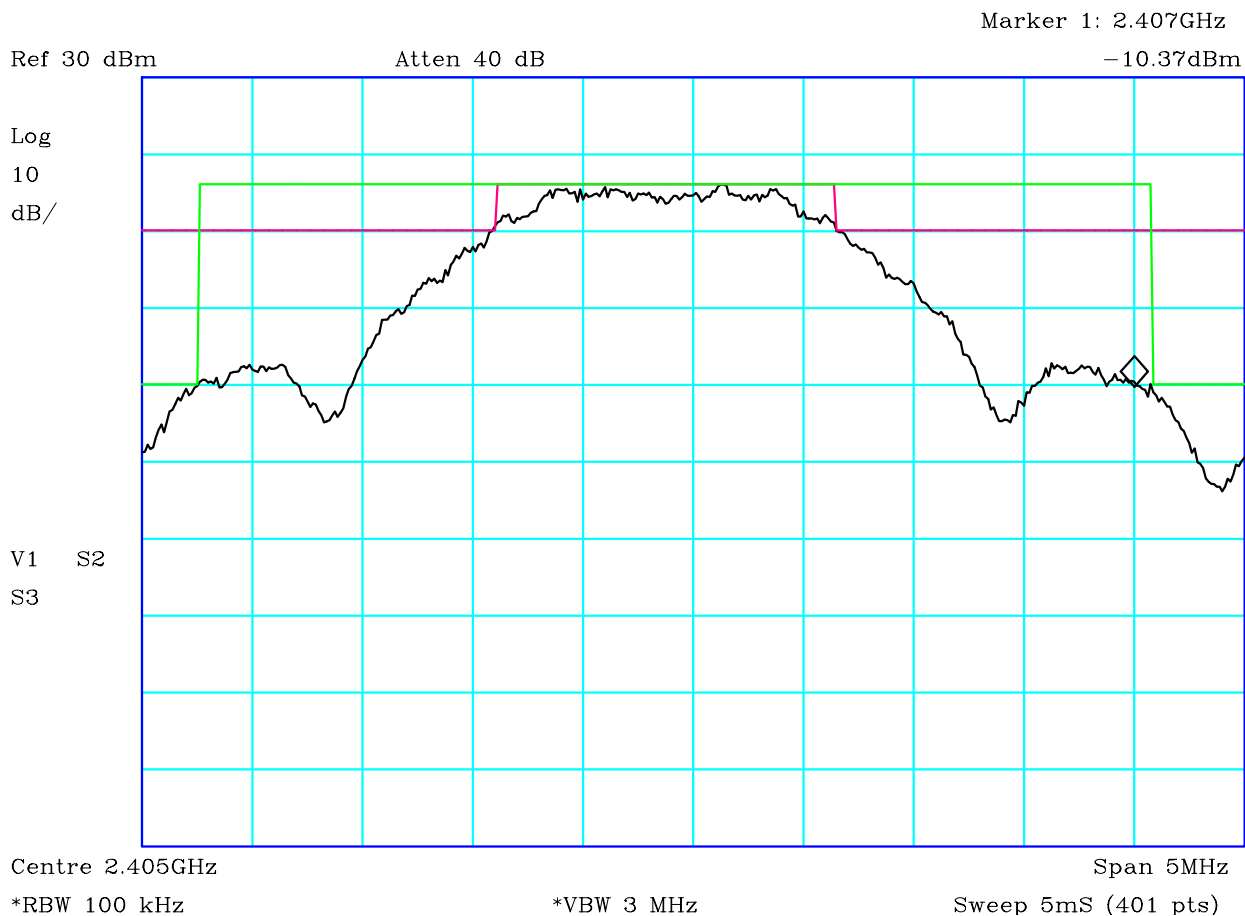

PLOT 4 6dB Bandwidth - Channel 11

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	-6dB	Limit2:(GRN)	-26dB
Limit3:		Limit4:	
Channel 11 6dB Bandwidth lies between 2.4043000 GHz and 2.4058375GHz. 6dB Bandwidth = 1.54MHz. 26dB Bandwidth = 4.31MHz. Part 15.247(a)(2) requires the 6dB bandwidth to be more than 500kHz.			
Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H241741C		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 29 of 56

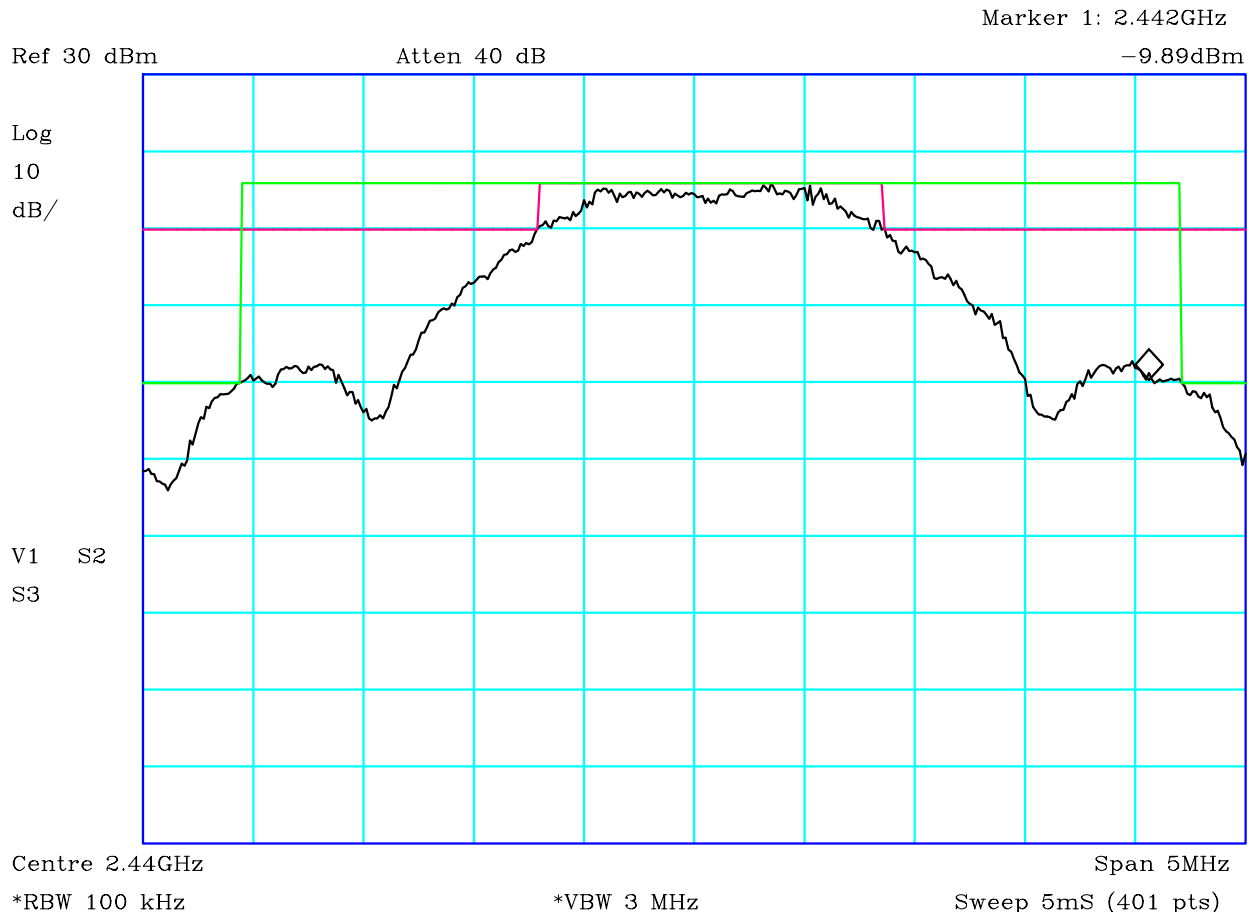


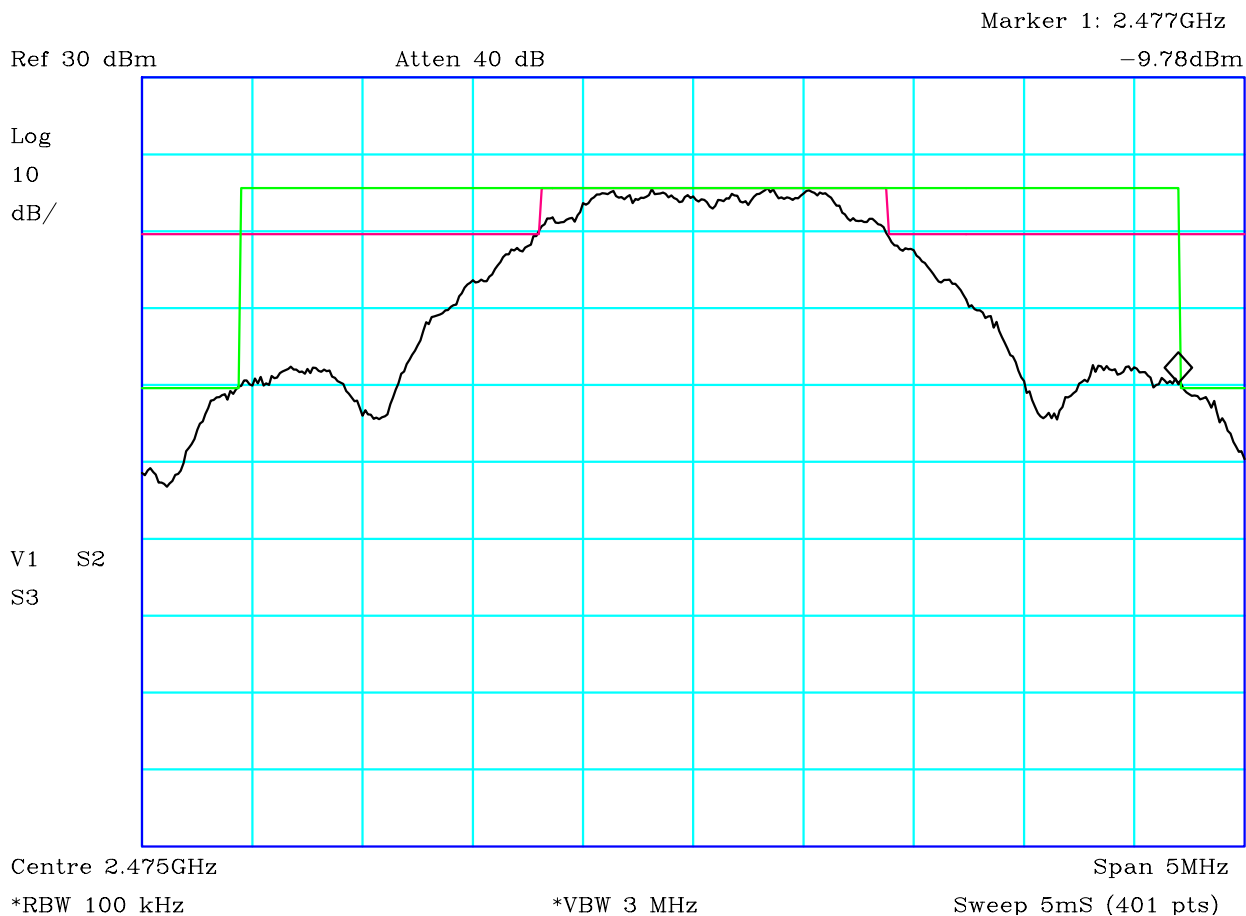
PLOT 5 6dB Bandwidth - Channel 18

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	-6dB	Limit2:(GRN)	-26dB
Limit3:		Limit4:	

Channel 18
6dB Bandwidth lies between 2.4392875 GHz and 2.4408625GHz.
6dB Bandwidth = 1.58MHz.
26dB Bandwidth = 4.26MHz.
Part 15.247(a)(2) requires the 6dB bandwidth to be more than 500kHz.

Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H2417427		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 30 of 56




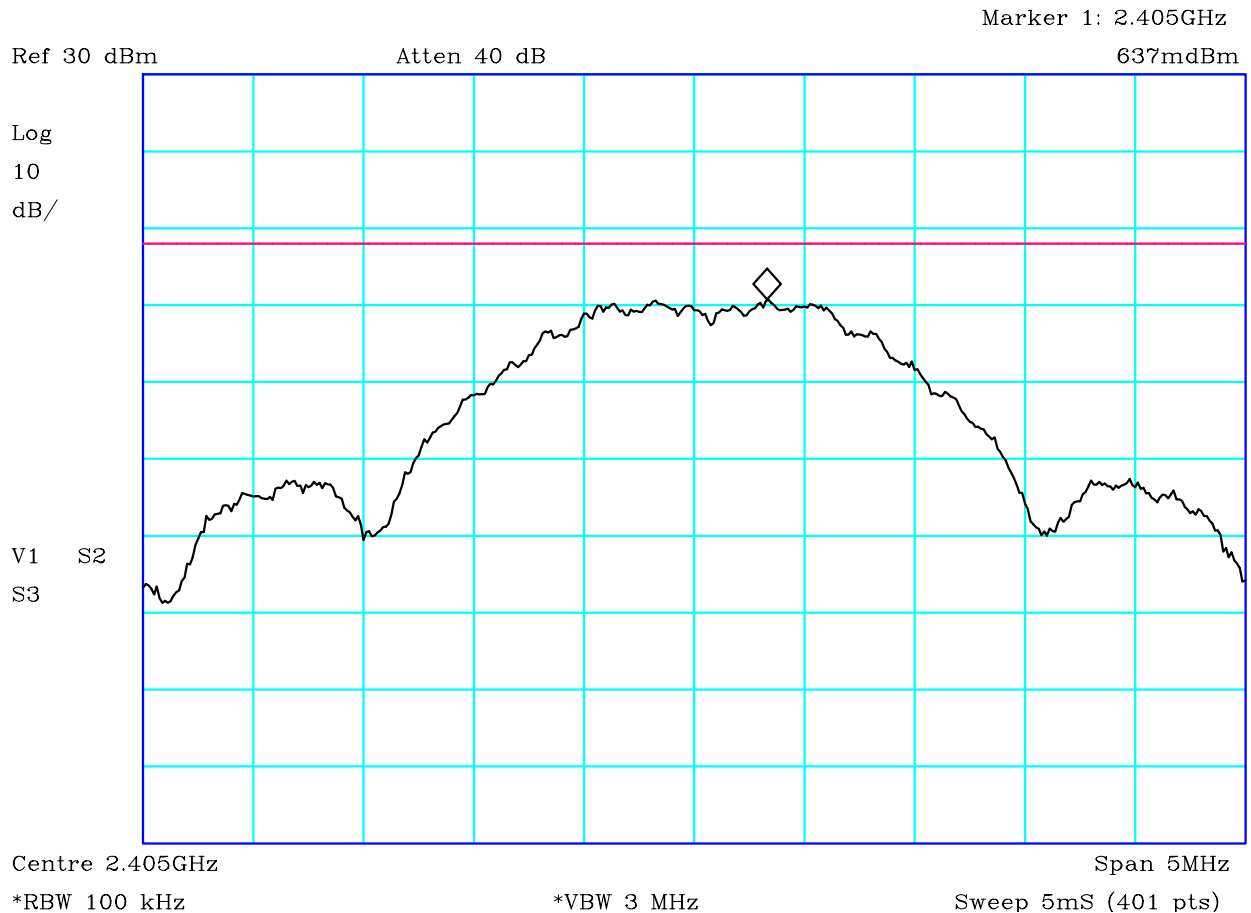
PLOT 6 6dB Bandwidth - Channel 25

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	-6dB	Limit2:(GRN)	-26dB
Limit3:		Limit4:	

Channel 25
 6dB Bandwidth lies between 2.4743000 GHz and 2.4758750GHz.
 6dB Bandwidth = 1.57MHz.
 26dB Bandwidth = 4.27MHz.
 Part 15.247(a)(2) requires the 6dB bandwidth to be more than 500kHz.

Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H2417433		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 31 of 56




CF1:-15.2


PLOT 7 Spectral Density - Channel 11

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	8dBm/3kHz	Limit2:	
Limit3:		Limit4:	

Channel 11
Maximum spectral density = 0.637 dBm/3kHz
Includes correction factor to conver from 100kHz to 3kHz bandwidth (-15.2dB)
Part 15 Subpart (c) 15.247(e) requires the spectral density to be below
8dBm/3kHz

Facility:	GTEM_1	Mode:	1
		Modification State:	1
File:	H2417449		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 32 of 56

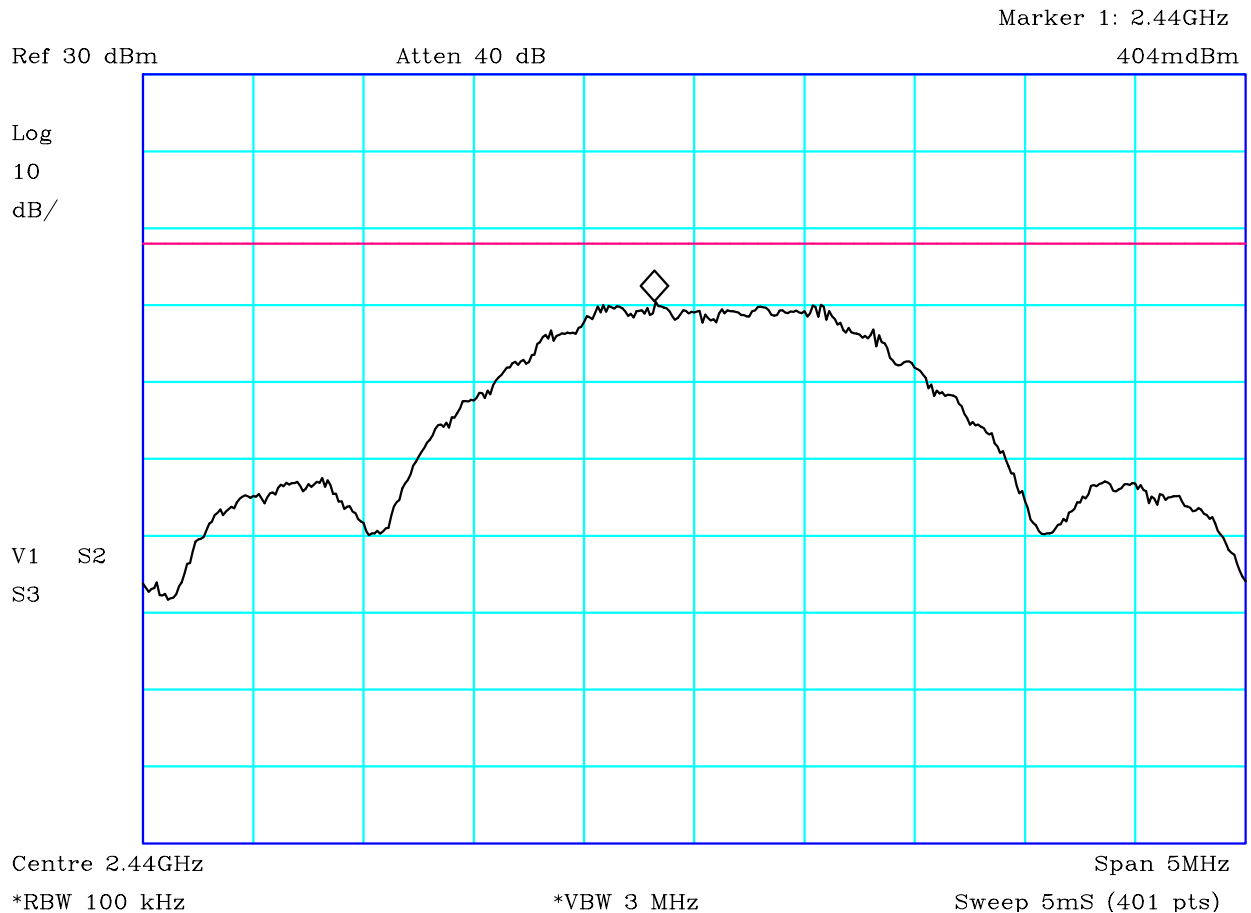

CF1:-15.2

PLOT 8 Spectral Density - Channel 18

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	8dBm/3kHz	Limit2:	
Limit3:		Limit4:	


Channel 18


Maximum spectral density = 0.404 dBm/3kHz

Includes correction factor to conver from 100kHz to 3kHz bandwidth (-15.2dB)

Part 15 Subpart (c) 15.247(e) requires the spectral density to be below 8dBm/3kHz

Facility:	GTEM_1	Mode:	1
		Modification State:	1
File:	H2417443		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 33 of 56

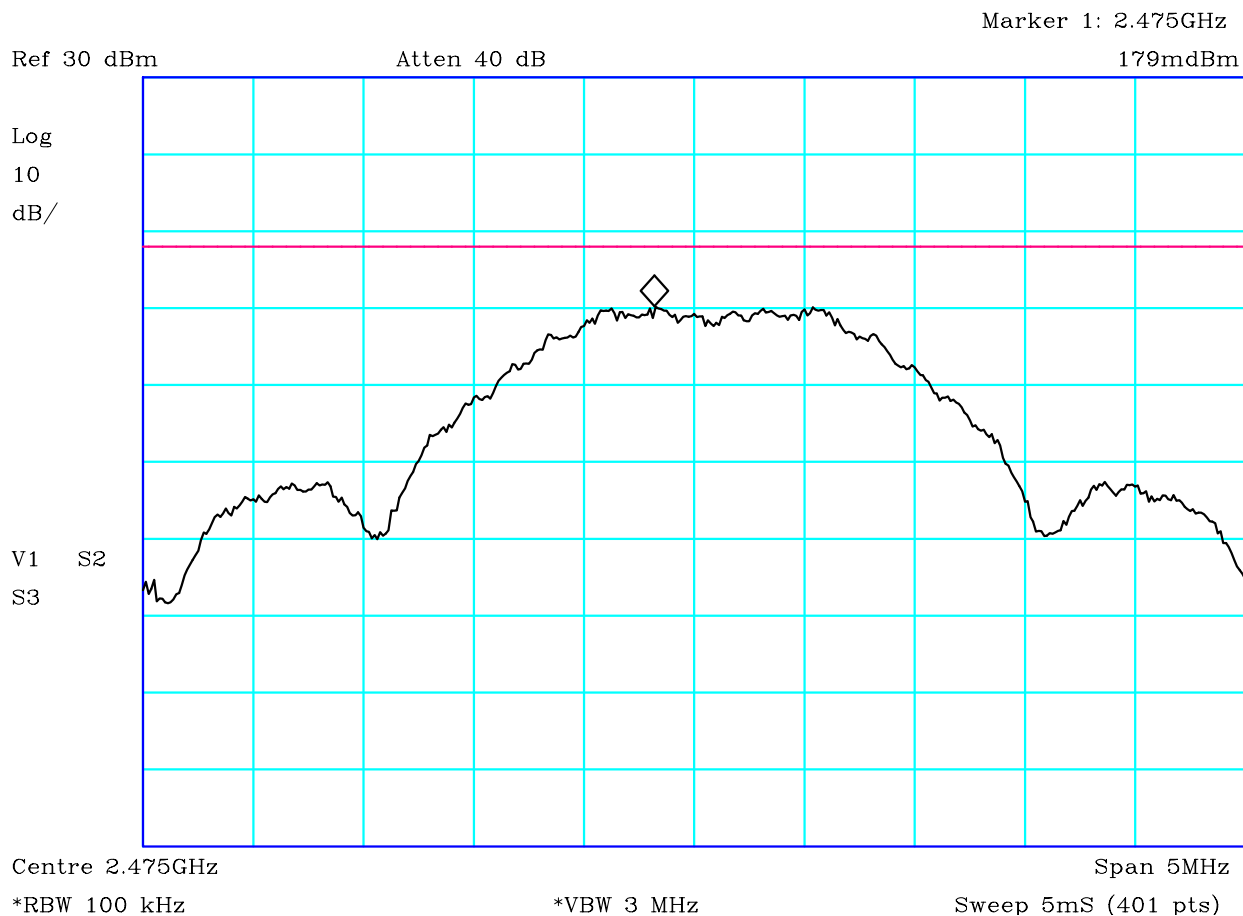


CF1:-15.2


PLOT 9 Spectral Density - Channel 25

Company:	Alertme	Product:	Repeater
Date:	17/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	8dBm/3kHz	Limit2:	
Limit3:		Limit4:	

Channel 25
Maximum spectral density = 0.179 dBm/3kHz
Includes correction factor to conver from 100kHz to 3kHz bandwidth (-15.2dB)
Part 15 Subpart (c) 15.247(e) requires the spectral density to be below
8dBm/3kHz

Facility:	GTEM_1	Mode:	1
		Modification State:	1
File:	H2417446		


	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 34 of 56

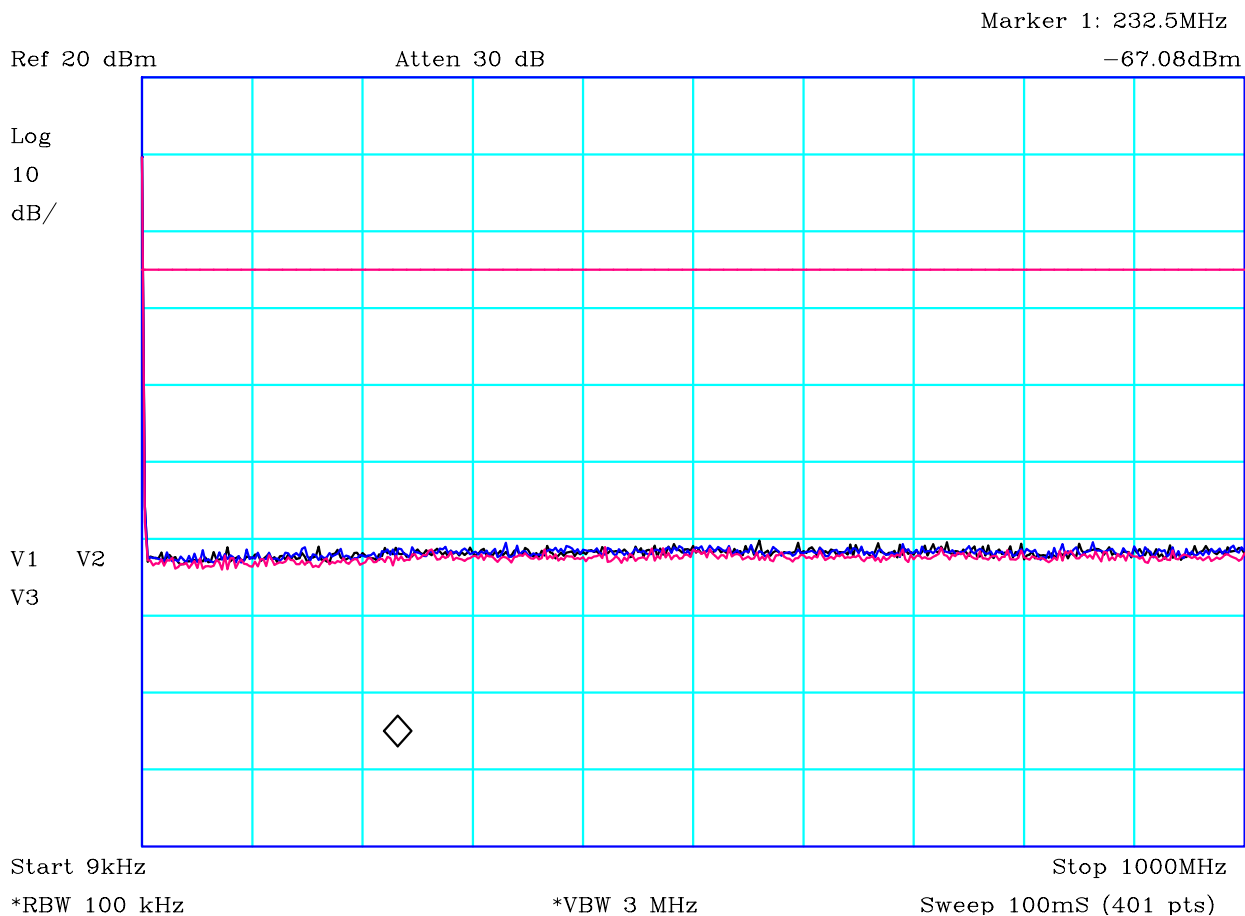

--


PLOT 10 Antenna Conducted Spurious - 9kHz to 1GHz


Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:		Method:	
Limit1:(VIO)	-20dBc	Limit2:	
Limit3:		Limit4:	
<p>Black = Channel 11 Blue = Channel 18 Red = Channel 25 Part 15 Subpart (c) 15.247(d) requires spurious conducted emissions to be at least 20dB below carrier. Carrier level of 15dBm used to set limit. (With 100kHz RBW all channels measured within 0.5dB of 15dBm) Sample 1.</p>			
Facility:	GTEM_1	Height	Mode: 1
Distance		Polarisation	Modification State: 0
Angle		File:	H2403737

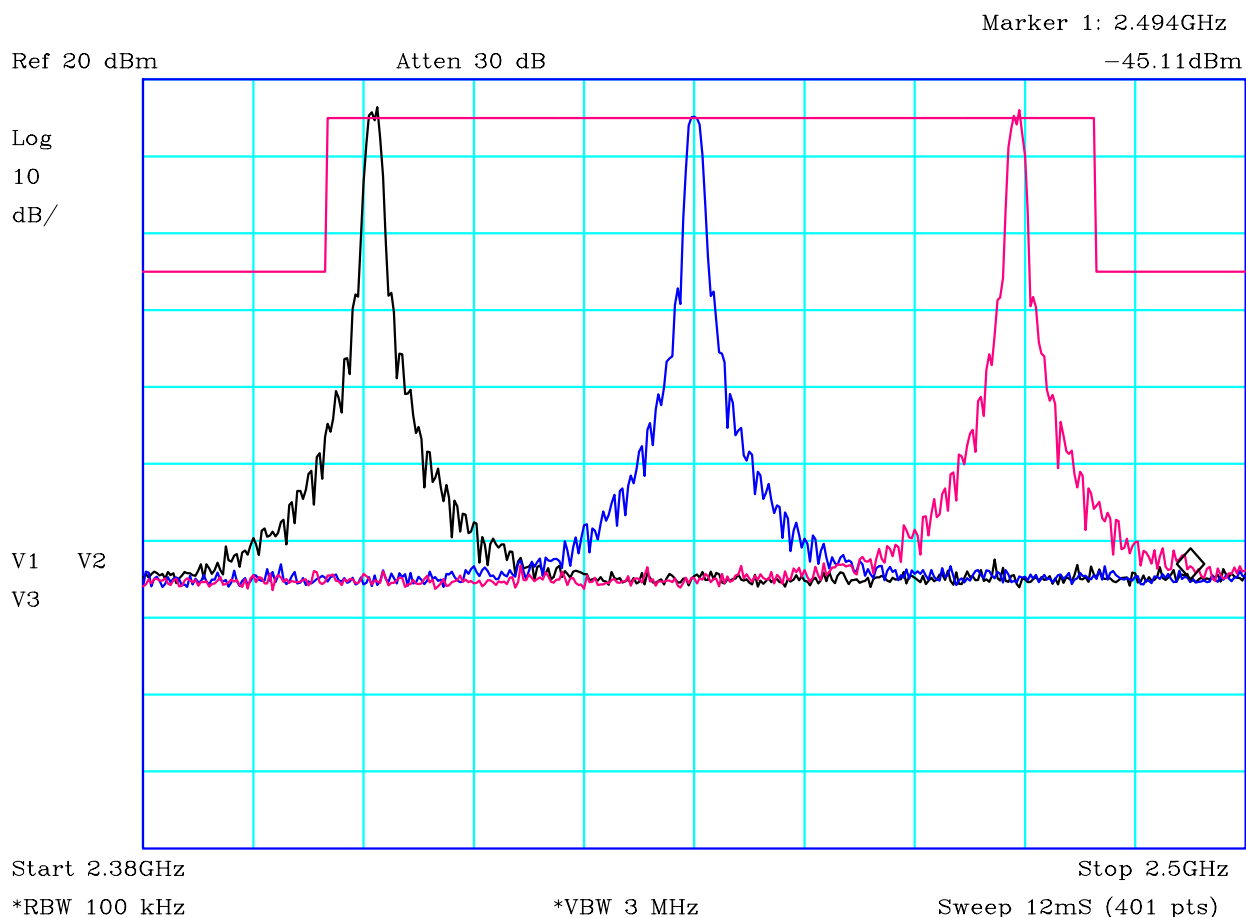

PLOT 11 Antenna Conducted Spurious - near band edges

Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	-20dBc	Limit2:	
Limit3:		Limit4:	
Black = Channel 11 Blue = Channel 18 Red = Channel 25 Part 15 Subpart (c) 15.247(d) requires spurious conducted emissions to be at least 20dB below carrier. Carrier level of 15dBm used to set limit. (With 100kHz RBW all channels measured within 0.5dB of 15dBm) Sample 1.			
Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H240370B		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 36 of 56

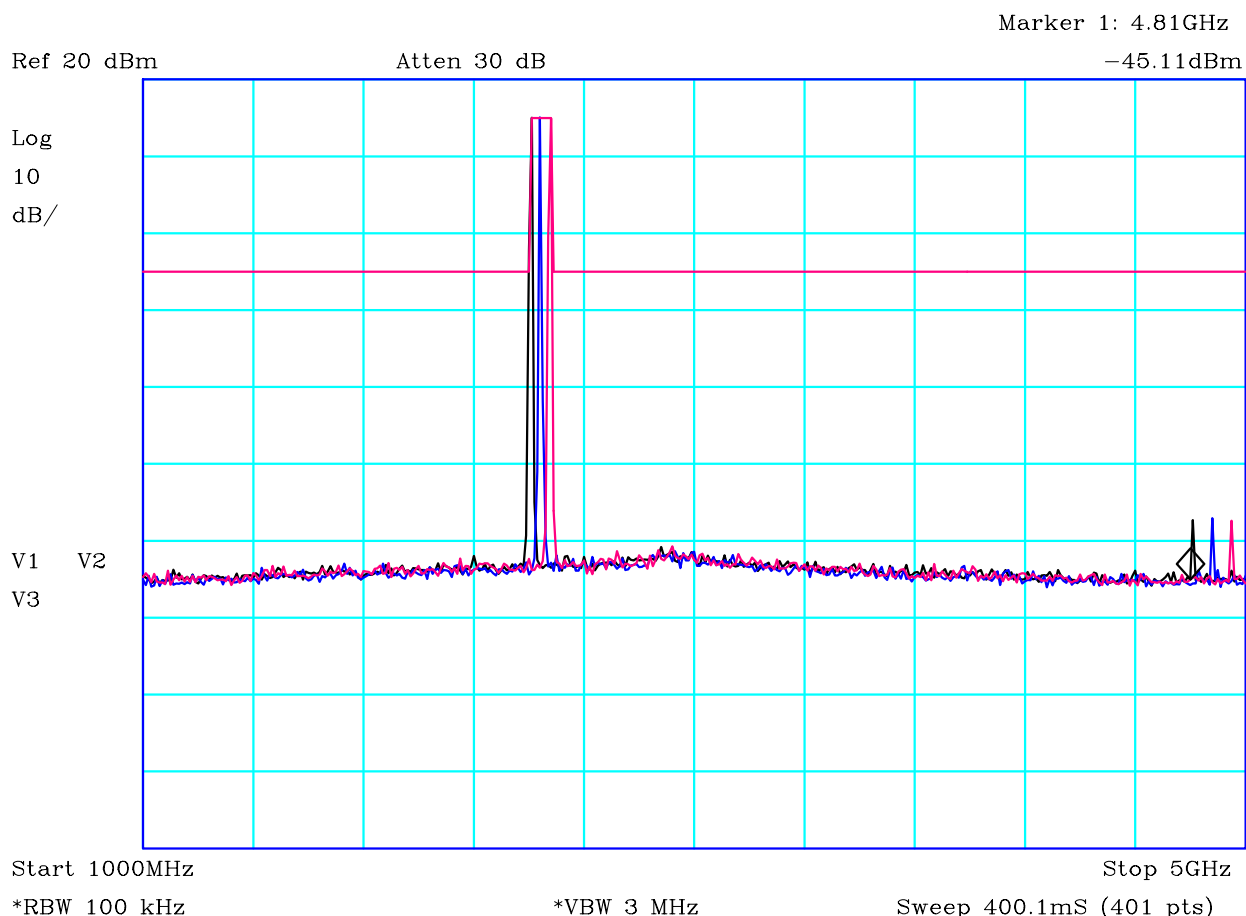


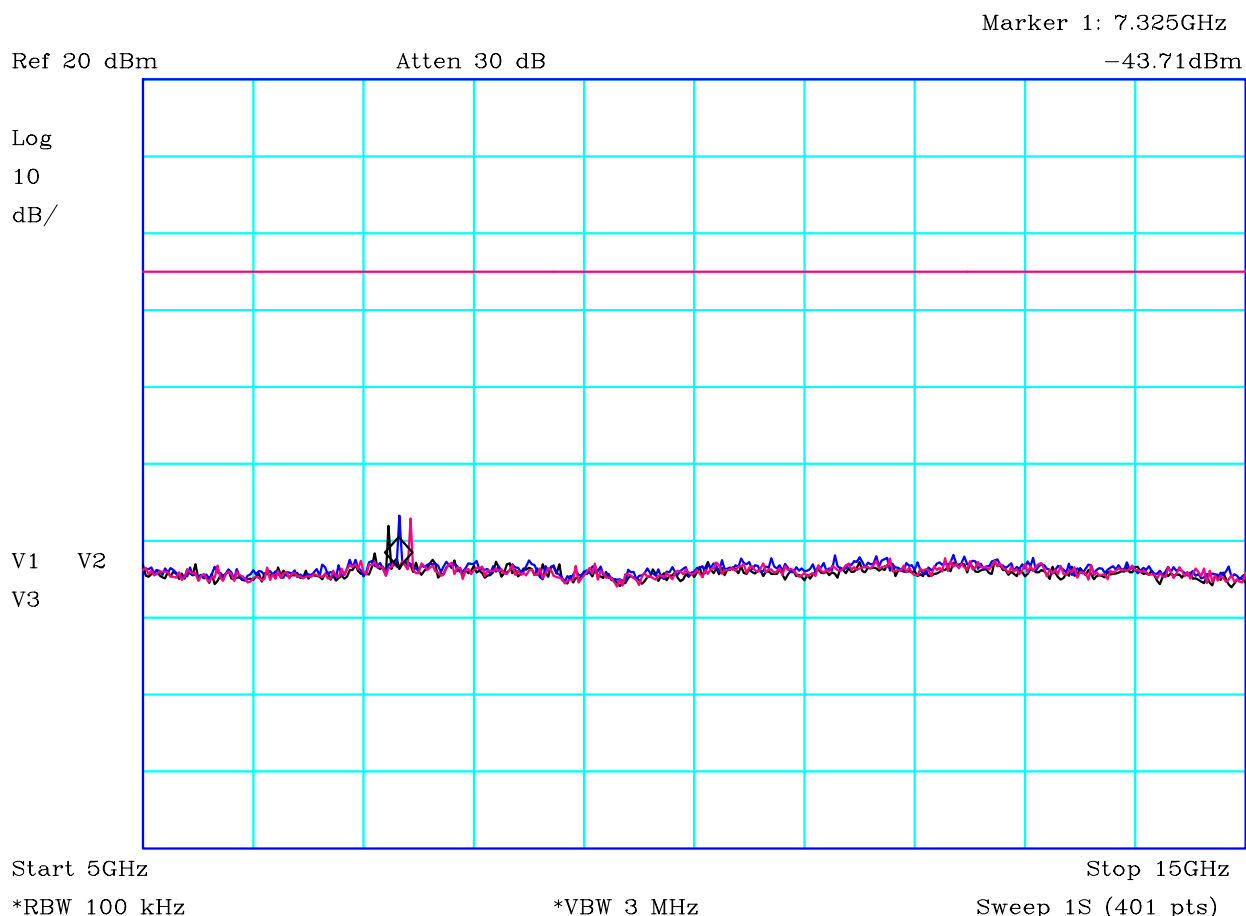
PLOT 12 Antenna Conducted Spurious - 1GHz to 5GHz

Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	-20dBc	Limit2:	
Limit3:		Limit4:	

Black = Channel 11
Blue = Channel 18
Red = Channel 25
Part 15 Subpart (c) 15.247(d) requires spurious conducted emissions to be at least 20dB below carrier.
Carrier level of 15dBm used to set limit. (With 100kHz RBW all channels measured within 0.5dB of 15dBm)
Sample 1.

Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H2403713		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 37 of 56




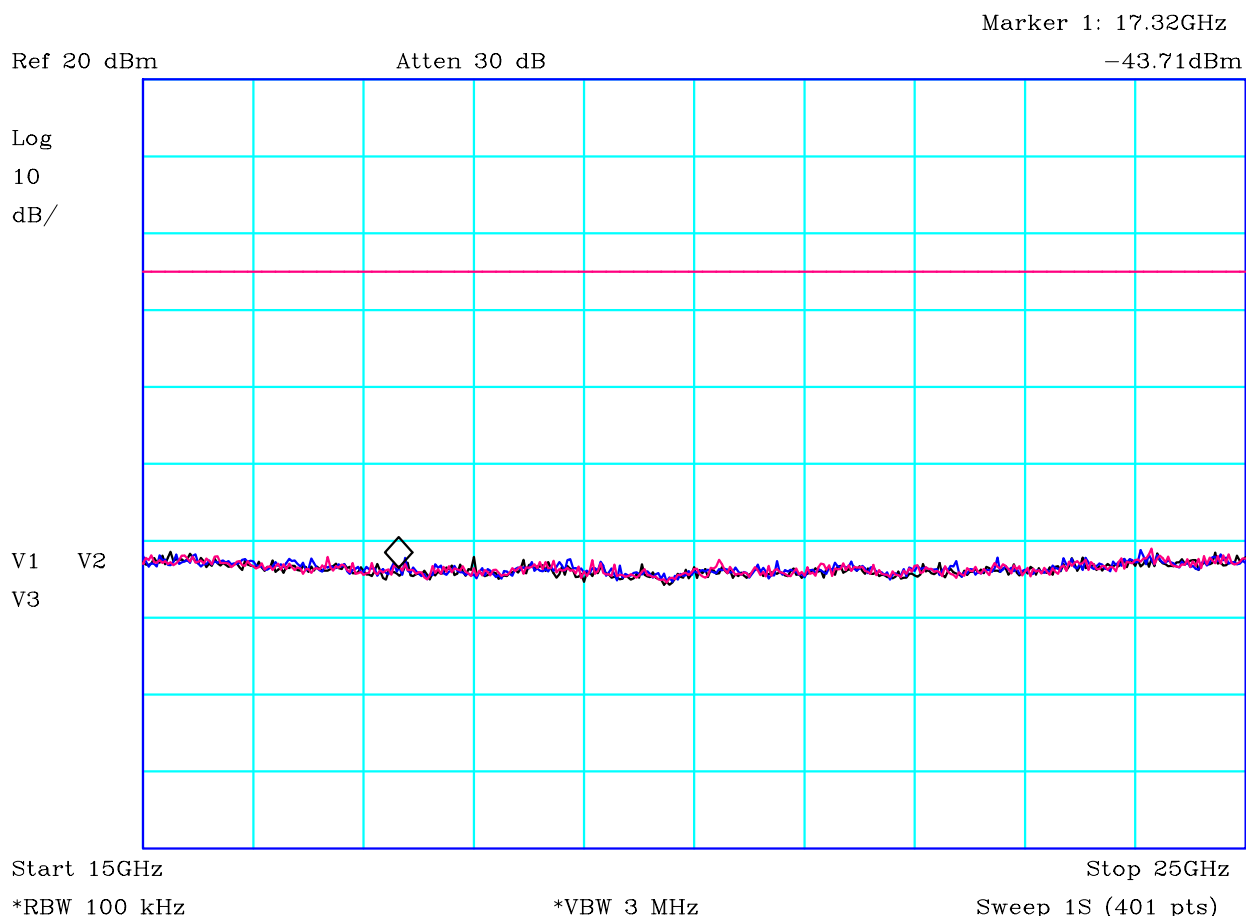
PLOT 13 Antenna Conducted Spurious - 5GHz to 15GHz

Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	-20dBc	Limit2:	
Limit3:		Limit4:	

Black = Channel 11
 Blue = Channel 18
 Red = Channel 25
 Part 15 Subpart (c) 15.247(d) requires spurious conducted emissions to be at least 20dB below carrier.
 Carrier level of 15dBm used to set limit. (With 100kHz RBW all channels measured within 0.5dB of 15dBm)
 Sample 1.

Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H240371C		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 38 of 56




--

PLOT 14 Antenna Conducted Spurious - 15GHz to 25GHz

Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:	D01 DTS Meas Guidance v01	Method:	
Limit1:(VIO)	-20dBc	Limit2:	
Limit3:		Limit4:	

Black = Channel 11
 Blue = Channel 18
 Red = Channel 25
 Part 15 Subpart (c) 15.247(d) requires spurious conducted emissions to be at least 20dB below carrier.
 Carrier level of 15dBm used to set limit. (With 100kHz RBW all channels measured within 0.5dB of 15dBm)
 Sample 1.


Facility:	GTEM_1	Mode:	1
		Modification State:	0
File:	H2403730		

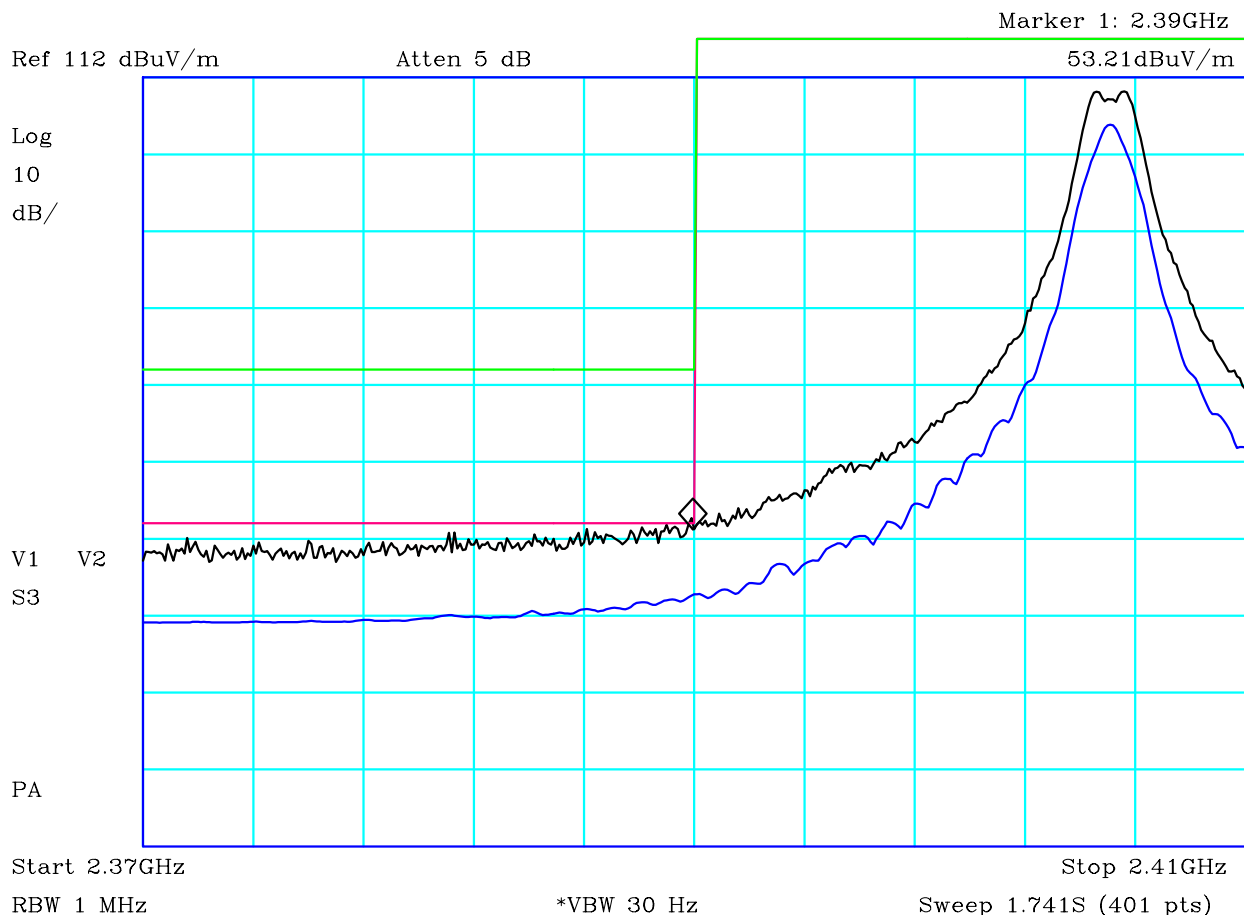

CF1:A23_3m_100806 CF2:CBL059_CBL018_CBL065_CBL060_100806

PLOT 15 Radiated Emissions - Zigbee Tx - Ch 11 - Band Edge - Vertical


Company:	Alertme	Product:	repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@3m Av	Limit2:(GRN)	FCC Restricted Bands@3m Pk
Limit3:		Limit4:	
<p>Sample 4. Black: 3MHz VBW (green limit), Blue: 30Hz VBW (red limit) Transmitting on channel 11. Maximum of EUT upright and flat.</p>			
Facility:	Anech_2	Height	1.5m
Distance	3m	Polarisation	V
Angle	0-360	File:	H23284B5
		Mode:	1
		Modification State:	0

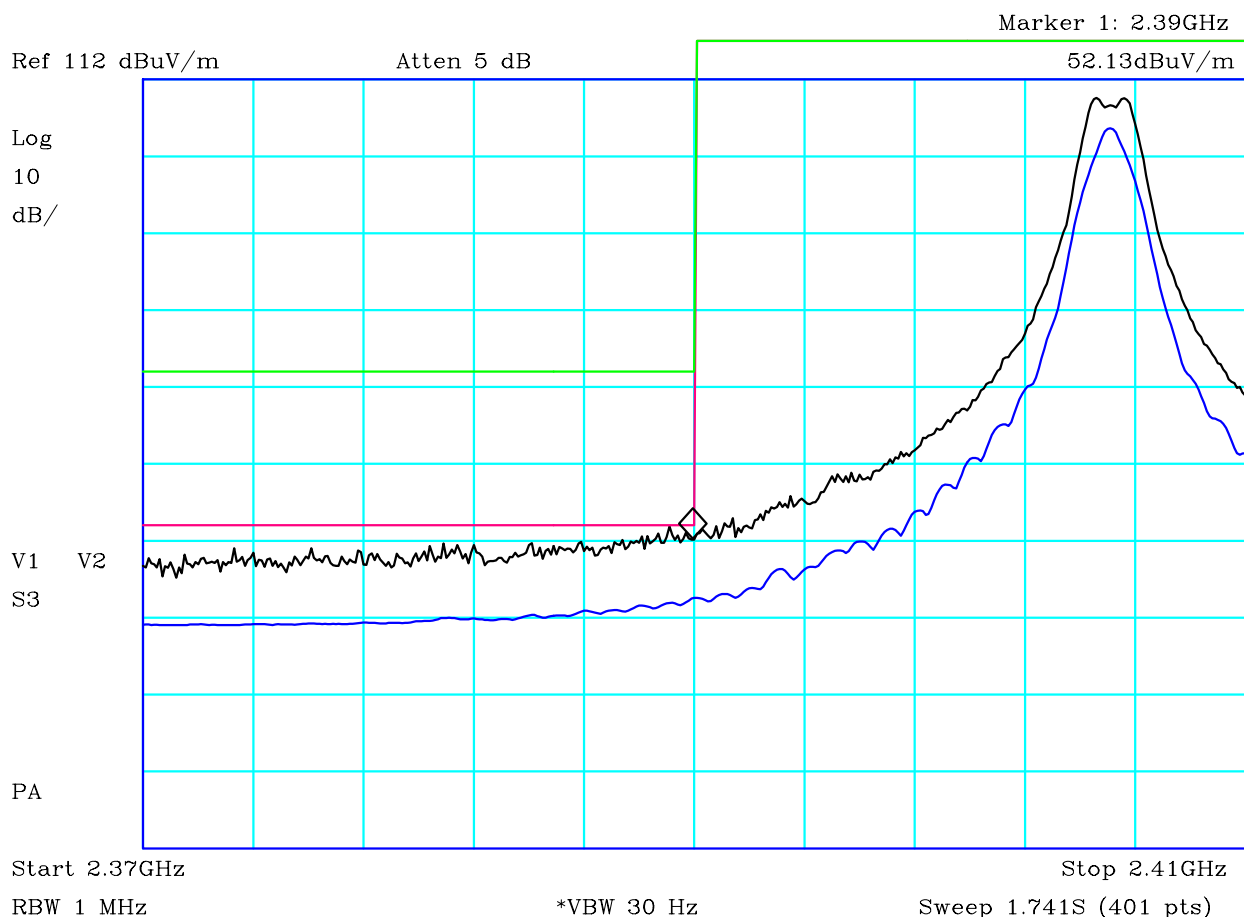

CF1:A23_3m_100806 CF2:CBL059_CBL018_CBL065_CBL060_100806

PLOT 16 Radiated Emissions - Zigbee Tx - Ch 11 - Band Edge - Horizontal


Company:	Alertme	Product:	repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@3m Av	Limit2:(GRN)	FCC Restricted Bands@3m Pk
Limit3:		Limit4:	
<p>Sample 4. Black: 3MHz VBW (green limit), Blue: 30Hz VBW (red limit) Transmitting on channel 11. Maximum of EUT upright and flat.</p>			
Facility:	Anech_2	Height	1.5m
Distance	3m	Polarisation	H
Angle	0-360	File:	H23284C8
		Mode:	1
		Modification State:	0

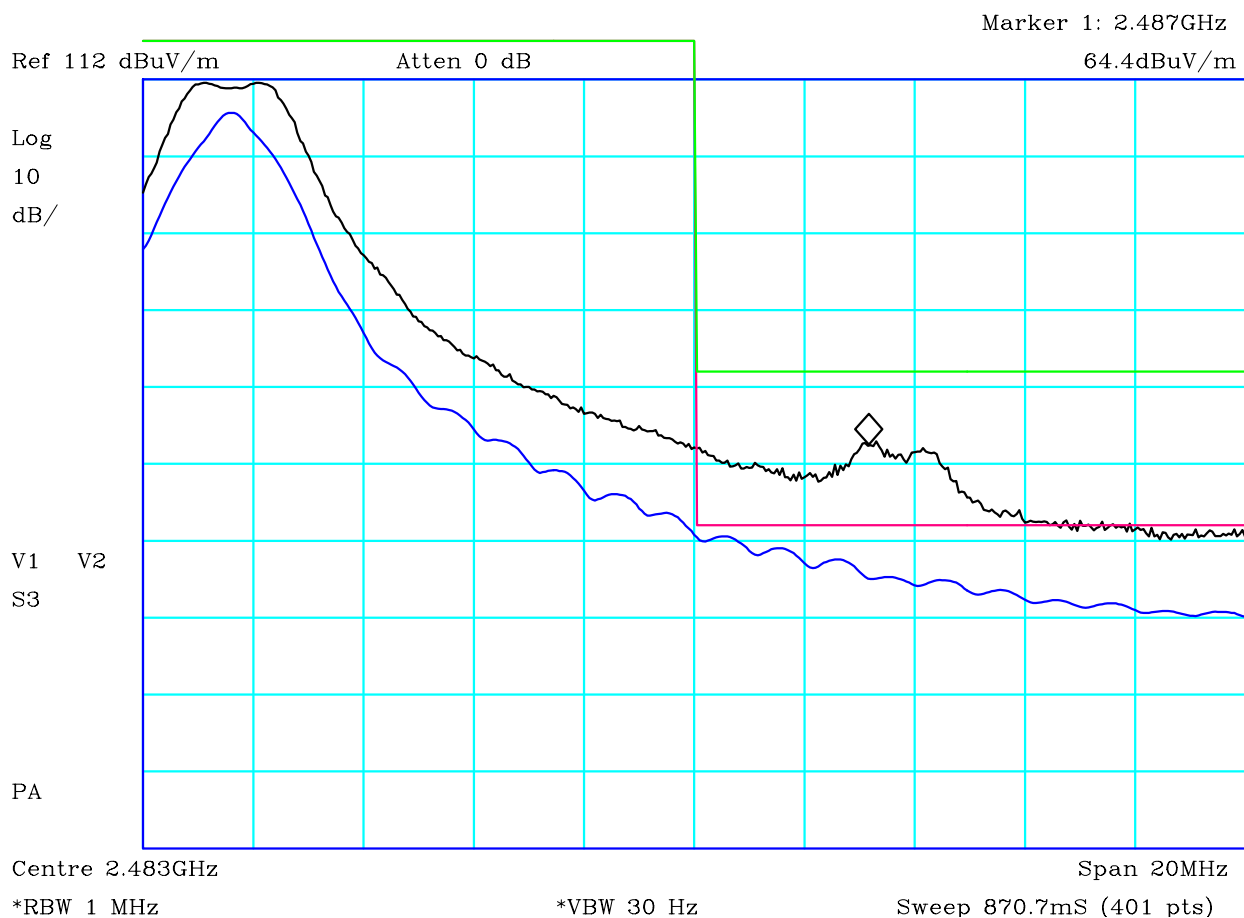

CF1:A23_3m_100806 CF2:CBL059_CBL018_CBL065_CBL060_100806

PLOT 17 Radiated Emissions - Zigbee Tx - Ch 25 - Band Edge -Vertical


Company:	Alertme	Product:	repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@3m Av	Limit2:(GRN)	FCC Restricted Bands@3m Pk
Limit3:		Limit4:	
<p>Sample 4.</p> <p>Black: 3MHz VBW (green limit), Blue: 30Hz VBW (red limit)</p> <p>Transmitting on channel 25.</p> <p>Maximum of EUT upright and flat.</p>			
Facility:	Anech_2	Height	1.5m
Distance	3m	Polarisation	V
Angle	0-360	File:	H2328506
Mode:	1	Modification State:	0

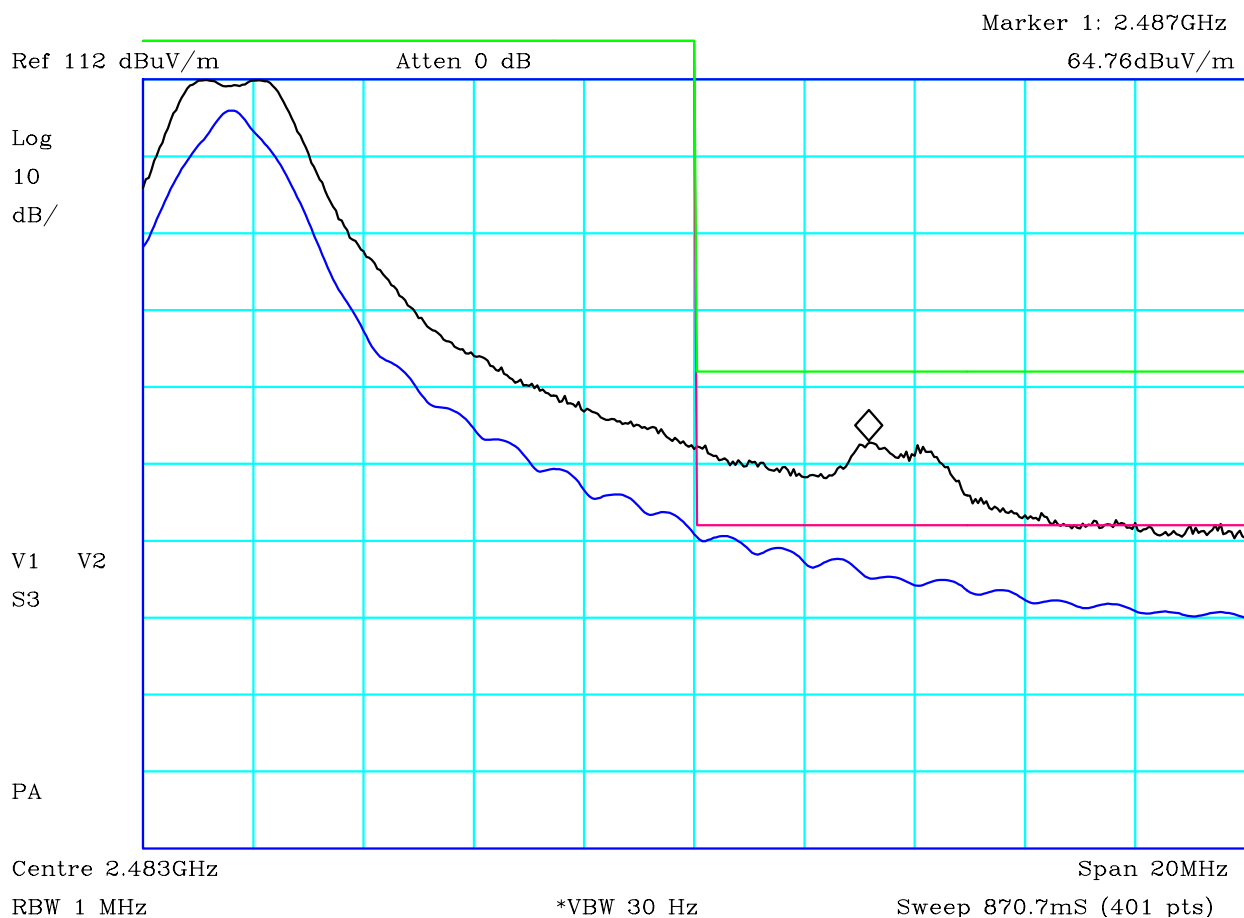

CF1:A23_3m_100806 CF2:CBL059_CBL018_CBL065_CBL060_100806

PLOT 18 Radiated Emissions - Zigbee Tx - Ch 25 - Band Edge - Horizontal


Company:	Alertme	Product:	repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@3m Av	Limit2:(GRN)	FCC Restricted Bands@3m Pk
Limit3:		Limit4:	
<p>Sample 4. Black: 3MHz VBW (green limit), Blue: 30Hz VBW (red limit) Transmitting on channel 25. Maximum of EUT upright and flat.</p>			
Facility:	Anech_2	Height	1.5m
Distance	3m	Polarisation	H
Angle	0-360	File:	H23284E7
		Mode:	1
		Modification State:	0

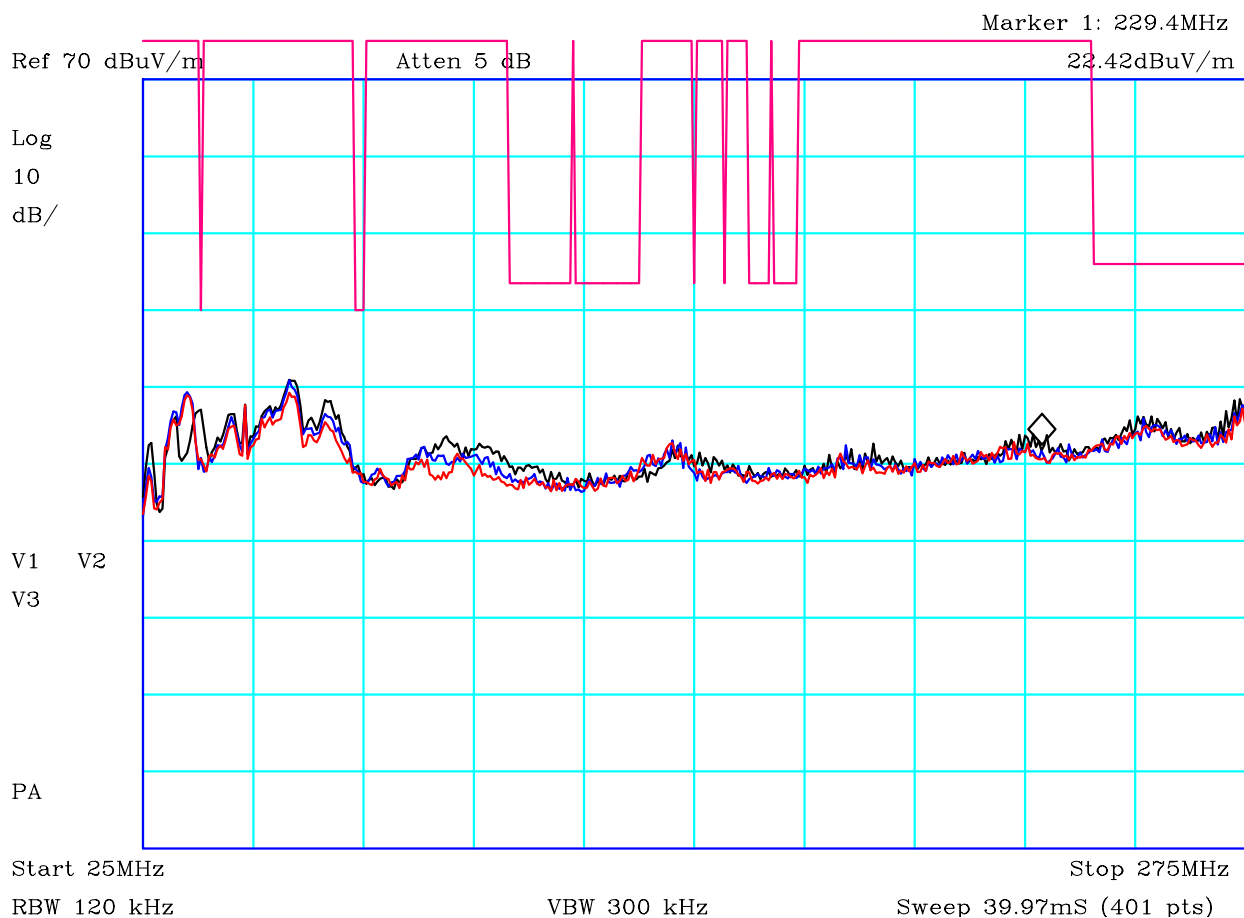

CF1:A15_100811 CF2:CBL002_CBL069_100809 CF4:RFF04_110112

PLOT 19 Radiated Emissions - Zigbee Tx - 25MHz to 275MHz


Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_1	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H24026A9
Mode:	1	Modification State:	0

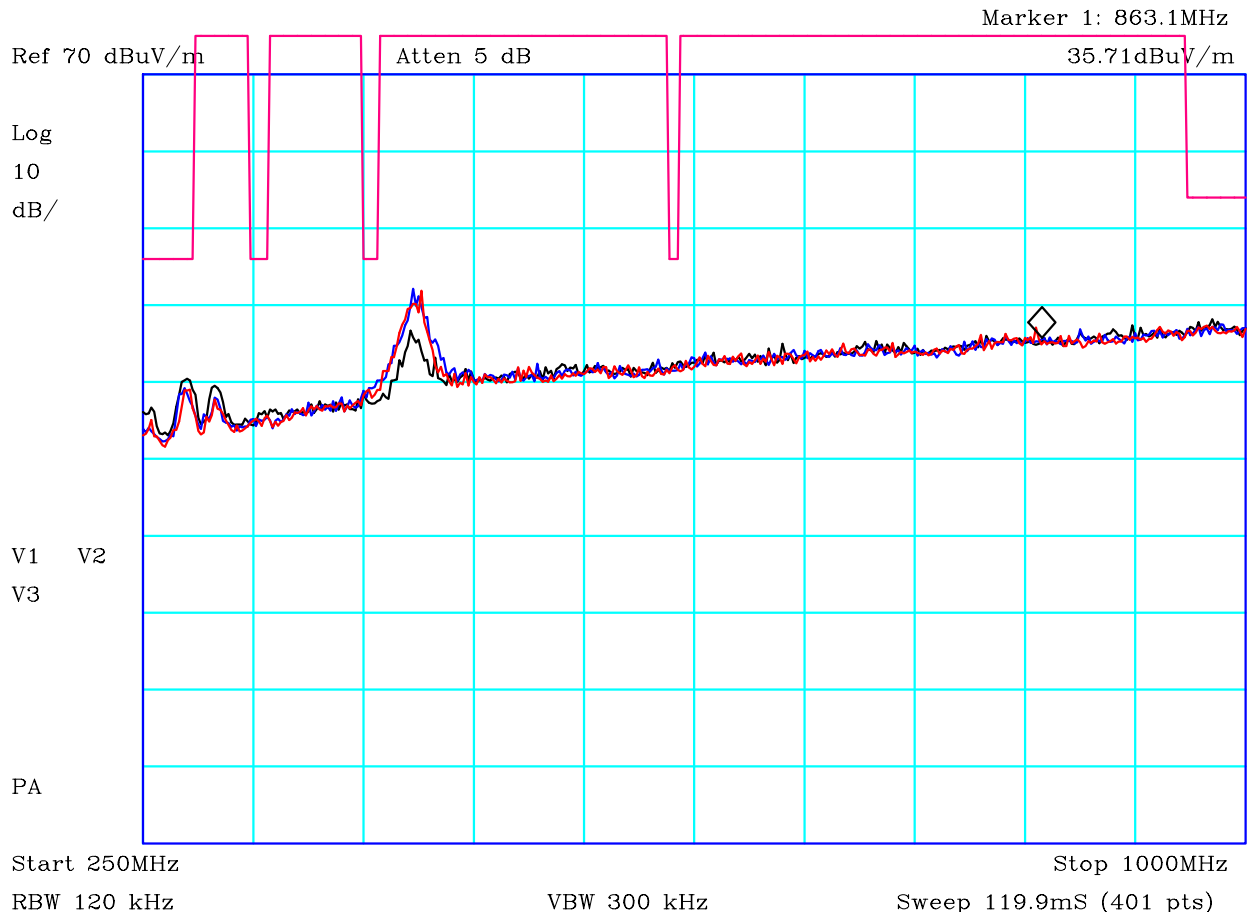

CF1:A15_100811 CF2:CBL002_CBL069_100809 CF4:RFF04_110112

PLOT 20 Radiated Emissions - Zigbee Tx - 250MHz to 1GHz


Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_1	Height	1m,1.5m,2m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H24026B9
		Mode:	1
		Modification State:	0

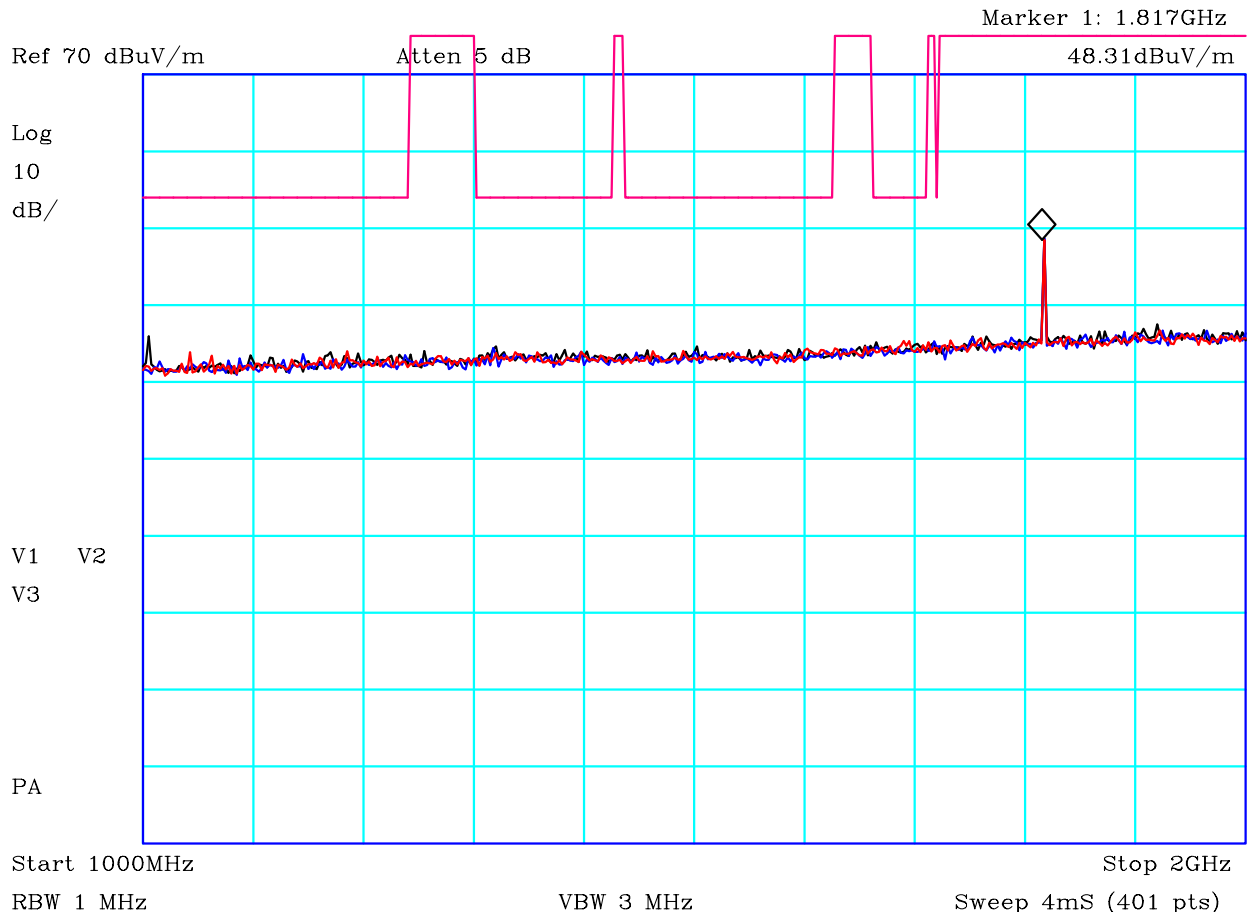


CF1:A23_3m_100806 CF2:CBL002_CBL069_100809 CF3:PRE7_110112 CF4:RFF04_110112

PLOT 21 Radiated Emissions - Zigbee Tx - 1GHz to 2GHz

Company:	Alertme	Product:	Repeater
Date:	02/05/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_1	Height	1m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H24025E7
		Mode:	1
		Modification State:	0


	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 46 of 56

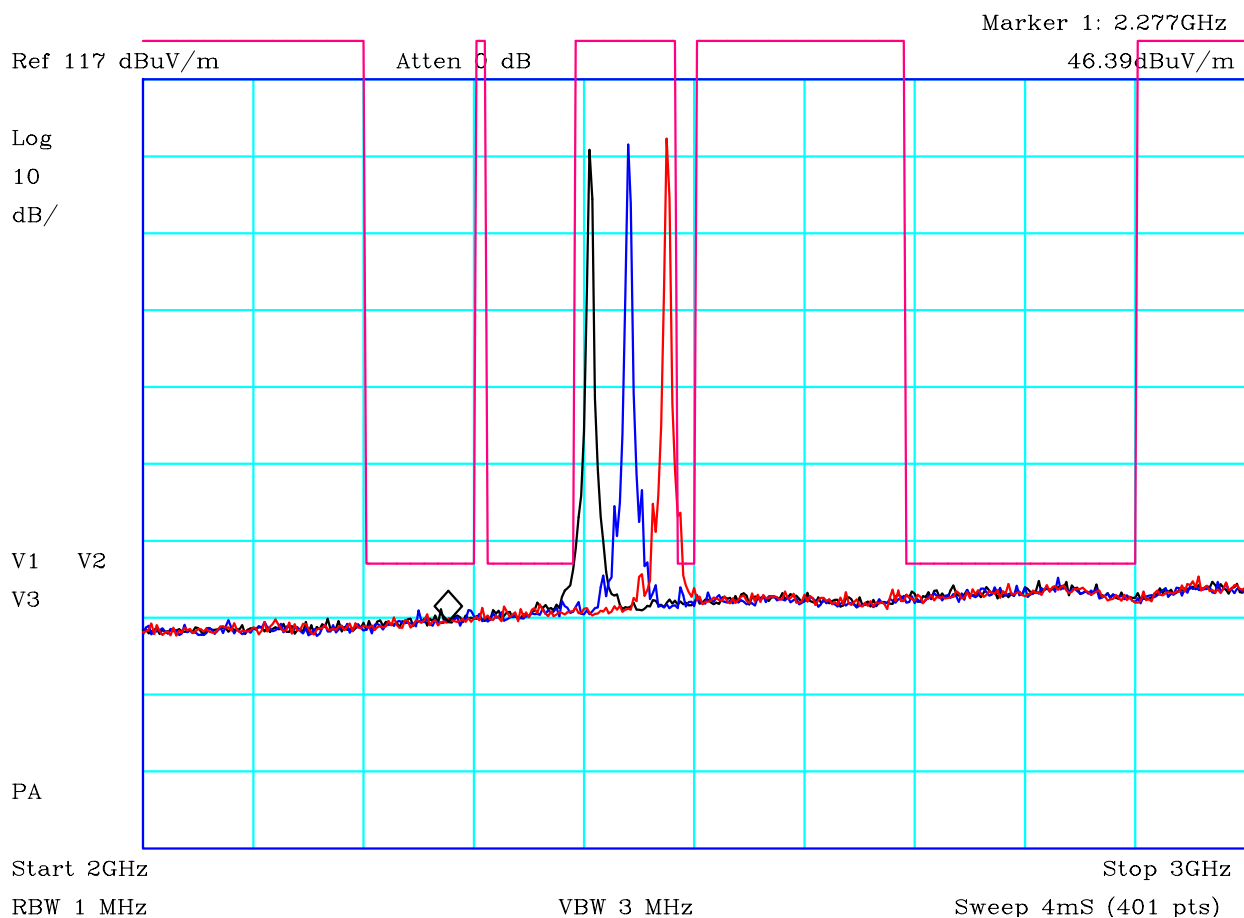

CF1:A23_3m_100806 CF2:CBL049_110107

PLOT 22 Radiated Emissions - Zigbee Tx - 2GHz to 3GHz


Company:	Alertme	Product:	repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@3m Av	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_2	Height	1.5m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H2328478
		Mode:	1
		Modification State:	0

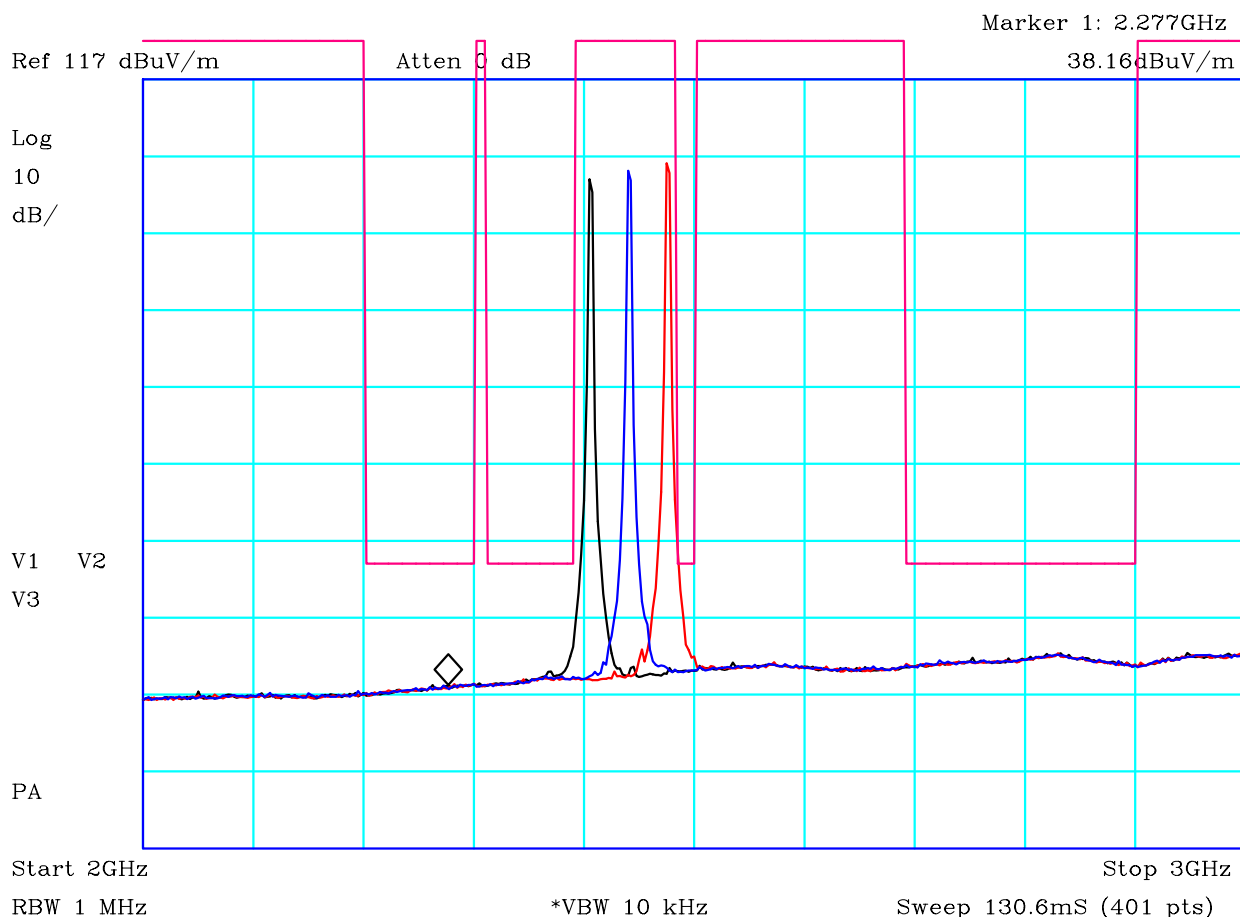


CF1:A23_3m_100806 CF2:CBL049_110107

PLOT 23 Radiated Emissions - Zigbee Tx - 2GHz to 3GHz - 10kHz VBW

Company:	Alertme	Product:	repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@3m Av	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat. Video bandwidth reduced to 10kHz for average indication.			
Facility:	Anech_2	Height	1.5m
Distance	3m	Polarisation	V+H
Angle	0-360	File:	H232849B
		Mode:	1
		Modification State:	0


	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 48 of 56

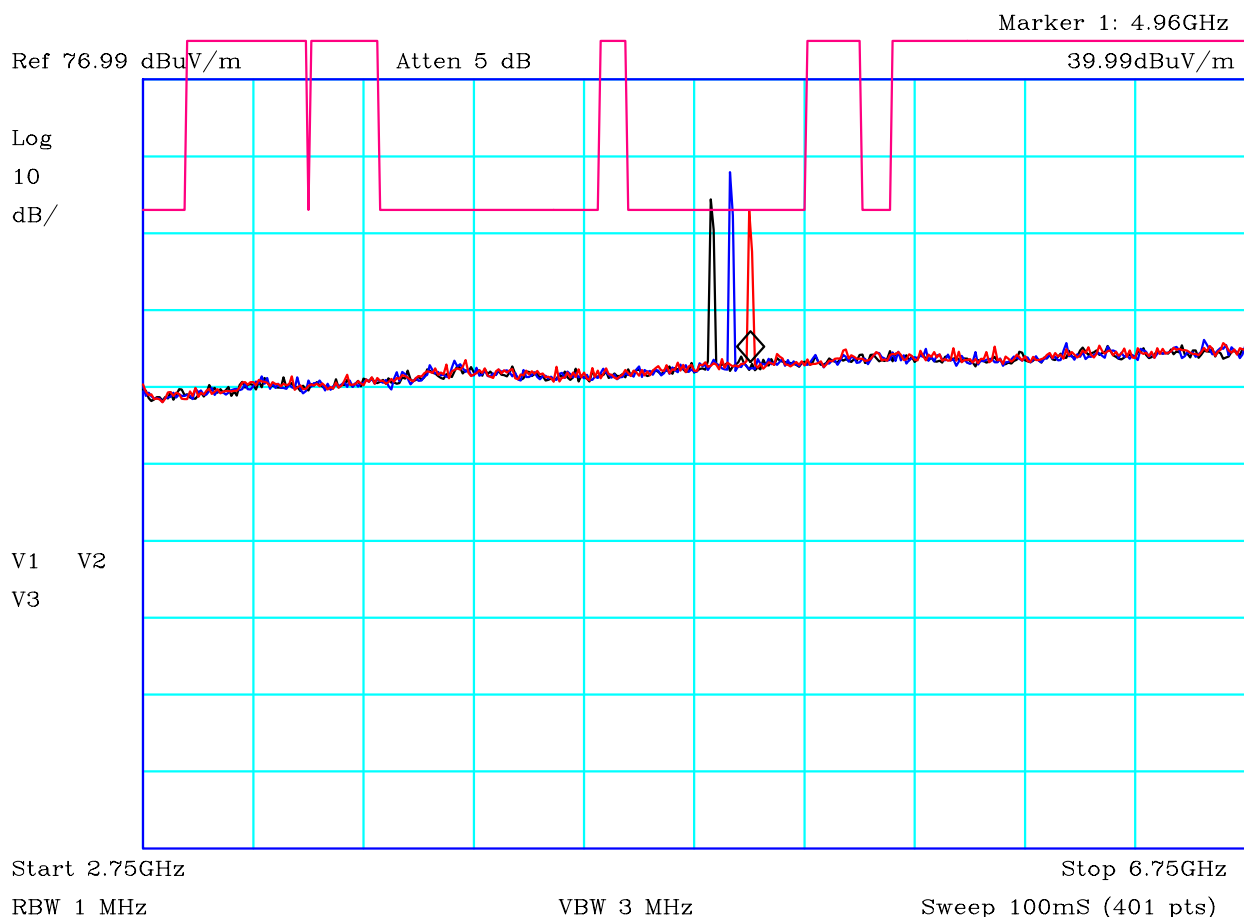

CF1:A23_3m_100806 CF2:PRE7_CBL052_CBL093_110112 CF3:RFF01_110112

PLOT 24 Radiated Emissions - Zigbee Tx - 2.75GHz to 6.75GHz


Company:	Alertme	Product:	Repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@1.5m	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Vertical, Blue: Horizontal Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_2	Height	1.5m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H23286E5
		Mode:	1
		Modification State:	0

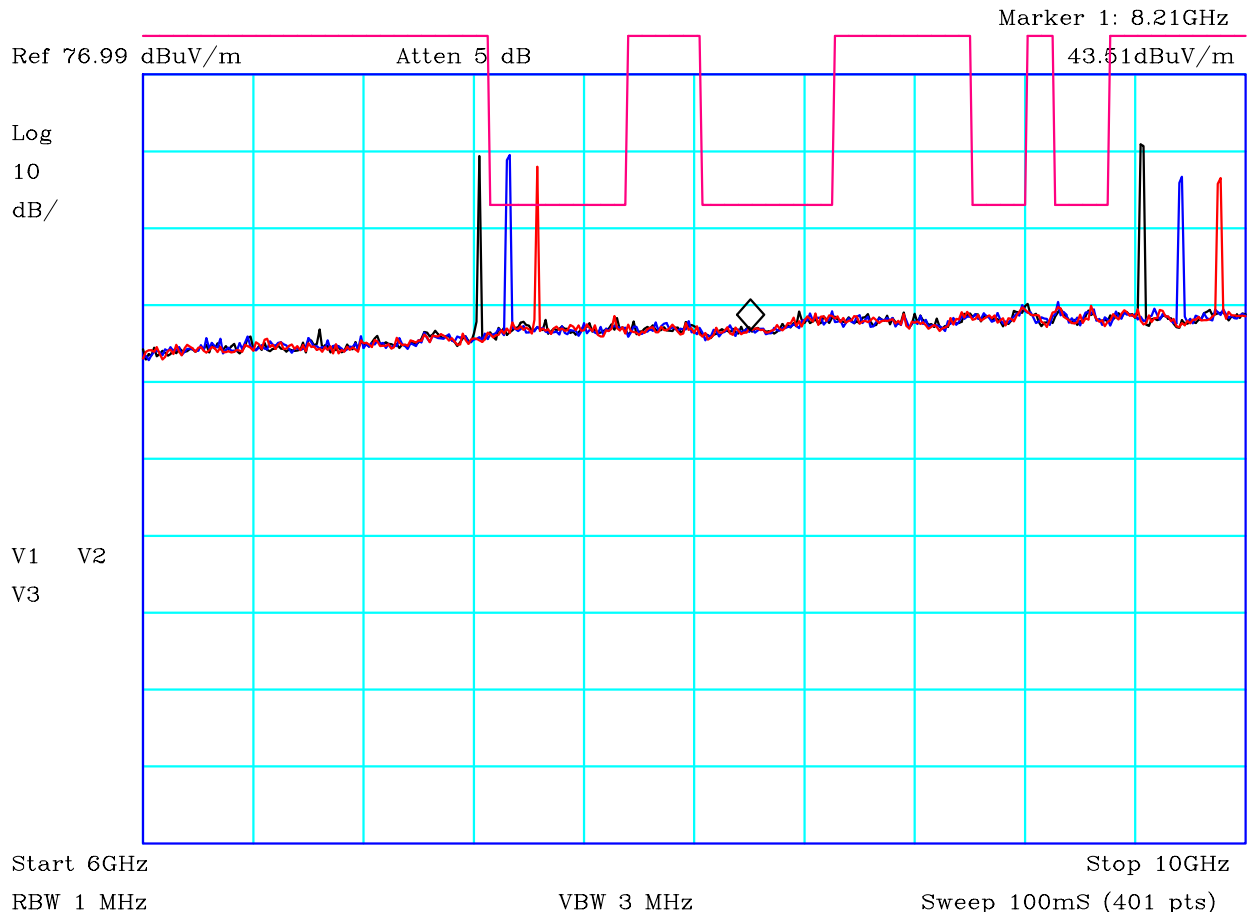


CF1:A23_3m_100806 CF2:PRE7_CBL052_CBL093_110112 CF3:RFF01_110112

PLOT 25 Radiated Emissions - Zigbee Tx - 6GHz to 10GHz

Company:	Alertme	Product:	Repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@1.5m	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Vertical, Blue: Horizontal Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_2	Height	1.5m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H23286C2
		Mode:	1
		Modification State:	0

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 50 of 56

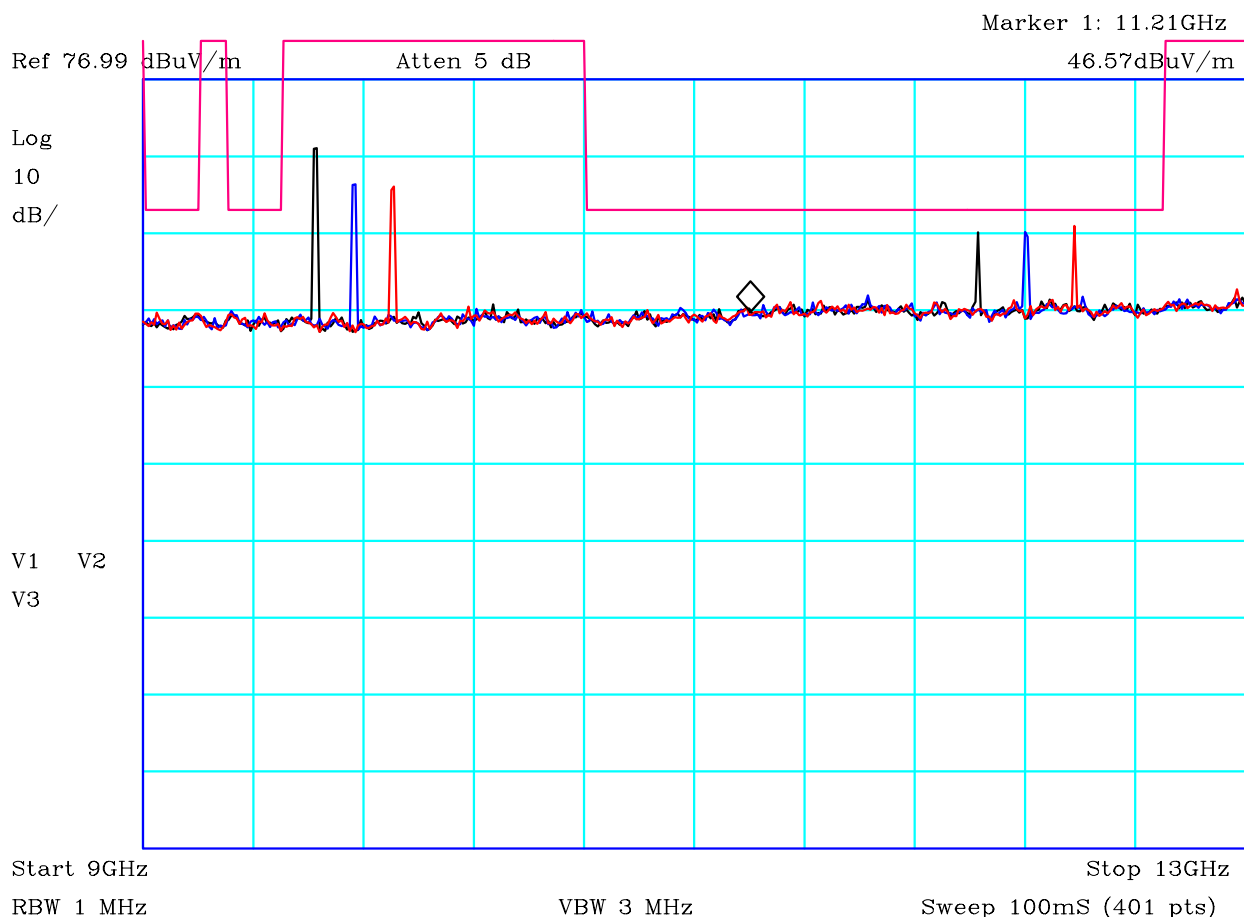


CF1:A23_3m_100806 CF2:PRE7_CBL052_CBL093_110112 CF3:RFF01_110112


PLOT 26 Radiated Emissions - Zigbee Tx - 9GHz to 13GHz

Company:	Alertme	Product:	Repeater
Date:	28/04/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@1.5m	Limit2:	
Limit3:		Limit4:	

Sample 4.
 Black: Vertical, Blue: Horizontal
 Black: Ch11, Blue: Ch18, Red: Ch25
 Peak measurement
 Maximum of EUT upright and flat.

Facility:	Anech_2	Height	1.5m	Mode:	1
Distance	1.5m	Polarisation	V+H	Modification State:	0
Angle	0-360	File:	H23286A5		

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 51 of 56

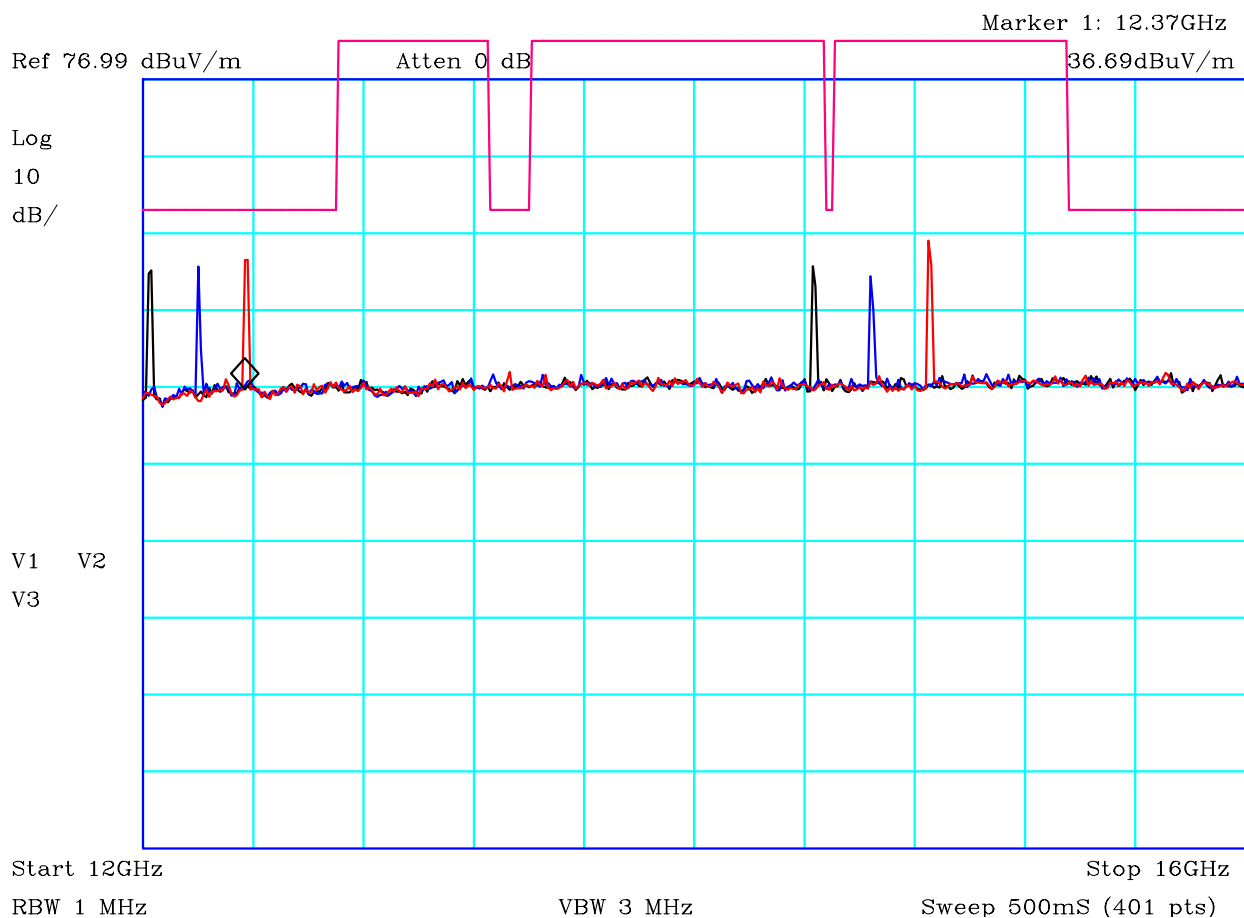


CF1:A22_3m_100201 CF2:PRE7_CBL052_CBL093_110112

PLOT 27 Radiated Emissions - Zigbee Tx - 12GHz to 16GHz

Company:	Alertme	Product:	Repeater
Date:	01/05/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@1.5m	Limit2:	
Limit3:		Limit4:	

Sample 4.
Black: Vertical, Blue: Horizontal
Black: Ch11, Blue: Ch18, Red: Ch25
Peak measurement
Maximum of EUT upright and flat.


Facility:	Anech_2	Height	1.5m	Mode:	1
Distance	1.5m	Polarisation	V+H	Modification State:	0
Angle	0-360	File:	H2401768		

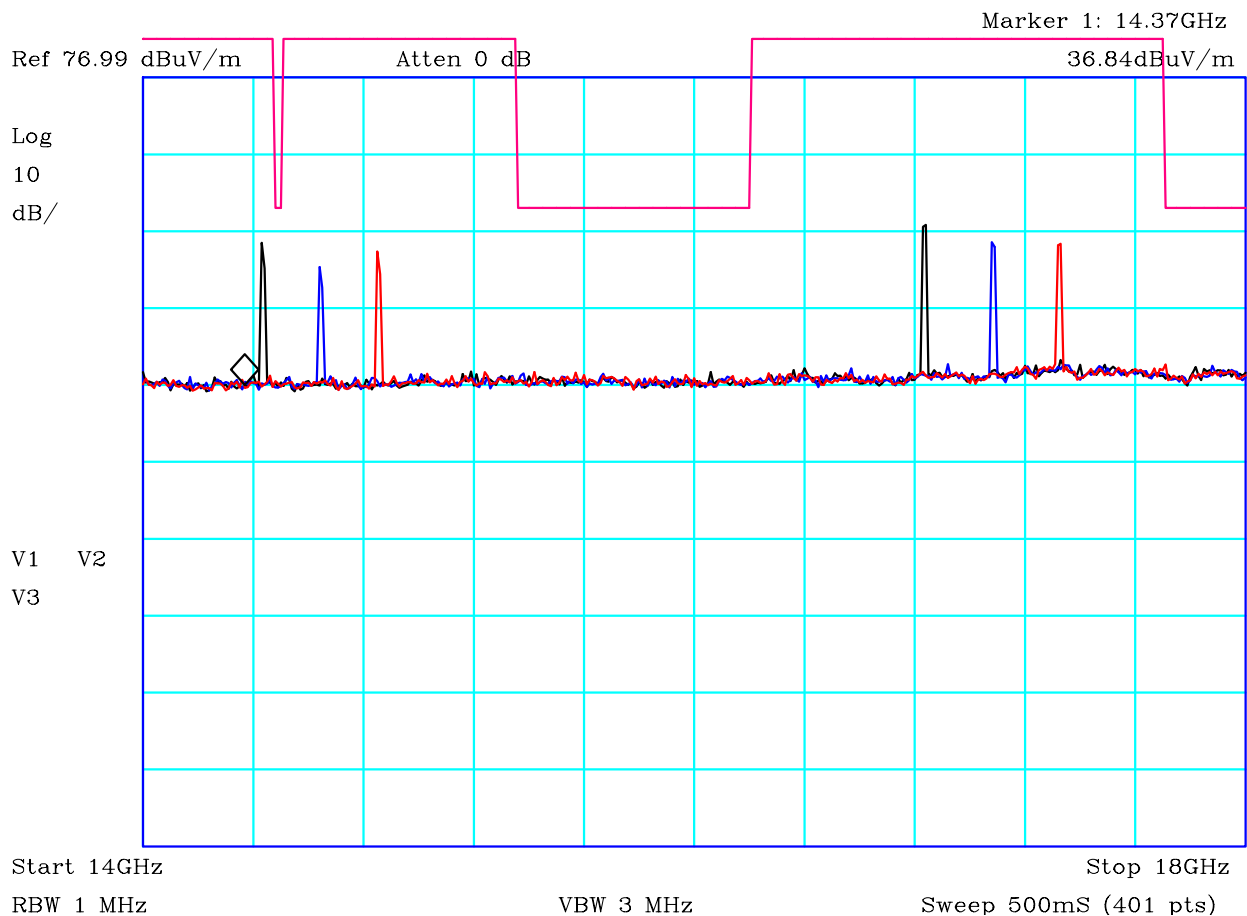


CF1:A22_3m_100201 CF2:PRE7_CBL052_CBL093_110112

PLOT 28 Radiated Emissions - Zigbee Tx - 14GHz to 18GHz

Company:	Alertme	Product:	Repeater
Date:	01/05/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@1.5m	Limit2:	
Limit3:		Limit4:	
Sample 4. Black: Vertical, Blue: Horizontal Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_2	Height	1.5m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H2401742
		Mode:	1
		Modification State:	0

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
Test No: T4335	Test Report		Page: 53 of 56

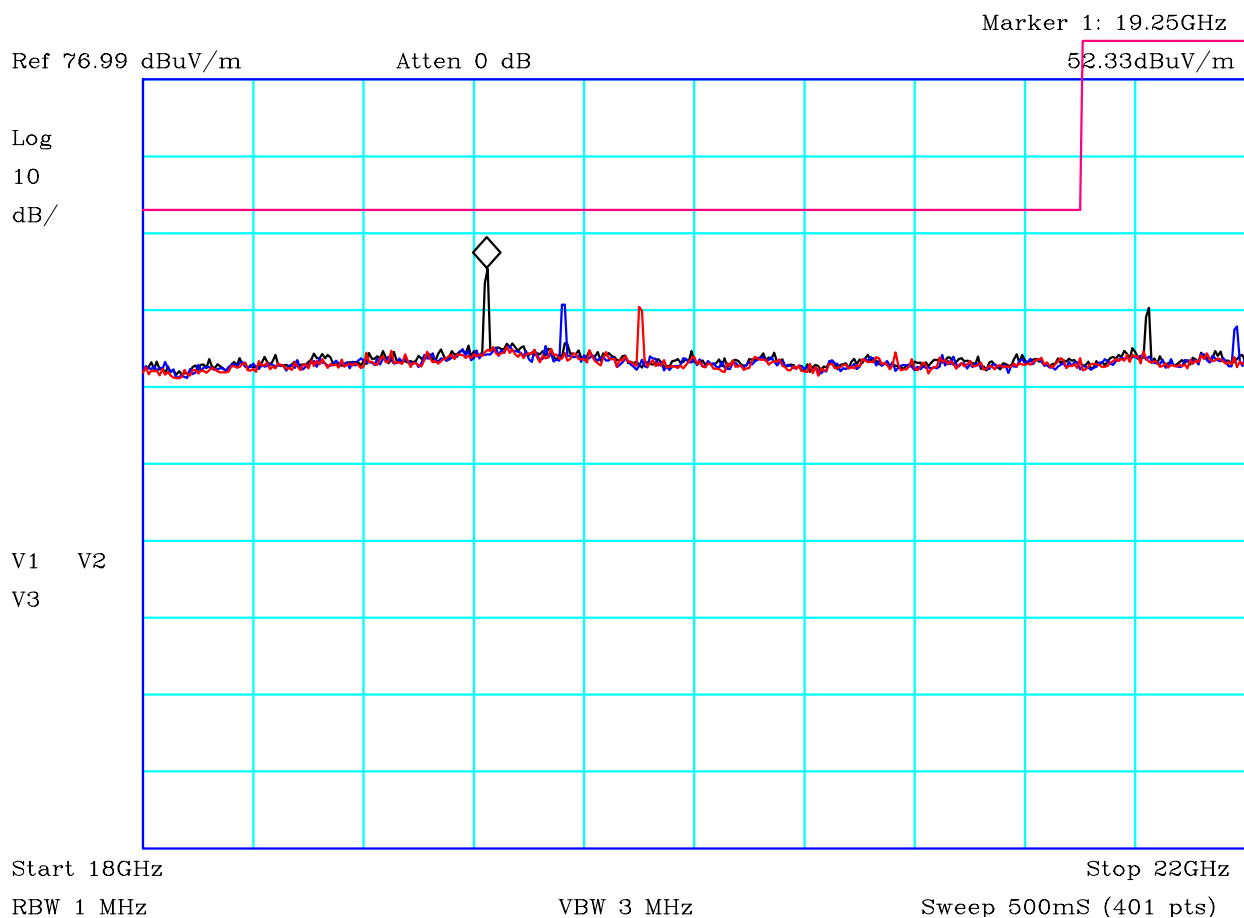


CF1:A20_3m_100201 CF2:PRE8_CBL052_CBL092_110112


PLOT 29 Radiated Emissions - Zigbee Tx - 18GHz to 22GHz

Company:	Alertme	Product:	Repeater
Date:	01/05/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@1.5m	Limit2:	
Limit3:		Limit4:	

Sample 4.
Black: Vertical, Blue: Horizontal
Black: Ch11, Blue: Ch18, Red: Ch25
Peak measurement
Maximum of EUT upright and flat.

Facility:	Anech_2	Height	1.5m	Mode:	1
Distance	1.5m	Polarisation	V+H	Modification State:	0
Angle	0-360	File:	H24017A2		


	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 54 of 56

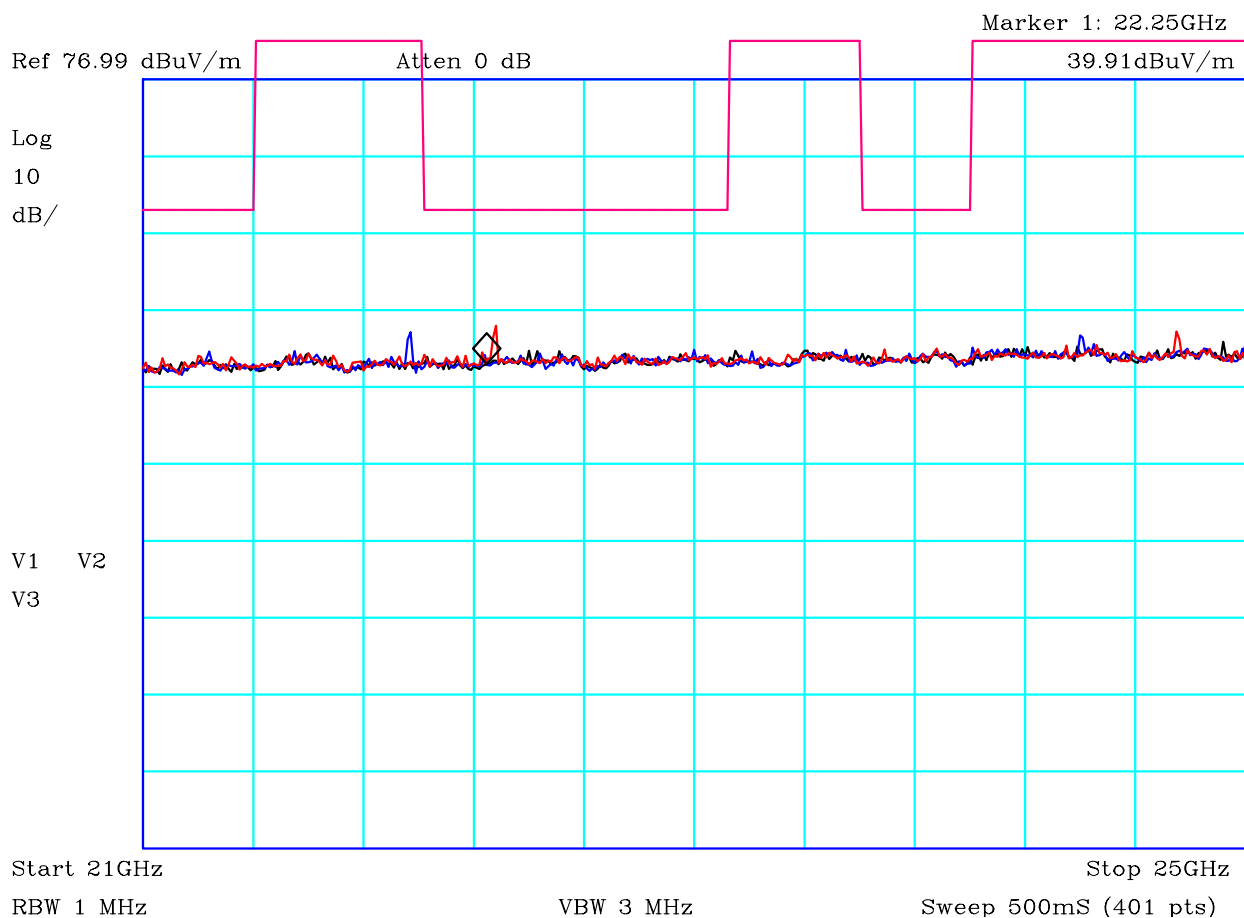

CF1:A20_3m_100201 CF2:PRE8_CBL052_CBL092_110112

PLOT 30 Radiated Emissions - Zigbee Tx - 21GHz to 25GHz

Company:	Alertme	Product:	Repeater
Date:	01/05/2012	Test Eng:	Dave Smith
Method:	ANSI C63.4	Method:	
Limit1:(VIO)	FCC Restricted Bands@1.5m	Limit2:	15.21
Limit3:		Limit4:	
Sample 4. Black: Vertical, Blue: Horizontal Black: Ch11, Blue: Ch18, Red: Ch25 Peak measurement Maximum of EUT upright and flat.			
Facility:	Anech_2	Height	1.5m
Distance	1.5m	Polarisation	V+H
Angle	0-360	File:	H24017D0
		Mode:	1
		Modification State:	0

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 55 of 56

Chase EMS 6.21

Notes

Analyse 120504 C2L Z wave Tx, ch 18 Tx


Test: 150kHz-30MHz (L1+CSET001) dBuV

RF level

dBuV

120504 C2L Z

Quasi-peak

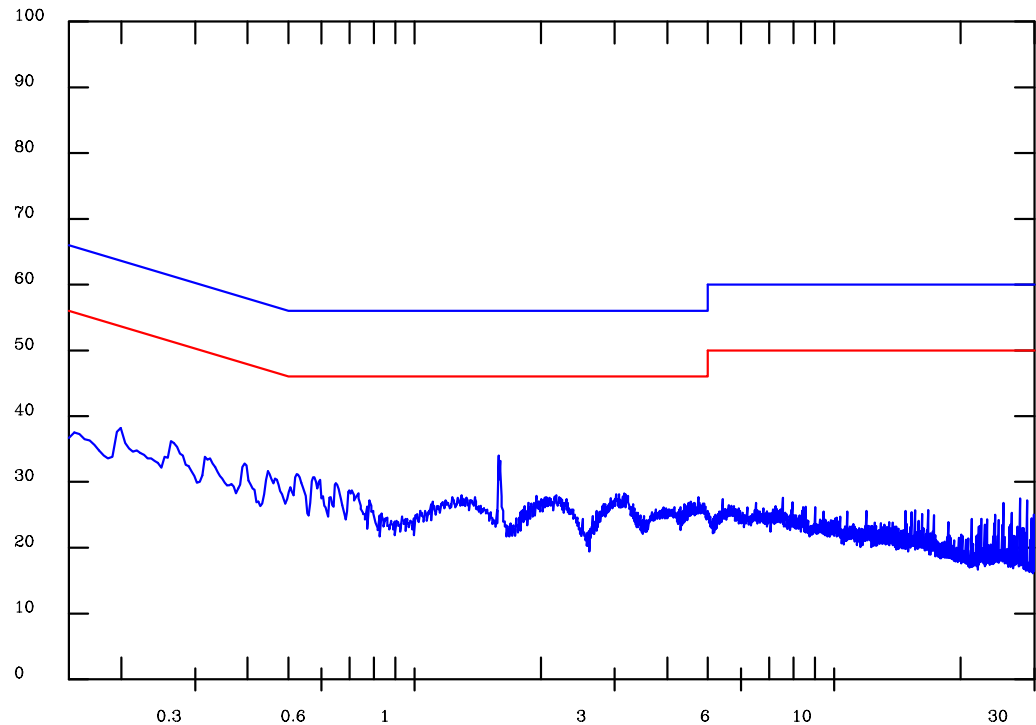


Log Freq. (0.15 - 30)MHz

Limit CISPR22B (AV) AC POWER

PLOT 31 Conducted Emissions - Live Line - Z-wave & Zigbee Tx

Company:	Alertme	Product:	Repeater
Date:	04 May 12	Test Engineer:	Dave Smith
Test:	FCC part 15	Limit:	15.21
Notes:			
Z-wave Transmitting. Zigbee transmitting on Ch 18.			
Sample 2.			
Equip:R1,L1,AB002,CBL005,CBL039			
Line:	Live	Attenuator:	10dB PAD
Detector:	QuasiPeak	Operating Mode:	2
LISN:	EMCO	Mod. State:	0
		Filename:	C2504789.plt

Frequency List (MHz)

	Report No: R3094A	FCC ID: WJHRP11	
	Issue No: 2		
	Test No: T4335	Test Report	Page: 56 of 56

Chase EMS 6.21	Notes
----------------	-------

Analyse 120504 C3N z-wave Tx, ch 18 Tx


Test: 150kHz-30MHz (L1+CSET001) dBuV

RF level

dBuV

120504 C3N z

Quasi-peak

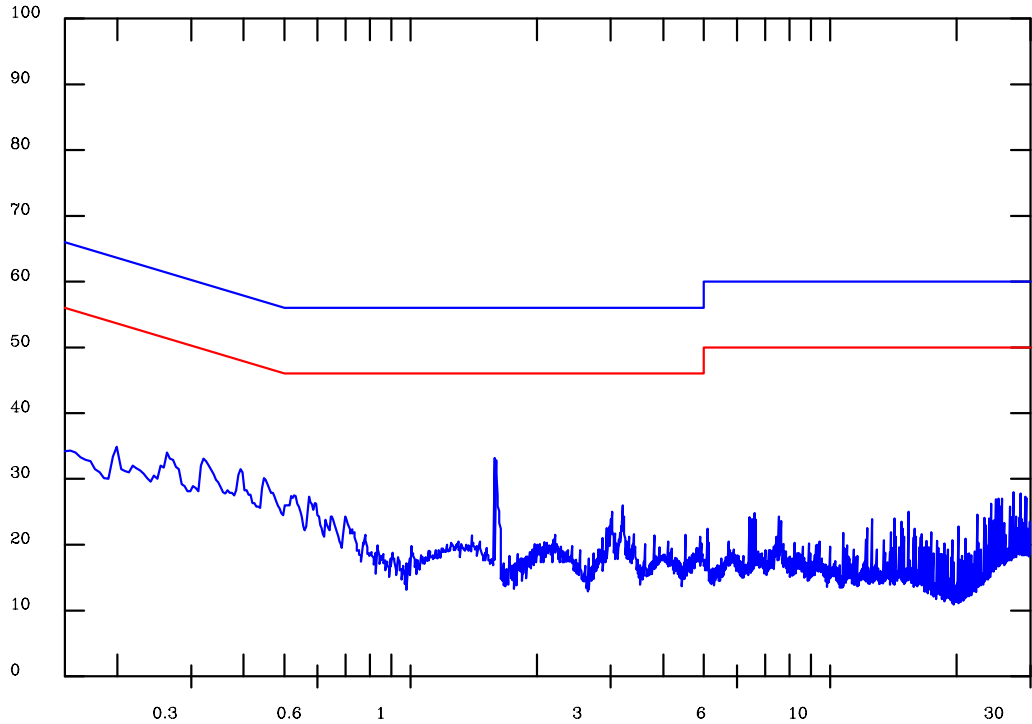

Log Freq. (0.15 - 30)MHz

Limit CISPR22B (AV) AC POWER

PLOT 32 Conducted Emissions - Neutral Line - Z-wave & Zigbee Tx

Company:	Alertme	Product:	Repeater
Date:	04 May 12	Test Engineer:	Dave Smith
Test:	FCC part 15	Limit:	FCC Class B
Notes:			
Z-wave Transmitting. Zigbee transmitting on Ch 18.			
Sample 2.			
Equip:R1,L1,AB002,CBL005,CBL039			
Line:	Neutral	Attenuator:	10dB PAD
Detector:	QuasiPeak	Operating Mode:	2
LISN:	EMCO	Mod. State:	0
Filename:	C250479C.plt		

Frequency List (MHz)
