



KTL
part of TRAC global

Test report

KTL EMC Test Report : 7F1040WUS8

Applicant : AlertMe.com Ltd

Apparatus : Wireless Starter Hub 1-2

K J Anderson

Authorised by :

: K J Anderson, Senior EMC and Radio Engineer

Issue Date : 9th September 2008

Authorised Copy Number : PDF

Total number of pages : 70

Contents

Section 1:	Introduction	3
	1.1 General	3
	1.2 Tests Requested By	4
	1.3 Manufacturer	4
	1.4 Apparatus Assessed	4
	1.5 Test Result Summary	5
	1.6 Notes Relating To The Assessment	6
	1.7 Deviations from Test Standards	6
Section 2:	Measurement Uncertainty	7
	2.1 Application of Measurement Uncertainty	7
	2.2 KTL Measurement Uncertainty Values	8
Section 3:	Modifications	9
	3.1 Modifications Performed During Assessment	9
Appendix A:	Formal Emission Test Results	10
	A1 Conducted Fundamental Carrier Power	11
	A2 RF Antenna Conducted Spurious Emissions	12
	A3 Radiated Electric Field Emissions Within The Restricted Band 15.205	16
	A4 ac Power Line Conducted Emissions	21
	A5 6 dB Bandwidth	24
	A6 Antenna Gain	25
	A7 Power Spectral Density	26
Appendix B:	Supporting Graphical Data	27
Appendix C:	Additional Test and Sample Details	48
Appendix D:	Additional Information	57
Appendix E:	Calculation of the duty cycle correction factor	59
Appendix F:	Photographs and Figures	60
Appendix G:	MPE Calculation	69

Section 1:

Introduction

1.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed by:

KTL
Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806
Email: ktl@ktl.com
Web site: www.ktl.com

Tests performed by:



, Senior EMC and Radio Group Engineer

Report author:.

As Above

This report must not be reproduced except in full without prior written permission from KTL.

1.2 Tests Requested By

This testing in this report was requested by :

AlertMe.com Ltd
27-28 Bridge Street
Cambridge
CB21UJ
United Kingdom

1.3 Manufacturer

For samples S25 and S26

In-Tech Electronics Ltd
N2 Qihang Industrial Park
Haoxiang Road
Sha Jing Town
Bao An
Shenzhen
PRC

For samples S18

Sunfone
21F-1
No.216 Section II
Tun-Hua South Road
Taipei 106
Taiwan

1.4 Apparatus Assessed

The following apparatus was assessed between 16/06/08 and 02/09/08

Alertme Wireless Starter Hub 1-2

The above equipment was a wireless Alertme Starter Hub 1-2 as part of an intelligent home security and monitoring service operating in the 2.4GHz band.

1.5 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.6 to 1.7 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
CFCP	Title 47 of the CFR :2008, Part 15 Subpart (c) 15.247(b)(3)	ANSI C63.4: 2003	Pass
RF Antenna Port Conducted Spurious Emissions	Title 47 of the CFR: 2008, Part 15 Subpart (c) 15.247(d)	ANSI C63.4: 2003	Pass
REFE (Within the restricted band)	Title 47 of the CFR: 2008, Part 15 Subpart (c) 15.247(d) and 15.205	ANSI C63.4: 2003	Pass
PLCE	Title 47 of the CFR: 2008, Part 15 Subpart (c) 15.207	ANSI C63.4: 2003	Pass
6dB Bandwidth	Title 47 of the CFR :2008, Part 15 Subpart (c) 15.247(a)(2)	ANSI C63.4: 2003	Pass
Antenna Gain	Title 47 of the CFR :2008, Part 15 Subpart (c) 15.247(b)(4)	ANSI C63.4: 2003	Pass
Power Spectral Density	Title 47 of the CFR :2008, Part 15 Subpart (c) 15.247(e)	ANSI C63.4: 2003	Pass

Abbreviations used in the above table:

Mod	: Modification	ANSI	: American National Standards Institution
CFR	: Code of Federal Regulations	PLCE	: Power Line Conducted Emissions
REFE	: Radiated Electric Field Emissions		
CFCP	: Conducted Fundamental Carrier Power		

1.6 Notes Relating To The Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

KTL Hull is a listed electromagnetic compatibility Conformance Assessment Body (CAB) for EC access to the US market. (Decision No 3/2000 of the Joint Committee established under the Agreement on Mutual Recognition between the European Community and the United States of America. This decision was effective from 16th January 2001).

FCC Facility Registration number (3m semi anechoic chamber) : 90743

1.7 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:

Measurement Uncertainty

2.1 Application of Measurement Uncertainty

The following table contains the measurement uncertainties for KTL measurements

The following procedure is used when determining the result of a measurement :

- (i) If specification limits are not exceeded by the measured result, extended by the positive component of the expanded uncertainty interval at a confidence level of 95%, then a pass result is recorded.
- (ii) Where a specification limit is exceeded by the result even when the result is decreased by the negative component of the expanded uncertainty interval, a fail result is recorded.
- (iii) Where measured result is below a limit, but by a margin less than the positive measurement uncertainty component, it is not possible to record a pass based on a 95% confidence level. However, the result indicates that a pass result is more probable than a fail result.
- (iv) Where a measured result is above a limit, but by a margin less than the negative measurement uncertainty component, it is not possible to record a fail based on a 95% confidence level. However the result indicates that a fail is more probable than a pass.

2.2 KTL Measurement Uncertainty Values

All results were recorded in accordance with Section 2.1(i).

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
EUT	: Equipment Under Test	ATS	: Alternative Test Site
SE	: Support Equipment		
		Ref	: Reference
		Freq	: Frequency
		MD	: Measurement Distance
L	: Live Power Line	SD	: Spec Distance
N	: Neutral Power Line		
E	: Earth Power Line	Pol	: Polarisation
		H	: Horizontal Polarisation
Pk	: Peak Detector	V	: Vertical Polarisation
QP	: Quasi-Peak Detector		
Av	: Average Detector	CDN	: Coupling & decoupling network

A1 Conducted Fundamental Carrier Power

Conducted carrier power was verified using a peak power meter, the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details: ac mode	
Regulation	Title 47 of the CFR 2008, Part15 Subpart (c) 15.247(b)(3)
EUT sample number	S18 & S25
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Channel No	Channel Frequency (MHz)	Measured Peak Conducted Carrier Power (W)	Limit (W)	Result
11	2405	0.0013300	1	Pass
18	2440	0.0014200		Pass
25	2475	0.0015600		Pass

Note:

The carrier level was measured whilst varying the supply voltage between 85% and 105% of the nominal supply voltage as required by 15.31(e). No variation in carrier level was observed.

Nominal rated supply voltage (110Vac / 60Hz)

85% = 93.5Vac / 60Hz

115% = 126.5Vac / 60Hz

A2 RF Antenna Conducted Spurious Emissions

Measurement of conducted spurious emissions at the antenna port was performed using a peak detector with the RBW set to 100kHz and the VBW>RBW. Frequencies were scanned up through to the 10th harmonic with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details CH11: ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.4:2003
Frequency range	9 kHz to 25 GHz
EUT sample number	S18 & S25
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case conducted emission measurements at the antenna port are listed below:

Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
1	0.016230	Pk	N	15.42	88.24	Pass
2	0.150	Pk	N	38.42	88.24	Pass
3	90.208	Pk	N	41.24	88.24	Pass
4	91.298	Pk	N	42.05	88.24	Pass
5	192.099	Pk	N	30.30	88.24	Pass
6	956.410	Pk	N	27.26	88.24	Pass
7	2285.576	Pk	N	36.36	N/A	See Section A3
8	2390.000	Pk	Y	46.69	N/A	See Section A3
9	2400.000	Pk	N	60.68	88.24	Pass
10	2483.500	Pk	Y	45.57	N/A	See Section A3
11	2524.814	Pk	N	39.36	88.24	Pass
12	2546.687	Pk	N	37.29	88.24	Pass
13	4807.692	Pk	Y	83.48	N/A	See Section A3
14	7211.538	Pk	N	63.65	88.24	Pass
15	9625.000	Pk	N	48.80	88.24	Pass
16	14439.102	Pk	N	38.41	88.24	Pass
17	24125.000	Pk	N	34.45	88.24	Pass

RF Antenna Conducted Spurious Emissions continued:

Test Details CH18: ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.4:2003
Frequency range	9 kHz to 25 GHz
EUT sample number	S18 & S25
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case conducted emission measurements at the antenna port are listed below:

Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
1	0.0099038	Pk	N	16.02	88.52	Pass
2	0.0706875	Pk	N	9.64	88.52	Pass
3	0.150	Pk	N	37.54	88.52	Pass
4	125.352	Pk	Y	41.93	N/A	See Section A3
5	126.442	Pk	Y	41.65	N/A	See Section A3
6	192.099	Pk	N	30.86	88.52	Pass
7	215.384	Pk	N	23.07	88.52	Pass
8	239.743	Pk	N	23.67	88.52	Pass
9	792.307	Pk	N	23.51	88.52	Pass
10	841.025	Pk	N	23.78	88.52	Pass
11	888.461	Pk	N	24.82	88.52	Pass
12	937.179	Pk	N	24.74	88.52	Pass
13	984.615	Pk	Y	24.5	N/A	See Section A3
14	1219.871	Pk	N	24.38	88.52	Pass
15	2296.794	Pk	Y	31.46	N/A	See Section A3
16	2321.474	Pk	Y	34.41	N/A	See Section A3
17	2346.153	Pk	Y	29.76	N/A	See Section A3
18	2368.589	Pk	Y	30.80	N/A	See Section A3
19	2390.000	Pk	Y	27.55	N/A	See Section A3
20	2400.000	Pk	N	30.45	88.52	Pass
21	2483.500	Pk	N	32.97	88.52	Pass
22	2510.233	Pk	N	36.64	88.52	Pass
23	2558.838	Pk	N	40.47	88.52	Pass
24	2583.141	Pk	N	37.37	88.52	Pass
25	4875.000	Pk	Y	82.15	N/A	See Section A3
26	7326.923	Pk	Y	67.56	N/A	See Section A3
27	9759.615	Pk	N	43.09	88.52	Pass
28	14647.358	Pk	N	39.91	88.52	Pass
29	24365.384	Pk	N	34.43	88.52	Pass

RF Antenna Conducted Spurious Emissions continued:

Test Details CH25: ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.4:2003
Frequency range	9 kHz to 25 GHz
EUT sample number	S18 & S25
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case conducted emission measurements at the antenna port are listed below:

Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
1	0.0099038	Pk	N	21.58	88.93	Pass
2	0.150	Pk	N	44.24	88.93	Pass
3	160.496	Pk	N	41.62	88.93	Pass
4	161.586	Pk	N	41.79	88.93	Pass
5	192.099	Pk	N	30.75	88.93	Pass
6	314.102	Pk	N	30.69	88.93	Pass
7	2357.371	Pk	Y	37.91	N/A	See Section A3
8	2390.000	Pk	Y	32.76	N/A	See Section A3
9	2400.000	Pk	N	32.07	88.93	Pass
10	2483.500	Pk	Y	50.83	N/A	See Section A3
11	2546.687	Pk	N	39.11	88.93	Pass
12	2595.293	Pk	N	40.33	88.93	Pass
13	2619.596	Pk	N	39.21	88.93	Pass
14	4951.923	Pk	Y	79.43	N/A	See Section A3
15	7423.076	Pk	Y	73.14	N/A	See Section A3
16	9903.846	Pk	N	38.14	88.93	Pass
17	14855.769	Pk	N	40.77	88.93	Pass
18	24471.153	Pk	N	41.45	88.93	Pass

Notes:

1. The conducted emission limit for emissions outside the restricted bands, defined in 47CFR15.205(a) is based on a transmitted carrier level of 15.247(b)(3). With the EUT transmitting on its lowest, centre and highest carrier frequencies in turn, emissions from the EUT are required to be 20 dB below the level of the highest fundamental as measured within a 100 kHz RBW in accordance with 15.247(d) using a peak detector.
2. The RBW = 100 kHz, Video bandwidth (VBW) > RBW and the radio spectrum was investigated up to the 10th harmonic in accordance 15.33 (a)(1).
3. The measurements at 2400 MHz and 2483.5 MHz were made to ensure band edge compliance.

The limit outside the restricted band in 100 kHz RBW is defined using the following formula in accordance with 15.247(d):

$$\text{The limit in 100 kHz RBW} = (\text{Maximum Peak Conducted Power}) - 20\text{dB}$$

Where:

The maximum peak conducted power was measured using a peak power meter. Please refer to section A1 of this test report.

ac mode Limit					
Channel No.	Channel Frequency (MHz)	Measured Peak Conducted Carrier Power (W)	Measured Peak Conducted Carrier (dB μ V)	Measured Peak Conducted Carrier – 20dB (dB μ V)	Emission Limit 15.247(d) Outside the restricted band in 100 kHz RBW (dB μ V)
11	2405	0.0013300	108.2385	108.2385-20	88.24
18	2440	0.0014200	108.5229	108.5229-20	88.52
25	2475	0.0015600	108.9312	108.9312-20	88.93

A3 Radiated Electric Field Emissions Within The Restricted Band 15.205

Preliminary conducted emission testing was performed using a peak detector with the RBW = 100kHz. The radiated electric field emission test applies to spurious emissions and harmonics that fall within the restricted bands listed in Section 15.205. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit on its lowest, centre and highest carrier frequency in turn.

The following test site was used for final measurements as specified by the standard tested to :

10m open area test site :

3m alternative test site :

Test Details CH11: ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.4:2003
Frequency range	30MHz to 25GHz
EUT sample number	S18 & S26
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 1 and 2

The worst case radiated emission measurements, for spurious emissions and harmonics that fall within the restricted bands, are listed below:

Ref No.	Freq (MHz)	Det.	Angle. Deg.	Height (cm)	Pol.	Result (dB μ V/m)	Spec. Limit (dB μ V/m)	Margin (dB)	Summary
1	2285.576	Pk	0	100	V	49.3	74	-24.7	Pass
2	2285.576	Av	0	100	V	35.5	54	-18.5	Pass
3	2390.000	Pk	0	100	V	48.9	74	-25.1	Pass
4	2390.000	Av	0	100	V	35.2	54	-18.8	Pass
5	2400.000	Pk	217	100	V	59.0	74	-15.0	Pass
6	2400.000	Av	217	100	V	46.4	54	-7.6	Pass
7	2483.500	Pk	0	100	V	49.5	74	-24.5	Pass
8	2483.500	Av	0	100	V	35.7	54	-18.3	Pass
9	4807.692	Pk	230	100	V	66.4	74	-7.6	Pass
10	4807.692	Av	230	100	V	59.4	54	5.4	Pass (Note 7)

Radiated Electric Field Emissions Within The Restricted Band 15.205 continued:

Test Details CH18 ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.4:2003
Frequency range	30MHz to 25GHz
EUT sample number	S18 & S26
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 1 and 2

The worst case radiated emission measurements, for spurious emissions and harmonics that fall within the restricted bands, are listed below:

Ref No.	Freq (MHz)	Det.	Angle. Deg.	Height (cm)	Pol.	Result (dB μ V/m)	Spec. Limit (dB μ V/m)	Margin (dB)	Summary
1	125.352	QP	0	100	H	10.1	54	-43.9	Pass
2	125.352	Pk	0	100	H	16.3	74	-57.7	Pass
3	126.442	QP	0	100	H	10.4	54	-43.6	Pass
4	126.442	Pk	0	100	H	16.1	74	-57.9	Pass
5	984.615	QP	0	100	H	25.9	54	-28.1	Pass
6	984.615	Pk	0	100	H	30.9	74	-43.1	Pass
7	2296.794	Pk	0	100	V	35.3	54	-18.7	Pass
8	2296.794	Av	0	100	V	48.9	74	-25.1	Pass
9	2321.474	Pk	0	100	V	35.3	54	-18.7	Pass
10	2321.474	Av	0	100	V	48.2	74	-25.8	Pass
11	2346.153	Pk	0	100	V	35.2	54	-18.8	Pass
12	2346.153	Av	0	100	V	48.1	74	-25.9	Pass
13	2368.589	Pk	0	100	V	35.3	54	-18.7	Pass
14	2368.589	Av	0	100	V	49.8	74	-24.2	Pass
15	2390.000	Pk	0	100	V	35.3	54	-18.7	Pass
16	2390.000	Av	115	100	H	49.8	74	-24.2	Pass
17	2400.000	Pk	217	100	V	49.0	74	-25.0	Pass
18	2400.000	Av	217	100	V	37.7	54	-16.3	Pass
19	4875.000	Pk	115	100	H	35.8	54	-18.2	Pass
20	4875.000	Av	227	104	V	57.2	54	3.2	Pass (Note 7)
21	7326.923	Av	227	104	V	64.5	74	-9.5	Pass
22	7326.923	Pk	325	100	V	56.2	74	-17.8	Pass

Radiated Electric Field Emissions Within The Restricted Band 15.205 continued:

Test Details CH25 ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.4:2003
Frequency range	30MHz to 25GHz
EUT sample number	S18 & S26
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 1 and 2

The worst case radiated emission measurements, for spurious emissions and harmonics that fall within the restricted bands, are listed below:

Ref No.	Freq (MHz)	Det.	Angle. Deg.	Height (cm)	Pol.	Result (dB μ V/m)	Spec. Limit (dB μ V/m)	Margin (dB)	Summary
1	2357.371	Pk	0	100	V	48.6	74	-25.4	Pass
2	2357.371	Av	0	100	V	35.2	54	-18.8	Pass
3	2390.000	Pk	237	100	V	48.1	74	-25.9	Pass
4	2390.000	Av	237	100	V	35.3	54	-18.7	Pass
5	2400.000	Pk	118	100	V	49.0	74	-25.0	Pass
6	2400.000	Av	118	100	V	37.1	54	-16.9	Pass
7	2483.500	Pk	237	120	V	55.1	74	-18.9	Pass
8	2483.500	Av	237	120	V	43.1	54	-10.9	Pass
9	4951.923	Pk	203	115	H	60.7	74	-13.3	Pass
10	4951.923	Av	203	115	H	52.7	54	-1.3	Pass
11	7423.076	Pk	203	100	H	57.2	74	-16.8	Pass
12	7423.076	Av	203	100	H	44.0	54	-10.0	Pass

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.4: 2003 section 8.2.1.
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 The measurements 2483.5 MHz was made to ensure band edge compliance.
- 4 Demonstration of band edge compliance at 2.4GHz (which lies outside the restricted bands as defined in section 47CFR15.205(a) is contained in section A2, RF Antenna Conducted Spurious Emissions and Appendix B of this test report.
- 5 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 6 For Frequencies Below 1 GHz, RBW= 100 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak	RBW=VBW= 1MHz
Average	RBW= 1 MHz, VBW = 10 Hz

These settings are as per ANSI C63.4.

- 7 In accordance with 47CFR 15.35(c) the emissions may be reduced by the duty cycle correction factor. The duty cycle factor was determined by the on-time of the transmitter/100 milliseconds or period, whichever is less See Appendix E for further details.

The upper frequency of the measurement range was decided according to 47 CFR 15:2008 Clause 15.33(a)(1).

Radiated emission limits (47 CFR 15:2008 Clause 15.209) for emissions falling within the restricted bands defined in 15.205(a):

Frequency of emission (MHz)	Field strength $\mu\text{V}/\text{m}$	Measurement Distance m	Field strength $\text{dB}\mu\text{V}/\text{m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	210	3	46.4
Above 960	500	3	54.0

Notes:

- (a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

The results displayed take into account applicable antenna factors and cable losses.

- (b) The levels may have been rounded for display purposes.
- (c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels	✓			
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels	✓			
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A4 ac Power Line Conducted Emissions

Preview ac power line port conducted emission measurements were performed with a peak detector in a screened room.

The effect of the EUT set-up on the measurements is summarised in note (b) below.

Where applicable formal measurements of the emissions were performed with a peak, average and/or quasi peak detector. The formal measurements are detailed below:

Test Details: ac live Zigbee-network mode	
Regulation	Title 47 of the CFR:2008, Part 15 Subpart (c) Clause 15.207
Measurement standard	ANSI C63.4:2003
Frequency range	150kHz to 30MHz
EUT sample number	S18 and S26
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs	Photograph 3

The worst case ac power line port conducted emission measurements are listed below:

Results measured using the average detector compared to the average limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	0.179	Live	32.7	54.5	-21.8	Pass
2	0.238	Live	39.8	52.2	-12.4	Pass
3	0.297	Live	35.8	50.3	-14.5	Pass
4	0.355	Live	38.0	48.8	-10.8	Pass
5	0.414	Live	36.3	47.6	-11.3	Pass
6	0.474	Live	36.7	46.4	-9.7	Pass
7	0.533	Live	33.4	46.0	-12.6	Pass
8	0.592	Live	29.0	46.0	-17.0	Pass
9	0.653	Live	28.6	46.0	-17.4	Pass
10	3.802	Live	29.2	46.0	-16.8	Pass
11	15.565	Live	31.0	50.0	-19.0	Pass
12	0.179	Neutral	32.8	54.5	-21.7	Pass
13	0.238	Neutral	39.7	52.2	-12.5	Pass
14	0.297	Neutral	36.1	50.3	-14.2	Pass
15	0.355	Neutral	35.7	48.8	-13.1	Pass
16	0.414	Neutral	33.8	47.6	-13.8	Pass
17	0.474	Neutral	32.3	46.4	-14.1	Pass
18	0.533	Neutral	31.5	46.0	-14.5	Pass
19	0.592	Neutral	28.0	46.0	-18.0	Pass
20	0.653	Neutral	27.3	46.0	-18.7	Pass
21	3.802	Neutral	31.6	46.0	-14.4	Pass
22	15.565	Neutral	30.7	50.0	-19.3	Pass

Results measured using the quasi-peak detector compared to the quasi-peak limit

Ref No.	Freq (MHz)	Conductor	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	0.179	Live	47.8	64.5	-16.7	Pass
2	0.238	Live	51.0	62.2	-11.2	Pass
3	0.297	Live	45.6	60.3	-14.7	Pass
4	0.355	Live	47.7	58.8	-11.1	Pass
5	0.414	Live	46.8	57.6	-10.8	Pass
6	0.474	Live	45.6	56.4	-10.8	Pass
7	0.533	Live	40.7	56.0	-15.3	Pass
8	0.592	Live	38.2	56.0	-17.8	Pass
9	0.653	Live	37.9	56.0	-18.1	Pass
10	3.802	Live	38.2	56.0	-17.8	Pass
11	15.565	Live	37.5	60.0	-22.5	Pass
12	0.179	Neutral	45.8	64.5	-18.7	Pass
13	0.238	Neutral	50.0	62.2	-12.2	Pass
14	0.297	Neutral	47.6	60.3	-12.7	Pass
15	0.355	Neutral	46.3	58.8	-12.5	Pass
16	0.414	Neutral	45.3	57.6	-12.3	Pass
17	0.474	Neutral	46.1	56.4	-10.3	Pass
18	0.533	Neutral	45.2	56.0	-10.8	Pass
19	0.592	Neutral	40.1	56.0	-15.9	Pass
20	0.653	Neutral	41.4	56.0	-14.6	Pass
21	3.802	Neutral	41.6	56.0	-14.4	Pass
22	15.565	Neutral	36.9	60.0	-23.1	Pass

Specification limits :

ac power port conducted emission limits (47 CFR 15:2008 Clause 15.207):

Conducted disturbance at the ac power line ports .

Frequency range MHz	Limits dB μ V	
	Quasi-peak	Average
0.15 to 0.5	66 to 56	56 to 46
0.5 to 5	56	46
5 to 30	60	50

Notes:

- The lower limit shall apply at the transition frequency.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Notes:

- (a) The levels may have been rounded for display purposes.
- (b) The following table summarises the effect of the EUT operating mode and internal configuration on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
(i) Parameter defined by standard and / or single possible, refer to Appendix C (ii) Parameter defined by client and / or single possible, refer to Appendix C (iii) Parameter had a negligible effect on emission levels, refer to Appendix C (iv) Worst case determined by initial measurement, refer to Appendix C				

A5 6 dB Bandwidth

Measurement of the bandwidth of the transmission between the -6 dB points on the transmitted modulated spectrum was verified using a spectrum analyser. To determine the occupied bandwidth a RBW of 100 kHz and a minimum VBW three times greater than the RBW (1 MHz) was used. The spectrum analyser was then set to take a peak hold measurement. The peak level was found and set to a 0dB reference point and markers offset by -6dB determined the bandwidth. The EUT was set to transmit on its lowest, centre and highest carrier frequency in turn. The formal measurements are detailed below:

Test Details: ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) 15.247(a)(2)
EUT sample number	S18 & S25
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Channel No.	Channel Frequency (MHz)	Measured 6 dB Bandwidth (MHz)	Limit	Result
11	2405	1.482	>500 kHz	Pass
18	2440	1.394		Pass
25	2475	1.522		Pass

Plots of the 6 dB bandwidth are contained in Appendix B of this test report.

A6 Antenna Gain

The maximum antenna gain for the antenna types to be used with the EUT, as declared by the client, is 1 dBi.

A7 Power Spectral Density

Power spectral density was verified using a spectrum analyser. Testing was performed with the EUT transmitting a modulated carrier on its lowest, centre and highest carrier frequency in turn.

Test Details: ac mode	
Regulation	Title 47 of the CFR 2008, Part 15 Subpart (c) 15.247(e)
EUT sample number	S18 & S25
Modification state	0
SE in test environment	None
SE isolated from EUT	None
EUT set up	Refer to Appendix C


Channel No	Channel Frequency (MHz)	Measured power Spectral density (dBm/3kHz)	Limit (dBm/3kHz)	Result
11	2405	-14.25	8.0	Pass
18	2440	-14.07		Pass
25	2475	-13.76		Pass

Appendix B:**Supporting Graphical Data**


This appendix contains graphical data obtained during testing.

Notes:


- (a) The conducted antenna port emissions graphical data in this appendix is preview data. Any emissions detected within the restricted band were formally assessed against the limits in 15.209. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.
- (f) The power line conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A.
- (g) The limit line on the conducted emissions plots is the EN55022:1994 Class B limit. This is identical to the 47 CFR Part 15(c) section 15.207:2008 limit.

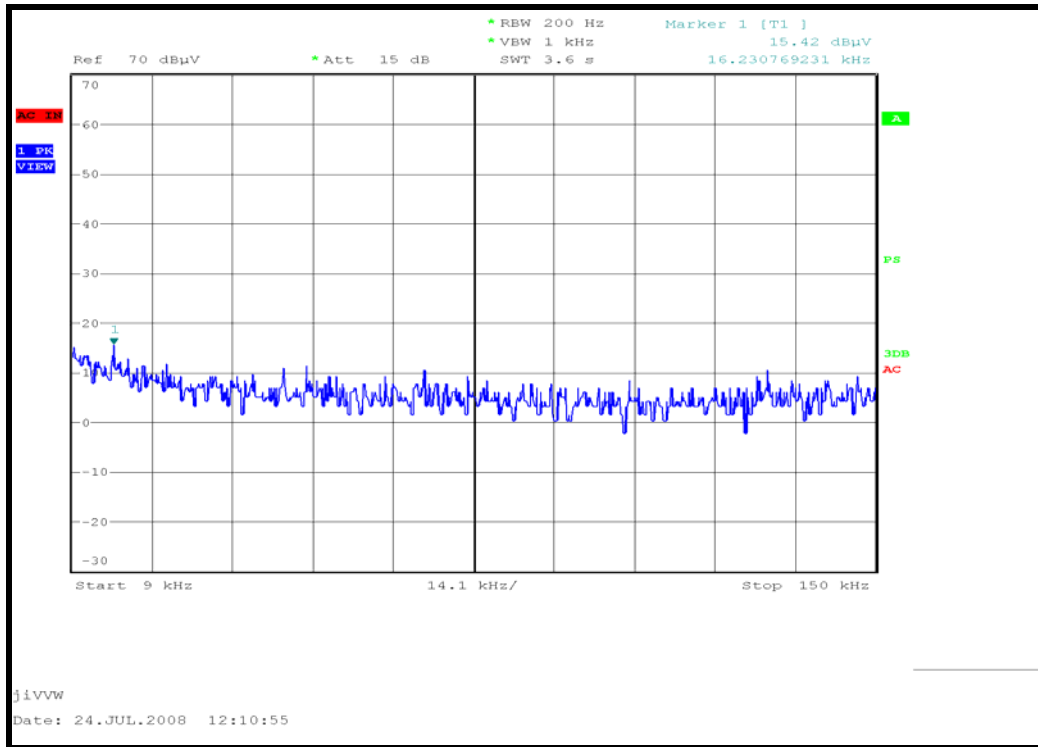


Conducted emissions: Channel 11 ac mode

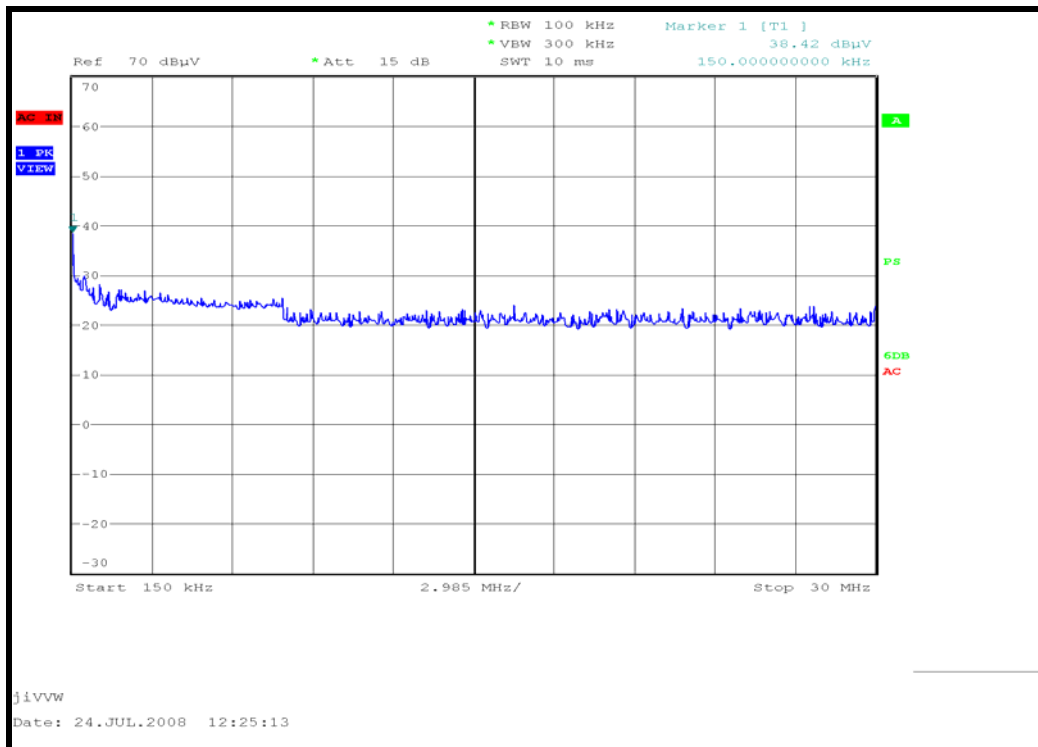


Conducted emissions: Channel 11 ac mode

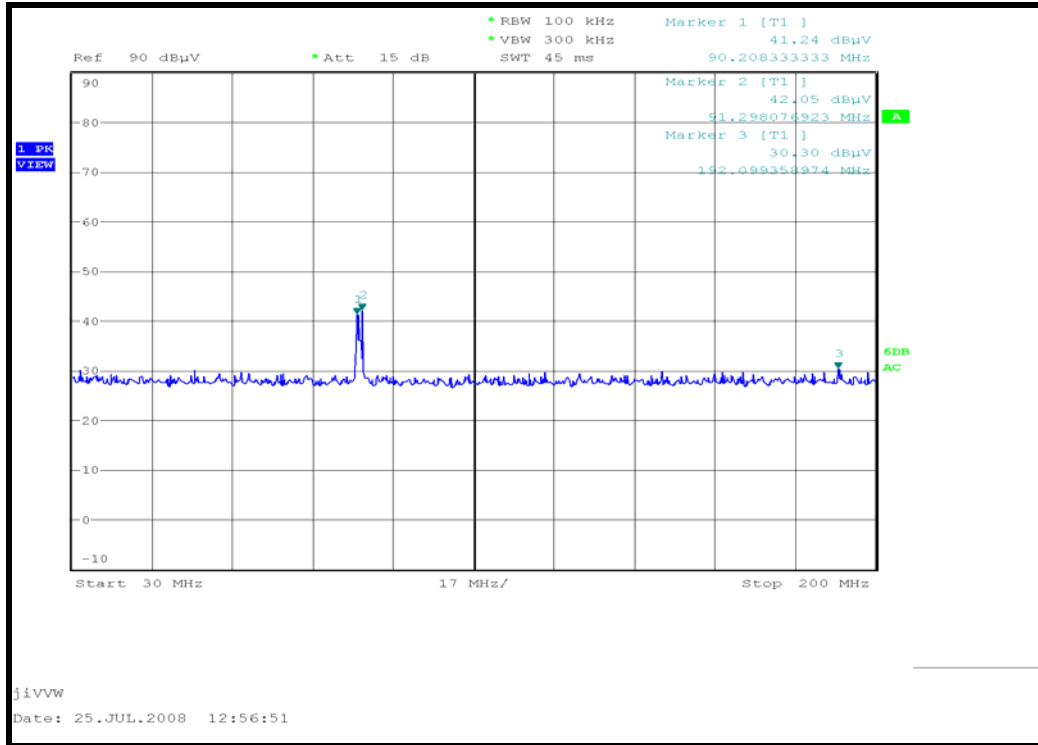


Conducted emissions: Channel 11 ac mode

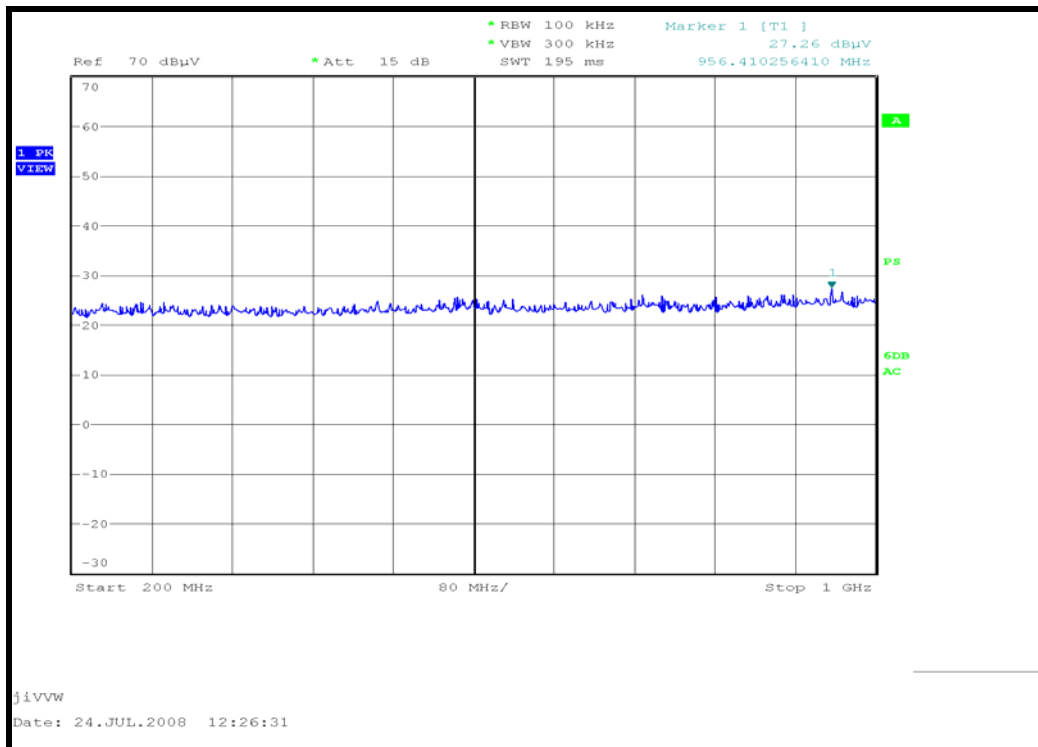


Conducted emissions: Channel 11 ac mode

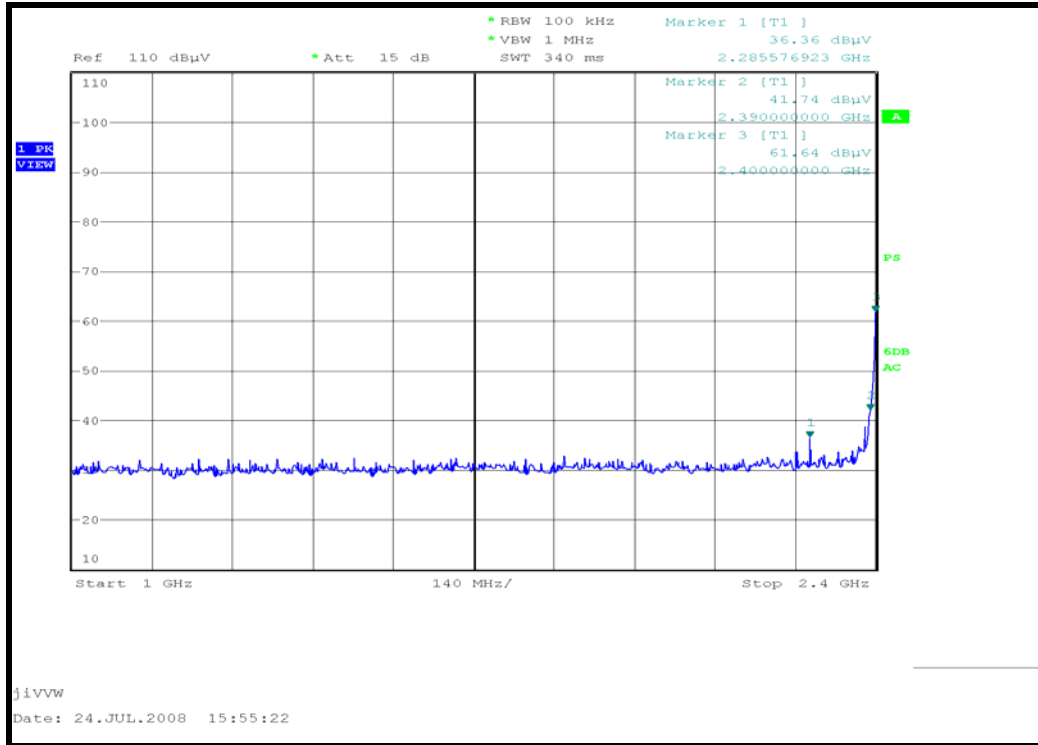


Conducted emissions: Channel 11 ac mode

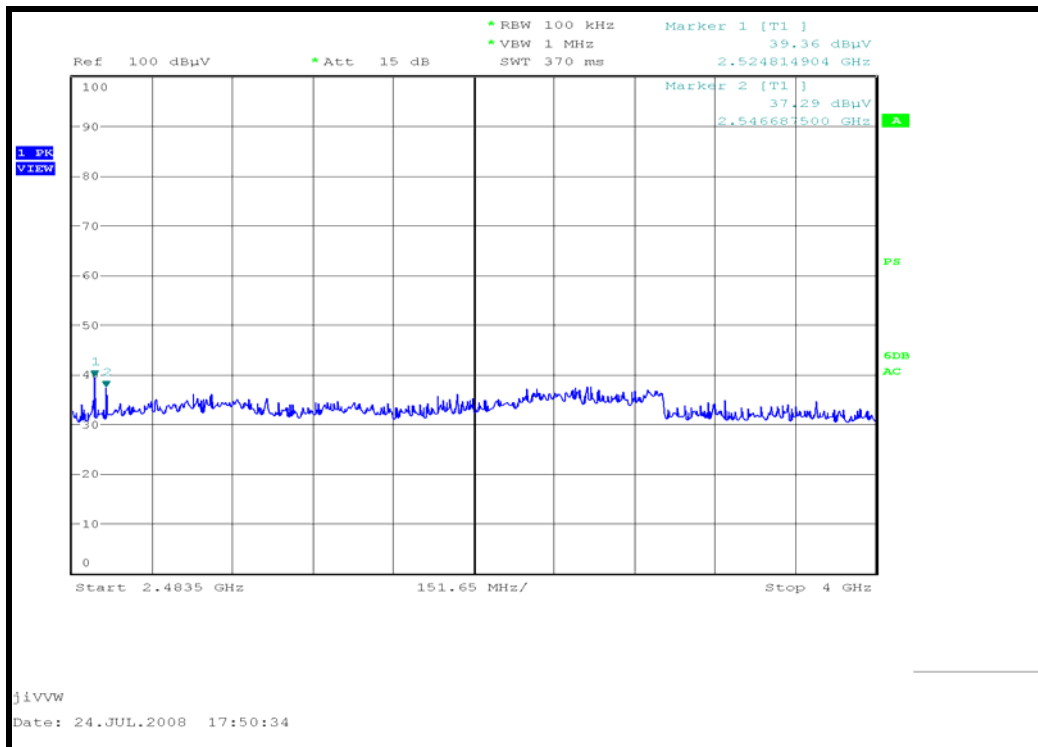


Conducted emissions: Channel 11 ac mode

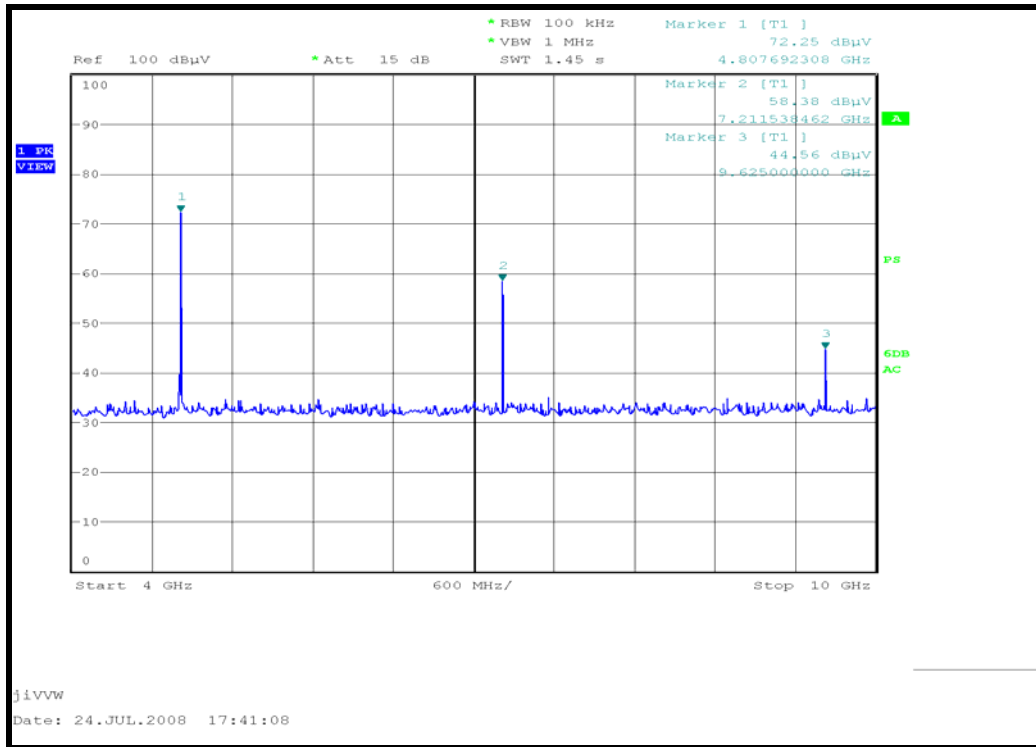


Conducted emissions: Channel 11 ac mode

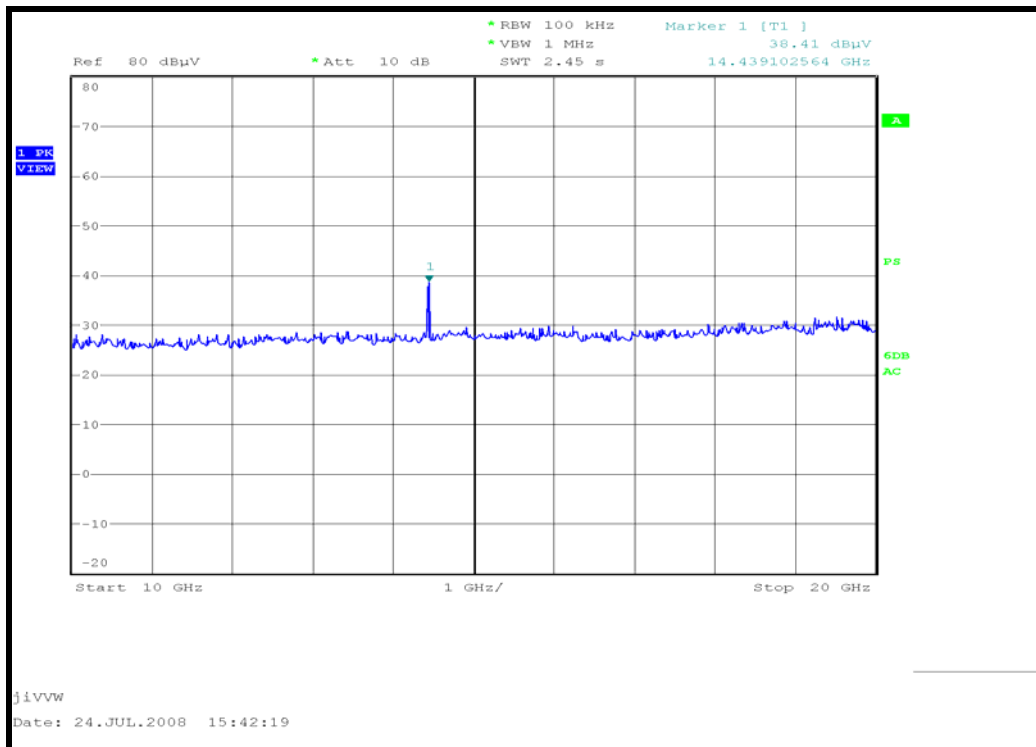


Conducted emissions: Channel 11 ac mode

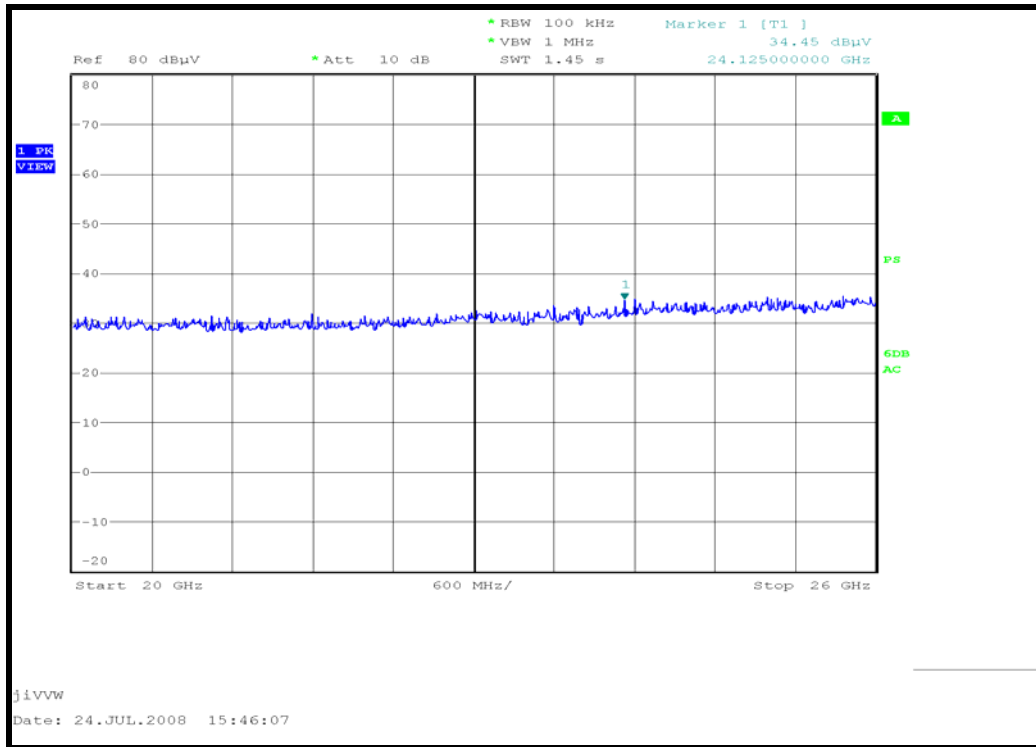


Conducted emissions: Channel 11 ac mode

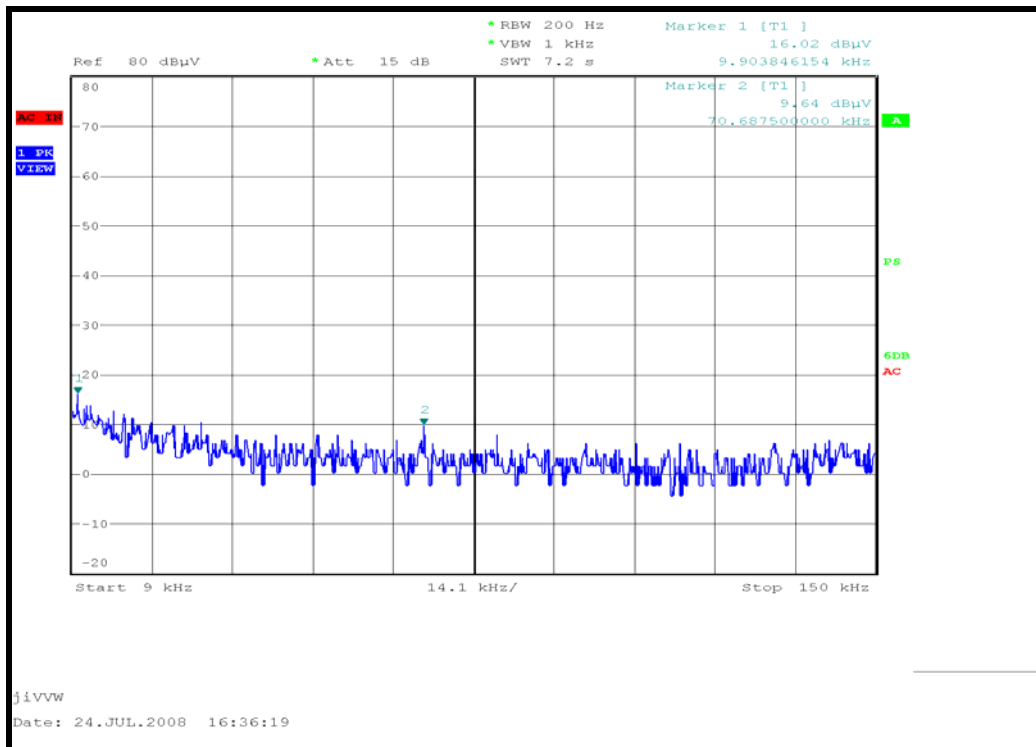


Conducted emissions: Channel 18 ac mode

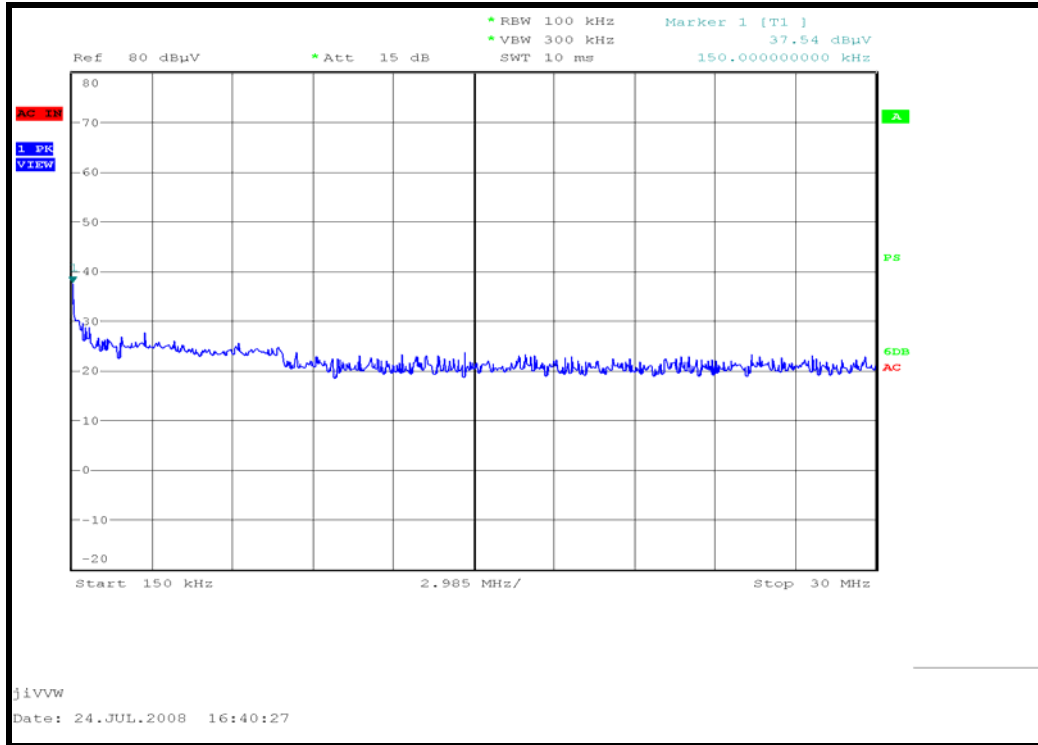


Conducted emissions: Channel 18 ac mode

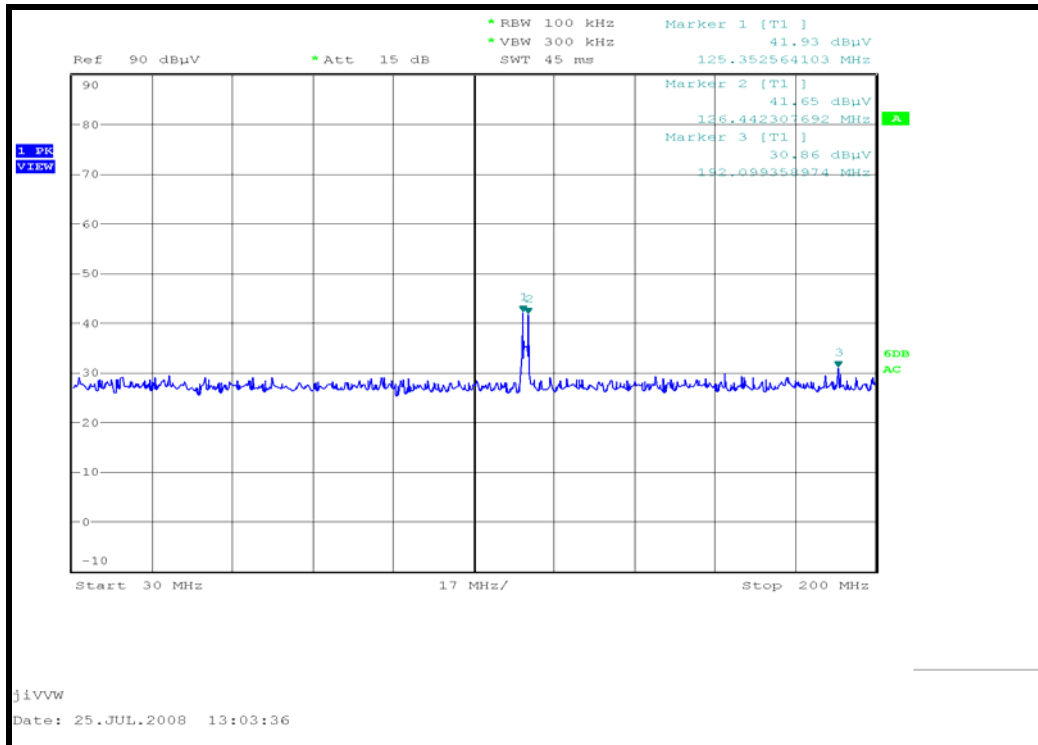


Conducted emissions: Channel 18 ac mode

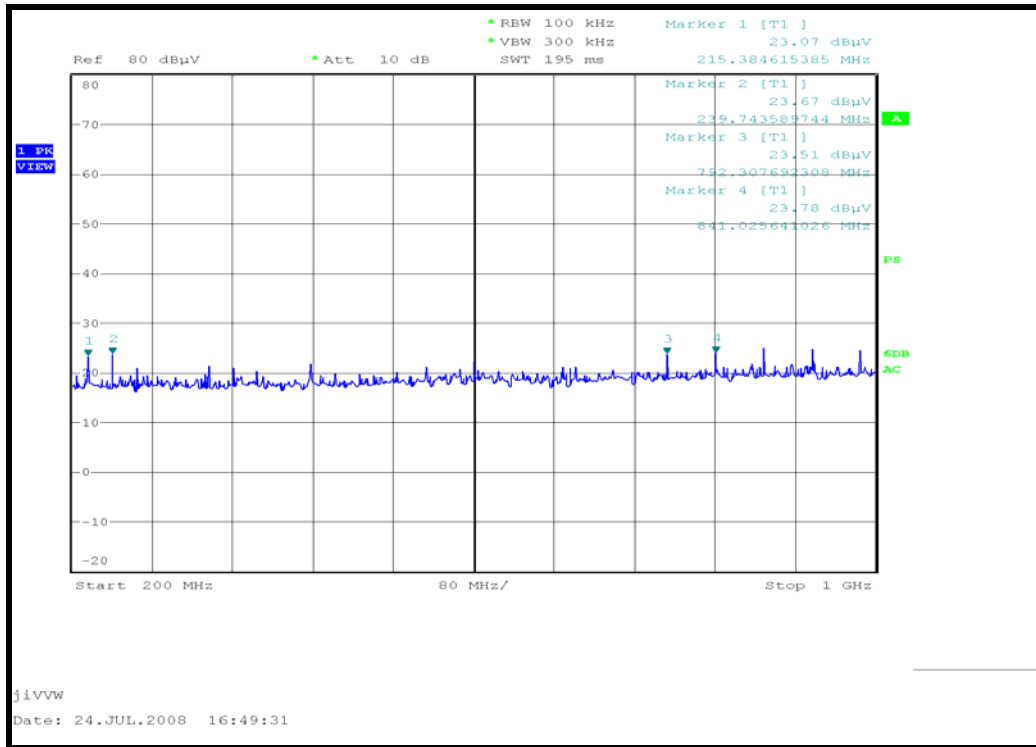


Conducted emissions: Channel 18 ac mode

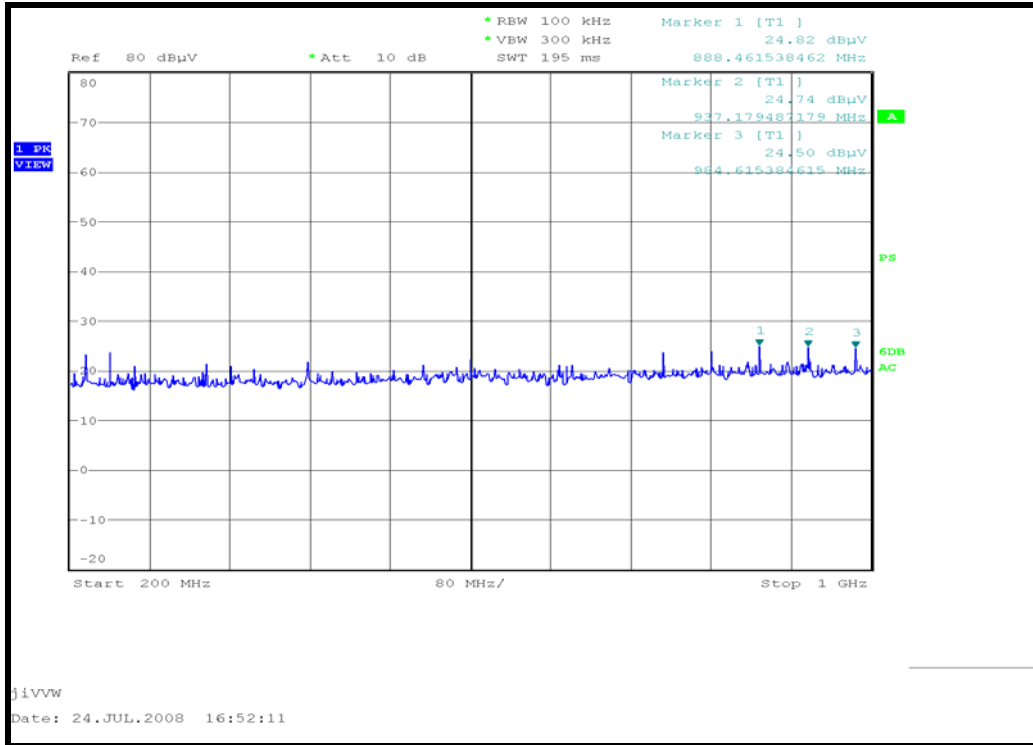


Conducted emissions: Channel 18 ac mode

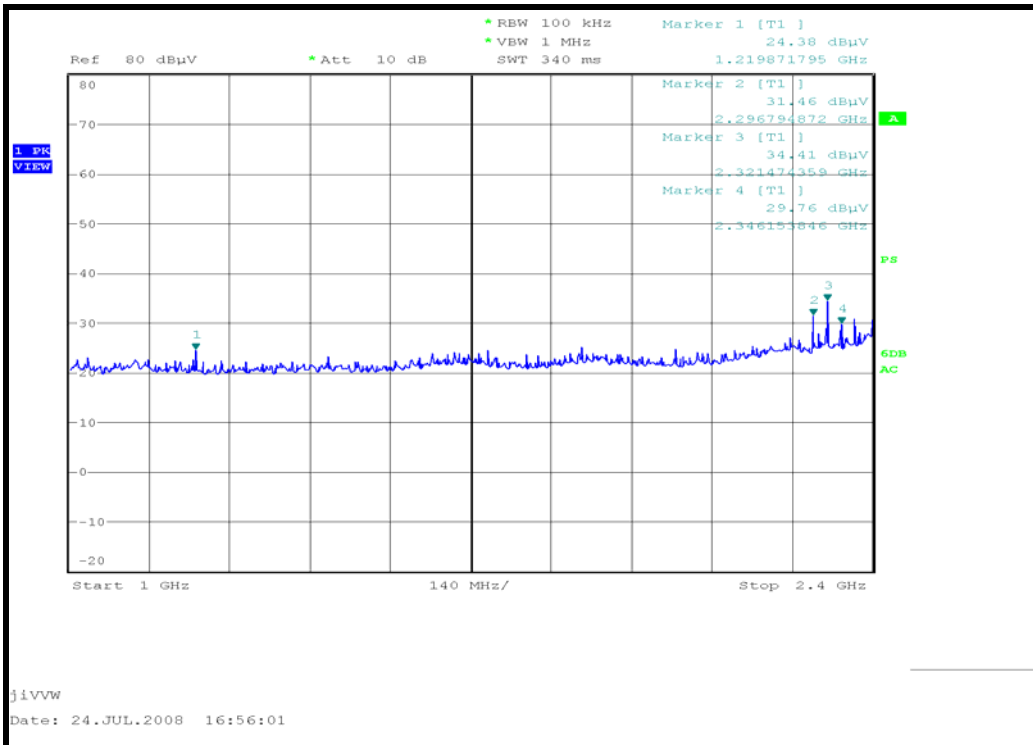


Conducted emissions: Channel 18 ac mode

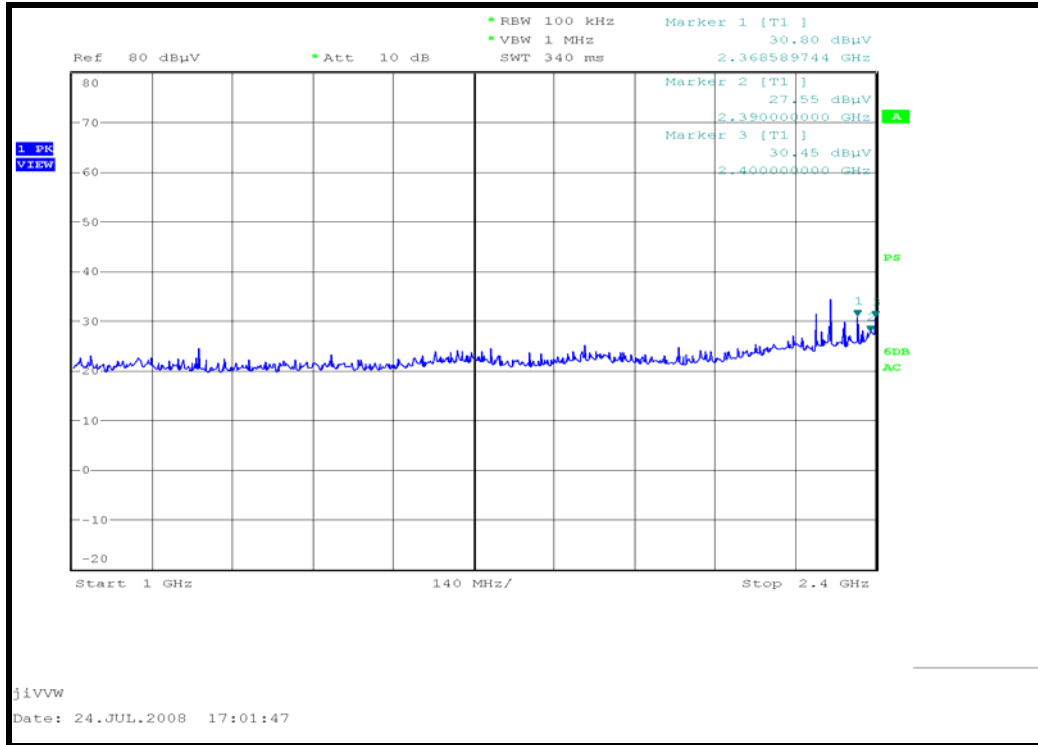


Conducted emissions: Channel 18 ac mode

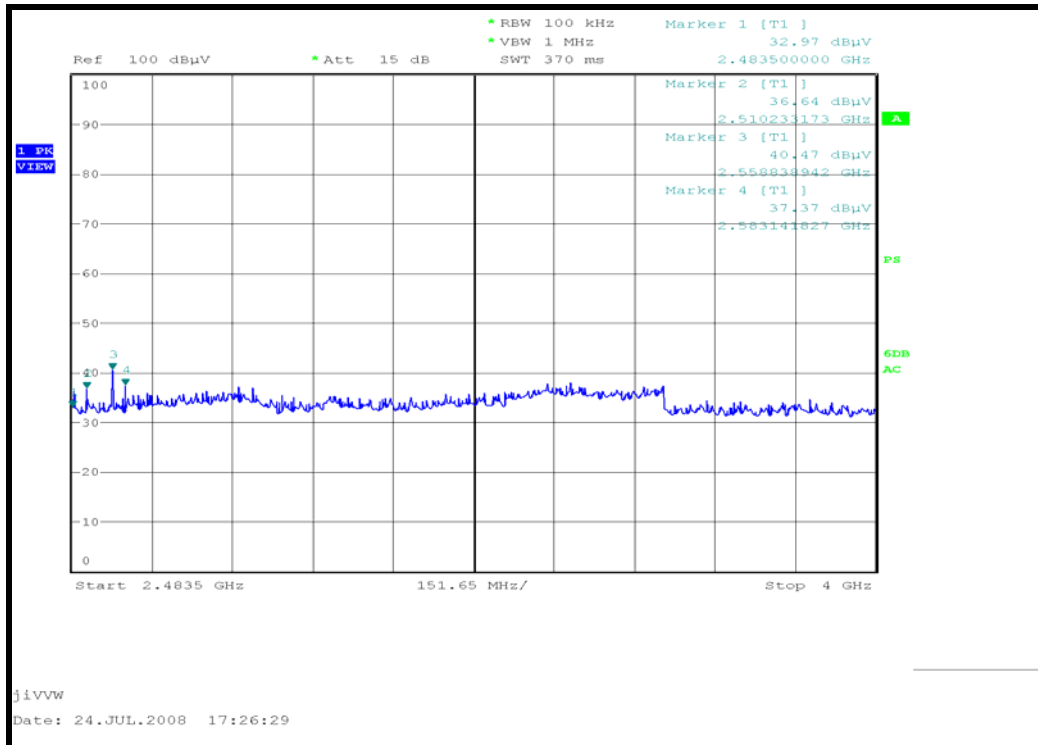


Conducted emissions: Channel 18 ac mode

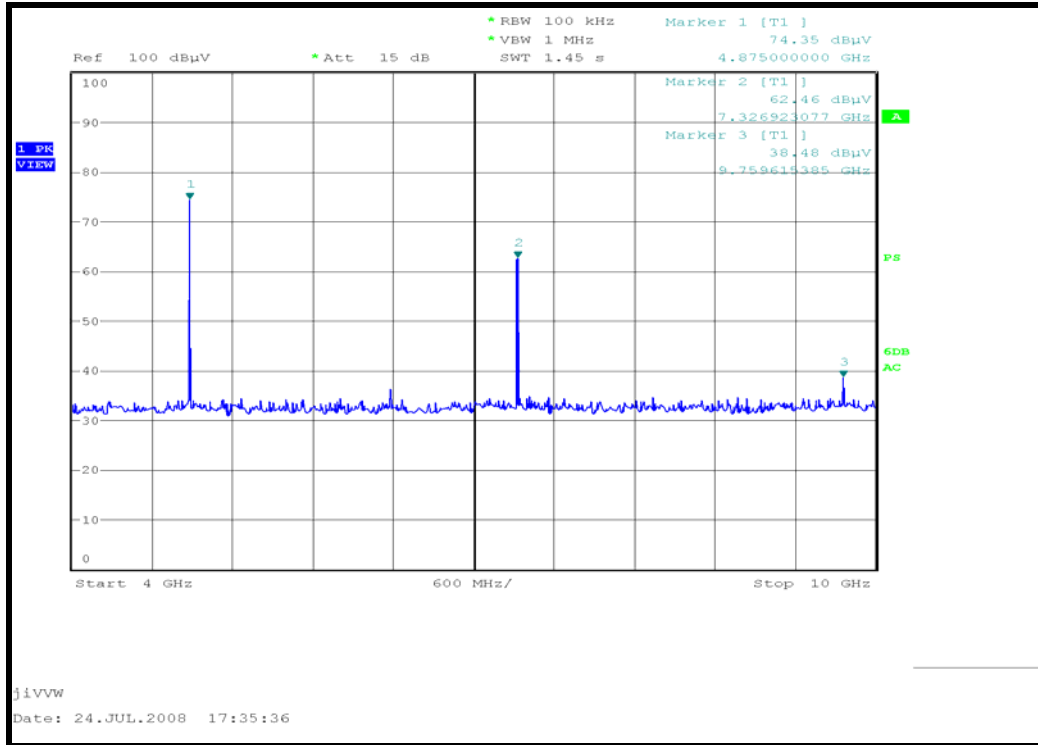


Conducted emissions: Channel 18 ac mode

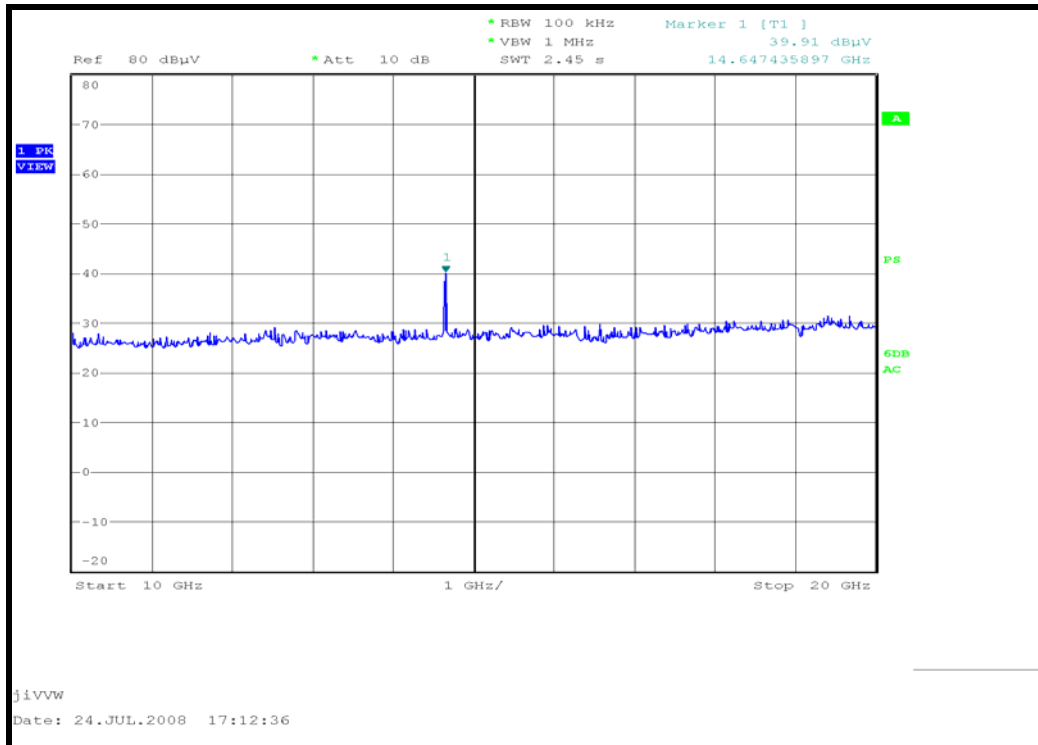


Conducted emissions: Channel 18 ac mode

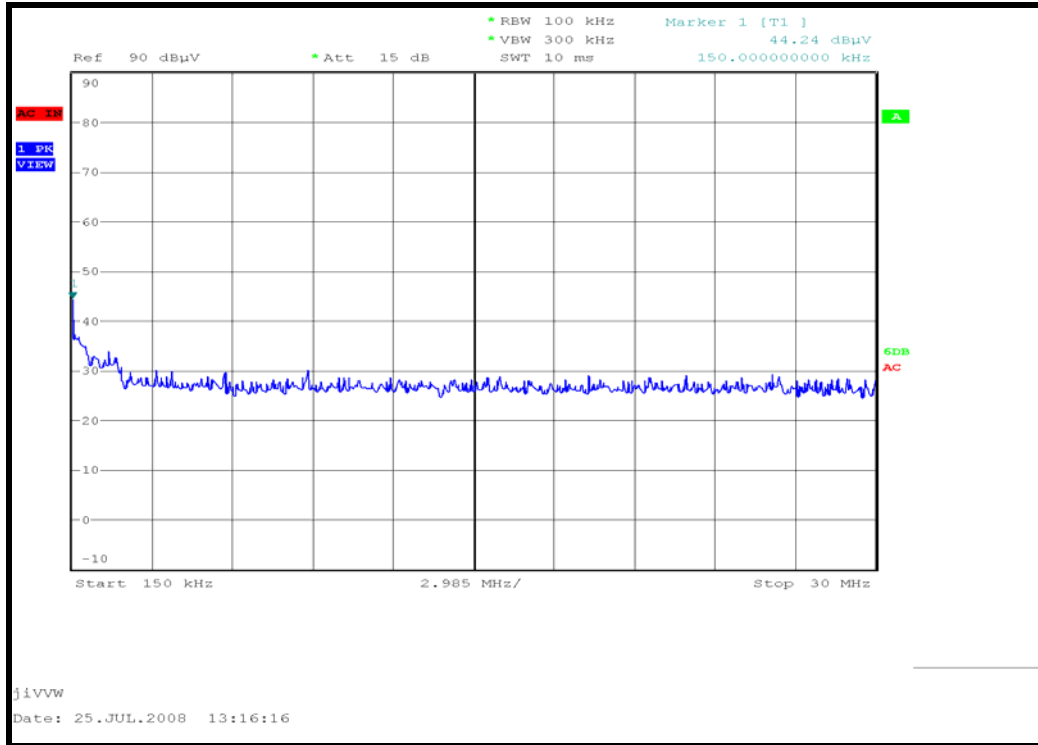


Conducted emissions: Channel 25 ac mode

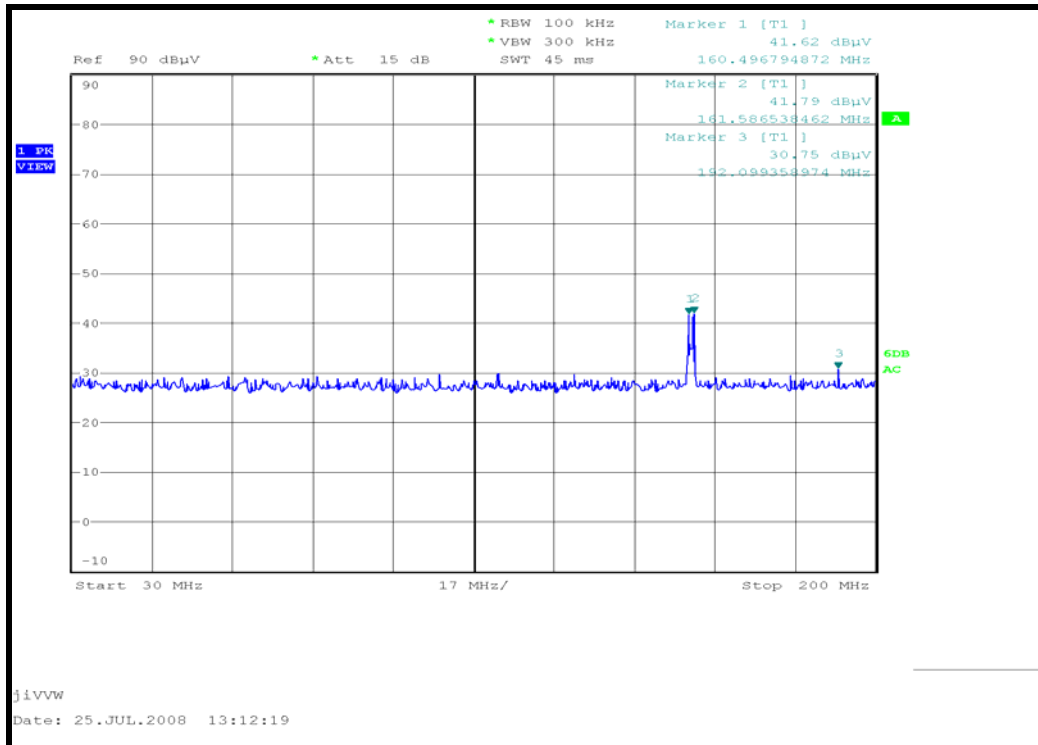


Conducted emissions: Channel 25 ac mode

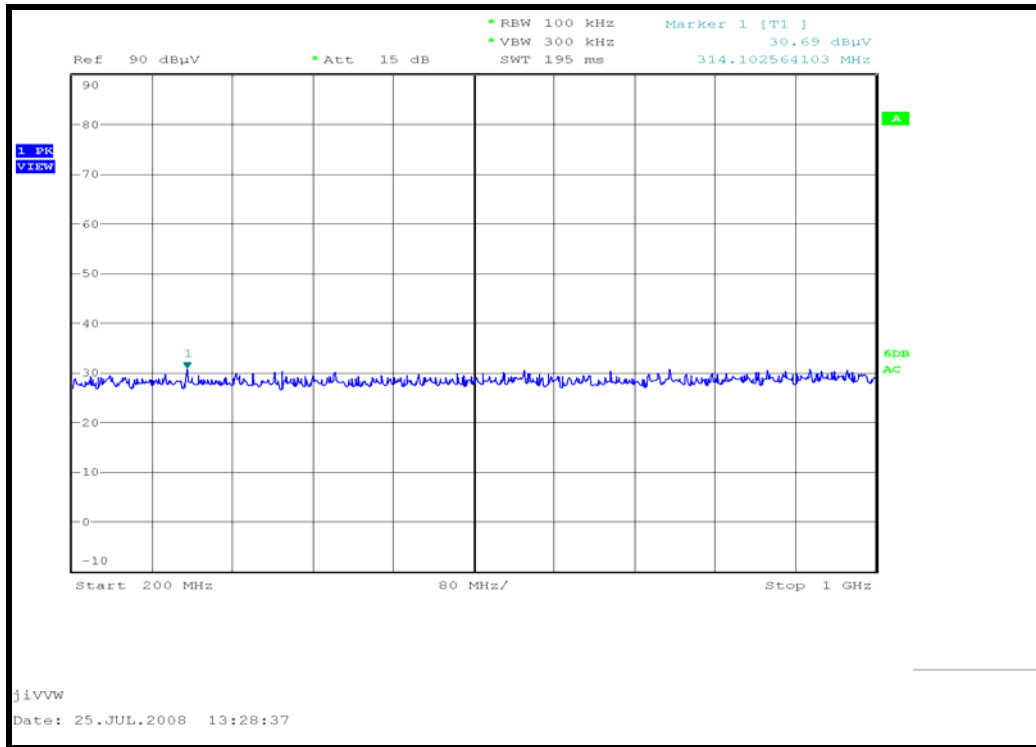


Conducted emissions: Channel 25 ac mode

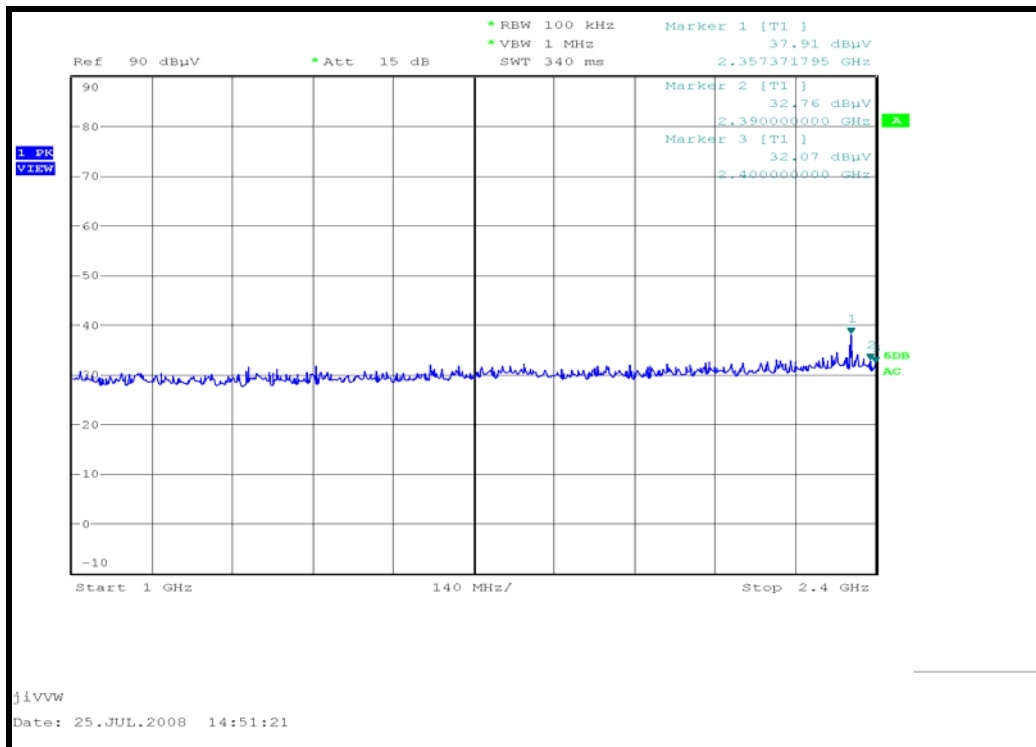


Conducted emissions: Channel 25 ac mode

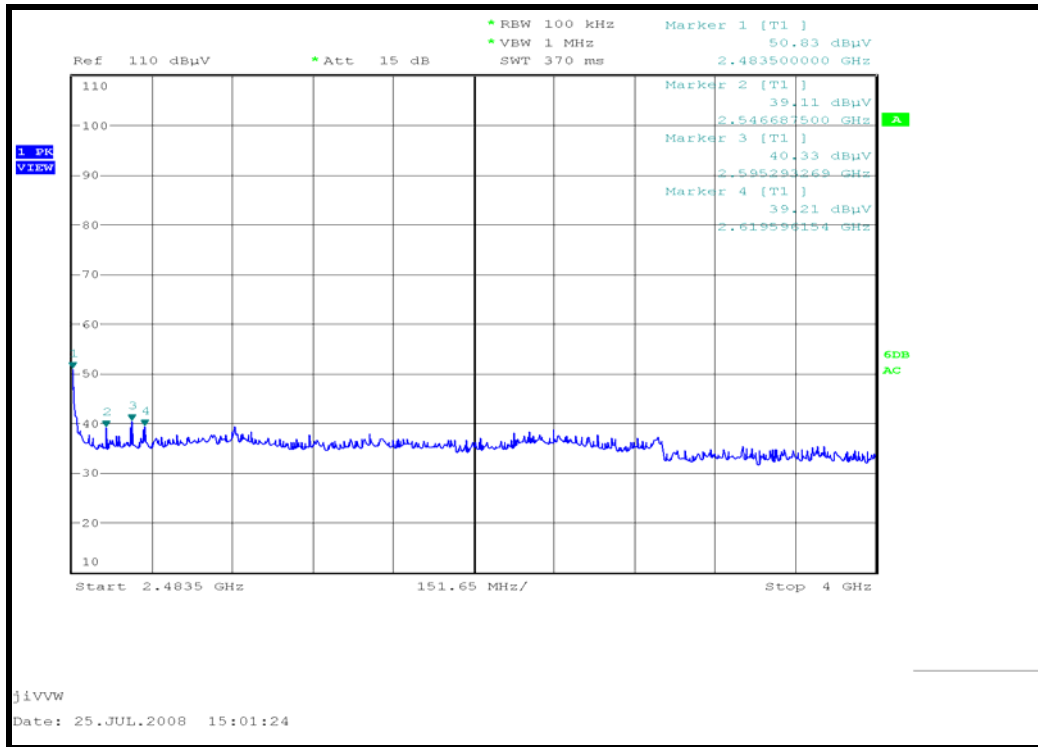


Conducted emissions: Channel 25 ac mode

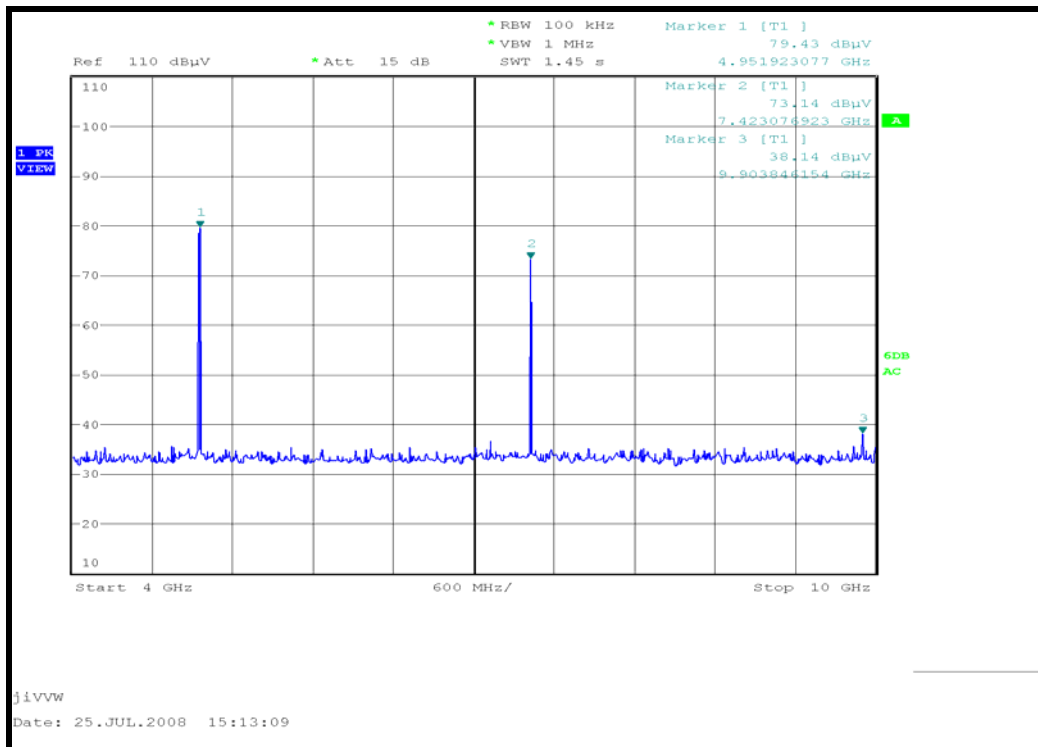


Conducted emissions: Channel 25 ac mode

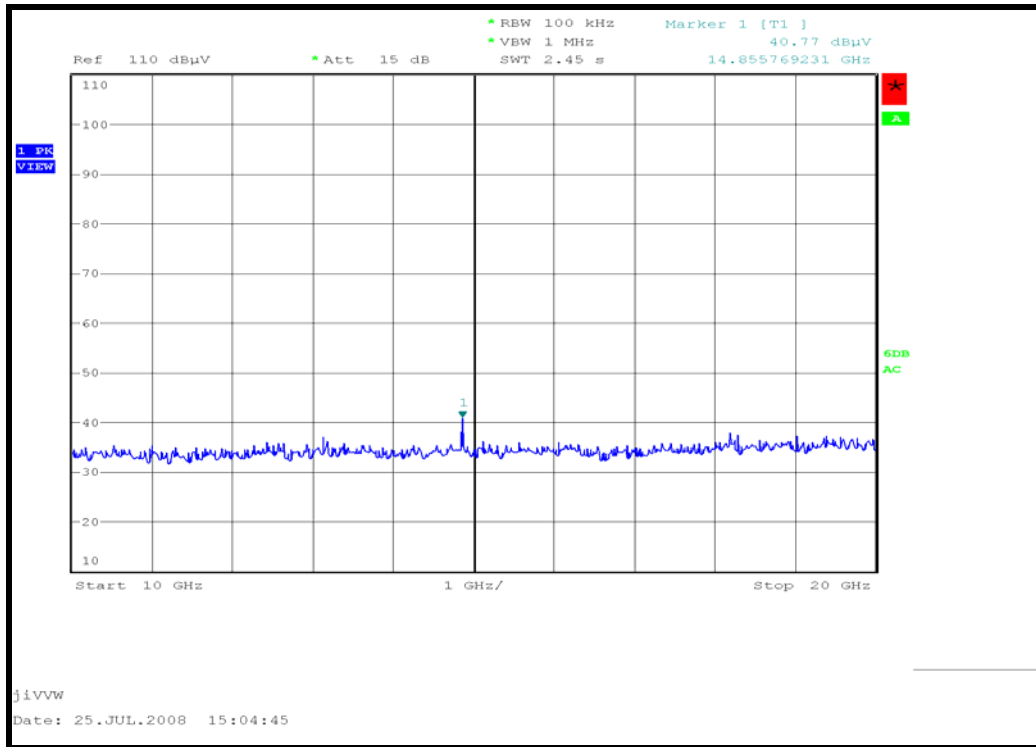


Conducted emissions: Channel 25 ac mode

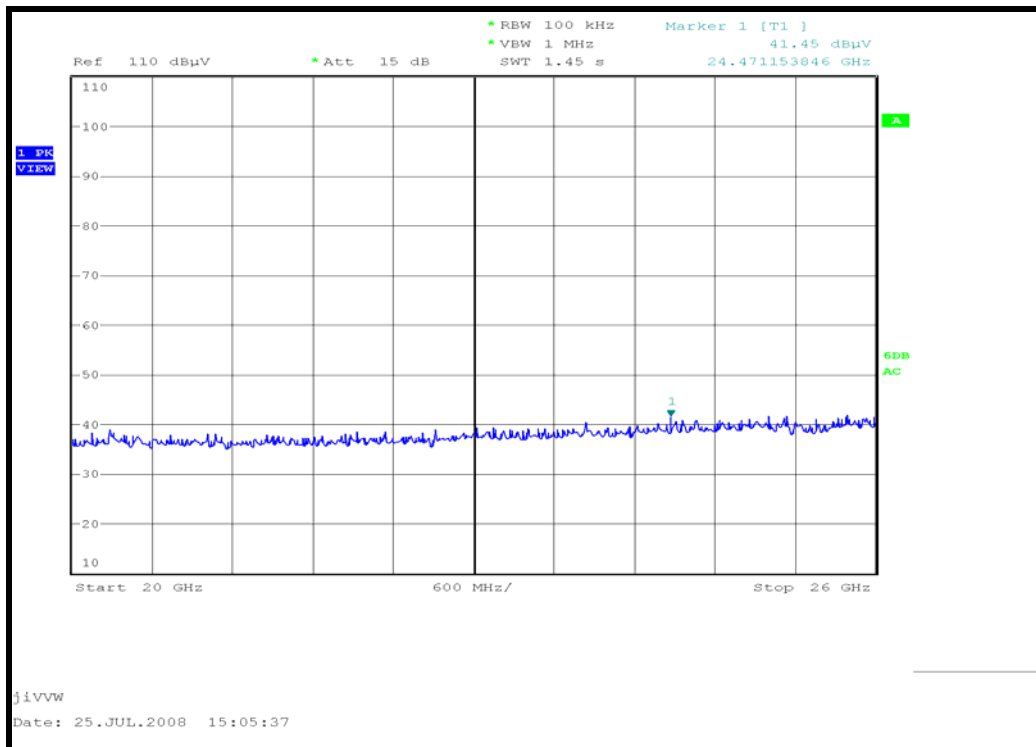


Conducted emissions: Channel 25 ac mode

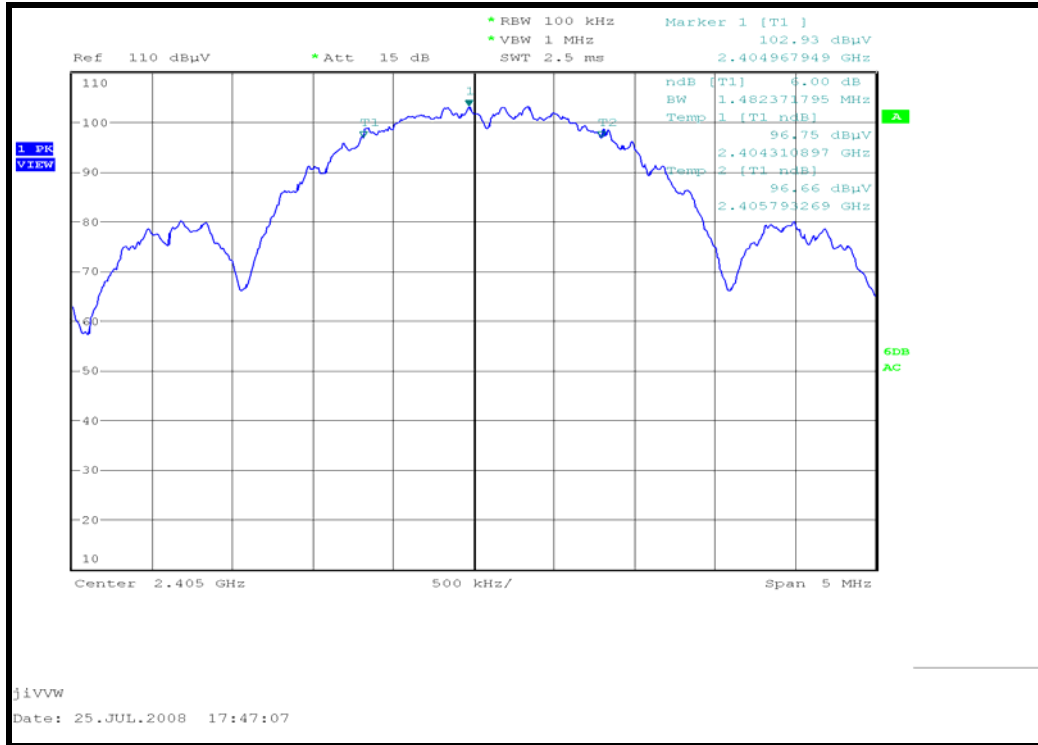


6dB Bandwidth: Channel 11 ac mode

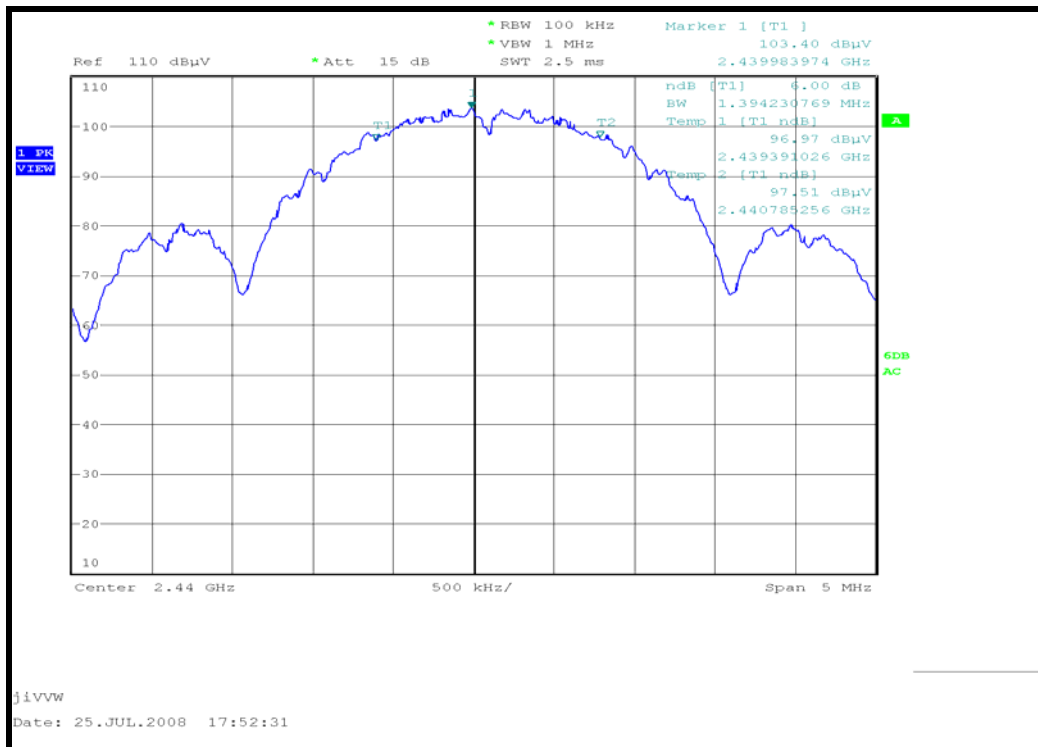


6dB Bandwidth: Channel 18 ac mode

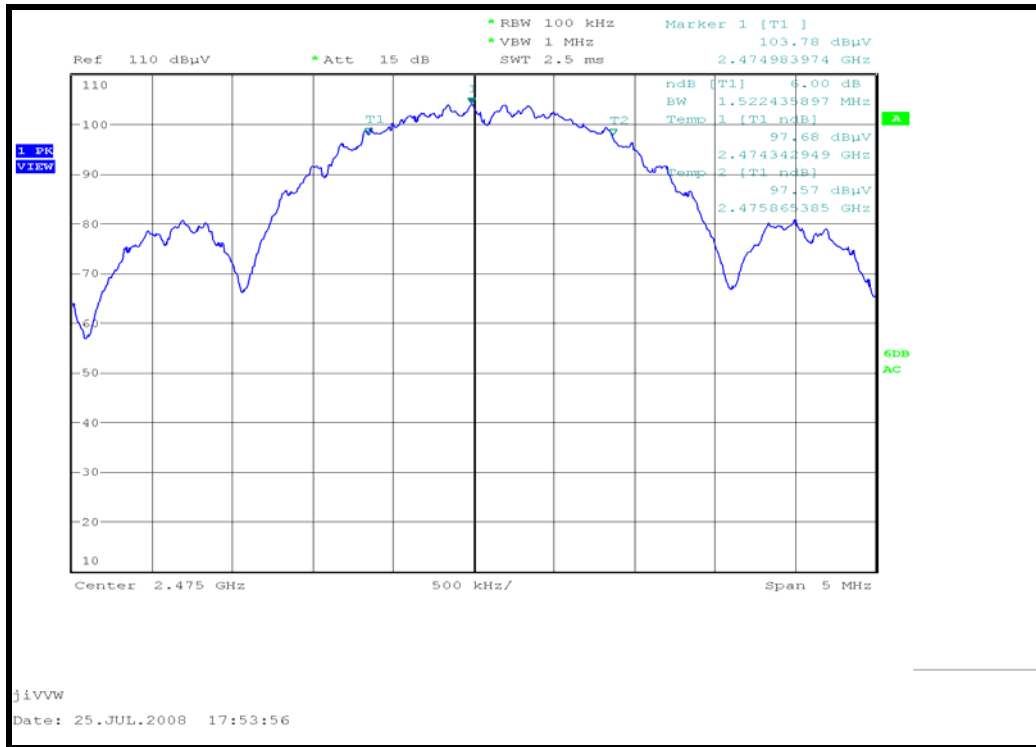


6dB Bandwidth: Channel 25 ac mode

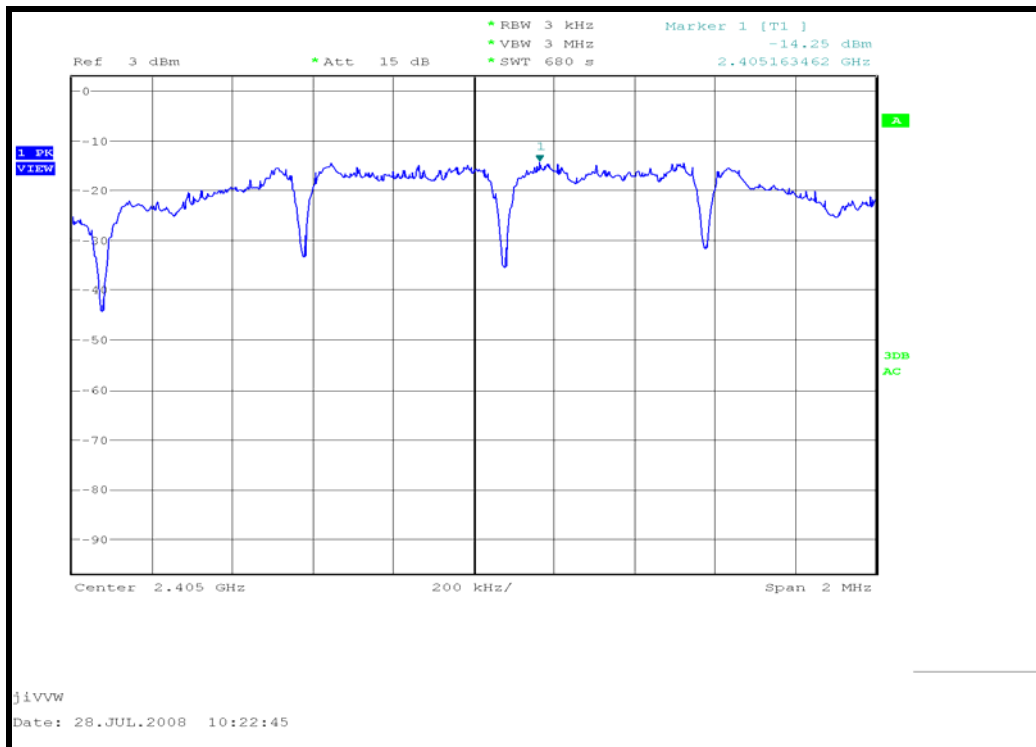


Power Spectral Density: Channel 11 ac mode

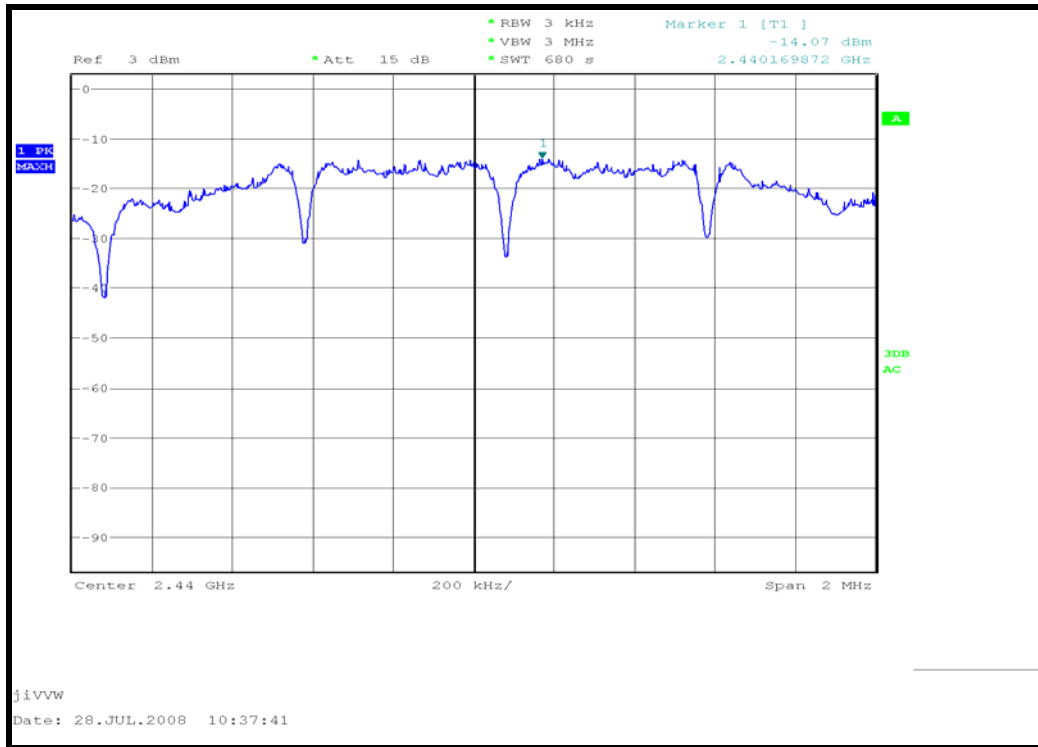


Power Spectral Density: Channel 18 ac mode

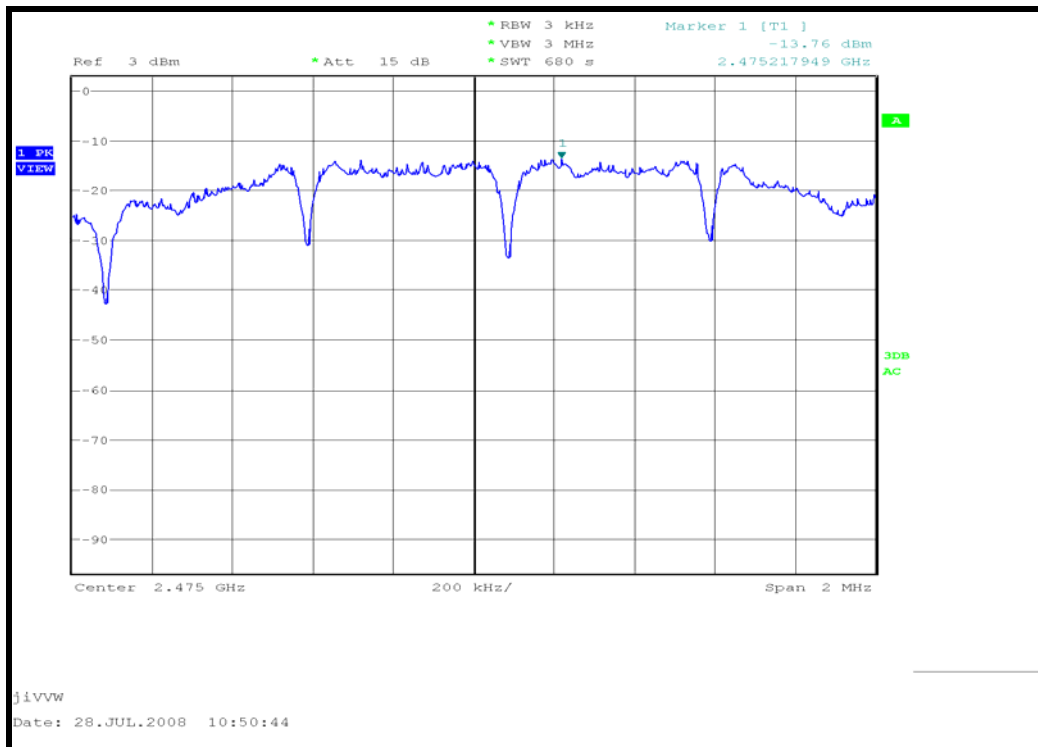

Power Spectral Density: Channel 25 ac mode

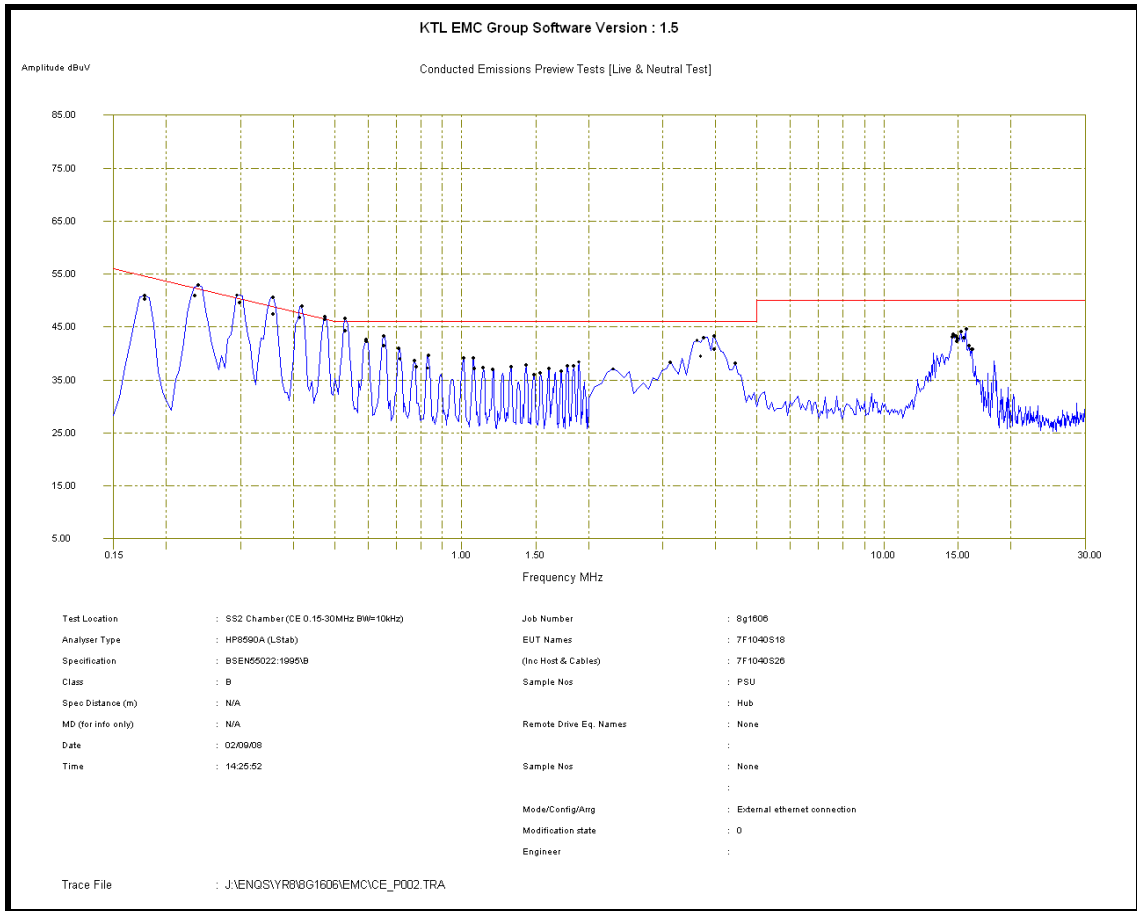

Power Line Conducted Emissions

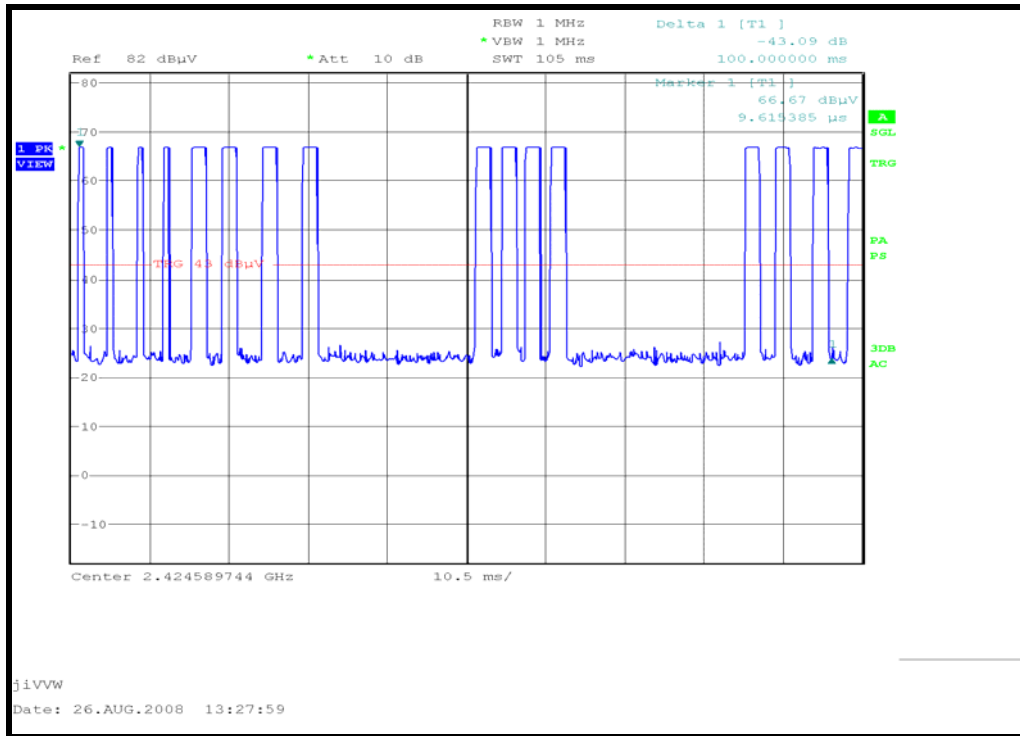

Transmitter on time (*Duty cycle*)

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and it's modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by KTL upon request.

C1) Test samples

The following samples of the apparatus were submitted by the client for testing :

Sample No.	Description	Identification
S18	Sunfone plug top ac to dc PSU	GP-ACGN-28B
S25	AlertMe Wireless Starter Hub 1-2 (antenna port conducted tests)	Build W18/08 REV-2-1 (YMS-242)
S26	AlertMe Wireless Starter Hub 1-2 Radiated Sample	Build W18/08 REV-2-1 (ZMS-342)

The following samples of apparatus were submitted by the client as host, support or drive equipment (auxiliary equipment):

Sample No.	Description	Identification
S21	Key Fob	REV-1-2
S22	PIR Detector	REV-1-2

The following samples of apparatus were supplied by KTL as support or drive equipment (auxiliary equipment):

KTL Identification	Description
TE230068 SAF	Type FFC: Actual Power 110Vac / 60Hz supply
REF1270	VARIAC
RFG109	110Vac / 60Hz supply transformer

C2) EUT Operating Mode During Testing.

During testing, the EUT was exercised as described in the following tables :

Test	Description of Operating Mode: ac mode
CFCP	The EUT was powered using AC-DC adaptor (S18). The EUT was transmitting continuously on maximum power using O-QPSK with half-sine pulse-shaping - 8-symbol listen-before send for CSMA-CA - Bit rate 250kb/s, symbol rate 62.5ksymbol/s with 4-bit 16-ary orthogonal symbols, chip rate 2000kchip/s) modulation at centre frequencies $F_c = 2405 + 5(k - 11)$ in MHz, where $k = 11, 18$ and 25
RF Antenna Port Conducted Spurious Emissions	
6dB Bandwidth	
Power Spectral Density	
REFE (15.205 In the restricted band)	

Test	Description of Operating Mode: ac live Zigbee-network mode
PLCE	The EUT was powered using AC-DC adaptor (S18).The EUT was part of a live Zigbee-mesh-network operating between all of the sensors and the hub within the wireless network. Data was sent by an Ethernet/broadband connection to an online server where users could monitor the system.

C3) EUT Configuration Information.

Sample	Internal Configuration Details
S18	Single possible internal configuration
S25	Single possible internal configuration
S26	Single possible internal configuration

C4) List of EUT Ports

The table below describes the termination of EUT ports:

ac mode:

Sample : S18
 Tests : RF Antenna Port Conducted Spurious Emissions, 6dB Bandwidth, Power Spectral Density and Conducted Fundamental Carrier Power

Port	Description of Cable Attached	Cable length	Equipment Connected
ac power port	None	N/A	ac mains 110V/60Hz
dc power port	2 core unshielded	2.4m	S25

Sample : S25
 Tests : RF Antenna Port Conducted Spurious Emissions, 6dB Bandwidth, Power Spectral Density and Conducted Fundamental Carrier Power

Port	Description of Cable Attached	Cable length	Equipment Connected
dc power port	2 core unshielded	2.4m	S18
RF Antenna Port	50Ω coax	0.1	REF847
Ethernet port	None	N/A	None

Sample : S18
 Tests : Radiated Electric Field Emissions (Restricted band 15.205)

Port	Description of Cable Attached	Cable length	Equipment Connected
ac Power port	None	N/A	ac mains 110V/60Hz
dc Power port	2 core unshielded	2m	S26

Sample : S26
 Tests : Radiated Electric Field Emissions (Restricted band 15.205)

Port	Description of Cable Attached	Cable length	Equipment Connected
dc power port	2 core unshielded	2.4m	S18
Ethernet port	None	N/A	None

A photograph showing the termination of EUT ports is contained within Appendix F

List of EUT Ports continued:**ac live Zigbee-network mode**

Sample : S18
Tests : Power Line Conducted Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
ac power	None	N/A	ac mains 110V/60Hz
dc power	2 core unscreened	2m	S26

Sample : S21 and S22
Tests : Power Line Conducted Emissions

EUT did not have any user accessible ports.

Sample : S26
Tests : Power Line Conducted Emissions

Port	Description of Cable Attached	Cable length	Equipment Connected
Ethernet	CAT 5E UTP	2m	External Ethernet connection
dc power	2 core unscreened	2m	S18

A photograph showing the termination of EUT ports is contained within Appendix F

C5 Details of Equipment Used

For Radiated Electric Field Emissions 30MHz to 1GHz: (Restricted band 15.205)

RFG No	Type	Description	Manufacturer	Date Calibrated.
274	ATS	Ferrite Lined Chamber	KTL	11/01/08
244	CBL6111	Blue Bilog Antenna (0.03 - 1GHz)	Chase	22/01/06
REF837	PSA E4440A	Spectrum Analyser	Agilent	21/02/08
REF847	ESU	EMI Test Receiver (Spectrum analyser)	R&S	29/02/08
267	N-type	RF coaxial cable (Lab 10)	KTL	28/01/08
270	N-type	RF coaxial cable (Lab 10)	KTL	25/08/07
RFG422	34401A	Multimeter	HP	01/04/08
TE23006 8 SAF	Type FFC	110Vac / 60Hz supply	Actual Power	N/A
REF1270	N/A	VARIAC	N/A	N/A

For Radiated Electric Field Emissions 1GHz to 18GHz (Restricted band 15.205)

RFG No	Type	Description	Manufacturer	Date Calibrated
274	ATS	Ferrite Lined Chamber	KTL	11/01/08
130	3115	Horn Antennas	EMCO	29/07/98
307	HP8449B	Microwave Pre-Amp (1-26.5GHz)	HP	18/02/08
476	60637	50Ω Coax 3m	Semflex	14/04/08
477	60637	50Ω Coax 3m	Semflex	14/04/08
650	N-106	Sucoflex uW Cable 3m	Suhner	14/07/08
651	N-106	Sucoflex uW Cable 7m	Suhner	14/07/08
REF847	ESU	EMI Test Receiver (Spectrum analyser)	R&S	29/02/08
244	4478	Bandstop Filter	BSC	N/A (Cal during use)
RFG422	34401A	Multimeter	HP	01/04/08
TE23006 8 SAF	Type FFC	110Vac / 60Hz supply	Actual Power	N/A
REF1270	N/A	VARIAC	N/A	N/A

For Radiated Electric Field Emissions 18GHz to 26GHz (Restricted band 15.205)

RFG No	Type	Description	Manufacturer	Date Calibrated
274	Lab 10	Large anechoic chamber	KTL	N/A
630	QSH20S20S	Horn antenna	Q-par	02/11/06
476	60637	50Ω Coax 3m	Semflex	14/04/08
477	60637	50Ω Coax 3m	Semflex	14/04/08
307	8449B	Microwave pre amp	HP	25/01/06
REF847	ESU	EMI Test Receiver (Spectrum analyser)	R&S	29/02/08
244	4478	Bandstop Filter	BSC	N/A (Cal during use)
RFG422	34401A	Multimeter	HP	01/04/08
TE23006 8 SAF	Type FFC	110Vac / 60Hz supply	Actual Power	N/A
REF1270	N/A	VARIAC	N/A	N/A

Details of Equipment Used Continued:

For Conducted Emissions

RFG No	Type	Description	Manufacturer	Date Calibrated
REF847	ESU	EMI Test Receiver (Spectrum analyser)	R&S	29/02/08
244	4478	Bandstop Filter	BSC	N/A (Cal during use)
REF 835/836	N1922A & N1911A	Power head and meter	Agilent	08/02/08
RFG422	34401A	Multimeter	HP	01/04/08
TE230068 SAF	Type FFC	110Vac / 60Hz supply	Actual Power	N/A
REF1270	N/A	VARIAC	N/A	N/A

For Conducted RF power

RFG No	Type	Description	Manufacturer	Date Calibrated
REF 835/836	N1922A & N1911A	Power head and meter	Agilent	08/02/08
RFG422	34401A	Multimeter	HP	01/04/08
TE230068 SAF	Type FFC	110Vac / 60Hz supply	Actual Power	N/A
REF1270	N/A	VARIAC	N/A	N/A

For 6dB Bandwidth measurement

RFG No	Type	Description	Manufacturer	Date Calibrated
REF847	ESU	EMI Test Receiver (Spectrum analyser)	R&S	29/02/08
RFG422	34401A	Multimeter	HP	01/04/08
TE230068 SAF	Type FFC	110Vac / 60Hz supply	Actual Power	N/A
REF1270	N/A	VARIAC	N/A	N/A

For Power Spectral density

RFG No	Type	Description	Manufacturer	Date Calibrated
REF847	ESU	EMI Test Receiver (Spectrum analyser)	R&S	29/02/08
RFG422	34401A	Multimeter	HP	01/04/08
TE230068 SAF	Type FFC	110Vac / 60Hz supply	Actual Power	N/A
REF1270	N/A	VARIAC	N/A	N/A

Details of Equipment Used Continued:

For power line conducted emissions

RFG No	Type	Description	Manufacturer	Date Calibrated
n/a	Lab 11	Small Screened Chamber	KTL	-
189	ESH3-Z5	Single-phase LISN	R & S	14/05/08
232	ESH3-Z2	Pulse Limiter	R & S	07/02/08
125	ESHS 10	Test Receiver (LF)	R & S	22/11/07
404	E4407B	Spectrum Analyser	Agilent	07/04/08
296	BNC	RF coaxial cable (Lab 11)	KTL	28/01/08
298	BNC	RF coaxial cable (Lab 11)	KTL	18/09/07
109	8559	110Vac / 60Hz supply transformer	-	N/A

Appendix D:**Additional Information**

The following information is a copy of email correspondence from the client, detailing the frequencies used within the EUT. The lowest and highest declared frequency generated in the device. In addition are details of the antenna gain and modulation scheme

Hi Martin,
to answer your questions:

1. The lowest and highest operating frequencies on each of the devices,
While the hardware is capable of 2400-2500MHz (Ember EM2xx data sheet 120-0082-000P p16), the firmware only permits it to be set to a set of 5MHz channels with centre frequencies $F_c = 2405 + 5(k - 11)$ in megahertz, for $k = 11, 12, \dots, 26$ where k is the channel number according to IEEE Std 802.15.4-2003 (p30). Alertme devices are further limited to operation only on channels 11-25, corresponding to minimum and maximum centre frequencies of 2405MHz and 2475MHz.

2. Modulation used

- O-QPSK with half-sine pulse-shaping
- 8-symbol listen-before send for CSMA-CA
- Bit rate 250kb/s, symbol rate 62.5ksymbol/s with 4-bit 16-ary orthogonal symbols, chip rate 2000kchip/s
- ref. IEEE Std 802.15.4-2003 p47

3. Details of the antenna/specification of maximum gain

- Impexa (left hand version) 2.4 GHz SMD Antenna Part No. 3030A6150, implemented according to Antenova reference design.
- Peak gain 1.0dBi, average gain -1.9dBi, average efficiency 65%

4. The name of the 8 pin connector on the board, i.e. (serial port....)

The 10-pin programming and debug interface header is called the InSight Port

I'll bring you the documents tomorrow.

Amyas

Dr Amyas Phillips

Alertme.com

27-28 Bridge Street, Cambridge, CB2 1UJ, UK

cell: +44 (0)7941 420129

direct: +44 (0)1223 222157

office: +44 (0)1223 361555

fax: +44 (0)1223 361557


skype: aewp22

Extract from Antenna Manufacturers data sheet detailing antenna gain

Impexa 2.4 GHz SMD Antenna
Part No. 3030A6150 / 3030A6250

4 Part numbers

Impexa Left: 3030A6150-01



Impexa Right: 3030A6250-01



5 General data

Product name	Impexa 2.4 GHz
Part Number	3030A6150-01 (Left) 3030A6250-01 (Right)
Frequency	2.4 – 2.5 GHz
Polarization	Linear
Operating temperature	-40 °C to +85 °C
Impedance with matching	50 Ω
Weight	0.05 g
Antenna type	SMD
Dimensions	6.1 x 3.9 x 1.1 [mm]

6 Electrical characteristics

	Typical performance	Conditions
Peak gain	1.0 dBi	All data measured on Antenova's reference boards, part numbers AN-1-0542-1 and AN-1-0563-1 Data given for the 2.4 – 2.5 GHz frequency range
Average gain	-1.9 dBi	
Average efficiency	65%	
Maximum Return Loss	-10 dB	
Maximum VSWR	1.9:1	

Integrated Antenna Solutions

Appendix E: Calculation of the duty cycle correction factor

Using a spectrum analyser in zero span mode, centred on the fundamental carrier frequency with a RBW of 1MHz and a video Bandwidth of 1MHz the sweep time was set accordingly to capture the pulse train. The transmit pulsewidths and period was measured. A plots of the pulse train is contained in Appendix B of this test report.

If the pulse train was less than 100 ms, including blanking intervals, the duty cycle was calculated by averaging the sum of the pulsewidths over one complete pulse train. However if the pulse train exceeds 100ms then the duty cycle was calculated by averaging the sum of the pulsewidths over the 100ms width with the highest average value. (The duty cycle is the value of the sum of the pulse widths in one period (or 100ms), divided by the length of the period (or 100ms). The duty cycle correction factor was then expressed in dB and the peak emissions adjusted accordingly to give an average value of the emission.

Correction factor dB = $20 \times (\text{Log}_{10} \text{ Calculated Duty Cycle})$

Therefore the calculated duty cycle was determined:

The pulse train period was greater than >100ms and in as shown from the plots in contained in appendix B of this test report.

Duty cycle = $\frac{\text{the sum of the highest average value pulsewidths over 100ms}}{100\text{ms}}$

e.g

$$= \frac{7.459\text{ms}}{100\text{ms}} = 0.07459$$

0.07459 or 7.459%


Correction factor (dB) = $20 \times (\text{Log}_{10} 0.07459) = -22.54\text{dB}$

Appendix F:


Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement: front view.
2. Radiated electric field emissions arrangement: rear view.
3. Power line conducted emissions arrangement – S18 and S26.
4. Photo of the RF module front view
5. Photo of the RF module rear view
6. Photo of S26 with outer casing partly removed.
7. PCB top face
8. PCB bottom face

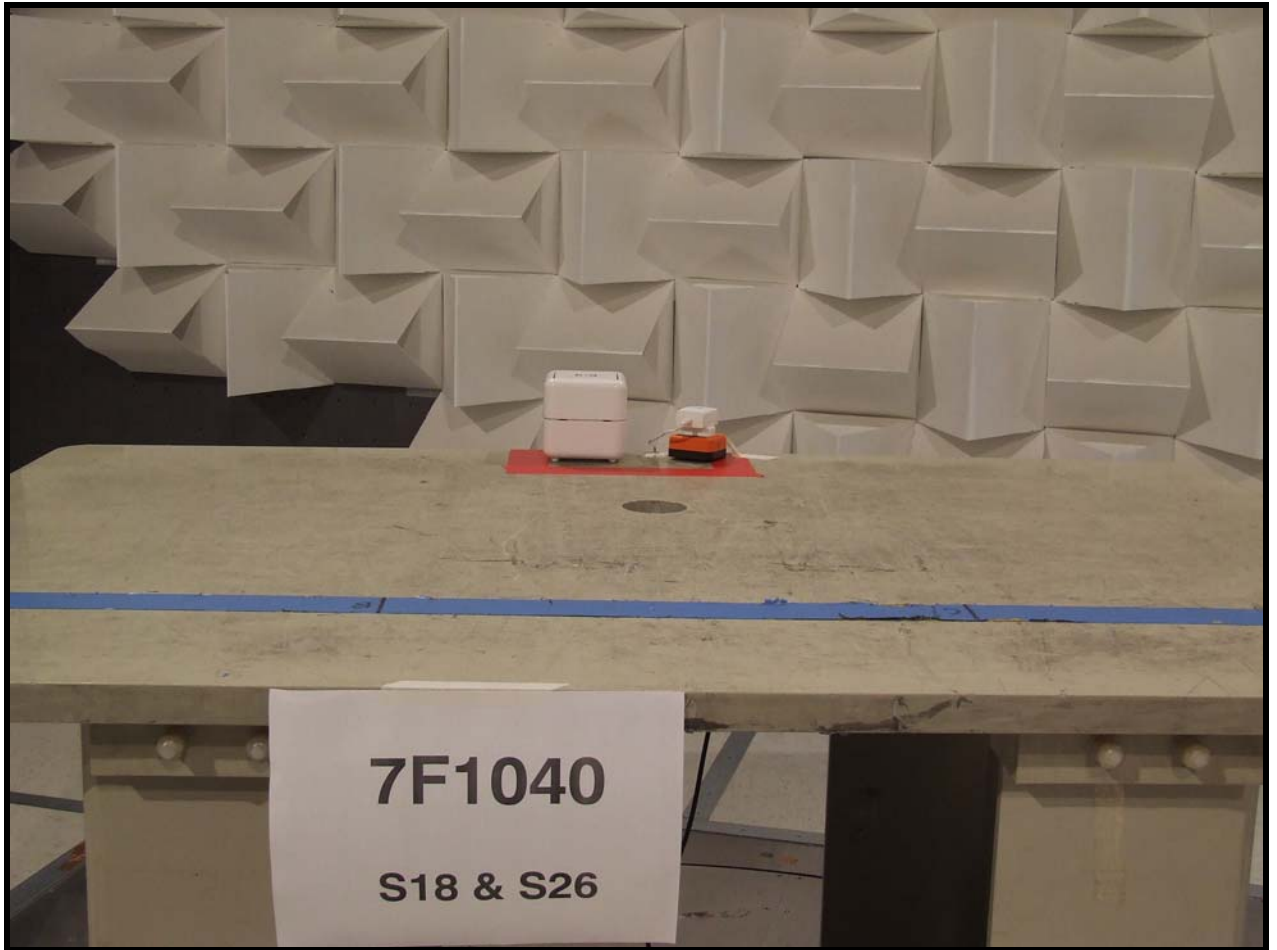

Photograph 1

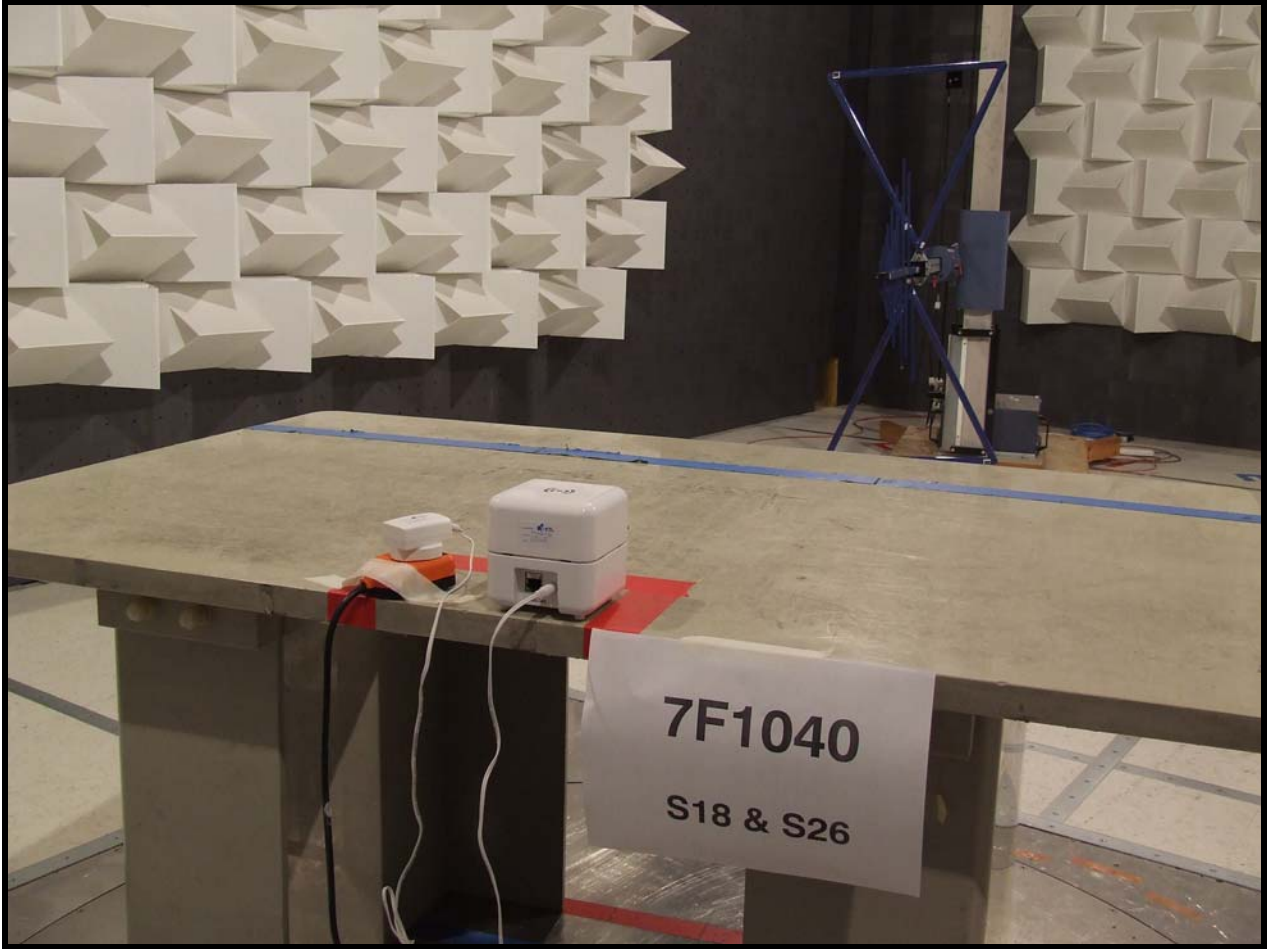

Photograph 2



Photograph 3




Photograph 4




Photograph 5



Photograph 6

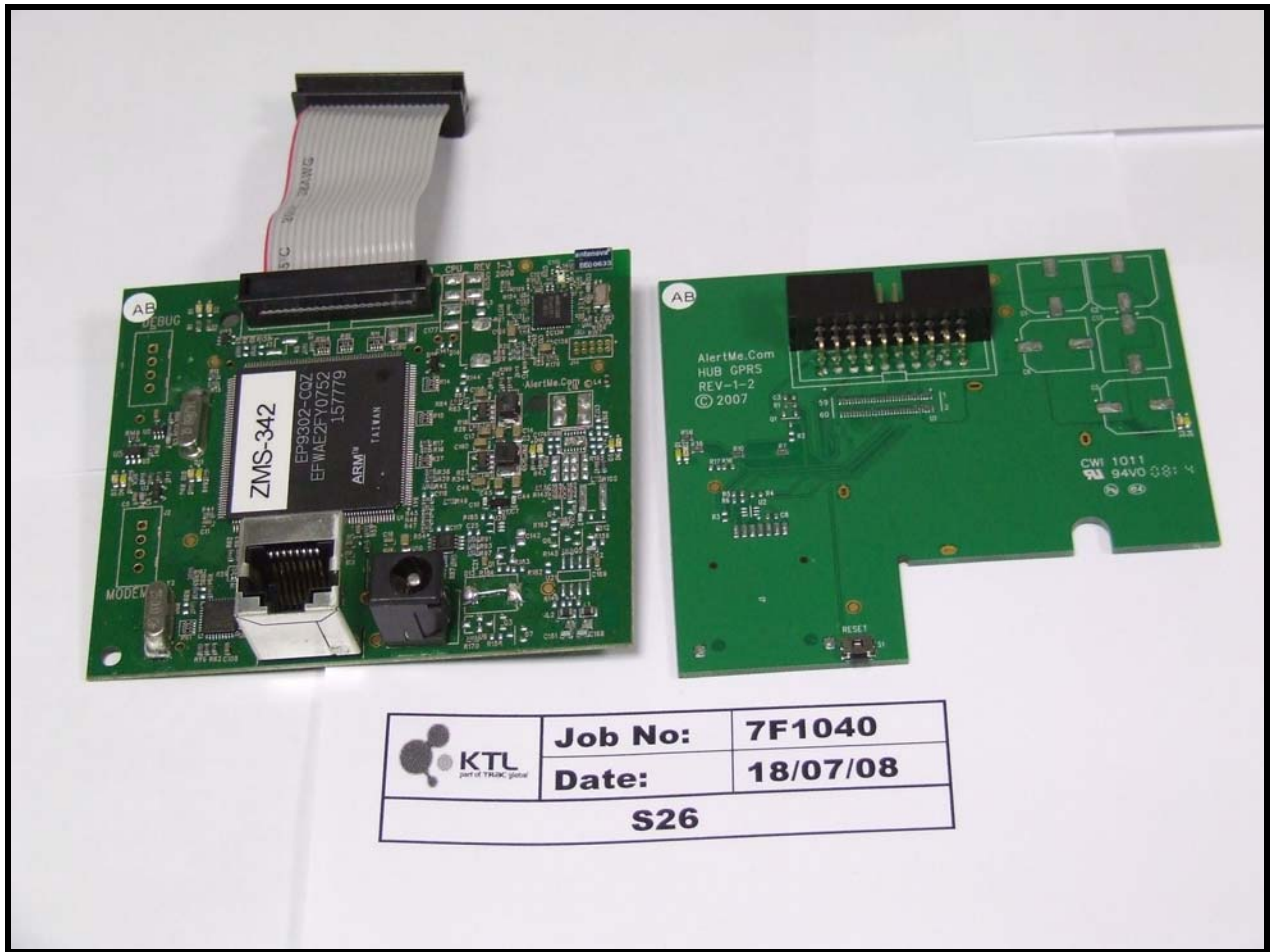

Photograph 7

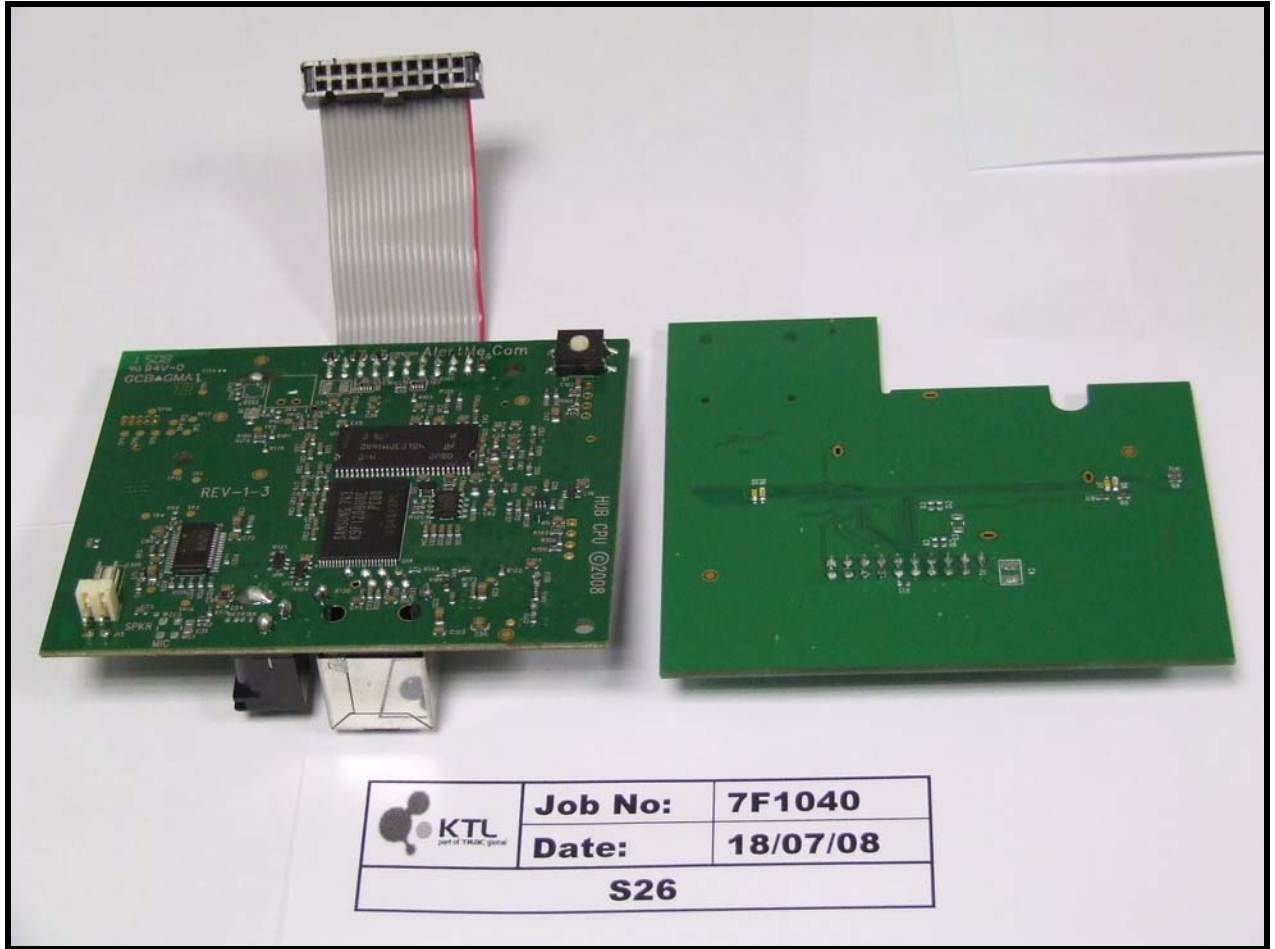

Photograph 8

Appendix G:

MPE Calculation

OET Bulletin No. 65, Supplement C 01-01

47 CFR §§1.1307 and 2.1091

2.1091 Radio frequency radiation exposure evaluation: mobile devices.

A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimetres is normally maintained between the transmitter’s radiating structure(s) and the body of the user or nearby persons. In this context, the term “fixed location” means that the device is physically secured at one location and is not able to be easily moved to another location. Transmitting devices designed to be used by consumers or workers that can be easily re-located, such as wireless devices associated with a personal computer, are considered to be mobile devices if they meet the 20 centimetre separation requirement.

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{PG}{4 \pi R^2}$$

where:

S = power density

P = power input to the antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the centre of radiation of the antenna

Maximum peak output power at the antenna terminal:	1.93	dBm
Maximum peak output power at the antenna terminal:	1.56	mW
Antenna gain (typical):	-1.9	dBi
Maximum antenna gain:	0.645654229	numeric
Prediction distance:	20	cm
Prediction frequency:	2475	MHz

Result

Prediction Frequency (MHz)	Maximum allowable antenna gain: (dBi)	Power density (S) at prediction frequency: (mW/cm ²)	MPE limit for uncontrolled exposure at prediction frequency: (mW/cm ²)	Result
2475	35.08269855	0.000200	1	Pass



KTL
part of TRAC global

- Unit E, South Orbital Trading Park, Hedon Road, Hull, HU9 1NJ, UK.
- T +44 (0)1482 801801
- F +44 (0)1482 801806
- E info@trac-ctl.com