



# RADIO TEST REPORT


**Test Report No. : 14010071H-A-R2**

**Applicant** : FALTEC CO.,LTD.  
**Type of EUT** : Remote Transmitter  
**Model Number of EUT** : PZ170-23721  
**FCC ID** : WKE-723721  
**Test regulation** : FCC Part 15 Subpart C: 2021  
**Test Result** : Complied (Refer to SECTION 3)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements.  
It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan, Inc. has been accredited.
9. The information provided from the customer for this report is identified in Section 1.
10. This report is a revised version of 14010071H-A-R1. 14010071H-A-R1 is replaced with this report.

**Date of test:** June 23 to September 15, 2021

**Representative test engineer:**

  
Hiroki Numata  
Engineer

**Approved by:**

  
Tsubasa Takayama  
Leader



CERTIFICATE 5107.02

The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan, Inc.  
 There is no testing item of "Non-accreditation".

---

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

Report Cover Page - 13-EM-F0429 Issue # 19.0

## REVISION HISTORY

### Original Test Report No.: 14010071H-A

| Revision        | Test report No. | Date                 | Page revised | Contents  |
|-----------------|-----------------|----------------------|--------------|---|
| -<br>(Original) | 14010071H-A     | November 11,<br>2021 | -            | -   |
| 1               | 14010071H-A-R1  | February 17,<br>2022 | P.6          | Correction of "FCC Part 15.31 (e)" in Clause 3.2 to the following sentences;<br>The EUT provides stable voltage constantly to the wireless transmitter regardless of input voltage.<br>A new battery and DC power supply was used for the test.<br>That does not affect the test result, therefore the EUT complies with the requirement. |
| 1               | 14010071H-A-R1  | February 17,<br>2022 | P.10         | Addition of the following sentences under the block diagram in Clause 4.2;<br>Ferrite core was used to curb the influence of the DC power supply.<br>It was confirmed that there was no effect on the radio characteristics.  |
| 1               | 14010071H-A-R1  | February 17,<br>2022 | P.12         | Correction of the Test Distance formula for 1 GHz - 10 GHz in the Test Setup diagram.<br>From "* Test Distance: (3 + SVSWR Volume /2) - r = 3.9 m"<br>To "* Test Distance: (3 + SVSWR Volume /2) - r = 4.0 m"   |
| 1               | 14010071H-A-R1  | February 17,<br>2022 | P.20         | - Addition of 922.8 MHz, 902.0 MHz, 928.0 MHz in plot data for Horizontal.<br>- Correction of "0" for the lower limit of the vertical axis.   |
| 2               | 14010071H-A-R2  | February 28,<br>2022 | P.6          | Correction of "FCC Part 15.31 (e)" in Clause 3.2 to the following sentence;<br>From "A new battery and DC power supply was used for the test."<br>To "DC power supply was used for the test."   |

## Reference: Abbreviations (Including words undescribed in this report)

|                |   |         |   |
|----------------|---|---------|---|
| A2LA           | The American Association for Laboratory Accreditation           | MCS     | Modulation and Coding Scheme                        |
| AC             | Alternating Current   | MRA     | Mutual Recognition Arrangement                      |
| AFH            | Adaptive Frequency Hopping                                      | N/A     | Not Applicable                                      |
| AM             | Amplitude Modulation  | NIST    | National Institute of Standards and Technology      |
| Amp, AMP       | Amplifier   | NS      | No signal detect.                                   |
| ANSI           | American National Standards Institute                           | NSA     | Normalized Site Attenuation                         |
| Ant, ANT       | Antenna   | NVLAP   | National Voluntary Laboratory Accreditation Program |
| AP             | Access Point  | OBW     | Occupied Band Width                                 |
| ASK            | Amplitude Shift Keying  | OFDM    | Orthogonal Frequency Division Multiplexing          |
| Atten., ATT    | Attenuator  | P/M     | Power meter   |
| AV             | Average   | PCB     | Printed Circuit Board                               |
| BPSK           | Binary Phase-Shift Keying                                       | PER     | Packet Error Rate                                   |
| BR             | Bluetooth Basic Rate  | PHY     | Physical Layer                                      |
| BT             | Bluetooth   | PK      | Peak  |
| BT LE          | Bluetooth Low Energy  | PN      | Pseudo random Noise                                 |
| BW             | BandWidth   | PRBS    | Pseudo-Random Bit Sequence                          |
| Cal Int        | Calibration Interval  | PSD     | Power Spectral Density                              |
| CCK            | Complementary Code Keying                                       | QAM     | Quadrature Amplitude Modulation                     |
| Ch., CH        | Channel   | QP      | Quasi-Peak  |
| CISPR          | Comite International Special des Perturbations Radioelectriques | QPSK    | Quadri-Phase Shift Keying                           |
| CW             | Continuous Wave   | RBW     | Resolution Band Width                               |
| DBPSK          | Differential BPSK   | RDS     | Radio Data System                                   |
| DC             | Direct Current  | RE      | Radio Equipment                                     |
| D-factor       | Distance factor   | RF      | Radio Frequency                                     |
| DFS            | Dynamic Frequency Selection                                     | RMS     | Root Mean Square                                    |
| DQPSK          | Differential QPSK   | RSS     | Radio Standards Specifications                      |
| DSSS           | Direct Sequence Spread Spectrum                                 | Rx      | Receiving   |
| EDR            | Enhanced Data Rate  | SA, S/A | Spectrum Analyzer                                   |
| EIRP, e.i.r.p. | Equivalent Isotropically Radiated Power                         | SG      | Signal Generator                                    |
| EMC            | ElectroMagnetic Compatibility                                   | SVSWR   | Site-Voltage Standing Wave Ratio                    |
| EMI            | ElectroMagnetic Interference                                    | TR      | Test Receiver                                       |
| EN             | European Norm   | Tx      | Transmitting  |
| ERP, e.r.p.    | Effective Radiated Power  | VBW     | Video BandWidth                                     |
| EU             | European Union  | Vert.   | Vertical  |
| EUT            | Equipment Under Test  | WLAN    | Wireless LAN  |
| Fac.           | Factor  |         |   |
| FCC            | Federal Communications Commission                               |         |   |
| FHSS           | Frequency Hopping Spread Spectrum                               |         |   |
| FM             | Frequency Modulation  |         |   |
| Freq.          | Frequency   |         |   |
| FSK            | Frequency Shift Keying  |         |   |
| GFSK           | Gaussian Frequency-Shift Keying                                 |         |   |
| GNSS           | Global Navigation Satellite System                              |         |   |
| GPS            | Global Positioning System                                       |         |   |
| Hori.          | Horizontal  |         |   |
| ICES           | Interference-Causing Equipment Standard                         |         |   |
| IEC            | International Electrotechnical Commission                       |         |   |
| IEEE           | Institute of Electrical and Electronics Engineers               |         |   |
| IF             | Intermediate Frequency  |         |   |
| ILAC           | International Laboratory Accreditation Conference               |         |   |
| ISED           | Innovation, Science and Economic Development Canada             |         |   |
| ISO            | International Organization for Standardization                  |         |   |
| JAB            | Japan Accreditation Board                                       |         |   |
| LAN            | Local Area Network  |         |   |
| LIMS           | Laboratory Information Management System                        |         |   |

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Faxsimile : +81 596 24 8124

| <b>CONTENTS</b>   | <b>PAGE</b> |
|---|-------------|
| <b>SECTION 1: Customer information.....</b>                         | <b>5</b>    |
| <b>SECTION 2: Equipment under test (EUT).....</b>                   | <b>5</b>    |
| <b>SECTION 3: Test specification, procedures &amp; results.....</b> | <b>6</b>    |
| <b>SECTION 4: Operation of EUT during testing.....</b>              | <b>9</b>    |
| <b>SECTION 5: Radiated Spurious Emission .....</b>                  | <b>11</b>   |
| <b>SECTION 6: Antenna Terminal Conducted Tests.....</b>             | <b>13</b>   |
| <b>APPENDIX 1: Test data .....</b>                                  | <b>14</b>   |
| 99 % Occupied Bandwidth and 6 dB Bandwidth.....                     | 14          |
| Maximum Peak Output Power .....                                     | 15          |
| Average Output Power.....   | 16          |
| Radiated Spurious Emission .....                                    | 18          |
| Conducted Spurious Emission .....                                   | 21          |
| Power Density.....  | 22          |
| <b>APPENDIX 2: Test instruments .....</b>                           | <b>23</b>   |
| <b>APPENDIX 3: Photographs of test setup .....</b>                  | <b>24</b>   |
| Radiated Spurious Emission .....                                    | 24          |
| Worst Case Position (Horizontal: Z-axis/ Vertical:Y-axis) .....     | 25          |
| Antenna Terminal Conducted Tests.....                               | 26          |

## **SECTION 1: Customer information**

Company Name : FALTEC CO.,LTD.  
Address : Solid Square West Tower 19th Floor 580 Horikawa-cho, Saiwai-ku, Kawasaki-city Kanagawa, 212- 0013 Japan  
Telephone Number : +81-44-520-0019  
Contact Person : Hiroshi Kurumagawa

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages

- Operating/Test Mode(s) (Mode(s)) on all the relevant pages

- SECTION 1: Customer information

- SECTION 2: Equipment under test (EUT) other than the Receipt Date

- SECTION 4: Operation of EUT during testing

\* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (EUT)**

### **2.1 Identification of EUT**

Type : Remote Transmitter  
Model Number : PZ170-23721  
Serial Number : Refer to SECTION 4.2  
Receipt Date : June 23 and August 25, 2021 (for Radiated emission)  
Condition : September 1, 2021 (for Antenna Terminal Conducted)  
Production prototype  
Modification : (Not for Sale: This sample is equivalent to mass-produced items.)  
No Modification by the test lab.

### **2.2 Product Description**

Model: PZ170-23721 (referred to as the EUT in this report) is a Remote Transmitter.

#### **General Specification**

Rating : DC 6.0 V

#### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : 922.8 MHz  
Modulation : spread spectrum  
Antenna type :  $\lambda/4$  helical antenna  
Antenna Gain : 0 dBi  
Clock frequency (Maximum) : 32 MHz

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## SECTION 3: Test specification, procedures & results

### 3.1 Test Specification

Test Specification : FCC Part 15 Subpart C  
 FCC Part 15 final revised on May 3, 2021 and effective July 2, 2021

Title : FCC 47 CFR Part 15 Radio Frequency Device Subpart C Intentional Radiators  
 Section 15.207 Conducted limits  
 Section 15.247 Operation within the bands 902-928 MHz, 2400-2483.5 MHz,  
 and 5725-5850 MHz

### 3.2 Procedures and results

| Item                                       | Test Procedure  | Specification  | Worst margin                            | Results             | Remarks   |
|--|---|--|---|---------------------|---|
| Conducted Emission                         | FCC: ANSI C63.10-2013<br>6. Standard test methods<br>ISED: RSS-Gen 8.8      | FCC: Section 15.207<br>ISED: RSS-Gen 8.8                                   | N/A                                     | N/A                 | *1)   |
| 6dB Bandwidth                              | FCC: KDB 558074 D01<br>15.247<br>Meas Guidance v05r02<br>ISED: -            | FCC: Section<br>15.247(a)(2)<br>ISED: RSS-247 5.2(a)                       |   | Complied<br>a)      | Conducted   |
| Maximum Peak Output Power                  | FCC: KDB 558074 D01<br>15.247<br>Meas Guidance v05r02<br>ISED: RSS-Gen 6.12 | FCC: Section<br>15.247(b)(3)<br>ISED: RSS-247 5.4(d)                       | See data.                               | Complied<br>b)      | Conducted   |
| Power Density                              | FCC: KDB 558074 D01<br>15.247<br>Meas Guidance v05r02<br>ISED: -            | FCC: Section 15.247(e)<br>ISED: RSS-247 5.2(b)                             |   | Complied<br>c)      | Conducted   |
| Spurious Emission<br>Restricted Band Edges | FCC: KDB 558074 D01<br>15.247<br>Meas Guidance v05r02<br>ISED: RSS-Gen 6.13 | FCC: Section 15.247(d)<br>ISED: RSS-247 5.5<br>RSS-Gen 8.9<br>RSS-Gen 8.10 | 1.2 dB<br>3691.2 MHz, AV,<br>Horizontal | Complied#<br>d), e) | Conducted<br>(below 30 MHz)/<br>Radiated<br>(above 30 MHz)<br>*2) |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

\*2) Radiated test was selected over 30 MHz based on section 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02 8.5 and 8.6.

a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth)

b) Refer to APPENDIX 1 (data of Maximum Peak Output Power)

c) Refer to APPENDIX 1 (data of Power Density)

d) Refer to APPENDIX 1 (data of Conducted Spurious Emission)

e) Refer to APPENDIX 1 (data of Radiated Spurious Emission)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

\* In case any questions arise about test procedure, ANSI C63.10: 2013 is also referred.

### FCC Part 15.31 (e)

The EUT provides stable voltage constantly to the wireless transmitter regardless of input voltage.

DC power supply was used for the test.

That does not affect the test result, therefore the EUT complies with the requirement.

### FCC Part 15.203 Antenna requirement

The antenna is not removable from the EUT.

Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Faxsimile : +81 596 24 8124

### 3.3 Addition to standard

| Item   | Test Procedure    | Specification | Worst margin | Results  | Remarks   |
|--|-------------------|---------------|--------------|----------|-----------|
| 99% Occupied Bandwidth   | ISED: RSS-Gen 6.7 | ISED: -       | N/A          | -<br>(a) | Conducted |
| (a) Refer to APPENDIX 1 (data of 6 dB Bandwidth and 99 % Occupied Bandwidth) |                   |               |              |          |           |

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k=2$ .  
 Ise EMC Lab.

#### Antenna Terminal test

| Test Item  | Uncertainty (+/-) |
|--|-------------------|
| 20 dB Bandwidth / 99 % Occupied Bandwidth        | 0.96 %            |
| Maximum Peak Output Power / Average Output Power | 1.4 dB            |
| Carrier Frequency Separation                     | 0.42 %            |
| Dwell time / Burst rate                          | 0.10 %            |
| Conducted Spurious Emission                      | 2.6 dB            |

#### Radiated emission

| Measurement distance | Frequency range                  | Uncertainty (+/-) |
|----------------------|----------------------------------|-------------------|
| 3 m                  | 9 kHz to 30 MHz                  | 3.3 dB            |
| 10 m                 |                                  | 3.2 dB            |
| 3 m                  | 30 MHz to 200 MHz (Horizontal)   | 4.8 dB            |
|                      | (Vertical)                       | 5.0 dB            |
|                      | 200 MHz to 1000 MHz (Horizontal) | 5.2 dB            |
|                      | (Vertical)                       | 6.3 dB            |
| 10 m                 | 30 MHz to 200 MHz (Horizontal)   | 4.8 dB            |
|                      | (Vertical)                       | 4.8 dB            |
|                      | 200 MHz to 1000 MHz (Horizontal) | 5.0 dB            |
|                      | (Vertical)                       | 5.0 dB            |
| 3 m                  | 1 GHz to 6 GHz                   | 4.9 dB            |
|                      | 6 GHz to 18 GHz                  | 5.2 dB            |
| 1 m                  | 10 GHz to 26.5 GHz               | 5.5 dB            |
|                      | 26.5 GHz to 40 GHz               | 5.5 dB            |
| 10 m                 | 1 GHz to 18 GHz                  | 5.2 dB            |

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

\*A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 884919

ISED Lab Company Number: 2973C / CAB identifier: JP0002

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

| Test site                  | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms            | Maximum measurement distance |
|----------------------------|----------------------------|--|------------------------|------------------------------|
| No.1 semi-anechoic chamber | 19.2 x 11.2 x 7.7          | 7.0 x 6.0  | No.1 Power source room | 10 m                         |
| No.2 semi-anechoic chamber | 7.5 x 5.8 x 5.2            | 4.0 x 4.0  | -                      | 3 m                          |
| No.3 semi-anechoic chamber | 12.0 x 8.5 x 5.9           | 6.8 x 5.75   | No.3 Preparation room  | 3 m                          |
| No.3 shielded room         | 4.0 x 6.0 x 2.7            | N/A  | -                      | -                            |
| No.4 semi-anechoic chamber | 12.0 x 8.5 x 5.9           | 6.8 x 5.75   | No.4 Preparation room  | 3 m                          |
| No.4 shielded room         | 4.0 x 6.0 x 2.7            | N/A  | -                      | -                            |
| No.5 semi-anechoic chamber | 6.0 x 6.0 x 3.9            | 6.0 x 6.0  | -                      | -                            |
| No.5 measurement room      | 6.4 x 6.4 x 3.0            | 6.4 x 6.4  | -                      | -                            |
| No.6 shielded room         | 4.0 x 4.5 x 2.7            | 4.0 x 4.5  | -                      | -                            |
| No.6 measurement room      | 4.75 x 5.4 x 3.0           | 4.75 x 4.15  | -                      | -                            |
| No.7 shielded room         | 4.7 x 7.5 x 2.7            | 4.7 x 7.5  | -                      | -                            |
| No.8 measurement room      | 3.1 x 5.0 x 2.7            | 3.1 x 5.0  | -                      | -                            |
| No.9 measurement room      | 8.8 x 4.6 x 2.8            | 2.4 x 2.4  | -                      | -                            |
| No.10 shielded room        | 3.8 x 2.8 x 2.8            | 3.8 x 2.8  | -                      | -                            |
| No.11 measurement room     | 4.0 x 3.4 x 2.5            | N/A  | -                      | -                            |
| No.12 measurement room     | 2.6 x 3.4 x 2.5            | N/A  | -                      | -                            |

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 4: Operation of EUT during testing**


### **4.1 Operating Mode(s)**

| Mode                   | Remarks*  |
|------------------------|---|
| Transmitting mode (Tx) | -<br><br>*Power of the EUT was set by the software as follows;<br>Power settings: 8.3mW<br>Software: USA_MZD_LoRa_R20181002.mot<br>(Date: 2018.10.02, Storage location: EUT memory) |

\*This setting of software is the worst case.  
Any conditions under the normal use do not exceed the condition of setting.  
In addition, end users cannot change the settings of the output power of the product.

| Test Item   | Mode                   | Tested frequency |
|---|------------------------|------------------|
| 6dB Bandwidth,<br>99% Occupied Bandwidth,<br>Maximum Peak Output Power,<br>Power Density,<br>Spurious Emission (Conducted / Radiated) | Transmitting mode (Tx) | 922.8 MHz        |

#### 4.2 Configuration and peripherals

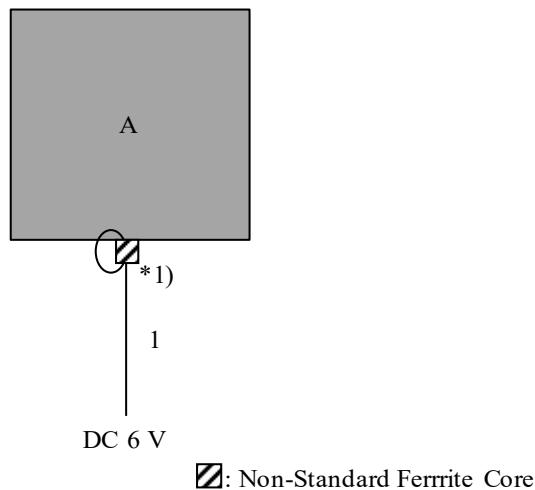

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.  
Ferrite core was used to curb the influence of the DC power supply.  
It was confirmed that there was no effect on the radio characteristics.

##### Description of EUT

| No. | Item               | Model number | Serial number | Manufacturer    | Remarks |
|-----|--------------------|--------------|---------------|-----------------|---------|
| A   | Remote Transmitter | PZ170-23721  | 4             | FALTEC CO.,LTD. | EUT     |

##### List of cables used

| No. | Name     | Length (m) | Shield     |            | Remarks |
|-----|----------|------------|------------|------------|---------|
|     |          |            | Cable      | Connector  |         |
| 1   | DC Cable | 2.0        | Unshielded | Unshielded | -       |

##### <Notes for Ferrite cores>

\*1) 1 Ferrite Core, Model No. E04SR150718 (Manufacturer: SEIWA), directly connected to A, 2 turns

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated Spurious Emission**

### **Test Procedure**

It was measured based on "8.5 and 8.6 of KDB 558074 D01 15.247 Meas Guidance v05r02".

[For below 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

### **Test Antennas are used as below:**

| Frequency    | 30 MHz to 200 MHz | 200 MHz to 1 GHz | Above 1 GHz |
|--------------|-------------------|------------------|-------------|
| Antenna Type | Biconical         | Logperiodic      | Horn        |

In any 100 kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

**20 dBc was applied to the frequency over the limit of FCC 15.209 / Table 4 of RSS-Gen 8.9(ISED) and outside the restricted band of FCC15.205 / Table 6 of RSS-Gen 8.10 (ISED).**

| Frequency       | Below 1 GHz   | Above 1 GHz              |   | 20 dBc                       |
|-----------------|---------------|--------------------------|---|------------------------------|
| Instrument used | Test Receiver | Spectrum Analyzer        |   | Spectrum Analyzer            |
| Detector        | QP            | PK                       | AV *1)  | PK                           |
| IF Bandwidth    | BW 120 kHz    | RBW: 1 MHz<br>VBW: 3 MHz | <u>11.12.2.5.1</u><br>RBW: 1 MHz<br>VBW: 3 MHz<br>Detector:<br>Power Averaging (RMS)<br>Trace: 100 traces<br><u>11.12.2.5.2</u><br>The duty cycle was less<br>than 98% for detected<br>noise, a duty factor was<br>added to the 11.12.2.5.1<br>results. | RBW: 100 kHz<br>VBW: 300 kHz |

\*1) Average Power Measurement was performed based on ANSI C63.10-2013.

---

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

## Figure 2: Test Setup

Below 1 GHz

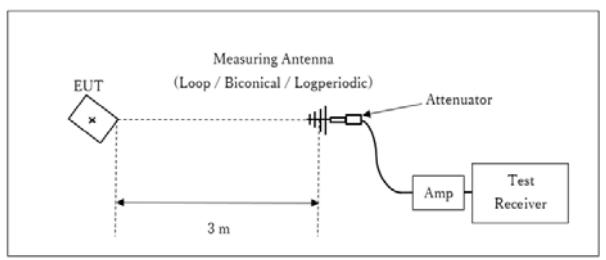

1 GHz - 10 GHz

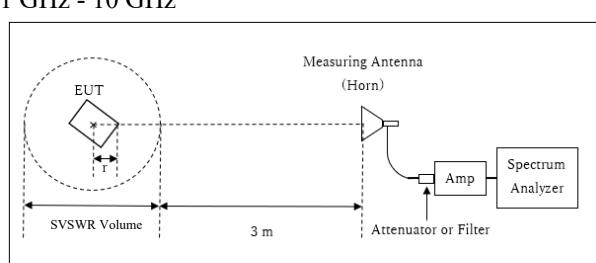

- The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement range** : 30 MHz - 10 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
 Telephone : +81 596 24 8999  
 Facsimile : +81 596 24 8124

## SECTION 6: Antenna Terminal Conducted Tests

### Test Procedure

The tests were made with below setting connected to the antenna port.

| Test                                | Span                                    | RBW               | VBW                | Sweep time | Detector         | Trace    | Instrument used                 |
|-------------------------------------|---|-------------------|--------------------|------------|------------------|----------|---------------------------------|
| 6dB Bandwidth                       | 3 MHz                                   | 100 kHz           | 300 kHz            | Auto       | Peak             | Max Hold | Spectrum Analyzer               |
| 99% Occupied Bandwidth *1)          | Enough width to display emission skirts | 1 to 5 % of OBW   | Three times of RBW | Auto       | Peak             | Max Hold | Spectrum Analyzer               |
| Maximum Peak Output Power           | -                                       | -                 | -                  | Auto       | Peak/Average *2) | -        | Power Meter (Sensor: 50 MHz BW) |
| Peak Power Density                  | 1.5 times the 6dB Bandwidth             | 3 kHz             | 10 kHz             | Auto       | Peak             | Max Hold | Spectrum Analyzer *3)           |
| Conducted Spurious Emission *4) *5) | 9kHz to 150kHz<br>150kHz to 30MHz       | 200 Hz<br>9.1 kHz | 620 Hz<br>27 kHz   | Auto       | Peak             | Max Hold | Spectrum Analyzer               |

\*1) Peak hold was applied as Worst-case measurement.  
 \*2) Reference data  
 \*3) Section 11.10.2 Method PKPSD (peak PSD) of "ANSI C63.10-2013".  
 \*4) In the frequency range below 30MHz, RBW was narrowed to separate the noise contents.  
 Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.  
 (9 kHz - 150 kHz: RBW = 200 Hz, 150 kHz - 30 MHz: RBW = 9.1 kHz)  
 \*5) The limits in CFR 47, Part 15, Subpart C, paragraph 15.209(a), are identical to those in RSS-Gen section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377 Ohmes. For example, the measurement at frequency 9 kHz resulted in a level of 45.5 dBuV/m, which is equivalent to  $45.5 - 51.5 = -6.0$  dBuA/m, which has the same margin, 3 dB, to the corresponding RSS-Gen Table 6 limit as it has to 15.209(a) limit.

The test results and limit are rounded off to two decimals place, so some differences might be observed.  
 The equipment and cables were not used for factor 0 dB of the data sheets.

**Test data : APPENDIX**  
**Test result : Pass**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999


Facsimile : +81 596 24 8124

## APPENDIX 1: Test data

### 99 % Occupied Bandwidth and 6 dB Bandwidth

Report No. 14010071H  
 Test place Ise EMC Lab. No.5 Measurement Room  
 Date September 15, 2021  
 Temperature / Humidity 23 deg. C / 52 % RH  
 Engineer Ken Fujita  
 Mode Tx

| Mode | Frequency<br>[MHz] | 99 % Occupied<br>Bandwidth<br>[kHz] | 6 dB Bandwidth<br>[kHz] | Limit for<br>6 dB Bandwidth<br>[kHz] |
|------|--------------------|-------------------------------------|-------------------------|--------------------------------------|
| Tx   | 922.8              | 620.1917                            | 767.577                 | > 500                                |

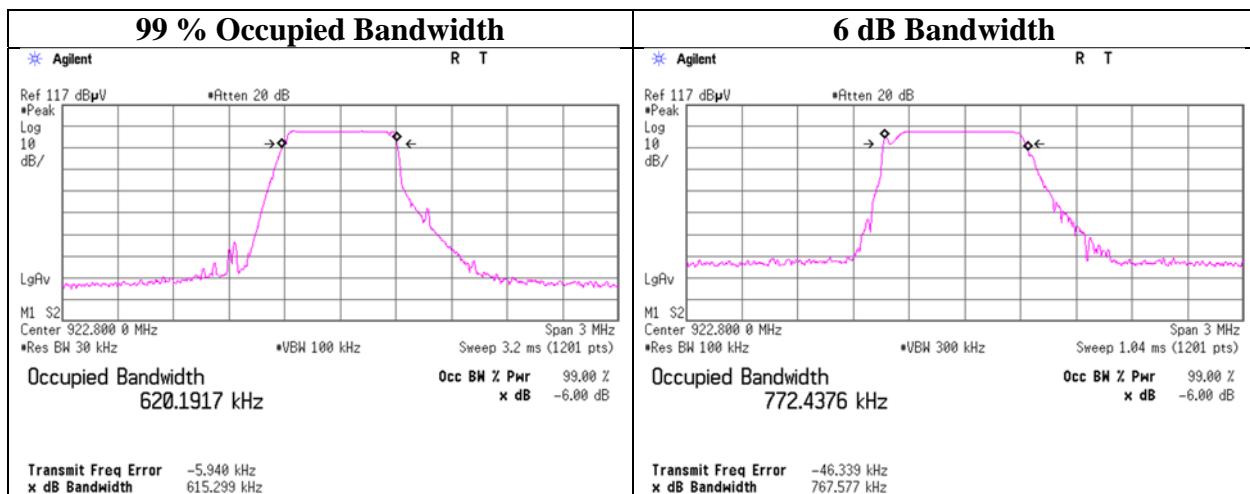

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Maximum Peak Output Power

Report No. 14010071H  
Test place Ise EMC Lab. No.5 Measurement Room  
Date September 15, 2021  
Temperature / Humidity 23 deg. C / 52 % RH  
Engineer Ken Fujita  
Mode Tx

| Freq.<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Conducted Power |      |       |      | Antenna<br>Gain<br>[dBi] | e.i.r.p. for RSS-247 |        |      |       |      |       |
|----------------|------------------|-----------------------|------------------------|-----------------|------|-------|------|--------------------------|----------------------|--------|------|-------|------|-------|
|                |                  |                       |                        | Result          |      | Limit |      |                          | Margin<br>[dB]       | Result |      | Limit |      |       |
|                |                  |                       |                        | [dBm]           | [mW] | [dBm] | [mW] |                          |                      | [dBm]  | [mW] | [dBm] | [mW] |       |
| 922.8          | -1.06            | 0.83                  | 9.79                   | 9.56            | 9.04 | 30.00 | 1000 | 20.44                    | 0.00                 | 9.56   | 9.04 | 36.02 | 4000 | 26.46 |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

e.i.r.p. Result = Conducted Power Result + Antenna Gain

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Average Output Power (Reference data for RF Exposure)

Report No. 14010071H  
Test place Ise EMC Lab. No.5 Measurement Room  
Date September 15, 2021  
Temperature / Humidity 23 deg. C / 52 % RH  
Engineer Ken Fujita  
Mode Tx

| Freq.<br>[MHz] | Reading<br>[dBm] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Result<br>(Time average) |      | Duty<br>factor<br>[dB] | Result<br>(Burst power average) |      |
|----------------|------------------|-----------------------|------------------------|--------------------------|------|------------------------|---------------------------------|------|
|                |                  |                       |                        | [dBm]                    | [mW] |                        | [dBm]                           | [mW] |
| 922.8          | -1.15            | 0.83                  | 9.79                   | 9.47                     | 8.85 | 0.00                   | 9.47                            | 8.85 |


Sample Calculation:

Result (Time average) = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

Result (Burst power average) = Time average + Duty factor

### Burst rate confirmation

Report No. 14010071H  
Test place Ise EMC Lab. No.5 Measurement Room  
Date September 15, 2021  
Temperature / Humidity 23 deg. C / 52 % RH  
Engineer Ken Fujita  
Mode Tx

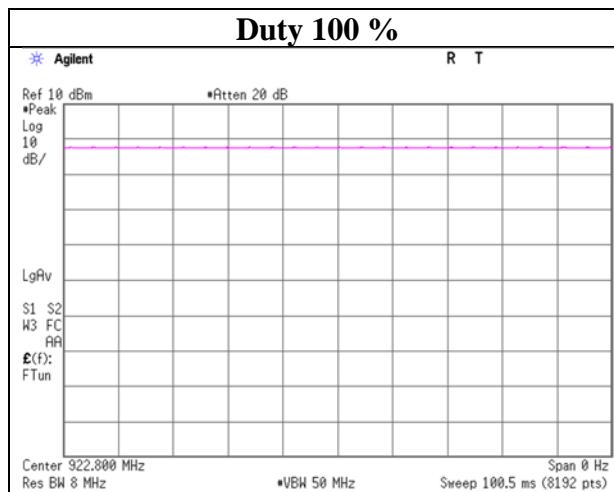

## Radiated Spurious Emission

Report No. 14010071H  
 Test place Ise EMC Lab.  
 Semi Anechoic Chamber No.4  
 Date June 23, 2021 August 25, 2021  
 Temperature / Humidity 23 deg. C / 54 % RH 22 deg. C / 61 % RH  
 Engineer Kiyoshiro Okazaki Hiroki Numata  
 (Above 1 GHz) (Below 1GHz)  
 Mode Tx

| Polarity    | Frequency | Reading (QP / PK) | Reading (AV) | Ant. Factor | Loss | Gain | Duty Factor | Result (QP / PK) | Result (AV) | Limit (QP / PK) | Limit (AV) | Margin (QP / PK) | Margin (AV) | Remark      |
|-------------|-----------|-------------------|--------------|-------------|------|------|-------------|------------------|-------------|-----------------|------------|------------------|-------------|-------------|
| [Hori/Vert] | [MHz]     | [dBuV]            | [dBuV]       | [dB/m]      | [dB] | [dB] | [dB]        | [dBuV/m]         | [dBuV/m]    | [dBuV/m]        | [dBuV/m]   | [dB]             | [dB]        |             |
| Hori.       | 30.7      | 23.7              | -            | 18.1        | 7.1  | 32.0 | -           | 16.9             | -           | 40.0            | -          | 23.1             | -           |             |
| Hori.       | 102.6     | 22.4              | -            | 10.5        | 8.0  | 32.0 | -           | 8.9              | -           | 43.5            | -          | 34.6             | -           |             |
| Hori.       | 479.4     | 24.8              | -            | 17.2        | 10.6 | 32.0 | -           | 20.6             | -           | 46.0            | -          | 25.4             | -           |             |
| Hori.       | 721.3     | 26.8              | -            | 20.0        | 11.7 | 32.1 | -           | 26.5             | -           | 46.0            | -          | 19.6             | -           |             |
| Hori.       | 824.1     | 22.1              | -            | 20.8        | 12.1 | 31.6 | -           | 23.4             | -           | 46.0            | -          | 22.6             | -           |             |
| Hori.       | 892.8     | 22.0              | -            | 21.9        | 12.3 | 31.2 | -           | 25.0             | -           | 46.0            | -          | 21.0             | -           |             |
| Hori.       | 2768.4    | 50.0              | 46.0         | 28.4        | 5.9  | 31.7 | -           | 52.6             | 48.6        | 73.9            | 53.9       | 21.3             | 5.4         |             |
| Hori.       | 3691.2    | 52.5              | 48.6         | 29.2        | 6.3  | 31.4 | -           | 56.6             | 52.7        | 73.9            | 53.9       | 17.4             | 1.2         |             |
| Hori.       | 4614.0    | 44.0              | 37.1         | 31.2        | 6.8  | 31.2 | -           | 50.8             | 43.9        | 73.9            | 53.9       | 23.1             | 10.0        |             |
| Hori.       | 7382.4    | 42.2              | 33.4         | 36.4        | 8.0  | 32.5 | -           | 54.1             | 45.2        | 73.9            | 53.9       | 19.8             | 8.7         | Floor noise |
| Hori.       | 8305.2    | 41.7              | 33.3         | 36.3        | 8.2  | 32.6 | -           | 53.7             | 45.2        | 73.9            | 53.9       | 20.2             | 8.7         | Floor noise |
| Vert.       | 30.7      | 24.5              | -            | 18.1        | 7.1  | 32.0 | -           | 17.7             | -           | 40.0            | -          | 22.3             | -           |             |
| Vert.       | 102.6     | 22.5              | -            | 10.5        | 8.0  | 32.0 | -           | 9.0              | -           | 43.5            | -          | 34.5             | -           |             |
| Vert.       | 479.4     | 24.8              | -            | 17.2        | 10.6 | 32.0 | -           | 20.6             | -           | 46.0            | -          | 25.4             | -           |             |
| Vert.       | 721.3     | 27.2              | -            | 20.0        | 11.7 | 32.1 | -           | 26.9             | -           | 46.0            | -          | 19.2             | -           |             |
| Vert.       | 824.1     | 22.2              | -            | 20.8        | 12.1 | 31.6 | -           | 23.5             | -           | 46.0            | -          | 22.5             | -           |             |
| Vert.       | 892.8     | 22.0              | -            | 21.9        | 12.3 | 31.2 | -           | 25.0             | -           | 46.0            | -          | 21.0             | -           |             |
| Vert.       | 2768.4    | 52.0              | 48.1         | 28.4        | 5.9  | 31.7 | -           | 54.5             | 50.6        | 73.9            | 53.9       | 19.4             | 3.3         |             |
| Vert.       | 3691.2    | 51.3              | 47.2         | 29.2        | 6.3  | 31.4 | -           | 55.4             | 51.3        | 73.9            | 53.9       | 18.5             | 2.6         |             |
| Vert.       | 4614.0    | 42.1              | 33.9         | 31.2        | 6.8  | 31.2 | -           | 48.9             | 40.6        | 73.9            | 53.9       | 25.1             | 13.3        |             |
| Vert.       | 7382.4    | 40.8              | 33.0         | 36.4        | 8.0  | 32.5 | -           | 52.7             | 44.9        | 73.9            | 53.9       | 21.2             | 9.0         | Floor noise |
| Vert.       | 8305.2    | 41.0              | 33.3         | 36.3        | 8.2  | 32.6 | -           | 52.9             | 45.2        | 73.9            | 53.9       | 21.0             | 8.7         | Floor noise |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

\*QP detector was used up to 1GHz.

Distance factor: 1 GHz - 10 GHz  $20\log(4 \text{ m} / 3.0 \text{ m}) = 2.5 \text{ dB}$

### 20dBc Data Sheet

| Polarity    | Frequency | Reading (PK) | Ant Factor | Loss | Gain | Result   | Limit    | Margin | Remark  |
|-------------|-----------|--------------|------------|------|------|----------|----------|--------|---------|
| [Hori/Vert] | [MHz]     | [dBuV]       | [dB/m]     | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dB]   |         |
| Hori.       | 922.8     | 103.3        | 22.0       | 12.5 | 31.1 | 106.6    | -        | -      | Carrier |
| Hori.       | 902.0     | 29.3         | 21.9       | 12.4 | 31.2 | 32.4     | 86.6     | 54.2   |         |
| Hori.       | 928.0     | 29.8         | 21.9       | 12.5 | 31.0 | 33.2     | 86.6     | 53.5   |         |
| Hori.       | 1845.6    | 59.1         | 25.4       | 5.4  | 32.4 | 57.5     | 86.6     | 29.2   |         |
| Hori.       | 5536.8    | 35.3         | 32.2       | 7.3  | 31.3 | 43.5     | 86.6     | 43.1   |         |
| Hori.       | 6459.6    | 39.0         | 34.0       | 7.7  | 31.8 | 48.9     | 86.6     | 37.7   |         |
| Hori.       | 9228.0    | 36.8         | 37.8       | 8.5  | 32.4 | 50.6     | 86.6     | 36.0   |         |
| Vert.       | 922.8     | 101.0        | 22.0       | 12.5 | 31.1 | 104.3    | -        | -      | Carrier |
| Vert.       | 902.0     | 29.6         | 21.9       | 12.4 | 31.2 | 32.7     | 84.3     | 51.6   |         |
| Vert.       | 928.0     | 30.0         | 21.9       | 12.5 | 31.0 | 33.4     | 84.3     | 51.0   |         |
| Vert.       | 1845.6    | 59.8         | 25.4       | 5.4  | 32.4 | 58.2     | 84.3     | 26.2   |         |
| Vert.       | 5536.8    | 35.5         | 32.2       | 7.3  | 31.3 | 43.7     | 84.3     | 40.6   |         |
| Vert.       | 6459.6    | 35.7         | 34.0       | 7.7  | 31.8 | 45.6     | 84.3     | 38.7   |         |
| Vert.       | 9228.0    | 34.3         | 37.8       | 8.5  | 32.4 | 48.2     | 84.3     | 36.2   |         |

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

Distance factor: 1 GHz - 10 GHz  $20\log(4 \text{ m} / 3.0 \text{ m}) = 2.5 \text{ dB}$

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Faxsimile : +81 596 24 8124

## Radiated Spurious Emission (Reference Plot for band-edge)

Report No. 14010071H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.4  
Date August 25, 2021  
Temperature / Humidity 22 deg. C / 61 % RH  
Engineer Hiroki Numata  
Mode Tx 922.8 MHz

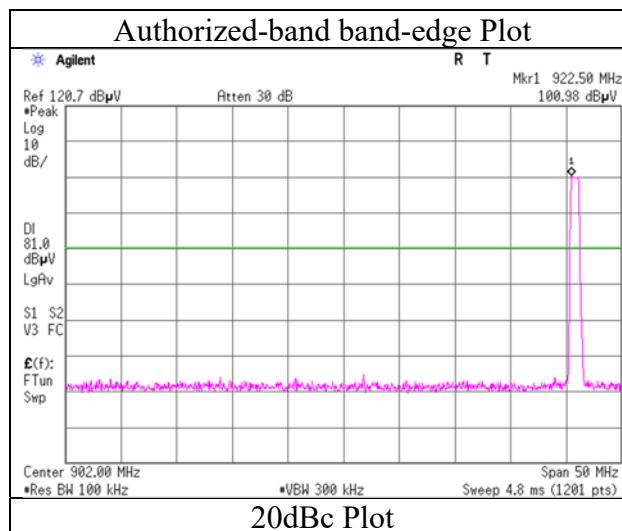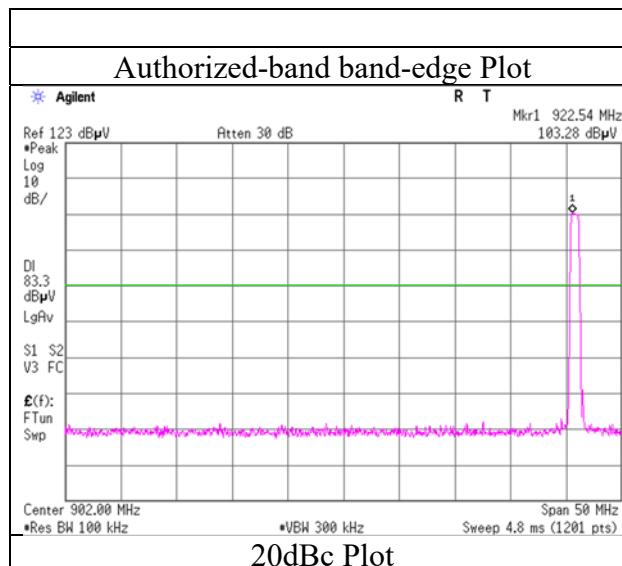


\* The measurement was conducted for a sufficiently long enough time to detect any possible spurious emissions.  
Final result of restricted band edge was shown in tabular data.

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

## Radiated Spurious Emission (Plot data, Worst case)

Report No. 14010071H  
 Test place Ise EMC Lab.  
 Semi Anechoic Chamber No.4  
 Date June 23, 2021 August 25, 2021  
 Temperature / Humidity 23 deg. C / 54 % RH 22 deg. C / 61 % RH  
 Engineer Kiyoshiro Okazaki Hiroki Numata  
 (Above 1 GHz) (Below 1GHz)  
 Mode Tx

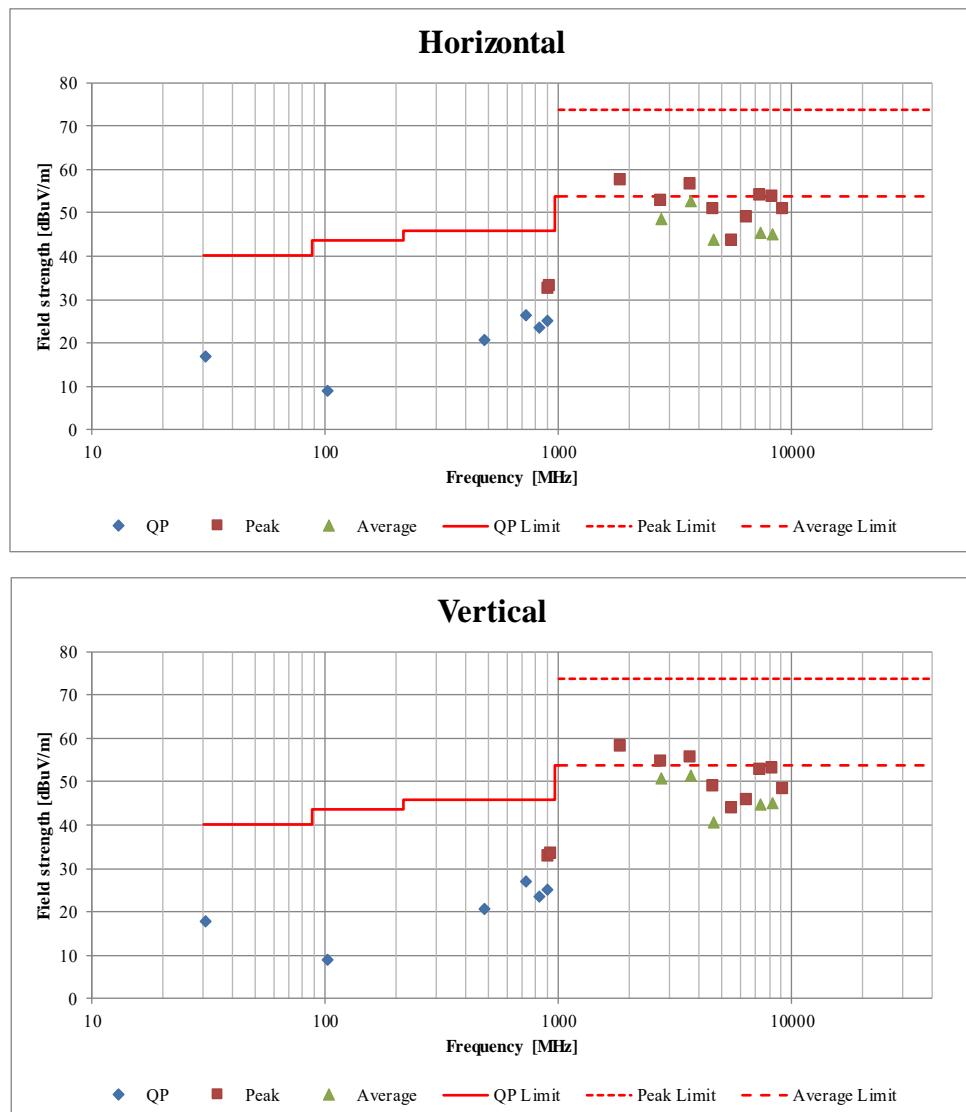

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Conducted Spurious Emission

Report No. 14010071H  
 Test place Ise EMC Lab. No.5 Measurement Room  
 Date September 15, 2021  
 Temperature / Humidity 23 deg. C / 52 % RH  
 Engineer Ken Fujita  
 Mode Tx

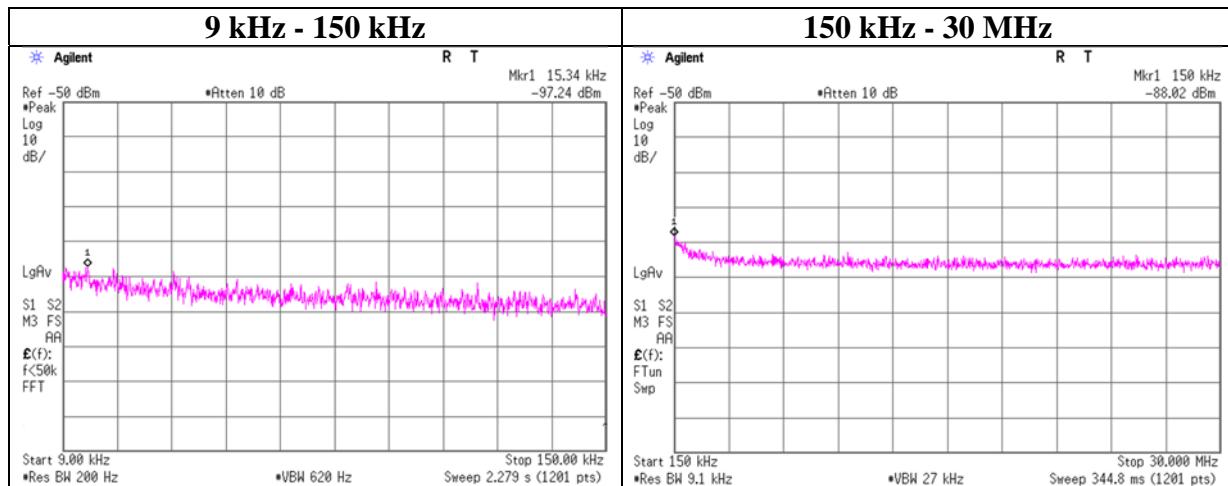

| Frequency [kHz] | Reading [dBm] | Cable Loss [dB] | Attenuator Loss [dB] | Antenna Gain* [dBi] | N (Number of Output) | EIRP [dBm] | Distance [m] | Ground bounce [dB] | E (field strength) [dBuV/m] | Limit [dBuV/m] | Margin [dB] | Remark |
|-----------------|---------------|-----------------|----------------------|---------------------|----------------------|------------|--------------|--------------------|-----------------------------|----------------|-------------|--------|
| 15.34           | -97.2         | 0.00            | 9.7                  | 2.0                 | 1                    | -85.6      | 300          | 6.0                | -24.3                       | 43.8           | 68.1        |        |
| 150.00          | -88.0         | 0.01            | 9.7                  | 2.0                 | 1                    | -76.3      | 300          | 6.0                | -15.1                       | 24.0           | 39.1        |        |

E [dBuV/m] = EIRP [dBm] - 20 log (Distance [m]) + Ground bounce [dB] + 104.8 [dBuV/m]

EIRP[dBm] = Reading [dBm] + Cable loss [dB] + Attenuator Loss [dB] + Antenna gain [dBi] + 10 \* log (N)

N: Number of output

\*2.0 dBi was applied to the test result based on ANSI C63.10 since antenna gain was less than 2.0 dBi.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


## Power Density

Report No. 14010071H  
Test place Ise EMC Lab. No.5 Measurement Room  
Date September 15, 2021  
Temperature / Humidity 23 deg. C / 52 % RH  
Engineer Ken Fujita  
Mode Tx

| Freq.<br>[MHz] | Reading<br>[dBm / 3 kHz] | Cable<br>Loss<br>[dB] | Atten.<br>Loss<br>[dB] | Result<br>[dBm / 3 kHz] | Limit<br>[dBm / 3 kHz] | Margin<br>[dB] |
|----------------|--------------------------|-----------------------|------------------------|-------------------------|------------------------|----------------|
| 922.80         | -7.02                    | 0.83                  | 9.79                   | 3.60                    | 8.00                   | 4.40           |

Sample Calculation:

Result = Reading + Cable Loss (including the cable(s) customer supplied) + Attenuator Loss

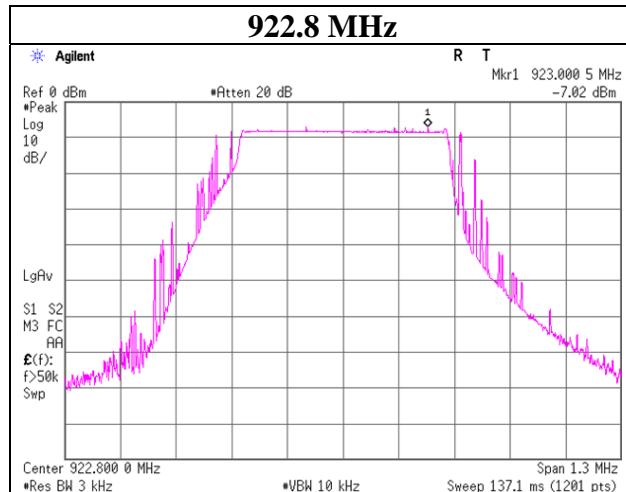

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## APPENDIX 2: Test instruments

### Test equipment

| Test Item | Local ID      | LIMS ID | Description                         | Manufacturer                             | Model                    | Serial                        | Last Calibration Date | Cal Int |
|-----------|---------------|---------|-------------------------------------|--|--------------------------|-------------------------------|-----------------------|---------|
| RE        | MTR-03        | 141942  | Test Receiver                       | Rohde & Schwarz                          | ESCI                     | 100300                        | 08/05/2021            | 12      |
| RE        | MAEC-04       | 142011  | AC4_Semi Anechoic Chamber(NSA)      | TDK                                      | Semi Anechoic Chamber 3m | DA-10005                      | 05/25/2020            | 24      |
| RE        | MOS-15        | 141562  | Thermo-Hygrometer                   | CUSTOM. Inc                              | CTH-201                  | 0010                          | 01/15/2021            | 12      |
| RE        | MMM-10        | 141545  | DIGITAL HiTESTER                    | HIOKI E.E. CORPORATION                   | 3805                     | 51201148                      | 01/07/2021            | 12      |
| RE        | MJM-29        | 142230  | Measure                             | KOMELON                                  | KMC-36                   | -                             | -                     | -       |
| RE        | COTS-MEMI-02  | 178648  | EMI measurement program             | TSJ (Techno Science Japan)               | TEPTO-DV                 | -                             | -                     | -       |
| RE        | MAT-34        | 141331  | Attenuator(6dB)                     | TME                                      | UFA-01                   | -                             | 02/02/2021            | 12      |
| RE        | MBA-05        | 141425  | Biconical Antenna                   | Schwarzbeck Mess-Elektronik OHG          | VHA9103+BBA9106          | VHA 91031302                  | 08/28/2021            | 12      |
| RE        | MCC-50        | 141397  | Coaxial Cable                       | UL Japan                                 | -                        | -                             | 11/06/2020            | 12      |
| RE        | MLA-23        | 141267  | Logperiodic Antenna (200-1000MHz)   | Schwarzbeck Mess-Elektronik OHG          | VUSLP9111B               | 9111B-192                     | 08/28/2021            | 12      |
| RE        | MPA-14        | 141583  | Pre Amplifier                       | SONOMA INSTRUMENT                        | 310                      | 260833                        | 02/18/2021            | 12      |
| RE        | MSA-15        | 141902  | Spectrum Analyzer                   | Keysight Technologies Inc                | E4440A                   | MY46187105                    | 10/15/2020            | 12      |
| RE        | MCC-217       | 141393  | Microwave Cable                     | Junkosha                                 | MWX221                   | 1604S254(1 m) / 1608S088(5 m) | 08/04/2021            | 12      |
| RE        | MCC-178       | 141227  | Microwave Cable                     | Junkosha                                 | MMX221-00500DMSDMS       | 1502S305                      | 03/01/2021            | 12      |
| RE        | MHF-04        | 141403  | High Pass Filter 1.22-4.60GHz       | Mini-Circuits                            | VHF-1200                 | 10435                         | 08/18/2021            | 12      |
| RE        | MHF-27        | 141297  | High Pass Filter(1.1-10GHz)         | TOKYO KEIKI                              | TF219CD1                 | 1001                          | 01/14/2021            | 12      |
| RE        | MRF-12        | 192072  | Band Rejection Filter(902-928MHz)   | Wakoh Communication Industrial Co., Ltd. | WFR-481                  | 19122541                      | 03/04/2021            | 12      |
| RE        | MPA-12        | 141581  | MicroWave System Amplifier          | Keysight Technologies Inc                | 83017A                   | 00650                         | 10/19/2020            | 12      |
| RE        | MHA-21        | 141508  | Horn Antenna 1-18GHz                | Schwarzbeck Mess-Elektronik OHG          | BBHA9120D                | 557                           | 05/10/2021            | 12      |
| RE        | MAEC-04-SVSWR | 142017  | AC4_Semi Anechoic Chamber(SVSWR)    | TDK                                      | Semi Anechoic Chamber 3m | DA-10005                      | 04/12/2021            | 24      |
| AT        | MOS-14        | 141561  | Thermo-Hygrometer                   | CUSTOM. Inc                              | CTH-201                  | 1401                          | 01/15/2021            | 12      |
| AT        | MMM-18        | 141558  | Digital Tester(TRUE RMS MULTIMETER) | Fluke Corporation                        | 115                      | 17930030                      | 05/24/2021            | 12      |
| AT        | MSA-03        | 141884  | Spectrum Analyzer                   | Keysight Technologies Inc                | E4448A                   | MY44020357                    | 03/10/2021            | 12      |
| AT        | MPM-13        | 141810  | Power Meter                         | Anritsu Corporation                      | ML2495A                  | 824014                        | 12/14/2020            | 12      |
| AT        | MCC-176       | 141279  | Microwave Cable                     | Junkosha                                 | MMX221-00500DMSDMS       | 1502S303                      | 03/01/2021            | 12      |
| AT        | MAT-26        | 141244  | Attenuator(10dB)                    | Weinschel - API Technologies Corp        | WA8-10-34                | A198                          | 02/24/2021            | 12      |

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

### Test item:

**RE: Radiated Emission test**

**AT: Antenna Terminal Conducted test**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Faxsimile : +81 596 24 8124