

FCC 47 CFR PART 15 SUBPART C

Product Type : Wireless Aluminum Keypad

Applicant : Matias Corporation

Address : 221 Narinia Cres. Newmarket, Ontario, L3X 2E1, Canada

Trade Name : matias

Model Number : FK401, FK401B, FK401-EU, FK401B-EU, FK401X-XX, where X is letters from A to Z
OWCKPA28BTW, OWCKPA28BTB, OWCKPA28BTWEU,
OWCKPA28BTBEU, OWCKPA28BTXXX, where X is letters from A to Z

Test Specification : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
ANSI C63.4:2009

Receive Date : May 14, 2014

Test Period : May 28~Jun. 18, 2014

Issue Date : Jul. 16, 2014

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Note: This report shall not be reproduced except in full, without the written approval of A Test Lab Techno Corp. This document may be altered or revised by A Test Lab Techno Corp. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, or any government agencies. The test results in the report only apply to the tested sample.

Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jul. 11, 2014	Initial Issue	
01	Jul. 16, 2014	Revised report information.	Joyce Liao

Verification of Compliance

Issued Date: 07/16/2014

Product Type : Wireless Aluminum Keypad
Applicant : Matias Corporation
Address : 221 Narinia Cres. Newmarket, Ontario, L3X 2E1, Canada
Trade Name : matias
Model Number : FK401, FK401B, FK401-EU, FK401B-EU, FK401X-XX, where X is letters from A to Z
OWCKPA28BTW, OWCKPA28BTB, OWCKPA28BTWEU, OWCKPA28BTBEU, OWCKPA28BTXXX, where X is letters from A to Z
FCC ID : WKMOWCKPA28BT
EUT Rated Voltage : DC 3.0V
Test Voltage : AC 120V/60Hz
Applicable Standard : FCC 47 CFR PART 15 SUBPART C: Oct., 2013
ANSI C63.4:2009
Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade City,
Taoyuan County 334, Taiwan R.O.C.
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330
<http://www.atl-lab.com.tw/e-index.htm>



The above equipment was tested by A Test Lab Techno Corp. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2009 and the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247 .

The test results of this report relate only to the tested sample identified in this report.

Approved By

: Fly Lu

(Manager)

Reviewed By

: Eric Ou Yang

(Testing Engineer)

(Fly Lu)

TABLE OF CONTENTS

1	General Information.....	6
1.1.	Summary of Test Result	6
1.2.	Measurement Uncertainty	6
2	EUT Description	7
3	Test Methodology	8
3.1.	Mode of Operation	8
3.2.	EUT Exercise Software	8
3.3.	Configuration of Test System Details	9
3.4.	Test Site Environment	9
4	Maximum Conducted Output Power Measurement	10
4.1.	Limit.....	10
4.2.	Test Setup	10
4.3.	Test Instruments	10
4.4.	Test Procedure	10
4.5.	Test Result	11
5	Conducted Emission Measurement.....	12
5.1.	Limit.....	12
5.2.	Test Instruments	12
5.3.	Test Setup	12
5.4.	Test Procedure	13
5.5.	Test Result	13
6	Radiated Interference Measurement.....	14
6.1.	Limit.....	14
6.2.	Test Instruments	14
6.3.	Setup	15
6.4.	Test Procedure	16
6.5.	Test Result	17
7	20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement.....	20
7.1.	Limit.....	20
7.2.	Test Setup	20
7.3.	Test Instruments	20
7.4.	Test Procedure	20
7.5.	Test Result	21
7.6.	Test Graphs.....	22

8	Carrier Frequency Separation Measurement	23
8.1.	Limit.....	23
8.2.	Test Setup	23
8.3.	Test Instruments	23
8.4.	Test Procedure	23
8.5.	Test Result	24
8.6.	Test Graphs	25
9	Number of Hopping Measurement	26
9.1.	Limit.....	26
9.2.	Test Setup	26
9.3.	Test Instruments	26
9.4.	Test Procedure	26
9.5.	Test Result	27
9.6.	Test Graphs	28
10	Time of Occupancy (Dwell Time) Measurement	29
10.1.	Limit.....	29
10.2.	Test Setup	29
10.3.	Test Instruments	29
10.4.	Test Procedure	29
10.5.	Test Result	30
10.6.	Test Graphs	31
11	Out of Band Conducted Emissions Measurement	32
11.1.	Limit.....	32
11.2.	Test Setup	32
11.3.	Test Instruments	32
11.4.	Test Procedure	32
11.5.	Test Graphs	33
12	Band Edges Measurement	35
12.1.	Limit.....	35
12.2.	Test Setup	35
12.3.	Test Instruments	35
12.4.	Test Procedure	36
12.5.	Test Result	37
13	Antenna Measurement	39
13.1.	Limit.....	39
13.2.	Antenna Connector Construction	39

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.247			
15.207	AC Power Conducted Emission	N/A	This device power is supplied by DC source.
Standard	Item	Result	Remark
15.247			
15.247(b)(1)	Max. Output Power	PASS	-----
15.247(d)	Transmitter Radiated Emissions	PASS	-----
15.247(a)(1)	20dB RF Bandwidth	PASS	-----
15.247(a)(1)	Carrier Frequency Separation	PASS	-----
15.247(a)(1)(iii)	Number of Hopping	PASS	-----
15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	PASS	-----
15.247(d)	Out of Band Conducted Spurious Emission	PASS	-----
15.247(d)	Band Edge Measurement	PASS	-----
-	Occupied Bandwidth Measurement	PASS	-----
15.203	Antenna Requirement	PASS	-----

The test results of this report relate only to the tested sample(s) identified in this report. Manufacturer or whom it may concern should recognize the pass or fail of the test result.

1.2. Measurement Uncertainty

Test Item	Frequency Range		Uncertainty (dB)
Conducted Emission	9kHz ~ 30MHz		± 2.02
Radiated Emission	30MHz ~ 1000MHz	Horizontal	± 3.98
		Vertical	± 3.62
	1000MHz ~ 18000MHz	Horizontal	± 3.11
		Vertical	± 3.07
	18000MHz ~ 40000MHz	Horizontal	± 3.66
		Vertical	± 3.54

2 EUT Description

Product	Wireless Aluminum Keypad
Trade Name	matias
Model Number	FK401, FK401B, FK401-EU, FK401B-EU, FK401X-XX, where X is letters from A to Z OWCKPA28BTW, OWCKPA28BTB, OWCKPA28BTWEU, OWCKPA28BTBEU, OWCKPA28BTXXX, where X is letters from A to Z
Model Different Description	Those model numbers differ from each other in selling region.
Applicant	Matias Corporation 221 Narinia Cres. Newmarket, Ontario, L3X 2E1, Canada
Manufacturer	Lita Electronics Technology Co., Ltd. No.6, Kun Ming Road, Yao Le Village, Liaobu Town, Dongguan City, Guangdong Province, China Post Code: 523418
FCC ID	WKMOWCKPA28BT
Frequency Range	2402 ~ 2480 MHz
Modulation Type	GFSK for 1Mbps
Antenna Type	PCB Antenna
Antenna Gain	2.78 dBi
RF Output Power (Conducted)	GFSK for 1Mbps -2.71 dBm / 0.0005 W
99 % Occupied Bandwidth	GFSK: 0.94MHz

3 Test Methodology

3.1. Mode of Operation

Decision of Test ATL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: Normal Operation Mode
Mode 2: GFSK Link Mode

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Description of Test Modes

Preliminary tests were performed in different modulation to find the worst case. The modulation has shown the worst-case in section 6.5. Investigation has been done on all the possible configurations for searching the worst cases.

Tested System Details


The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model Number	Serial Number	Power Cord
1.	Bluetooth Tester	R & S	CBT	100350	NA

3.2. EUT Exercise Software

1	Setup the EUT and Bluetooth Tester (CBT) as shown on 3.3.
2	Turn on the power of all equipment.
3	EUT run test program.
4	Open Bluetooth function link to CBT.

3.3. Configuration of Test System Details

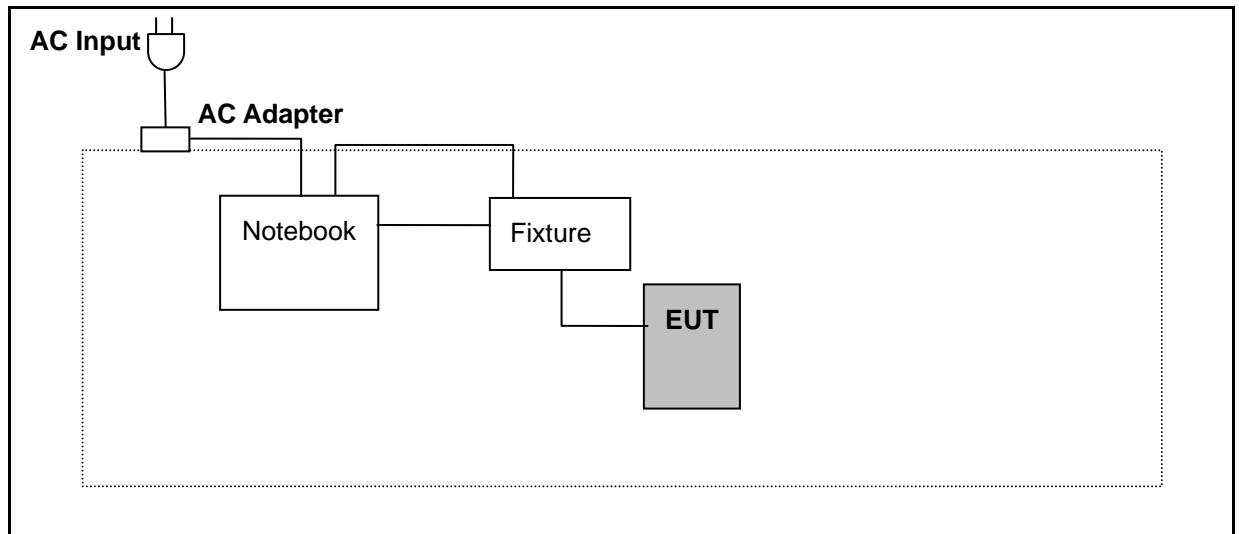

3.4. Test Site Environment


Items	Required (IEC 60068-1)	Actual
Temperature (°C)	15-35	26
Humidity (%RH)	25-75	60
Barometric pressure (mbar)	860-1060	950

4 Maximum Conducted Output Power Measurement

4.1. Limit

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels < 1 watt.

4.2. Test Setup

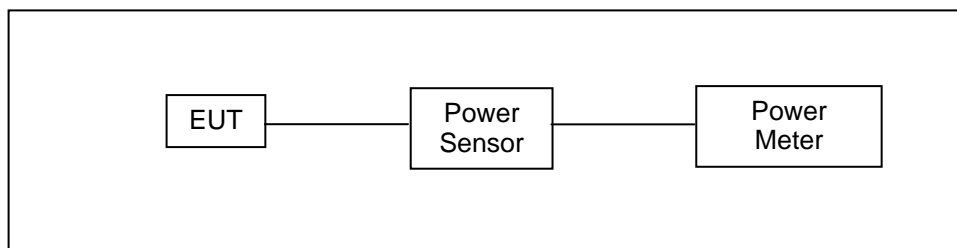

4.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Single Channel PK Power Sensor	Agilent	N1911A	MY45101619	12/21/2013	(1)
Wideband Power Meter	Agilent	N1921A	MY45241957	12/21/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

4.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The tests below are run with the EUT's transmitter set at high power in TX mode. The EUT is needed to force selection of output power level and channel number. While testing, EUT was set to transmit continuously. Remove the Subjective device's antenna and connect the RF output port to power sensor. The maximum peak output power shall not exceed 1 watt.

Use a direct connection between the antenna port of transmitter and the power sensor, for prevent the power sensor input attenuation 40-50 dB. Set the RBW Bandwidth of the emission or use a channel power meter mode. For antennas with gains of 6 dBi or less, maximum allowed transmitter output is 1 watt (+30 dBm). For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6)/3 dBm. The antenna port of the EUT was connected to the input of a power sensor. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.

4.5. Test Result

Model Number	OWCKPA28BTW					
Test Item	Maximum Conducted Output Power					
Test Mode	Mode 2: GFSK Link Mode					
Date of Test	05/28/2014			Test Site	TE02	
Frequency (MHz)	Packet Type	Average Power		Peak Power		Limit (W)
		(dBm)	(W)	(dBm)	(W)	
2402	DH1	-3.02	0.00050	-2.71	0.00054	< 1
	DH3	-3.03	0.00050	-2.73	0.00053	< 1
	DH5	-3.04	0.00050	-2.75	0.00053	< 1
2441	DH1	-3.43	0.00045	-3.12	0.00049	< 1
	DH3	-3.45	0.00045	-3.15	0.00048	< 1
	DH5	-3.45	0.00045	-3.16	0.00048	< 1
2480	DH1	-3.90	0.00041	-3.60	0.00044	< 1
	DH3	-3.92	0.00041	-3.62	0.00043	< 1
	DH5	-3.92	0.00041	-3.64	0.00043	< 1

5 Conducted Emission Measurement

5.1. Limit

Frequency (MHz)	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50


5.2. Test Instruments

Describe	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Test Receiver	R&S	ESCI	100367	06/12/2014	(1)
LISN	R&S	ENV216	101040	03/07/2014	(1)
LISN	R&S	ENV216	101041	03/07/2014	(1)
Test Site	ATL	TE05	TE05	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

5.3. Test Setup

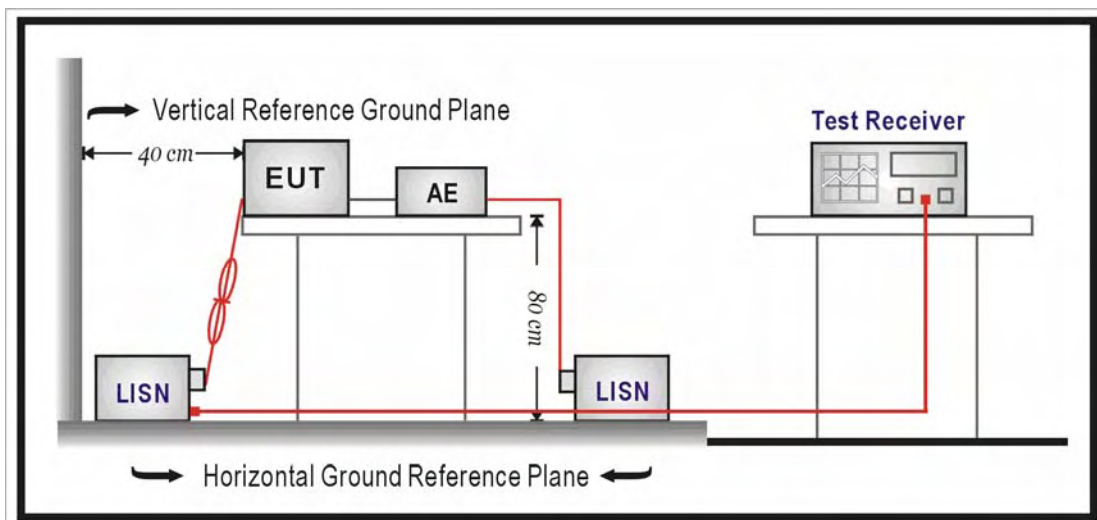

5.4. Test Procedure

The power line conducted emission measurements were performed in a shielded enclosure. The EUT was assembled on a wooden table which is 80 centimeters high, was placed 40 centimeters from the back wall and at least 1 meter from the sidewall.

Power was fed to the EUT from the public utility power grid through a line filter and EMCO Model 3162/2 SH Line Impedance Stabilization Networks (LISN). The LISN housing, measuring instrumentation case, ground plane, etc., were electrically bonded together at the same RF potential. The Spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the LISN was connected to the spectrum analyzer directly. Conducted emission levels were in the CISPR quasi-peak detection mode. The analyzer's 6 dB bandwidth was set to 9 KHz. No post-detector video filter was used.

The spectrum was scanned from 150 KHz to 30 MHz. The physical arrangement of the test system and associated cabling was varied (within the scope of arrangements likely to be encountered in actual use) to determine the effect on the unit's emanations in amplitude and frequency. All spurious emission frequencies were observed. The highest emission amplitudes relative to the appropriate limit were measured and have been recorded in paragraph 4.1.

5.5. Test Result

Note applicable. This device power is supplied by DC source

6 Radiated Interference Measurement

6.1. Limit

According to §15.209(a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at meter)	Measurement Distance (meters)
0.009 – 0.490	2400 / F (kHz)	300
0.490 – 1.705	24000 / F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

6.2. Test Instruments


3 Meter Chamber					
Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
RF Pre-selector	Agilent	N9039A	MY46520256	01/10/2014	(1)
Spectrum Analyzer	Agilent	E4446A	MY46180578	01/10/2014	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Pre Amplifier	Agilent	8447D	2944A10961	02/21/2014	(1)
Broadband Antenna (30MHz~1GHz)	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	9163-270	07/01/2013	(1)
Horn Antenna (1~18GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	06/10/2013	(1)
Horn Antenna (18~40GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9170	9170-320	06/13/2013	(1)
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	08/14/2012	(3)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years. (3) Calibration period 3 years.


NOTE: N.C.R. = No Calibration Request.

6.3. Setup

Below 1GHz

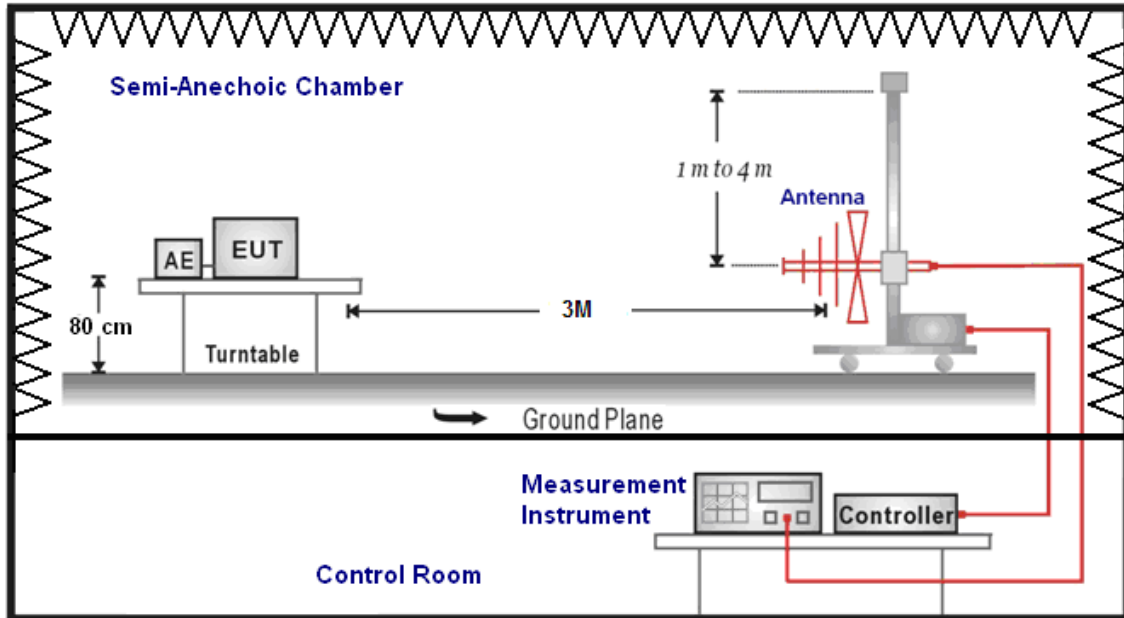

Above 1GHz

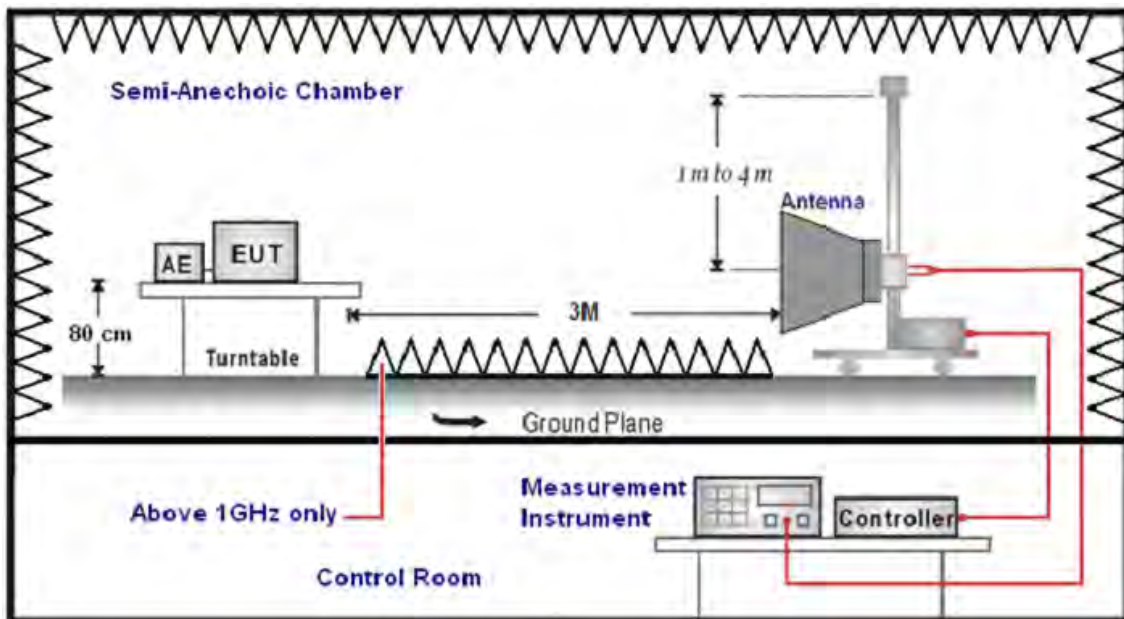

6.4. Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 9 kHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on three orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna (model VULB9163) at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna (model BBHA9120D&9170) was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20dB/decade).

For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts per meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro volts per meter (dBuV/m).

The actual field intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

$$(1) \text{ Amplitude (dBuV/m) = FI (dBuV) + AF (dBuV) + CL (dBuV) - Gain (dB)}$$

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

$$(2) \text{ Actual Amplitude (dBuV/m) = Amplitude (dBuV) - Dis(dB)}$$

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency : Transmitter Output < +30dBm

(b) For spurious frequency : Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

6.5. Test Result

Below 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OWCKPA28BTW		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 1		Date:		05/28/2014	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
74.5000	46.95	-15.72	31.23	40.00	-8.77	QP	H
199.0000	48.67	-14.37	34.30	43.50	-9.20	QP	H
292.0000	44.78	-10.48	34.30	46.00	-11.70	QP	H
519.0000	33.89	-5.96	27.93	46.00	-18.07	QP	H
612.0000	32.11	-3.84	28.27	46.00	-17.73	QP	H
665.0000	43.77	-3.01	40.76	46.00	-5.24	QP	H
98.0000	48.53	-17.43	31.10	43.50	-12.40	QP	V
205.0000	43.07	-14.23	28.84	43.50	-14.66	QP	V
324.0000	43.91	-9.85	34.06	46.00	-11.94	QP	V
518.0000	39.50	-5.99	33.51	46.00	-12.49	QP	V
663.0000	40.53	-3.05	37.48	46.00	-8.52	QP	V
897.5000	32.99	1.64	34.63	46.00	-11.37	QP	V

Note: No emission found between lowest internal used/generated frequencies to 30MHz (9 kHz~30MHz).

Above 1GHz

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OWCKPA28BTW		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 2		Date:		05/28/2014	
Frequency:		2402 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	37.41	-0.10	37.31	74.00	-36.69	peak	H
4542.000	34.58	4.31	38.89	74.00	-35.11	peak	H
7206.000	39.84	11.35	51.19	74.00	-22.81	peak	H
3030.000	35.98	-0.11	35.87	74.00	-38.13	peak	V
4591.000	34.46	4.43	38.89	74.00	-35.11	peak	V
7206.000	37.08	11.35	48.43	74.00	-25.57	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OWCKPA28BTW		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 2		Date:		05/28/2014	
Frequency:		2441 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3009.000	37.74	-0.17	37.57	74.00	-36.43	peak	H
4563.000	34.77	4.36	39.13	74.00	-34.87	peak	H
7323.000	39.27	11.64	50.91	74.00	-23.09	peak	H
3051.000	39.65	-0.06	39.59	74.00	-34.41	peak	V
4591.000	35.55	4.43	39.98	74.00	-34.02	peak	V
7323.000	37.20	11.64	48.84	74.00	-25.16	peak	V


Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OWCKPA28BTW		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 2		Date:		05/28/2014	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
3037.000	36.59	-0.10	36.49	74.00	-37.51	peak	H
4598.000	33.73	4.45	38.18	74.00	-35.82	peak	H
7440.000	37.39	11.92	49.31	74.00	-24.69	peak	H
3030.000	37.30	-0.11	37.19	74.00	-36.81	peak	V
4577.000	33.34	4.39	37.73	74.00	-36.27	peak	V
7440.000	36.03	11.92	47.95	74.00	-26.05	peak	V

7 20dB RF Bandwidth and 99 % Occupied Bandwidth Measurement

7.1. Limit

N/A

7.2. Test Setup

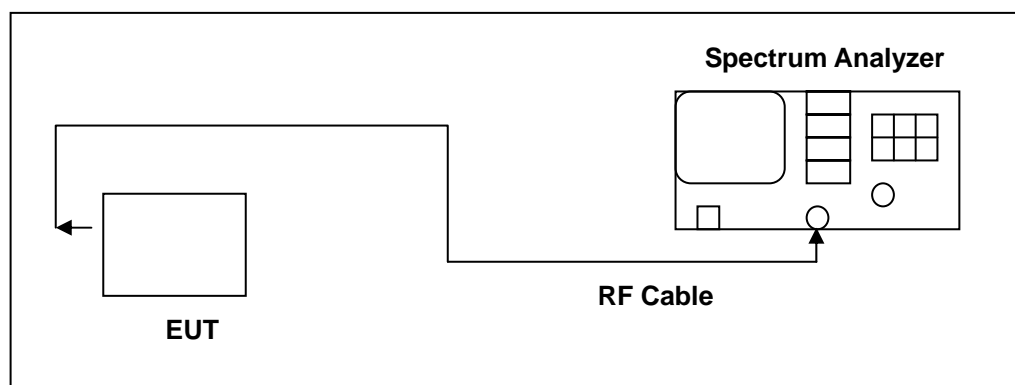

7.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

7.4. Test Procedure

20dB RF Bandwidth

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW \geq 1% of the 20dB span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

99 % Occupied Bandwidth

The transmitter shall be operated at its maximum carrier power measured under normal test conditions.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%.


The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual.

The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded.

7.5. Test Result

Model Number	OWCKPA28BTW		
Test Item	20dB RF Bandwidth and 99 % Occupied Bandwidth		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	06/18/2014	Test Site	TE02
Frequency (MHz)	20dB RF Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	Limit (MHz)
2402	1.019	0.942	-----
2441	1.012	0.924	-----
2480	1.007	0.928	-----

7.6. Test Graphs


Mode 2: GFSK Link Mode	
2402	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.402000000 GHz Center Freq: 2.402000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgHold: 10/10 Radio Device: BTS</p> <p>Ref 20.00 dBm Mkr1 2.48046 GHz - dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 3 ms</p> <p>Occupied Bandwidth 942.20 kHz Total Power -3.63 dBm</p> <p>Transmit Freq Error -1.644 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.019 MHz x dB -20.00 dB</p>
2441	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.441000000 GHz Center Freq: 2.441000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgHold: 10/10 Radio Device: BTS</p> <p>Ref 20.00 dBm Mkr1 2.48046 GHz - dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 3 ms</p> <p>Occupied Bandwidth 924.33 kHz Total Power -3.79 dBm</p> <p>Transmit Freq Error 5.656 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.012 MHz x dB -20.00 dB</p>
2480	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.480000000 GHz Center Freq: 2.480000000 GHz Radio Std: None</p> <p>Trig: Free Run AvgHold: 10/10 Radio Device: BTS</p> <p>Ref 20.00 dBm Mkr1 2.48046 GHz - dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 2 MHz Sweep 3 ms</p> <p>Occupied Bandwidth 927.73 kHz Total Power -4.76 dBm</p> <p>Transmit Freq Error 6.655 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.007 MHz x dB -20.00 dB</p>

8 Carrier Frequency Separation Measurement

8.1. Limit

Title 47 of the CFR, Part 15 Subpart (c) 15.247(a)(1) requires the measurement of the bandwidth of the transmission between the -20 dB points on the transmitted spectrum. The results of this test determine the limits for channel spacing. The channel spacing shall be a minimum of 25 kHz or the 20 dB bandwidth.

8.2. Test Setup

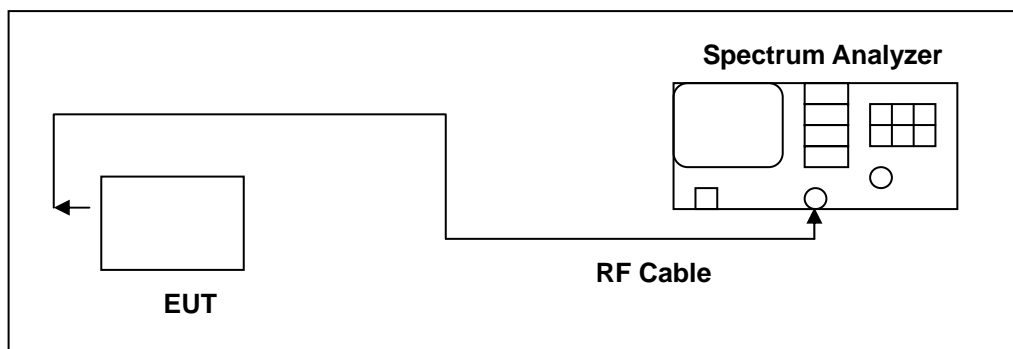

8.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

8.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth transmitter of the V6 had its hopping function enabled. The following spectrum analyzer settings were used:




1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
3. Video (or Average) Bandwidth (VBW) \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

8.5. Test Result

Model Number	OWCKPA28BTW		
Test Item	Carrier Frequency Separation		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	06/18/2014	Test Site	TE02
Frequency (MHz)	Measurement (MHz)	Limit (MHz)	
2402	1	> 0.679	
2441	1	> 0.675	
2480	1	> 0.671	

8.6. Test Graphs


Mode 2: GFSK Link Mode	
2402	
2441	
2480	

9 Number of Hopping Measurement

9.1. Limit

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

9.2. Test Setup

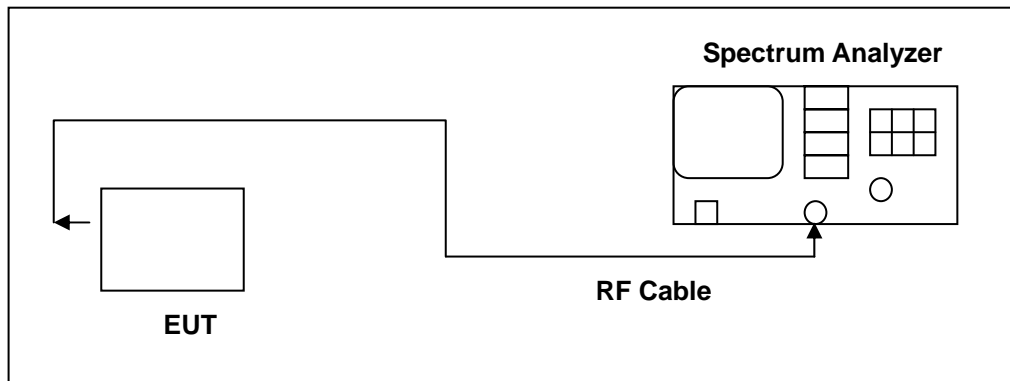

9.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

9.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:


1. Span = the frequency band of operation
2. RBW \geq 1% of the span
3. VBW \geq RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize.

9.5. Test Result

Model Number	OWCKPA28BTW		
Test Item	Number of Hopping		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	06/18/2014	Test Site	TE02
Frequency Range (MHz)	Measurement (ch)	Limit (ch)	
2402 - 2480	79	> 15	

9.6. Test Graphs

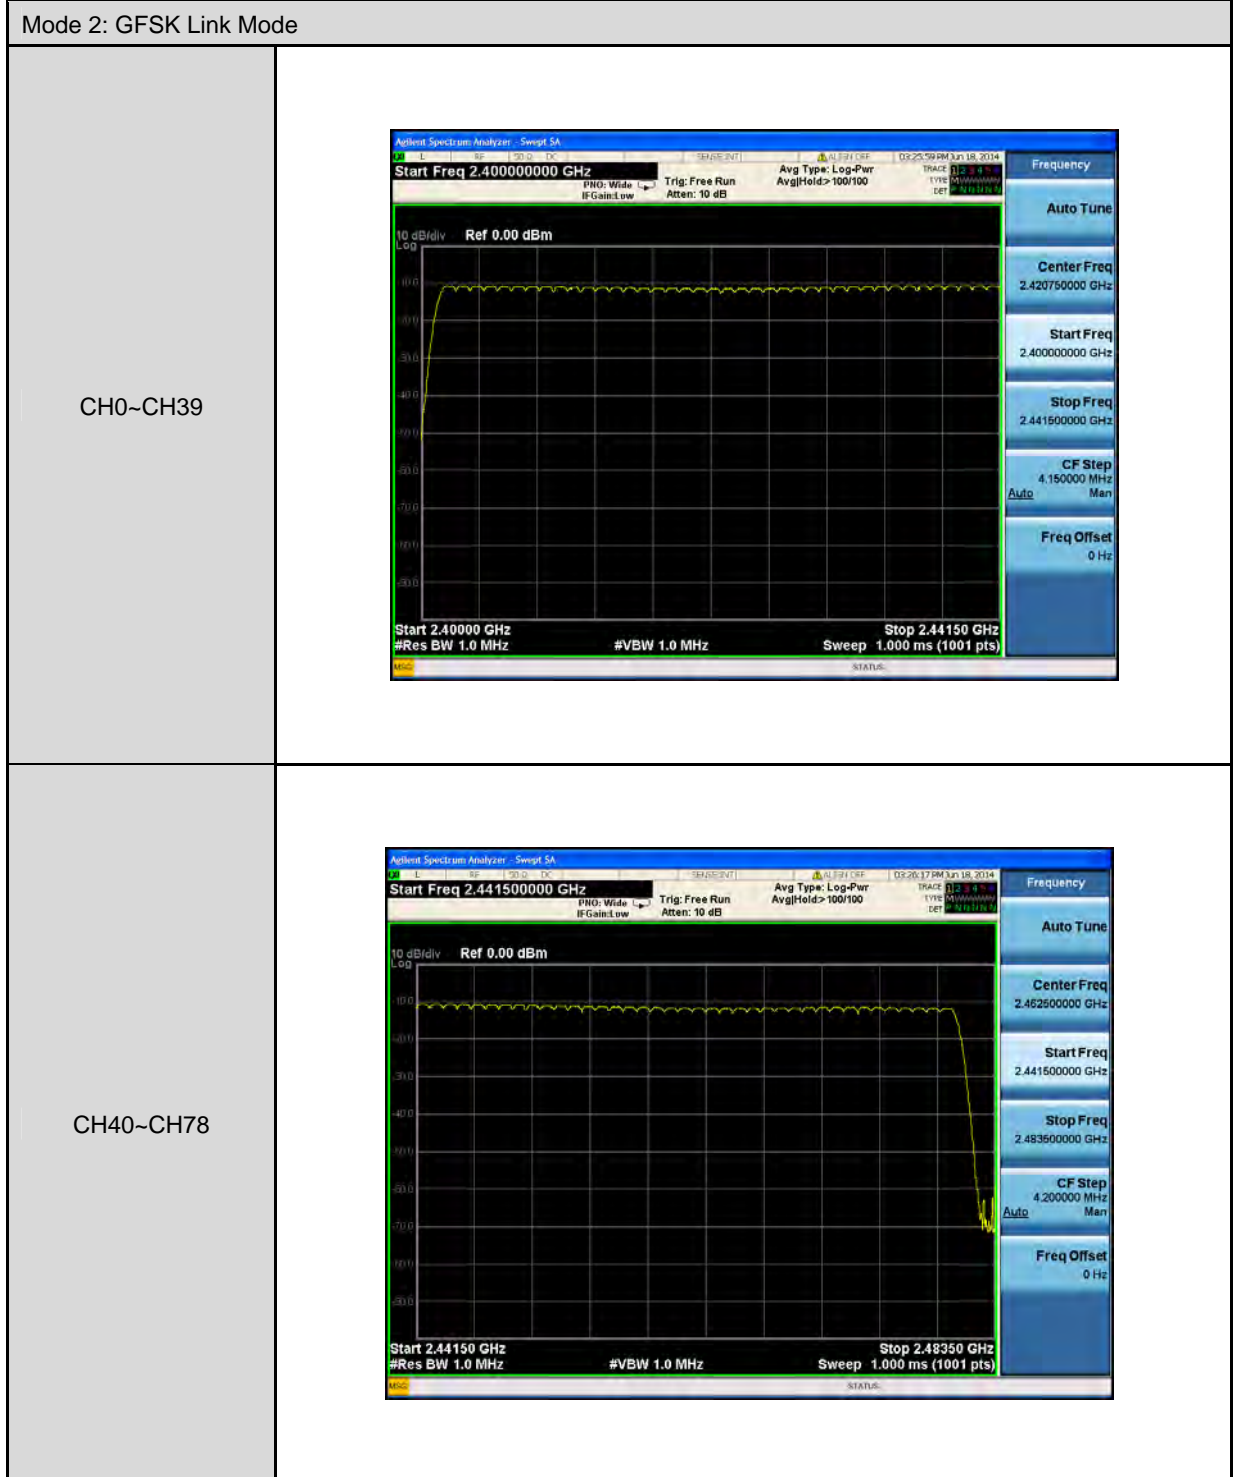


10 Time of Occupancy (Dwell Time) Measurement

10.1. Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2. Test Setup

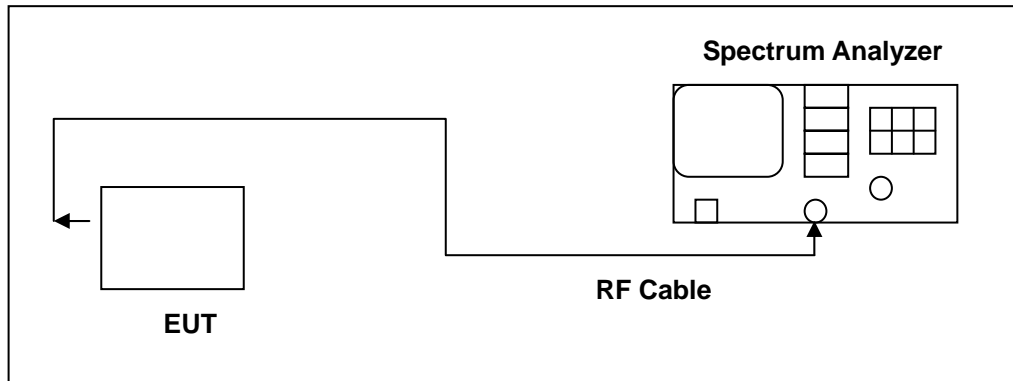

10.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

10.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage. The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:




1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW \geq RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

10.5. Test Result

Model Number	OWCKPA28BTW		
Test Item	Time of Occupancy (Dwell Time)		
Test Mode	Mode 2: GFSK Link Mode		
Date of Test	06/18/2014	Test Site	TE02
DH1			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	800/79CH = 10.13(times/sec)		
Each Channel Dwell Times (1)	0.450 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 10.13 = 320.108(times)		
Dwell Times on Cycle (1) * (2)	144.0486 ms (sec)		
LIMIT(msec)	< = 400		
DH3			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	400/79CH = 5.1(times/sec)		
Each Channel Dwell Times (1)	1.710 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 5.1 = 161.16(times)		
Dwell Times on Cycle (1) * (2)	275.5836 ms (sec)		
LIMIT(msec)	< = 400		
DH5			
Cycle Calculate	79CH * 0.4 = 31.6 (sec)		
The EUT Hopping Number per Sec	1600 times/sec		
Each Channel Dwell Times per Sec	266.7/79CH = 3.37(times/sec)		
Each Channel Dwell Times (1)	2.952 ms (sec)		
Each Channel Dwell Times on Cycle(2)	31.6 * 3.37 = 106.492(times)		
Dwell Times on Cycle (1) * (2)	314.3644 ms (sec)		
LIMIT(msec)	< = 400		

10.6. Test Graphs

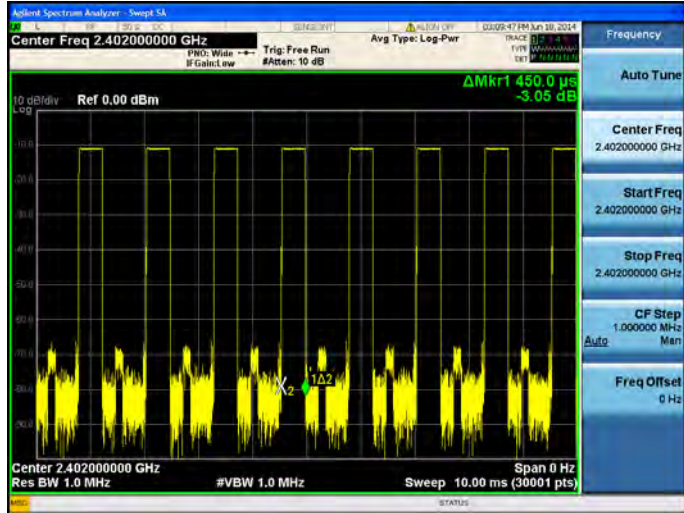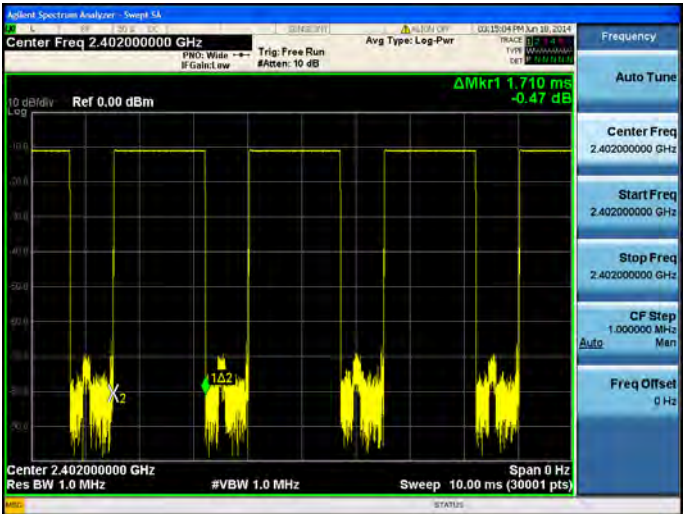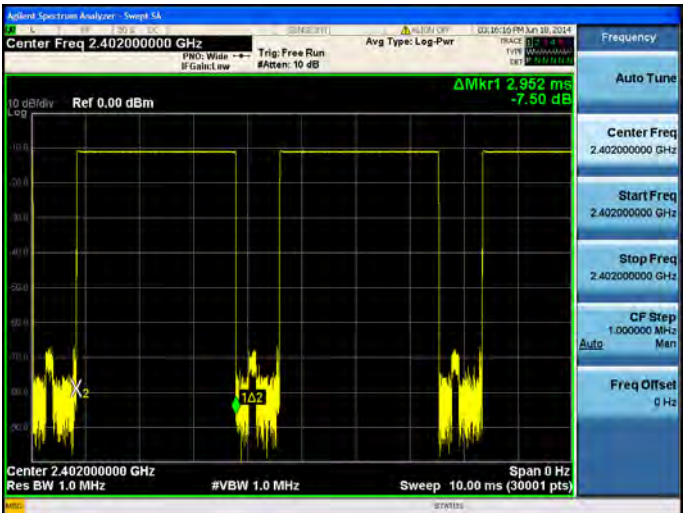
Mode 2: GFSK Link Mode	
DH1	 <p>Agilent Spectrum Analyzer - Sweep 1A Center Freq 2.402000000 GHz Ref 0.00 dBm ΔMkr1 450.0 μs -3.05 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (30001 pts) Span 0 Hz</p>
DH3	 <p>Agilent Spectrum Analyzer - Sweep 1A Center Freq 2.402000000 GHz Ref 0.00 dBm ΔMkr1 1.710 ms -0.47 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (30001 pts) Span 0 Hz</p>
DH5	 <p>Agilent Spectrum Analyzer - Sweep 1A Center Freq 2.402000000 GHz Ref 0.00 dBm ΔMkr1 2.952 ms -7.50 dB Center 2.402000000 GHz Res BW 1.0 MHz #VBW 1.0 MHz Sweep 10.00 ms (30001 pts) Span 0 Hz</p>

11 Out of Band Conducted Emissions Measurement

11.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

11.2. Test Setup

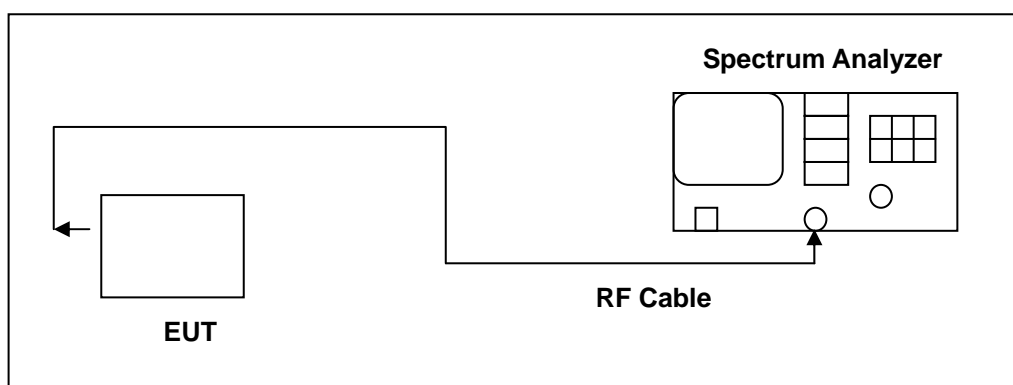

11.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4445A	MY45300744	12/18/2013	(1)
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/11/2013	(1)
Test Site	ATL	TE02	TE02	N.C.R.	-----




Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

11.4. Test Procedure


Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. In any 100 kHz bandwidth outside the EUT pass band, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission, antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function. All other types of emissions from the EUT shall meet the general limits for radiated frequencies outside the pass band. The test was performed at 3 channels (Channel 0, 39, 78)

11.5. Test Graphs

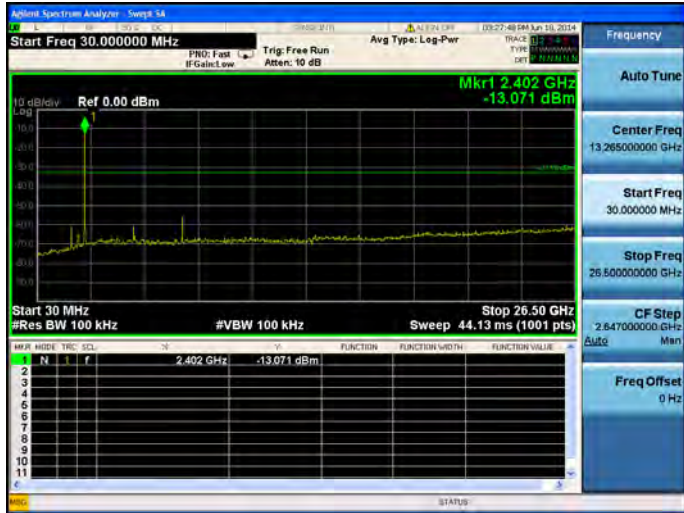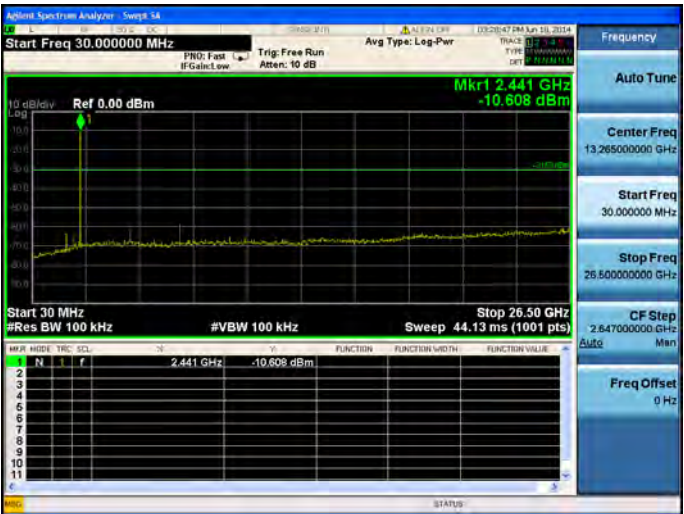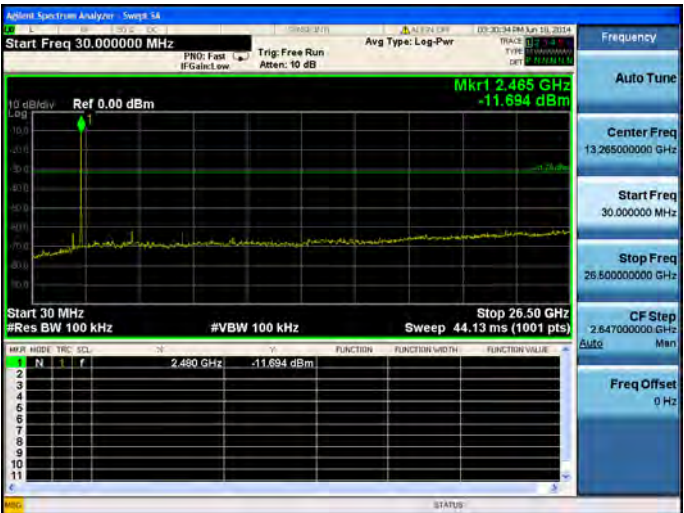Mode 2: GFSK Link Mode	
2402	 <p>Agilent Spectrum Analyzer - Sweep 14</p> <p>Start Freq 30.000000 MHz</p> <p>Ref 0.00 dBm</p> <p>Mkr1 2.402 GHz -13.071 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.50 GHz Sweep 44.13 ms (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
2441	 <p>Agilent Spectrum Analyzer - Sweep 14</p> <p>Start Freq 30.000000 MHz</p> <p>Ref 0.00 dBm</p> <p>Mkr1 2.441 GHz -10.608 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.50 GHz Sweep 44.13 ms (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
2480	 <p>Agilent Spectrum Analyzer - Sweep 14</p> <p>Start Freq 30.000000 MHz</p> <p>Ref 0.00 dBm</p> <p>Mkr1 2.480 GHz -11.694 dBm</p> <p>Start 30 MHz #Res BW 100 kHz #VBW 100 kHz Stop 26.50 GHz Sweep 44.13 ms (1001 pts)</p> <p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Mode 2: GFSK Link Mode _ Un-hopping

2402

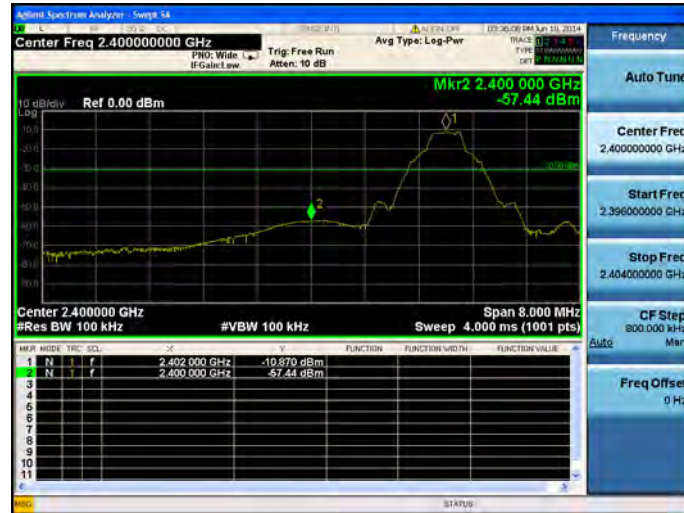

2480



Mode 2: GFSK Link Mode _ Hopping

2402 ~ 2480




12 Band Edges Measurement

12.1. Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

12.2. Test Setup

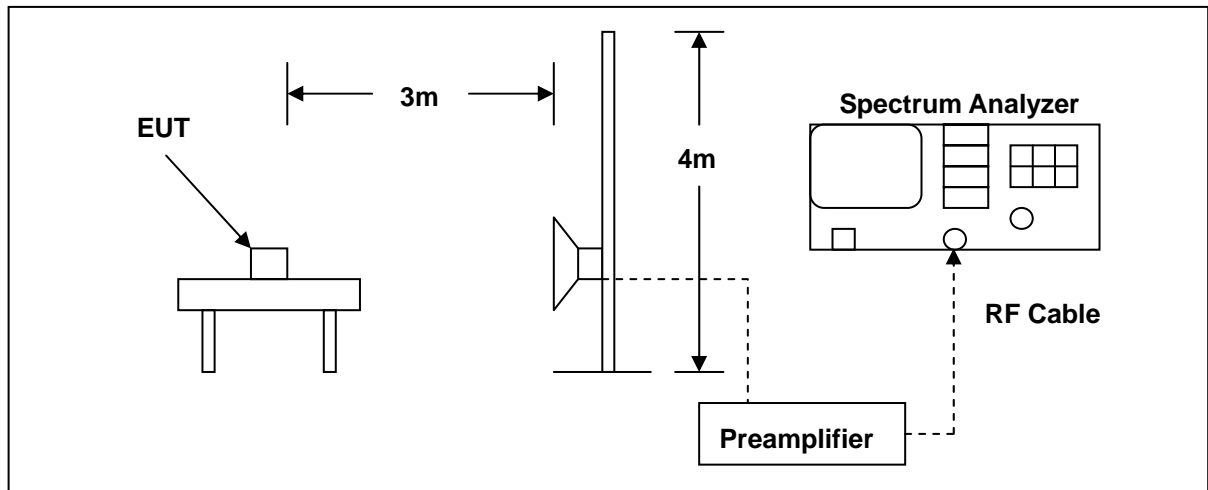

12.3. Test Instruments

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Remark
Spectrum Analyzer	Agilent	E4408B	MY45107753	07/11/2013	(1)
Pre Amplifier	Agilent	8449B	3008A02237	02/21/2014	(1)
Horn Antenna	SCHWARZBECK MESS-ELEKTRONIK	9120D	9120D-550	06/10/2013	(1)
Test Site	ATL	TE01	888001	08/28/2013	(1)

Remark: (1) Calibration period 1 year. (2) Calibration period 2 years.

NOTE: N.C.R. = No Calibration Request.

12.4. Test Procedure

Testing must be done according to this procedure, FCC Public Notice DA 00-705 - Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems. This is the only method recognized by the FCC. The emissions on the harmonics frequencies, the limits, and the margin of compliance are presented. These tests were made when the transmitter was in full radiated power. The additional test was performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz.

The transmitter was configured with the worst case antenna and setup to transmit at the highest channel. Then the field strength was measured at 2483.5 MHz.

The transmitter was then configured with the worst case antenna and setup to transmit at the lowest channel. Then the field strength was measured at 2390.0 MHz. These tests were performed at 4 different bit rates.

For measurements the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

12.5. Test Result

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OWCKPA28BTW		Temp.(°C)/Hum.(%RH):		26(°C)/60%RH	
Mode:		Mode 2		Date:		05/28/2014	
Frequency:		2402 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2385.130	40.49	-1.97	38.52	74.00	-35.48	peak	H
2390.000	37.78	-1.94	35.84	74.00	-38.16	peak	H
2387.550	41.14	-1.96	39.18	74.00	-34.82	peak	V
2390.000	36.95	-1.94	35.01	74.00	-38.99	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OWCKPA28BTW		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Mode 2		Date:		05/28/2014	
Frequency:		2480 MHz		Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2483.500	36.74	-1.52	35.22	74.00	-38.78	peak	H
2483.980	41.30	-1.51	39.79	74.00	-34.21	peak	H
2483.500	51.84	-1.52	50.32	74.00	-23.68	peak	V
2483.660	52.45	-1.52	50.93	74.00	-23.07	peak	V

Standard:		FCC Part 15C		Test Distance:		3m	
Test item:		Radiated Emission		Power:		AC 120V/60Hz	
Model Number:		OWCKPA28BTW		Temp.(℃)/Hum.(%RH):		26(℃)/60%RH	
Mode:		Hopping		Date:		05/28/2014	
				Test By:		Eric Ou Yang	
Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant.Polar. H / V
2364.530	39.69	-2.06	37.63	74.00	-36.37	peak	H
2390.000	40.04	-1.94	38.10	74.00	-35.90	peak	H
2483.500	37.63	-1.52	36.11	74.00	-37.89	peak	H
2490.310	38.39	-1.48	36.91	74.00	-37.09	peak	H
2375.360	39.81	-2.01	37.80	74.00	-36.20	peak	V
2390.000	37.03	-1.94	35.09	74.00	-38.91	peak	V
2483.500	37.83	-1.52	36.31	74.00	-37.69	peak	V
2485.180	42.69	-1.51	41.18	74.00	-32.82	peak	V

13 Antenna Measurement

13.1. Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And According to 15.247 (b)(4), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

13.2. Antenna Connector Construction

The antenna used in this product is PCB antenna. And the maximum Gain of this antenna is only 2.78 dBi.