
Appendix B. Highest Measurement Data

Test Laboratory: DEKRA

Date: 2023/10/17

2_WLAN2.4GHz_802.11b-1M_CH11_Back(PAD)_0mm_ANT Aux**DUT: Notebook Computer; Type: EP20AN2C**

Communication System: UID 0, WLAN 2.4G; Frequency: 2462 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 40.47$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(7.85, 8.9, 7.36) @ 2462 MHz; Calibrated: 2023/02/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2023/02/22
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 2030
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Flat/Area Scan (8x10x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.977 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.918 V/m; Power Drift = 0.13 dB



Peak SAR (extrapolated) = 1.18 W/kg

SAR(1 g) = 0.627 W/kg; SAR(10 g) = 0.311 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 0.979 W/kg

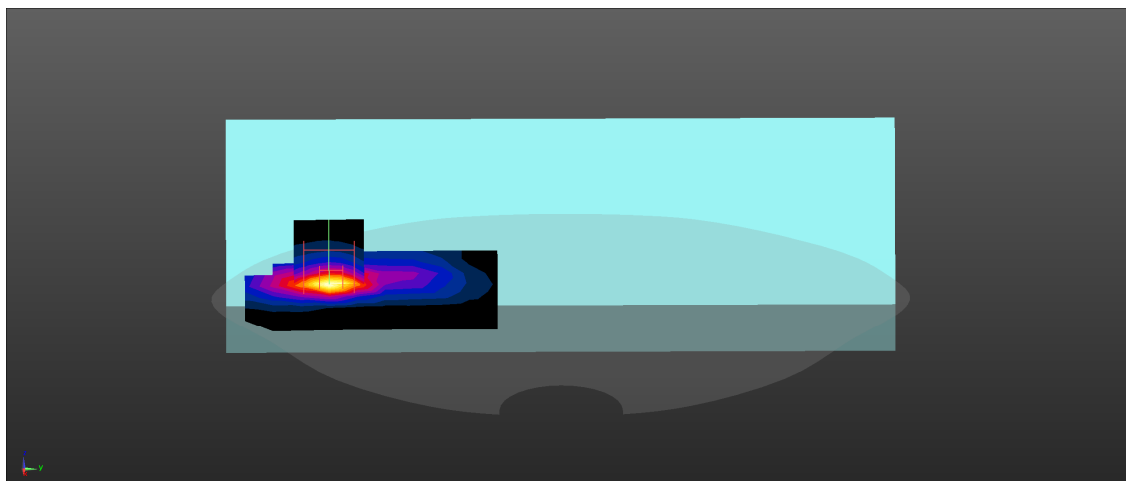

Test Laboratory: DEKRA

Date: 2023/10/17

14_Bluetooth_BT-1M_CH39_Back(PAD)_0mm_ANT Aux**DUT: Notebook Computer; Type: EP20AN2C**

Communication System: UID 0, BT 1M&3M&BLE; Frequency: 2441 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 2441$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.55$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(7.85, 8.9, 7.36) @ 2441 MHz; Calibrated: 2023/02/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2023/02/22
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 2030
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Flat/Area Scan (9x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.118 W/kg

Configuration/Flat/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.6550 V/m; Power Drift = -0.06 dB



Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.035 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 49%

Maximum value of SAR (measured) = 0.110 W/kg

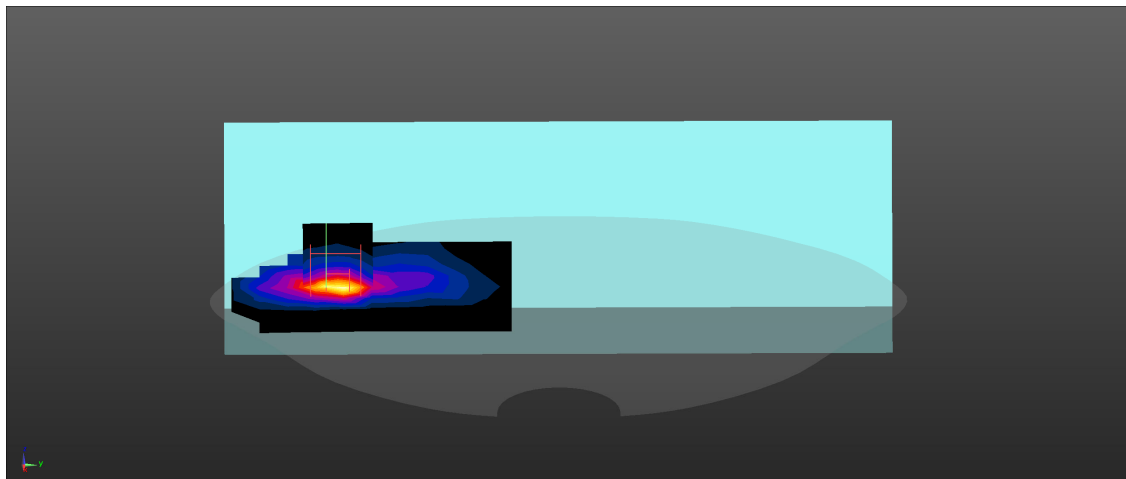

Test Laboratory: DEKRA

Date: 2023/10/16

24_WLAN5GHz_802.11ac80-VHT0_CH58_Back(PAD)_0mm_ANT Main**DUT: Notebook Computer; Type: EP20AN2C**

Communication System: UID 0, WLAN 5G; Frequency: 5290 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5290$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 36.34$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(5.67, 6.32, 5.35) @ 5290 MHz; Calibrated: 2023/02/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2023/02/22
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 2030
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Flat/Area Scan (7x10x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 2.08 W/kg**Configuration/Flat/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,
dz=1.4mm

Reference Value = 0.4740 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 3.84 W/kg

SAR(1 g) = 0.857 W/kg; SAR(10 g) = 0.210 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.8%

Maximum value of SAR (measured) = 2.27 W/kg

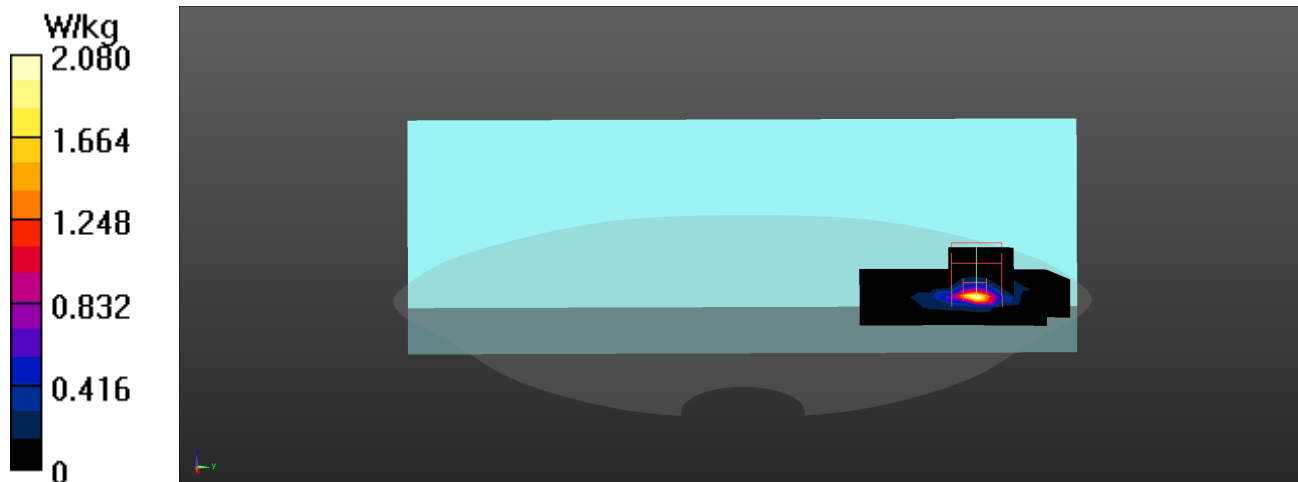

Test Laboratory: DEKRA

Date: 2023/10/16

25_WLAN5GHz_802.11ac80-VHT0_CH106_Back(PAD)_0mm_ANT Main**DUT: Notebook Computer; Type: EP20AN2C**

Communication System: UID 0, WLAN 5G; Frequency: 5530 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5530$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 35.67$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(4.85, 5.34, 4.58) @ 5530 MHz; Calibrated: 2023/02/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2023/02/22
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 2030
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Flat/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.52 W/kg**Configuration/Flat/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,
dz=1.4mm

Reference Value = 0.5640 V/m; Power Drift = 0.06 dB



Peak SAR (extrapolated) = 4.05 W/kg

SAR(1 g) = 0.896 W/kg; SAR(10 g) = 0.216 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 64.7%

Maximum value of SAR (measured) = 2.48 W/kg

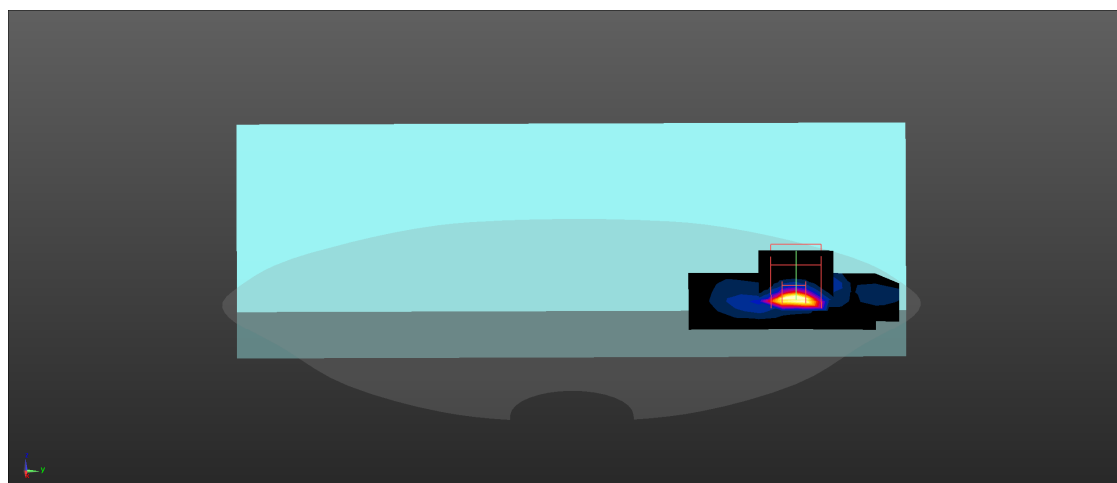

Test Laboratory: DEKRA

Date: 2023/10/16

28_WLAN5GHz_802.11ac80-VHT0_CH155_Back(PAD)_0mm_ANT Main**DUT: Notebook Computer; Type: EP20AN2C**

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 35.00$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(4.84, 5.4, 4.63) @ 5775 MHz; Calibrated: 2023/02/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2023/02/22
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 2030
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Flat/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.47 W/kg**Configuration/Flat/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm,
dz=1.4mm

Reference Value = 23.80 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 4.34 W/kg

SAR(1 g) = 0.921 W/kg; SAR(10 g) = 0.228 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.7%

Maximum value of SAR (measured) = 2.53 W/kg

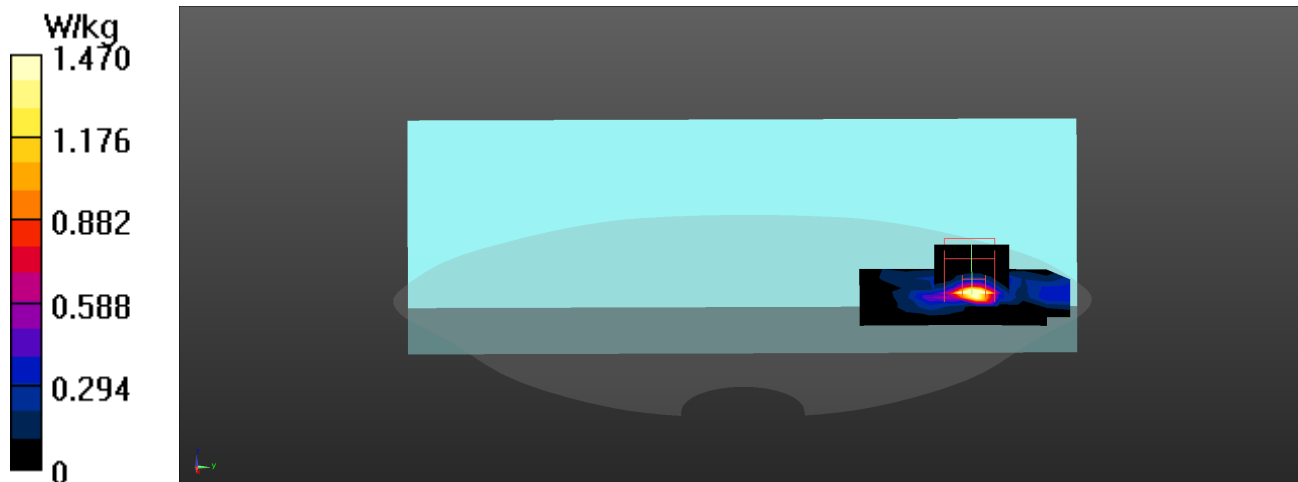

SAR measurement variability

Test Laboratory: DEKRA

Date: 2023/10/16

34_WLAN5GHz_802.11ac80-VHT0_CH155_Back(PAD)_0mm_ANT Main_Verify

DUT: Notebook Computer; Type: EP20AN2C

Communication System: UID 0, WLAN 5G; Frequency: 5775 MHz

Communication System PAR: 0 dB

Medium parameters used: $f = 5775$ MHz; $\sigma = 5.42$ S/m; $\epsilon_r = 35.00$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: EX3DV4 - SN7631; ConvF(4.84, 5.4, 4.63) @ 5775 MHz; Calibrated: 2023/02/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1651; Calibrated: 2023/02/22
- Phantom: Twin-SAM V8.0; Type: QD 000 P41 AA; Serial: 2030
- Measurement SW: DASYS2, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Configuration/Flat/Area Scan (7x11x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.29 W/kg

Configuration/Flat/Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.2940 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 3.90 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.6%

Maximum value of SAR (measured) = 2.40 W/kg

