



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Product Name: Desktop Computer

Brand Name: ECS,ELITEGROUP

Model No.: BR95II1

Series Model: BR95IIX (X=0~9,A~Z OR BLANK)

Test Report Number:

KS120105A01-RP1

Issued for

Elitegroup Computer Systems Co.,Ltd.

No.239,Sec.2,Ti Ding Blvd., Taipei, Taiwan

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

**No.10 Weiye Rd., Innovation park, Eco&Tec,
Development Zone, Kunshan City, Jiangsu, China**

TEL: 86-512-57355888

FAX: 86-512-57370818



TESTING CERT #2541.01

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION	3
2 EUT DESCRIPTION.....	4
3 TEST METHODOLOGY.....	5
3.1. EUT CONFIGURATION	5
3.2. EUT EXERCISE	5
3.3. GENERAL TEST PROCEDURES	5
3.4. MODIFICATION.....	5
3.5. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.6. DESCRIPTION OF TEST MODES	6
4 INSTRUMENT CALIBRATION	7
4.1. FACILITIES	7
4.2. EQUIPMENT	7
4.3. LABORATORY ACCREDITATIONS AND LISTING.....	7
4.4. TABLE OF ACCREDITATIONS AND LISTINGS	8
4.5. MEASURING INSTRUMENT CALIBRATION.....	8
5 SETUP OF EQUIPMENT UNDER TEST	10
5.1. SETUP CONFIGURATION OF EUT	10
5.2. SUPPORT EQUIPMENT	10
6 FCC PART 15.247 REQUIREMENTS	10
6.1. PEAK POWER	10
6.2. BAND EDGES MEASUREMENT	12
6.3. PEAK POWER SPECTRAL DENSITY	23
6.4. FREQUENCY SEPARATION.....	24
6.5. NUMBER OF HOPPING FREQUENCY	29
6.6. TIME OF OCCUPANCY (DWELL TIME).....	32
6.7. SPURIOUS EMISSIONS	38
6.8. POWERLINE CONDUCTED EMISSIONS	42



1 TEST RESULT CERTIFICATION

Product Name:	Desktop Computer
Trade Name:	ECS,ELITEGROUP
Model Name.:	BR95II1
Series Model:	BR95IIX (X=0~9,A~Z OR BLANK)
Applicant Discrepancy:	Initial
Device Category:	MOBILE DEVICES
Date of Test:	Jan 10,2012
Applicant:	Elitegroup Computer Systems Co.,Ltd. No.239,Sec.2,Ti Ding Blvd., Taipei, Taiwan
Manufacturer:	Elitegroup Computer Systems (SIP) Co.,Ltd. Comprehensive Free Zone A Zone,No.200,Central SuHong Rd. SuZhou Industrial Park, JiangSu, P.R. China
Application Type:	Certification

APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We here by certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Hadiif Hoo
RF Manager
Compliance Certification Service Inc.

Sean Yu
Test Engineer
Compliance Certification Service Inc.



2 EUT DESCRIPTION

Product Name:	Desktop Computer
Brand Name:	ECS,ELITEGROUP
Model Name:	BR95II1
Series Model:	BR95IIX (X=0~9,A~Z OR BLANK)
Model Discrepancy:	their differential sales regions, X to represent the only difference of them is the appearance.
Frequency Range:	Bluetooth:2402 ~ 2480 MHz WIFI b/g Mode:2412 ~ 2462 MHz a Mode:5745 ~ 5805 MHz gn(-20MHz): 2412 ~ 2462 MHz gn(-40MHz): 2422 ~ 2452 MHz an(-20MHz):5745 ~ 5805 MHz an(-40MHz):5755~ 5795 MHz
Transmit Power:	Max out power 1.2dBm
Modulation Technique:	FHSS
Transmit Data Rate:	GFSK(1 Mbps), $\pi/4$ -DQPSK(2 Mbps),8-DPSK(3 Mbps)
Number of Channels:	79 Channels
Antenna Specification:	Max Gain: 2.89dBi

Remark: This submittal(s) (test report) is intended for **FCC ID: WL6-BR95IIX6230** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1. EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2. EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3. GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

3.4. MODIFICATION

N/A



3.5. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.6. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

After verification, all tests were carried out with the worst case test modes as shown below GFSK(1M) and 8-DPSK(3 Mbps) Channel Low (2402MHz) \ Mid (2441MHz) and High (2480MHz), these were chosen for full testing.



4 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards facilities and accreditations

4.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone

Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22.

4.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.



All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.3. LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 200581-0 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC5743 for 10m chamber 10m, IC5743 for 10m chamber 3m.



4.4. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.4:2003); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	 TESTING CERT #2541.01
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	 93105, 90471
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	VCCI R-1600 C-1707 G-216

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

4.5. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Equipment Used for Emissions Measurement

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2012-5-13
DETECTOR NEGATIVE	Agilent	8473B	MY42240176	2012-5-13
OSCILLOSCOPE	Agilent	DSO6104A	MY44002585	2012-3-25
Peak and Avg Power Sensor	Agilent	E9327A	US40441788	2012-3-25
EPM-P Series Power Meter	Agilent	E4416A	GB41292714	2012-5-13



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	2012-5-13
DC POWER SUPPLY	GW instek	GPS-3303C	E903131	2012-5-13
Temp. / Humidity Chamber	Kingson	THS-M1	242	2012-3-13
Test Software	EZ-EMC			

977 Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2012-5-13
EMI Test Receiver	R&S	ESPI3	101026	2012-3-16
Pre-Amplifier	MINI	ZFL-1000VH2	d041703	2012-6-30
Pre-Amplifier	Miteq	NSP4000-NF	870629	2012-6-30
Bilog Antenna	Sunol	JB1	A110204-2	2012-6-24
Horn-antenna	SCHWARZBECK	BBHA9120D	D:266	2012-5-13
Turn Table	CT	CT123	4165	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R
Controller	CT	CT100	95637	N.C.R
Test Software	EZ-EMC			

Conducted Emission				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI TEST RECEIVER	R&S	ESCI3	100781	2012-3-16
V (V-LISN)	Schwarzbeck	NNLK 8129	8129-143	2012-3-16
LISN (EUT)	FCC	FCC-LISN-50/250-50-2-02	SN:05012	2012-3-16
TRANSIENT LIMITER	SCHAFFNER	CFL9206	1710	2012-4-9
Test Software	EZ-EMC			

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2



5 SETUP OF EQUIPMENT UNDER TEST

5.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

5.2. SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Remark:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

6 FCC PART 15.247 REQUIREMENTS


6.1. PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.
2. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
3. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter.



TEST RESULTS

No non-compliance noted

Test Data

1M

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-0.94	1.50	0.56	0.00114	0.125	PASS
Mid	2441	-1.00	1.50	0.50	0.00112		PASS
High	2480	-0.82	1.50	0.68	0.00117		PASS

3M

Channel	Frequency (MHz)	Reading Power (dBm)	Factor (dB)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	-2.95	1.50	-1.45	0.00072	0.125	PASS
Mid	2441	-0.53	1.50	0.97	0.00125		PASS
High	2480	-0.30	1.50	1.20	0.00132		PASS




6.2. BAND EDGES MEASUREMENT

LIMIT

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Test Configuration

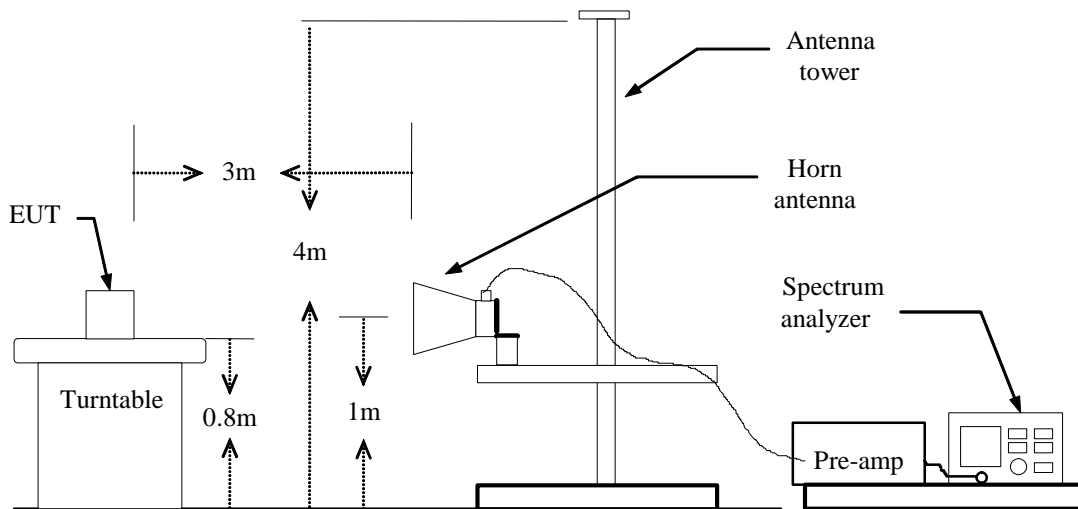

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



TEST RESULTS

1M

CH LOW

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	54.54	42.59	4.80	59.34	47.39	74	54	-14.66	-6.61
2390.00	H	52.64	42.64	4.80	57.44	47.44	74	54	-16.56	-6.56

CH HIGH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	60.12	47.39	4.80	64.92	52.19	74	54	-9.08	-1.81
2483.50	H	59.94	47.32	4.80	64.74	52.12	74	54	-9.26	-1.88



Refer to attach spectrum analyzer data chart.


Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent

R T

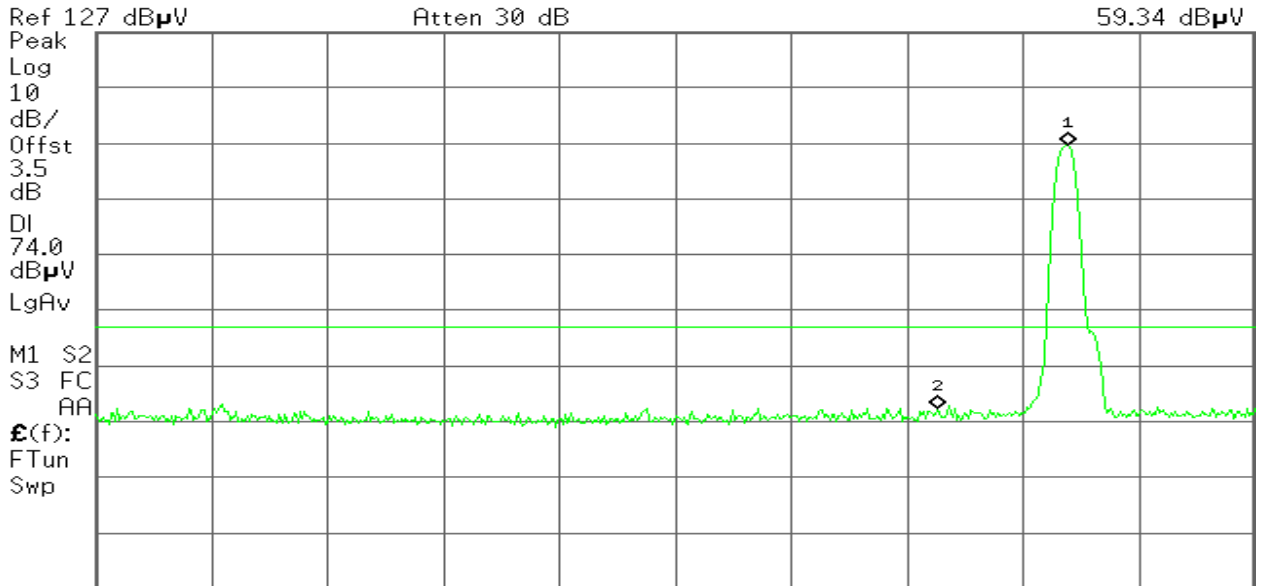


Start 2.310 00 GHz Stop 2.420 00 GHz
#Res BW 1 MHz #VBW 1 MHz Sweep 1 ms (601 pts)_

Detector mode: Average Polarity: Vertical

Agilent

R T

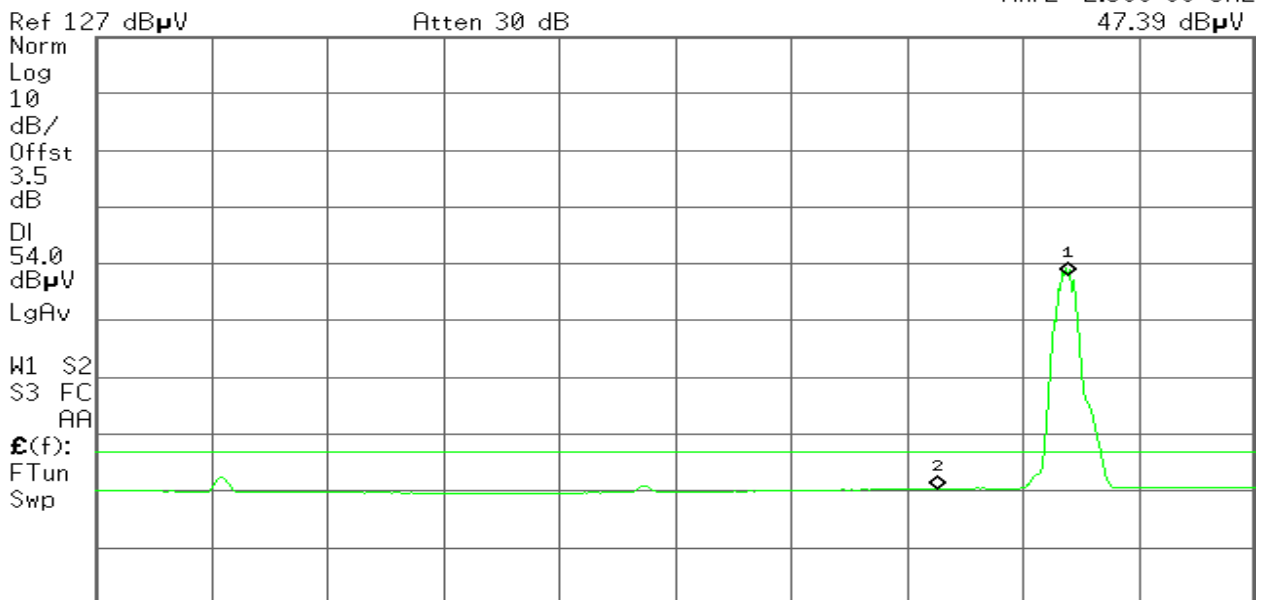

Start 2.310 00 GHz Stop 2.420 00 GHz
#Res BW 1 MHz #VBW 10 Hz Sweep 8.577 s (601 pts)_



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

Detector mode: Peak

Polarity: Horizontal

Agilent

R T

Mkr2 2.390 00 GHz
57.44 dBµV

Ref 127 dBµV

Atten 30 dB

Peak
Log
10
dB/
Offst
3.5
dB
DI
74.0
dBµV
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp



Start 2.310 00 GHz

Stop 2.420 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T


Trace

Ref 127 dBµV

Atten 30 dB

Mkr2 2.390 00 GHz
47.44 dBµV

Peak
Log
10
dB/
Offst
3.5
dB
DI
54.0
dBµV
LgAv
M1 S2
S3 FC
AA
£(f):
FTun
Swp

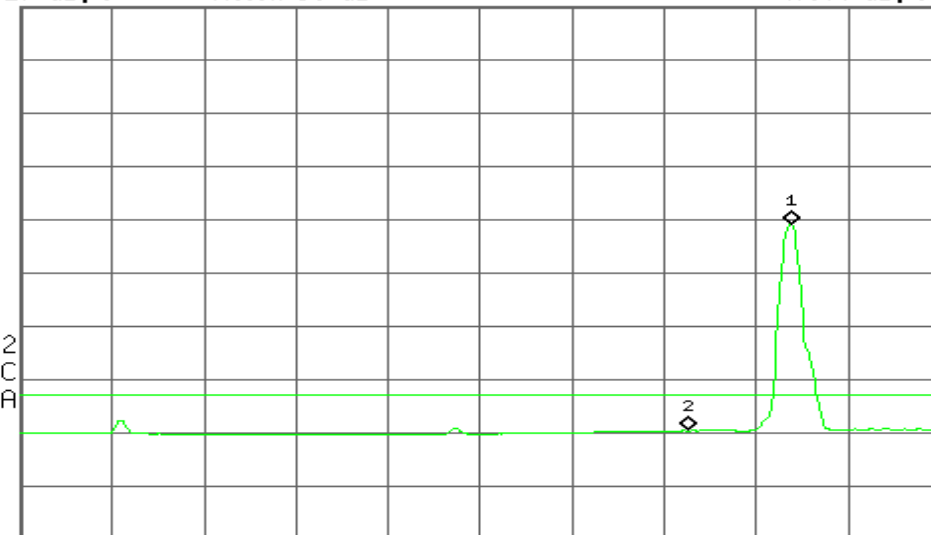

Start 2.310 00 GHz

Stop 2.420 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Sweep 8.577 s (601 pts)

1	Trace
2	Trace
3	Trace
Clear Write	
Max Hold	
Min Hold	
View	
Blank	
More	
1 of 2	

Copyright 2000-2008 Agilent Technologies



Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

Agilent


R T

Mkr2 2.483 50 GHz
64.92 dBμV

Ref 127 dBμV

Atten 30 dB

Peak
Log
10
dB/
Offst
3.5
dB
DI
74.0
dBμV
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
#Swp

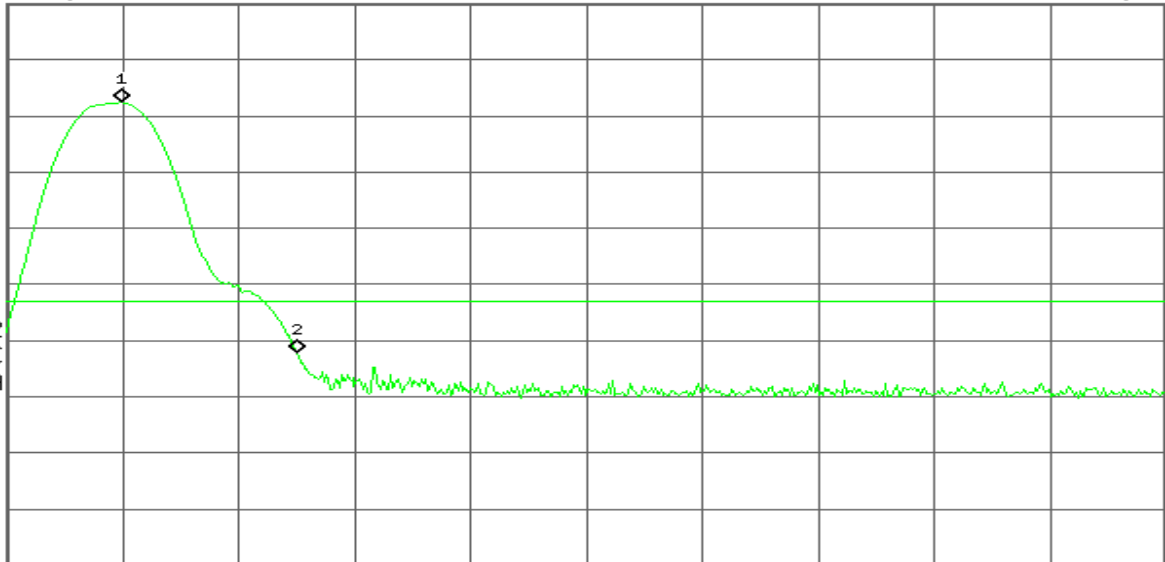

Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent


R T

Mkr2 2.483 50 GHz
52.19 dBμV

Ref 127 dBμV

Atten 30 dB

Peak
Log
10
dB/
Offst
3.5
dB
DI
54.0
dBμV
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
Swp

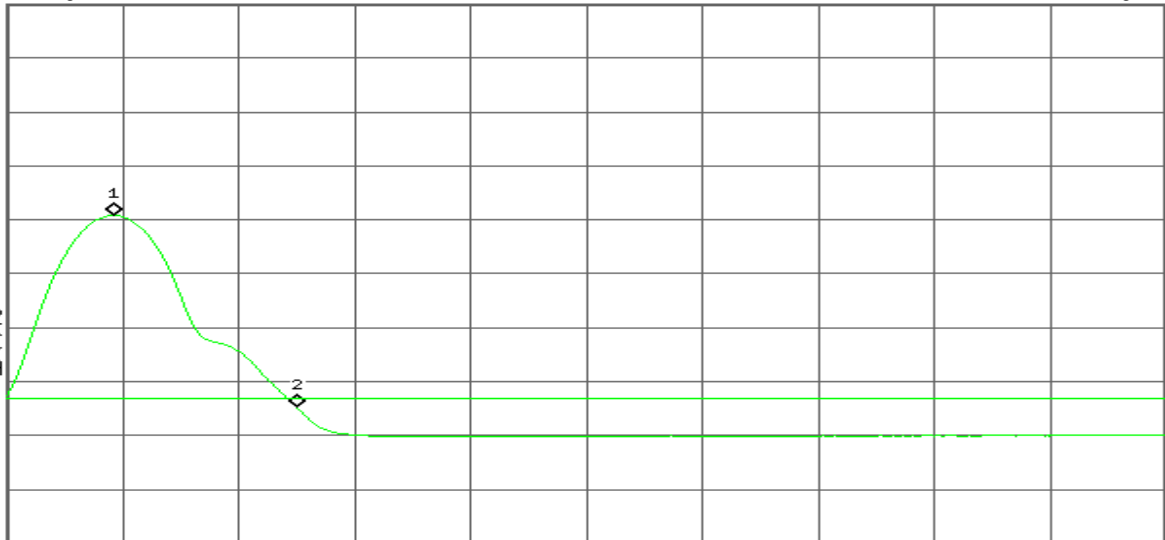

Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 1.715 s (601 pts)



Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.483 50 GHz
64.74 dB μ V

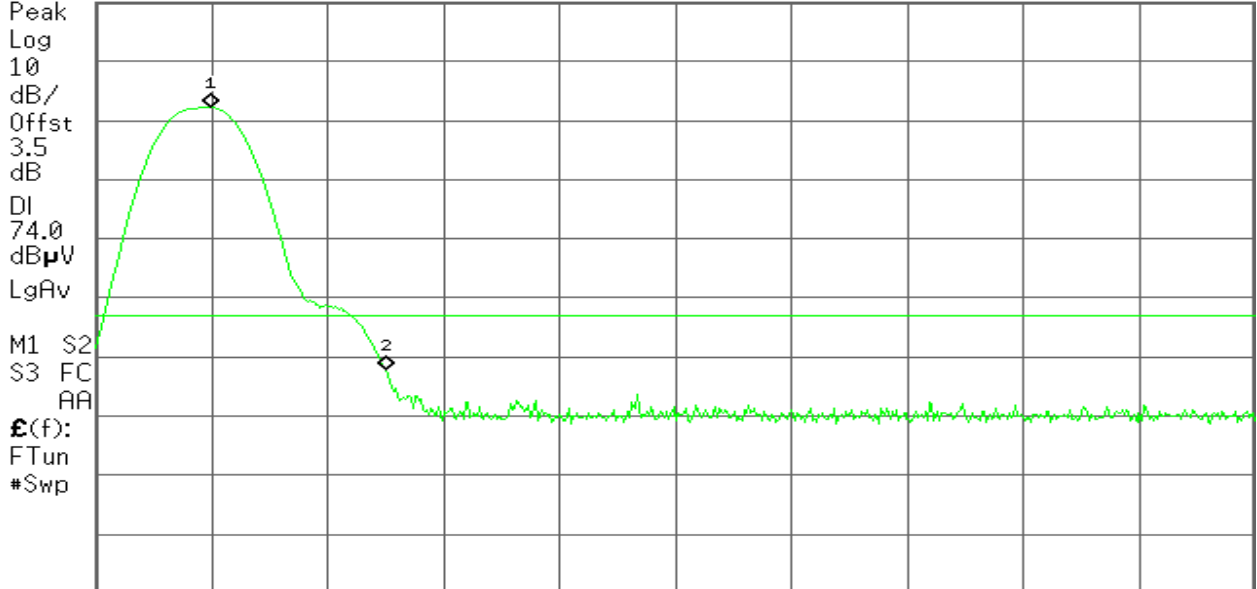

Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.483 50 GHz
52.12 dB μ V

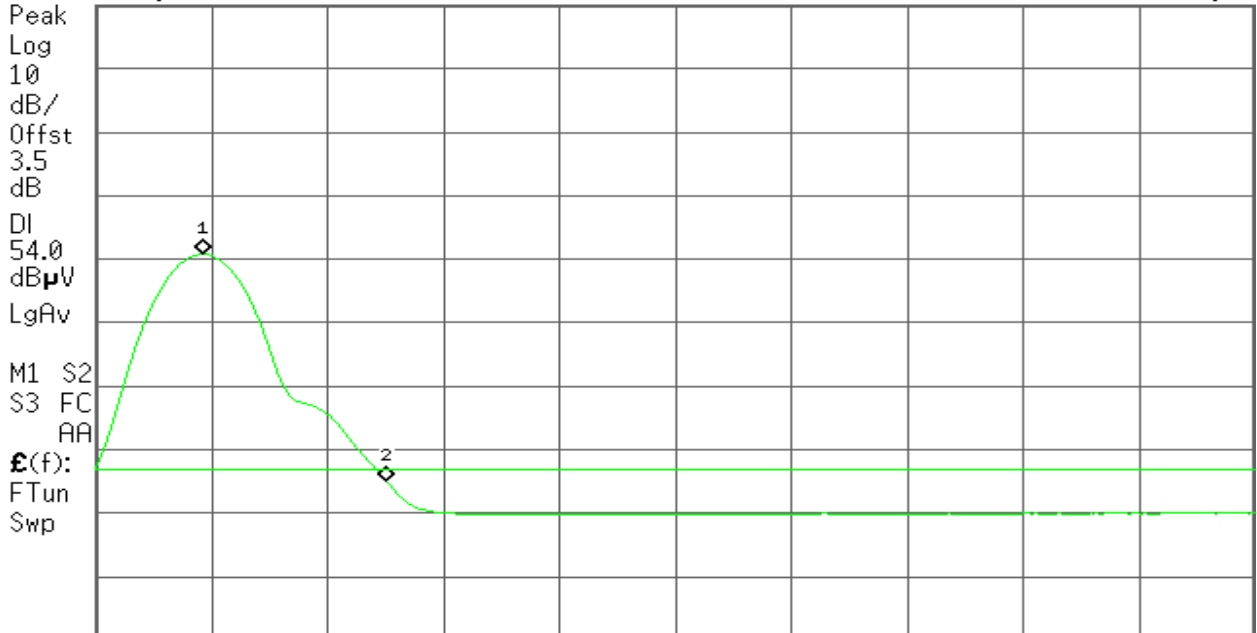

Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 1.715 s (601 pts)



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

3M

CH LOW

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	52.69	42.61	4.80	57.49	47.41	74	54	-16.51	-6.59
2390.00	H	53.18	42.61	4.80	57.98	47.41	74	54	-16.02	-6.59

CH HIGH

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	58.41	46.08	4.80	63.21	50.88	74	54	-10.79	-3.12
2483.50	H	58.32	46.01	4.80	63.12	50.81	74	54	-10.88	-3.19



Refer to attach spectrum analyzer data chart.

Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent


R T

Mkr2 2.390 00 GHz
57.49 dB μ V

Ref 127 dB μ V

Atten 30 dB

Peak
Log
10
dB/
Offst
3.5
dB
DI
74.0
dB μ V
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
#Swp

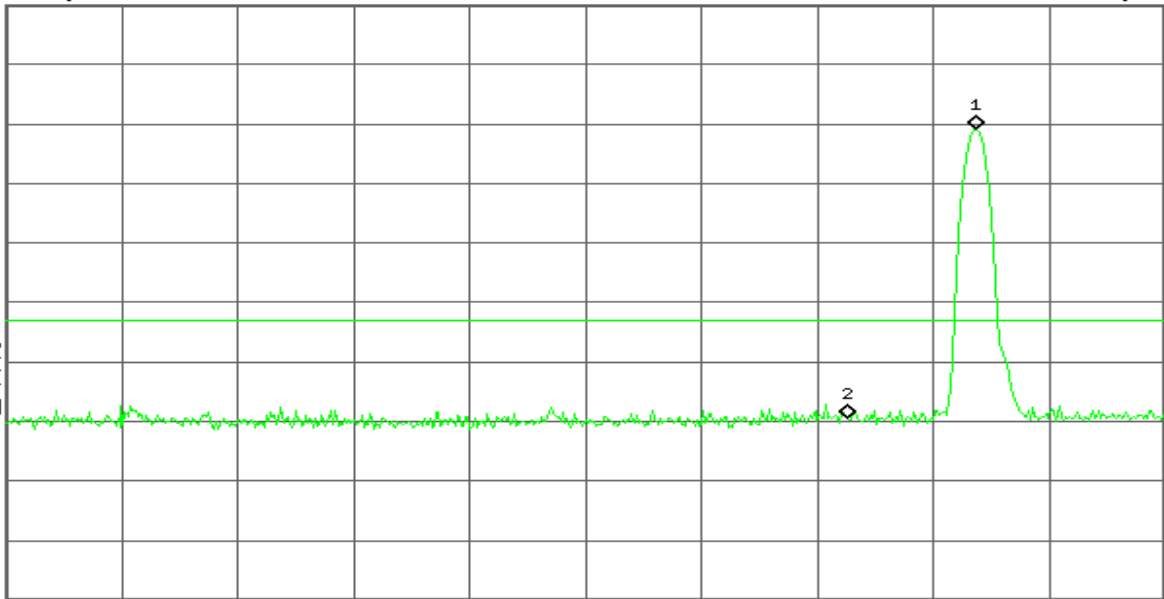

Center 2.365 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Span 110 MHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent


R T

Mkr2 2.390 00 GHz
47.41 dB μ V

Ref 127 dB μ V

Atten 30 dB

Peak
Log
10
dB/
Offst
3.5
dB
DI
54.0
dB μ V
LgAv
M1 S2
S3 FC
AA
E(f):
FTun
#Swp

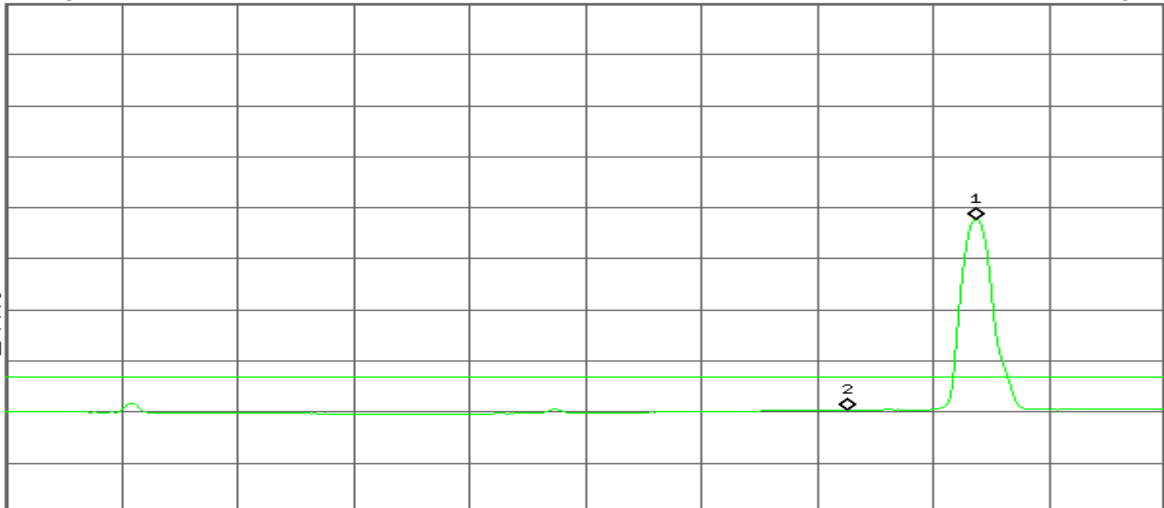

Center 2.365 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Span 110 MHz

Sweep 8.577 s (601 pts)



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.390 00 GHz
57.98 dB μ V

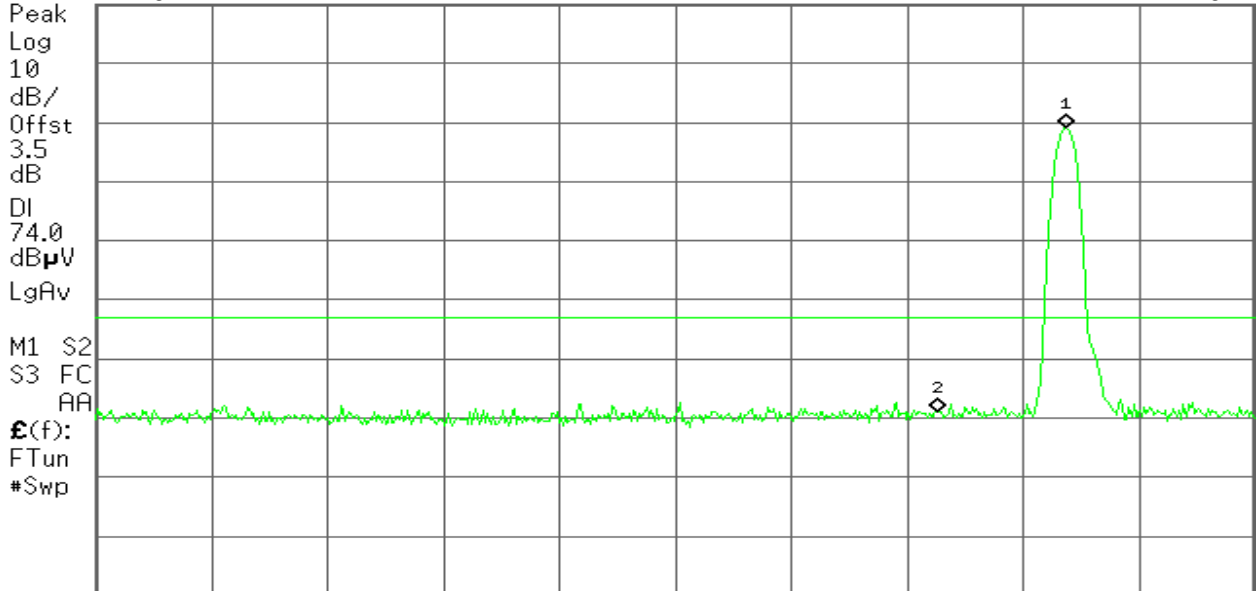

Center 2.365 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Span 110 MHz
Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Horizontal


Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.390 00 GHz
47.41 dB μ V

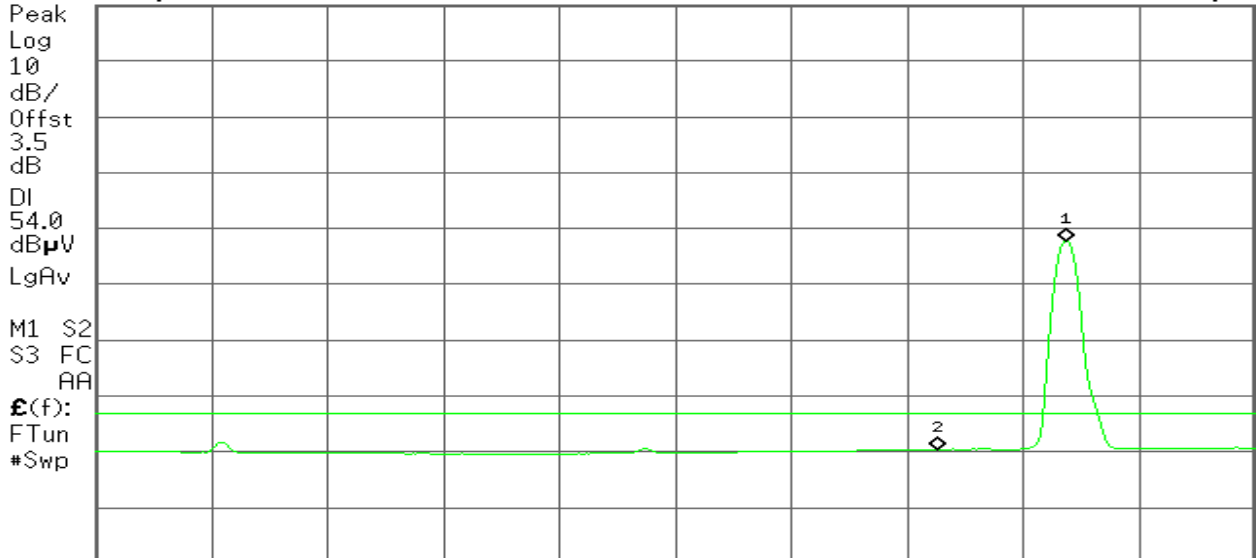

Center 2.365 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Span 110 MHz
Sweep 8.577 s (601 pts)



Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical


Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.483 50 GHz
63.21 dB μ V

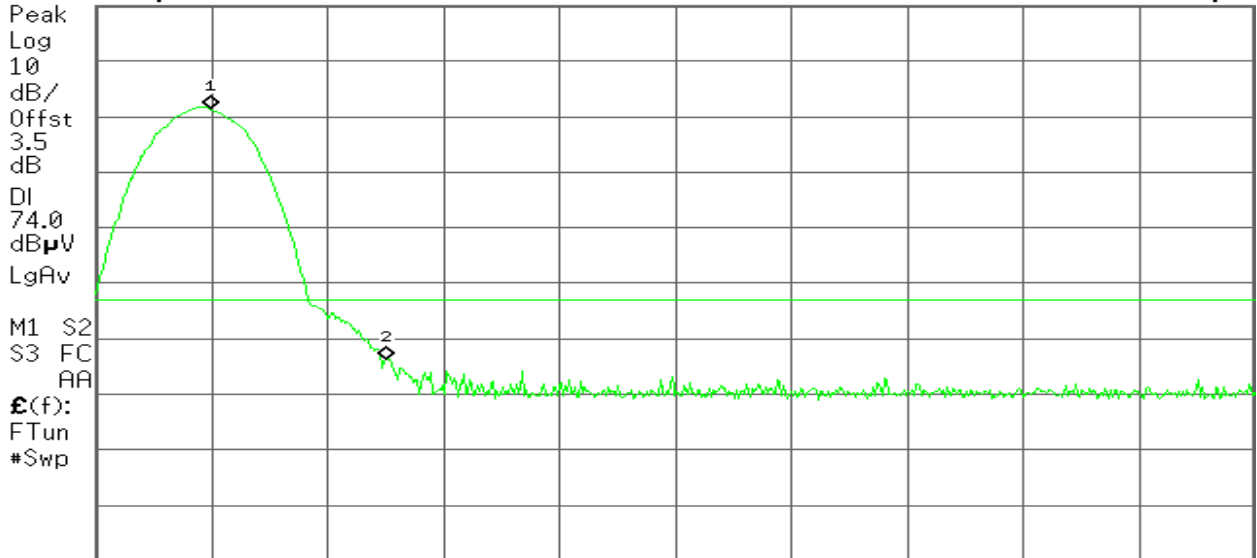

Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Vertical

Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.483 50 GHz
50.88 dB μ V



Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 1.715 s (601 pts)



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

Detector mode: Peak

Polarity: Horizontal


Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.483 50 GHz
63.12 dB μ V

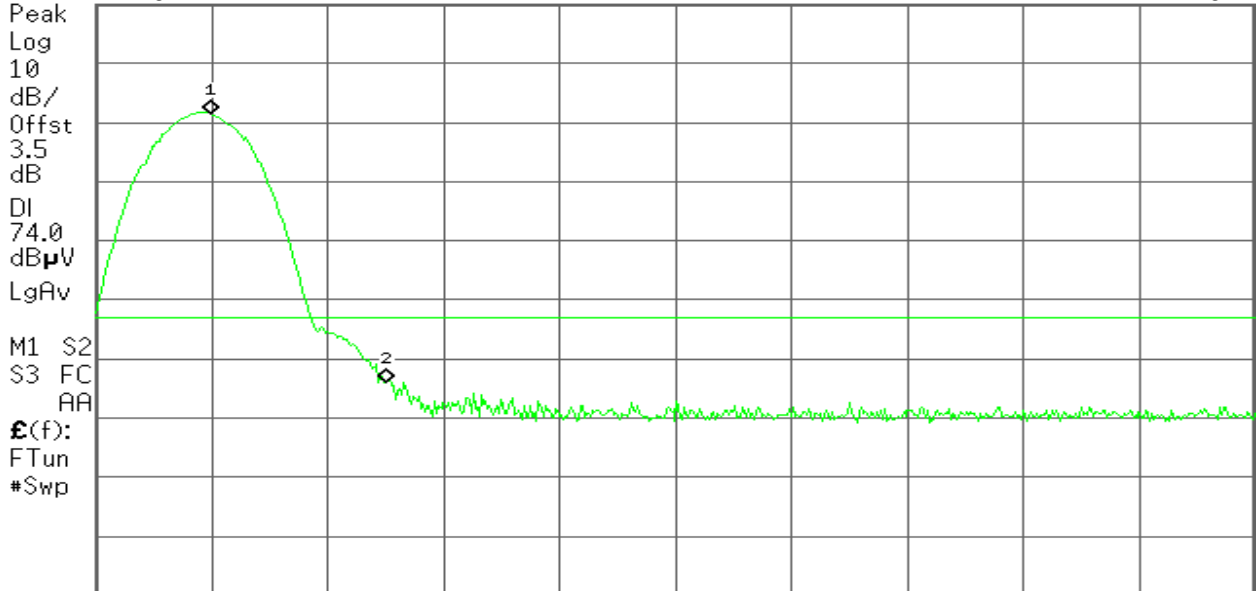

Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 1 MHz

Stop 2.500 00 GHz

Sweep 1 ms (601 pts)

Detector mode: Average

Polarity: Horizontal

Agilent

R T

Ref 127 dB μ V

Atten 30 dB

Mkr2 2.483 50 GHz
50.81 dB μ V



Start 2.478 00 GHz

#Res BW 1 MHz

#VBW 10 Hz

Stop 2.500 00 GHz

Sweep 1.715 s (601 pts)




6.3. PEAK POWER SPECTRAL DENSITY

LIMIT

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 300kHz, Sweep=100s
4. Record the max. reading.
5. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

NA (this test item is not required for FHSS modulation technical)




6.4. FREQUENCY SEPARATION

LIMIT

According to §15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = middle of hopping channel.
4. Set the spectrum analyzer as RBW = 30kHz, VBW = 100kHz, Span = 3MHz, Sweep = auto.
5. Max hold, mark 2 peaks of hopping channel and record the 2 peaks frequency.

TEST RESULTS

No non-compliance noted

Test Data


1M

Channel Separation (MHz)	20dB Band with (kHz)	two-thirds of the 20 dB bandwidth (kHz)	Result
1.000	921.443	614.3	




Test Plot

Measurement of Channel Separation

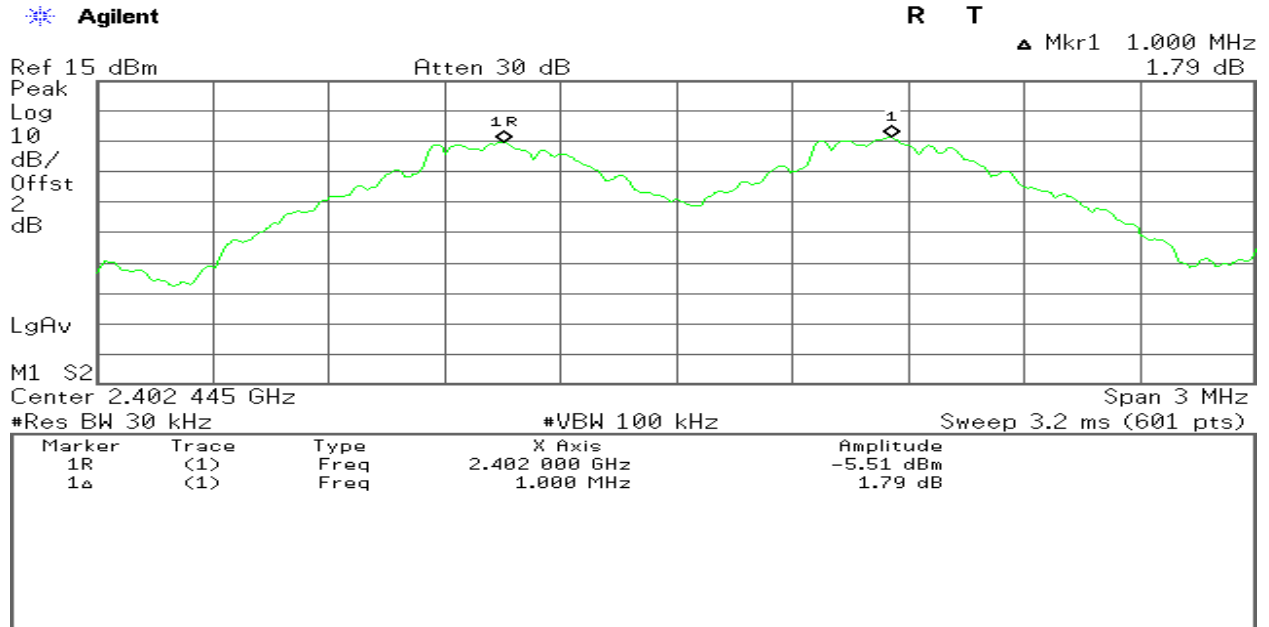

Measurement of 20dB Bandwidth

Channel low

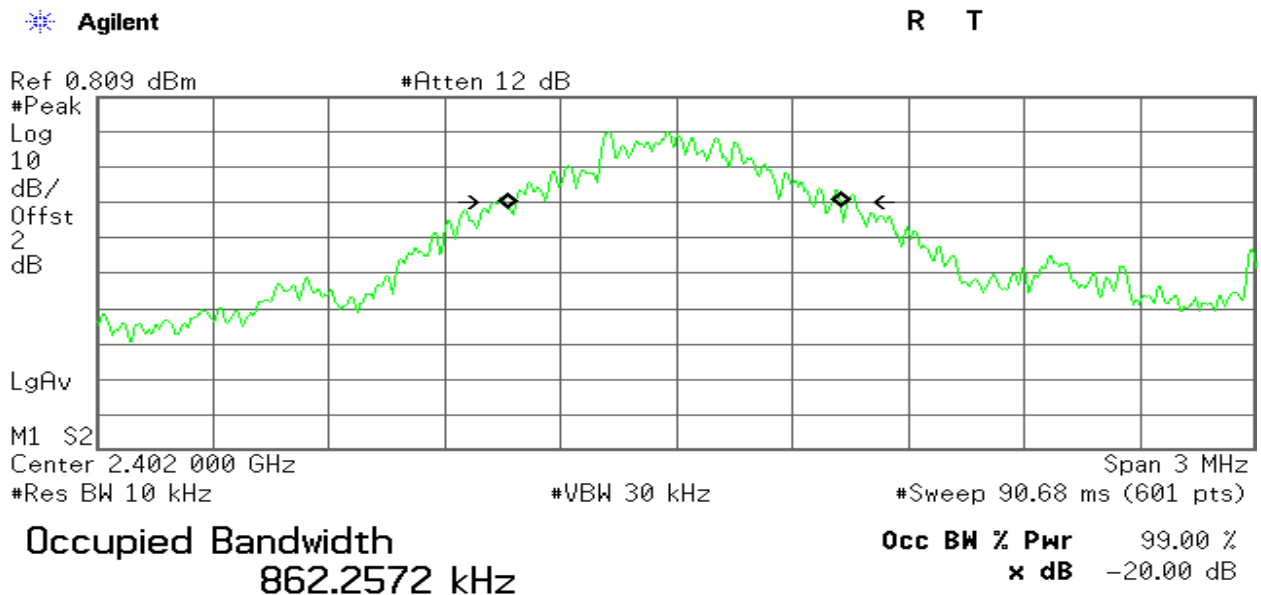

Transmit Freq Error -6.034 kHz
x dB Bandwidth 921.327 kHz




Channel middle

* Agilent

R T

Ref 0.809 dBm

#Atten 12 dB

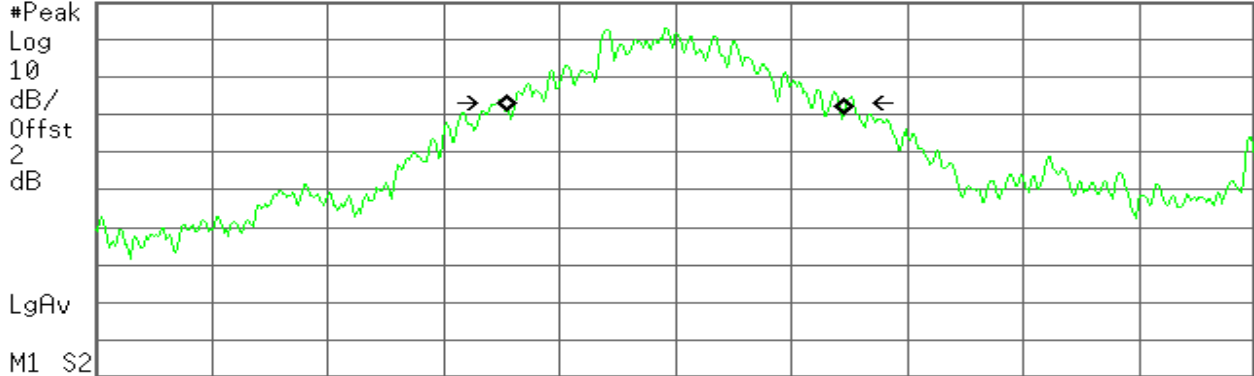

Center 2.441 000 GHz

Span 3 MHz

#Res BW 10 kHz

#VBW 30 kHz

#Sweep 90.68 ms (601 pts)

Occupied Bandwidth
868.4209 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -2.258 kHz
x dB Bandwidth 921.443 kHz


Channel high

* Agilent

R T

Ref 0.809 dBm

#Atten 12 dB

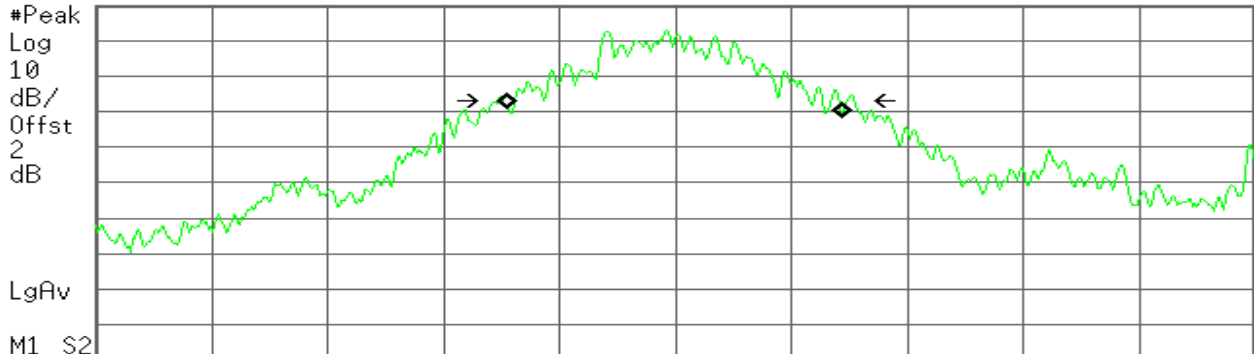

Center 2.480 000 GHz

Span 3 MHz

#Res BW 10 kHz

#VBW 30 kHz

#Sweep 90.68 ms (601 pts)

Occupied Bandwidth
860.1459 kHz

Occ BW % Pwr 99.00 %
x dB -20.00 dB

Transmit Freq Error -3.012 kHz
x dB Bandwidth 915.297 kHz




3M

Channel Separation	20dB Bandwith	two-thirds of the 20 dB bandwidth	Result
(MHz)	(kHz)	(kHz)	
1.000	1205	803.3	Pass


Test Plot

Measurement of Channel Separation

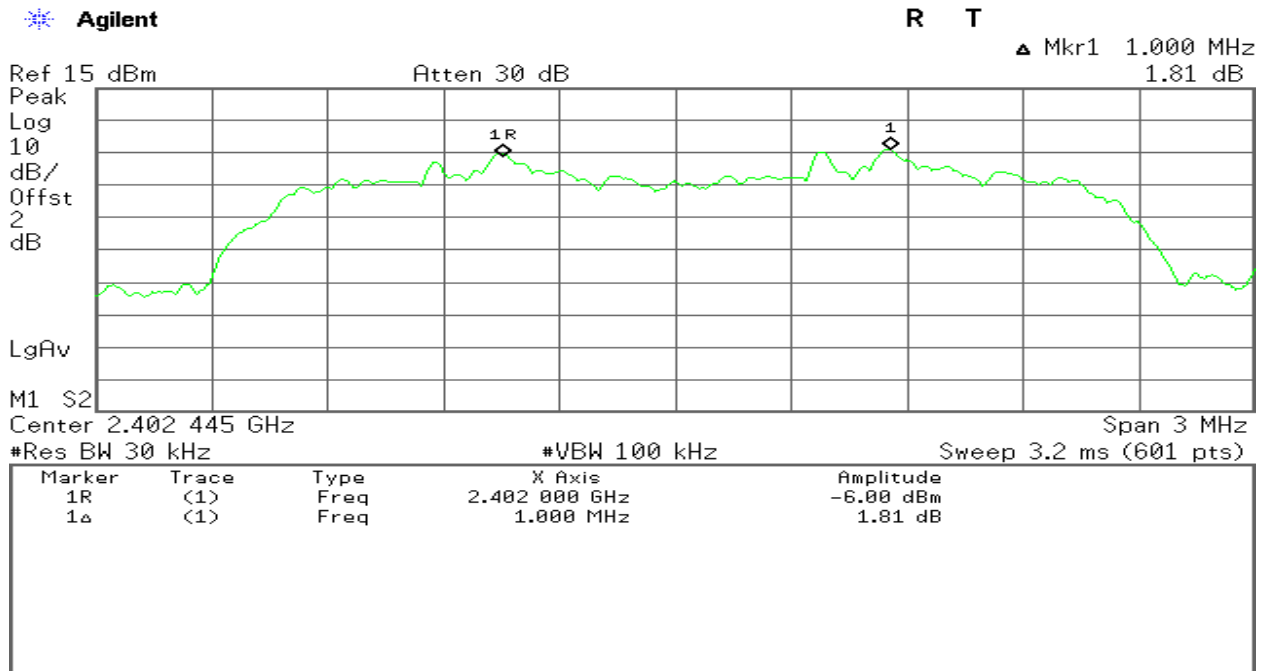

Measurement of 20dB Bandwidth

Channel low

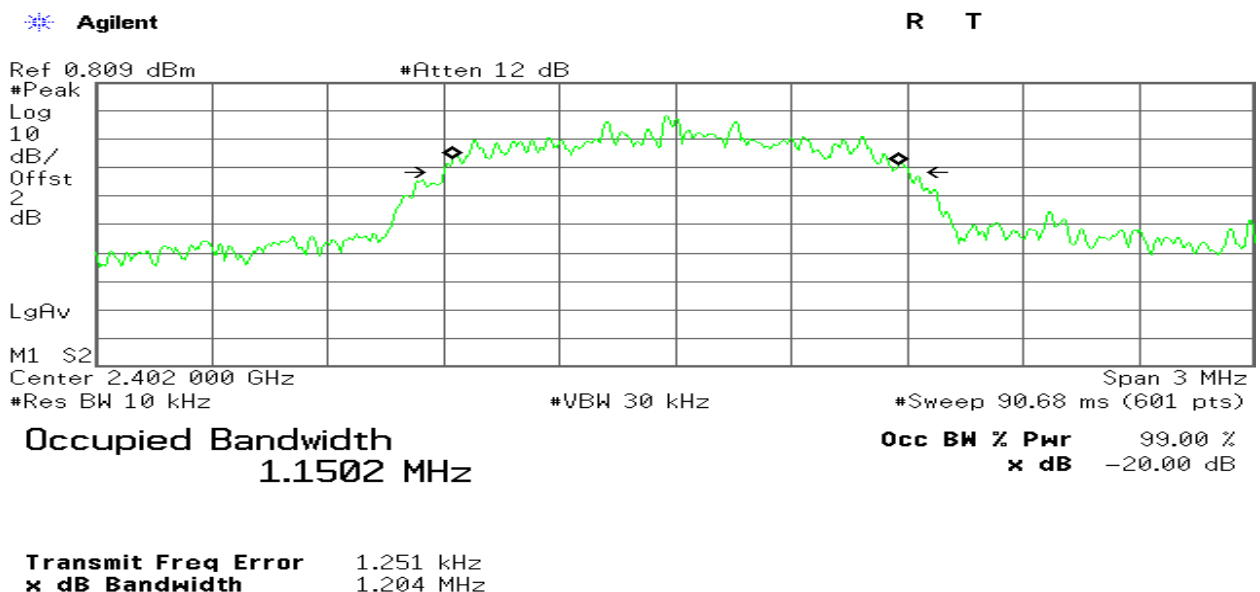



Channel middle

* Agilent

R T

Ref 0.809 dBm

#Atten 12 dB

#Peak
Log
10
dB/
Offst
2
dB

LgAv

M1 S2

Center 2.441 000 GHz

#Res BW 10 kHz

#VBW 30 kHz

#Sweep 90.68 ms (601 pts)

Span 3 MHz

Occupied Bandwidth
1.1475 MHz**Occ BW % Pwr** 99.00 %**x dB** -20.00 dB**Transmit Freq Error** -58.817 Hz
x dB Bandwidth 1.204 MHz

Channel high

* Agilent

R T

Ref 0.809 dBm

#Atten 12 dB

#Peak
Log
10
dB/
Offst
2
dB

LgAv

M1 S2

Center 2.480 000 GHz

#Res BW 10 kHz

#VBW 30 kHz

#Sweep 90.68 ms (601 pts)

Span 3 MHz

Occupied Bandwidth
1.1489 MHz**Occ BW % Pwr** 99.00 %**x dB** -20.00 dB**Transmit Freq Error** 1.293 kHz
x dB Bandwidth 1.205 MHz




6.5. NUMBER OF HOPPING FREQUENCY

LIMIT

According to §15.247(a)(1)(ii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set spectrum analyzer Start=2400MHz, Stop = 2441.5MHz, Sweep = auto and Start=2441.5MHz, Stop = 2483.5MHz, Sweep = auto.
4. Set the spectrum analyzer as RBW, VBW=100kHz.
5. Max hold, view and count how many channel in the band.

TEST RESULTS

No non-compliance noted

Test Data

1M

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS



Test Plot

Channel Number

2.4 GHz – 2.4415 GHz

Agilent

R T

Mkr1 2.441 00 GHz
-0.69 dBm

Ref 30 dBm


#Atten 40 dB

Peak
Log
10
dB/
Offst
2
dB

LgAv

M1 S2
S3 FC
RA

£(f):
FTun
Swp

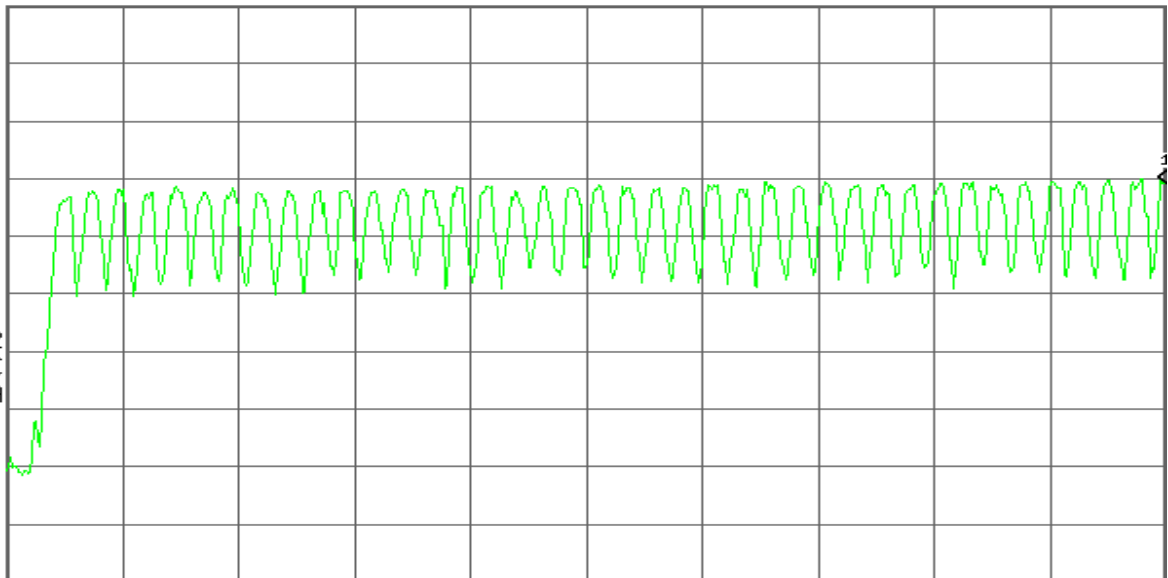

Start 2.400 00 GHz

Stop 2.441 00 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 4.96 ms (601 pts)

2.4415 GHz – 2.4835 GHz

Agilent

R T

Mkr1 2.441 14 GHz
-1.10 dBm

Ref 30 dBm


#Atten 40 dB

Peak
Log
10
dB/
Offst
2
dB

LgAv

M1 S2
S3 FC
RA

£(f):
FTun
Swp

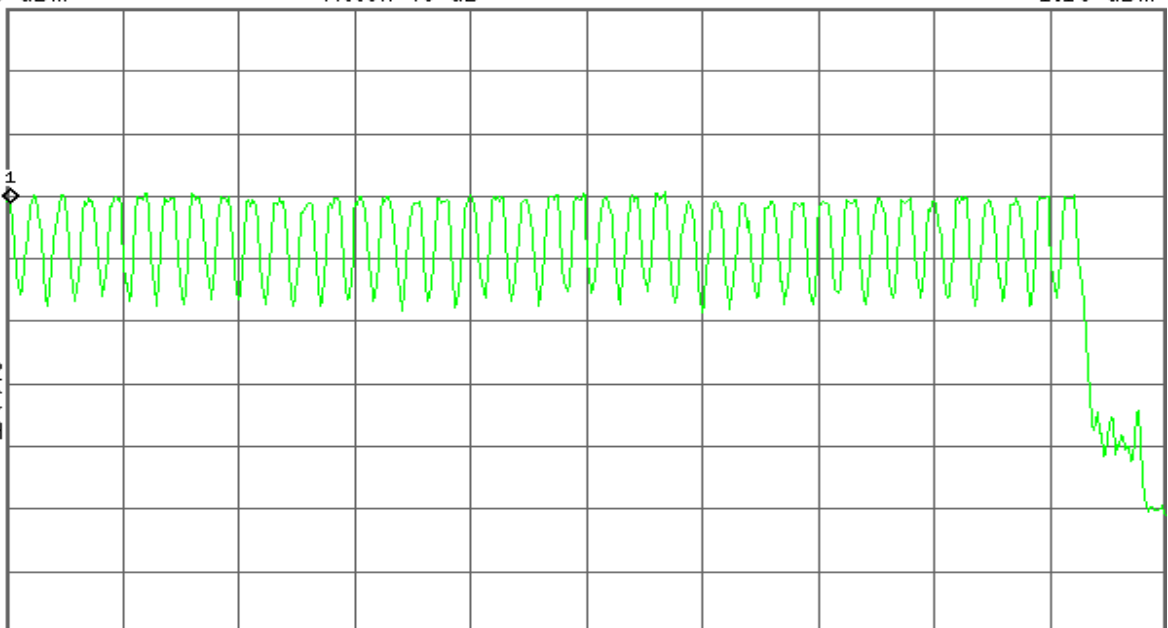

Start 2.441 00 GHz

Stop 2.483 50 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 5.16 ms (601 pts)




3M

Result (No. of CH)	Limit (No. of CH)	Result
79	>15	PASS


Test Plot

Channel Number

2.4 GHz – 2.4415 GHz

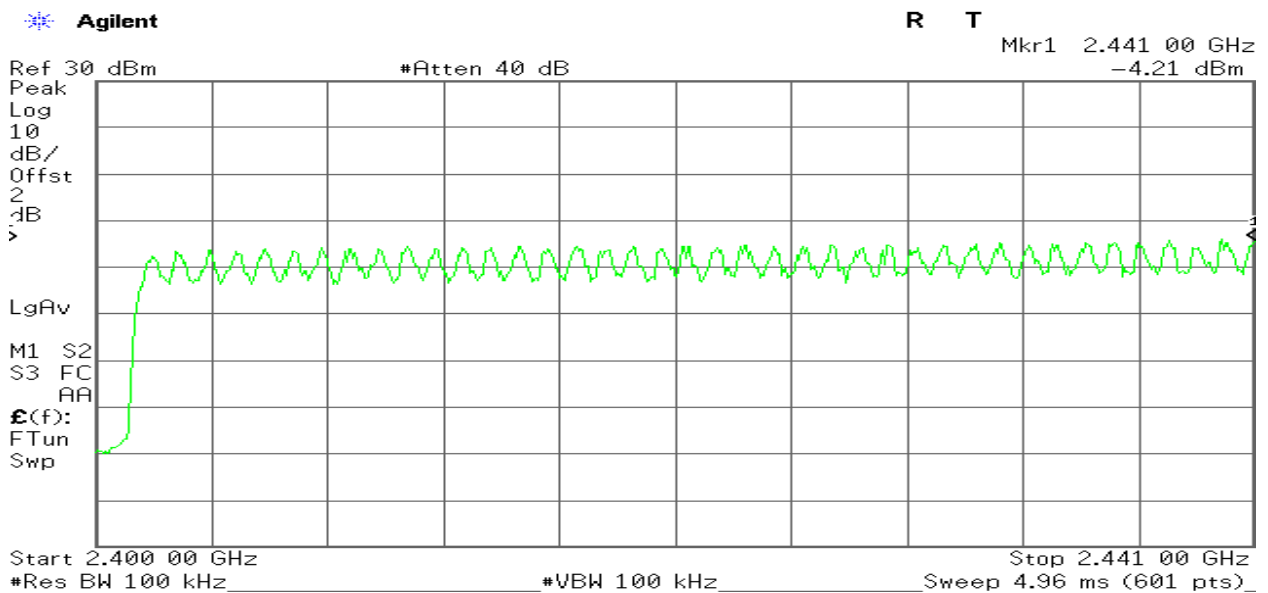

2.4415 GHz – 2.4835 GHz

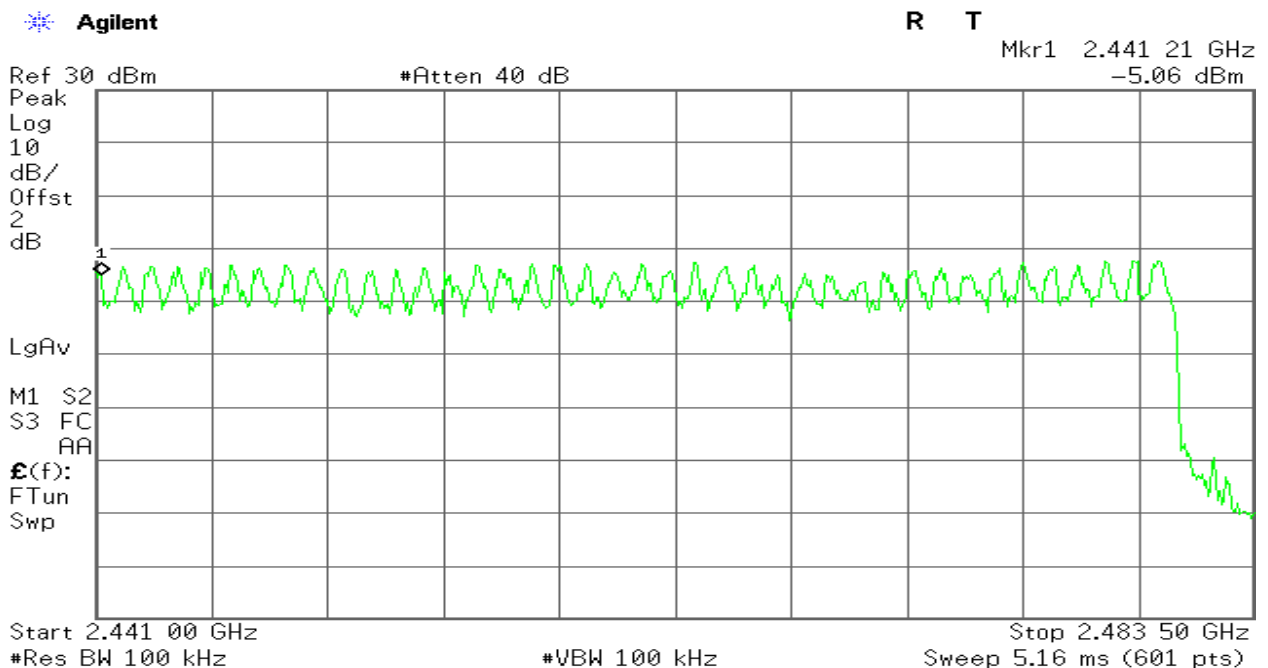




6.6. TIME OF OCCUPANCY (DWELL TIME)

LIMIT

According to §15.247(a)(1)(iii), Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands. The average time of occupancy on any channels shall not greater than 0.4 s within a period 0.4 s multiplied by the number of hopping channels employed.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz, Sweep = auto.
5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

No non-compliance noted



Test Data

1M

DH 1

$$0.400 * (1600/2)/79 * 31.6 = 128.00 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.400	128.00	31.60	400	PASS

DH 3

$$1.57 * (1600/4)/79 * 31.6 = 251.20 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.57	251.20	31.60	400	PASS

DH 5

$$2.87 * (1600/6)/79 * 31.6 = 306.1 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.87	306.1	31.60	400	PASS



Test Plot

DH 1


* Agilent

R T

▲ Mkr1 400 μ s
-0.01 dBRef 30 dBm
Norm
Log
10
dB/
Offst
2
dB

#Atten 40 dB

LgAv

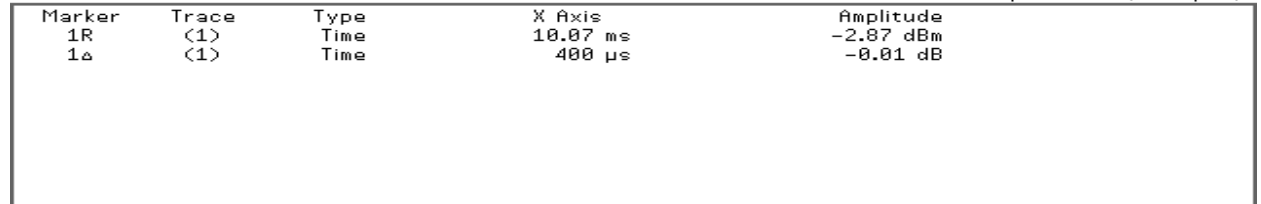W1 S2
Center 2.402 000 GHz Span 0 Hz
Res BW 1 MHz #VBW 1 MHz Sweep 20 ms (601 pts)

DH 3


* Agilent

R T

▲ Mkr1 1.567 ms
0.58 dBRef 30 dBm
Norm
Log
10
dB/
Offst
2
dB

#Atten 40 dB

LgAv

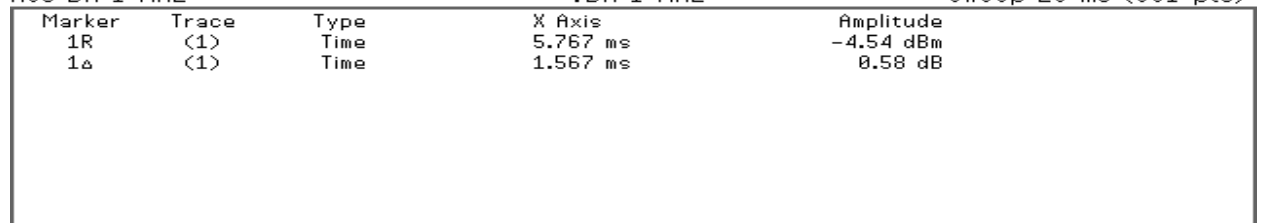W1 S2
Center 2.402 000 GHz Span 0 Hz
Res BW 1 MHz #VBW 1 MHz Sweep 20 ms (601 pts)




DH 5

Agilent

R T

▲ Mkr1 2.867 ms
-0.03 dB

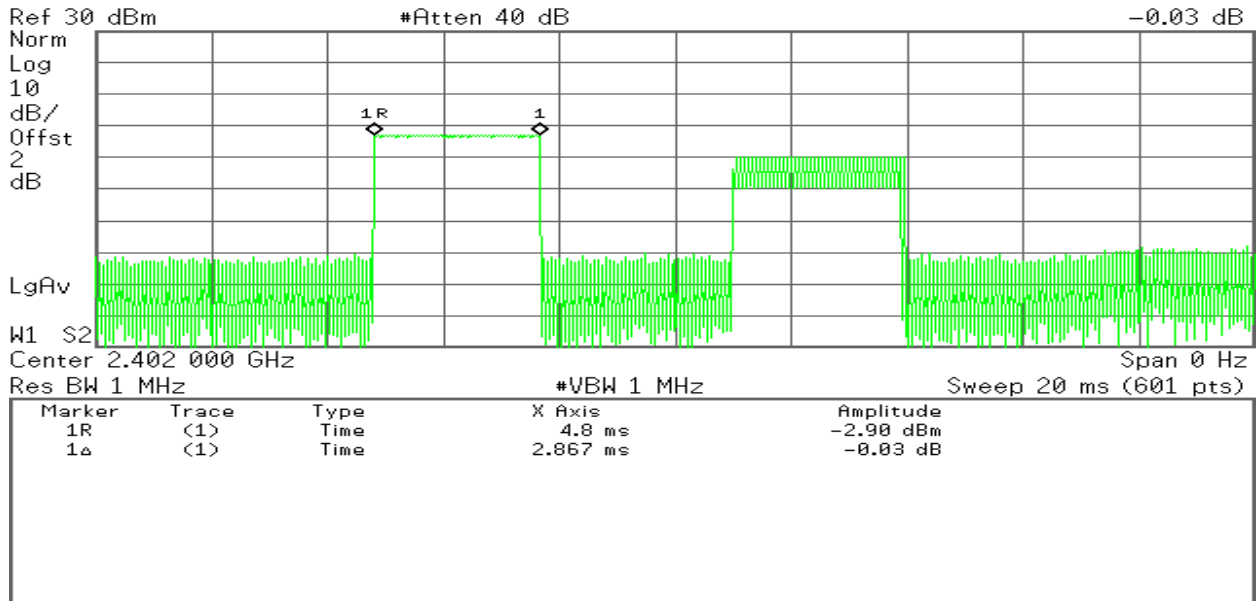

3M

DH 1

$$0.4 * (1600/2)/79 * 31.6 = 128 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
0.4	128	31.60	400	PASS

DH 3

$$1.57 * (1600/4)/79 * 31.6 = 251.2 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
1.57	251.20	31.60	400	PASS

DH 5

$$2.87 * (1600/6)/79 * 31.6 = 306.1 \text{ (ms)}$$

Pulse Time (ms)	Total of Dwell (ms)	Period Time (s)	Limit (ms)	Result
2.87	306.1	31.60	400	PASS



Test Plot

DH 1

* Agilent

R T

▲ Mkr1 400 μ s
0.66 dB

Ref 30 dBm

#Atten 40 dB

Norm
Log
10
dB/
Offst
2
dB

LgAv

W1 S2

Center 2.402 000 GHz

Span 0 Hz

Res BW 1 MHz

#VBW 1 MHz

Sweep 20 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	9.8 ms	-4.59 dBm
1Δ	(1)	Time	400 μ s	0.66 dB

DH 3

* Agilent

R T

▲ Mkr1 1.567 ms
0.98 dB

Ref 30 dBm

#Atten 40 dB

Norm
Log
10
dB/
Offst
2
dB

LgAv

W1 S2

Center 2.402 000 GHz

Span 0 Hz

Res BW 1 MHz

#VBW 1 MHz

Sweep 20 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	5.767 ms	-5.54 dBm
1Δ	(1)	Time	1.567 ms	0.98 dB



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

DH 5

Agilent

R T

▲ Mkr1 2.867 ms
0.78 dB

Ref 30 dBm

#Atten 40 dB

Norm
Log
10
dB/
Offst
2
dB

LgAv

W1 S2

Center 2.402 000 GHz

Span 0 Hz

Res BW 1 MHz

#VBW 1 MHz

Sweep 20 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1R	(1)	Time	4.067 ms	-3.61 dBm
1Δ	(1)	Time	2.867 ms	0.78 dB




6.7. SPURIOUS EMISSIONS

Conducted Measurement

LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 KHz. The video bandwidth is set to 100 KHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted

Test Plot




1M

CH Low

30MHz ~ 2.9GHz

* Agilent

R T

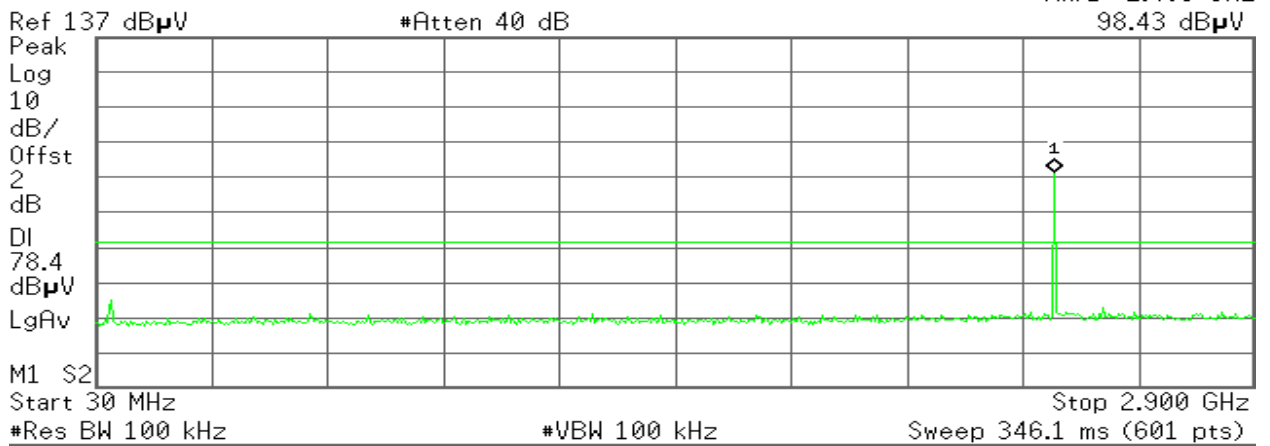


Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.403 GHz	98.43 dB μ V

2.9GHz ~ 26.5GHz

* Agilent

R T

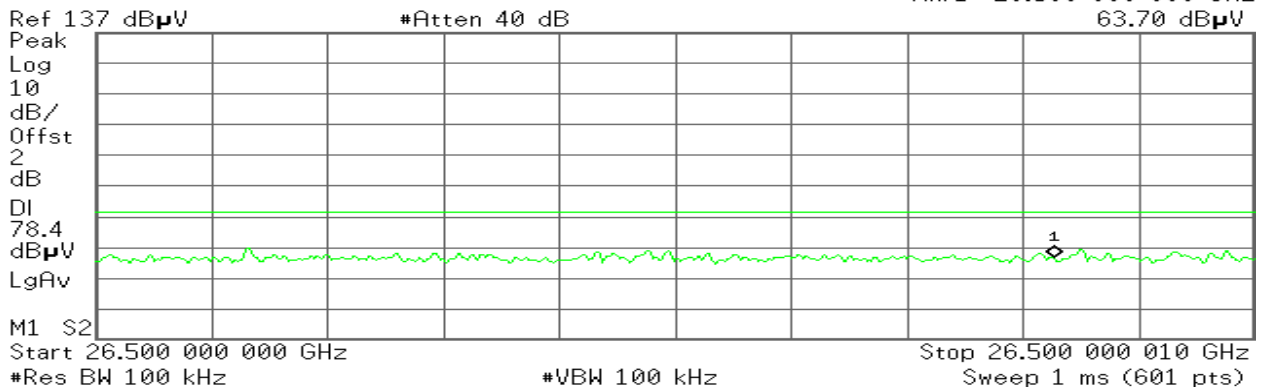

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	26.500 000 008 GHz	63.70 dB μ V




CH Mid

30MHz ~ 2.9GHz

* Agilent


R T

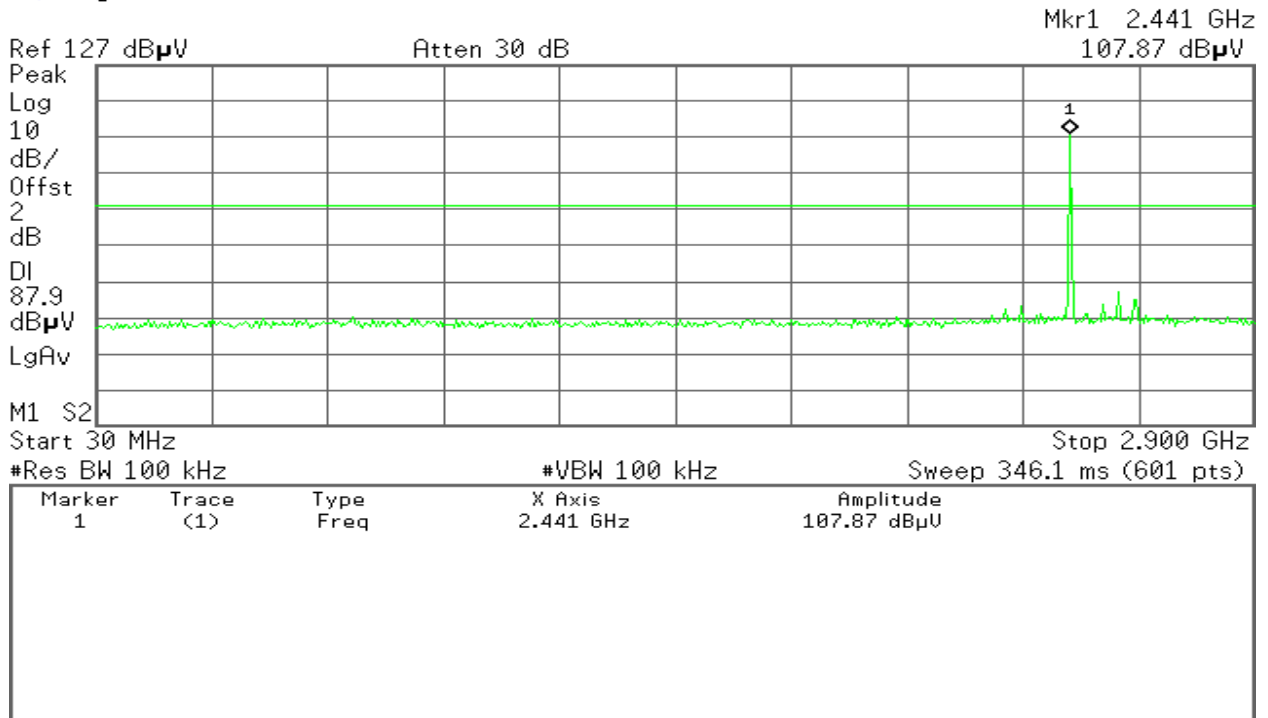

2.9GHz ~ 26.5GHz

* Agilent

R T

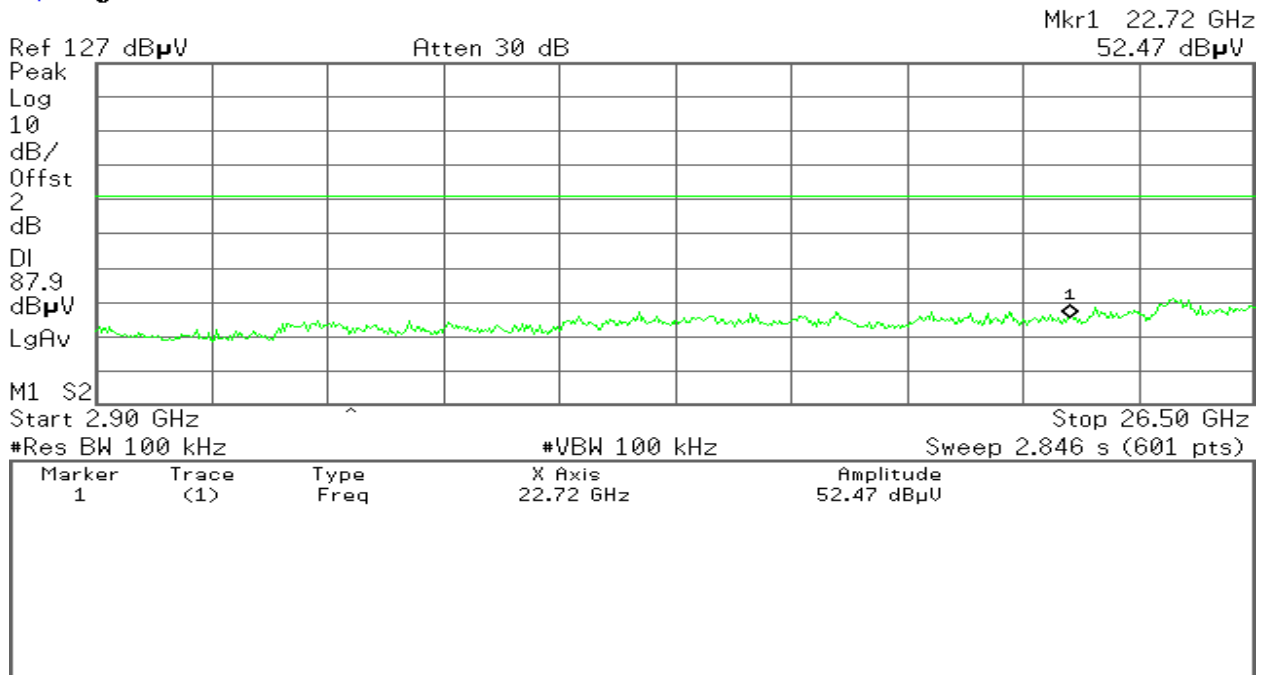




CH High

30MHz ~ 2.9GHz

* Agilent


R T

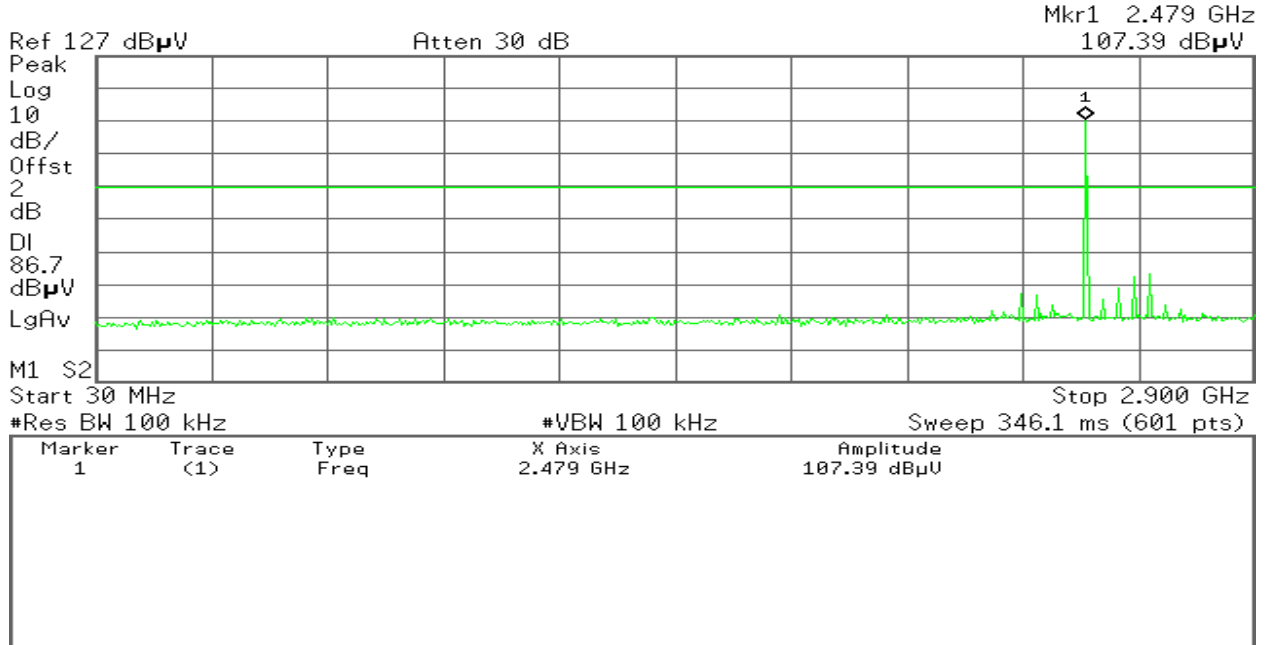

2.9GHz ~ 26.5GHz

* Agilent

R T

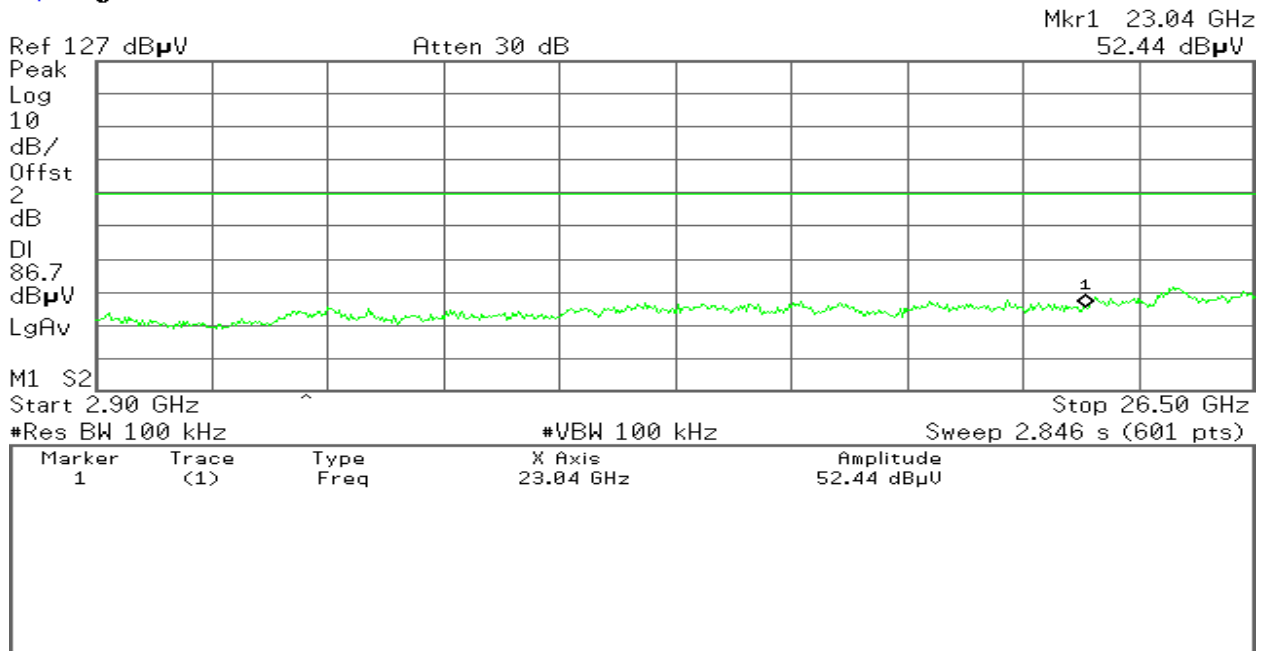



3M

CH Low


30MHz ~ 2.9GHz

* Agilent

R T

Ref 127 dB μ V

Atten 30 dB

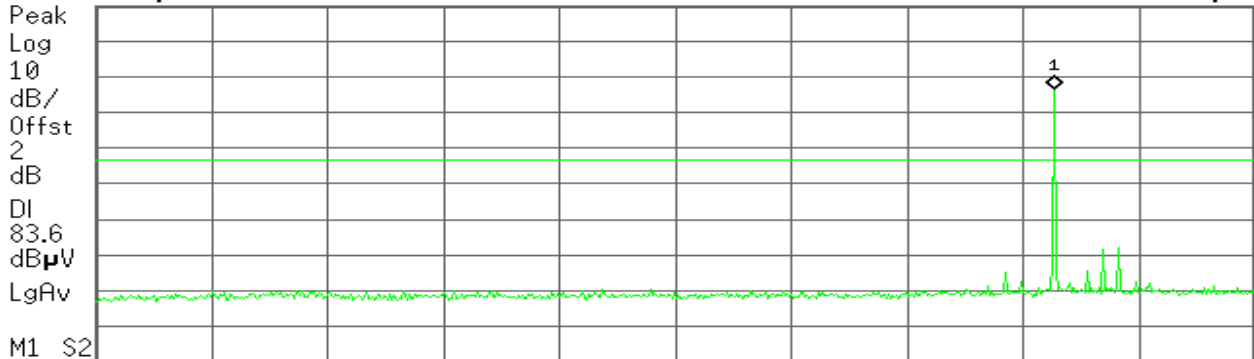Mkr1 2.403 GHz
103.64 dB μ V

M1 S2

Start 30 MHz

Stop 2.900 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 346.1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.403 GHz	103.64 dB μ V


2.9GHz ~ 26.5GHz

* Agilent

R T

Ref 127 dB μ V

Atten 30 dB

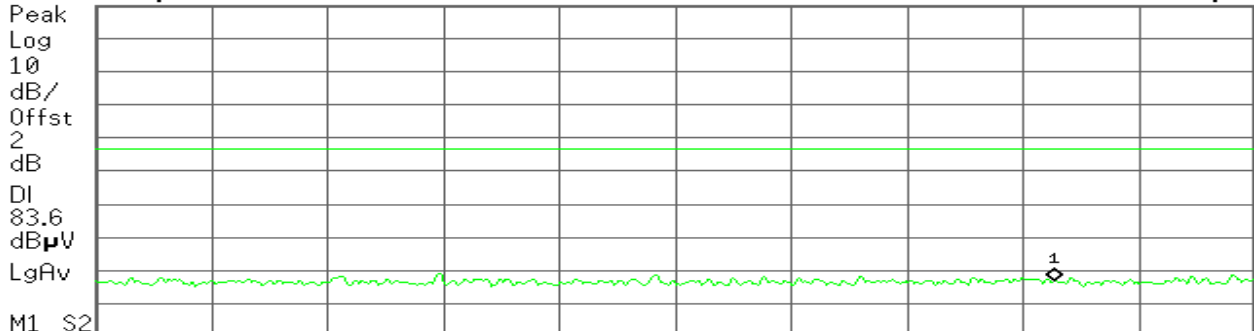Mkr1 26.499 998 MHz
43.68 dB μ V

M1 S2

Start 26.499 990 MHz

Stop 26.500 000 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	26.499 998 MHz	43.68 dB μ V




CH Mid

30MHz ~ 2.9GHz

* Agilent


R T

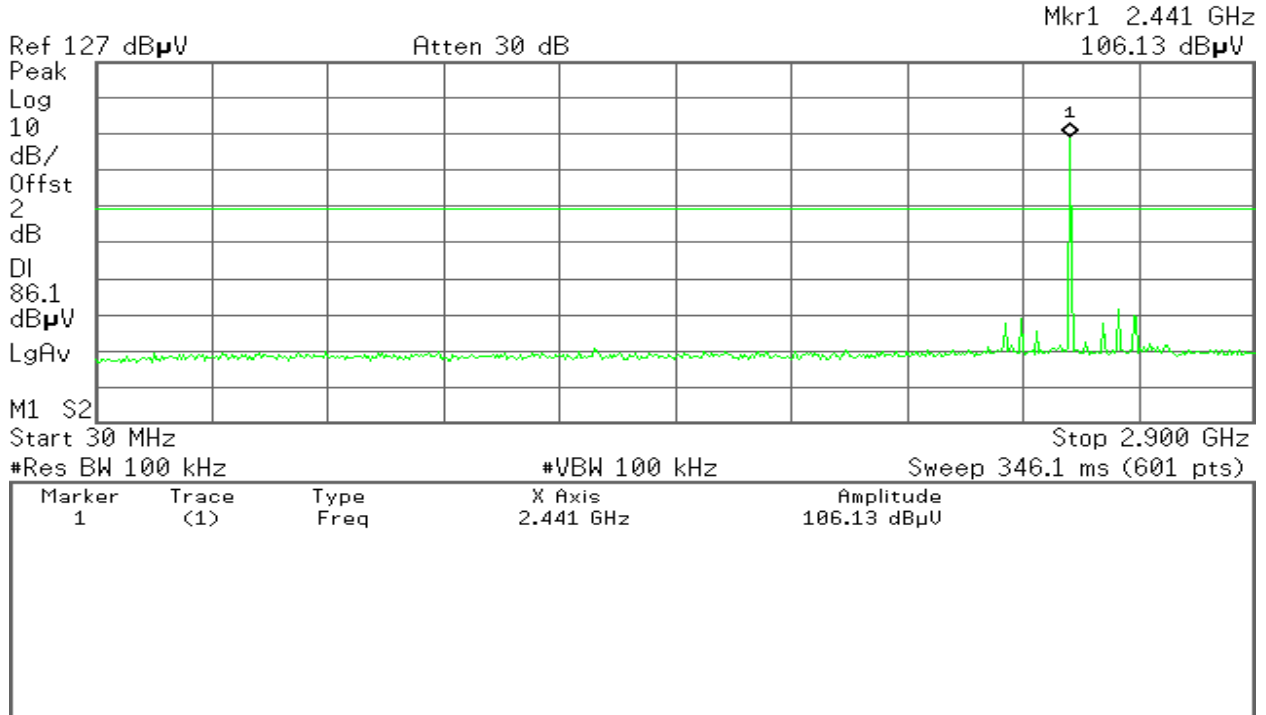

2.9GHz ~ 26.5GHz

* Agilent

R T

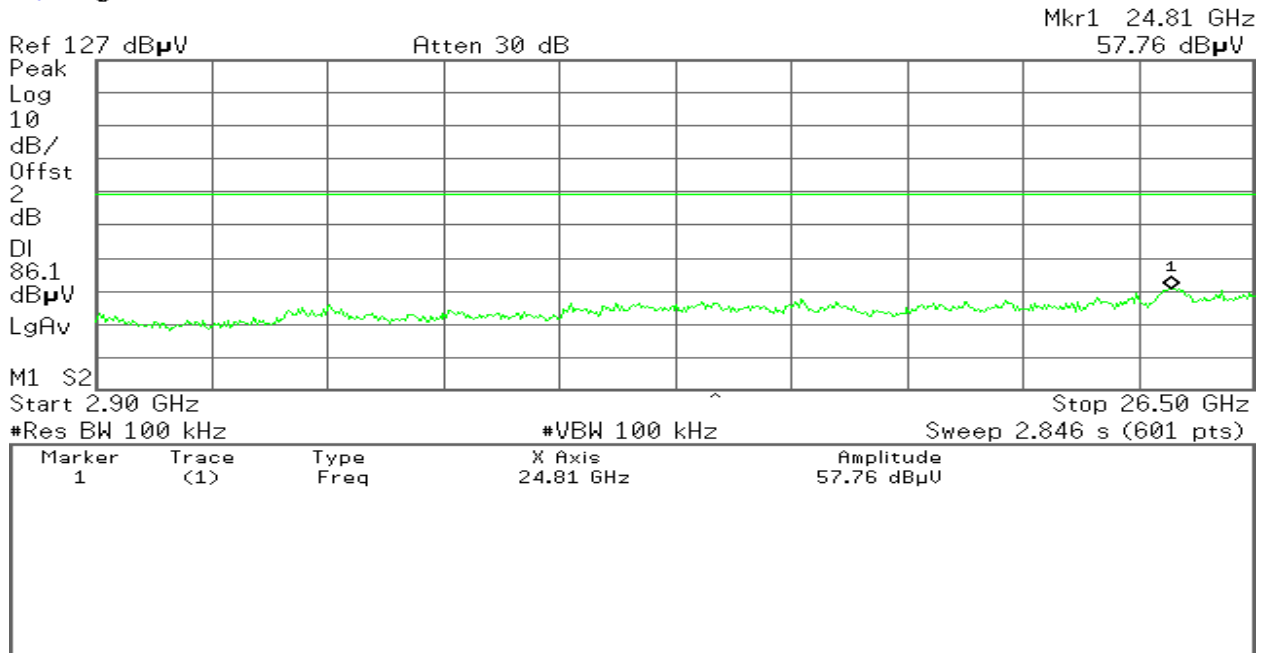




CH High

30MHz ~ 2.9GHz

* Agilent


R T

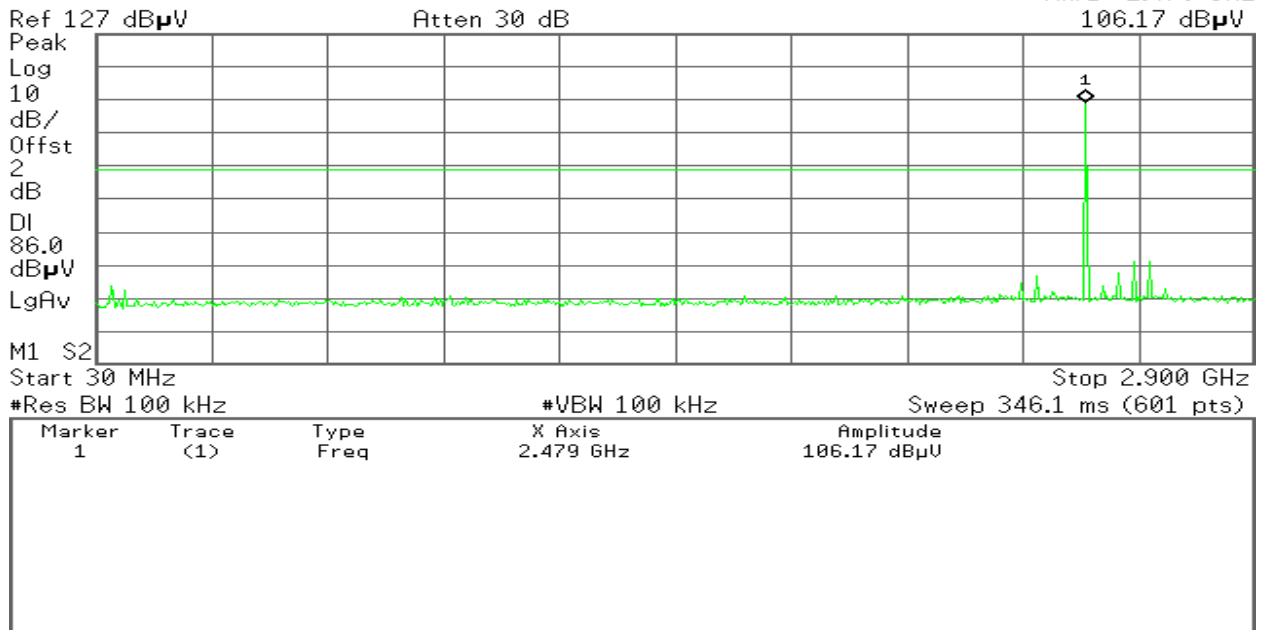

2.9GHz ~ 26.5GHz

* Agilent

R T

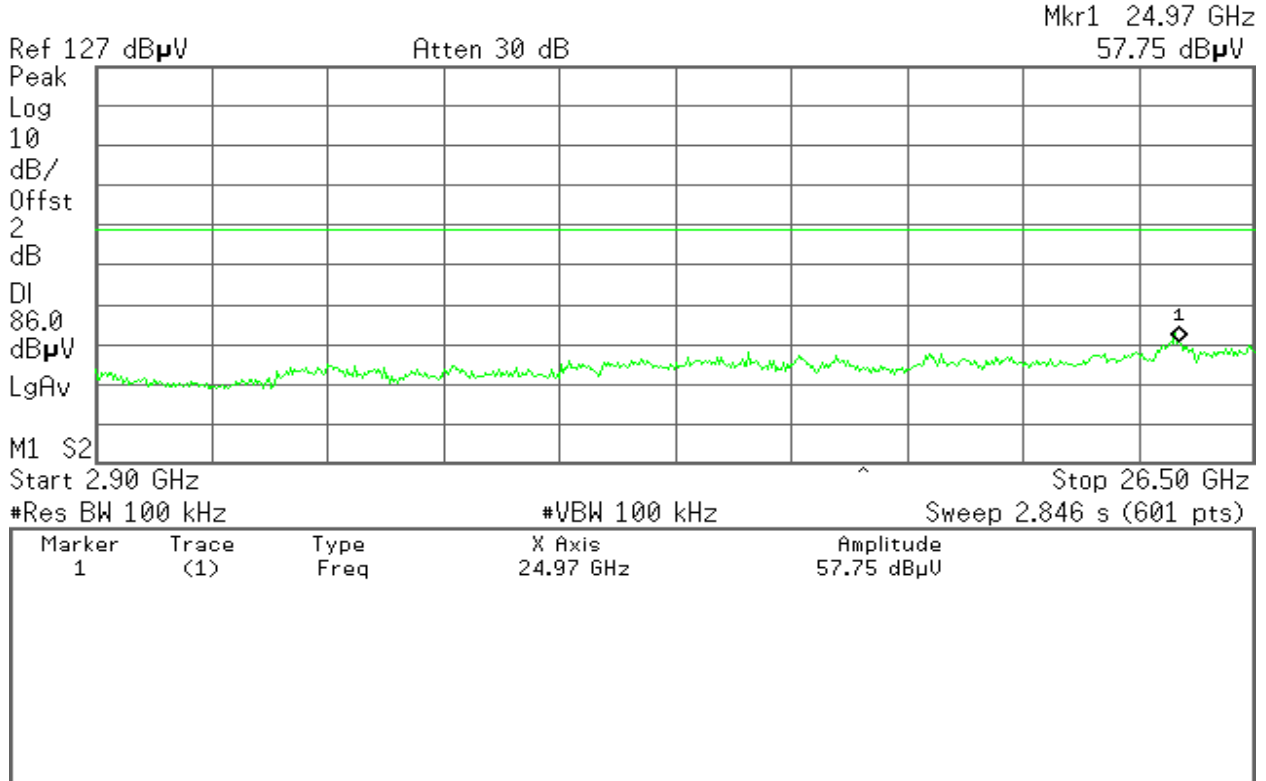



Radiated Emissions

LIMIT

1. Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the above emission table, the tighter limit applies at the band edges.

Frequency (Hz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength ($\text{dB}\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54


Test Configuration

Below 30MHz

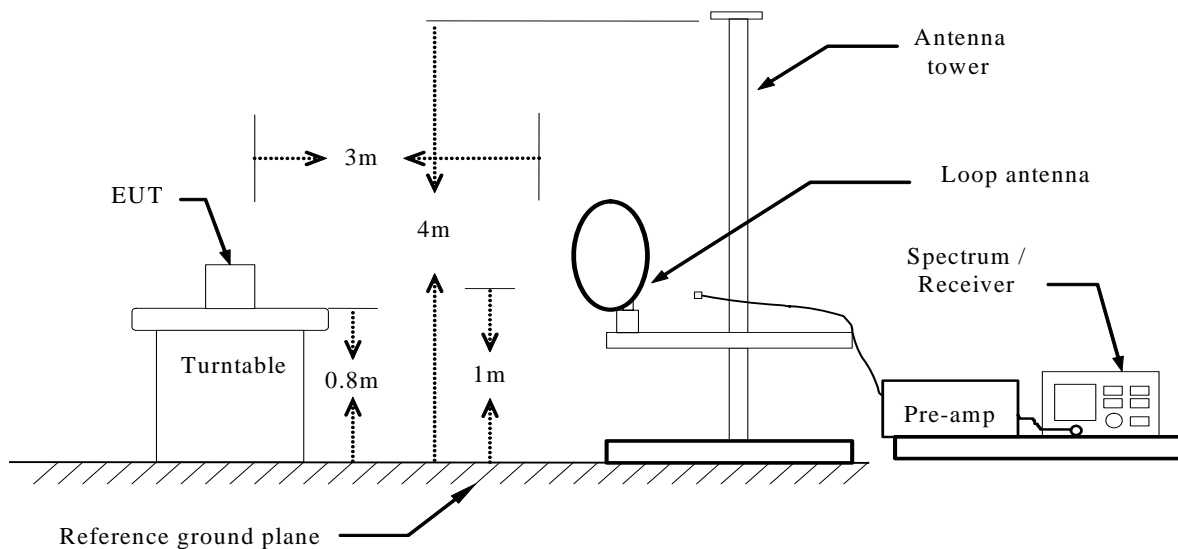




Below 1 GHz

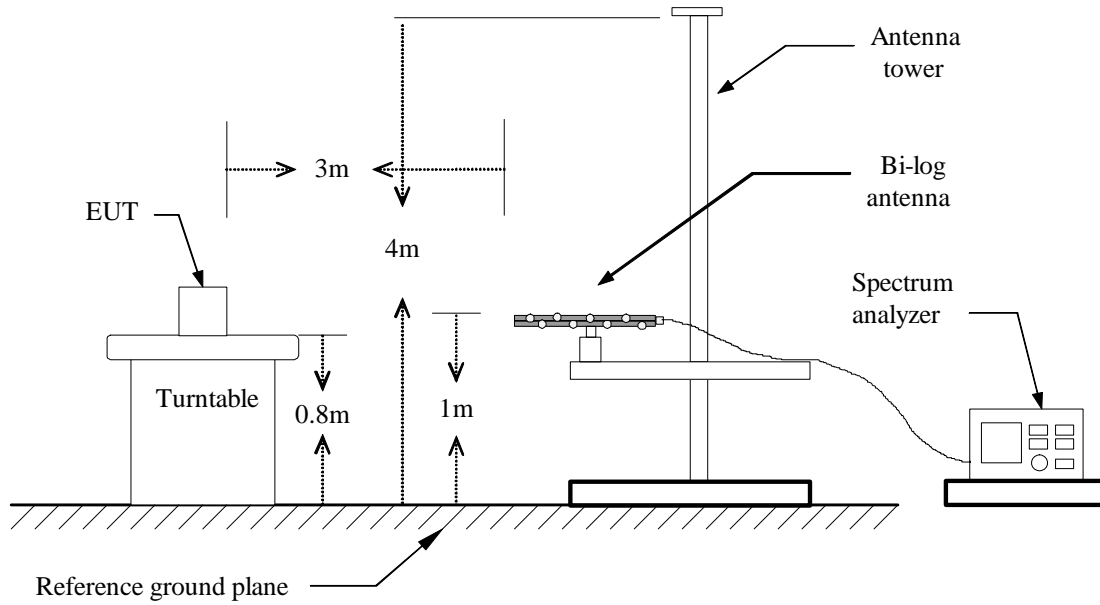

Above 1 GHz

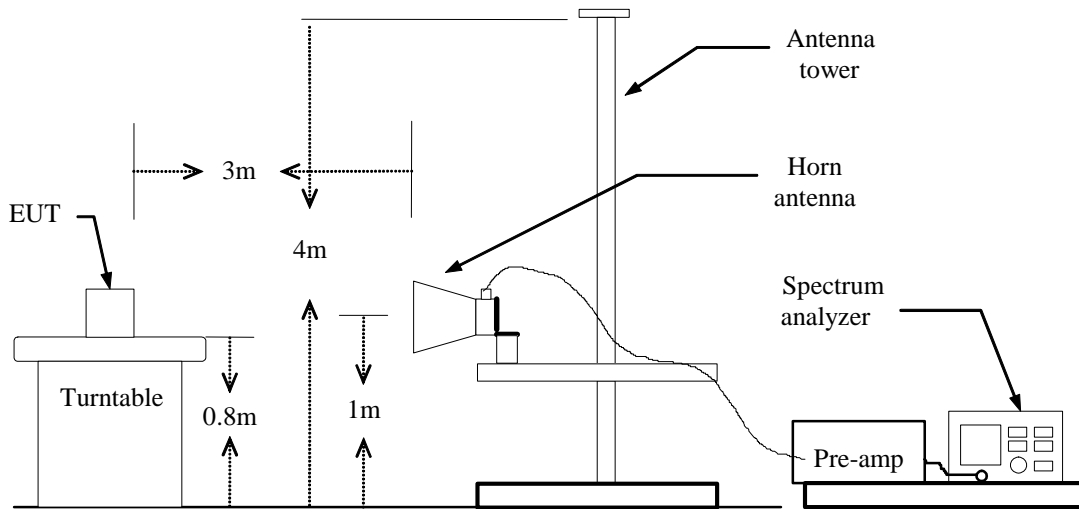



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

TEST RESULTS

Below 1 GHz

Operation Mode: Normal Link(with WIFI on)

Test Date: Jan 10,2012

Temperature: 23°C

Tested by: Sean

Humidity: 50 % RH

Polarity: Ver. / Hor.

Freq.	Ant.Pol.	Detector	Reading	Factor	Actual FS	Limit 3m	Safe Margin
(MHz)	H/V	Mode	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
		(PK/QP)					
37.59	V	Peak	40.68	-6.24	34.44	40.0	-5.56
109.58	V	Peak	43.59	-10.41	33.18	43.5	-10.32
183.67	V	Peak	45.61	-10.77	34.84	43.5	-8.66
272.95	V	Peak	48.58	-8.68	39.9	46.0	-6.1
412.86	V	Peak	41.25	-4.18	37.07	46.0	-8.93
961.77	V	Peak	39.77	4.55	44.32	54.0	-9.68
41.74	H	Peak	41.89	-10.78	31.11	40	-8.89
90.88	H	Peak	46.53	-14.92	31.61	43.5	-11.89
188.56	H	Peak	43.56	-10.83	32.73	43.5	-10.77
233.64	H	Peak	46.35	-9.81	36.54	46.0	-9.46
372.68	H	Peak	43.68	-5.28	38.4	46.0	-7.6
962.35	H	Peak	43.98	4.56	48.54	54.0	-5.46

Notes:

1. Measuring frequencies from 9 KHz to the 1GHz, No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9 KHz to 1000MHz were made with an instrument using Peak detector mode.
3. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
4. The IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1 FCC ID: WL6-BR95IIX6230 Date of Issue :Jan11,2012

Above 1 GHz

1M

Operation Mode: TX/ CH Low(with WIFI on)

Test Date: Jan 10,2012

Temperature: 23°C

Tested by: Sean

Humidity: 50 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	Margin	Remark
		Reading	Reading	CF	Peak	AV	Limit	Limit		
		(dBuV)	(dBuV)	(dB)			(dBuV/m)	(dBuV/m)	(dB)	
4804.77	V	40.89	30.65	10.85	51.74	41.50	74	54	-12.50	average
7203.38	V	40.00	27.33	18.37	58.37	45.70	74	54	-8.30	average
4806.21	H	38.99	29.68	10.84	49.83	40.52	74	54	-13.48	average
7356.23	H	39.66	28.76	18.37	58.03	47.13	74	54	-6.87	average

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1 FCC ID: WL6-BR95IIX6230 Date of Issue :Jan11,2012

Operation Mode: TX/ CH Mid(with WIFI on)

Test Date: Jan 10,2012

Temperature: 23°C

Tested by: Sean

Humidity: 50 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak (dBuV/m)	AV (dBuV/m)				
4884.48	V	38.36	27.42	11.26	49.62	38.68	74	54	-15.32	average
7326.47	V	41.42	25.48	19.28	60.7	44.76	74	54	-9.24	average
4885	H	38.19	27.46	11.26	49.45	38.72	74	54	-15.28	average
7333.67	H	40.42	24.53	19.31	59.73	43.84	74	54	-10.16	average

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1 FCC ID: WL6-BR95IIX6230 Date of Issue :Jan11,2012

Operation Mode: TX/ CH High(with WIFI on)

Test Date: Jan 10,2012

Temperature: 23°C

Tested by: Sean

Humidity: 50 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	Margin	Remark
		Reading	Reading	CF	Peak	AV	Limit	Limit	(dB)	
		(dBuV)	(dBuV)	(dB)			(dBuV/m)	(dBuV/m)		
4958.63	V	40.32	31.23	11.32	51.64	42.55	74	54	-11.45	average
7263.58	V	42.35	28.62	19.56	61.91	48.18	74	54	-5.82	average
4958.65	H	40.35	27.36	11.32	51.67	38.68	74	54	-15.32	average
7262.38	H	40.36	24.31	19.56	59.92	43.87	74	54	-10.13	average

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1 FCC ID: WL6-BR95IIX6230 Date of Issue :Jan11,2012

3M

Operation Mode: TX/ CH Low(with WIFI on)

Test Date: Jan 10,2012

Temperature: 23°C

Tested by: Sean

Humidity: 50 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Margin (dB)	Remark
					Peak	AV				
					(dBuV/m)	(dBuV/m)				
4802.43	V	39.88	28.86	10.85	50.73	39.71	74	54	-14.29	average
7202.46	V	39.12	26.15	18.37	57.49	44.52	74	54	-9.48	average
4802.32	H	39.52	27.46	10.84	50.36	38.3	74	54	-15.7	average
7246.61	H	38.46	25.75	18.37	56.83	44.12	74	54	-9.88	average

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1 FCC ID: WL6-BR95IIX6230 Date of Issue :Jan11,2012

Operation Mode: TX/ CH Mid(with WIFI on)

Test Date: Jan 10,2012

Temperature: 23°C

Tested by: Sean

Humidity: 50 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	Margin	Remark
		Reading	Reading	CF	Peak (dBuV/m)	AV (dBuV/m)	Limit (dBuV/m)	Limit (dBuV/m)	(dB)	
		(dBuV)	(dBuV)	(dB)						
4884.47	V	38.75	27.75	11.26	50.01	39.01	74	54	-14.99	average
7325.62	V	41.15	24.62	19.28	60.43	43.9	74	54	-10.1	average
4884.66	H	37	27.64	11.26	48.26	38.9	74	54	-15.1	average
7331.65	H	40.36	24.46	19.31	59.67	43.77	74	54	-10.23	average

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1 FCC ID: WL6-BR95IIX6230 Date of Issue :Jan11,2012

Operation Mode: TX/ CH High(with WIFI on)

Test Date: Jan 10,2012

Temperature: 23°C

Tested by: Sean

Humidity: 50 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak	AV	Ant. / CL	Actual Fs		Peak	AV	Margin	Remark
		Reading	Reading	CF	Peak (dBuV/m)	AV (dBuV/m)	Limit	Limit		
		(dBuV)	(dBuV)	(dB)			(dBuV/m)	(dBuV/m)	(dB)	
4958.58	V	39.64	29.12	11.32	50.96	40.44	74	54	-13.56	average
7325.58	V	40.25	23.42	19.56	59.81	42.98	74	54	-11.02	average
4958.48	H	38.79	29.71	11.32	50.11	41.03	74	54	-12.97	average
7323.42	H	39.26	26.15	19.56	58.82	45.71	74	54	-8.29	average

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
 - a. Peak Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 1MHz, Sweep time = Auto.
 - b. AV Setting 1GHz to 10th harmonics of fundamental, RBW = 1MHz, VBW = 10Hz, Sweep time = Auto.



6.8. POWERLINE CONDUCTED EMISSIONS


LIMIT

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line (LINE and NEUTRAL) and ground at the power terminals.

Test Configuration

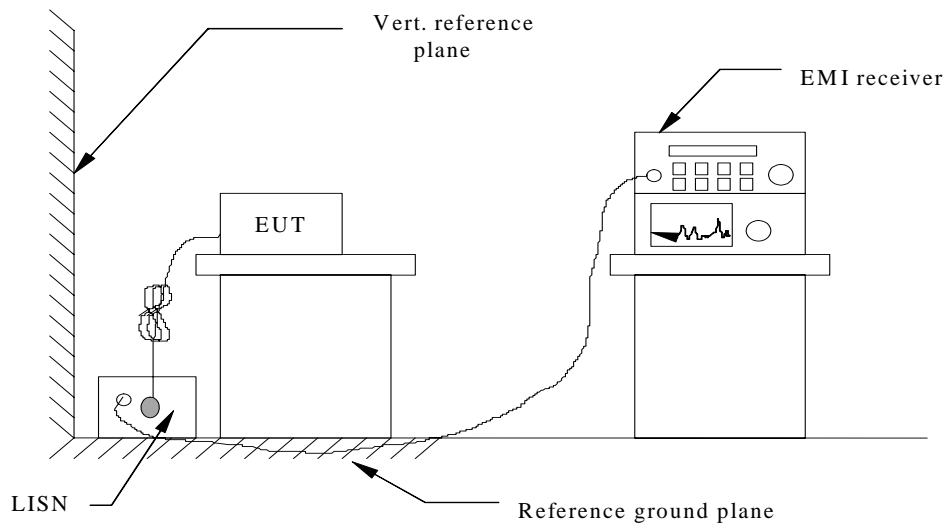

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.



TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

Note:

Freq. = Emission frequency in KHz

Factor (dB) = cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER (The TRANSIENT LIMITER included 10 dB ATTENUATION)

Amptd dBuV = Uncorrected Analyzer/Receiver reading + cable loss + Insertion loss of LISN+ Insertion loss of TRANSIENT LIMITER, if it > 0.5 dB

Limit dBuV = Limit stated in standard

Margin dB = Reading in reference to limit

Calculation Formula

Margin (dB) = Amptd (dBuV) – Limit (dBuV) test results

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.



Compliance Certification Services Inc.

ReportNo: KS120105A01-RP1

FCC ID: WL6-BR95IIX6230

Date of Issue :Jan11,2012

Test Data

Model: BR95II1

Temperature: 25°C

Tested by:Sean


Test Mode: Normal Link(with
WIFI on)

Humidity: 43% RH

Test Results: Pass

Test Plot


LINE

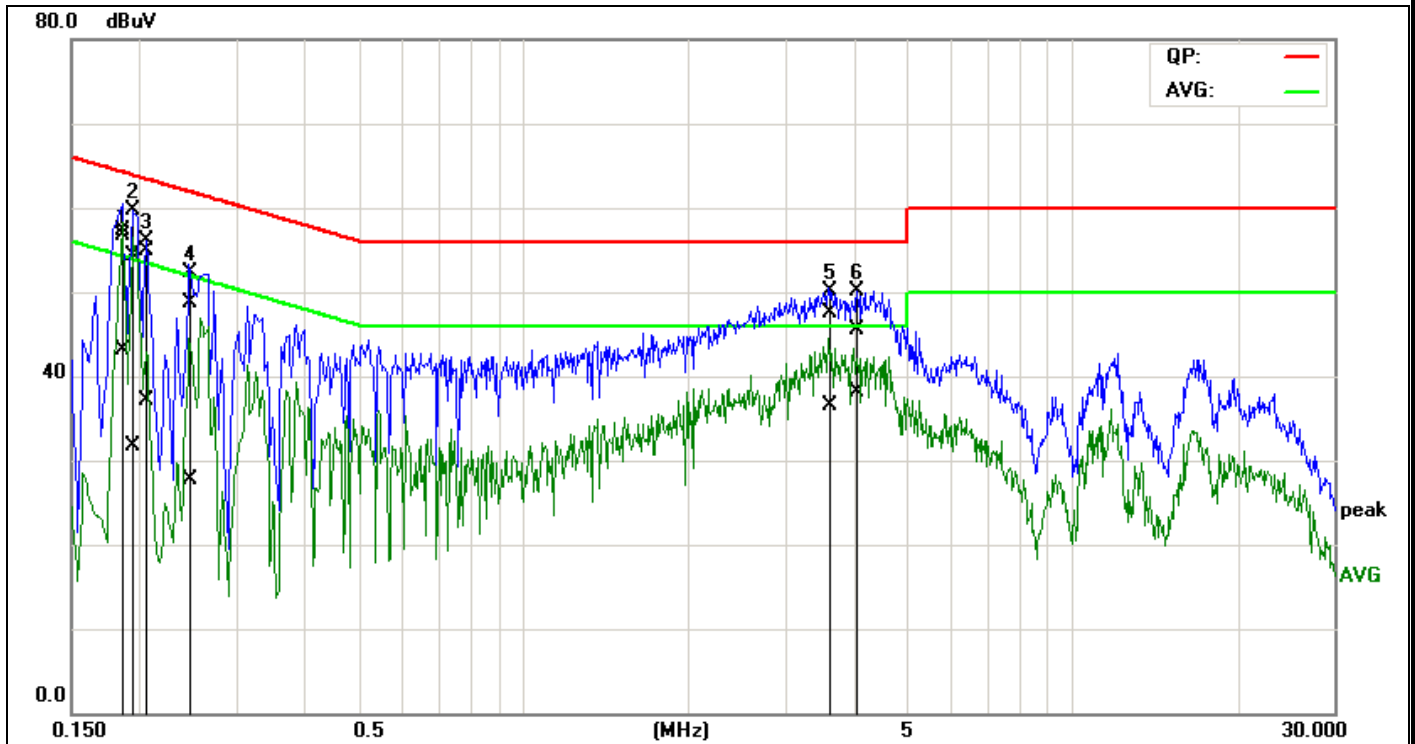

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1874	47.24	33.03	10.09	57.33	43.12	64.15	54.15	-6.82	-11.03	Pass
2	0.1905	44.24	21.59	10.10	54.34	31.69	64.01	54.01	-9.67	-22.32	Pass
3	0.2036	44.80	27.06	10.12	54.92	37.18	63.46	53.46	-8.54	-16.28	Pass
4	0.2490	38.51	17.43	10.19	48.70	27.62	61.79	51.79	-13.09	-24.17	Pass
5	3.6279	36.39	25.45	11.14	47.53	36.59	56.00	46.00	-8.47	-9.41	Pass
6	4.0821	34.42	26.86	11.15	45.57	38.01	56.00	46.00	-10.43	-7.99	Pass



Neutral

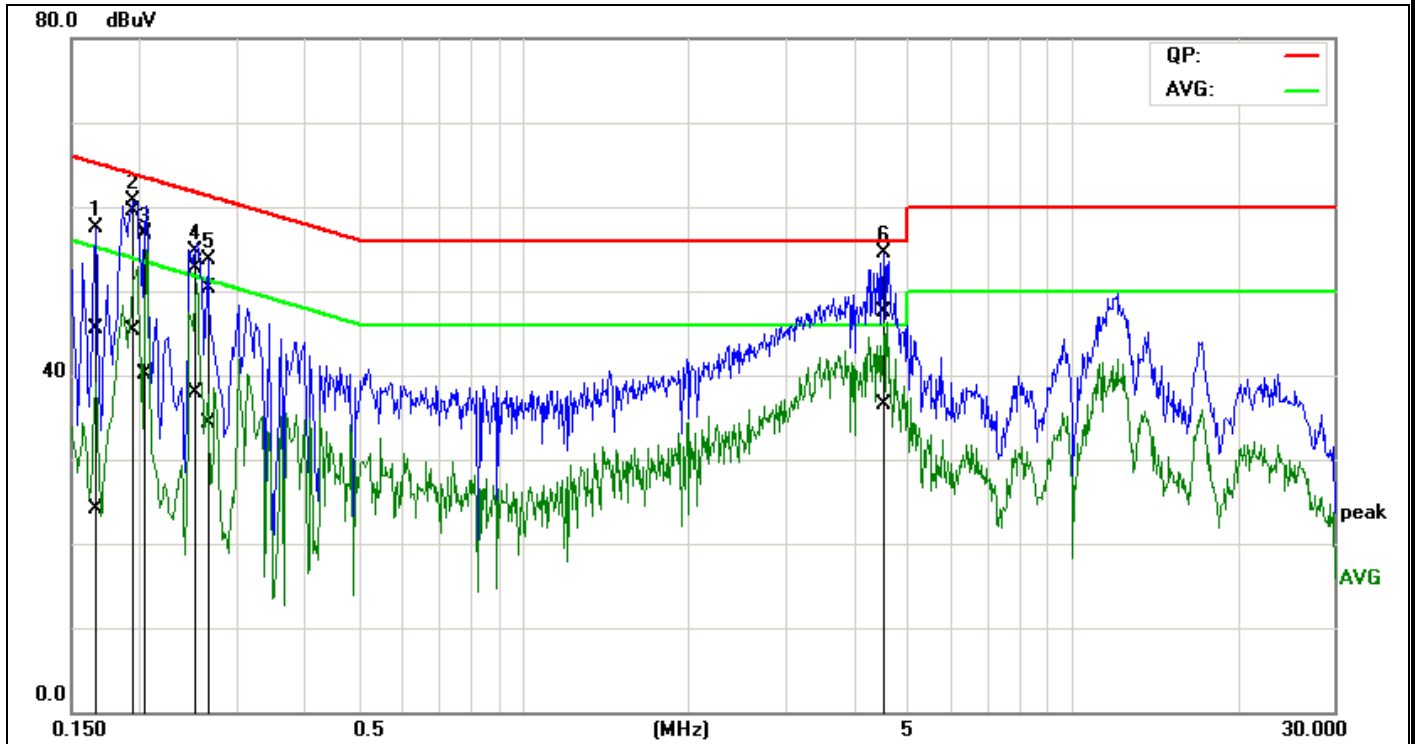

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1680	35.30	13.90	10.16	45.46	24.06	65.06	55.06	-19.60	-31.00	Pass
2*	0.1904	49.31	35.10	10.17	59.48	45.27	64.02	54.02	-4.54	-8.75	Pass
3	0.2017	46.72	29.83	10.18	56.90	40.01	63.54	53.54	-6.64	-13.53	Pass
4	0.2496	42.58	27.71	10.17	52.75	37.88	61.77	51.77	-9.02	-13.89	Pass
5	0.2654	40.14	24.21	10.17	50.31	34.38	61.26	51.26	-10.95	-16.88	Pass
6	4.4797	36.58	25.53	10.89	47.47	36.42	56.00	46.00	-8.53	-9.58	Pass

Remark:

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “---” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.